

FCC and ISED Test Report

Apple Inc
Model: A2337

In accordance with FCC 47 CFR Part 15C and
ISED RSS-GEN (2.4 GHz WLAN, 5 GHz WLAN
and 2.4 GHz Bluetooth)

Prepared for: Apple Inc
One Apple Park Way
Cupertino
California
95014
USA



Add value.
Inspire trust.

FCC ID: BCGA2337 IC: 579C-A2337

COMMERCIAL-IN-CONFIDENCE

Document 75949395-13 Issue 01

SIGNATURE

A handwritten signature in black ink that reads "A3 Lawson".

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Andy Lawson	Senior Engineer	Authorised Signatory	07 October 2020

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Connor Lee	07 October 2020	A handwritten signature in black ink that appears to read "JL".
FCC Accreditation 90987 Octagon House, Fareham Test Laboratory		ISED Accreditation 12669A Octagon House, Fareham Test Laboratory	

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2019 and ISED RSS-GEN: Issue 5 (04-2018) + A1 (03-2019) for the tests detailed in section 1.3.



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2020 TÜV SÜD. This report relates only to the actual item/items tested.

ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD
is a trading name of TUV SUD Ltd
Registered in Scotland at East Kilbride,
Glasgow G75 0QF, United Kingdom
Registered number: SC215164

TUV SUD Ltd is a
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100
Fax: +44 (0) 1489 558101
www.tuv-sud.co.uk

TÜV SÜD
Octagon House
Concorde Way
Fareham
Hampshire PO15 5RL
United Kingdom

Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Deviations from the Standard.....	4
1.6	EUT Modification Record	4
1.7	Test Location.....	4
2	Test Details	5
2.1	AC Power Line Conducted Emissions	5
3	Test Equipment Information	14
3.1	General Test Equipment Used.....	14
4	Incident Reports	15
5	Measurement Uncertainty	16

1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	07 October 2020

Table 1

1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
Model Number(s)	A2337
Serial Number(s)	C02D100QQ9MQ
Hardware Version(s)	REV 1.0
Software Version(s)	20A2352
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2019 ISED RSS-GEN: Issue 5 (04-2018) + A1 (03-2019)
Order Number	0540196335
Date	29-June-2020
Date of Receipt of EUT	18-August-2020 and 28-August-2020
Start of Test	03-September-2020
Finish of Test	03-September-2020
Name of Engineer(s)	Connor Lee
Related Document(s)	ANSI C63.10 (2013)



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C and ISED RSS-GEN is shown below.

Section	Specification Clause		Test Description	Result	Comments/Base Standard
	Part 15C	RSS-GEN			
Configuration and Mode: 2.4 GHz WLAN					
2.1	15.207	8.8	AC Power Line Conducted Emissions	Pass	
Configuration and Mode: 5 GHz WLAN					
2.1	15.207	8.8	AC Power Line Conducted Emissions	Pass	
Configuration and Mode: 2.4 GHz Bluetooth					
2.1	15.207	8.8	AC Power Line Conducted Emissions	Pass	

Table 2



1.4 Product Information

1.4.1 Technical Description

The Equipment Under Test (EUT) was a laptop computer with Bluetooth, Bluetooth Low Energy and 802.11 a/b/g/n/ac/ax capabilities in the 2.4 GHz and 5 GHz bands

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A2337, Serial Number: C02D100QQ9MQ			
0	As supplied by the customer	Not Applicable	Not Applicable

Table 3

1.7 Test Location

TÜV SÜD conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: 2.4 GHz WLAN		
AC Power Line Conducted Emissions	Connor Lee	UKAS
Configuration and Mode: 5 GHz WLAN		
AC Power Line Conducted Emissions	Connor Lee	UKAS
Configuration and Mode: 2.4 GHz Bluetooth		
AC Power Line Conducted Emissions	Connor Lee	UKAS

Table 4

Office Address:

Octagon House
Concorde Way
Segensworth North
Fareham
Hampshire
PO15 5RL
United Kingdom



2 Test Details

2.1 AC Power Line Conducted Emissions

2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.207
ISED RSS-GEN, Clause 8.8

2.1.2 Equipment Under Test and Modification State

A2337, S/N: C02D100QQ9MQ - Modification State 0

2.1.3 Date of Test

03-September-2020

2.1.4 Test Method

The test was performed in accordance with ANSI C63.10, clause 6.2.

The EUT was placed on a non-conductive table 0.8 m above a reference ground plane. A vertical coupling plane was placed 0.4 m from the EUT boundary.

A Line Impedance Stabilisation Network (LISN) was directly bonded to the ground-plane. The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN was 0.8 m.

Interconnecting cables that hanged closer than 0.4 m to the ground plane were folded back and forth in the centre forming a bundle 0.3 m to 0.4 m long.

Input and output cables were terminated with equipment or loads representative of real usage conditions.

The EUT was configured to give the highest level of emissions within reason of a typical installation as described by the manufacturer.

2.1.5 Example Calculation

Quasi-Peak level (dB μ V) = Receiver level (dB μ V) + Correction Factor (dB)
Margin (dB) = Quasi-Peak level (dB μ V) - Limit (dB μ V)

CISPR Average level (dB μ V) = Receiver level (dB μ V) + Correction Factor (dB)
Margin (dB) = CISPR Average level (dB μ V) - Limit (dB μ V)

2.1.6 Example Test Setup Diagram

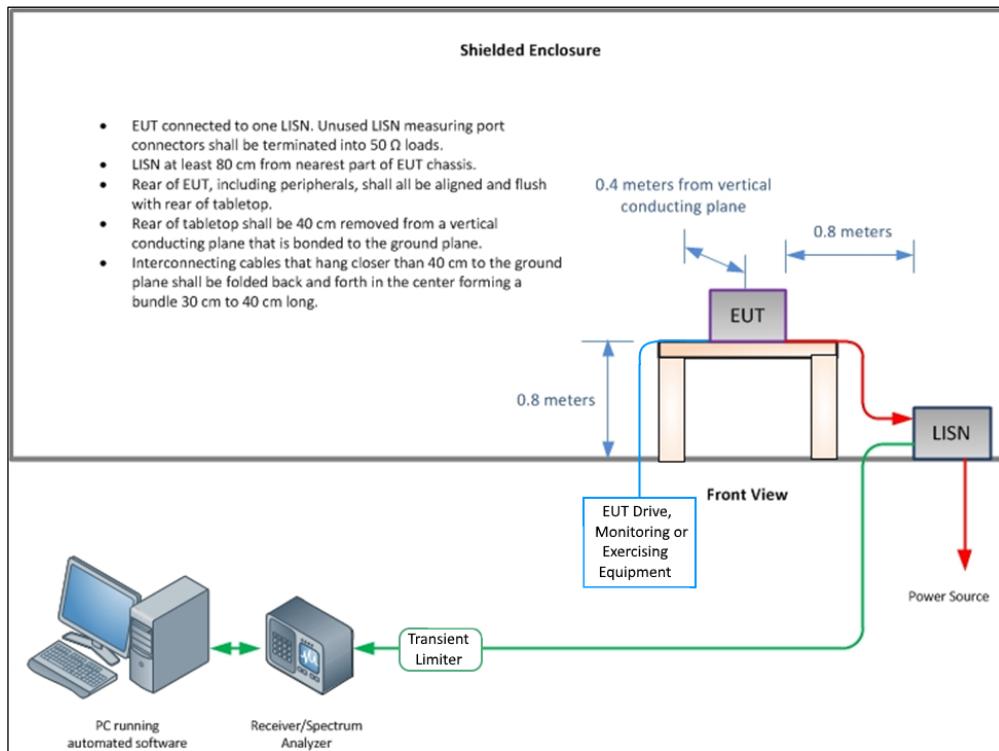


Figure 1 – AC Power Line Conducted Emissions - Example Test Setup

2.1.7 Environmental Conditions

Ambient Temperature 21.6 °C
Relative Humidity 62.4 %



2.1.8 Test Results

2.4 GHz WLAN

Applied supply voltage: 120 V AC

Applied supply frequency: 60 Hz

Frequency (MHz)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Quasi-Peak Margin (dB)	CISPR Average Level (dB μ V)	CISPR Average Limit (dB μ V)	CISPR Average Margin (dB)
0.183	51.4	64.4	-13.0	26.2	54.4	-28.1
0.198	50.8	63.7	-12.9	24.2	53.7	-29.5
0.222	49.8	62.8	-12.9	21.7	52.8	-31.0
0.243	49.2	62.0	-12.8	20.8	52.0	-31.2
0.299	48.1	60.3	-12.1	19.9	50.3	-30.4
0.314	48.0	59.9	-11.8	20.3	49.9	-29.6
0.428	48.4	57.3	-8.9	19.9	47.3	-27.4
0.490	46.4	56.2	-9.7	19.6	46.2	-26.6
0.580	41.2	56.0	-14.8	18.7	46.0	-27.3
0.637	36.7	56.0	-19.3	13.9	46.0	-32.1
0.708	31.8	56.0	-24.2	14.7	46.0	-31.3
0.753	31.7	56.0	-24.3	19.2	46.0	-26.8
0.810	29.0	56.0	-27.0	12.5	46.0	-33.5

Table 5 - Live Line Emissions Results

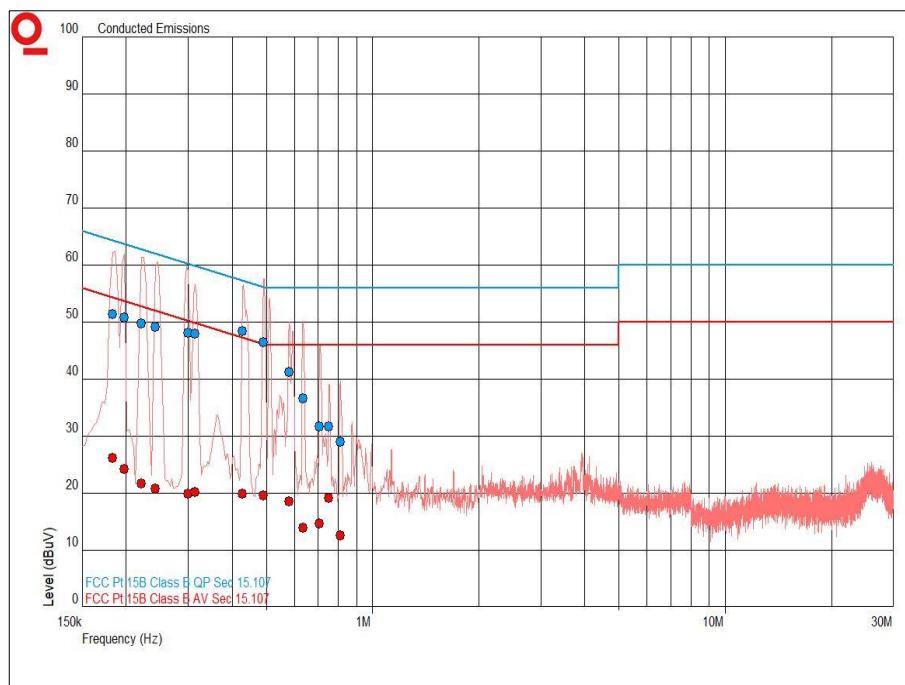


Figure 2 - Live Line - 150 kHz to 30 MHz

Frequency (MHz)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Quasi-Peak Margin (dB)	CISPR Average Level (dB μ V)	CISPR Average Limit (dB μ V)	CISPR Average Margin (dB)
0.165	53.7	65.2	-11.5	27.0	55.2	-28.3
0.234	51.2	62.3	-11.2	22.7	52.3	-29.7
0.338	49.7	59.3	-9.6	25.8	49.3	-23.5
0.371	49.8	58.5	-8.7	28.2	48.5	-20.3
0.419	50.2	57.5	-7.3	21.7	47.5	-25.8
0.502	48.3	56.0	-7.7	25.7	46.0	-20.3
0.517	47.7	56.0	-8.3	27.4	46.0	-18.6
0.544	46.6	56.0	-9.4	30.7	46.0	-15.3
0.634	40.1	56.0	-15.9	16.3	46.0	-29.7
0.677	36.9	56.0	-19.1	21.9	46.0	-24.1
0.732	34.7	56.0	-21.3	26.1	46.0	-19.9
0.759	32.6	56.0	-23.4	21.2	46.0	-24.8
0.786	30.8	56.0	-25.2	13.7	46.0	-32.3
0.854	28.2	56.0	-27.8	18.0	46.0	-28.0
0.902	26.3	56.0	-29.7	14.8	46.0	-31.2

Table 6 - Neutral Line Emissions Results

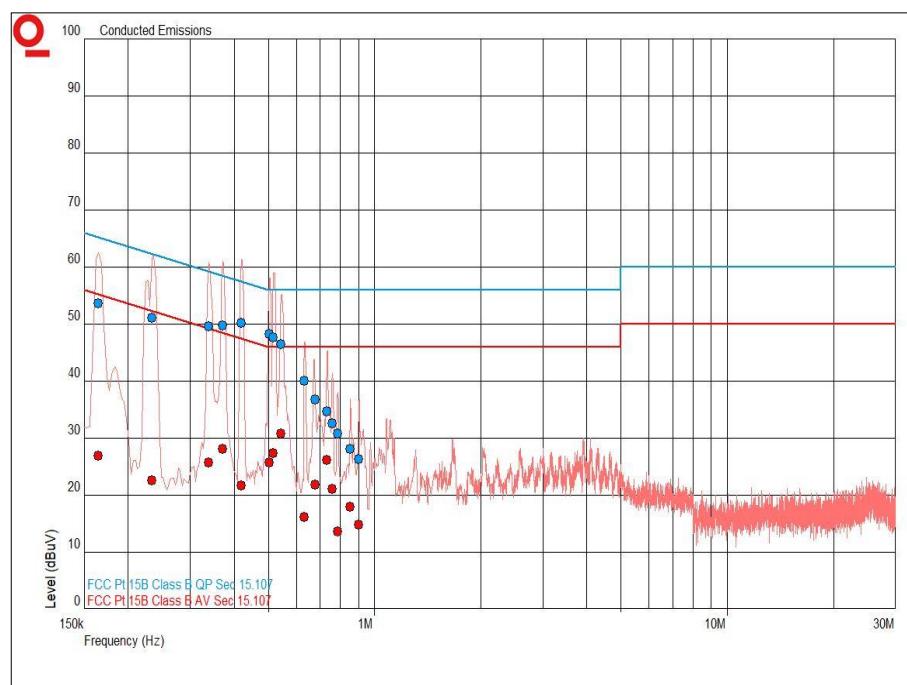


Figure 3 - Neutral Line - 150 kHz to 30 MHz



5 GHz WLAN

Applied supply voltage: 120 V AC
Applied supply frequency: 60 Hz

Frequency (MHz)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Quasi-Peak Margin (dB)	CISPR Average Level (dB μ V)	CISPR Average Limit (dB μ V)	CISPR Average Margin (dB)
0.162	53.8	65.4	-11.5	26.8	55.4	-28.6
0.181	53.4	64.5	-11.1	29.0	54.5	-25.5
0.246	51.3	61.9	-10.6	21.8	51.9	-30.1
0.311	50.3	59.9	-9.7	21.4	49.9	-28.5
0.364	50.5	58.6	-8.1	27.7	48.6	-20.9
0.413	51.2	57.6	-6.4	21.6	47.6	-26.0
0.475	49.5	56.4	-6.9	21.6	46.4	-24.8
0.529	46.4	56.0	-9.6	25.6	46.0	-20.4
0.556	44.4	56.0	-11.6	28.1	46.0	-17.9
0.684	34.9	56.0	-21.1	19.4	46.0	-26.6
0.717	32.9	56.0	-23.1	17.7	46.0	-28.3
0.762	31.0	56.0	-25.0	14.8	46.0	-31.2
0.801	29.2	56.0	-26.8	12.1	46.0	-33.9

Table 7 - Live Line Emissions Results

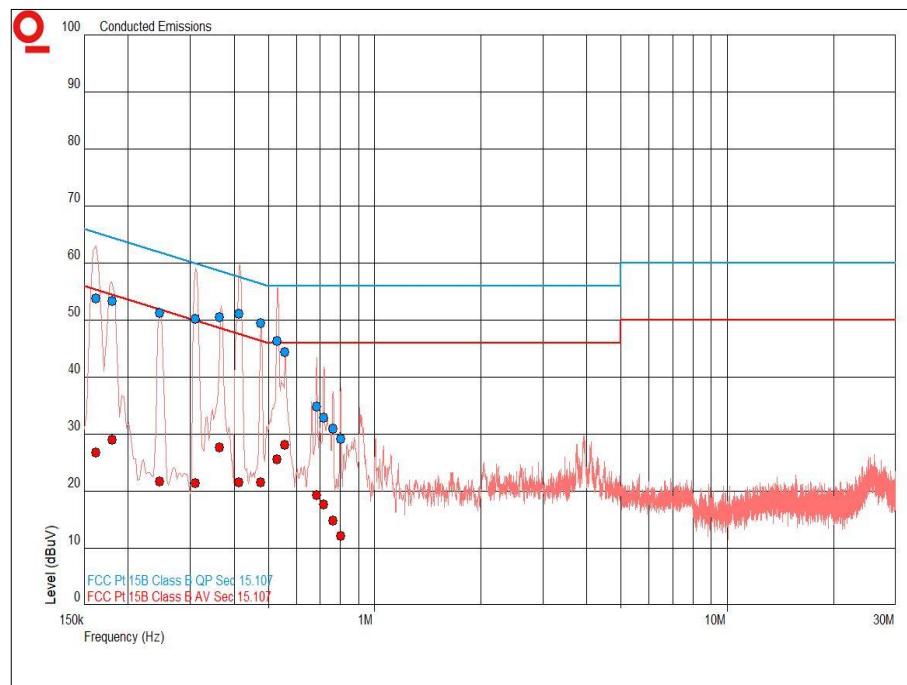


Figure 4 - Live Line - 150 kHz to 30 MHz

Frequency (MHz)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Quasi-Peak Margin (dB)	CISPR Average Level (dB μ V)	CISPR Average Limit (dB μ V)	CISPR Average Margin (dB)
0.174	51.9	64.8	-12.8	26.3	54.8	-28.5
0.195	51.2	63.8	-12.6	26.0	53.8	-27.8
0.347	48.2	59.0	-10.8	23.4	49.0	-25.6
0.368	48.4	58.5	-10.1	26.4	48.5	-22.1
0.398	48.5	57.9	-9.4	20.6	47.9	-27.3
0.425	48.6	57.4	-8.7	20.4	47.4	-27.0
0.437	48.3	57.1	-8.8	20.4	47.1	-26.8
0.574	42.1	56.0	-13.9	20.7	46.0	-25.3
0.643	30.9	56.0	-25.1	13.4	46.0	-32.6
0.701	37.6	56.0	-18.4	18.1	46.0	-27.9
0.840	25.2	56.0	-30.8	15.0	46.0	-31.0

Table 8 - Neutral Line Emissions Results

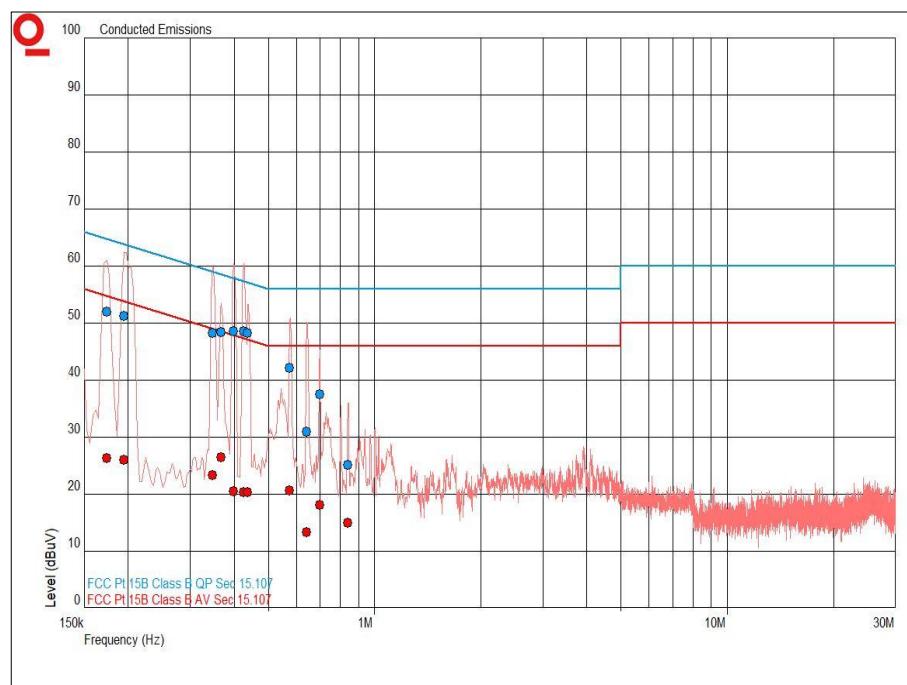


Figure 5 - Neutral Line - 150 kHz to 30 MHz



2.4 GHz Bluetooth

Applied supply voltage: 120 V AC
Applied supply frequency: 60 Hz

Frequency (MHz)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Quasi-Peak Margin (dB)	CISPR Average Level (dB μ V)	CISPR Average Limit (dB μ V)	CISPR Average Margin (dB)
0.213	50.1	63.1	-13.0	21.7	53.1	-31.4
0.314	49.4	59.9	-10.5	21.6	49.9	-28.3
0.362	49.4	58.7	-9.2	27.6	48.7	-21.0
0.383	49.7	58.2	-8.5	24.7	48.2	-23.6
0.460	49.5	56.7	-7.2	21.2	46.7	-25.4
0.475	49.1	56.4	-7.3	21.6	46.4	-24.8
0.553	46.8	56.0	-9.2	28.1	46.0	-17.9
0.583	44.1	56.0	-11.9	18.7	46.0	-27.3
0.681	36.7	56.0	-19.3	19.2	46.0	-26.8
0.714	34.7	56.0	-21.3	18.6	46.0	-27.4
0.777	31.4	56.0	-24.6	12.9	46.0	-33.1
0.804	30.1	56.0	-25.9	12.4	46.0	-33.6
0.822	29.4	56.0	-26.6	13.5	46.0	-32.5

Table 9 - Live Line Emissions Results

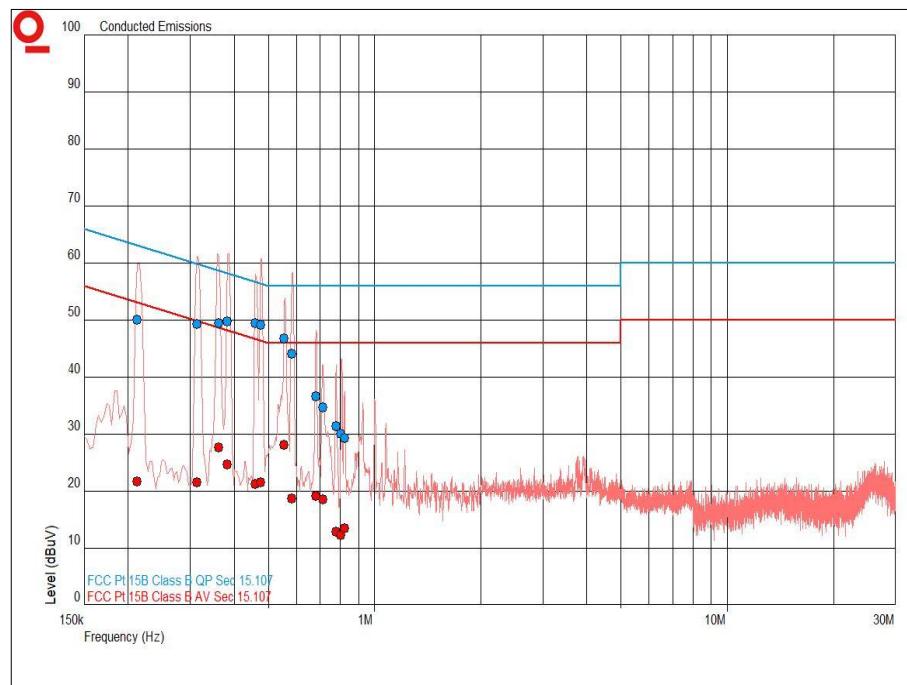


Figure 6 - Live Line - 150 kHz to 30 MHz

Frequency (MHz)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Quasi-Peak Margin (dB)	CISPR Average Level (dB μ V)	CISPR Average Limit (dB μ V)	CISPR Average Margin (dB)
0.263	49.6	61.3	-11.7	20.8	51.3	-30.5
0.326	47.9	59.5	-11.7	21.0	49.5	-28.5
0.353	47.8	58.9	-11.1	24.8	48.9	-24.1
0.449	47.9	56.9	-9.0	20.3	46.9	-26.6
0.472	47.1	56.5	-9.4	20.7	46.5	-25.8
0.577	43.7	56.0	-12.3	21.2	46.0	-24.8
0.640	38.8	56.0	-17.2	16.3	46.0	-29.7
0.693	35.3	56.0	-20.7	23.5	46.0	-22.5
0.804	29.3	56.0	-26.7	13.1	46.0	-32.9

Table 10 - Neutral Line Emissions Results

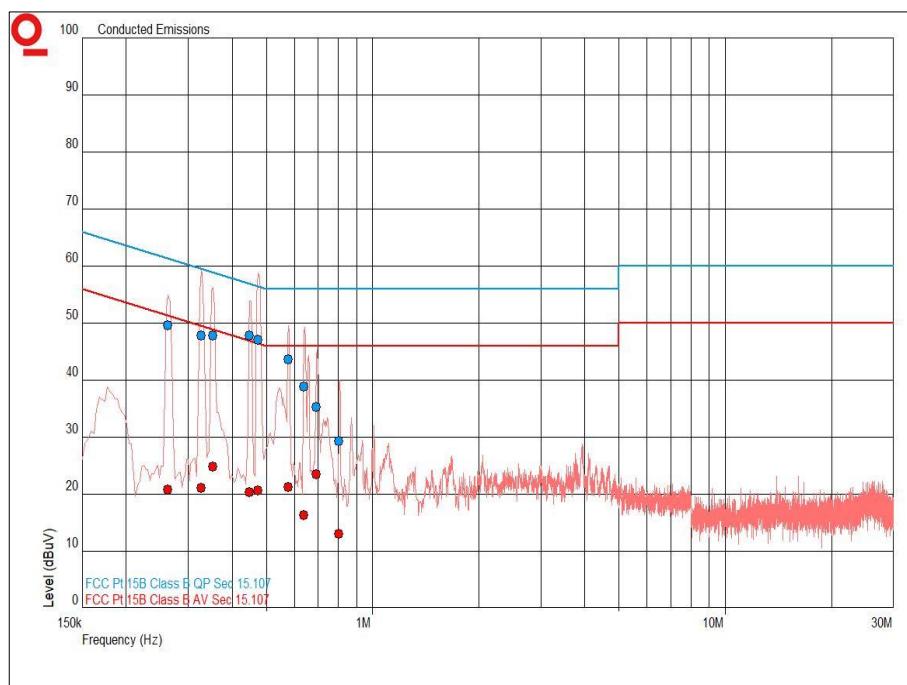


Figure 7 - Neutral Line - 150 kHz to 30 MHz

FCC 47 CFR Part 15, Limit Clause 15.207 and ISED RSS-GEN, Limit Clause 8.8

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	CISPR Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

Table 11

*Decreases with the logarithm of the frequency.

2.1.9 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Compliance 5 Emissions	Teseq	V5.26.51	3275		Software
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	3-Jan-2021
Transient Limiter	Hewlett Packard	11947A	15	12	2-Oct-2020
3 phase LISN	Rohde & Schwarz	ESH2-Z5	323	12	21-Jan-2021
8 Meter Cable	Teledyne	PR90-088-8MTR	5212	12	30-Aug-2020
Cable	Teledyne	PRO-088-8MTR	5462	6	6-Sep-2020

Table 12



3 Test Equipment Information

3.1 General Test Equipment Used

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Power Supply Unit	Farnell	LB30-4	158	-	O/P Mon
Multimeter	Iso-tech	IDM 101	2118	12	07-Feb-2021
Thermo-Hygro-Barometer	PCE Instruments	PCE-THB-40	5473	12	16-Mar-2021

Table 13

O/P Mon – Output Monitored using calibrated equipment



4 Incident Reports

No incidents reports were raised.

5 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
AC Power Line Conducted Emissions	150 kHz to 30 MHz, LISN, ± 3.7 dB

Table 14

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.