

2.5.5 Example Test Setup Diagram

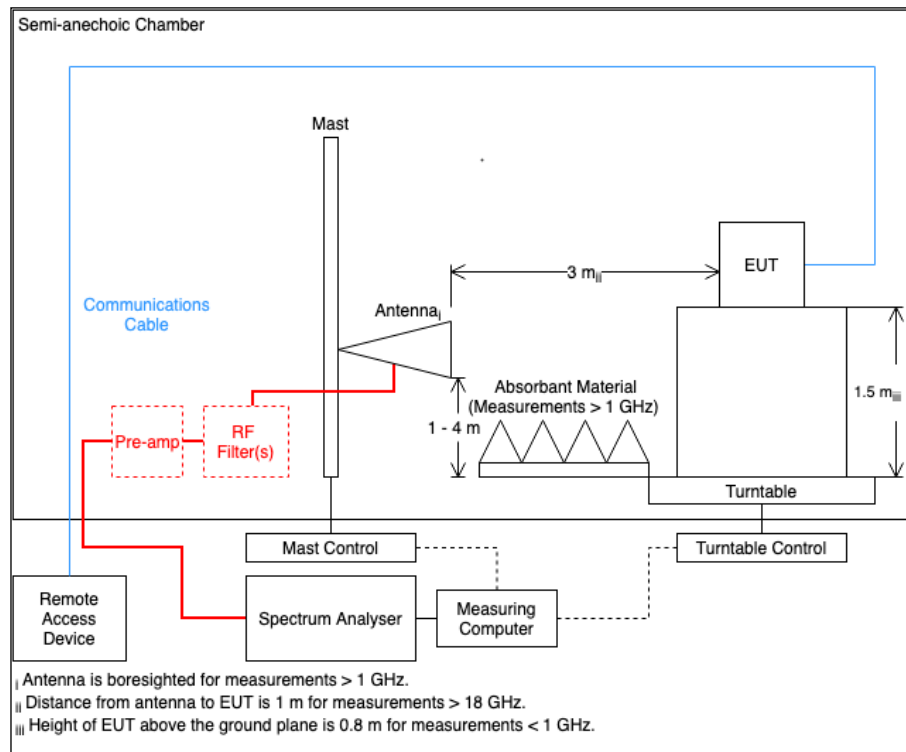


Figure 235

2.5.6 Environmental Conditions

Ambient Temperature	22.3 - 23.6 °C
Relative Humidity	41.6 - 55.0 %

2.5.7 Test Results

2.4 GHz Bluetooth LE/HDR

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
4003.353	33.90	54.00	-20.10	RMS	244	338	Vertical

Table 99 - 2402 MHz (CH37), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

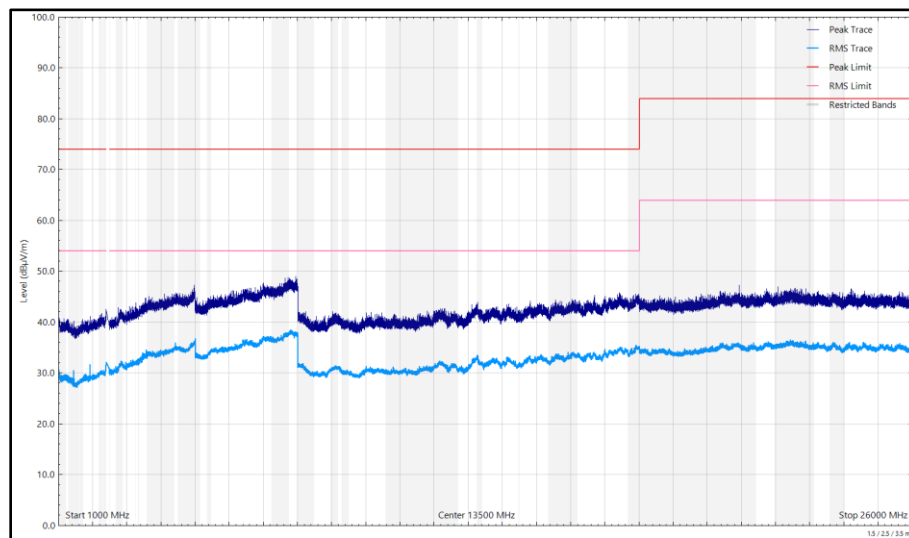


Figure 236 - 2402 MHz (CH37), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

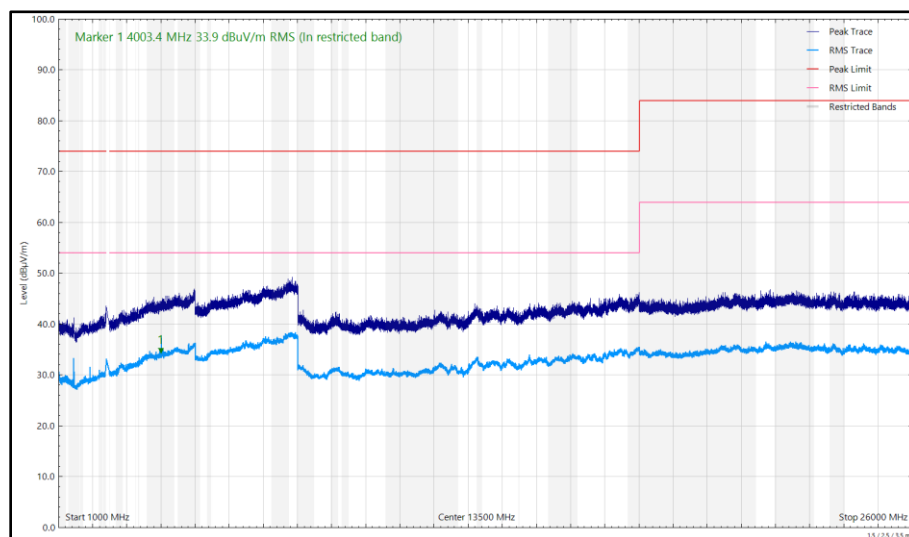


Figure 237 - 2402 MHz (CH37), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
334.250	20.47	46.00	-25.53	Q-Peak	154	113	Horizontal
403.106	25.31	46.00	-20.69	Q-Peak	47	104	Horizontal
4066.752	33.47	54.00	-20.53	RMS	112	382	Vertical

Table 100 - 2440 MHz (CH17), LE1M, iPA, Core 0 + Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

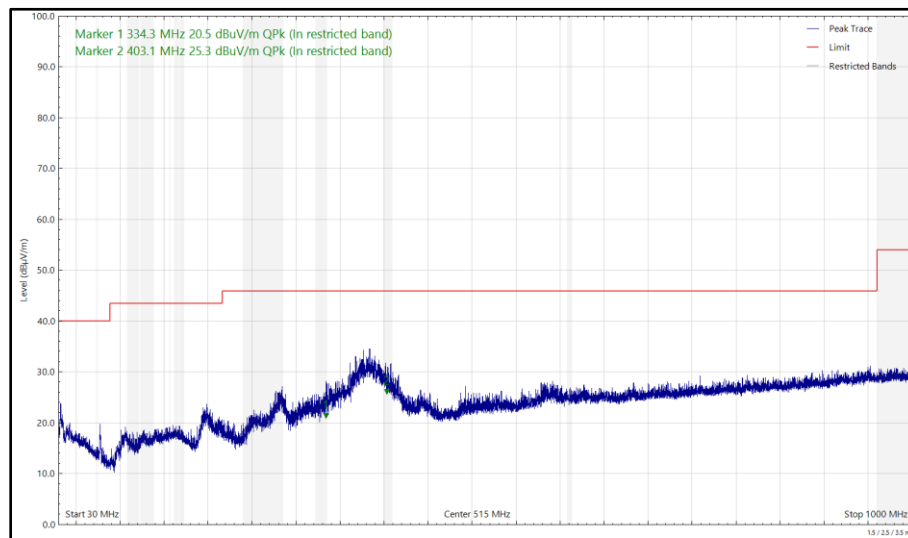


Figure 238 - 2440 MHz (CH17), LE1M, iPA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

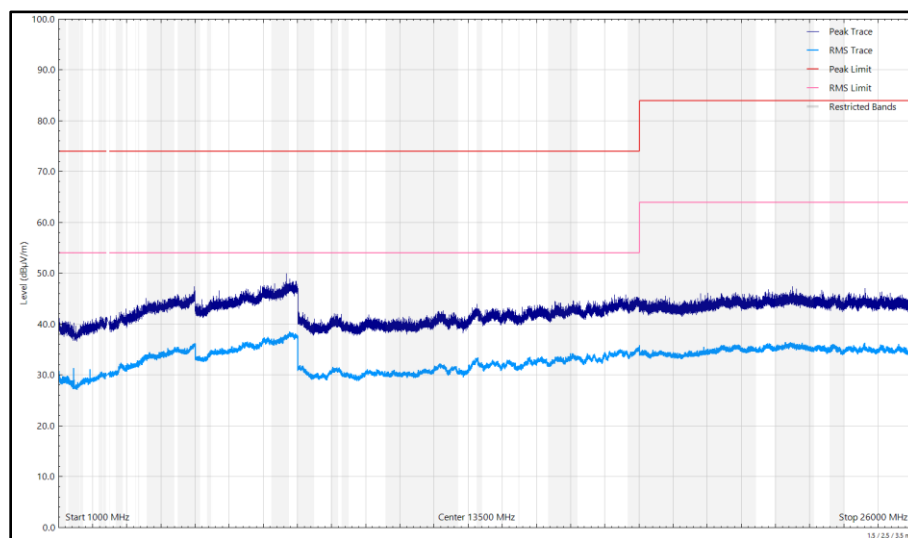


Figure 239 - 2440 MHz (CH17), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

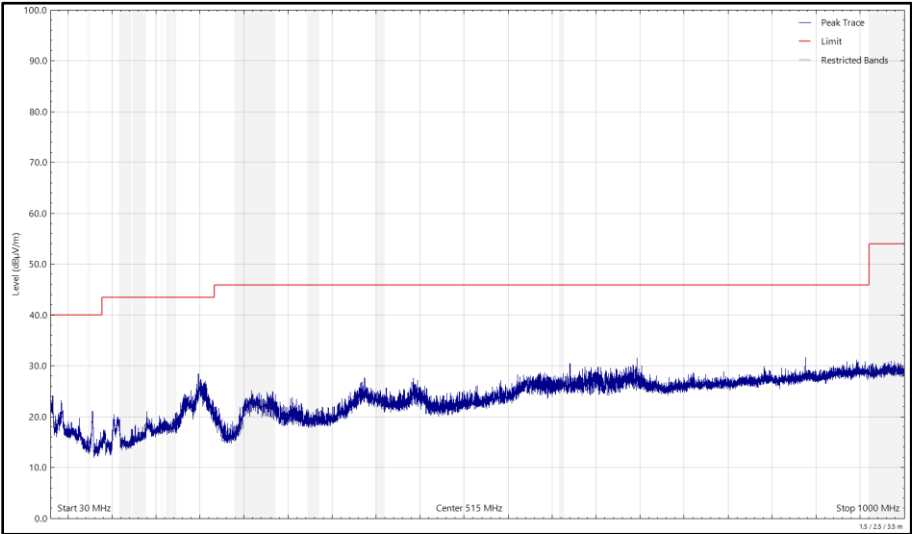


Figure 240 - 2440 MHz (CH17), LE1M, iPA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

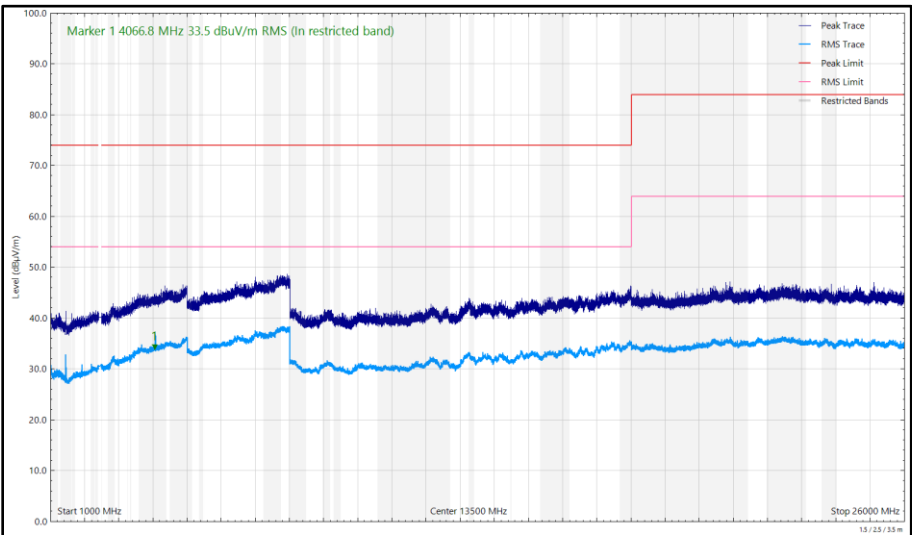


Figure 241 - 2440 MHz (CH17), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 101 - 2480 MHz (CH39), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

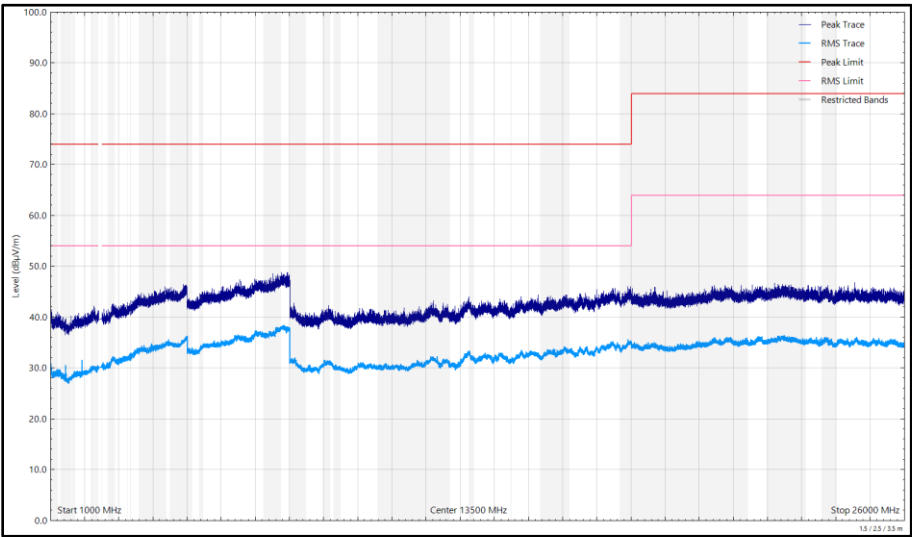


Figure 242 - 2480 MHz (CH39), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

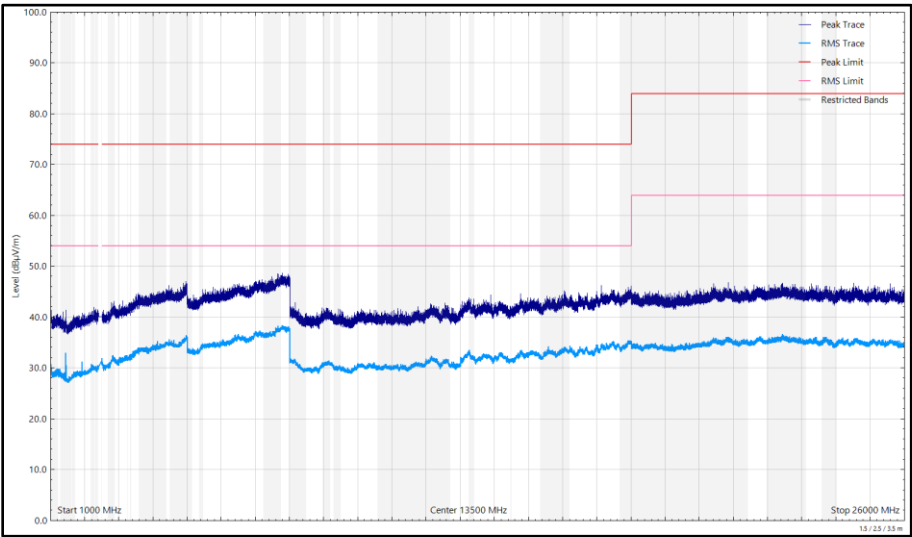


Figure 243 - 2480 MHz (CH39), LE1M, iPA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 102 - 2402 MHz (CH37), LE1M, iPA, Core 2, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

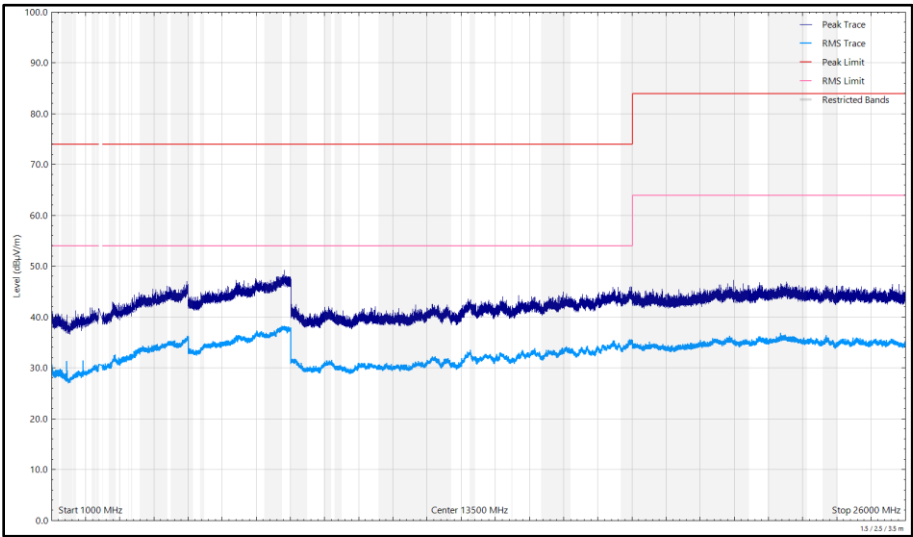


Figure 244 - 2402 MHz (CH37), LE1M, iPA, Core 2, 1 GHz to 26 GHz, Horizontal

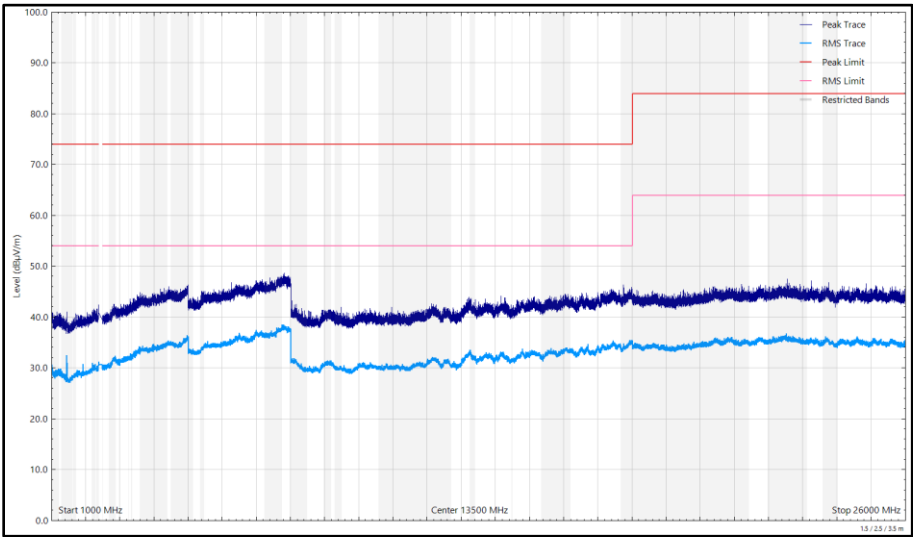


Figure 245 - 2402 MHz (CH37), LE1M, iPA, Core 2, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
281.794	21.85	46.00	-24.15	Q-Peak	243	100	Horizontal
400.599	25.26	46.00	-20.74	Q-Peak	144	100	Horizontal
608.708	22.86	46.00	-23.14	Q-Peak	169	111	Vertical

Table 103 - 2440 MHz (CH17), LE1M, iPA, Core 2, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

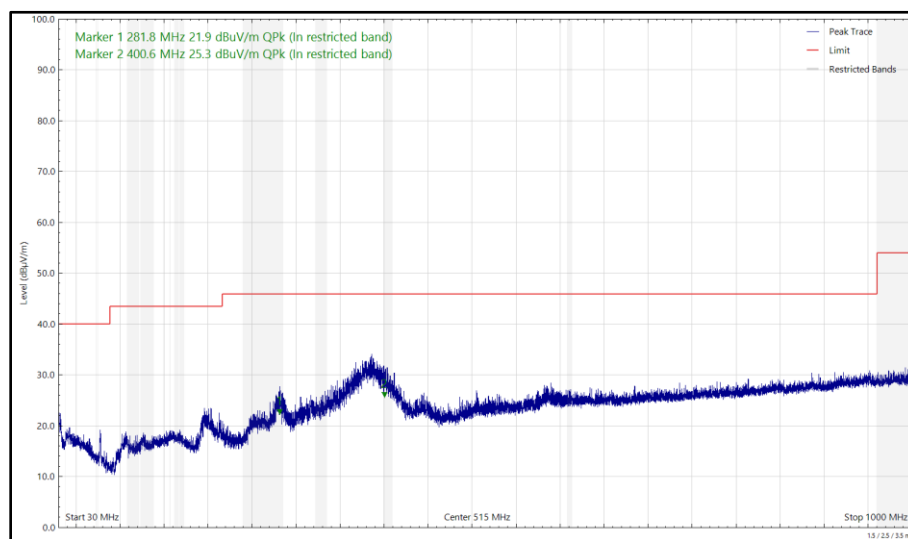


Figure 246 - 2440 MHz (CH17), LE1M, iPA, Core 2, 30 MHz to 1 GHz, Horizontal (Peak)

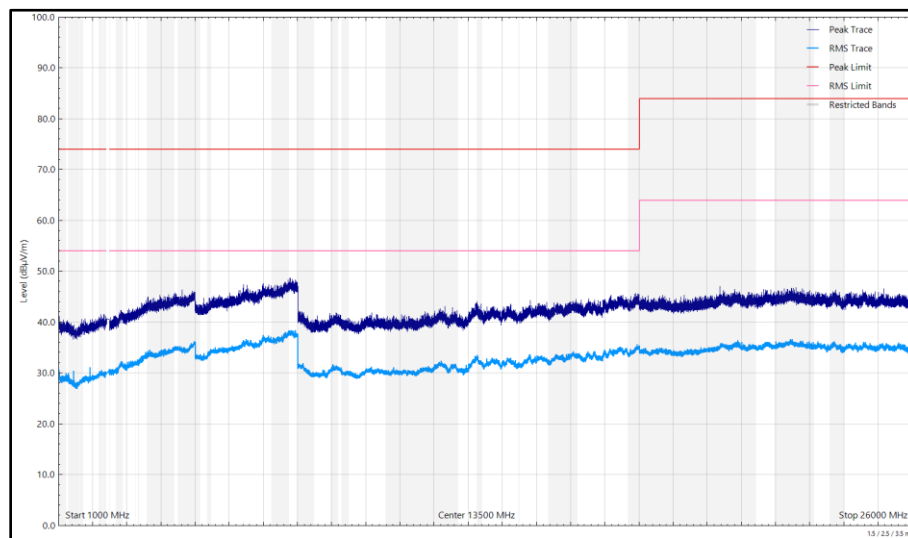


Figure 247 - 2440 MHz (CH17), LE1M, iPA, Core 2, 1 GHz to 26 GHz, Horizontal

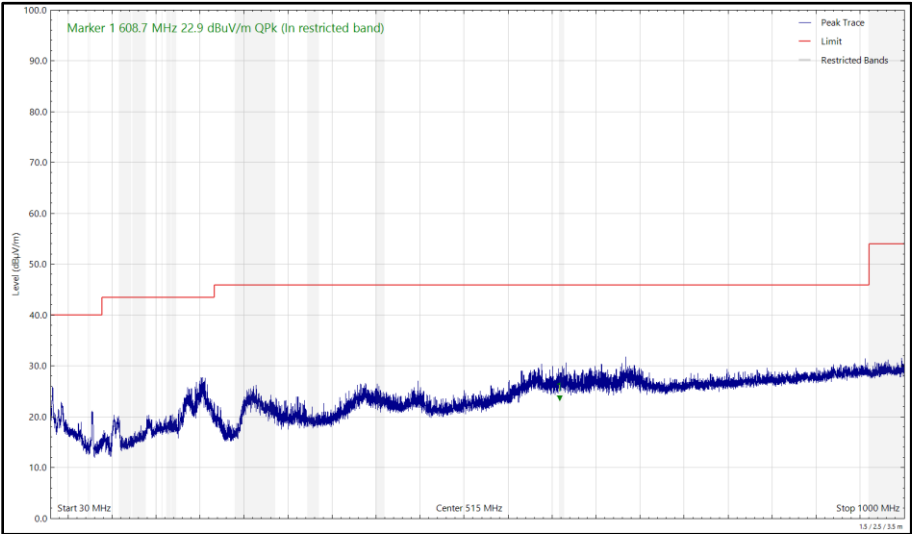


Figure 248 - 2440 MHz (CH17), LE1M, iPA, Core 2, 30 MHz to 1 GHz, Vertical (Peak)

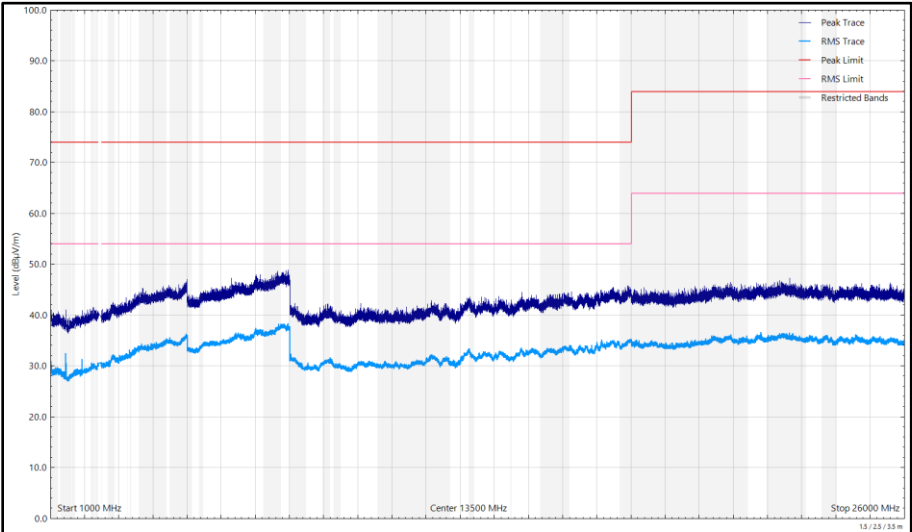


Figure 249 - 2440 MHz (CH17), LE1M, iPA, Core 2, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 104 - 2480 MHz (CH39), LE1M, iPA, Core 2, 1 GHz to 26 GHz

*No emissions found within 10 dB of the limit.

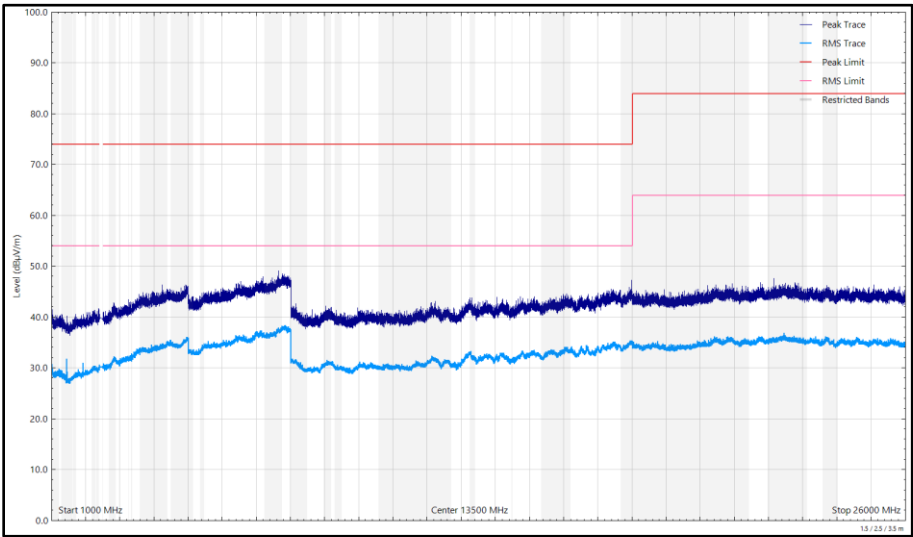


Figure 250 - 2480 MHz (CH39), LE1M, iPA, Core 2, 1 GHz to 26 GHz, Horizontal

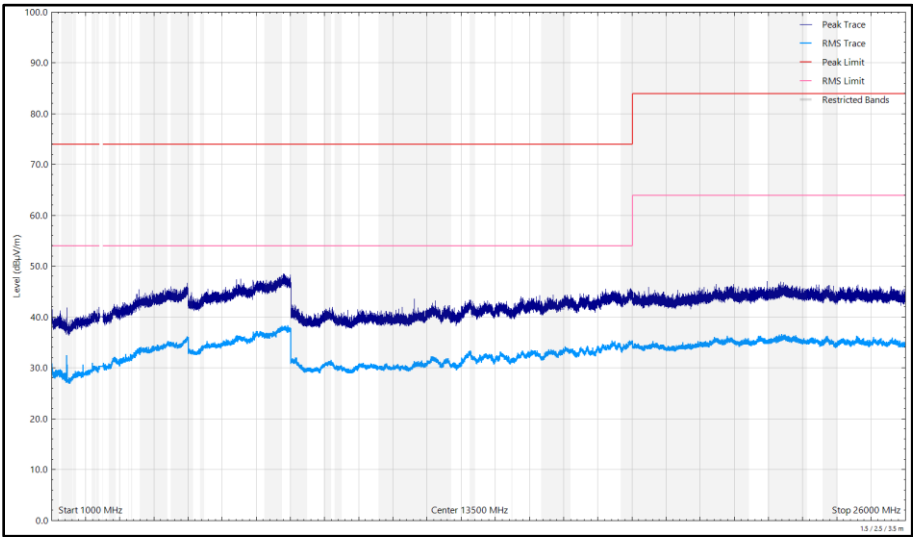


Figure 251 - 2480 MHz (CH39), LE1M, iPA, Core 2, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2389.951	37.09	54.00	-16.91	RMS	118	145	Vertical

Table 105 - 2402 MHz (CH37), LE1M, ePA, Core 0 + Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

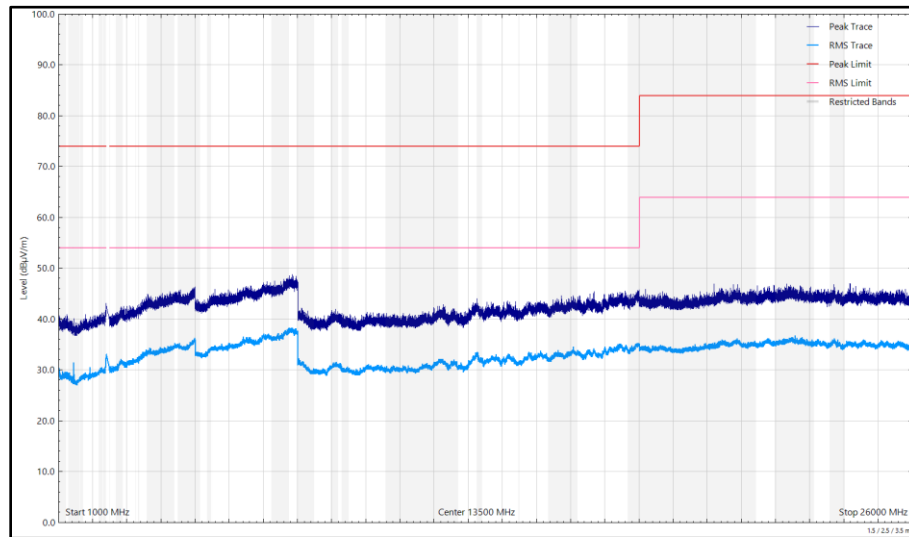


Figure 252 - 2402 MHz (CH37), LE1M, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

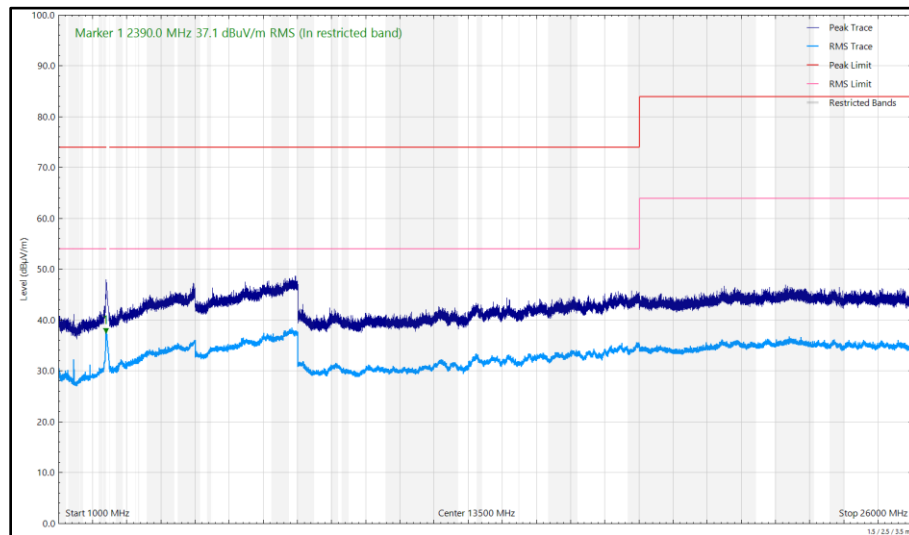


Figure 253 - 2402 MHz (CH37), LE1M, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
280.938	22.40	46.00	-23.60	Q-Peak	236	106	Horizontal
401.736	23.79	46.00	-22.21	Q-Peak	151	106	Horizontal
610.012	23.83	46.00	-22.17	Q-Peak	161	101	Vertical

Table 106 - 2440 MHz (CH17), LE1M, ePA, Core 0 + Core 1, 30 MHz to 26 GHz

No other emissions found within 10 dB of the limit.

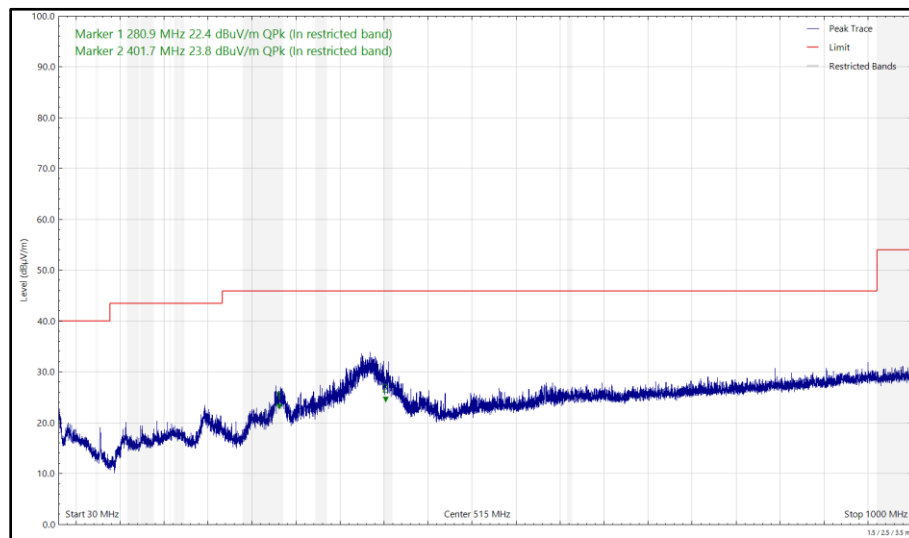


Figure 254 - 2440 MHz (CH17), LE1M, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

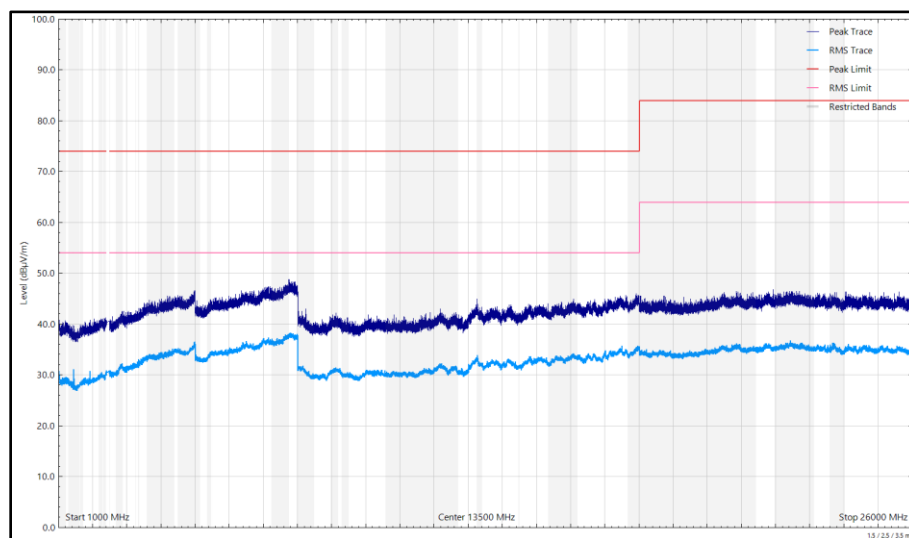


Figure 255 - 2440 MHz (CH17), LE1M, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

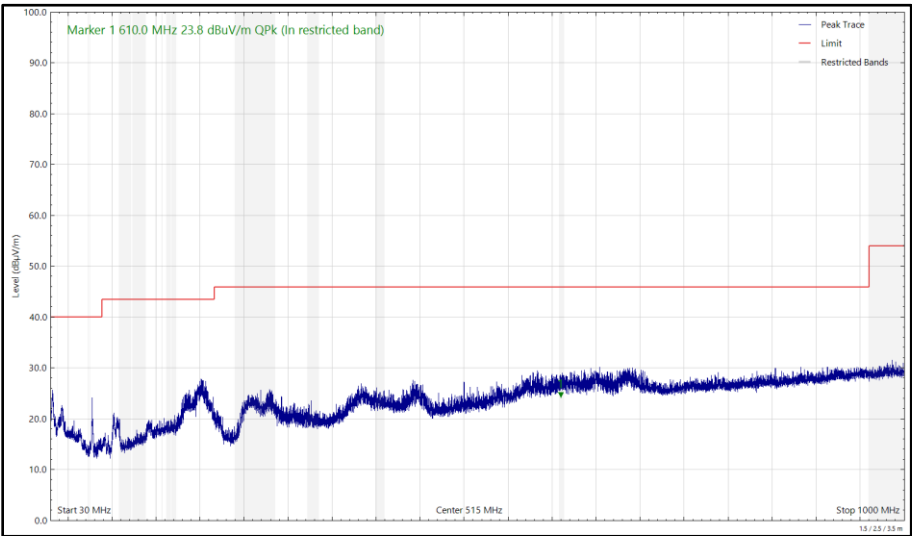


Figure 256 - 2440 MHz (CH17), LE1M, ePA, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

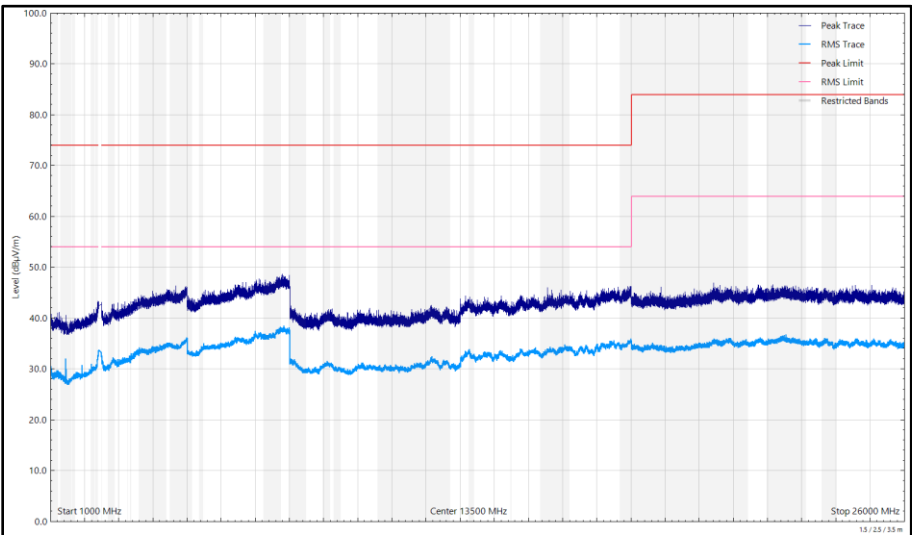


Figure 257 - 2440 MHz (CH17), LE1M, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2498.597	36.92	54.00	-17.08	RMS	281	105	Vertical

Table 107 - 2480 MHz (CH39), LE1M, ePA, Core 0 + Core 1, 1 GHz to 26 GHz

No other emissions found within 10 dB of the limit.

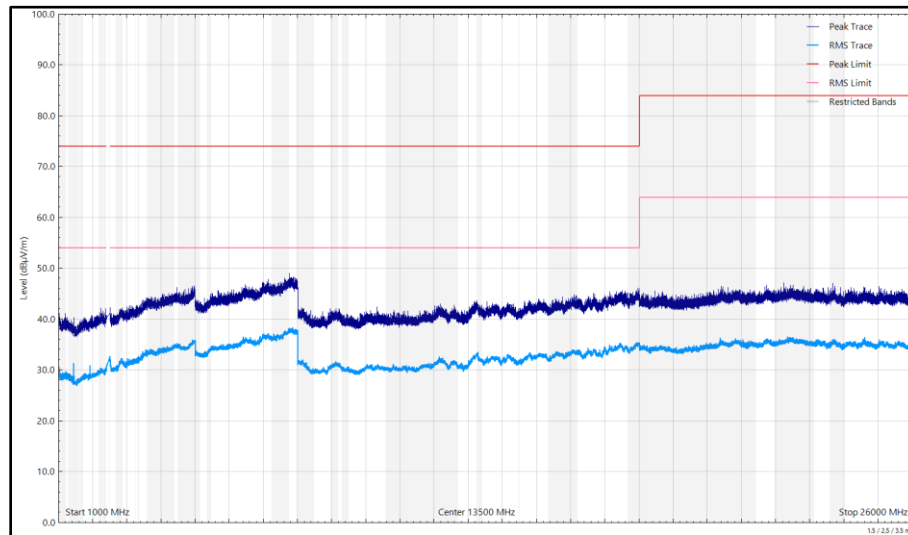


Figure 258 - 2480 MHz (CH39), LE1M, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

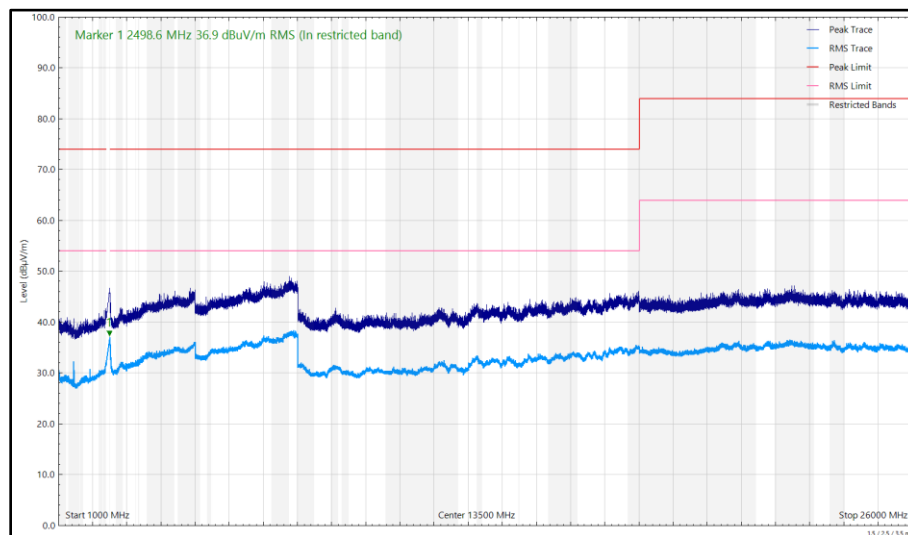


Figure 259 - 2480 MHz (CH39), LE1M, ePA, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in RSS-GEN, clause 8.10, must also comply with the radiated emission limits specified in RSS-GEN clause 8.9.



2.5.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 16, RF Chamber 17 and RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Cable 2.92m	Junkosha	MWX241-01000KMS	5413	12	23-May-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	11-Sep-2024
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	5935	12	10-Jun-2025
1500W (300V 12A) AC Power Supply	iTech	IT7324	5957	-	O/P Mon
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
3m Semi-Anechoic Chamber, Chamber16	Albatross Projects	RF Chamber 16	5972	36	24-May-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5973	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5974	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5975	-	TU
Cable (N to N 7m)	Junkosha	MWX221-07000NMSNMS/B	6005	12	20-May-2025
Cable (N to N 1m)	Junkosha	MWX221-01000AMSAMS/B	6009	12	20-May-2025
SAC Switch Unit	TUV SUD	TUV_SSU_001	6144	12	11-Dec-2024
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
Digital Multimeter	Fluke	115	6146	12	06-Jun-2025
Humidity & Temperature meter	R.S Components	1364	6149	12	12-Aug-2025
8GHz Highpass Filter	Wainwright	WHKX 7150 8000 18000 50SS	6194	12	23-Apr-2025
Pre Amp 8 - 18 GHz	Wright Technologies	APS06 0061	6200	12	03-Jun-2025
Attenuator 4dB	Pasternack	PE7074-4	6204	24	20-Jun-2026
Cable (SMA to SMA 20cm)	TUV SUD	MH-FH 8-18	6215	12	23-Apr-2025
USB Spectrum Analyser	Signal Hound	SA124B	6295	-	TU
USB Spectrum Analyser	Signal Hound	SA124B	6298	-	TU
Cable (SMA to SMA 8m)	Junkosha	MWX221-08000AMSAMS/B	6318	12	18-Feb-2025
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	6323	12	04-Feb-2025
EMC Test Receiver	Rohde & Schwarz	ESW44	6333	12	16-Feb-2025
SAC Switch Unit	TUV SUD	TUV_SSU_004 PLC	6349	12	07-May-2025
USB Spectrum Analyser	Signal Hound	SA124B	6383	-	TU
2m Coaxial Cable Assy	Junkosha	MWX241-02000KMSKMS/A	6413	-	O/P Mon



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	6456	24	10-Feb-2025
DRG Horn Antenna (8-18 GHz)	Schwarzbeck	HWRD750	6458	12	05-May-2025
Humidity and Temperature Meter	R.S Components	1364	6486	12	04-Jun-2025
3m Semi-Anechoic Chamber	Albatross Projects	Chamber 18	6597	36	07-Feb-2026
AC Power Supply	iTech	IT7324	6657	-	O/P Mon
3m Semi-Anechoic Chamber	Albatross Projects	RF Chamber 17	6658	36	28-Jan-2026
Mast and Turntable Controller	Maturo Gmbh	FCU3.0	6659	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6660	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6661	-	TU
8m Cable	Junkosha	MWX221-08000AMSAMS/B	6748	12	01-Feb-2025
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6771	24	17-Jan-2025
Turntable	Maturo Gmbh	TT1.5SI	6797	-	TU
AC Programmable Power Supply	iTech	IT7324	6812	-	O/P Mon
Broad-Band Horn Antenna 1-10GHz N	Schwarzbeck	BBHA9120B	6825	12	18-Jul-2025

Table 108

TU - Traceability Unscheduled
O/P Mon - Output Monitored using calibrated equipment



2.6 Power Spectral Density

2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (e)
ISED RSS-247, Clause 5.2
ISED RSS-GEN, Clause 6.12

2.6.2 Equipment Under Test and Modification State

A3239, S/N: J3FYV0C64X - Modification State 0

2.6.3 Date of Test

17-September-2024 to 01-October-2024

2.6.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.10.2.

MIMO output port summing was performed in accordance with KDB 662911 D01 E)2)b).

2.6.5 Environmental Conditions

Ambient Temperature	22.3 - 22.9 °C
Relative Humidity	55.6 - 58.9 %



2.6.6 Test Results

2.4 GHz Bluetooth LE/HDR

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.4
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	1.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2404	3.0	-10.84	-	-	-	-	8.00	-18.84
2441	3.0	-11.02	-	-	-	-	8.00	-19.02
2476	3.0	-11.12	-	-	-	-	8.00	-19.12

Table 109 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	1.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2404	3.0	-11.05	-	-	-	-	8.00	-19.05
2441	3.0	-11.90	-	-	-	-	8.00	-19.90
2476	3.0	-11.02	-	-	-	-	8.00	-19.02

Table 110 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	60.5
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	1.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-7.23	-	-	-	-	8.00	-15.23
2440	3.0	-7.29	-	-	-	-	8.00	-15.29
2480	3.0	-7.68	-	-	-	-	8.00	-15.68

Table 111 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	31.4
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	1.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-9.73	-	-	-	-	8.00	-17.73
2440	3.0	-9.58	-	-	-	-	8.00	-17.58
2480	3.0	-9.45	-	-	-	-	8.00	-17.45

Table 112 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	0.20

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2404	3.0	-	-	-10.81	-	-	8.00	-18.81
2441	3.0	-	-	-10.98	-	-	8.00	-18.98
2476	3.0	-	-	-10.86	-	-	8.00	-18.86

Table 113 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	0.20

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2404	3.0	-	-	-11.12	-	-	8.00	-19.12
2441	3.0	-	-	-10.68	-	-	8.00	-18.68
2476	3.0	-	-	-11.02	-	-	8.00	-19.02

Table 114 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	60.5
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	0.20

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-	-	-7.56	-	-	8.00	-15.56
2440	3.0	-	-	-7.66	-	-	8.00	-15.66
2480	3.0	-	-	-7.12	-	-	8.00	-15.12

Table 115 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	31.3
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	0.20

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-	-	-9.73	-	-	8.00	-17.73
2440	3.0	-	-	-9.79	-	-	8.00	-17.79
2480	3.0	-	-	-9.29	-	-	8.00	-17.29

Table 116 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	1.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2404	3.0	-2.29	-	-	-	-	8.00	-10.29
2441	3.0	-2.23	-	-	-	-	8.00	-10.23
2476	3.0	-1.85	-	-	-	-	8.00	-9.85

Table 117 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.3
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	1.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2404	3.0	-2.44	-	-	-	-	8.00	-10.44
2441	3.0	-1.67	-	-	-	-	8.00	-9.67
2476	3.0	-1.84	-	-	-	-	8.00	-9.84

Table 118 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (LE 1M)	Duty Cycle (%):	60.6
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	1.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-2.36	-	-	-	-	8.00	-10.36
2440	3.0	-2.69	-	-	-	-	8.00	-10.69
2480	3.0	-2.10	-	-	-	-	8.00	-10.10

Table 119 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	-		

DUT Configuration			
Mode:	ePA GFSK (LE 2M)	Duty Cycle (%):	31.4
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	A (Core 0)	Peak Antenna Gain (dBi):	1.80

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-4.41	-	-	-	-	8.00	-12.41
2440	3.0	-4.45	-	-	-	-	8.00	-12.45
2480	3.0	-4.33	-	-	-	-	8.00	-12.33

Table 120 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.1
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	4.47

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2404	3.0	-11.16	-10.75	-	-	-7.94	8.00	-15.94
2441	3.0	-11.55	-11.22	-	-	-8.37	8.00	-16.37
2476	3.0	-11.11	-11.23	-	-	-8.16	8.00	-16.16

Table 121 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	4.47

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2404	3.0	-11.12	-10.79	-	-	-7.94	8.00	-15.94
2441	3.0	-10.99	-10.80	-	-	-7.88	8.00	-15.88
2476	3.0	-10.83	-10.53	-	-	-7.66	8.00	-15.66

Table 122 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	iPA GFSK (LE 1M)	Duty Cycle (%):	60.6
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	4.47

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-2.09	-2.19	-	-	0.87	8.00	-7.13
2440	3.0	-2.63	-2.47	-	-	0.46	8.00	-7.54
2480	3.0	-2.63	-2.47	-	-	0.46	8.00	-7.54

Table 123 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	iPA GFSK (LE 2M)	Duty Cycle (%):	31.4
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	4.47

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2402	3.0	-4.44	-4.29	-	-	-1.35	8.00	-9.35
2440	3.0	-4.83	-4.61	-	-	-1.71	8.00	-9.71
2480	3.0	-4.73	-4.68	-	-	-1.69	8.00	-9.69

Table 124 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	78.2
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	4.47

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2404	3.0	-1.91	-1.82	-	-	1.15	8.00	-6.85
2441	3.0	-2.56	-1.69	-	-	0.91	8.00	-7.09
2476	3.0	-2.51	-1.71	-	-	0.92	8.00	-7.08

Table 125 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.2
Additional Reference(s):	662911 D01 v02r01 E)2)b)		

DUT Configuration			
Mode:	ePA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	78.3
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	4.47

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2404	3.0	-2.00	-1.74	-	-	1.15	8.00	-6.85
2441	3.0	-2.79	-1.86	-	-	0.71	8.00	-7.29
2476	3.0	-2.33	-1.92	-	-	0.89	8.00	-7.11

Table 126 - Maximum Power Spectral Density Results



FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

ISED RSS-247, Limit Clause 5.2(b)

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Hygrometer	Rotronic	I-1000	3068	12	07-Nov-2024
Digital Multimeter	Fluke	115	6145	12	06-Jun-2025
MXA Signal Analyser	Keysight Technologies	N9020B	6417	24	26-Feb-2025
Signal Conditioning Unit	TUV SUD	SPECTRUM_SCU001	6518	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6529	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6530	12	16-Feb-2025
SCU Cable Assembly	TUV SUD	SPECTRUM_SCU_CA	6531	12	16-Feb-2025
AC Programmable Power Supply	iTech	IT7324	6662	-	O/P Mon

Table 127

O/P Mon - Output Monitored using calibrated equipment

3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Restricted Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Emission Bandwidth	± 50.10 kHz
Maximum Conducted Output Power	± 1.38 dB
Authorised Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Power Spectral Density	± 1.49 dB

Table 128

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.