




Plot 7-267. In-Band Emission Plot SDM Antenna WF8 (40MHz 802.11ax (UNII Band 7) – Ch. 123)

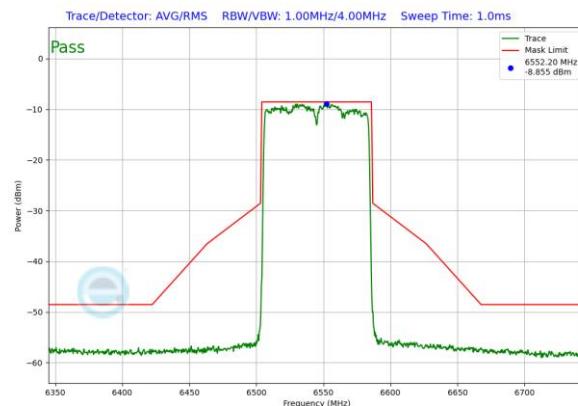


Plot 7-270. In-Band Emission Plot SDM Antenna WF7a (80MHz 802.11ax (UNII Band 7) – Ch. 119)

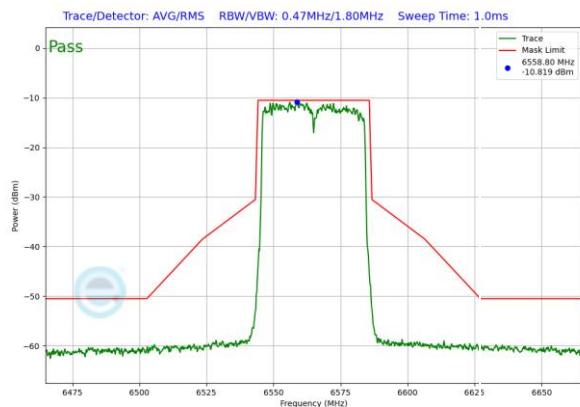


Plot 7-268. In-Band Emission Plot SDM Antenna WF7a (40MHz 802.11ax (UNII Band 7) – Ch. 123)

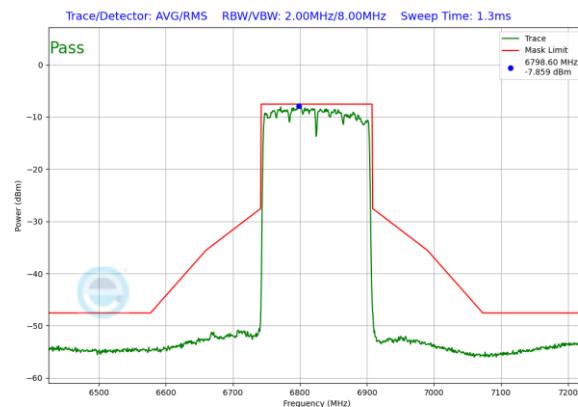

Plot 7-271. In-Band Emission Plot SDM Antenna WF8 (160MHz 802.11ax (UNII Band 7) – Ch. 175)

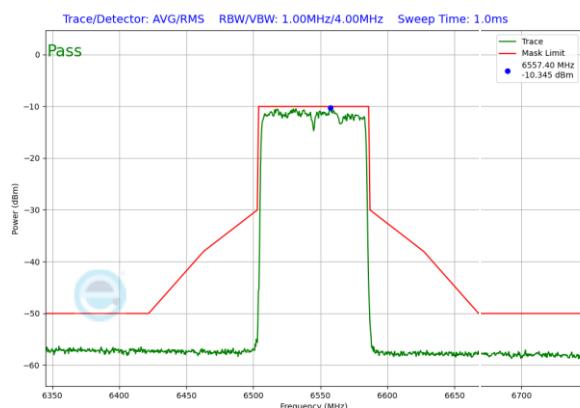


Plot 7-269. In-Band Emission Plot SDM Antenna WF8 (80MHz 802.11ax (UNII Band 7) – Ch. 119)

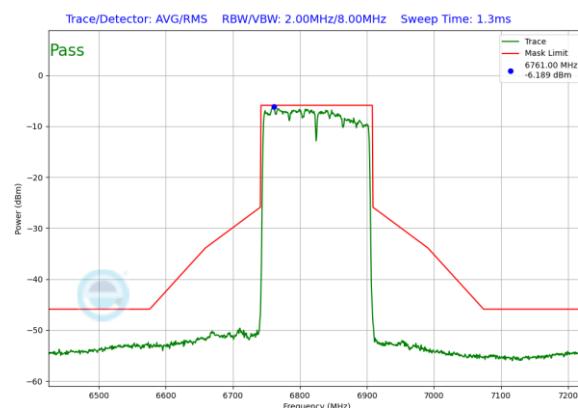

Plot 7-272. In-Band Emission Plot SDM Antenna WF7a (160MHz 802.11ax (UNII Band 7) – Ch. 175)


FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 111 of 188

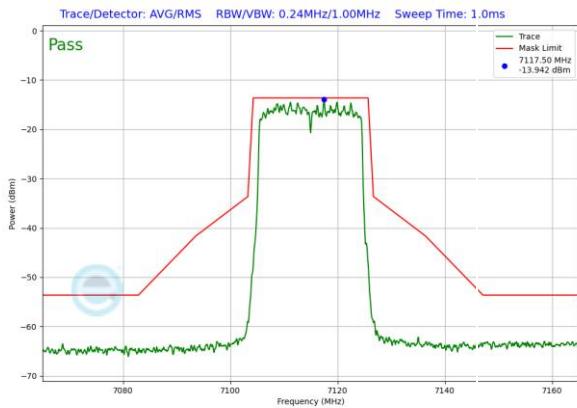


Plot 7-273. In-Band Emission Plot SDM Antenna WF8 (20MHz 802.11ax (UNII Band 8) – Ch. 209)




Plot 7-276. In-Band Emission Plot SDM Antenna WF7a (40MHz 802.11ax (UNII Band 8) – Ch. 211)

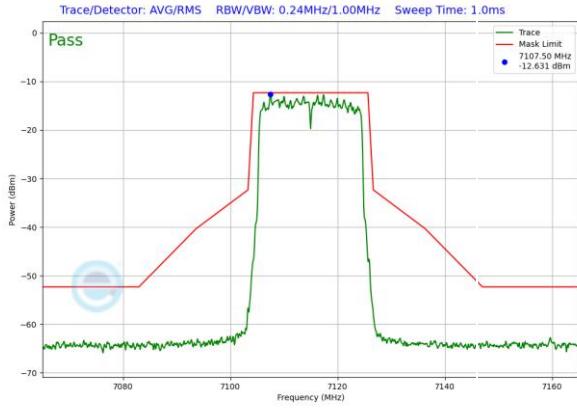


Plot 7-274. In-Band Emission Plot SDM Antenna WF7a (20MHz 802.11ax (UNII Band 8) – Ch. 209)

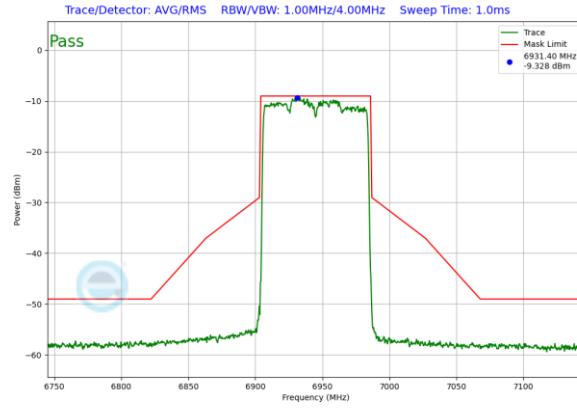

Plot 7-277. In-Band Emission Plot SDM Antenna WF8 (80MHz 802.11ax (UNII Band 8) – Ch. 199)

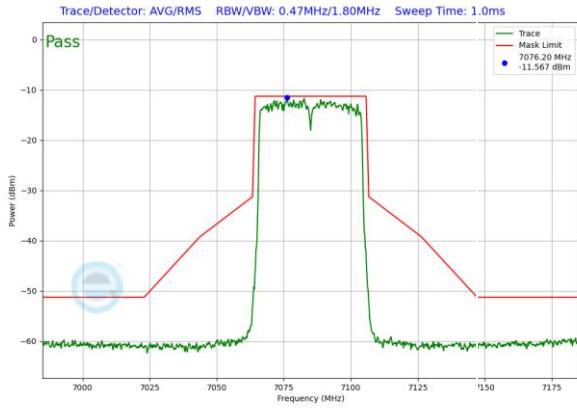


Plot 7-275. In-Band Emission Plot SDM Antenna WF8 (40MHz 802.11ax (UNII Band 8) – Ch. 211)

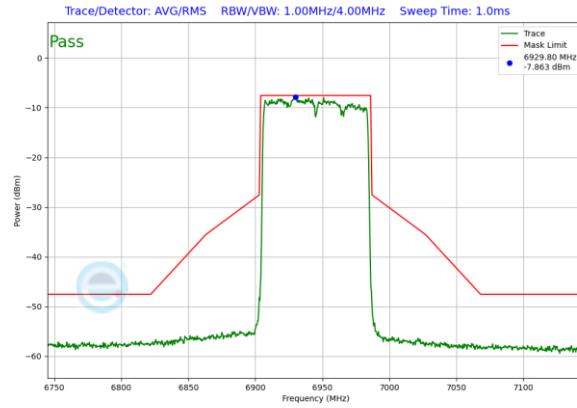


Plot 7-278. In-Band Emission Plot SDM Antenna WF7a (80MHz 802.11ax (UNII Band 8) – Ch. 199)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 112 of 188

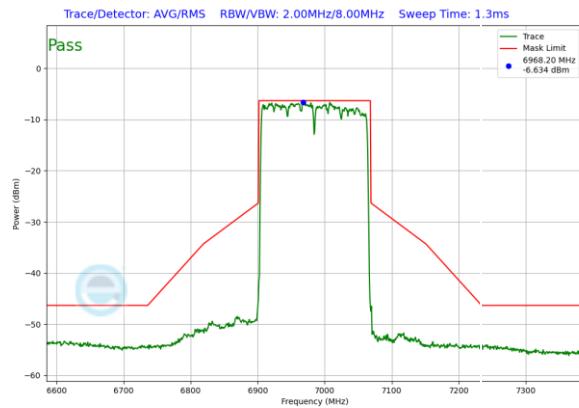

Plot 7-279. In-Band Emission Plot SDM Antenna WF8 (160MHz 802.11ax (UNII Band 8) – Ch. 207)

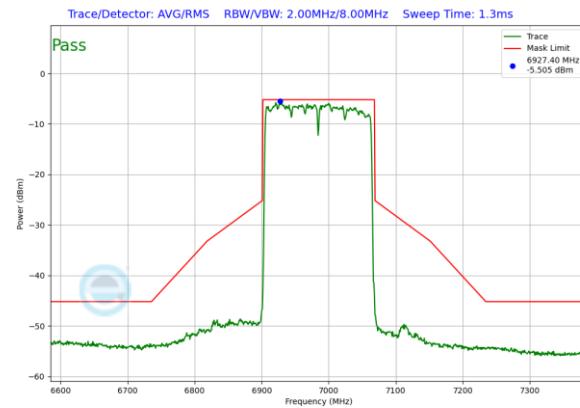

Plot 7-280. In-Band Emission Plot SDM Antenna WF7a (160MHz 802.11ax (UNII Band 8) – Ch. 207)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 113 of 188

7.6 Contention Based Protocol

§15.407(d)(6), RSS-248 [4.7]

Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

Test Procedure Used

KDB 987594 D02 v03 – Section I

Test Settings

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
5. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
6. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
7. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
8. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
9. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
10. Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
11. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

FCC ID: BCGA3266 IC: 579C-A3266	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		Page 114 of 188

Test Setup

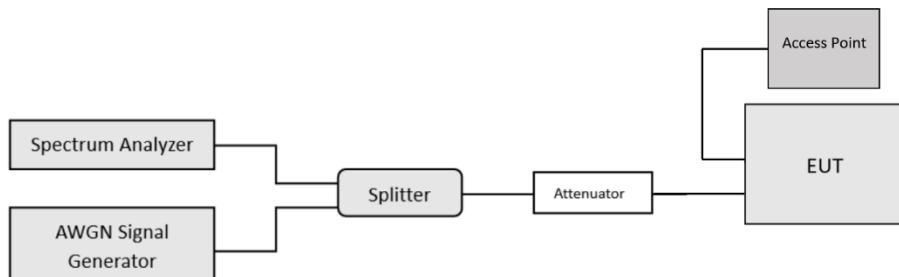


Figure 7-5. Contention-based protocol test setup, conducted method

Test Notes

1. The EUT does not support channel puncturing.
2. Per guidance from KDB 987594 D02 v03, contention-based protocol was tested using an AWGN signal with a bandwidth of 10MHz. The amplitude of the signal was increased until detected by the EUT, signalled by the ceasing of transmission, marker indicates the point at which the AWGN signal is introduced.
3. Per KDB 987594 D04 v03, contention-based protocol was tested with receiver with the lowest antenna gain.
4. 15 trials were run in order to assure that at least 90% of certainty was met.

Detection Level = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Equation 7-1. Incumbent Detection Level Calculation

FCC ID: BCGA3266 IC: 579C-A3266	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		Page 115 of 188

Band	Channel	Channel Frequency [MHz]	Channel BW [MHz]	Incumbent Frequency [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
UNII Band 5	53	6215	20	6215	-76.61	0.20	-76.81	-62.0	-14.81
	47	6185	160	6110	-67.05	0.20	-67.25	-62.0	-5.25
				6185	-69.27	0.20	-69.47	-62.0	-7.47
				6260	-67.11	0.20	-67.31	-62.0	-5.31
UNII Band 6	101	6455	20	6455	-75.77	0.20	-75.97	-62.0	-13.97
	111	6505	160	6430	-70.13	0.20	-70.33	-62.0	-8.33
				6505	-67.12	0.20	-67.32	-62.0	-5.32
				6580	-68.08	0.20	-68.28	-62.0	-6.28
UNII Band 7	149	6695	20	6695	-74.68	0.20	-74.88	-62.0	-12.88
	143	6665	160	6590	-68.99	0.20	-69.19	-62.0	-7.19
				6665	-72.01	0.20	-72.21	-62.0	-10.21
				6740	-67.10	0.20	-67.30	-62.0	-5.30
UNII Band 8	197	6935	20	6935	-76.73	0.20	-76.93	-62.0	-14.93
	207	6985	160	6910	-69.92	0.20	-70.12	-62.0	-8.12
				6985	-72.56	0.20	-72.76	-62.0	-10.76
				7060	-65.62	0.20	-65.82	-62.0	-3.82

Table 7-42. Contention Based Protocol – Incumbent Detection Results

Band	Channel	Channel Frequency [MHz]	Channel BW [MHz]	Incumbent Frequency [MHz]	EUT Transmission Status		
					Adjusted AWGN Power (dBm)		
					Normal	Minimal	Ceased
UNII Band 5	53	6215	20	6215	-87.99	-78.06	-76.81
	47	6185	160	6110	-78.43	-68.50	-67.25
				6185	-80.65	-70.72	-69.47
				6260	-78.49	-68.56	-67.31
UNII Band 6	101	6455	20	6455	-87.15	-77.22	-75.97
	111	6505	160	6430	-81.51	-71.58	-70.33
				6505	-78.50	-68.57	-67.32
				6580	-79.46	-69.53	-68.28
UNII Band 7	149	6695	20	6695	-85.86	-76.10	-74.88
	143	6665	160	6750	-80.17	-70.41	-69.19
				6825	-83.19	-73.43	-72.21
				6900	-78.28	-68.52	-67.30
UNII Band 8	197	6935	20	6935	-87.91	-78.15	-76.93
	207	6985	160	6910	-81.10	-71.34	-70.12
				6985	-83.74	-73.98	-72.76
				7060	-76.80	-67.04	-65.82



Table 7-43. Contention Based Protocol – Detection Results – All Tx Cases

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 116 of 188


CBP Detection (1 = Detection, Blank = No Detection)																					
Band	Channel	Channel Freqnency [MHz]	Channel BW [MHz]	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Detection Rate [%]	Limit [%]	Pass/Fail
UNII Band 5	53	6215	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	47	6185	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
UNII Band 6	101	6455	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	111	6505	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
UNII Band 7	149	6695	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	143	6665	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
UNII Band 8	197	6935	20	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
	207	6985	160	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	
				1	1	1	1	1	1	1	1	1	1	1	1	1	1	100.0	90	Pass	

Table 7-44. Contention Based Protocol – Incumbent Detection Trial Results


FCC ID: BCGA3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 117 of 188

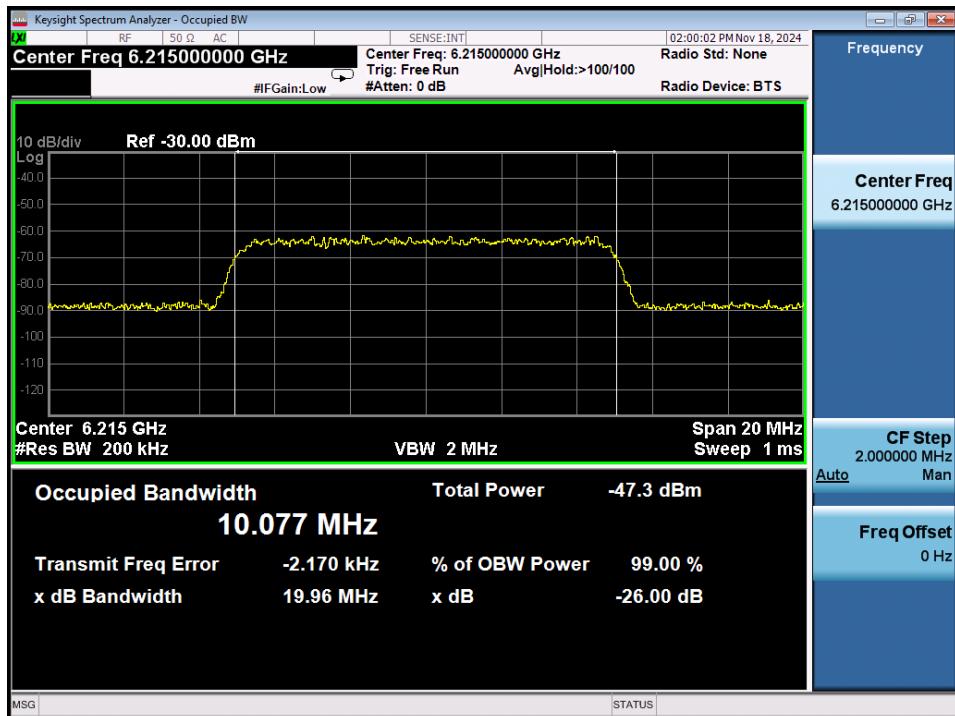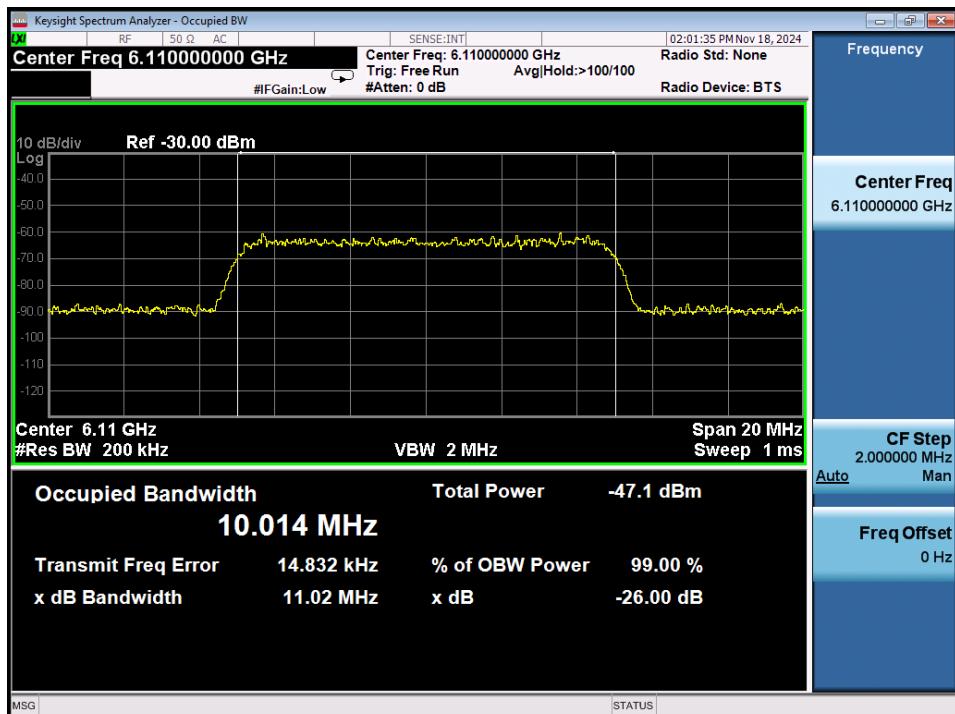AWGN Plots

Plot 7-281. AWGN Signal – UNII 5 – 20MHz

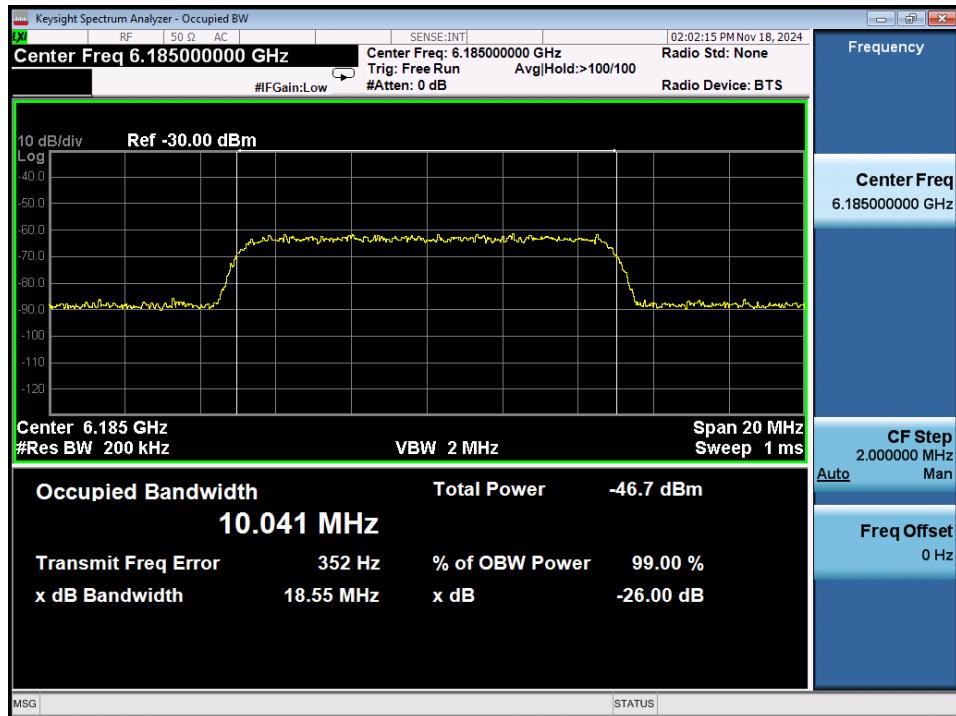Plot 7-282. AWGN Signal – UNII 5 – 160MHz - Low

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 118 of 188

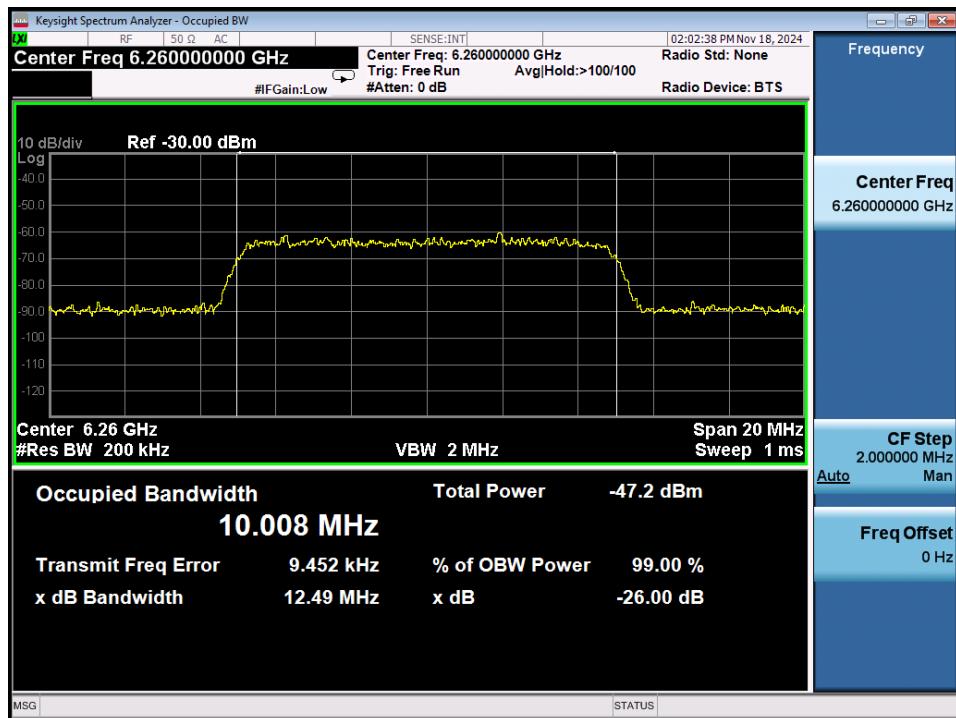


Plot 7-283. AWGN Signal – UNII 5 – 160MHz – Mid




Plot 7-284. AWGN Signal – UNII 5 – 160MHz - High

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 119 of 188

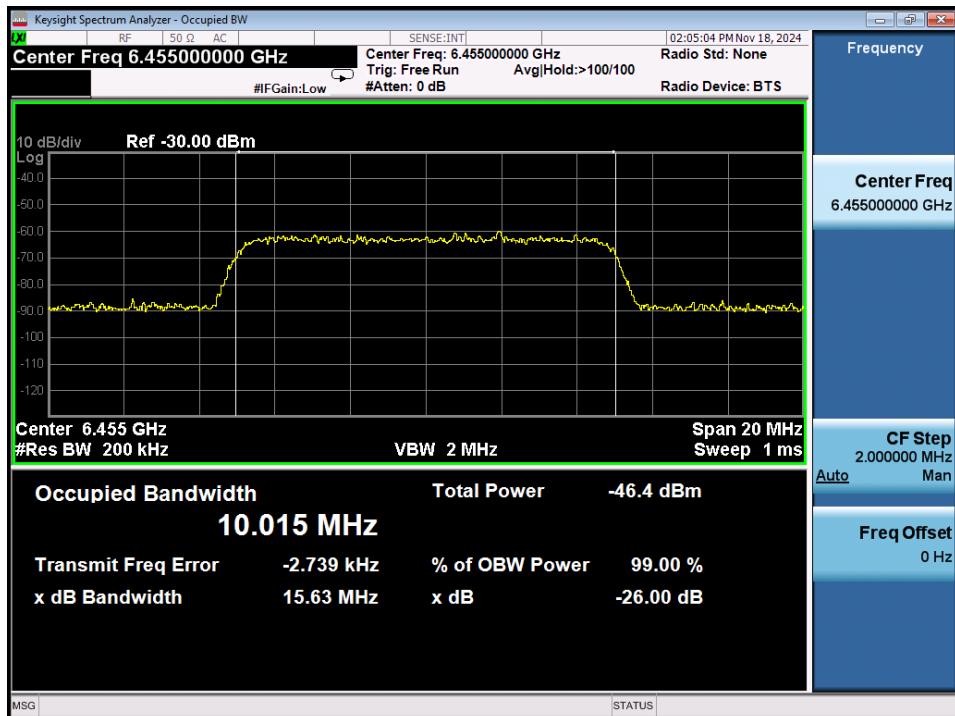


Plot 7-285. AWGN Signal – UNII 6 – 20MHz

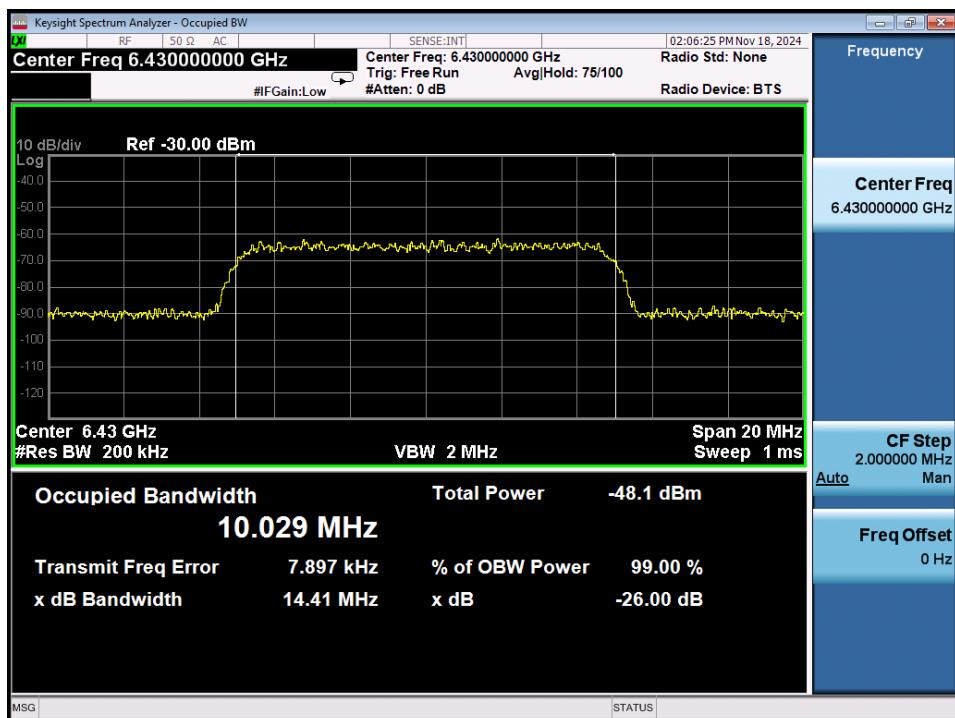


Plot 7-286. AWGN Signal – UNII 6 – 160MHz - Low

FCC ID: BCGA3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 120 of 188

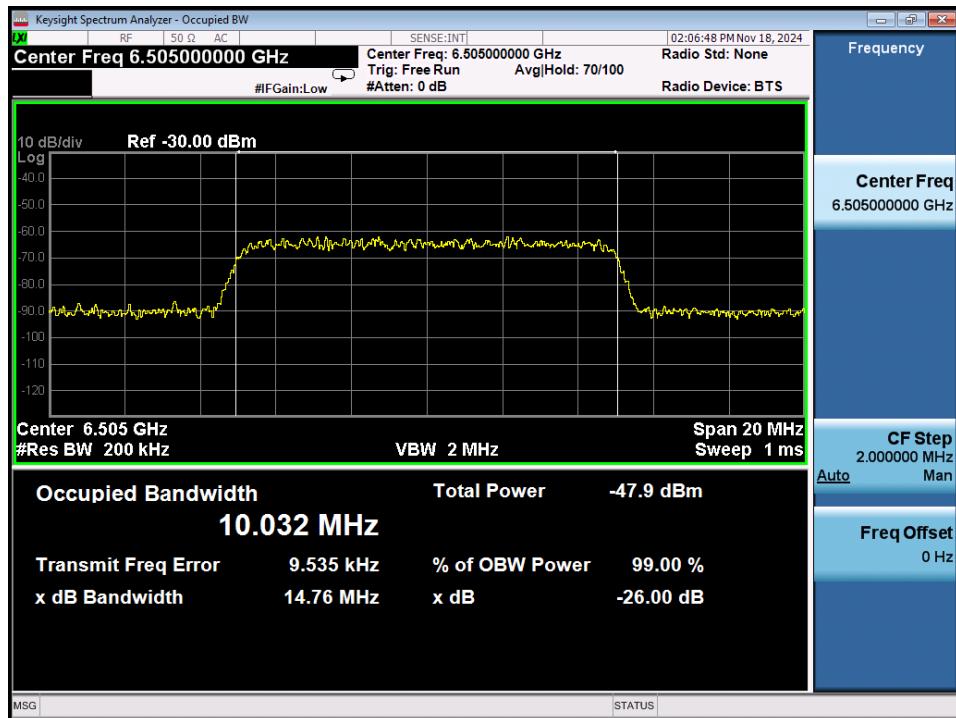


Plot 7-287. AWGN Signal – UNII 6 – 160MHz – Mid

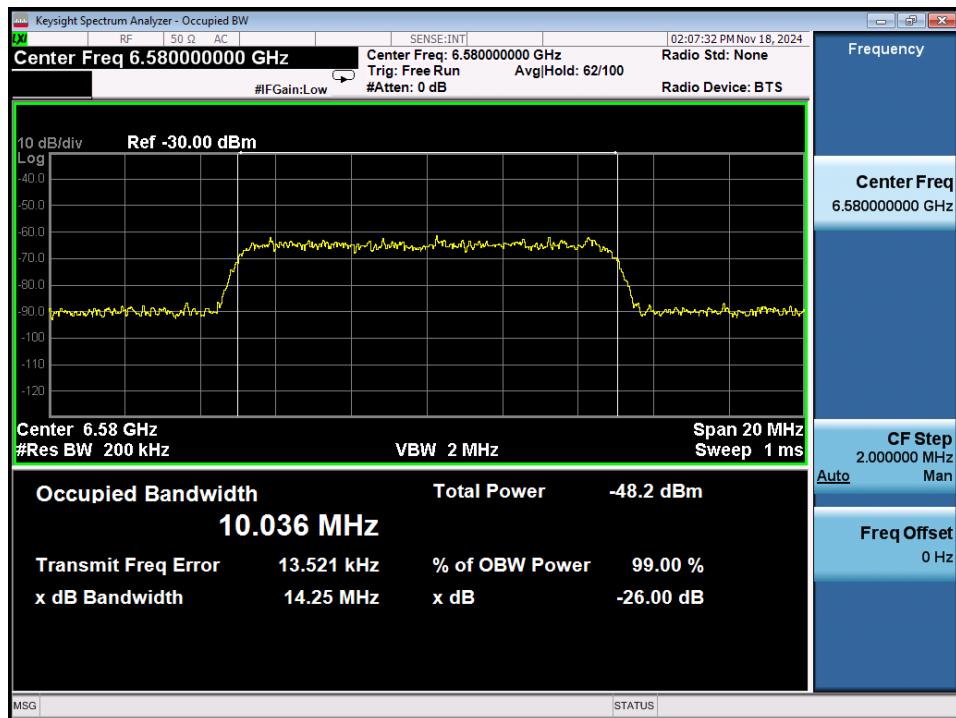


Plot 7-288. AWGN Signal – UNII 6 – 160MHz - High

FCC ID: BCGA3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 121 of 188

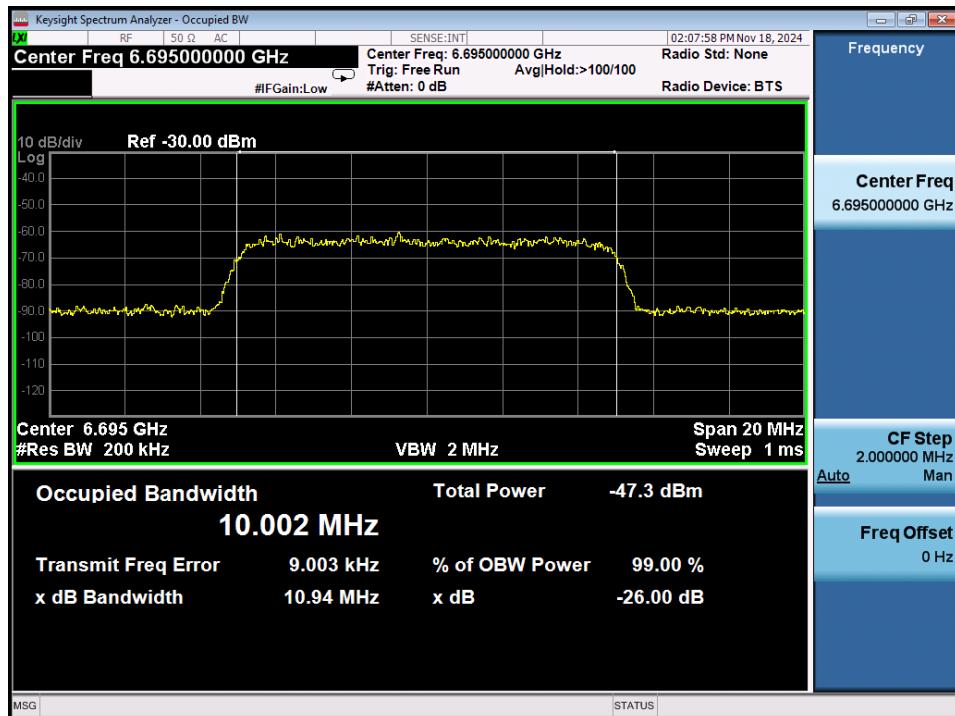


Plot 7-289. AWGN Signal – UNII 7 – 20MHz

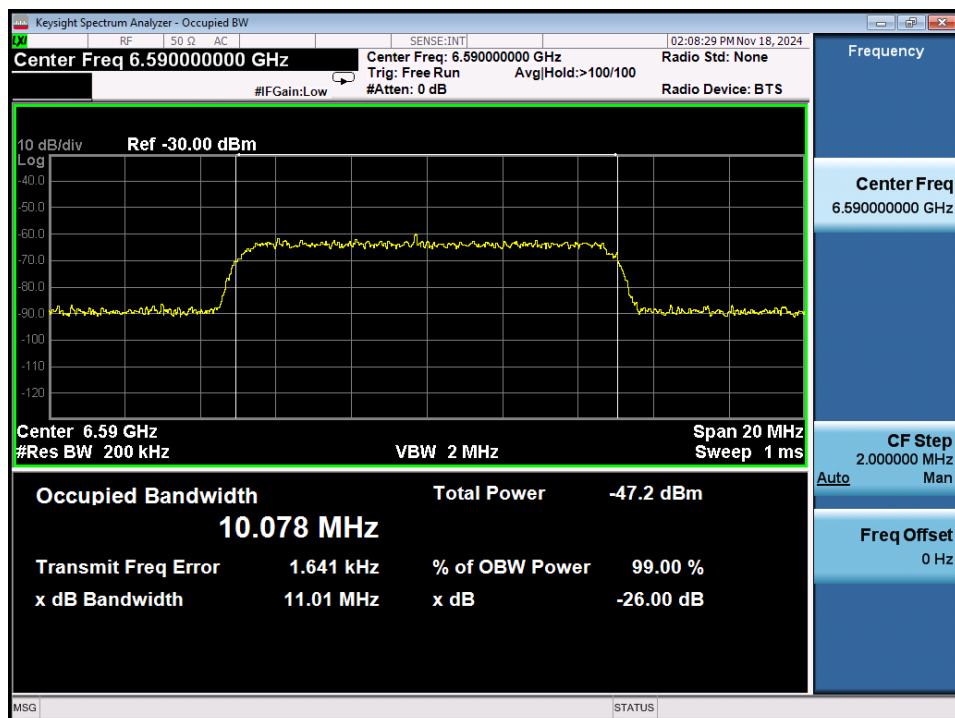


Plot 7-290. AWGN Signal – UNII 7 – 160MHz - Low

FCC ID: BCGA3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 122 of 188

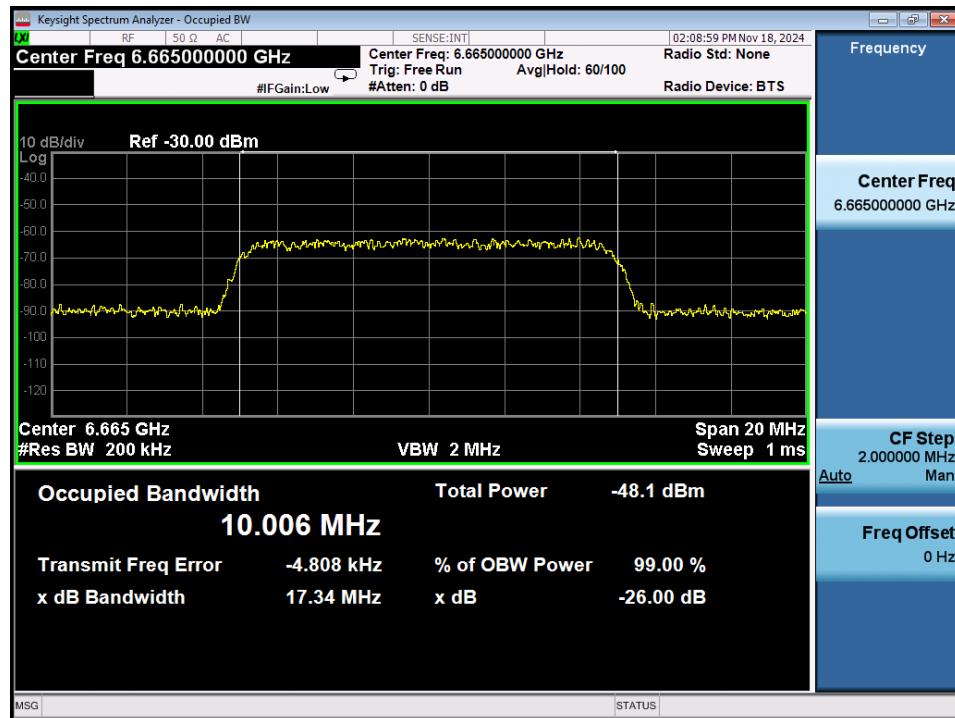


Plot 7-291. AWGN Signal – UNII 7 – 160MHz – Mid

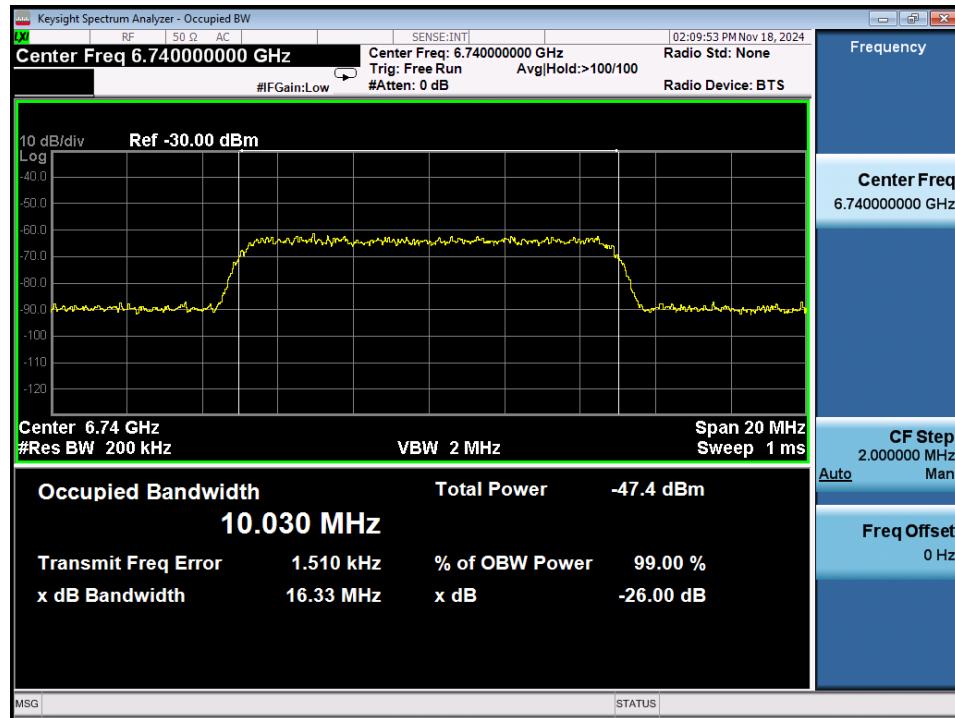


Plot 7-292. AWGN Signal – UNII 7 – 160MHz - High

FCC ID: BCGA3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 123 of 188

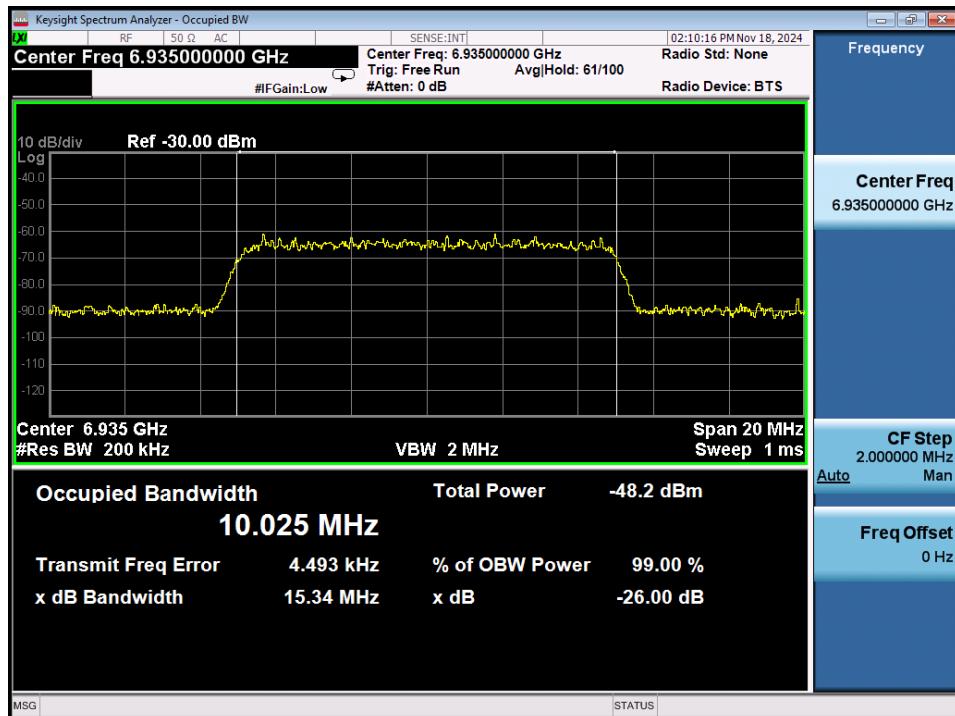


Plot 7-293. AWGN Signal – UNII 8 – 20MHz

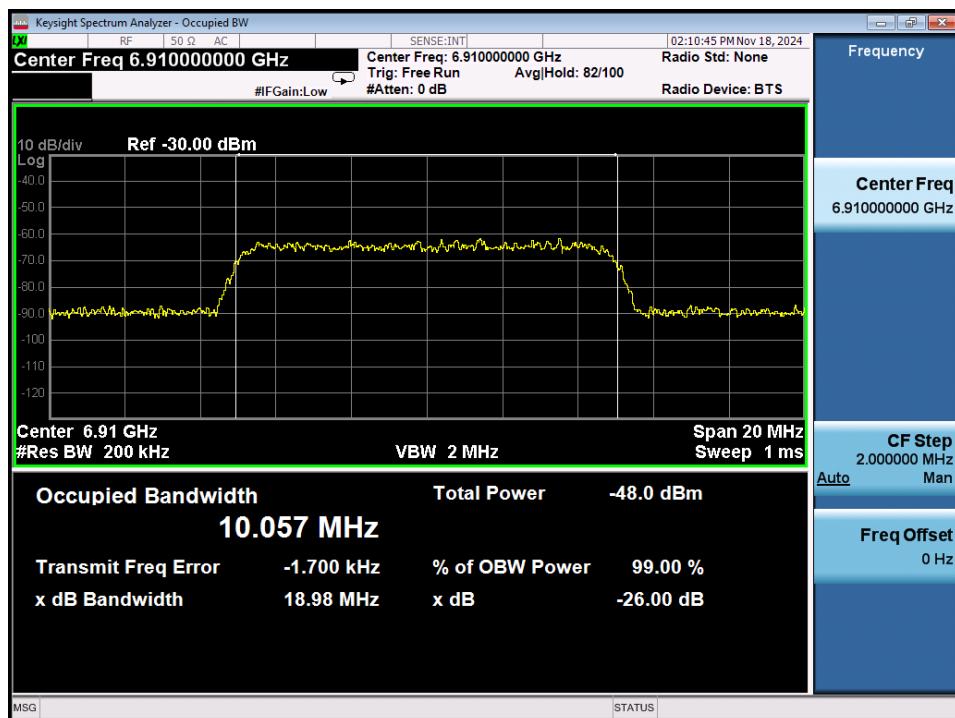


Plot 7-294. AWGN Signal – UNII 8 – 160MHz - Low

FCC ID: BCGA3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 124 of 188

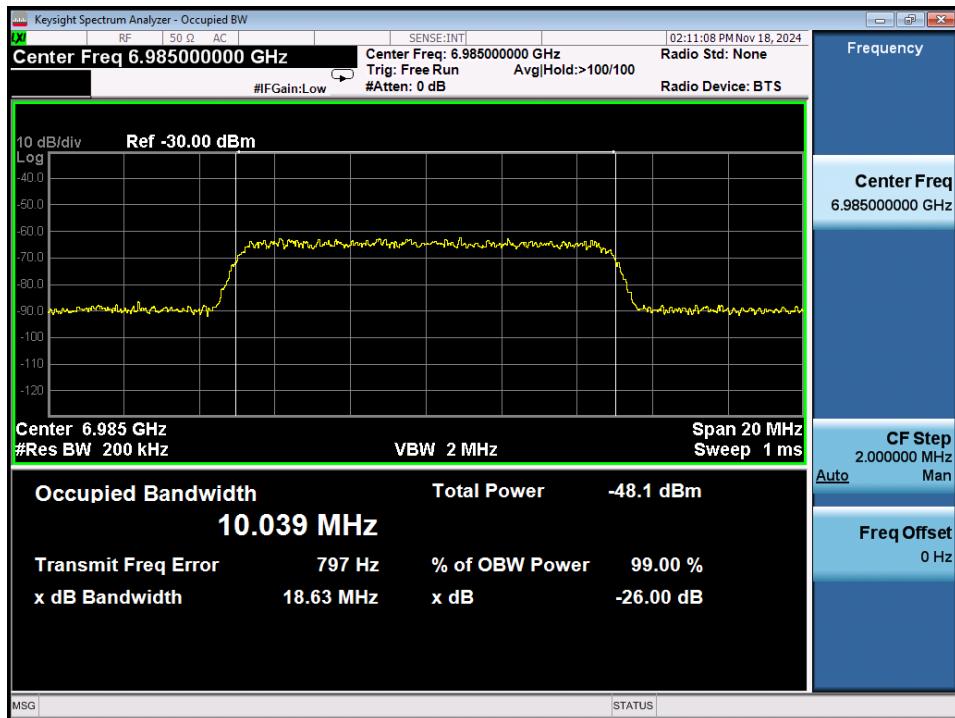


Plot 7-295. AWGN Signal – UNII 8 – 160MHz – Mid

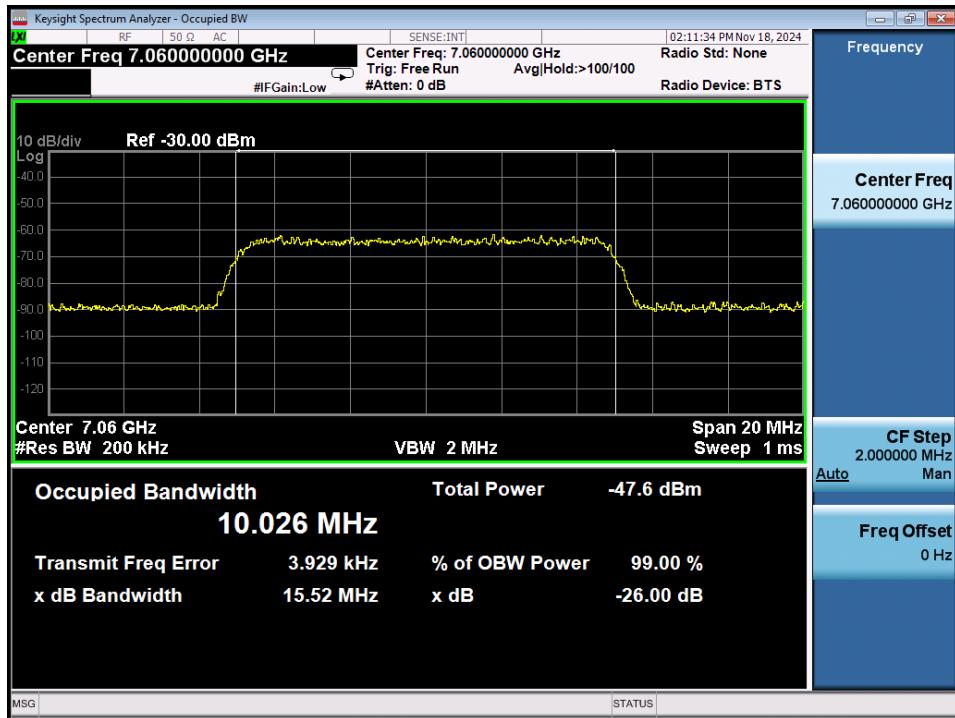


Plot 7-296. AWGN Signal – UNII 8 – 160MHz - High

FCC ID: BCGA3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 125 of 188

Contention-Based Protocol Timing Plots

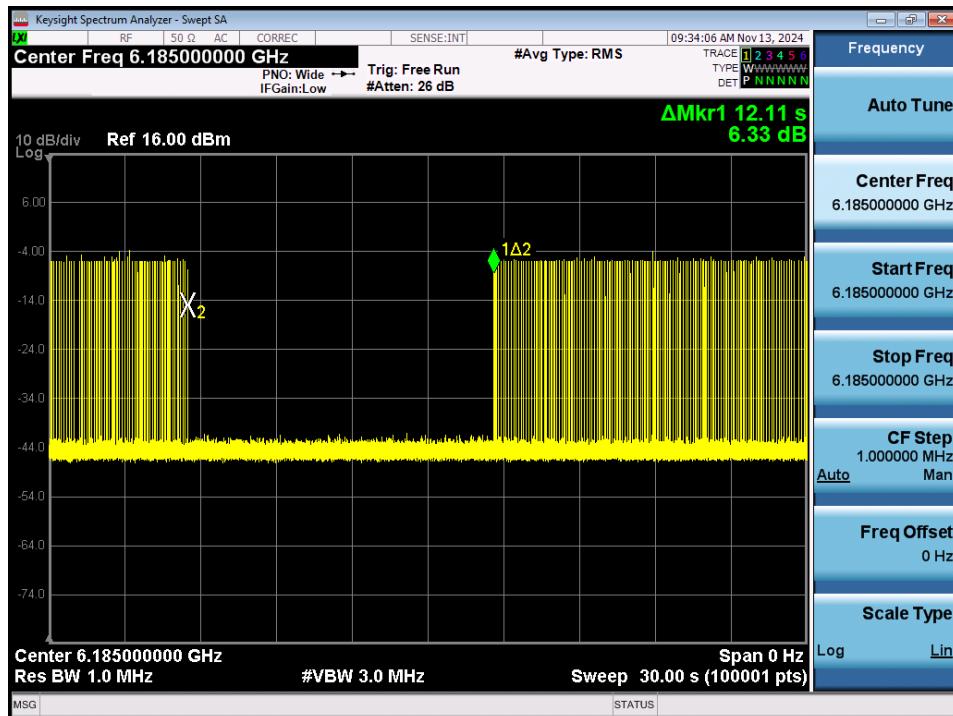


Plot 7-297. Contention Based Protocol Timing Plot – UNII 5 – 20MHz Channel 53

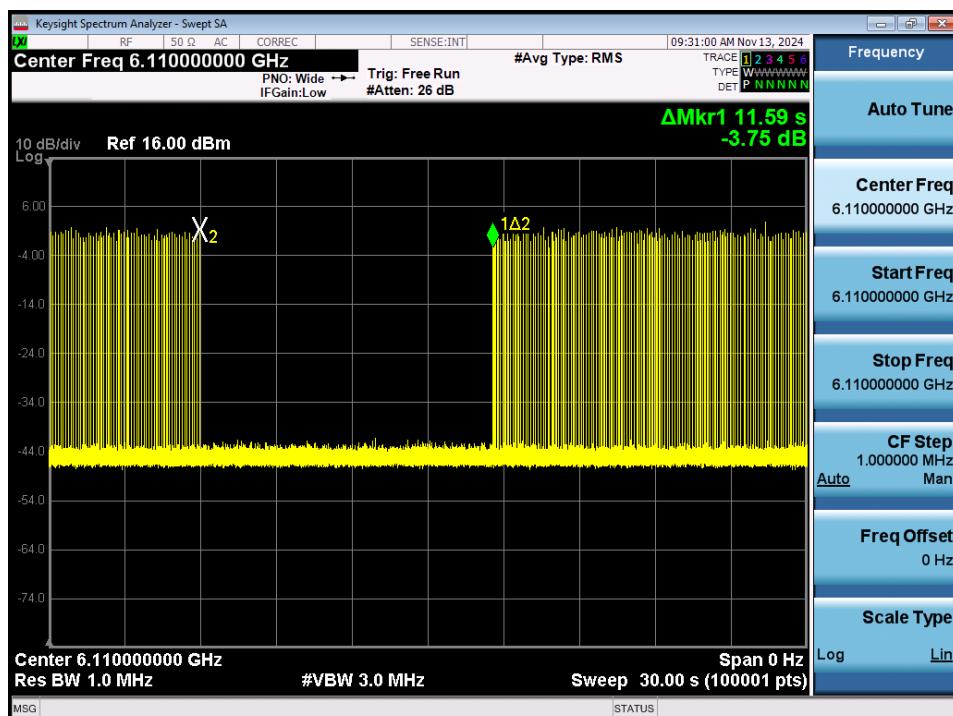


Plot 7-298. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – Low

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 126 of 188

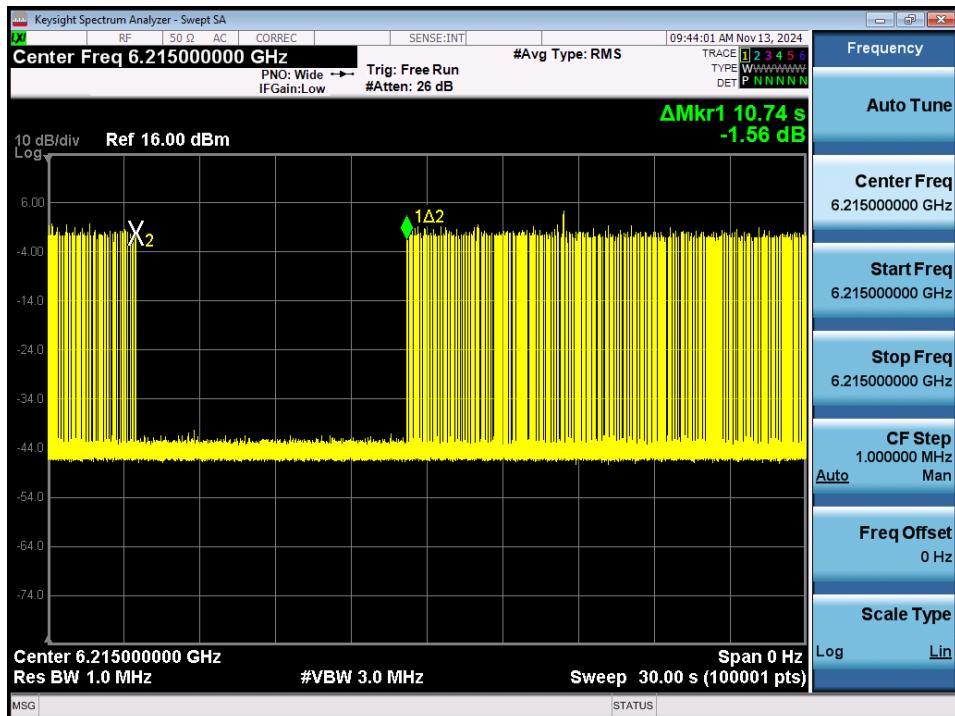


Plot 7-299. Contention Based Protocol Timing Plot –UNII 5 – 160MHz Channel 47 – Mid

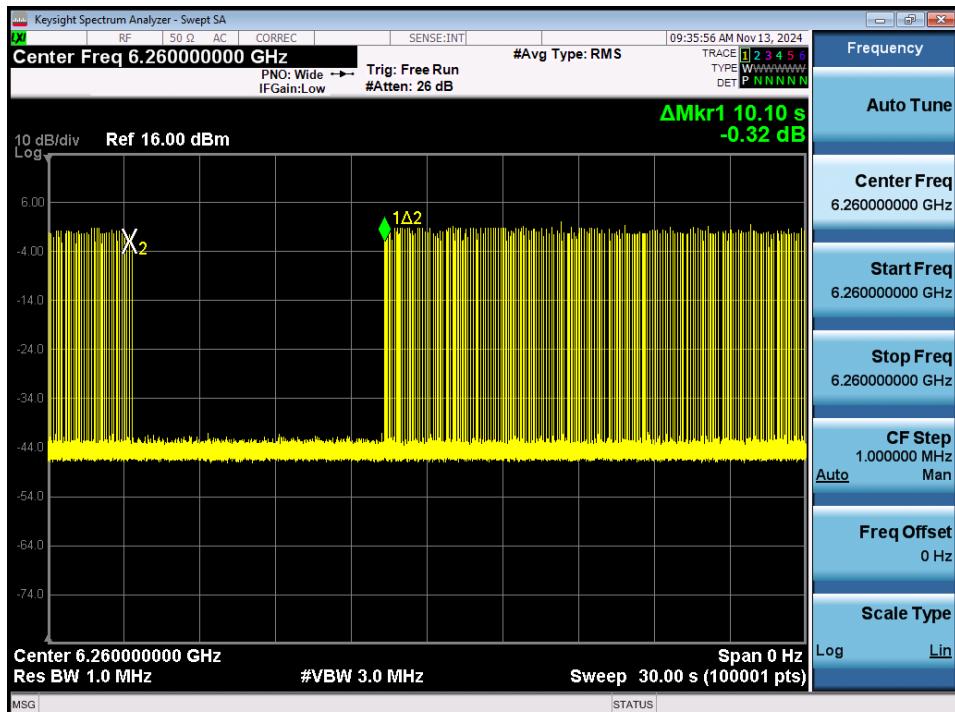


Plot 7-300. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Channel 47 – High

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 127 of 188

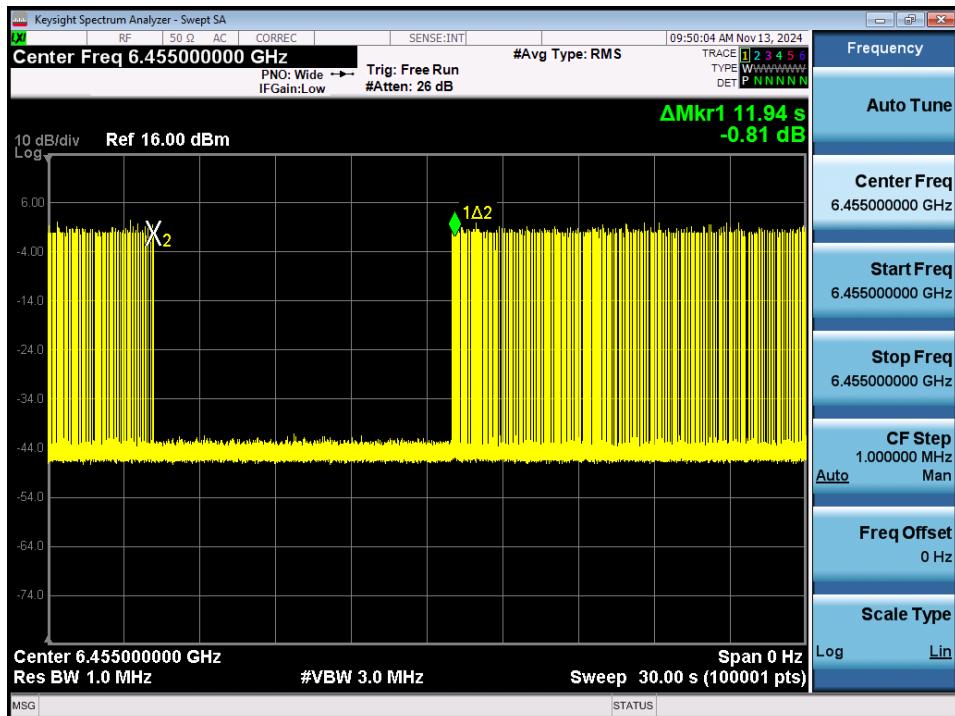


Plot 7-301. Contention Based Protocol Timing Plot – UNII 6 – 20MHz Channel 101

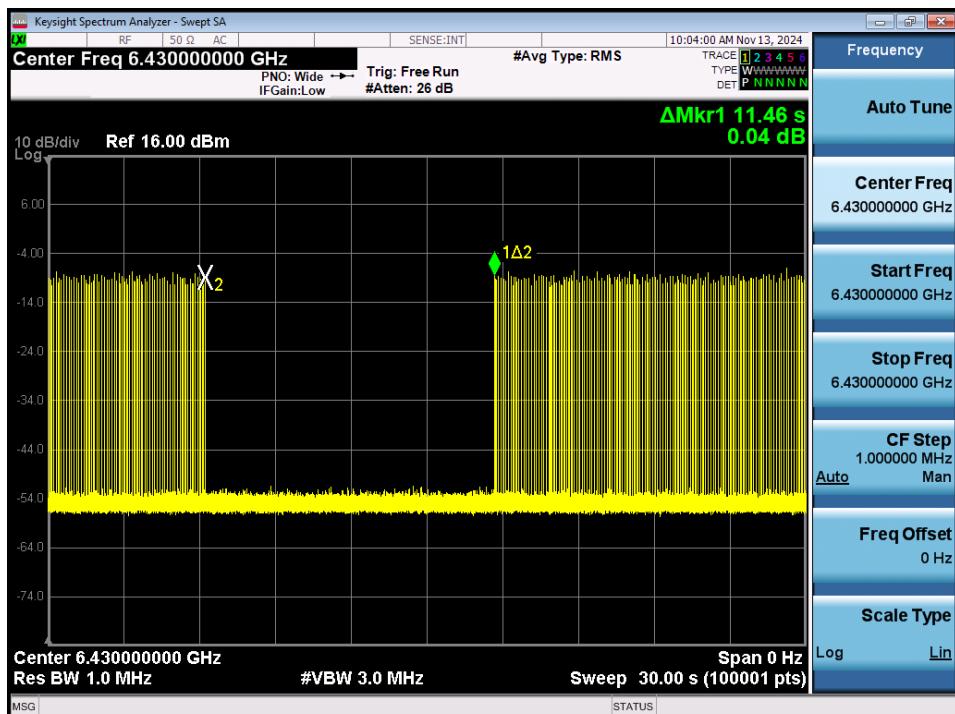


Plot 7-302. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – Low

FCC ID: BCGA3266 IC: 579C-A3266	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		Page 128 of 188

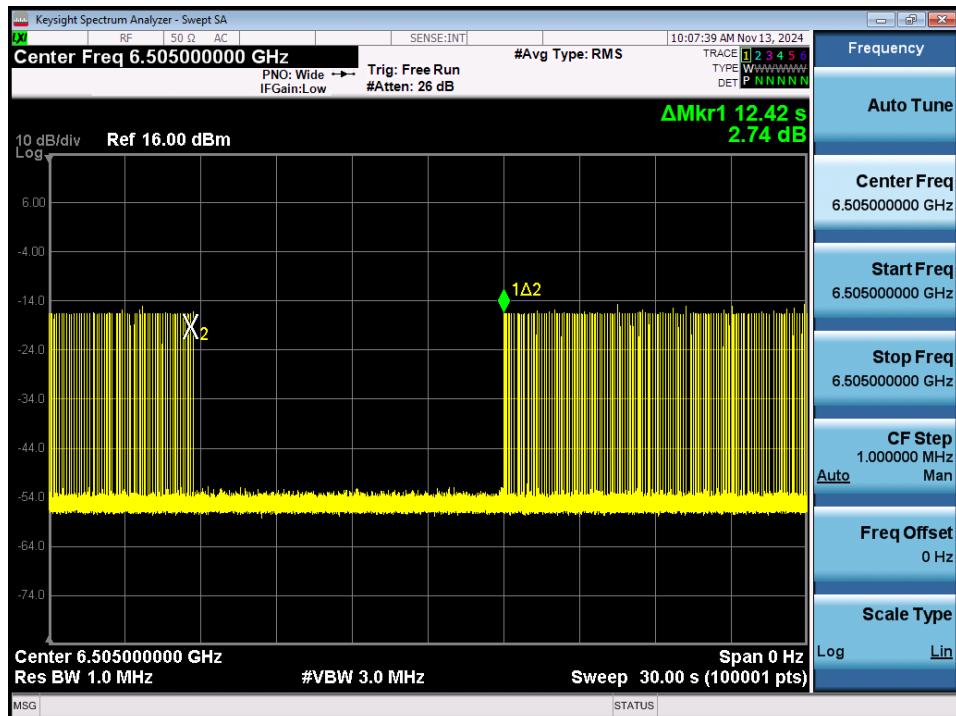


Plot 7-303. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – Mid

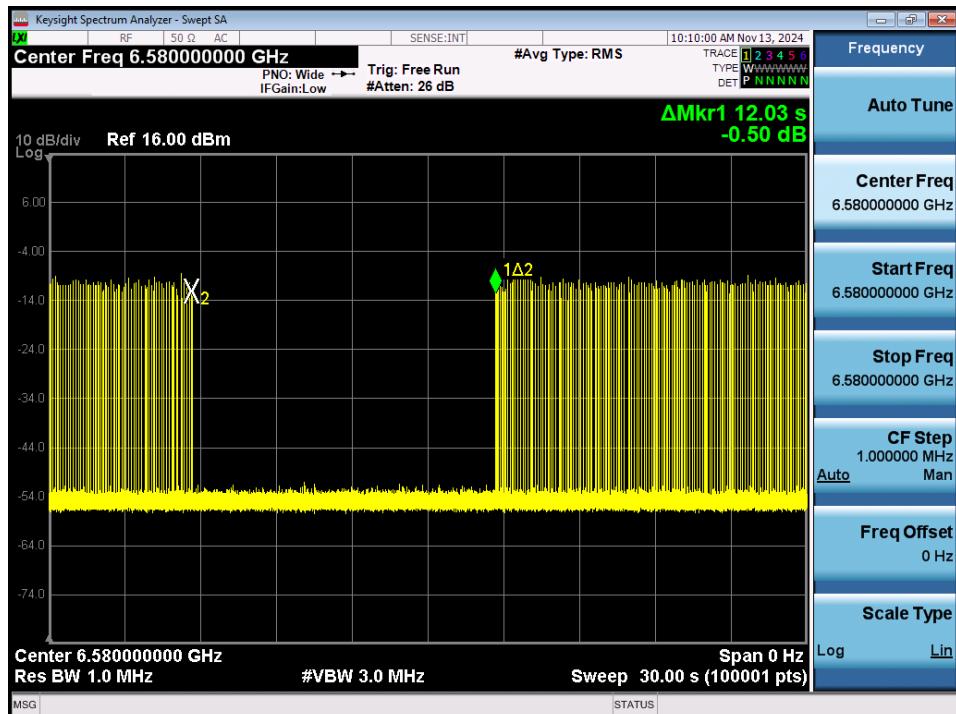


Plot 7-304. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Channel 111 – High

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 129 of 188

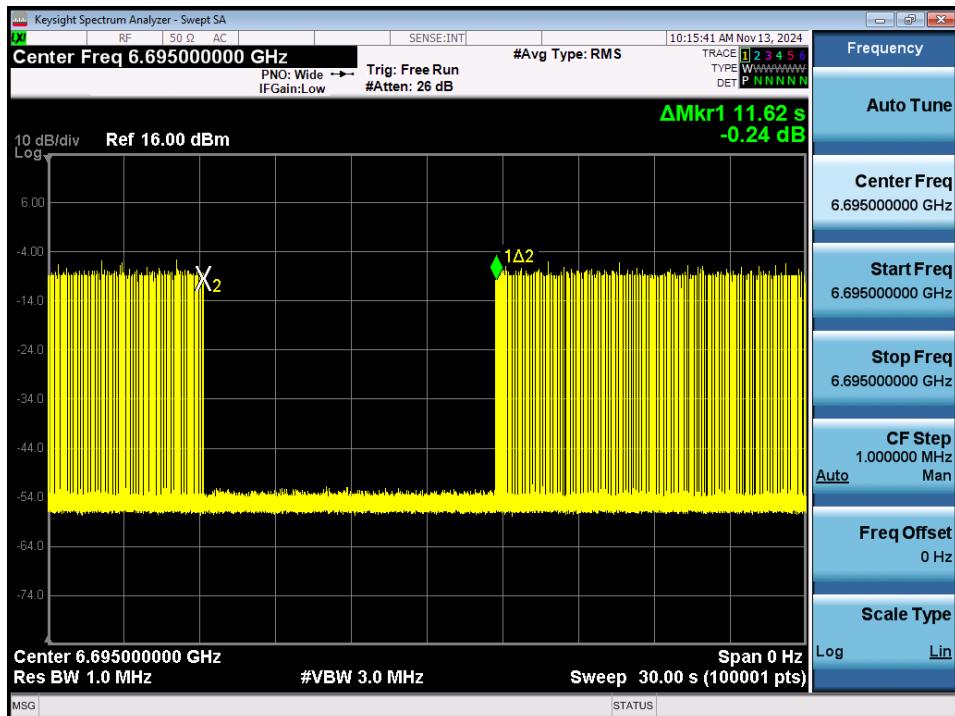


Plot 7-305. Contention Based Protocol Timing Plot – UNII 7 – 20MHz Channel 149

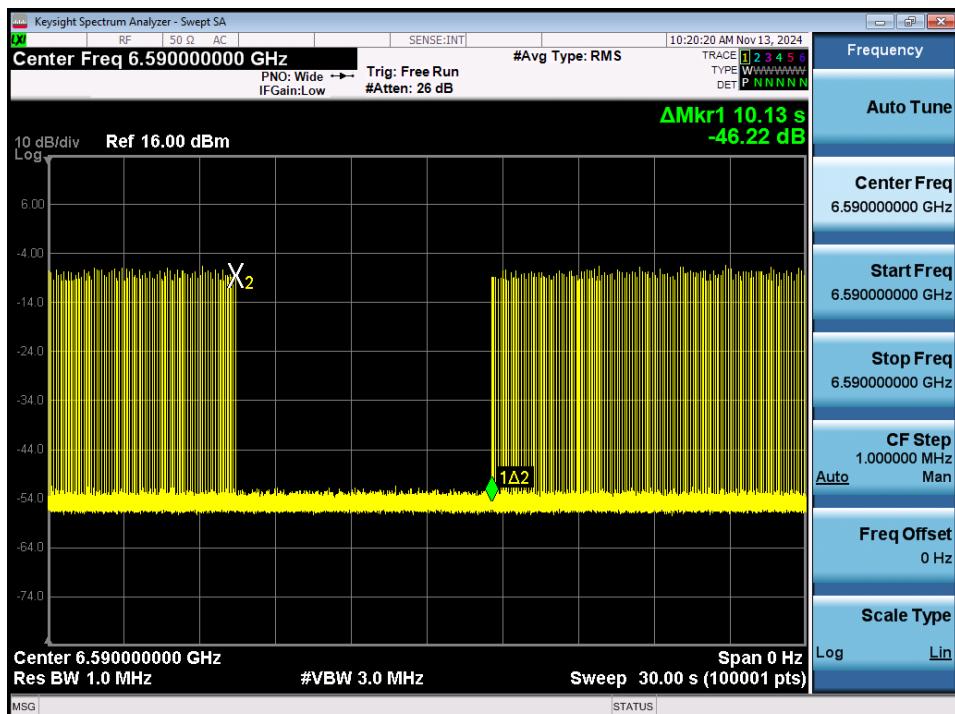


Plot 7-306. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – Low

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 130 of 188

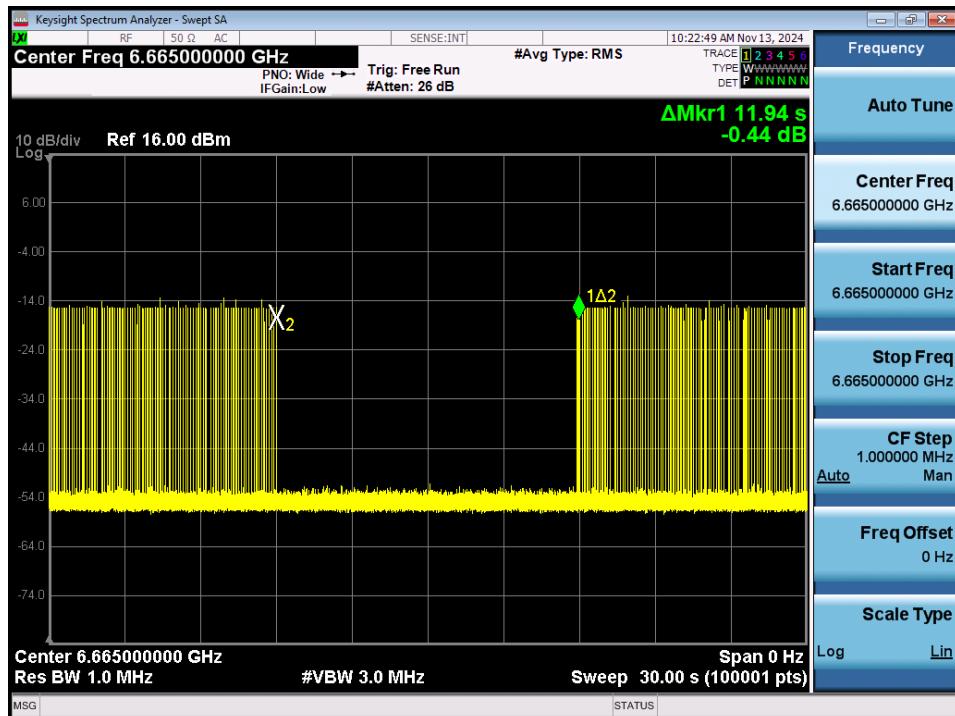


Plot 7-307. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – Mid

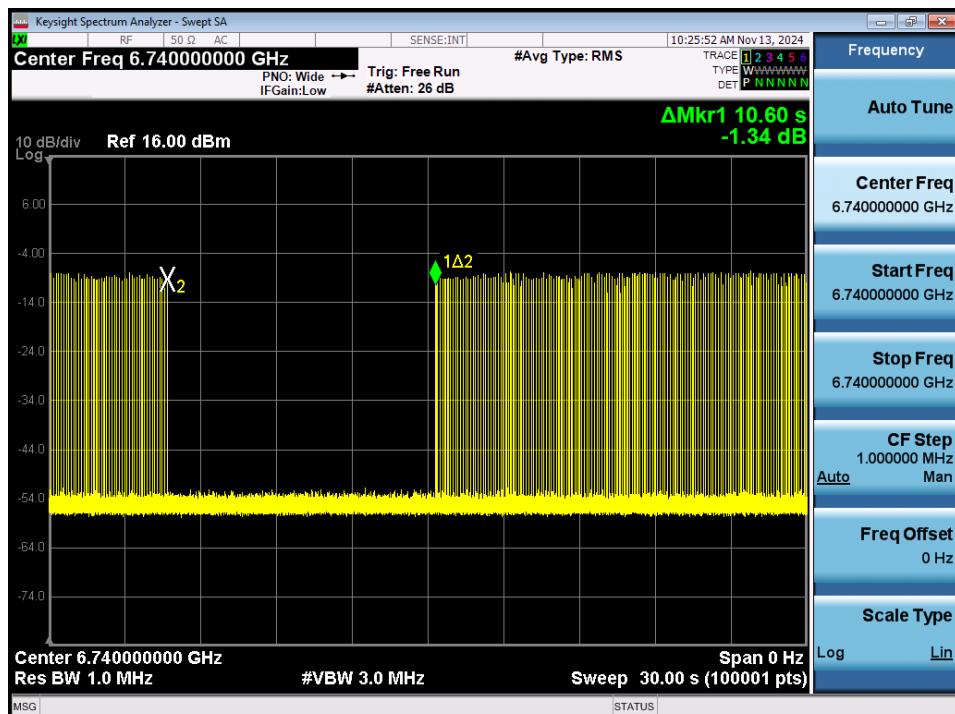


Plot 7-308. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Channel 143 – High

FCC ID: BCGA3266 IC: 579C-A3266		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 131 of 188

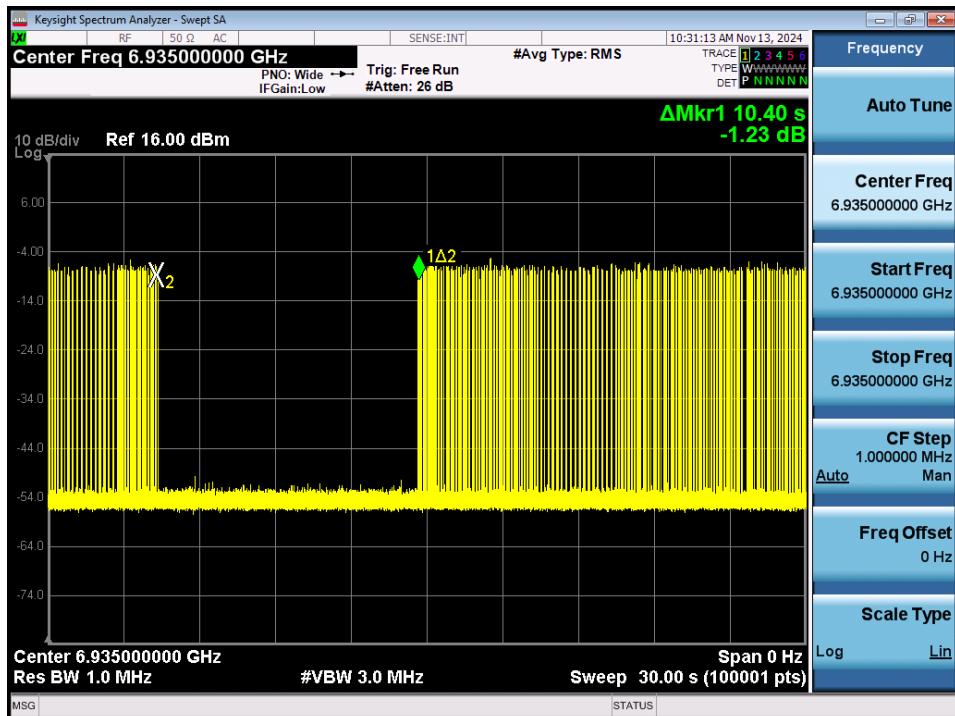


Plot 7-309. Contention Based Protocol Timing Plot – UNII 8 – 20MHz Channel 197

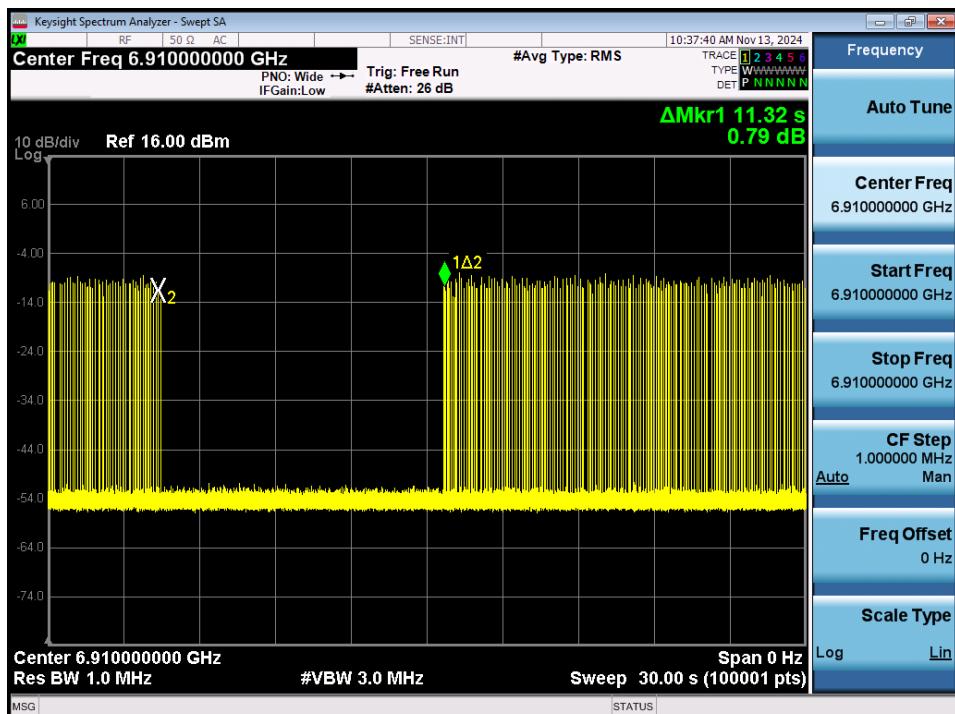


Plot 7-310. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – Low

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 132 of 188

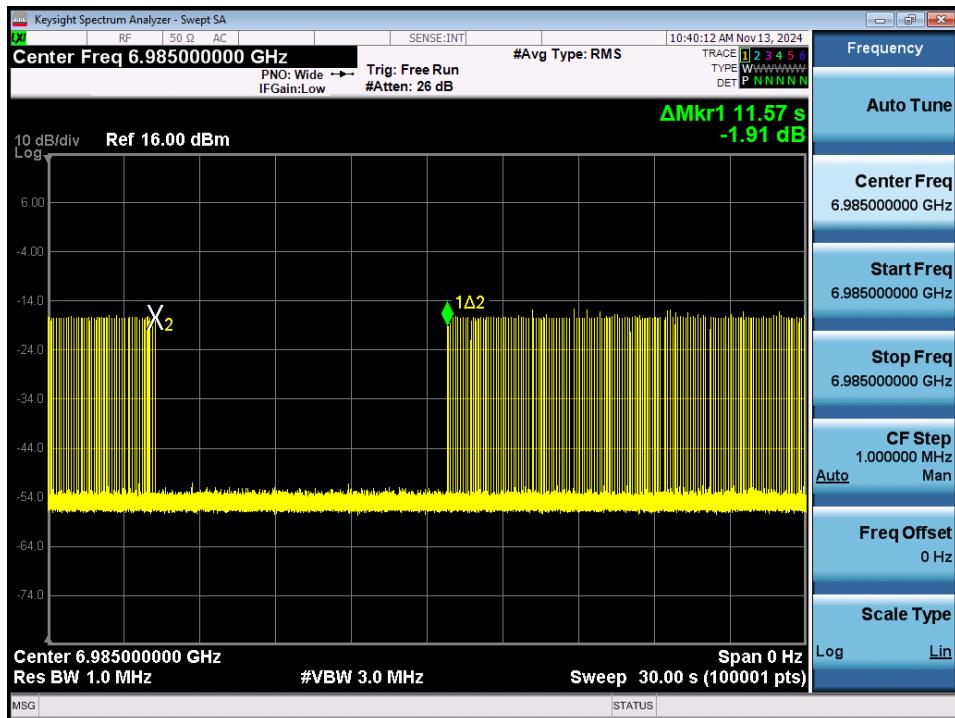


Plot 7-311. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – Mid

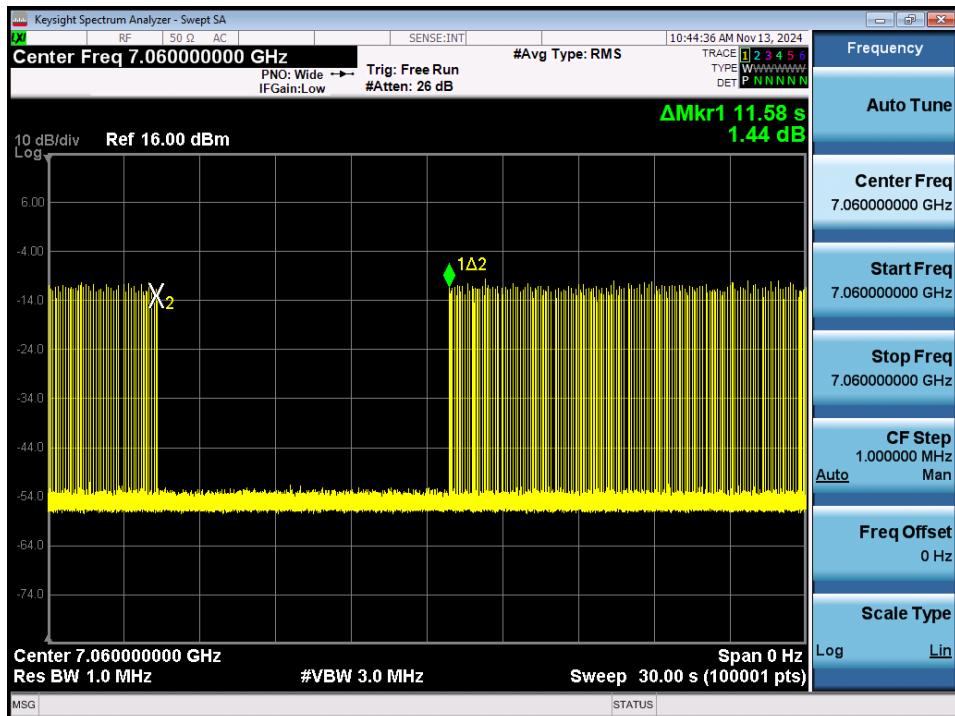


Plot 7-312. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Channel 207 – High

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 133 of 188

CBP Bandwidth Reduction Plots

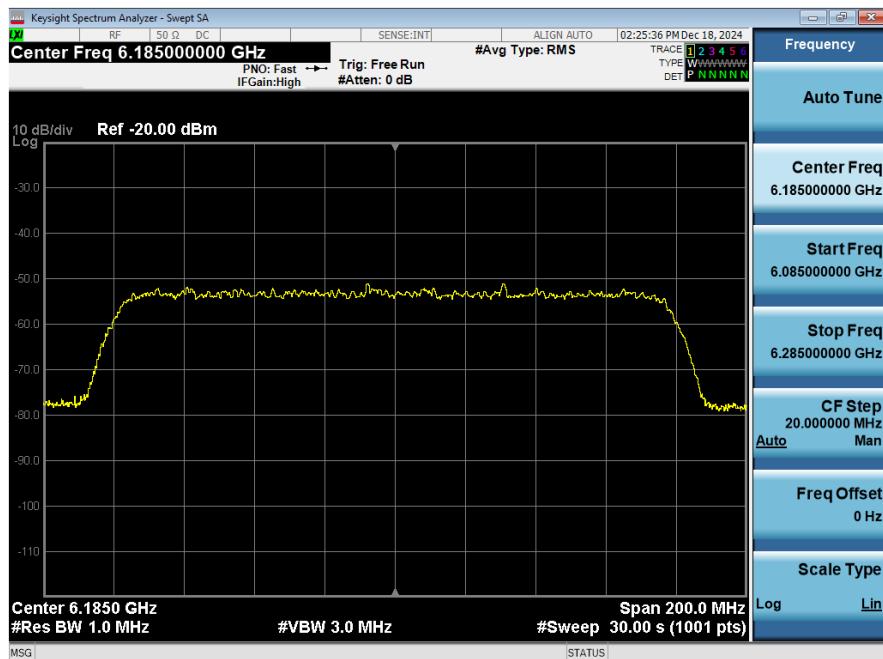


Plot 7-313. 160MHz Bandwidth, Before AWGN Signal Injected – Channel 47

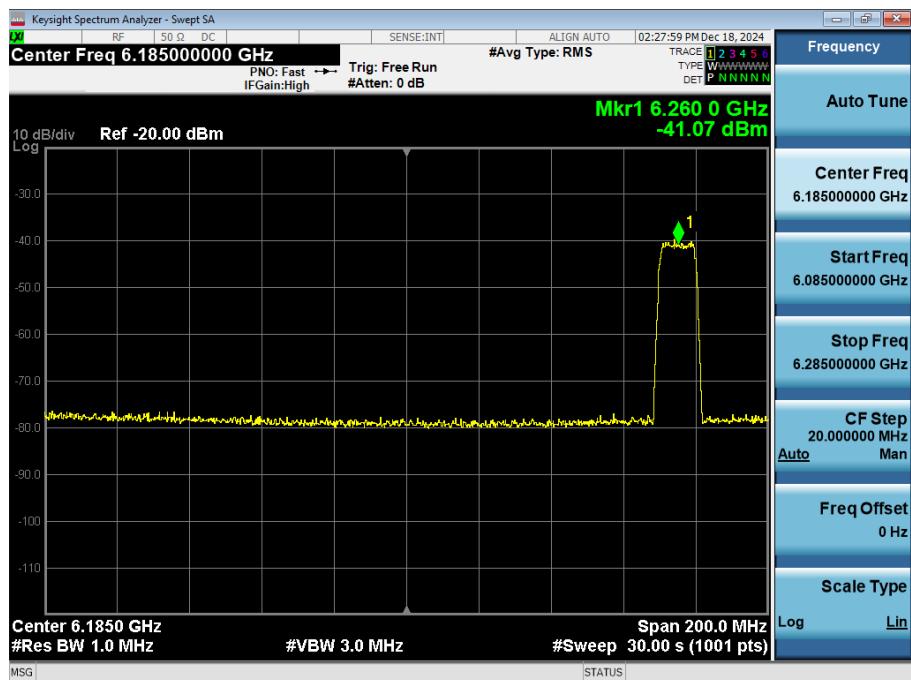


Plot 7-314. 160MHz Bandwidth, AWGN Signal Injected at Low End – Channel 47

FCC ID: BCGA3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 134 of 188

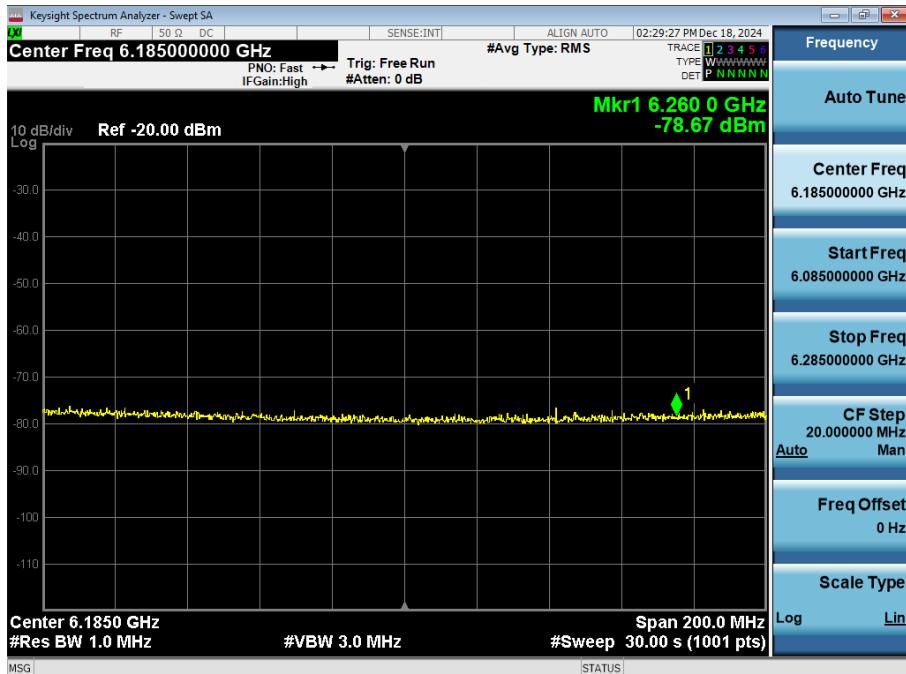

Plot 7-315. 160MHz Bandwidth, AWGN Signal Injected at Center – Channel 47

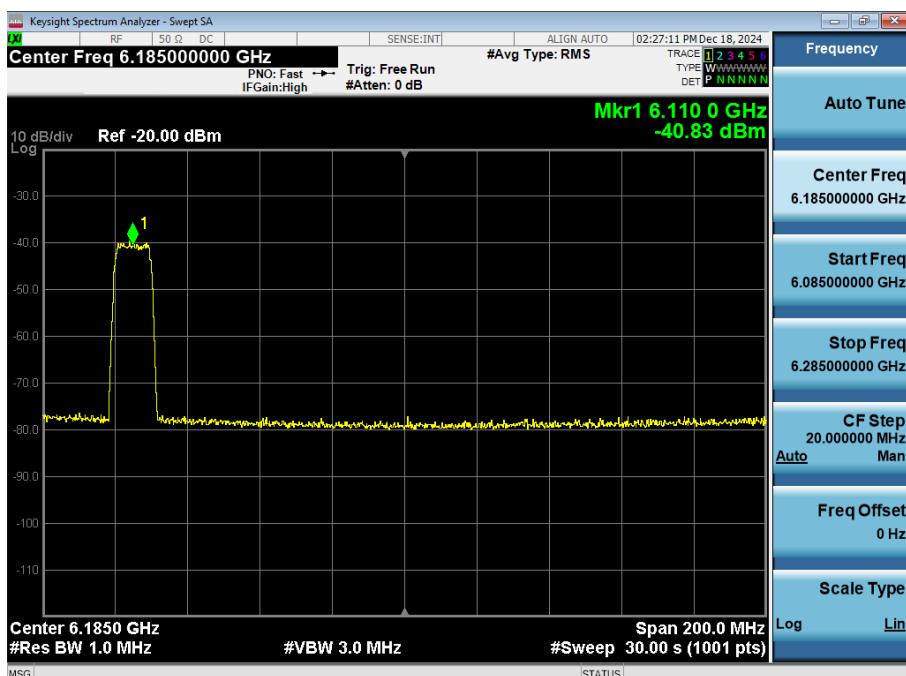

Plot 7-316. 160MHz Bandwidth, AWGN Signal Injected at High End – Channel 47

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 135 of 188

7.7 Radiated Spurious Emissions – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11ax(SU) (20MHz BW), 802.11ax(SU) (40MHz BW), 802.11ax(SU) (80MHz), 802.11ax(SU) (160MHz) and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.925-7.125 GHz band: All emissions outside of the 5.925-7.125 GHz band shall not exceed an EIRP of -27 dBm/MHz. Emissions found in a restricted band are subject to the limits of 15.209 and RSS-Gen (8.9) as shown in the table below.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-45. Radiated Limits

Test Procedures Used

ANSI C63.10-2020 – Sections 12.7.7, 12.7.6
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times$ span/RBW)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 136 of 188

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

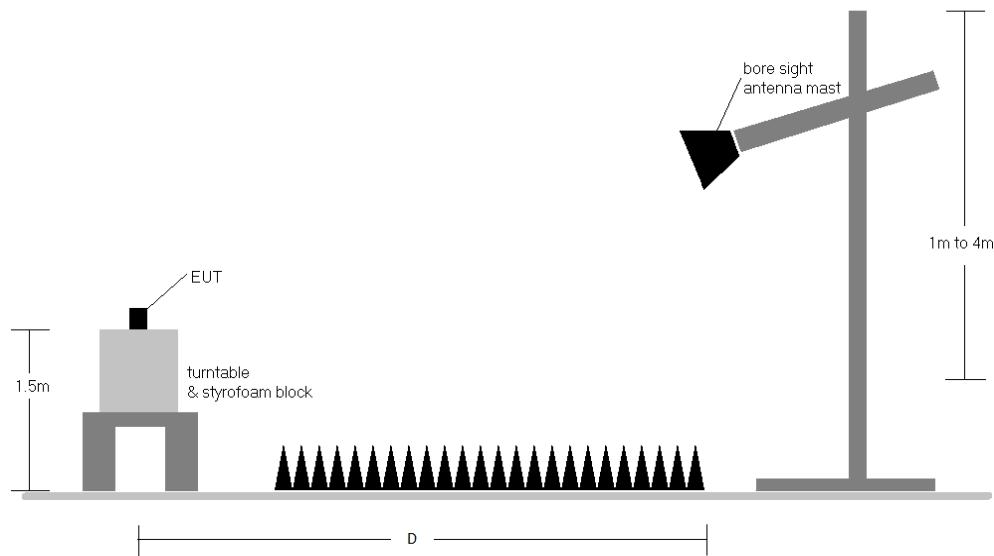


Figure 7-6. Test Instrument & Measurement Setup

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 137 of 188

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-45.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-45. All spurious emissions that do not lie in a restricted band are subject to a limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. All data rates and antenna configurations were investigated and only the worse case is reported
9. The unit was tested with all possible modes and only the highest emission is reported.
10. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
11. All radiated measurements were tested at the highest supported power setting per band.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB] – Preamplifier Gain [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.7.2 to Section 7.7.13 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA3266 IC: 579C-A3266	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		Page 138 of 188

7.7.1 CDD Radiated Spurious Emission

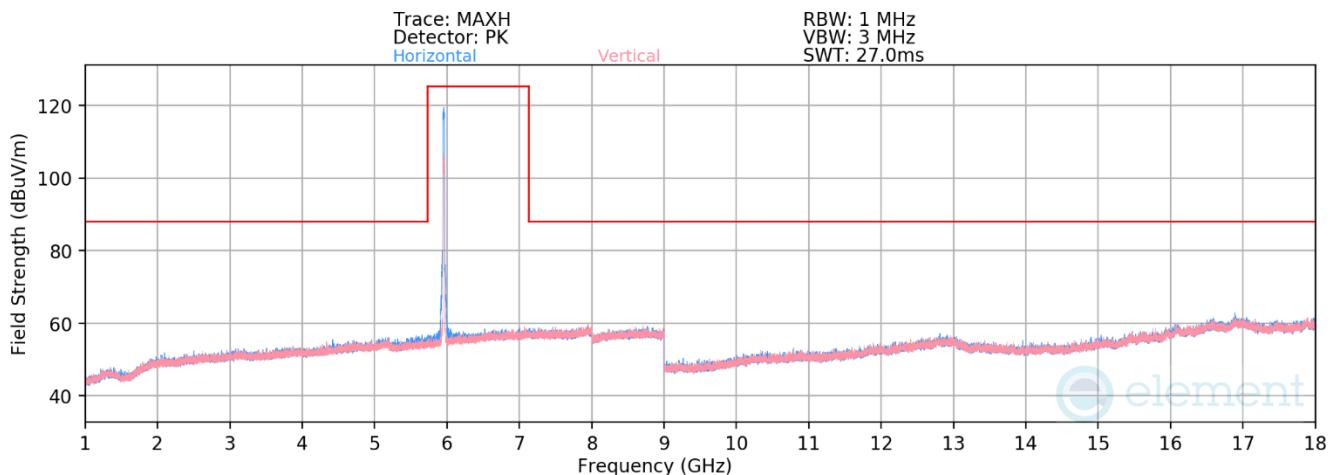


Plot 7-317. Radiated Spurious Emissions 1-18GHz CDD (802.11ax – Ch. 1)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5955MHz
 Channel: 1


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11910.00	Average	H	-	-	-85.10	20.36	42.26	53.98	-11.72
* 11910.00	Peak	H	-	-	-73.85	20.36	53.51	73.98	-20.47
* 17865.00	Average	H	-	-	-88.00	28.71	47.71	53.98	-6.27
* 17865.00	Peak	H	-	-	-76.84	28.71	58.87	73.98	-15.11

Table 7-46. Radiated Spurious Emission Measurements CDD

FCC ID: BCGA3266 IC: 579C-A3266	element				MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device				Page 139 of 188

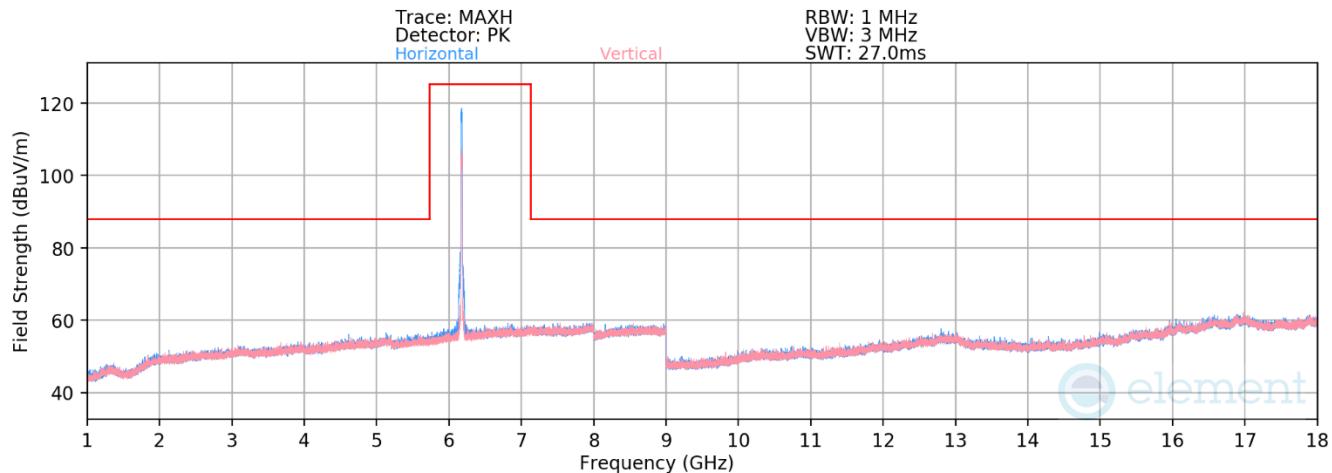

Plot 7-318. Radiated Spurious Emissions 1-18GHz CDD (802.11ax – Ch. 45)

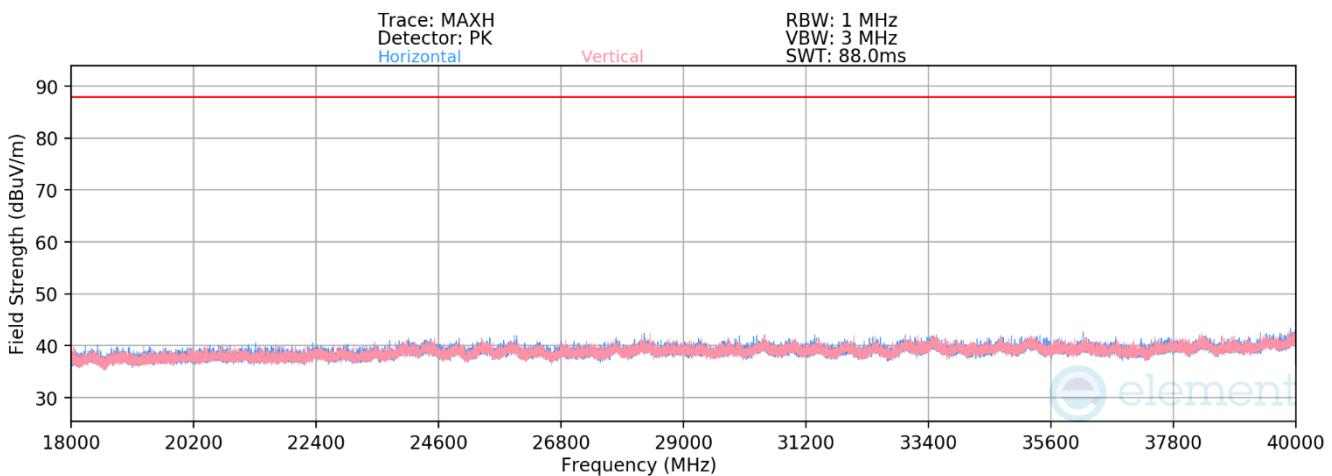


Plot 7-319. Radiated Spurious Emissions 18-40GHz CDD (802.11ax – Ch. 45)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
* 12350.00	Average	H	-	-	-85.24	20.94	42.70	53.98	-11.28
* 12350.00	Peak	H	-	-	-74.25	21.00	53.74	73.98	-20.24

Table 7-47. Radiated Spurious Emission Measurements CDD

FCC ID: BCGA3266 IC: 579C-A3266	MEASUREMENT REPORT (CERTIFICATION)						Approved by: Technical Manager	
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device						

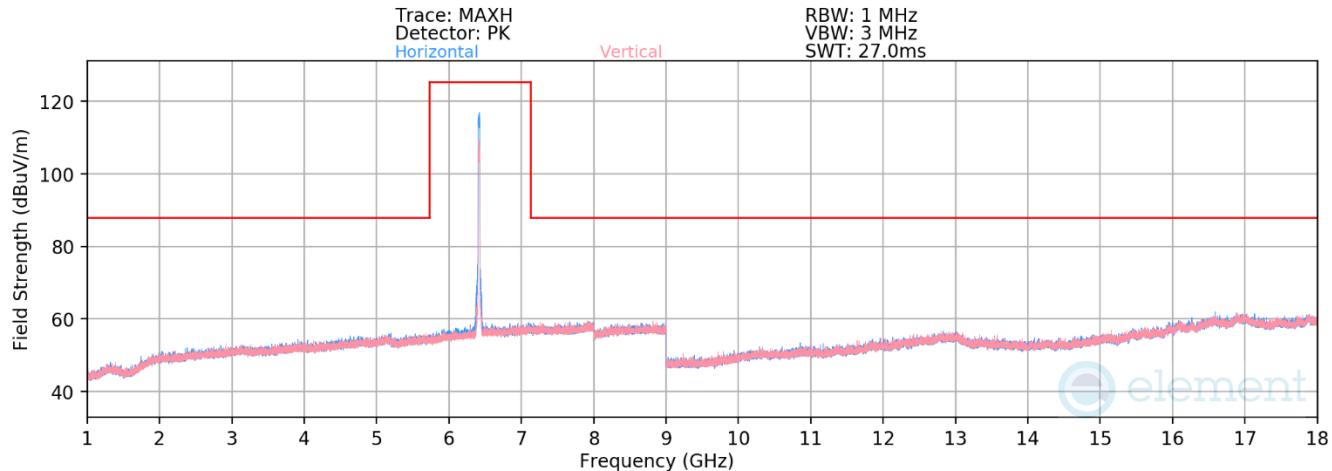


Plot 7-320. Radiated Spurious Emissions 1-18GHz CDD (802.11ax – Ch.93)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
12830.00	Average	H	-	-	-85.02	21.66	43.64	68.23	-24.59
12830.00	Peak	H	-	-	-73.62	21.66	55.04	88.23	-33.19

Table 7-48. Radiated Spurious Emission Measurements CDD

FCC ID: BCGA3266 IC: 579C-A3266	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device			

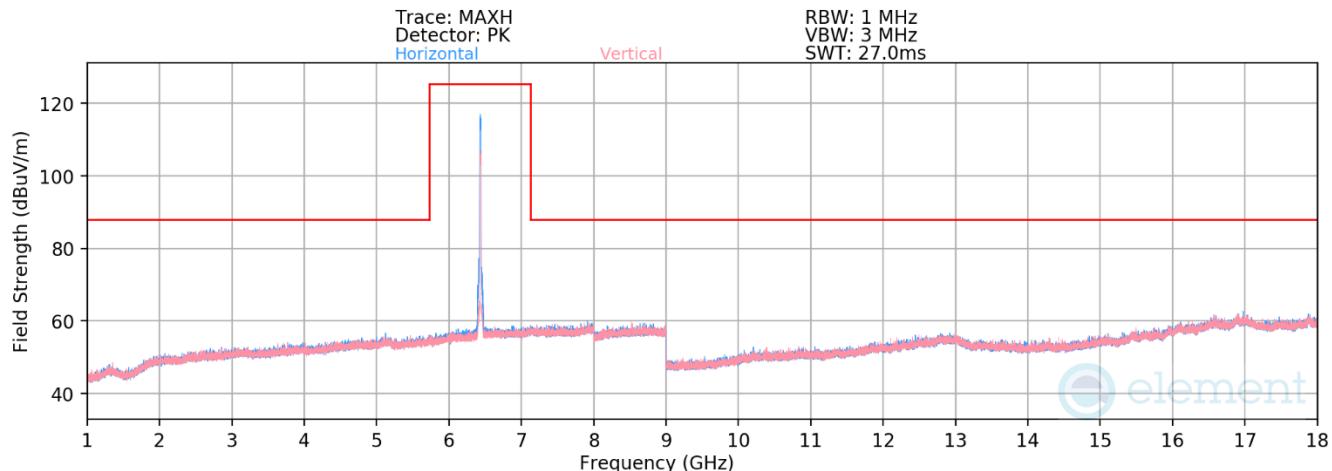


Plot 7-321. Radiated Spurious Emissions 1-18GHz CDD (802.11ax – Ch.97)

Mode:	802.11ax
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6435MHz
Channel:	97


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
12870.00	Average	V	-	-	-85.26	21.99	43.73	68.23	-24.50
12870.00	Peak	V	-	-	-73.40	21.99	55.59	88.23	-32.64

Table 7-49. Radiated Spurious Emission Measurements CDD

FCC ID: BCGA3266 IC: 579C-A3266	element			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device			

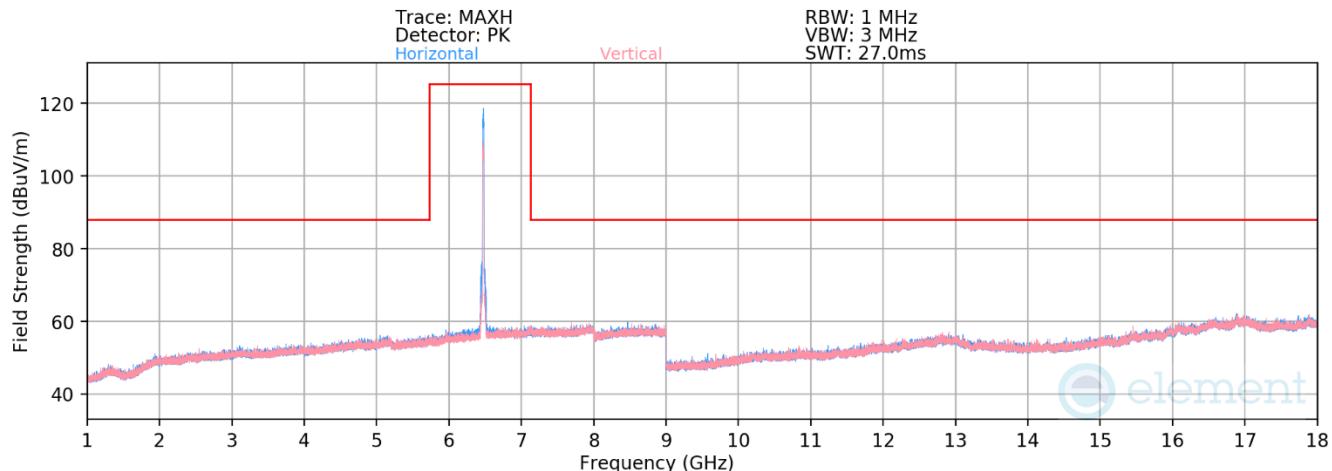

Plot 7-322. Radiated Spurious Emissions 1-18GHz CDD (802.11ax – Ch.105)

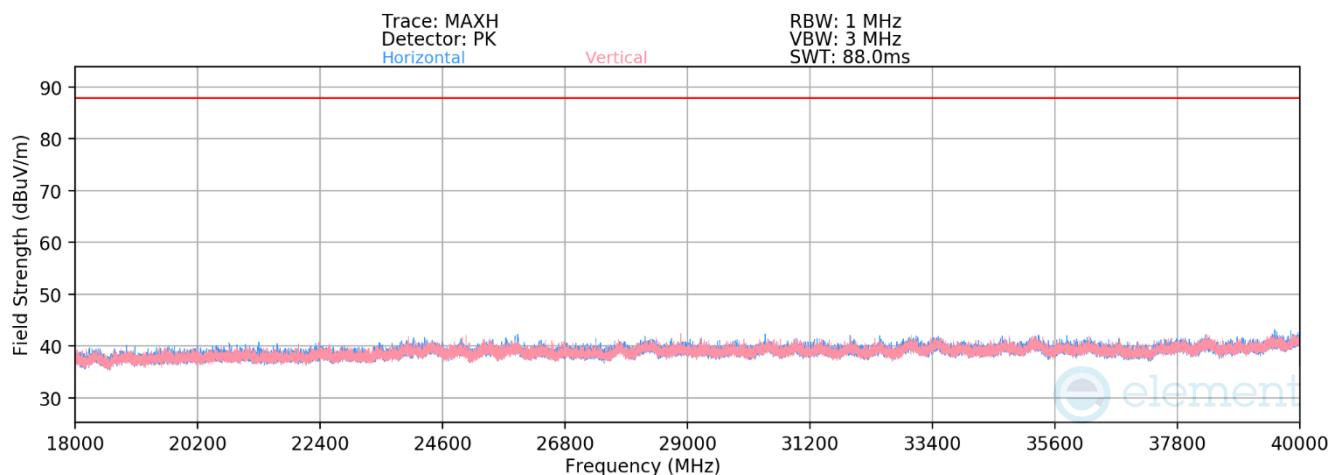


Plot 7-323. Radiated Spurious Emissions 18-40GHz CDD (802.11ax – Ch. 105)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
12950.00	Average	H	-	-	-85.11	22.07	43.96	68.23	-24.27
12950.00	Peak	H	-	-	-73.87	22.07	55.20	88.23	-33.03

Table 7-50. Radiated Spurious Emission Measurements CDD

FCC ID: BCGA3266 IC: 579C-A3266	MEASUREMENT REPORT (CERTIFICATION)						Approved by: Technical Manager	
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device						

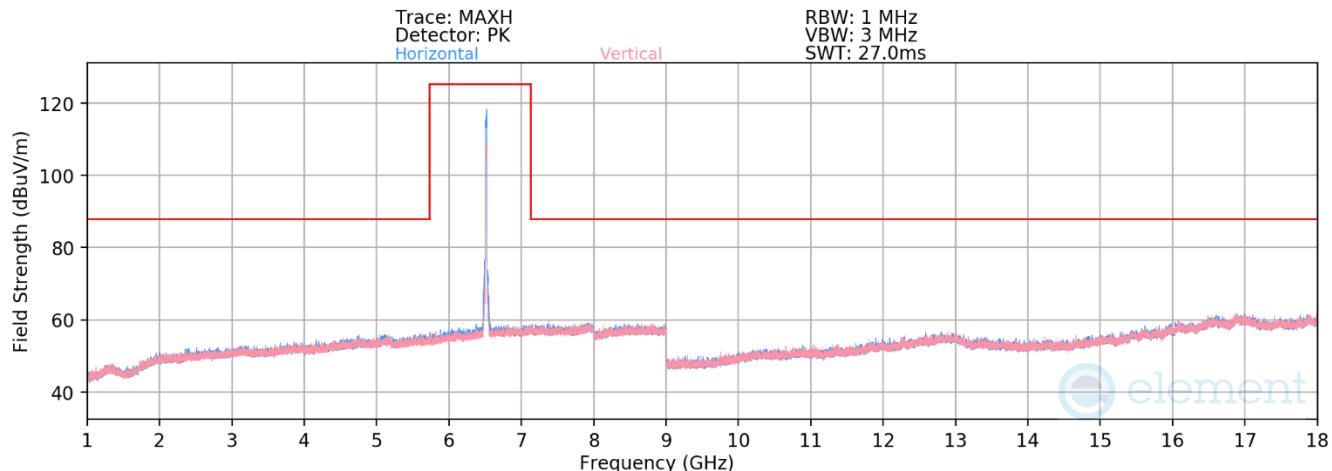


Plot 7-324. Radiated Spurious Emissions 1-18GHz CDD (802.11ax – Ch.113)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
13030.00	Average	H	-	-	-85.17	22.34	44.18	68.23	-24.05
13030.00	Peak	H	-	-	-73.89	22.34	55.45	88.23	-32.78

Table 7-51. Radiated Spurious Emission Measurements CDD

FCC ID: BCGA3266 IC: 579C-A3266	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 144 of 188	

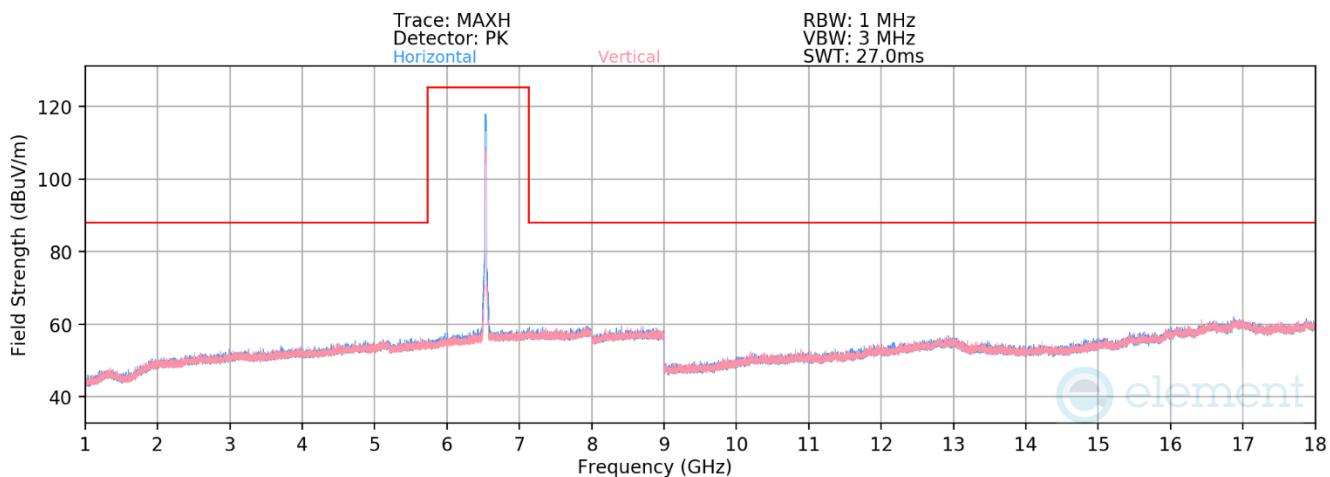


Plot 7-325. Radiated Spurious Emissions 1-18GHz CDD (802.11ax – Ch.117)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
13070.00	Average	V	-	-	-85.35	22.12	43.77	68.23	-24.46
13070.00	Peak	V	-	-	-73.71	21.89	55.19	88.23	-33.04

Table 7-52. Radiated Spurious Emission Measurements CDD

FCC ID: BCGA3266 IC: 579C-A3266	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device			

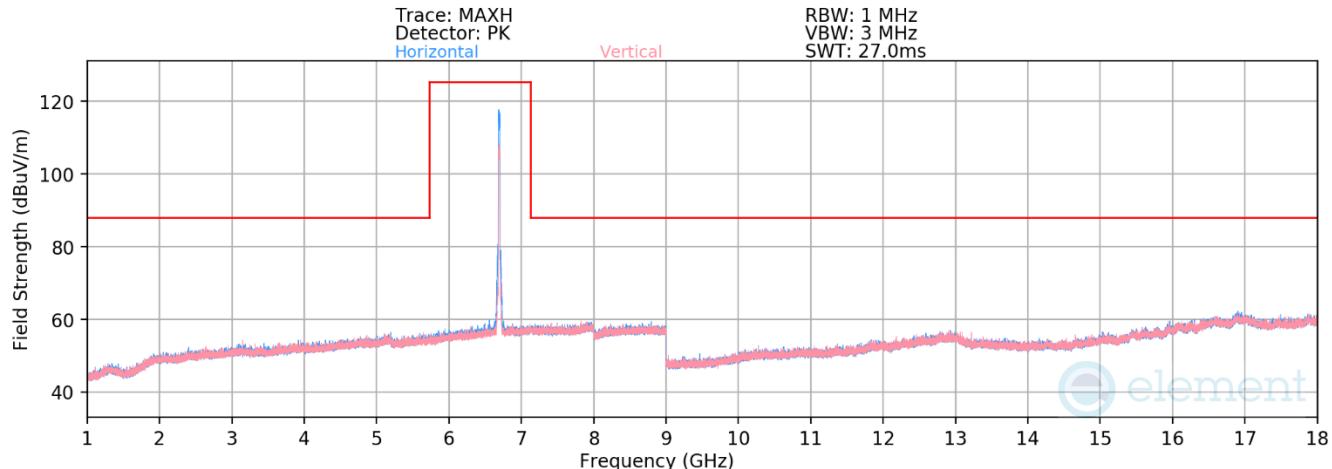

Plot 7-326. Radiated Spurious Emissions 1-18GHz CDD (802.11ax – Ch.149)

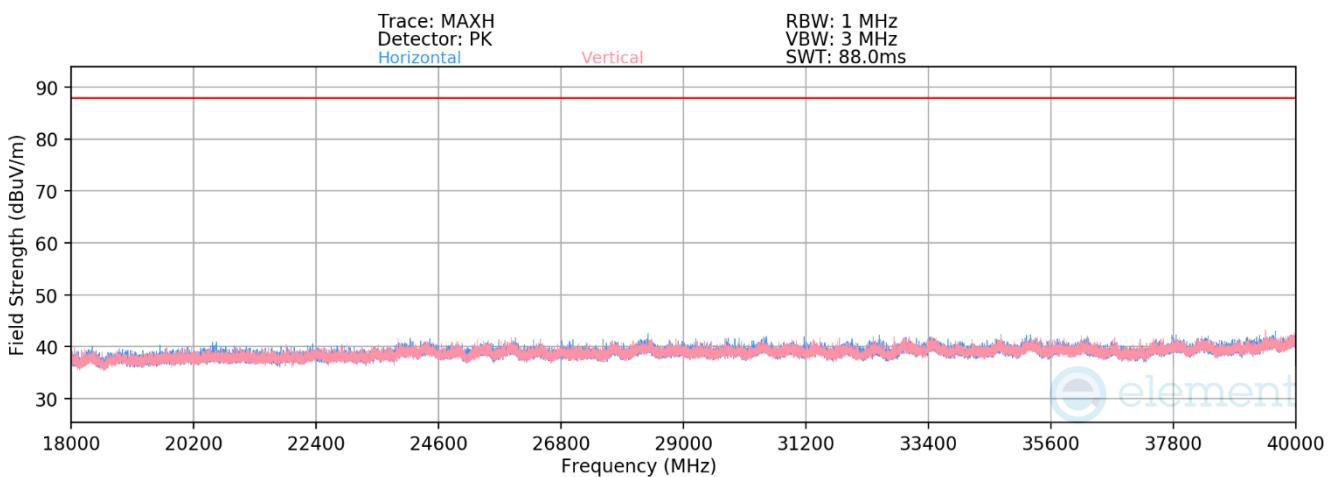


Plot 7-327. Radiated Spurious Emissions 18-40GHz CDD (802.11ax – Ch. 149)

Mode:	802.11ax
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6695MHz
Channel:	149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 13390.00	Average	V	-	-	-85.50	22.21	43.71	53.98	-10.27
* 13390.00	Peak	V	-	-	-73.79	21.88	55.08	73.98	-18.90

Table 7-53. Radiated Spurious Emission Measurements CDD

FCC ID: BCGA3266 IC: 579C-A3266	MEASUREMENT REPORT (CERTIFICATION)					Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device				Page 146 of 188

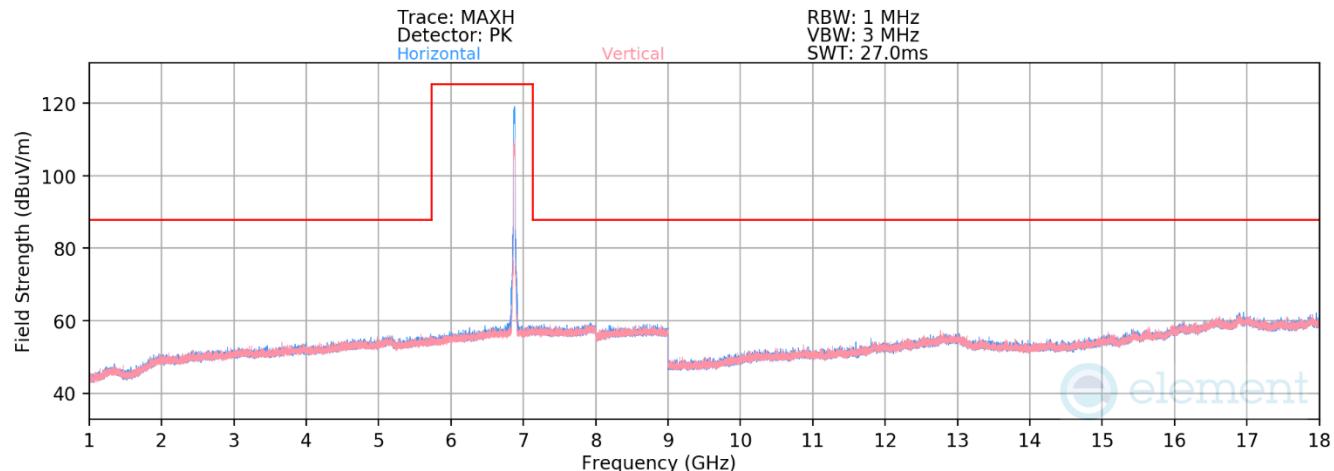


Plot 7-328. Radiated Spurious Emissions 1-18GHz CDD (802.11ax – Ch.185)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
13750.00	Average	V	-	-	-85.63	21.72	43.09	68.23	-25.14
13750.00	Peak	V	-	-	-73.96	21.83	54.87	88.23	-33.36

Table 7-54. Radiated Spurious Emission Measurements CDD

FCC ID: BCGA3266 IC: 579C-A3266	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 147 of 188	

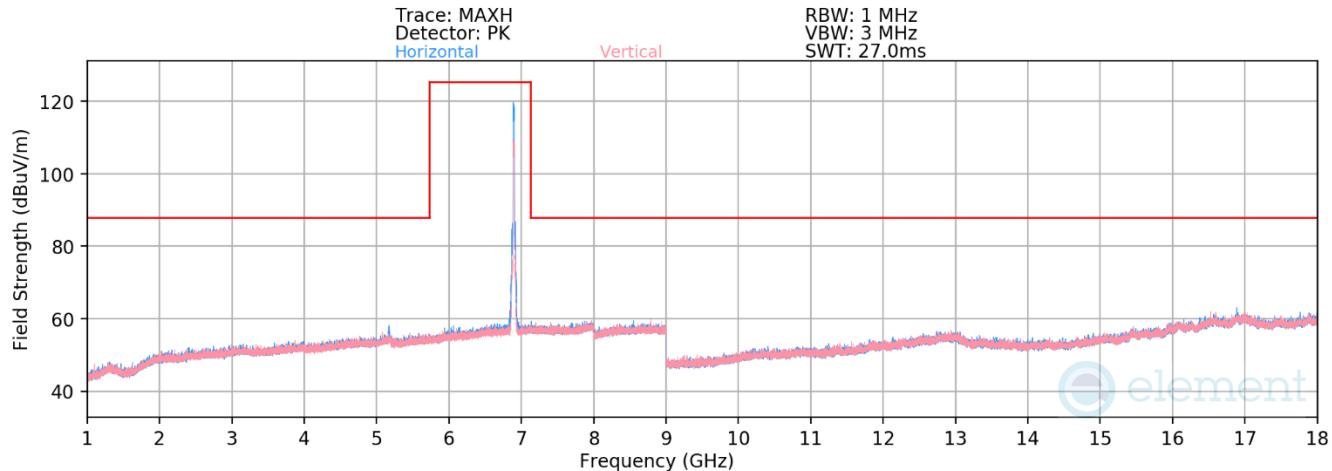

Plot 7-329. Radiated Spurious Emissions 1-18GHz CDD (802.11ax – Ch.189)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
5160.00	Average	H	338	273	-75.19	15.44	47.25	68.23	-20.98
5160.00	Peak	H	338	273	-70.46	15.44	51.98	88.23	-36.25
13790.00	Average	H	-	-	-86.10	22.42	43.32	68.23	-24.91
13790.00	Peak	H	-	-	-75.02	22.42	54.40	88.23	-33.83

Table 7-55. Radiated Spurious Emission Measurements CDD


FCC ID: BCGA3266 IC: 579C-A3266	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

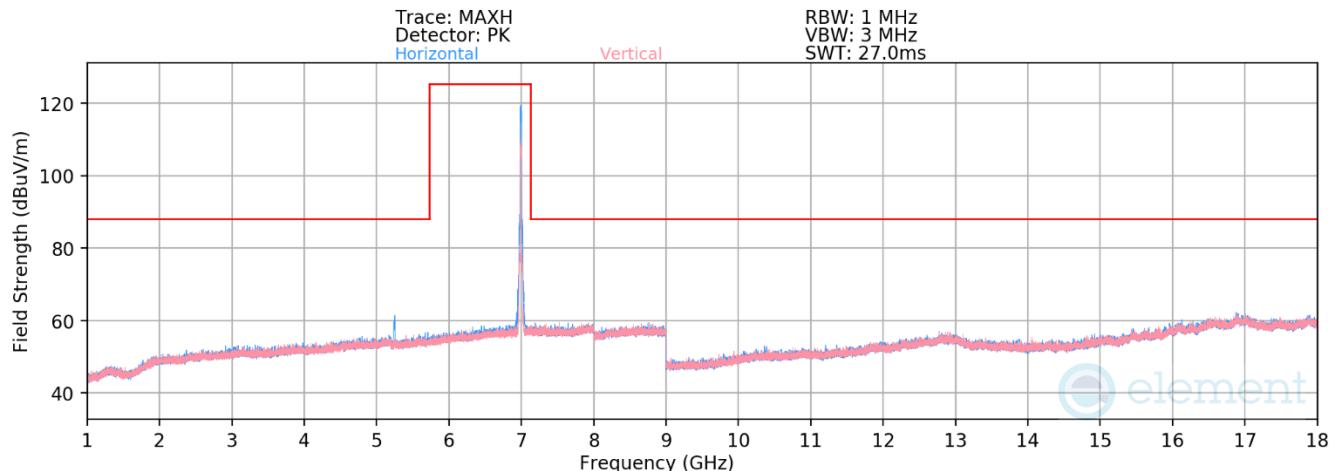

Plot 7-330. Radiated Spurious Emissions 1-18GHz CDD (802.11ax – Ch.209)

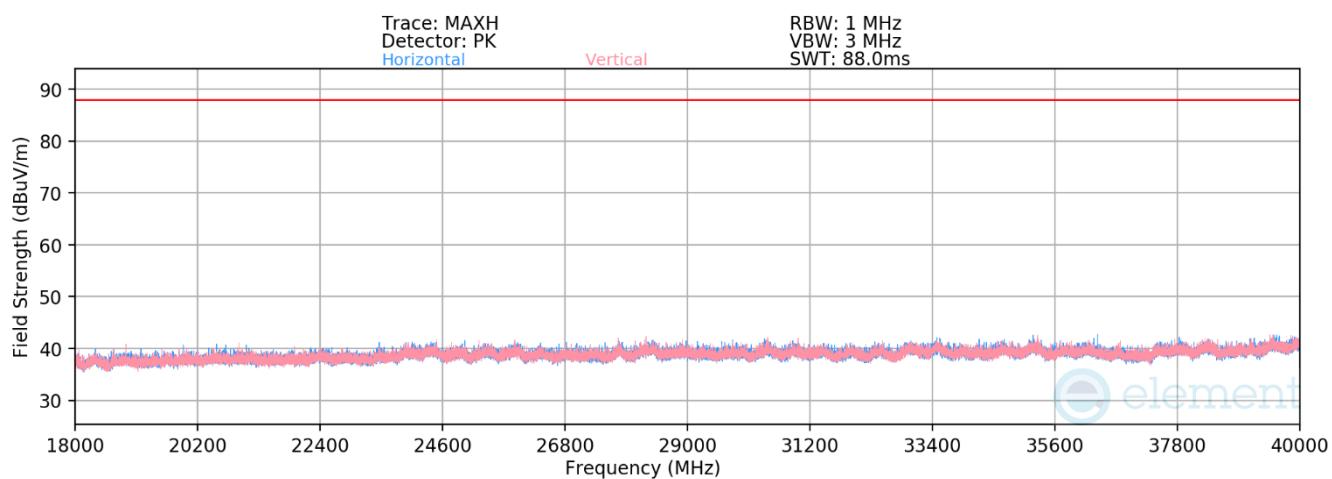

Plot 7-331. Radiated Spurious Emissions 18-40GHz CDD (802.11ax – Ch. 209)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 149 of 188

Mode:	802.11ax
Data Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6995MHz
Channel:	209


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
5250.00	Average	H	329	273	-70.48	15.46	51.98	68.23	-16.25
5250.00	Peak	H	329	273	-60.03	15.46	62.43	88.23	-25.80
13990.00	Average	H	-	-	-86.15	22.05	42.90	68.23	-25.33
13990.00	Peak	H	-	-	-74.18	22.05	54.87	88.23	-33.36

Table 7-56. Radiated Spurious Emission Measurements CDD

FCC ID: BCGA3266 IC: 579C-A3266	 element MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 150 of 188	

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

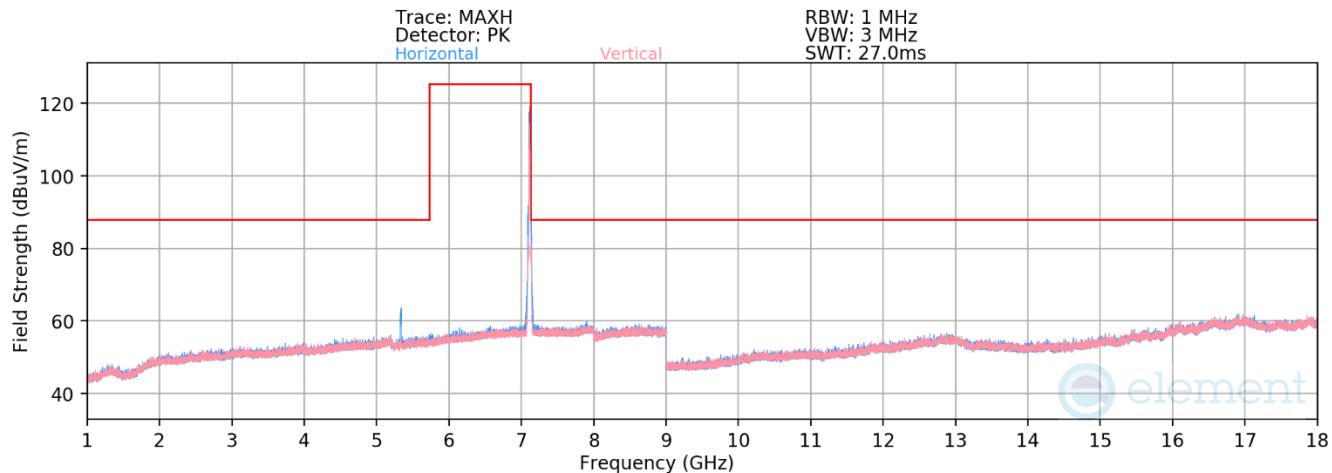

Plot 7-332. Radiated Spurious Emissions 1-18GHz CDD (802.11ax – Ch.233)

Mode: 802.11ax
 Data Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
5375.00	Average	H	341	279	-65.89	16.00	57.11	68.23	-11.12
5375.00	Peak	H	341	279	-55.77	16.00	67.23	88.23	-21.00
14230.00	Average	H	-	-	-86.54	22.86	43.32	68.23	-24.91
14230.00	Peak	H	-	-	-75.03	22.86	54.83	88.23	-33.40

Table 7-57. Radiated Spurious Emission Measurements CDD

FCC ID: BCGA3266 IC: 579C-A3266	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		


V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Material Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.7.2 Antenna WF8 Radiated Band Edge Measurements (20MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

Mode 802.11a
 Data Rate MCS54
 Distance of Measurement 3 Meters
 Operating Frequency 5955MHz
 Channel 1

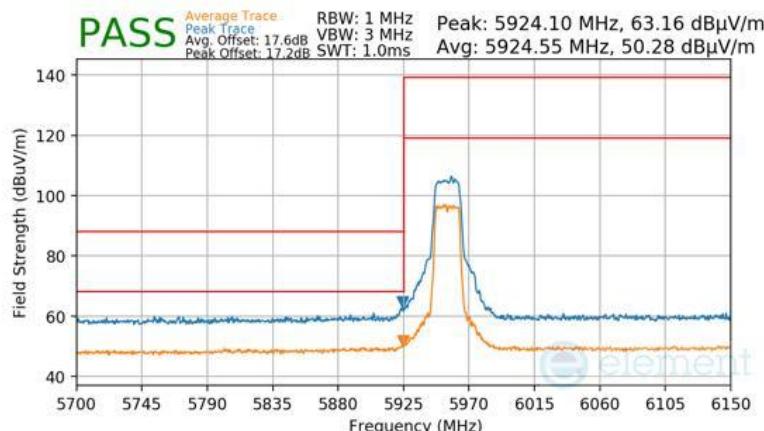

Plot 7-333 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode 802.11a
 Data Rate MCS54
 Distance of Measurement 3 Meters
 Operating Frequency 7095MHz
 Channel 229

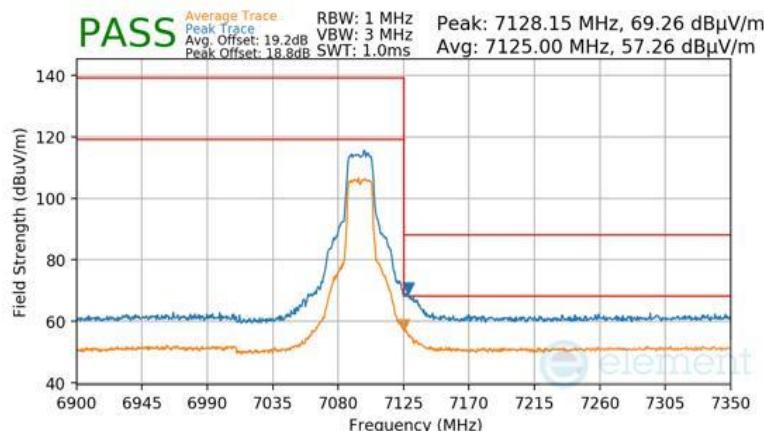


Plot 7-334 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		Page 152 of 188

Mode	802.11a
Data Rate	54Mbps
Distance of Measurement	3 Meters
Operating Frequency	7115MHz
Channel	233

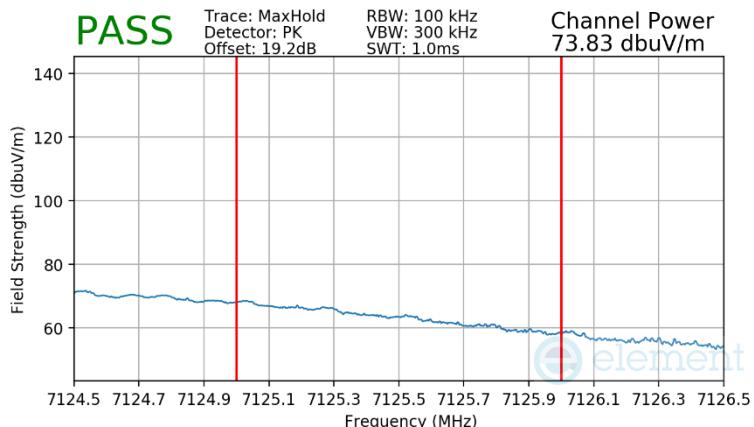

Plot 7-335 Antenna WF8 Radiated Upper Band Edge (Peak – UNII Band 8)

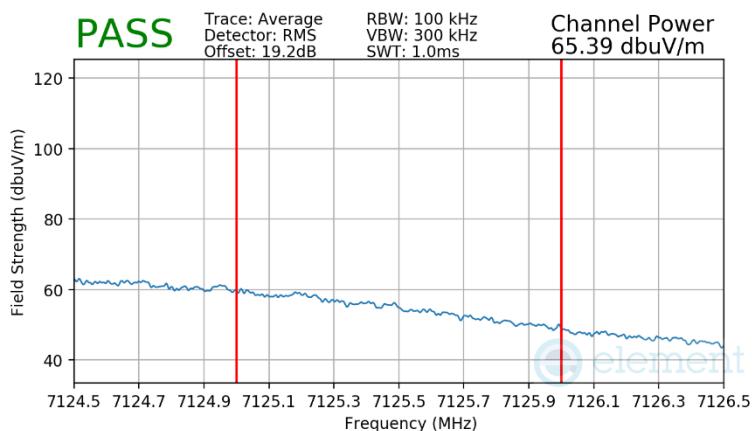


Plot 7-336 Antenna WF8 Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 153 of 188

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 5955MHz
Channel 1


Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 5955MHz
Channel 1

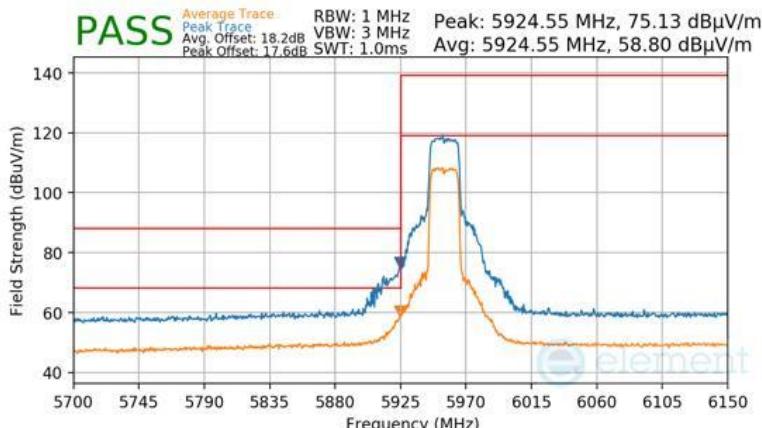

Plot 7-337 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 7095MHz
Channel 229


Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 7095MHz
Channel 229

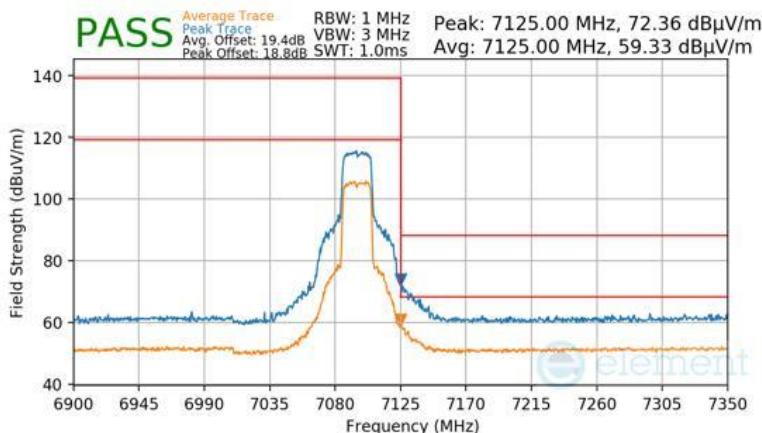


Plot 7-338 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 154 of 188

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 7115MHz
Channel 233

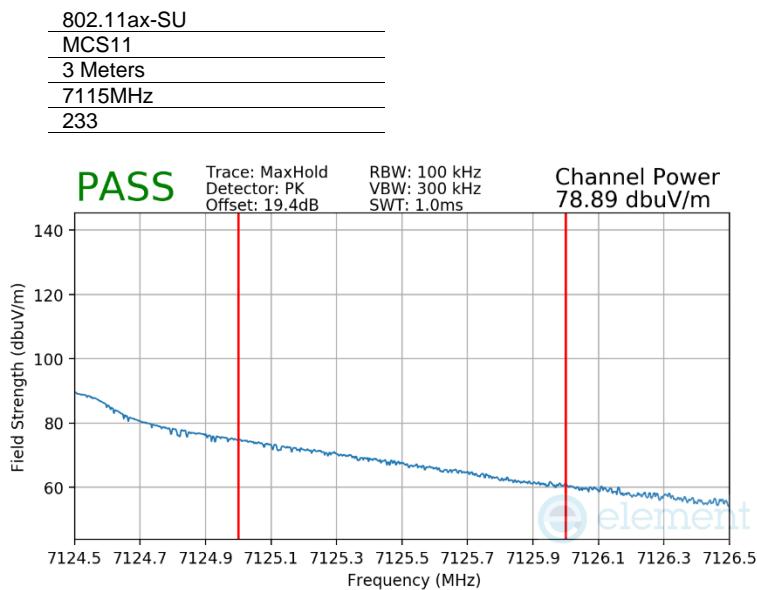

Plot 7-339 Antenna WF8 Radiated Upper Band Edge (Peak – UNII Band 8)

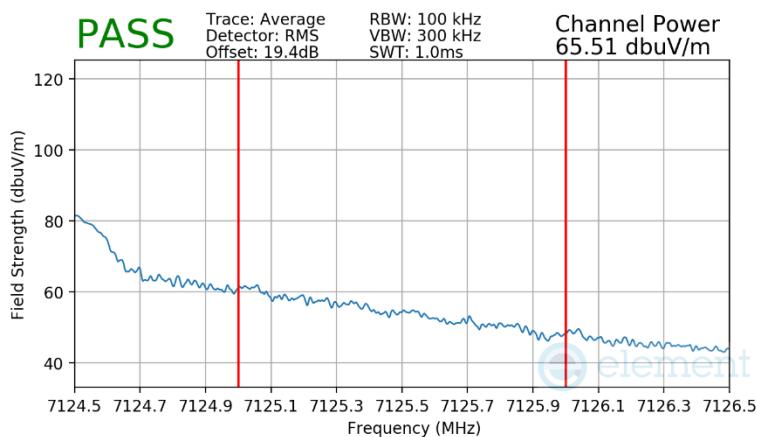


Plot 7-340 Antenna WF8 Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 155 of 188	

7.7.3 Antenna WF8 Radiated Band Edge Measurements (40MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	5965MHz
Channel	3

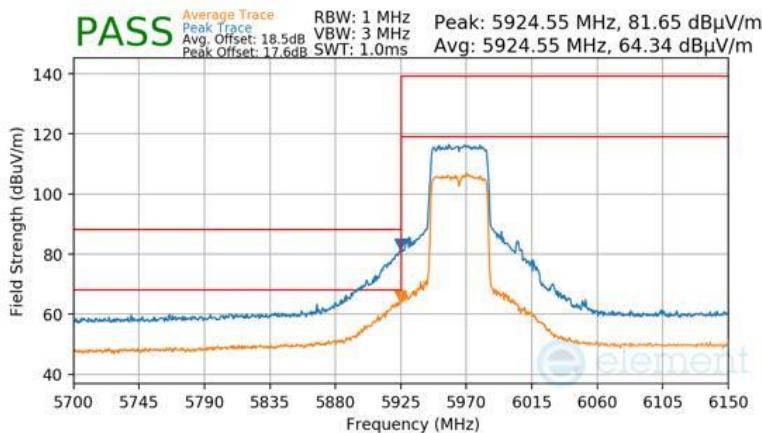

Plot 7-341 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	6005MHz
Channel	11

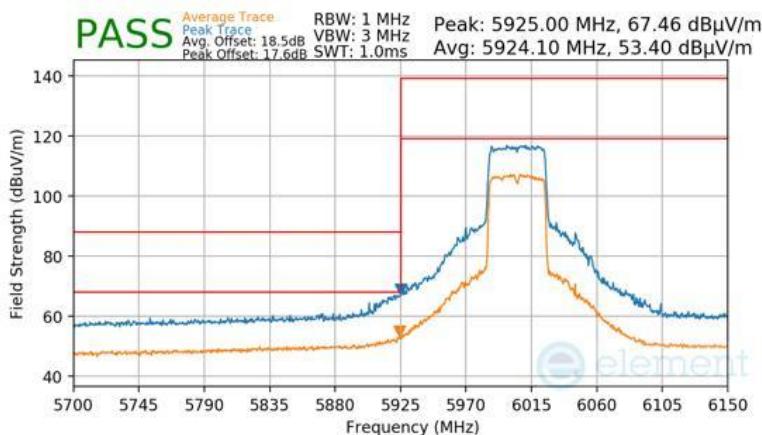

Plot 7-342 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 156 of 188

Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7085MHz
Channel	227

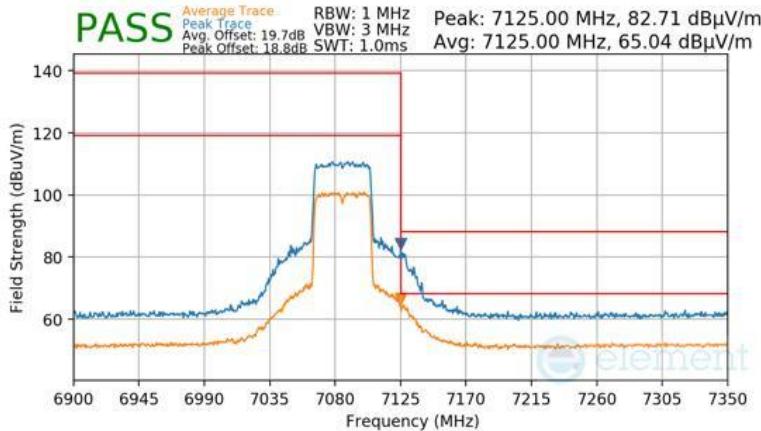


Plot 7-343 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 157 of 188

7.7.4 Antenna WF8 Radiated Band Edge Measurements (80MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Mode 802.11ax-SU
 Data Rate MCS11
 Distance of Measurement 3 Meters
 Operating Frequency 5985MHz
 Channel 7

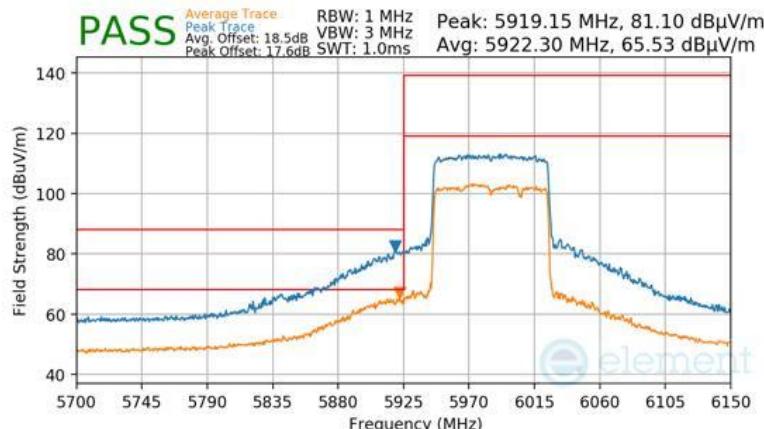

Plot 7-344 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode 802.11ax-SU
 Data Rate MCS11
 Distance of Measurement 3 Meters
 Operating Frequency 6065MHz
 Channel 23

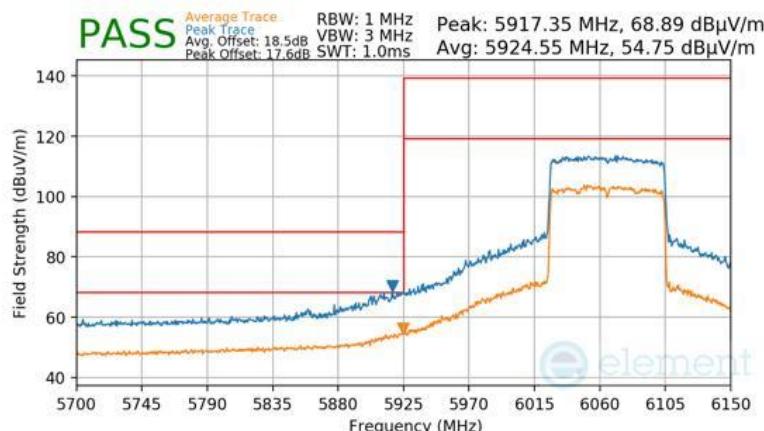

Plot 7-345 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3266 IC: 579C-A3266	 element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		Page 158 of 188

Mode	802.11ax-SU
Data Rate	MCS11
Distance of Measurement	3 Meters
Operating Frequency	7025MHz
Channel	215

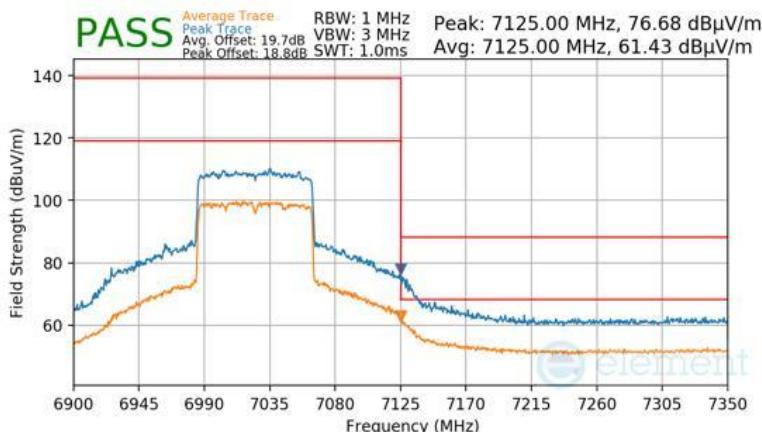


Plot 7-346 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 159 of 188

7.7.5 Antenna WF8 Radiated Band Edge Measurements (160MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 6025MHz
Channel 15

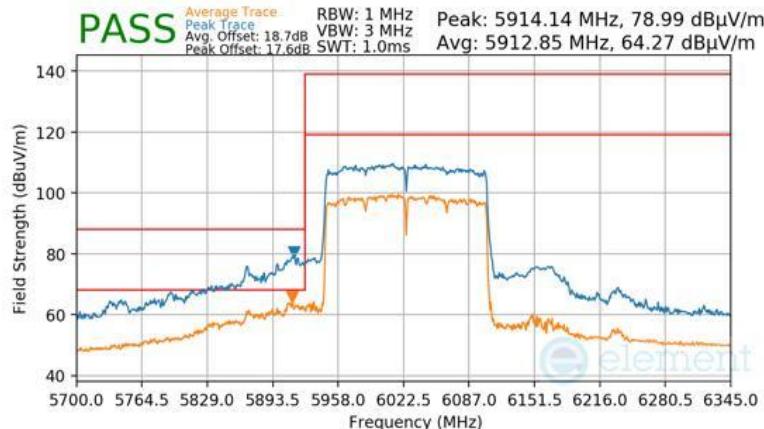

Plot 7-347 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 6185MHz
Channel 47

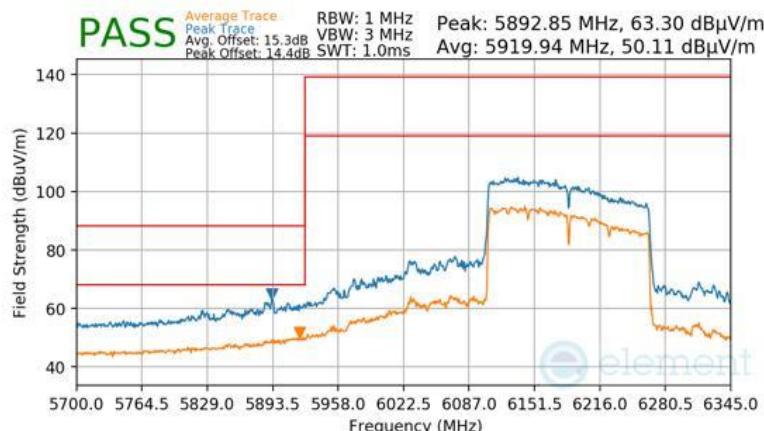


Plot 7-348 Antenna WF8 Radiated Lower Band Edge (Peak & Average – UNII Band 5)

FCC ID: BCGA3266	element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device		Page 160 of 188

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 6825MHz
Channel 175


Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 6825MHz
Channel 175

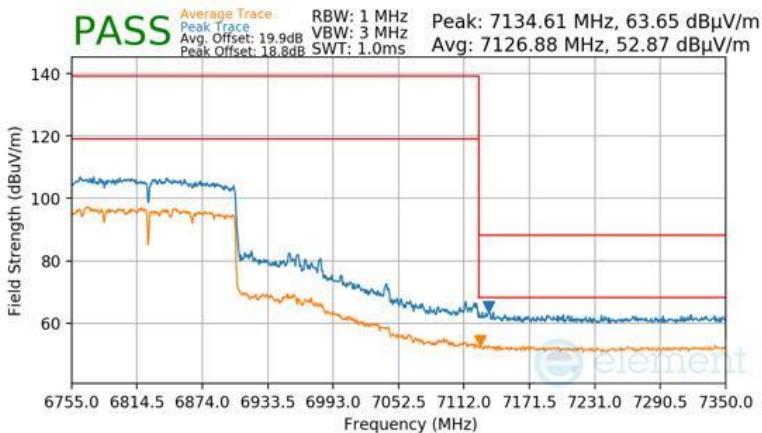

Plot 7-349 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 7)

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 6985MHz
Channel 207

Mode 802.11ax-SU
Data Rate MCS11
Distance of Measurement 3 Meters
Operating Frequency 6985MHz
Channel 207

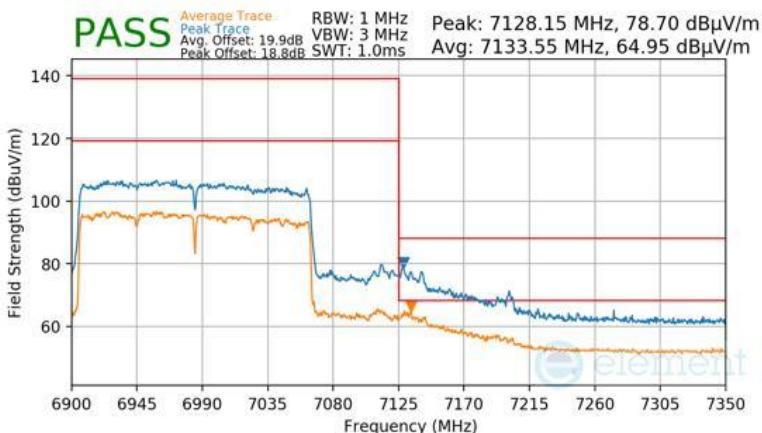


Plot 7-350 Antenna WF8 Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 161 of 188

7.7.6 Antenna WF7a Radiated Band Edge Measurements (20MHz BW)


§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

Mode	802.11a
Data Rate	MCS54
Distance of Measurement	3 Meters
Operating Frequency	5955MHz
Channel	1

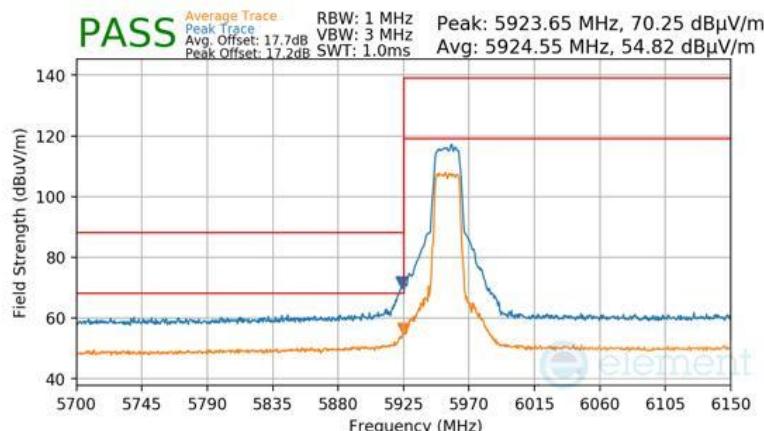

Plot 7-351 Antenna WF7a Radiated Lower Band Edge (Peak & Average – UNII Band 5)


Mode	802.11a
Data Rate	MCS54
Distance of Measurement	3 Meters
Operating Frequency	7095MHz
Channel	229

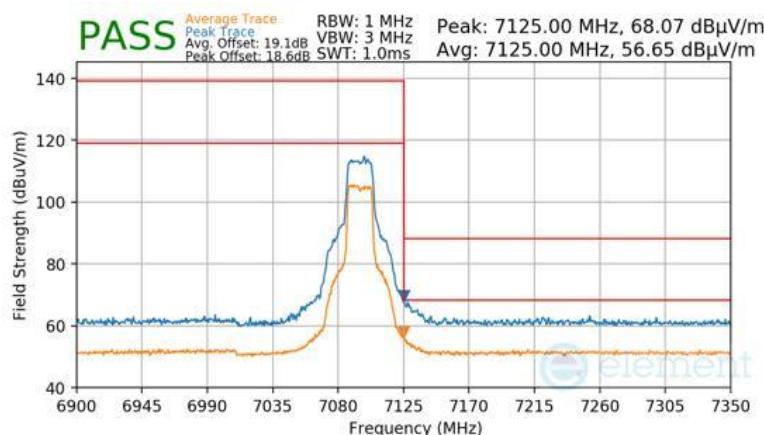


Plot 7-352 Antenna WF7a Radiated Upper Band Edge (Peak & Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 162 of 188

Mode 802.11a
Data Rate 54Mbps
Distance of Measurement 3 Meters
Operating Frequency 7115MHz
Channel 233

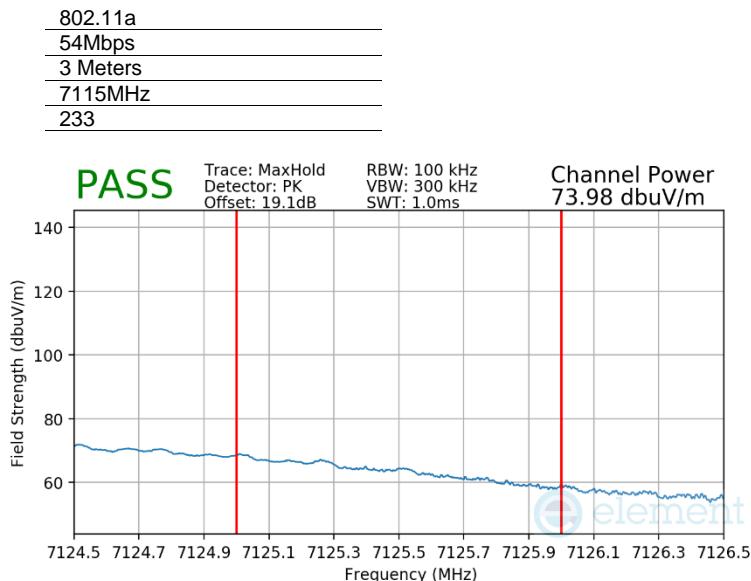

Plot 7-353 Antenna WF7a Radiated Upper Band Edge (Peak – UNII Band 8)

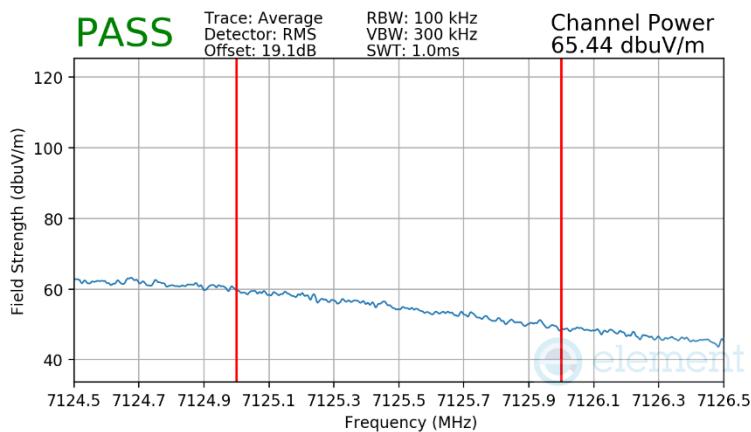

Plot 7-354 Antenna WF7a Radiated Upper Band Edge (Average – UNII Band 8)

FCC ID: BCGA3266 IC: 579C-A3266	 element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210072-12-R3.BCG	Test Dates: 10/25/2024 - 1/10/2025	EUT Type: Tablet Device	Page 163 of 188