

7.4.27 FCC CDD Primary Conducted Output Power Measurements (RU52)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 3b	Summed		
	5260	52	CDD	52	37	50/58.8 (MCS11)	11.64	11.76	14.71	23.64	-8.93
			CDD	52	39	50/58.8 (MCS11)	11.87	11.82	14.85	23.64	-8.79
			CDD	52	40	50/58.8 (MCS11)	11.74	11.71	14.73	23.64	-8.91
	5300	60	CDD	52	37	50/58.8 (MCS11)	11.70	11.62	14.67	23.64	-8.97
			CDD	52	39	50/58.8 (MCS11)	11.72	11.99	14.87	23.64	-8.77
			CDD	52	40	50/58.8 (MCS11)	11.83	11.96	14.90	23.64	-8.74
	5320	64	CDD	52	37	50/58.8 (MCS11)	11.91	11.72	14.82	23.64	-8.82
			CDD	52	39	50/58.8 (MCS11)	11.74	11.75	14.75	23.64	-8.89
			CDD	52	40	50/58.8 (MCS11)	11.74	11.84	14.80	23.64	-8.84
	5500	100	CDD	52	37	50/58.8 (MCS11)	11.86	11.76	14.82	23.63	-8.81
			CDD	52	39	50/58.8 (MCS11)	11.88	11.84	14.87	23.63	-8.76
			CDD	52	40	50/58.8 (MCS11)	11.98	11.78	14.89	23.63	-8.74
	5580	116	CDD	52	37	50/58.8 (MCS11)	11.69	11.70	14.71	23.63	-8.92
			CDD	52	39	50/58.8 (MCS11)	11.82	11.68	14.76	23.63	-8.87
			CDD	52	40	50/58.8 (MCS11)	11.86	11.86	14.87	23.63	-8.76
	5720	144	CDD	52	37	50/58.8 (MCS11)	11.62	11.98	14.82	23.63	-8.81
			CDD	52	39	50/58.8 (MCS11)	11.76	11.99	14.88	23.63	-8.75
			CDD	52	40	50/58.8 (MCS11)	11.74	11.84	14.80	23.63	-8.83

Table 7-113. FCC CDD Primary 20MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 3b	Summed		
	5270	54	CDD	52	37	50/58.8 (MCS11)	11.60	11.86	14.75	23.64	-8.89
			CDD	52	40	50/58.8 (MCS11)	11.83	11.86	14.85	23.64	-8.79
			CDD	52	44	50/58.8 (MCS11)	11.82	11.94	14.89	23.64	-8.75
	5310	62	CDD	52	37	50/58.8 (MCS11)	11.85	11.67	14.77	23.64	-8.87
			CDD	52	40	50/58.8 (MCS11)	11.97	11.77	14.88	23.64	-8.76
			CDD	52	44	50/58.8 (MCS11)	11.73	11.87	14.81	23.64	-8.83
	5510	102	CDD	52	37	50/58.8 (MCS11)	11.77	11.70	14.75	23.67	-8.92
			CDD	52	40	50/58.8 (MCS11)	11.86	11.86	14.87	23.67	-8.80
			CDD	52	44	50/58.8 (MCS11)	11.96	11.80	14.89	23.67	-8.78
	5550	110	CDD	52	37	50/58.8 (MCS11)	11.63	11.62	14.63	23.67	-9.04
			CDD	52	40	50/58.8 (MCS11)	11.87	11.90	14.89	23.67	-8.78
			CDD	52	44	50/58.8 (MCS11)	11.84	11.85	14.85	23.67	-8.82
	5710	142	CDD	52	37	50/58.8 (MCS11)	11.87	11.93	14.91	23.67	-8.76
			CDD	52	40	50/58.8 (MCS11)	11.65	11.93	14.81	23.67	-8.86
			CDD	52	44	50/58.8 (MCS11)	11.95	11.90	14.93	23.67	-8.74

Table 7-114. FCC CDD Primary 40MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 3b	Summed		
	5290	58	CDD	52	37	50/58.8 (MCS11)	11.80	11.79	14.80	23.64	-8.84
			CDD	52	44	50/58.8 (MCS11)	11.71	11.82	14.78	23.64	-8.86
			CDD	52	52	50/58.8 (MCS11)	11.76	11.86	14.82	23.64	-8.82
	5530	106	CDD	52	37	50/58.8 (MCS11)	11.85	11.96	14.91	23.67	-8.76
			CDD	52	44	50/58.8 (MCS11)	11.73	11.99	14.87	23.67	-8.80
			CDD	52	52	50/58.8 (MCS11)	11.74	11.83	14.80	23.67	-8.87
	5610	122	CDD	52	37	50/58.8 (MCS11)	11.98	11.76	14.88	23.67	-8.79
			CDD	52	44	50/58.8 (MCS11)	11.80	11.68	14.75	23.67	-8.92
			CDD	52	52	50/58.8 (MCS11)	11.91	11.62	14.77	23.67	-8.90
	5690	138	CDD	52	37	50/58.8 (MCS11)	11.98	11.76	14.88	23.67	-8.79
			CDD	52	44	50/58.8 (MCS11)	11.70	11.68	14.70	23.67	-8.97
			CDD	52	52	50/58.8 (MCS11)	11.69	11.70	14.70	23.67	-8.97

Table 7-115. FCC CDD Primary 80MHz BW (UNII) Maximum Conducted Output Power (RU52)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 78 of 297

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 3b	Summed		
	5250	50 (L)	CDD	52	37	50/58.8 (MCS11)	11.09	11.17	14.14	23.98	-9.84
			CDD	52	52	50/58.8 (MCS11)	11.02	10.95	14.00	23.98	-9.98
		50 (U)	CDD	52	52	50/58.8 (MCS11)	11.03	10.96	14.00	23.64	-9.64
	5570	114 (L)	CDD	52	37	50/58.8 (MCS11)	10.11	10.11	13.12	23.67	-10.55
			CDD	52	52	50/58.8 (MCS11)	10.10	9.94	13.03	23.67	-10.64
		114 (U)	CDD	52	52	50/58.8 (MCS11)	9.93	10.13	13.04	23.67	-10.63

Table 7-116. FCC CDD Primary 160MHz BW (UNII) Maximum Conducted Output Power (RU52)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 79 of 297

V 10.6 10/27/2023

7.4.28 ISED CDD/SDM Primary Conducted Output Power Measurements (RU52)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
5260	52		CDD	52	37	50/58.8 (MCS11)	11.64	11.76	14.71	23.64	-8.93	-0.30	14.41	29.64	-15.23
			CDD	52	39	50/58.8 (MCS11)	11.87	11.82	14.85	23.64	-8.79	-0.30	14.55	29.64	-15.09
			CDD	52	40	50/58.8 (MCS11)	11.74	11.71	14.73	23.64	-8.91	-0.30	14.43	29.64	-15.21
5300	60		CDD	52	37	50/58.8 (MCS11)	11.70	11.62	14.67	23.64	-8.97	-0.30	14.37	29.64	-15.27
			CDD	52	39	50/58.8 (MCS11)	11.72	11.99	14.87	23.64	-8.77	-0.30	14.57	29.64	-15.07
			CDD	52	40	50/58.8 (MCS11)	11.83	11.96	14.90	23.64	-8.74	-0.30	14.60	29.64	-15.04
5320	64		CDD	52	37	50/58.8 (MCS11)	11.91	11.72	14.82	23.64	-8.82	-0.30	14.52	29.64	-15.12
			CDD	52	39	50/58.8 (MCS11)	11.74	11.75	14.75	23.64	-8.89	-0.30	14.45	29.64	-15.19
			CDD	52	40	50/58.8 (MCS11)	11.74	11.84	14.80	23.64	-8.84	-0.30	14.50	29.64	-15.14
5500	100		CDD	52	37	50/58.8 (MCS11)	11.86	11.76	14.82	23.63	-8.81	1.60	16.42	29.63	-13.21
			CDD	52	39	50/58.8 (MCS11)	11.88	11.84	14.87	23.63	-8.76	1.60	16.47	29.63	-13.16
			CDD	52	40	50/58.8 (MCS11)	11.98	11.78	14.89	23.63	-8.74	1.60	16.49	29.63	-13.14
5580	116		CDD	52	37	50/58.8 (MCS11)	11.69	11.70	14.71	23.63	-8.92	1.60	16.31	29.63	-13.32
			CDD	52	39	50/58.8 (MCS11)	11.82	11.68	14.76	23.63	-8.87	1.60	16.36	29.63	-13.27
			CDD	52	40	50/58.8 (MCS11)	11.86	11.86	14.87	23.63	-8.76	1.60	16.47	29.63	-13.16
5720	144		CDD	52	37	50/58.8 (MCS11)	11.62	11.98	14.82	23.63	-8.81	1.60	16.42	29.63	-13.21
			CDD	52	39	50/58.8 (MCS11)	11.76	11.99	14.88	23.63	-8.75	1.60	16.48	29.63	-13.15
			CDD	52	40	50/58.8 (MCS11)	11.74	11.84	14.80	23.63	-8.83	1.60	16.40	29.63	-13.23

Table 7-117. ISED CDD Primary 20MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
5270	54		CDD	52	37	50/58.8 (MCS11)	11.60	11.86	14.75	23.64	-8.89	-0.30	14.45	29.64	-15.19
			CDD	52	40	50/58.8 (MCS11)	11.83	11.86	14.85	23.64	-8.79	-0.30	14.55	29.64	-15.09
			CDD	52	44	50/58.8 (MCS11)	11.82	11.94	14.89	23.64	-8.75	-0.30	14.59	29.64	-15.05
5310	62		CDD	52	37	50/58.8 (MCS11)	11.85	11.67	14.77	23.64	-8.87	-0.30	14.47	29.64	-15.17
			CDD	52	40	50/58.8 (MCS11)	11.97	11.77	14.88	23.64	-8.76	-0.30	14.58	29.64	-15.06
			CDD	52	44	50/58.8 (MCS11)	11.73	11.87	14.81	23.64	-8.83	-0.30	14.51	29.64	-15.13
5510	102		CDD	52	37	50/58.8 (MCS11)	11.77	11.70	14.75	23.67	-8.92	1.60	16.35	29.67	-13.32
			CDD	52	40	50/58.8 (MCS11)	11.86	11.86	14.87	23.67	-8.80	1.60	16.47	29.67	-13.20
			CDD	52	44	50/58.8 (MCS11)	11.96	11.80	14.89	23.67	-8.78	1.60	16.49	29.67	-13.18
5550	110		CDD	52	37	50/58.8 (MCS11)	11.63	11.62	14.63	23.67	-9.04	1.60	16.23	29.67	-13.44
			CDD	52	40	50/58.8 (MCS11)	11.87	11.90	14.89	23.67	-8.78	1.60	16.49	29.67	-13.18
			CDD	52	44	50/58.8 (MCS11)	11.84	11.85	14.85	23.67	-8.82	1.60	16.45	29.67	-13.22
5710	142		CDD	52	37	50/58.8 (MCS11)	11.87	11.93	14.91	23.67	-8.76	1.60	16.51	29.67	-13.16
			CDD	52	40	50/58.8 (MCS11)	11.65	11.93	14.81	23.67	-8.86	1.60	16.41	29.67	-13.26
			CDD	52	44	50/58.8 (MCS11)	11.95	11.90	14.93	23.67	-8.74	1.60	16.53	29.67	-13.14

Table 7-118. ISED CDD Primary 40MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
5290	58		CDD	52	37	50/58.8 (MCS11)	11.80	11.79	14.80	23.64	-8.84	-0.30	14.50	29.64	-15.14
			CDD	52	44	50/58.8 (MCS11)	11.71	11.82	14.78	23.64	-8.86	-0.30	14.48	29.64	-15.16
			CDD	52	52	50/58.8 (MCS11)	11.76	11.86	14.82	23.64	-8.82	-0.30	14.52	29.64	-15.12
5530	106		CDD	52	37	50/58.8 (MCS11)	11.85	11.96	14.91	23.67	-8.76	1.60	16.51	29.67	-13.16
			CDD	52	44	50/58.8 (MCS11)	11.73	11.99	14.87	23.67	-8.80	1.60	16.47	29.67	-13.20
			CDD	52	52	50/58.8 (MCS11)	11.74	11.83	14.80	23.67	-8.87	1.60	16.40	29.67	-13.27
5690	138		CDD	52	37	50/58.8 (MCS11)	11.98	11.76	14.88	23.67	-8.79	1.60	16.48	29.67	-13.19
			CDD	52	44	50/58.8 (MCS11)	11.70	11.68	14.70	23.67	-8.97	1.60	16.30	29.67	-13.37
			CDD	52	52	50/58.8 (MCS11)	11.69	11.70	14.70	23.67	-8.97	1.60	16.30	29.67	-13.37

Table 7-119. ISED CDD Primary 80MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
5250	50 (L)		SDM	52	37	50/58.8 (MCS11)	11.18	10.92	14.06	23.98	-9.92	-1.83	12.23	22.58	-10.35
			SDM	52	52	50/58.8 (MCS11)	11.15	11.19	14.18	23.98	-9.80	-1.83	12.35	22.58	-10.23
			SDM	52	52	50/58.8 (MCS11)	11.13	11.01	14.08	23.64	-9.56	-0.45	13.63	22.58	-8.95

Table 7-120. ISED SDM Primary 160MHz BW (UNII) Maximum Conducted Output Power (RU52)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 80 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.29 FCC CDD Primary Conducted Output Power Measurements (Highest Power Among Partially-Loaded RU's)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit	Conducted Power
							Antenna 5T	Antenna 3b	Summed	[dBm]	Margin [dB]
5180	36	CDD	106	53	106.3/125 (MCS11)	14.69	14.97	17.84	23.98	-6.14	
		CDD	106	54	106.3/125 (MCS11)	14.90	14.75	17.84	23.98	-6.14	
5200	40	CDD	106	53	106.3/125 (MCS11)	14.84	14.90	17.88	23.98	-6.10	
		CDD	106	54	106.3/125 (MCS11)	14.93	14.97	17.96	23.98	-6.02	
5240	48	CDD	106	53	106.3/125 (MCS11)	14.87	14.88	17.89	23.98	-6.09	
		CDD	106	54	106.3/125 (MCS11)	14.78	14.71	17.76	23.98	-6.22	
5260	52	CDD	106	53	106.3/125 (MCS11)	14.63	14.82	17.74	23.64	-5.90	
		CDD	106	54	106.3/125 (MCS11)	14.70	14.76	17.74	23.64	-5.90	
5300	60	CDD	106	53	106.3/125 (MCS11)	14.61	14.73	17.68	23.64	-5.96	
		CDD	106	54	106.3/125 (MCS11)	14.80	14.82	17.82	23.64	-5.82	
5320	64	CDD	106	53	106.3/125 (MCS11)	14.63	14.87	17.77	23.64	-5.87	
		CDD	106	54	106.3/125 (MCS11)	14.99	15.00	18.01	23.64	-5.63	
5500	100	CDD	106	53	106.3/125 (MCS11)	14.45	14.16	17.32	23.67	-6.35	
		CDD	106	54	106.3/125 (MCS11)	14.46	14.20	17.34	23.67	-6.33	
5520	104	CDD	106	53	106.3/125 (MCS11)	14.81	14.86	17.85	23.67	-5.82	
		CDD	106	54	106.3/125 (MCS11)	14.85	14.88	17.87	23.67	-5.80	
5580	116	CDD	106	53	106.3/125 (MCS11)	14.88	14.70	17.80	23.67	-5.87	
		CDD	106	54	106.3/125 (MCS11)	14.53	14.96	17.76	23.67	-5.91	
5680	136	CDD	106	53	106.3/125 (MCS11)	14.65	14.66	17.66	23.67	-6.01	
		CDD	106	54	106.3/125 (MCS11)	14.71	14.62	17.68	23.67	-5.99	
5700	140	CDD	106	53	106.3/125 (MCS11)	12.89	12.94	15.92	23.67	-7.75	
		CDD	106	54	106.3/125 (MCS11)	12.91	12.86	15.90	23.67	-7.77	
5720	144	CDD	106	53	106.3/125 (MCS11)	14.66	14.67	17.68	23.67	-5.99	
		CDD	106	54	106.3/125 (MCS11)	14.73	14.97	17.86	23.67	-5.81	
5745	149	CDD	106	53	106.3/125 (MCS11)	16.28	16.11	19.21	30.00	-10.79	
		CDD	106	54	106.3/125 (MCS11)	16.38	16.37	19.39	30.00	-10.61	
5785	157	CDD	106	53	106.3/125 (MCS11)	16.22	16.40	19.32	30.00	-10.68	
		CDD	106	54	106.3/125 (MCS11)	16.21	16.24	19.23	30.00	-10.77	
5825	165	CDD	106	53	106.3/125 (MCS11)	16.47	16.16	19.33	30.00	-10.67	
		CDD	106	54	106.3/125 (MCS11)	16.38	16.21	19.31	30.00	-10.69	

Table 7-121. FCC CDD Primary 20MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 81 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit	Conducted Power
							Antenna 5T	Antenna 3b	Summed	[dBm]	Margin [dB]
5190	38	CDD	242	61	243.8/286.8 (MCS11)	14.13	14.21	17.18	23.98	-6.80	
		CDD	242	62	243.8/286.8 (MCS11)	14.17	14.39	17.29	23.98	-6.69	
5230	46	CDD	242	61	243.8/286.8 (MCS11)	17.88	17.80	20.85	23.98	-3.13	
		CDD	242	62	243.8/286.8 (MCS11)	18.00	17.95	20.99	23.98	-2.99	
5270	54	CDD	242	61	243.8/286.8 (MCS11)	17.95	17.90	20.94	23.64	-2.70	
		CDD	242	62	243.8/286.8 (MCS11)	17.85	17.98	20.93	23.64	-2.71	
5310	62	CDD	242	61	243.8/286.8 (MCS11)	13.89	13.77	16.84	23.64	-6.80	
		CDD	242	62	243.8/286.8 (MCS11)	13.84	13.95	16.91	23.64	-6.73	
5510	102	CDD	242	61	243.8/286.8 (MCS11)	12.22	12.26	15.25	23.67	-8.42	
		CDD	242	62	243.8/286.8 (MCS11)	12.26	12.30	15.29	23.67	-8.38	
5550	110	CDD	242	61	243.8/286.8 (MCS11)	17.02	17.03	20.03	23.67	-3.64	
		CDD	242	62	243.8/286.8 (MCS11)	17.03	17.02	20.03	23.67	-3.64	
5590	118	CDD	242	61	243.8/286.8 (MCS11)	17.82	17.91	20.88	23.67	-2.79	
		CDD	242	62	243.8/286.8 (MCS11)	17.80	17.94	20.88	23.67	-2.79	
5630	126	CDD	242	61	243.8/286.8 (MCS11)	17.73	17.81	20.78	23.67	-2.89	
		CDD	242	62	243.8/286.8 (MCS11)	17.78	17.84	20.82	23.67	-2.85	
5670	134	CDD	242	61	243.8/286.8 (MCS11)	14.44	14.41	17.44	23.67	-6.23	
		CDD	242	62	243.8/286.8 (MCS11)	14.37	14.51	17.45	23.67	-6.22	
5710	142	CDD	106	53	106.3/125 (MCS11)	14.77	14.98	17.89	23.67	-5.78	
		CDD	106	54	106.3/125 (MCS11)	14.62	14.69	17.67	23.67	-6.00	
		CDD	106	56	106.3/125 (MCS11)	14.78	14.74	17.77	23.67	-5.90	
5755	151	CDD	242	61	243.8/286.8 (MCS11)	19.13	19.47	22.31	30.00	-7.69	
		CDD	242	62	243.8/286.8 (MCS11)	19.10	19.14	22.13	30.00	-7.87	
5795	159	CDD	242	61	243.8/286.8 (MCS11)	19.23	19.44	22.35	30.00	-7.65	
		CDD	242	62	243.8/286.8 (MCS11)	19.32	19.21	22.27	30.00	-7.73	

Table 7-122. FCC CDD Primary 40MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit	Conducted Power
							Antenna 5T	Antenna 3b	Summed	[dBm]	Margin [dB]
	5210	42	CDD	484	65	487.5/573.5 (MCS11)	13.83	13.93	16.89	23.98	-7.09
			CDD	484	66	487.5/573.5 (MCS11)	13.88	13.87	16.88	23.98	-7.10
	5290	58	CDD	484	65	487.5/573.5 (MCS11)	13.47	13.49	16.49	23.64	-7.15
			CDD	484	66	487.5/573.5 (MCS11)	13.34	13.38	16.37	23.64	-7.27
	5530	106	CDD	484	65	487.5/573.5 (MCS11)	12.37	12.35	15.37	23.67	-8.30
			CDD	484	66	487.5/573.5 (MCS11)	12.47	12.29	15.39	23.67	-8.28
	5610	122	CDD	484	65	487.5/573.5 (MCS11)	16.41	16.10	19.27	23.67	-4.40
			CDD	484	66	487.5/573.5 (MCS11)	16.27	16.27	19.28	23.67	-4.39
5690	138	CDD	106	53	106.3/125 (MCS11)	14.60	14.73	17.68	23.67	-5.99	
		CDD	106	56	106.3/125 (MCS11)	14.54	14.87	17.72	23.67	-5.95	
		CDD	106	60	106.3/125 (MCS11)	14.72	14.93	17.84	23.67	-5.83	
5775	155	CDD	484	65	487.5/573.5 (MCS11)	15.79	15.97	18.89	30.00	-11.11	
		CDD	484	66	487.5/573.5 (MCS11)	15.73	15.85	18.80	30.00	-11.20	

Table 7-123. FCC CDD Primary 80MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 3b	Summed		
	5250	50 (L)	CDD	996	67	1020.8/1201 (MCS11)	11.02	11.09	14.07	23.98	-9.91
	5250	50 (U)	CDD	996	67	1020.8/1201 (MCS11)	11.06	11.07	14.08	23.64	-9.56
	5570	114 (L)	CDD	996	67	1020.8/1201 (MCS11)	9.92	10.01	12.97	23.67	-10.70
	5570	114 (U)	CDD	996	67	1020.8/1201 (MCS11)	10.06	9.96	13.02	23.67	-10.65

Table 7-124. FCC CDD Primary 160MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 82 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.30 ISED CDD/SDM Primary Conducted Output Power Measurements (Highest Power Among Partially-Loaded RU's)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
5180	36		SDM	106	53	106.3/125 (MCS11)	15.49	15.36	18.44	-	-	-1.83	16.61	22.58	-5.97
			SDM	106	54	106.3/125 (MCS11)	15.36	15.39	18.38	-	-	-1.83	16.55	22.58	-6.03
5200	40		SDM	106	53	106.3/125 (MCS11)	15.26	15.06	18.17	-	-	-1.83	16.34	22.58	-6.24
			SDM	106	54	106.3/125 (MCS11)	15.28	15.50	18.40	-	-	-1.83	16.57	22.58	-6.01
5240	48		SDM	106	53	106.3/125 (MCS11)	15.22	15.23	18.24	-	-	-1.83	16.41	22.58	-6.17
			SDM	106	54	106.3/125 (MCS11)	15.10	15.43	18.28	-	-	-1.83	16.45	22.58	-6.13
5260	52		CDD	106	53	106.3/125 (MCS11)	14.63	14.82	17.74	23.64	-5.90	-0.30	17.44	29.64	-12.20
			CDD	106	54	106.3/125 (MCS11)	14.70	14.76	17.74	23.64	-5.90	-0.30	17.44	29.64	-12.20
5300	60		CDD	106	53	106.3/125 (MCS11)	14.61	14.73	17.68	23.64	-5.96	-0.30	17.38	29.64	-12.26
			CDD	106	54	106.3/125 (MCS11)	14.80	14.82	17.82	23.64	-5.82	-0.30	17.52	29.64	-12.12
5320	64		CDD	106	53	106.3/125 (MCS11)	14.63	14.87	17.77	23.64	-5.87	-0.30	17.47	29.64	-12.17
			CDD	106	54	106.3/125 (MCS11)	14.99	15.00	18.01	23.64	-5.63	-0.30	17.71	29.64	-11.93
5500	100		CDD	106	53	106.3/125 (MCS11)	14.45	14.16	17.32	23.67	-6.35	1.60	18.92	29.67	-10.75
			CDD	106	54	106.3/125 (MCS11)	14.46	14.20	17.34	23.67	-6.33	1.60	18.94	29.67	-10.73
5520	104		CDD	106	53	106.3/125 (MCS11)	14.81	14.86	17.85	23.67	-5.82	1.60	19.45	29.67	-10.22
			CDD	106	54	106.3/125 (MCS11)	14.85	14.88	17.87	23.67	-5.80	1.60	19.47	29.67	-10.20
5580	116		CDD	106	53	106.3/125 (MCS11)	14.88	14.70	17.80	23.67	-5.87	1.60	19.40	29.67	-10.27
			CDD	106	54	106.3/125 (MCS11)	14.53	14.96	17.76	23.67	-5.91	1.60	19.36	29.67	-10.31
5680	136		CDD	106	53	106.3/125 (MCS11)	14.65	14.66	17.66	23.67	-6.01	1.60	19.26	29.67	-10.41
			CDD	106	54	106.3/125 (MCS11)	14.71	14.62	17.68	23.67	-5.99	1.60	19.28	29.67	-10.39
5700	140		CDD	106	53	106.3/125 (MCS11)	12.89	12.94	15.92	23.67	-7.75	1.60	17.52	29.67	-12.15
			CDD	106	54	106.3/125 (MCS11)	12.91	12.86	15.90	23.67	-7.77	1.60	17.50	29.67	-12.17
5720	144		CDD	106	53	106.3/125 (MCS11)	14.66	14.67	17.68	23.67	-5.99	1.60	19.28	29.67	-10.39
			CDD	106	54	106.3/125 (MCS11)	14.73	14.97	17.86	23.67	-5.81	1.60	19.46	29.67	-10.21
5745	149		CDD	106	53	106.3/125 (MCS11)	16.28	16.11	19.21	30.00	-10.79	2.30	21.51	-	-
			CDD	106	54	106.3/125 (MCS11)	16.38	16.37	19.39	30.00	-10.61	2.30	21.69	-	-
5785	157		CDD	106	53	106.3/125 (MCS11)	16.22	16.40	19.32	30.00	-10.68	2.30	21.62	-	-
			CDD	106	54	106.3/125 (MCS11)	16.21	16.24	19.23	30.00	-10.77	2.30	21.53	-	-
5825	165		CDD	106	53	106.3/125 (MCS11)	16.47	16.16	19.33	30.00	-10.67	2.30	21.63	-	-
			CDD	106	54	106.3/125 (MCS11)	16.38	16.21	19.31	30.00	-10.69	2.30	21.61	-	-

Table 7-125. ISED CDD/SDM Primary 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
5190	38		CDD	242	61	243.8/286.8 (MCS11)	14.32	14.30	17.32	-	-	-1.40	15.92	22.58	-6.66
			CDD	242	62	243.8/286.8 (MCS11)	14.42	14.38	17.41	-	-	-1.40	16.01	22.58	-6.57
5230	46		SDM	242	61	243.8/286.8 (MCS11)	18.47	18.13	21.31	-	-	-1.83	19.48	22.58	-3.10
			SDM	242	62	243.8/286.8 (MCS11)	18.35	18.33	21.35	-	-	-1.83	19.52	22.58	-3.06
5270	54		CDD	242	61	243.8/286.8 (MCS11)	17.95	17.90	20.94	23.64	-2.70	-0.30	20.64	29.64	-9.00
			CDD	242	62	243.8/286.8 (MCS11)	17.85	17.98	20.93	23.64	-2.71	-0.30	20.63	29.64	-9.01
5310	62		CDD	242	61	243.8/286.8 (MCS11)	13.89	13.77	16.84	23.64	-6.80	-0.30	16.54	29.64	-13.10
			CDD	242	62	243.8/286.8 (MCS11)	13.84	13.95	16.91	23.64	-6.73	-0.30	16.61	29.64	-13.03
5510	102		CDD	242	61	243.8/286.8 (MCS11)	12.22	12.26	15.25	23.67	-8.42	1.60	16.85	29.67	-12.82
			CDD	242	62	243.8/286.8 (MCS11)	12.26	12.30	15.29	23.67	-8.38	1.60	16.89	29.67	-12.78
5550	110		CDD	242	61	243.8/286.8 (MCS11)	17.02	17.03	20.03	23.67	-3.64	1.60	21.63	29.67	-8.04
			CDD	242	62	243.8/286.8 (MCS11)	17.03	17.02	20.03	23.67	-3.64	1.60	21.63	29.67	-8.04
5670	134		CDD	242	61	243.8/286.8 (MCS11)	14.44	14.41	17.44	23.67	-6.23	1.60	19.04	29.67	-10.63
			CDD	242	62	243.8/286.8 (MCS11)	14.37	14.51	17.45	23.67	-6.22	1.60	19.05	29.67	-10.62
5710	142		CDD	106	53	106.3/125 (MCS11)	14.77	14.98	17.89	23.67	-5.78	1.60	19.49	29.67	-10.18
			CDD	106	54	106.3/125 (MCS11)	14.62	14.69	17.67	23.67	-6.00	1.60	19.27	29.67	-10.40
5755	151		CDD	242	61	243.8/286.8 (MCS11)	19.13	19.47	22.31	30.00	-7.69	2.30	24.61	-	-
			CDD	242	62	243.8/286.8 (MCS11)	19.10	19.14	22.13	30.00	-7.87	2.30	24.43	-	-
5795	159		CDD	242	61	243.8/286.8 (MCS11)	19.23	19.44	22.35	30.00	-7.65	2.30	24.65	-	-
			CDD	242	62	243.8/286.8 (MCS11)	19.32	19.21	22.27	30.00	-7.73	2.30	24.57	-	-

Table 7-126. ISED CDD/SDM Primary 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
5210	42		CDD	484	65	487.5/573.5 (MCS11)	13.82	13.94	16.89	-	-	-1.40	15.49	22.58	-7.09
			CDD	484	66	487.5/573.5 (MCS11)	13.87	13.91	16.90	-	-	-1.40	15.50	22.58	-7.08
5290	58		CDD	484	65	487.5/573.5 (MCS11)	13.47	13.49	16.49	23.64	-7.15	-0.30	16.19	29.64	-13.45
			CDD	484	66	487.5/573.5 (MCS11)	13.34	13.38	16.37	23.64	-7.27	-0.30	16.07	29.64	-13.57
5530	106		CDD	484	65	487.5/573.5 (MCS11)	12.37	12.35	15.37	23.67	-8.30	1.60	16.97	29.67	-12.70
			CDD	484	66	487.5/573.5 (MCS11)	12.47	12.29	15.39	23.67	-8.28	1.60	16.99	29.67	-12.68
5690	138		CDD	106	53	106.3/125 (MCS11)	14.60	14.73	17.68	23.67	-5.99	1.60	19.28	29.67	-10.39
			CDD	106	56	106.3/125 (MCS11)	14.54	14.87	17.72	23.67	-5.95	1.60	19.32	29.67	-10.35
5775	155		CDD	106	60	106.3/125 (MCS11)	14.72	14.93	17.84	23.67	-5.83	1.60	19.44	29.67	-10.23
			CDD	484	65	487.5/573.5 (MCS11)	15.79	15.97	18.89	30.00	-11.11	2.30	21.19	-	-
			CDD	484	66	487.5/573.5 (MCS11)	15.73	15.85	18.80	30.00	-11.20	2.30	21.10	-	-

Table 7-127. ISED CDD Primary 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 83 of 297

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
	5250	50 (L)	CDD	996	67	1020.8/1201 (MCS11)	11.04	11.09	14.08	23.98	-9.90	-1.40	12.68	22.58	-9.90
	5250	50 (U)	CDD	996	67	1020.8/1201 (MCS11)	11.11	11.08	14.10	23.64	-9.54	-0.30	13.80	22.58	-8.78

Table 7-128. ISED CDD Primary 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 84 of 297

V 10.6 10/27/2023

7.4.31 FCC CDD Primary Conducted Output Power Measurements (Fully-loaded RU)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 3b	Summed		
	5180	36	CDD	242	61	243.8/286.8 (MCS11)	15.71	15.37	18.55	23.98	-5.43
	5200	40	CDD	242	61	243.8/286.8 (MCS11)	17.83	17.84	20.84	23.98	-3.14
	5240	48	CDD	242	61	243.8/286.8 (MCS11)	17.82	17.90	20.87	23.98	-3.11
	5260	52	CDD	242	61	243.8/286.8 (MCS11)	17.96	17.90	20.94	23.64	-2.70
	5300	60	CDD	242	61	243.8/286.8 (MCS11)	17.86	17.88	20.88	23.64	-2.76
	5320	64	CDD	242	61	243.8/286.8 (MCS11)	15.73	15.53	18.64	23.64	-5.00
	5500	100	CDD	242	61	243.8/286.8 (MCS11)	14.31	14.16	17.25	23.67	-6.42
	5520	104	CDD	242	61	243.8/286.8 (MCS11)	16.97	16.99	19.99	23.67	-3.68
	5540	108	CDD	242	61	243.8/286.8 (MCS11)	17.85	17.77	20.82	23.67	-2.85
	5580	116	CDD	242	61	243.8/286.8 (MCS11)	17.66	17.92	20.80	23.67	-2.87
	5660	132	CDD	242	61	243.8/286.8 (MCS11)	17.71	17.96	20.85	23.67	-2.82
	5680	136	CDD	242	61	243.8/286.8 (MCS11)	17.39	17.33	20.37	23.67	-3.30
	5700	140	CDD	242	61	243.8/286.8 (MCS11)	12.74	12.63	15.70	23.67	-7.97
	5720	144	CDD	242	61	243.8/286.8 (MCS11)	17.55	17.93	20.76	23.67	-2.91
	5745	149	CDD	242	61	243.8/286.8 (MCS11)	19.22	19.46	22.35	30.00	-7.65
	5785	157	CDD	242	61	243.8/286.8 (MCS11)	19.28	19.17	22.24	30.00	-7.76
	5825	165	CDD	242	61	243.8/286.8 (MCS11)	19.28	19.21	22.26	30.00	-7.74

Table 7-129. FCC CDD Primary 20MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 3b	Summed		
	5190	38	CDD	484	65	487.5/573.5 (MCS11)	14.44	14.32	17.39	23.98	-6.59
	5230	46	CDD	484	65	487.5/573.5 (MCS11)	19.10	19.21	22.17	23.98	-1.81
	5270	54	CDD	484	65	487.5/573.5 (MCS11)	18.39	18.11	21.26	23.64	-2.38
	5310	62	CDD	484	65	487.5/573.5 (MCS11)	13.64	13.87	16.76	23.64	-6.88
	5510	102	CDD	484	65	487.5/573.5 (MCS11)	12.20	12.50	15.36	23.67	-8.31
	5550	110	CDD	484	65	487.5/573.5 (MCS11)	17.01	17.25	20.14	23.67	-3.53
	5590	118	CDD	484	65	487.5/573.5 (MCS11)	19.42	19.17	22.31	23.67	-1.36
	5630	126	CDD	484	65	487.5/573.5 (MCS11)	18.97	18.75	21.87	23.67	-1.80
	5670	134	CDD	484	65	487.5/573.5 (MCS11)	14.68	14.65	17.67	23.67	-6.00
	5710	142	CDD	484	65	487.5/573.5 (MCS11)	19.14	19.28	22.22	23.67	-1.45
	5755	151	CDD	484	65	487.5/573.5 (MCS11)	19.37	19.28	22.34	30.00	-7.66
	5795	159	CDD	484	65	487.5/573.5 (MCS11)	19.32	19.37	22.35	30.00	-7.65

Table 7-130. FCC CDD Primary 40MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 3b	Summed		
	5210	42	CDD	996	67	1020.8/1201 (MCS11)	13.71	13.90	16.82	23.98	-7.16
	5290	58	CDD	996	67	1020.8/1201 (MCS11)	13.41	13.24	16.34	23.64	-7.30
	5530	106	CDD	996	67	1020.8/1201 (MCS11)	12.40	12.37	15.40	23.67	-8.27
	5610	122	CDD	996	67	1020.8/1201 (MCS11)	16.31	16.38	19.35	23.67	-4.32
	5690	138	CDD	996	67	1020.8/1201 (MCS11)	19.36	19.33	22.35	23.67	-1.32
	5775	155	CDD	996	67	1020.8/1201 (MCS11)	15.74	15.88	18.82	30.00	-11.18

Table 7-131. FCC CDD Primary 80MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 3b	Summed		
	5250	50	CDD	996x2	68	2041.6/2402 (MCS11)	11.12	10.94	14.04	23.98	-9.94
	5570	114	CDD	996x2	68	2041.6/2402 (MCS11)	10.18	10.24	13.22	23.67	-10.45

Table 7-132. FCC CDD Primary 160MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 85 of 297

7.4.32 ISED CDD/SDM Primary Conducted Output Power Measurements (Fully-loaded RU)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
	5180	36	SDM	242	61	243.8/286.8 (MCS11)	15.75	15.67	18.72	-	-	-1.83	16.89	22.58	-5.69
	5200	40	SDM	242	61	243.8/286.8 (MCS11)	18.35	18.16	21.27	-	-	-1.83	19.44	22.58	-3.14
	5240	48	SDM	242	61	243.8/286.8 (MCS11)	18.19	18.16	21.19	-	-	-1.83	19.36	22.58	-3.22
	5260	52	CDD	242	61	243.8/286.8 (MCS11)	17.96	17.90	20.94	23.64	-2.70	-0.30	20.64	29.64	-9.00
	5300	60	CDD	242	61	243.8/286.8 (MCS11)	17.86	17.88	20.88	23.64	-2.76	-0.30	20.58	29.64	-9.06
	5320	64	CDD	242	61	243.8/286.8 (MCS11)	15.73	15.53	18.64	23.64	-5.00	-0.30	18.34	29.64	-11.30
	5500	100	CDD	242	61	243.8/286.8 (MCS11)	14.31	14.16	17.25	23.67	-6.42	1.60	18.85	29.67	-10.82
	5520	104	CDD	242	61	243.8/286.8 (MCS11)	16.97	16.99	19.99	23.67	-3.68	1.60	21.59	29.67	-8.08
	5540	108	CDD	242	61	243.8/286.8 (MCS11)	17.85	17.77	20.82	23.67	-2.85	1.60	22.42	29.67	-7.25
	5580	116	CDD	242	61	243.8/286.8 (MCS11)	17.66	17.92	20.80	23.67	-2.87	1.60	22.40	29.67	-7.27
	5660	132	CDD	242	61	243.8/286.8 (MCS11)	17.71	17.96	20.85	23.67	-2.82	1.60	22.45	29.67	-7.22
	5680	136	CDD	242	61	243.8/286.8 (MCS11)	17.39	17.33	20.37	23.67	-3.30	1.60	21.97	29.67	-7.70
	5700	140	CDD	242	61	243.8/286.8 (MCS11)	12.74	12.63	15.70	23.67	-7.97	1.60	17.30	29.67	-12.37
	5720	144	CDD	242	61	243.8/286.8 (MCS11)	17.55	17.93	20.76	23.67	-2.91	1.60	22.36	29.67	-7.31
	5745	149	CDD	242	61	243.8/286.8 (MCS11)	19.22	19.46	22.35	30.00	-7.65	2.30	24.65	-	-
	5785	157	CDD	242	61	243.8/286.8 (MCS11)	19.28	19.17	22.24	30.00	-7.76	2.30	24.54	-	-
	5825	165	CDD	242	61	243.8/286.8 (MCS11)	19.28	19.21	22.26	30.00	-7.74	2.30	24.56	-	-

Table 7-133. ISED CDD/SDM Primary 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
	5190	38	CDD	484	65	487.5/573.5 (MCS11)	14.46	14.15	17.32	-	-	-1.40	15.92	22.58	-6.66
	5230	46	SDM	484	65	487.5/573.5 (MCS11)	19.18	19.36	22.28	-	-	-1.83	20.45	22.58	-2.13
	5270	54	CDD	484	65	487.5/573.5 (MCS11)	18.39	18.11	21.26	23.64	-2.38	-0.30	20.96	29.64	-8.68
	5310	62	CDD	484	65	487.5/573.5 (MCS11)	13.64	13.87	16.76	23.64	-6.88	-0.30	16.46	29.64	-13.18
	5510	102	CDD	484	65	487.5/573.5 (MCS11)	12.20	12.50	15.36	23.67	-8.31	1.60	16.96	29.67	-12.71
	5550	110	CDD	484	65	487.5/573.5 (MCS11)	17.01	17.25	20.14	23.67	-3.53	1.60	21.74	29.67	-7.93
	5670	134	CDD	484	65	487.5/573.5 (MCS11)	14.68	14.65	17.67	23.67	-6.00	1.60	19.27	29.67	-10.40
	5710	142	CDD	484	65	487.5/573.5 (MCS11)	19.14	19.28	22.22	23.67	-1.45	1.60	23.82	29.67	-5.85
	5755	151	CDD	484	65	487.5/573.5 (MCS11)	19.37	19.28	22.34	30.00	-7.66	2.30	24.64	-	-
	5795	159	CDD	484	65	487.5/573.5 (MCS11)	19.32	19.37	22.35	30.00	-7.65	2.30	24.65	-	-

Table 7-134. ISED CDD/SDM Primary 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
	5210	42	CDD	996	67	1020.8/1201 (MCS11)	13.92	13.71	16.83	-	-	-1.40	15.43	22.58	-7.15
	5290	58	CDD	996	67	1020.8/1201 (MCS11)	13.41	13.24	16.34	23.64	-7.30	-0.30	16.04	29.64	-13.60
	5530	106	CDD	996	67	1020.8/1201 (MCS11)	12.40	12.37	15.40	23.67	-8.27	1.60	17.00	29.67	-12.67
	5690	138	CDD	996	67	1020.8/1201 (MCS11)	19.36	19.33	22.35	23.67	-1.32	1.60	23.95	29.67	-5.72
	5775	155	CDD	996	67	1020.8/1201 (MCS11)	15.74	15.88	18.82	30.00	-11.18	2.30	21.12	-	-

Table 7-135. ISED CDD Primary 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
	5250	50	CDD	996x2	68	2041.6/2402 (MCS11)	11.18	11.06	14.13	23.98	-9.85	-0.30	13.83	22.58	-8.75

Table 7-136. ISED CDD Primary 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 86 of 297

7.4.33 FCC CDD Diversity Conducted Output Power Measurements (RU26)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit	Conducted Power
							Antenna 5T	Antenna 1b	Summed	[dBm]	Margin [dB]
	5180	36	CDD	26	0	25/29.4 (MCS11)	8.93	7.08	11.11	23.98	-12.87
			CDD	26	4	25/29.4 (MCS11)	8.89	6.85	11.00	23.98	-12.98
			CDD	26	8	25/29.4 (MCS11)	8.91	6.86	11.02	23.98	-12.96
	5200	40	CDD	26	0	25/29.4 (MCS11)	8.70	6.97	10.93	23.98	-13.05
			CDD	26	4	25/29.4 (MCS11)	8.67	7.03	10.93	23.98	-13.05
			CDD	26	8	25/29.4 (MCS11)	8.74	7.24	11.07	23.98	-12.91
	5240	48	CDD	26	0	25/29.4 (MCS11)	8.77	7.20	11.07	23.98	-12.91
			CDD	26	4	25/29.4 (MCS11)	8.95	6.98	11.09	23.98	-12.89
			CDD	26	8	25/29.4 (MCS11)	8.82	7.09	11.05	23.98	-12.93
	5745	149	CDD	26	0	25/29.4 (MCS11)	10.17	8.54	12.44	30.00	-17.56
			CDD	26	4	25/29.4 (MCS11)	10.22	8.48	12.45	30.00	-17.55
			CDD	26	8	25/29.4 (MCS11)	10.22	8.47	12.44	30.00	-17.56
	5785	157	CDD	26	0	25/29.4 (MCS11)	10.29	8.42	12.46	30.00	-17.54
			CDD	26	4	25/29.4 (MCS11)	10.34	8.59	12.57	30.00	-17.43
			CDD	26	8	25/29.4 (MCS11)	10.34	8.46	12.51	30.00	-17.49
	5825	165	CDD	26	0	25/29.4 (MCS11)	10.14	8.54	12.42	30.00	-17.58
			CDD	26	4	25/29.4 (MCS11)	10.17	8.47	12.41	30.00	-17.59
			CDD	26	8	25/29.4 (MCS11)	10.38	8.54	12.57	30.00	-17.43

Table 7-137. FCC CDD Diversity 20MHz BW (UNII) Maximum Conducted Output Power (RU26)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit	Conducted Power
							Antenna 5T	Antenna 1b	Summed	[dBm]	Margin [dB]
	5190	38	CDD	26	0	25/29.4 (MCS11)	8.73	7.11	11.00	23.98	-12.98
			CDD	26	8	25/29.4 (MCS11)	8.79	6.95	10.97	23.98	-13.01
			CDD	26	17	25/29.4 (MCS11)	8.85	6.91	11.00	23.98	-12.98
	5230	46	CDD	26	0	25/29.4 (MCS11)	8.83	7.11	11.07	23.98	-12.91
			CDD	26	8	25/29.4 (MCS11)	8.61	7.14	10.95	23.98	-13.03
			CDD	26	17	25/29.4 (MCS11)	8.76	7.12	11.03	23.98	-12.95
	5755	151	CDD	26	0	25/29.4 (MCS11)	10.24	8.59	12.50	30.00	-17.50
			CDD	26	8	25/29.4 (MCS11)	10.28	8.62	12.54	30.00	-17.46
CDD			26	17	25/29.4 (MCS11)	10.20	8.50	12.44	30.00	-17.56	
5795	159	CDD	26	0	25/29.4 (MCS11)	10.49	8.65	12.68	30.00	-17.32	
		CDD	26	8	25/29.4 (MCS11)	10.29	8.74	12.59	30.00	-17.41	
		CDD	26	17	25/29.4 (MCS11)	10.46	8.68	12.67	30.00	-17.33	

Table 7-138. FCC CDD Diversity 40MHz BW (UNII) Maximum Conducted Output Power (RU26)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit	Conducted Power
							Antenna 5T	Antenna 1b	Summed	[dBm]	Margin [dB]
	5210	42	CDD	26	0	25/29.4 (MCS11)	9.00	7.19	11.20	23.98	-12.78
			CDD	26	18	25/29.4 (MCS11)	9.00	6.96	11.11	23.98	-12.87
			CDD	26	36	25/29.4 (MCS11)	8.92	7.05	11.09	23.98	-12.89
	5775	155	CDD	26	0	25/29.4 (MCS11)	10.33	8.57	12.55	30.00	-17.45
			CDD	26	18	25/29.4 (MCS11)	10.49	8.74	12.72	30.00	-17.28
			CDD	26	36	25/29.4 (MCS11)	10.27	8.70	12.57	30.00	-17.43

Table 7-139. FCC CDD Diversity 80MHz BW (UNII) Maximum Conducted Output Power (RU26)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 87 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.34 ISED CDD/SDM Diversity Conducted Output Power Measurements (RU26)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5180	36	SDM	26	0	25/29.4 (MCS11)	9.49	7.68	11.69	-	-	-1.60	10.09	22.58	-12.49
			SDM	26	4	25/29.4 (MCS11)	9.31	7.43	11.48	-	-	-1.60	9.88	22.58	-12.70
			SDM	26	8	25/29.4 (MCS11)	9.34	7.33	11.46	-	-	-1.60	9.86	22.58	-12.72
	5200	40	SDM	26	0	25/29.4 (MCS11)	9.22	7.47	11.44	-	-	-1.60	9.84	22.58	-12.74
			SDM	26	4	25/29.4 (MCS11)	9.27	7.38	11.44	-	-	-1.60	9.84	22.58	-12.74
			SDM	26	8	25/29.4 (MCS11)	9.32	7.56	11.54	-	-	-1.60	9.94	22.58	-12.64
	5240	48	SDM	26	0	25/29.4 (MCS11)	9.38	7.40	11.51	-	-	-1.60	9.91	22.58	-12.67
			SDM	26	4	25/29.4 (MCS11)	9.24	7.61	11.51	-	-	-1.60	9.91	22.58	-12.67
			SDM	26	8	25/29.4 (MCS11)	9.23	7.67	11.53	-	-	-1.60	9.93	22.58	-12.65
	5745	149	CDD	26	0	25/29.4 (MCS11)	10.17	8.54	12.44	30.00	-17.56	2.30	14.74	-	-
			CDD	26	4	25/29.4 (MCS11)	10.22	8.48	12.45	30.00	-17.55	2.30	14.75	-	-
			CDD	26	8	25/29.4 (MCS11)	10.22	8.47	12.44	30.00	-17.56	2.30	14.74	-	-
	5785	157	CDD	26	0	25/29.4 (MCS11)	10.29	8.42	12.46	30.00	-17.54	2.30	14.76	-	-
			CDD	26	4	25/29.4 (MCS11)	10.34	8.59	12.57	30.00	-17.43	2.30	14.87	-	-
			CDD	26	8	25/29.4 (MCS11)	10.34	8.46	12.51	30.00	-17.49	2.30	14.81	-	-
	5825	165	CDD	26	0	25/29.4 (MCS11)	10.14	8.54	12.42	30.00	-17.58	2.30	14.72	-	-
			CDD	26	4	25/29.4 (MCS11)	10.17	8.47	12.41	30.00	-17.59	2.30	14.71	-	-
			CDD	26	8	25/29.4 (MCS11)	10.38	8.54	12.57	30.00	-17.43	2.30	14.87	-	-

Table 7-140. ISED CDD/SDM Diversity 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU26)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5190	38	SDM	26	0	25/29.4 (MCS11)	9.27	7.52	11.50	-	-	-1.60	9.90	22.58	-12.68
			SDM	26	8	25/29.4 (MCS11)	9.16	7.48	11.41	-	-	-1.60	9.81	22.58	-12.77
			SDM	26	17	25/29.4 (MCS11)	9.14	7.65	11.46	-	-	-1.60	9.86	22.58	-12.72
	5230	46	SDM	26	0	25/29.4 (MCS11)	9.12	7.47	11.38	-	-	-1.60	9.78	22.58	-12.80
			SDM	26	8	25/29.4 (MCS11)	9.24	7.43	11.44	-	-	-1.60	9.84	22.58	-12.74
			SDM	26	17	25/29.4 (MCS11)	9.25	7.44	11.45	-	-	-1.60	9.85	22.58	-12.73
	5755	151	CDD	26	0	25/29.4 (MCS11)	10.24	8.59	12.50	30.00	-17.50	2.30	14.80	-	-
			CDD	26	8	25/29.4 (MCS11)	10.28	8.62	12.54	30.00	-17.46	2.30	14.84	-	-
			CDD	26	17	25/29.4 (MCS11)	10.20	8.50	12.44	30.00	-17.56	2.30	14.74	-	-
	5795	159	CDD	26	0	25/29.4 (MCS11)	10.49	8.65	12.68	30.00	-17.32	2.30	14.98	-	-
			CDD	26	8	25/29.4 (MCS11)	10.29	8.74	12.59	30.00	-17.41	2.30	14.89	-	-
			CDD	26	17	25/29.4 (MCS11)	10.46	8.68	12.67	30.00	-17.33	2.30	14.97	-	-

Table 7-141. ISED CDD/SDM Diversity 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU26)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5210	42	SDM	26	0	25/29.4 (MCS11)	9.28	7.52	11.50	-	-	-1.60	9.90	22.58	-12.68
			SDM	26	18	25/29.4 (MCS11)	9.32	7.70	11.59	-	-	-1.60	9.99	22.58	-12.59
			SDM	26	36	25/29.4 (MCS11)	9.27	7.37	11.43	-	-	-1.60	9.83	22.58	-12.75
	5775	155	CDD	26	0	25/29.4 (MCS11)	10.33	8.57	12.55	30.00	-17.45	2.30	14.85	-	-
			CDD	26	18	25/29.4 (MCS11)	10.49	8.74	12.72	30.00	-17.28	2.30	15.02	-	-
			CDD	26	36	25/29.4 (MCS11)	10.27	8.70	12.57	30.00	-17.43	2.30	14.87	-	-

Table 7-142. ISED CDD/SDM Diversity 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (RU26)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 88 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.35 FCC CDD Diversity Conducted Output Power Measurements (RU52)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit	Conducted Power
							Antenna 5T	Antenna 1b	Summed	[dBm]	Margin [dB]
	5260	52	CDD	52	37	50/58.8 (MCS11)	11.64	10.12	13.96	23.64	-9.68
			CDD	52	39	50/58.8 (MCS11)	11.87	10.09	14.08	23.64	-9.56
			CDD	52	40	50/58.8 (MCS11)	11.74	10.01	13.97	23.64	-9.67
	5300	60	CDD	52	37	50/58.8 (MCS11)	11.70	9.93	13.92	23.64	-9.72
			CDD	52	39	50/58.8 (MCS11)	11.72	10.02	13.97	23.64	-9.67
			CDD	52	40	50/58.8 (MCS11)	11.83	10.03	14.03	23.64	-9.61
	5320	64	CDD	52	37	50/58.8 (MCS11)	11.91	10.21	14.15	23.64	-9.49
			CDD	52	39	50/58.8 (MCS11)	11.74	10.12	14.01	23.64	-9.63
CDD			52	40	50/58.8 (MCS11)	11.74	10.09	14.00	23.64	-9.64	
5500	100	CDD	52	37	50/58.8 (MCS11)	11.86	10.15	14.10	23.67	-9.57	
		CDD	52	39	50/58.8 (MCS11)	11.88	10.16	14.11	23.67	-9.56	
		CDD	52	40	50/58.8 (MCS11)	11.98	10.19	14.19	23.67	-9.48	
5580	116	CDD	52	37	50/58.8 (MCS11)	11.69	10.17	14.01	23.67	-9.66	
		CDD	52	39	50/58.8 (MCS11)	11.82	10.19	14.09	23.67	-9.58	
		CDD	52	40	50/58.8 (MCS11)	11.86	10.09	14.07	23.67	-9.60	
5720	144	CDD	52	37	50/58.8 (MCS11)	11.62	10.05	13.92	23.67	-9.75	
		CDD	52	39	50/58.8 (MCS11)	11.76	10.13	14.03	23.67	-9.64	
		CDD	52	40	50/58.8 (MCS11)	11.74	9.98	13.96	23.67	-9.71	

Table 7-143. FCC CDD Diversity 20MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit	Conducted Power Margin
							Antenna 5T	Antenna 1b	Summed	[dBm]	[dB]
	5270	54	CDD	52	37	50/58.8 (MCS11)	11.60	9.96	13.87	23.64	-9.77
			CDD	52	40	50/58.8 (MCS11)	11.83	9.97	14.01	23.64	-9.63
			CDD	52	44	50/58.8 (MCS11)	11.82	9.97	14.00	23.64	-9.64
	5310	62	CDD	52	37	50/58.8 (MCS11)	11.85	10.14	14.09	23.64	-9.55
			CDD	52	40	50/58.8 (MCS11)	11.97	10.00	14.10	23.64	-9.54
			CDD	52	44	50/58.8 (MCS11)	11.73	9.88	13.91	23.64	-9.73
	5510	102	CDD	52	37	50/58.8 (MCS11)	11.77	9.94	13.96	23.67	-9.71
			CDD	52	40	50/58.8 (MCS11)	11.86	10.07	14.07	23.67	-9.60
CDD			52	44	50/58.8 (MCS11)	11.96	10.01	14.10	23.67	-9.57	
5550	110	CDD	52	37	50/58.8 (MCS11)	11.63	10.17	13.97	23.67	-9.70	
		CDD	52	40	50/58.8 (MCS11)	11.87	10.13	14.10	23.67	-9.57	
		CDD	52	44	50/58.8 (MCS11)	11.84	10.10	14.07	23.67	-9.60	
5710	142	CDD	52	37	50/58.8 (MCS11)	11.87	10.04	14.06	23.67	-9.61	
		CDD	52	40	50/58.8 (MCS11)	11.65	10.08	13.95	23.67	-9.72	
		CDD	52	44	50/58.8 (MCS11)	11.95	9.98	14.08	23.67	-9.59	

Table 7-144. FCC CDD Diversity 40MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit	Conducted Power
							Antenna 5T	Antenna 1b	Summed	[dBm]	Margin [dB]
	5290	58	CDD	52	37	50/58.8 (MCS11)	11.80	9.92	13.97	23.64	-9.67
			CDD	52	44	50/58.8 (MCS11)	11.71	9.99	13.95	23.64	-9.69
			CDD	52	52	50/58.8 (MCS11)	11.76	9.90	13.94	23.64	-9.70
	5530	106	CDD	52	37	50/58.8 (MCS11)	11.85	10.15	14.09	23.67	-9.58
			CDD	52	44	50/58.8 (MCS11)	11.73	10.18	14.04	23.67	-9.63
			CDD	52	52	50/58.8 (MCS11)	11.74	10.08	14.00	23.67	-9.67
	5610	122	CDD	52	37	50/58.8 (MCS11)	11.98	9.98	14.11	23.67	-9.56
			CDD	52	44	50/58.8 (MCS11)	11.80	9.95	13.98	23.67	-9.69
CDD			52	52	50/58.8 (MCS11)	11.91	9.85	14.01	23.67	-9.66	
5690	138	CDD	52	37	50/58.8 (MCS11)	11.98	9.96	14.09	23.67	-9.58	
		CDD	52	44	50/58.8 (MCS11)	11.70	9.90	13.90	23.67	-9.77	
		CDD	52	52	50/58.8 (MCS11)	11.69	10.05	13.96	23.67	-9.71	

Table 7-145. FCC CDD Diversity 80MHz BW (UNII) Maximum Conducted Output Power (RU52)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 89 of 297

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 1b	Summed		
	5250	50 (L)	CDD	52	37	50/58.8 (MCS11)	11.09	9.32	13.30	23.98	-10.68
			CDD	52	52	50/58.8 (MCS11)	11.02	9.16	13.20	23.98	-10.78
	5570	50 (U)	CDD	52	52	50/58.8 (MCS11)	11.03	9.10	13.18	23.64	-10.46
			CDD	52	37	50/58.8 (MCS11)	10.11	8.49	12.39	23.67	-11.28
		114 (L)	CDD	52	52	50/58.8 (MCS11)	10.10	8.32	12.31	23.67	-11.36
			CDD	52	52	50/58.8 (MCS11)	9.93	8.10	12.12	23.67	-11.55
		114 (U)	CDD	52	52	50/58.8 (MCS11)	9.93	8.10	12.12	23.67	-11.55
			CDD	52	52	50/58.8 (MCS11)	9.93	8.10	12.12	23.67	-11.55

Table 7-146. FCC CDD Diversity 160MHz BW (UNII) Maximum Conducted Output Power (RU52)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 90 of 297

V 10.6 10/27/2023

7.4.36 ISED CDD/SDM Diversity Conducted Output Power Measurements (RU52)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5260	52	CDD	52	37	50/58.8 (MCS11)	11.64	10.12	13.96	23.64	-9.68	-0.30	13.66	29.64	-15.98
			CDD	52	39	50/58.8 (MCS11)	11.87	10.09	14.08	23.64	-9.56	-0.30	13.78	29.64	-15.86
			CDD	52	40	50/58.8 (MCS11)	11.74	10.01	13.97	23.64	-9.67	-0.30	13.67	29.64	-15.97
			CDD	52	37	50/58.8 (MCS11)	11.70	9.93	13.92	23.64	-9.72	-0.30	13.62	29.64	-16.02
	5300	60	CDD	52	39	50/58.8 (MCS11)	11.72	10.02	13.97	23.64	-9.67	-0.30	13.67	29.64	-15.97
			CDD	52	40	50/58.8 (MCS11)	11.83	10.03	14.03	23.64	-9.61	-0.30	13.73	29.64	-15.91
			CDD	52	37	50/58.8 (MCS11)	11.91	10.21	14.15	23.64	-9.49	-0.30	13.85	29.64	-15.79
			CDD	52	39	50/58.8 (MCS11)	11.74	10.12	14.01	23.64	-9.63	-0.30	13.71	29.64	-15.93
	5320	64	CDD	52	40	50/58.8 (MCS11)	11.74	10.09	14.00	23.64	-9.64	-0.30	13.70	29.64	-15.94
			CDD	52	37	50/58.8 (MCS11)	11.86	10.15	14.10	23.67	-9.57	1.60	15.70	29.67	-13.97
			CDD	52	39	50/58.8 (MCS11)	11.88	10.16	14.11	23.67	-9.56	1.60	15.71	29.67	-13.96
			CDD	52	40	50/58.8 (MCS11)	11.98	10.19	14.19	23.67	-9.48	1.60	15.79	29.67	-13.88
	5500	100	CDD	52	37	50/58.8 (MCS11)	11.69	10.17	14.01	23.67	-9.66	1.60	15.61	29.67	-14.06
			CDD	52	39	50/58.8 (MCS11)	11.82	10.19	14.09	23.67	-9.58	1.60	15.69	29.67	-13.98
			CDD	52	40	50/58.8 (MCS11)	11.86	10.09	14.07	23.67	-9.60	1.60	15.67	29.67	-14.00
			CDD	52	37	50/58.8 (MCS11)	11.62	10.05	13.92	23.67	-9.75	1.60	15.52	29.67	-14.15
5580	116	CDD	52	39	50/58.8 (MCS11)	11.76	10.13	14.03	23.67	-9.64	1.60	15.63	29.67	-14.04	
		CDD	52	40	50/58.8 (MCS11)	11.74	9.98	13.96	23.67	-9.71	1.60	15.56	29.67	-14.11	

Table 7-147. ISED CDD Diversity 20MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5270	54	CDD	52	37	50/58.8 (MCS11)	11.60	9.96	13.87	23.64	-9.77	-0.30	13.57	29.64	-16.07
			CDD	52	40	50/58.8 (MCS11)	11.83	9.97	14.01	23.64	-9.63	-0.30	13.71	29.64	-15.93
			CDD	52	44	50/58.8 (MCS11)	11.82	9.97	14.00	23.64	-9.64	-0.30	13.70	29.64	-15.94
	5310	62	CDD	52	37	50/58.8 (MCS11)	11.85	10.14	14.09	23.64	-9.55	-0.30	13.79	29.64	-15.85
			CDD	52	40	50/58.8 (MCS11)	11.97	10.00	14.10	23.64	-9.54	-0.30	13.80	29.64	-15.84
			CDD	52	44	50/58.8 (MCS11)	11.73	9.88	13.91	23.64	-9.73	-0.30	13.61	29.64	-16.03
	5510	102	CDD	52	37	50/58.8 (MCS11)	11.77	9.94	13.96	23.67	-9.71	1.60	15.56	29.67	-14.11
			CDD	52	40	50/58.8 (MCS11)	11.86	10.07	14.07	23.67	-9.60	1.60	15.67	29.67	-14.00
CDD			52	44	50/58.8 (MCS11)	11.96	10.01	14.10	23.67	-9.57	1.60	15.70	29.67	-13.97	
5550	110	CDD	52	37	50/58.8 (MCS11)	11.63	10.17	13.97	23.67	-9.70	1.60	15.57	29.67	-14.10	
		CDD	52	40	50/58.8 (MCS11)	11.87	10.13	14.10	23.67	-9.57	1.60	15.70	29.67	-13.97	
		CDD	52	44	50/58.8 (MCS11)	11.84	10.10	14.07	23.67	-9.60	1.60	15.67	29.67	-14.00	
5710	142	CDD	52	37	50/58.8 (MCS11)	11.87	10.04	14.06	23.67	-9.61	1.60	15.66	29.67	-14.01	
		CDD	52	40	50/58.8 (MCS11)	11.65	10.08	13.95	23.67	-9.72	1.60	15.55	29.67	-14.12	
		CDD	52	44	50/58.8 (MCS11)	11.95	9.98	14.08	23.67	-9.59	1.60	15.68	29.67	-13.99	

Table 7-148. ISED CDD Diversity 40MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5290	58	CDD	52	37	50/58.8 (MCS11)	11.80	9.92	13.97	23.64	-9.67	-0.30	13.67	29.64	-15.97
			CDD	52	44	50/58.8 (MCS11)	11.71	9.99	13.95	23.64	-9.69	-0.30	13.65	29.64	-15.99
			CDD	52	52	50/58.8 (MCS11)	11.76	9.90	13.94	23.64	-9.70	-0.30	13.64	29.64	-16.00
	5530	106	CDD	52	37	50/58.8 (MCS11)	11.85	10.15	14.09	23.67	-9.58	1.60	15.69	29.67	-13.98
			CDD	52	44	50/58.8 (MCS11)	11.73	10.18	14.04	23.67	-9.63	1.60	15.64	29.67	-14.03
			CDD	52	52	50/58.8 (MCS11)	11.74	10.08	14.00	23.67	-9.67	1.60	15.60	29.67	-14.07
	5690	138	CDD	52	37	50/58.8 (MCS11)	11.98	9.96	14.09	23.67	-9.58	1.60	15.69	29.67	-13.98
			CDD	52	44	50/58.8 (MCS11)	11.70	9.90	13.90	23.67	-9.77	1.60	15.50	29.67	-14.17
CDD			52	52	50/58.8 (MCS11)	11.69	10.05	13.96	23.67	-9.71	1.60	15.56	29.67	-14.11	

Table 7-149. ISED CDD Diversity 80MHz BW (UNII) Maximum Conducted Output Power (RU52)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
							Antenna 5T	Antenna 1b	Summed							
	5250	50 (L)	SDM	52	37	50/58.8 (MCS11)	11.18	9.23	13.33	23.98	-10.65	-1.60	11.73	22.58	-10.85	
			SDM	52	52	50/58.8 (MCS11)	11.15	9.32	13.34	23.98	-10.64	-1.60	11.74	22.58	-10.84	
		50 (U)	SDM	52	52	50/58.8 (MCS11)	11.13	9.36	13.35	23.64	-10.29	-0.86	12.49	22.58	-10.09	

Table 7-150. ISED SDM Diversity 160MHz BW (UNII) Maximum Conducted Output Power (RU52)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 91 of 297

7.4.37 FCC CDD Diversity Conducted Output Power Measurements (Highest Power Among Partially-Loaded RU's)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 1b	Summed		
5180	36		CDD	106	53	106.3/125 (MCS11)	14.69	13.07	16.96	23.98	-7.02
			CDD	106	54	106.3/125 (MCS11)	14.90	13.15	17.12	23.98	-6.86
5200	40		CDD	106	53	106.3/125 (MCS11)	14.84	12.87	16.97	23.98	-7.01
			CDD	106	54	106.3/125 (MCS11)	14.93	12.86	17.03	23.98	-6.95
5240	48		CDD	106	53	106.3/125 (MCS11)	14.87	13.06	17.07	23.98	-6.91
			CDD	106	54	106.3/125 (MCS11)	14.78	12.97	16.98	23.98	-7.00
5260	52		CDD	106	53	106.3/125 (MCS11)	14.63	13.00	16.90	23.64	-6.74
			CDD	106	54	106.3/125 (MCS11)	14.70	12.94	16.92	23.64	-6.72
5300	60		CDD	106	53	106.3/125 (MCS11)	14.61	12.93	16.86	23.64	-6.78
			CDD	106	54	106.3/125 (MCS11)	14.80	13.00	17.00	23.64	-6.64
5320	64		CDD	106	53	106.3/125 (MCS11)	14.63	13.11	16.95	23.64	-6.69
			CDD	106	54	106.3/125 (MCS11)	14.99	13.24	17.21	23.64	-6.43
5500	100		CDD	106	53	106.3/125 (MCS11)	14.45	12.51	16.60	23.67	-7.07
			CDD	106	54	106.3/125 (MCS11)	14.46	12.62	16.65	23.67	-7.02
5520	104		CDD	106	53	106.3/125 (MCS11)	14.81	13.03	17.02	23.67	-6.65
			CDD	106	54	106.3/125 (MCS11)	14.85	13.10	17.07	23.67	-6.60
5580	116		CDD	106	53	106.3/125 (MCS11)	14.88	12.95	17.03	23.67	-6.64
			CDD	106	54	106.3/125 (MCS11)	14.53	12.85	16.78	23.67	-6.89
5680	136		CDD	106	53	106.3/125 (MCS11)	14.65	12.89	16.86	23.67	-6.81
			CDD	106	54	106.3/125 (MCS11)	14.71	13.21	17.04	23.67	-6.63
5700	140		CDD	106	53	106.3/125 (MCS11)	12.89	11.08	15.08	23.67	-8.59
			CDD	106	54	106.3/125 (MCS11)	12.91	11.04	15.09	23.67	-8.58
5720	144		CDD	106	53	106.3/125 (MCS11)	14.66	13.18	16.99	23.67	-6.68
			CDD	106	54	106.3/125 (MCS11)	14.73	13.14	17.02	23.67	-6.65
5745	149		CDD	106	53	106.3/125 (MCS11)	16.28	14.58	18.53	30.00	-11.47
			CDD	106	54	106.3/125 (MCS11)	16.38	14.56	18.57	30.00	-11.43
5785	157		CDD	106	53	106.3/125 (MCS11)	16.22	14.73	18.55	30.00	-11.45
			CDD	106	54	106.3/125 (MCS11)	16.21	14.73	18.54	30.00	-11.46
5825	165		CDD	106	53	106.3/125 (MCS11)	16.47	14.57	18.63	30.00	-11.37
			CDD	106	54	106.3/125 (MCS11)	16.38	14.61	18.59	30.00	-11.41

Table 7-151. FCC CDD Diversity 20MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 92 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 1b	Summed		
	5190	38	CDD	242	61	243.8/286.8 (MCS11)	14.13	12.55	16.42	23.98	-7.56
			CDD	242	62	243.8/286.8 (MCS11)	14.17	12.65	16.49	23.98	-7.49
	5230	46	CDD	242	61	243.8/286.8 (MCS11)	17.88	16.07	20.08	23.98	-3.90
			CDD	242	62	243.8/286.8 (MCS11)	18.00	16.12	20.17	23.98	-3.81
	5270	54	CDD	242	61	243.8/286.8 (MCS11)	17.95	16.25	20.19	23.64	-3.45
			CDD	242	62	243.8/286.8 (MCS11)	17.85	16.02	20.04	23.64	-3.60
	5310	62	CDD	242	61	243.8/286.8 (MCS11)	13.89	12.23	16.15	23.64	-7.49
			CDD	242	62	243.8/286.8 (MCS11)	13.84	12.07	16.05	23.64	-7.59
	5510	102	CDD	242	61	243.8/286.8 (MCS11)	12.22	10.66	14.52	23.63	-9.11
			CDD	242	62	243.8/286.8 (MCS11)	12.26	10.73	14.57	23.63	-9.06
	5550	110	CDD	242	61	243.8/286.8 (MCS11)	17.02	15.11	19.18	23.63	-4.45
			CDD	242	62	243.8/286.8 (MCS11)	17.03	15.10	19.18	23.63	-4.45
	5590	118	CDD	242	61	243.8/286.8 (MCS11)	17.82	16.00	20.02	23.63	-3.61
			CDD	242	62	243.8/286.8 (MCS11)	17.80	16.00	20.00	23.63	-3.63
	5630	126	CDD	242	61	243.8/286.8 (MCS11)	17.73	15.86	19.91	23.63	-3.72
			CDD	242	62	243.8/286.8 (MCS11)	17.78	15.89	19.95	23.63	-3.68
	5670	134	CDD	242	61	243.8/286.8 (MCS11)	14.44	12.67	16.65	23.63	-6.98
			CDD	242	62	243.8/286.8 (MCS11)	14.37	12.67	16.61	23.63	-7.02
	5710	142	CDD	106	53	243.8/286.8 (MCS11)	14.77	13.16	17.05	23.63	-6.58
			CDD	106	54	243.8/286.8 (MCS11)	14.62	12.88	16.85	23.63	-6.78
			CDD	106	56	243.8/286.8 (MCS11)	14.78	12.92	16.96	23.63	-6.67
	5755	151	CDD	242	61	243.8/286.8 (MCS11)	19.13	17.57	21.43	30.00	-8.57
			CDD	242	62	243.8/286.8 (MCS11)	19.10	17.59	21.42	30.00	-8.58
	5795	159	CDD	242	61	243.8/286.8 (MCS11)	19.23	17.65	21.52	30.00	-8.48
			CDD	242	62	243.8/286.8 (MCS11)	19.32	17.70	21.59	30.00	-8.41

Table 7-152. FCC CDD Diversity 40MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 1b	Summed		
	5210	42	CDD	484	65	487.5/573.5 (MCS11)	13.83	12.03	16.03	23.98	-7.95
			CDD	484	66	487.5/573.5 (MCS11)	13.88	11.90	16.01	23.98	-7.97
	5290	58	CDD	484	65	487.5/573.5 (MCS11)	13.47	11.66	15.67	23.64	-7.97
			CDD	484	66	487.5/573.5 (MCS11)	13.34	11.39	15.49	23.64	-8.15
	5530	106	CDD	484	65	121.9/143.4 (MCS11)	10.59	10.67	13.64	23.63	-9.99
			CDD	484	66	121.9/143.4 (MCS11)	10.68	10.70	13.70	23.63	-9.93
	5610	122	CDD	484	65	487.5/573.5 (MCS11)	16.41	14.61	18.61	23.63	-5.02
			CDD	484	66	487.5/573.5 (MCS11)	16.27	14.57	18.51	23.63	-5.12
	5690	138	CDD	106	53	106.3/125 (MCS11)	14.60	13.00	16.89	23.63	-6.74
			CDD	106	56	106.3/125 (MCS11)	14.54	13.14	16.91	23.63	-6.72
			CDD	106	60	106.3/125 (MCS11)	14.72	13.12	17.01	23.63	-6.62
	5775	155	CDD	484	65	487.5/573.5 (MCS11)	15.79	14.24	18.09	30.00	-11.91
			CDD	484	66	487.5/573.5 (MCS11)	15.73	13.95	17.94	30.00	-12.06

Table 7-153. FCC CDD Diversity 80MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 1b	Summed		
	5250	50 (L)	CDD	996	67	1020.8/1201 (MCS11)	11.02	9.36	13.28	23.98	-10.70
	5250	50 (U)	CDD	996	67	1020.8/1201 (MCS11)	11.06	9.27	13.27	23.64	-10.37
	5570	114 (L)	CDD	996	67	1020.8/1201 (MCS11)	9.92	8.37	12.22	23.67	-11.45
	5570	114 (U)	CDD	996	67	1020.8/1201 (MCS11)	10.06	8.30	12.28	23.67	-11.39

Table 7-154. FCC CDD Diversity 160MHz BW (UNII) Maximum Conducted Output Power (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA3269 IC: 579C-A3269			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device		Page 93 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.38 ISED CDD/SDM Diversity Conducted Output Power Measurements (Highest Power Among Partially-Loaded RU's)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5180	36	SDM	106	53	106.3/125 (MCS11)	15.49	13.41	17.59	-	-	-1.60	15.99	22.58	-6.59
			SDM	106	54	106.3/125 (MCS11)	15.36	13.35	17.48	-	-	-1.60	15.88	22.58	-6.70
	5200	40	SDM	106	53	106.3/125 (MCS11)	15.26	13.57	17.51	-	-	-1.60	15.91	22.58	-6.67
			SDM	106	54	106.3/125 (MCS11)	15.28	13.36	17.43	-	-	-1.60	15.83	22.58	-6.75
	5240	48	SDM	106	53	106.3/125 (MCS11)	15.22	13.46	17.44	-	-	-1.60	15.84	22.58	-6.74
			SDM	106	54	106.3/125 (MCS11)	15.10	13.37	17.33	-	-	-1.60	15.73	22.58	-6.85
	5260	52	CDD	106	53	106.3/125 (MCS11)	14.63	13.00	16.90	23.64	-6.74	-0.30	16.60	29.64	-13.04
			CDD	106	54	106.3/125 (MCS11)	14.70	12.94	16.92	23.64	-6.72	-0.30	16.62	29.64	-13.02
	5300	60	CDD	106	53	106.3/125 (MCS11)	14.61	12.93	16.86	23.64	-6.78	-0.30	16.56	29.64	-13.08
			CDD	106	54	106.3/125 (MCS11)	14.80	13.00	17.00	23.64	-6.64	-0.30	16.70	29.64	-12.94
	5320	64	CDD	106	53	106.3/125 (MCS11)	14.63	13.11	16.95	23.64	-6.69	-0.30	16.65	29.64	-12.99
			CDD	106	54	106.3/125 (MCS11)	14.99	13.24	17.21	23.64	-6.43	-0.30	16.91	29.64	-12.73
	5500	100	CDD	106	53	106.3/125 (MCS11)	14.45	12.51	16.60	23.67	-7.07	1.60	18.20	29.67	-11.47
			CDD	106	54	106.3/125 (MCS11)	14.46	12.62	16.65	23.67	-7.02	1.60	18.25	29.67	-11.42
	5520	104	CDD	106	53	106.3/125 (MCS11)	14.81	13.03	17.02	23.67	-6.65	1.60	18.62	29.67	-11.05
			CDD	106	54	106.3/125 (MCS11)	14.85	13.10	17.07	23.67	-6.60	1.60	18.67	29.67	-11.00
	5580	116	CDD	106	53	106.3/125 (MCS11)	14.88	12.95	17.03	23.67	-6.64	1.60	18.63	29.67	-11.04
			CDD	106	54	106.3/125 (MCS11)	14.53	12.85	16.78	23.67	-6.89	1.60	18.38	29.67	-11.29
	5680	136	CDD	106	53	106.3/125 (MCS11)	14.65	12.89	16.86	23.67	-6.81	1.60	18.46	29.67	-11.21
			CDD	106	54	106.3/125 (MCS11)	14.71	13.21	17.04	23.67	-6.63	1.60	18.64	29.67	-11.03
	5700	140	CDD	106	53	106.3/125 (MCS11)	12.89	11.08	15.08	23.67	-8.59	1.60	16.68	29.67	-12.99
			CDD	106	54	106.3/125 (MCS11)	12.91	11.04	15.09	23.67	-8.58	1.60	16.69	29.67	-12.98
	5720	144	CDD	106	53	106.3/125 (MCS11)	14.66	13.18	16.99	23.67	-6.68	1.60	18.59	29.67	-11.08
			CDD	106	54	106.3/125 (MCS11)	14.73	13.14	17.02	23.67	-6.65	1.60	18.62	29.67	-11.05
	5745	149	CDD	106	53	106.3/125 (MCS11)	16.28	14.58	18.53	30.00	-11.47	2.30	20.83	-	-
			CDD	106	54	106.3/125 (MCS11)	16.38	14.56	18.57	30.00	-11.43	2.30	20.87	-	-
	5785	157	CDD	106	53	106.3/125 (MCS11)	16.22	14.73	18.55	30.00	-11.45	2.30	20.85	-	-
			CDD	106	54	106.3/125 (MCS11)	16.21	14.73	18.54	30.00	-11.46	2.30	20.84	-	-
	5825	165	CDD	106	53	106.3/125 (MCS11)	16.47	14.57	18.63	30.00	-11.37	2.30	20.93	-	-
			CDD	106	54	106.3/125 (MCS11)	16.38	14.61	18.59	30.00	-11.41	2.30	20.89	-	-

Table 7-155. ISED CDD/SDM Diversity 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5190	38	CDD	242	61	243.8/286.8 (MCS11)	14.32	12.36	16.46	-	-	-1.00	15.46	22.60	-7.14
			CDD	242	62	243.8/286.8 (MCS11)	14.42	12.48	16.57	-	-	-1.00	15.57	22.60	-7.03
	5230	46	SDM	242	61	243.8/286.8 (MCS11)	18.47	16.73	20.69	-	-	-1.60	19.09	22.60	-3.51
			SDM	242	62	243.8/286.8 (MCS11)	18.35	16.42	20.50	-	-	-1.60	18.90	22.60	-3.70
	5270	54	CDD	242	61	243.8/286.8 (MCS11)	17.95	14.50	19.57	23.64	-4.07	-0.30	19.27	29.64	-10.37
			CDD	242	62	243.8/286.8 (MCS11)	17.85	14.27	19.43	23.64	-4.21	-0.30	19.13	29.64	-10.51
	5310	62	CDD	242	61	243.8/286.8 (MCS11)	13.89	12.23	16.15	23.64	-7.49	-0.30	15.85	29.64	-13.79
			CDD	242	62	243.8/286.8 (MCS11)	13.84	12.07	16.05	23.64	-7.59	-0.30	15.75	29.64	-13.89
	5510	102	CDD	242	61	243.8/286.8 (MCS11)	12.22	10.66	14.52	23.63	-9.11	1.60	16.12	29.63	-13.51
			CDD	242	62	243.8/286.8 (MCS11)	12.26	10.73	14.57	23.63	-9.06	1.60	16.17	29.63	-13.46
	5550	110	CDD	242	61	243.8/286.8 (MCS11)	17.02	15.11	19.18	23.63	-4.45	1.60	20.78	29.63	-8.85
			CDD	242	62	243.8/286.8 (MCS11)	17.03	15.10	19.18	23.63	-4.45	1.60	20.78	29.63	-8.85
	5670	134	CDD	242	61	243.8/286.8 (MCS11)	14.44	12.67	16.65	23.63	-6.98	1.60	18.25	29.63	-11.38
			CDD	242	62	243.8/286.8 (MCS11)	14.37	12.67	16.61	23.63	-7.02	1.60	18.21	29.63	-11.42
	5710	142	CDD	106	53	243.8/286.8 (MCS11)	14.77	13.16	17.05	23.63	-6.58	1.60	18.65	29.63	-10.98
			CDD	106	54	243.8/286.8 (MCS11)	14.62	12.88	16.85	23.63	-6.78	1.60	18.45	29.63	-11.18
	5755	151	CDD	242	61	243.8/286.8 (MCS11)	19.13	15.82	20.79	30.00	-9.21	2.30	23.09	-	-
			CDD	242	62	243.8/286.8 (MCS11)	19.10	15.84	20.78	30.00	-9.22	2.30	23.08	-	-
	5795	159	CDD	242	61	243.8/286.8 (MCS11)	19.23	15.90	20.89	30.00	-9.11	2.30	23.19	-	-
			CDD	242	62	243.8/286.8 (MCS11)	19.32	15.95	20.96	30.00	-9.04	2.30	23.26	-	-

Table 7-156. ISED CDD/SDM Diversity 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5210	42	CDD	484	65	487.5/573.5 (MCS11)	13.82	12.08	16.04	-	-	-1.00	15.04	22.58	-7.54
			CDD	484	66	487.5/573.5 (MCS11)	13.87	11.88	15.99	-	-	-1.00	14.99	22.58	-7.59
	5290	58	CDD	484	65	487.5/573.5 (MCS11)	13.47	11.66	15.67	23.64	-7.97	-0.30	15.37	29.64	-14.27
			CDD	484	66	487.5/573.5 (MCS11)	13.34	11.39	15.49	23.64	-8.15	-0.30	15.19	29.64	-14.45
	5530	106	CDD	242	61	121.9/143.4 (MCS11)	10.59	10.67	13.64	23.67	-10.03	1.60	15.24	29.67	-14.43
			CDD	242	62	121.9/143.4 (MCS11)	10.68	10.70	13.70	23.67	-9.97	1.60	15.30	29.67	-14.37
	5690	138	CDD	242	64	121.9/143.4 (MCS11)	10.54	10.58	13.57	23.67	-10.10	-0.30	13.27	29.67	-16.40
			CDD	106	53	106.3/125 (MCS11)	14.60	13.00	16.89	23.67	-6.78	1.60	18.49	29.67	-11.18
	5775	155	CDD	106	56	106.3/125 (MCS11)	14.54	13.14	16.91	23.67	-6.76	1.60	18.51	29.67	-11.16
			CDD	106	60	106.3/125 (MCS11)	14.72	13.12	17.01	23.67	-6.66	1.60	18.61	29.67	-11.06
			CDD	484	65	487.5/573.5 (MCS11)	15.79	14.24	18.09	30.00	-11.91	2.30	20.39	-	-
			CDD	484	66	487.5/573.5 (MCS11)	15.73	13.95	17.94	30.00	-12.06	2.30	20.24	-	-

Table 7-157. ISED CDD Diversity 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 94 of 297

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5250	50 (L)	CDD	996	67	1020.8/1201 (MCS11)	11.04	9.38	13.30	23.98	-10.68	-1.00	12.30	22.58	-10.28
	5250	50 (U)	CDD	996	67	1020.8/1201 (MCS11)	11.11	9.42	13.36	23.64	-10.28	-0.30	13.06	22.58	-9.52

Table 7-158. ISED CDD Diversity 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Highest Power Among Partially-Loaded RU's)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 95 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4.39 FCC CDD Diversity Conducted Output Power Measurements (Fully-loaded RU)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 1b	Summed		
	5180	36	CDD	242	61	243.8/286.8 (MCS11)	15.71	13.74	17.85	23.98	-6.13
	5200	40	CDD	242	61	243.8/286.8 (MCS11)	17.83	16.17	20.09	23.98	-3.89
	5240	48	CDD	242	61	243.8/286.8 (MCS11)	17.82	16.17	20.08	23.98	-3.90
	5260	52	CDD	242	61	243.8/286.8 (MCS11)	17.96	16.14	20.15	23.64	-3.49
	5300	60	CDD	242	61	243.8/286.8 (MCS11)	17.86	15.99	20.03	23.64	-3.61
	5320	64	CDD	242	61	243.8/286.8 (MCS11)	15.73	13.94	17.94	23.64	-5.70
	5500	100	CDD	242	61	243.8/286.8 (MCS11)	14.31	12.50	16.51	23.67	-7.16
	5520	104	CDD	242	61	243.8/286.8 (MCS11)	16.97	15.24	19.20	23.67	-4.47
	5540	108	CDD	242	61	243.8/286.8 (MCS11)	17.85	16.00	20.04	23.67	-3.63
	5580	116	CDD	242	61	243.8/286.8 (MCS11)	17.66	16.01	19.92	23.67	-3.75
	5660	132	CDD	242	61	243.8/286.8 (MCS11)	17.71	16.20	20.03	23.67	-3.64
	5680	136	CDD	242	61	243.8/286.8 (MCS11)	17.39	15.45	19.54	23.67	-4.13
	5700	140	CDD	242	61	243.8/286.8 (MCS11)	12.74	11.03	14.98	23.67	-8.69
	5720	144	CDD	242	61	243.8/286.8 (MCS11)	17.55	16.11	19.90	23.67	-3.77
	5745	149	CDD	242	61	243.8/286.8 (MCS11)	19.22	17.54	21.47	30.00	-8.53
	5785	157	CDD	242	61	243.8/286.8 (MCS11)	19.28	17.44	21.47	30.00	-8.53
	5825	165	CDD	242	61	243.8/286.8 (MCS11)	19.28	17.58	21.52	30.00	-8.48

Table 7-159. FCC CDD Diversity 20MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 1b	Summed		
	5190	38	CDD	484	65	487.5/573.5 (MCS11)	14.44	12.44	16.57	23.98	-7.41
	5230	46	CDD	484	65	487.5/573.5 (MCS11)	19.10	17.59	21.42	23.98	-2.56
	5270	54	CDD	484	65	487.5/573.5 (MCS11)	18.39	16.73	20.64	23.64	-3.00
	5310	62	CDD	484	65	487.5/573.5 (MCS11)	13.64	12.04	15.92	23.64	-7.72
	5510	102	CDD	484	65	487.5/573.5 (MCS11)	12.20	10.62	14.49	23.67	-9.18
	5550	110	CDD	484	65	487.5/573.5 (MCS11)	17.01	15.13	19.18	23.67	-4.49
	5590	118	CDD	484	65	487.5/573.5 (MCS11)	19.42	17.64	21.63	23.67	-2.04
	5630	126	CDD	484	65	487.5/573.5 (MCS11)	18.97	17.02	21.11	23.67	-2.56
	5670	134	CDD	484	65	487.5/573.5 (MCS11)	14.68	12.81	16.85	23.67	-6.82
	5710	142	CDD	484	65	487.5/573.5 (MCS11)	19.14	17.45	21.39	23.67	-2.28
	5755	151	CDD	484	65	487.5/573.5 (MCS11)	19.37	17.61	21.59	30.00	-8.41
	5795	159	CDD	484	65	487.5/573.5 (MCS11)	19.32	17.52	21.52	30.00	-8.48

Table 7-160. FCC CDD Diversity 40MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 1b	Summed		
	5210	42	CDD	996	67	1020.8/1201 (MCS11)	13.71	12.09	15.99	23.98	-7.99
	5290	58	CDD	996	67	1020.8/1201 (MCS11)	13.41	11.49	15.57	23.64	-8.07
	5530	106	CDD	996	67	1020.8/1201 (MCS11)	12.40	10.72	14.65	23.67	-9.02
	5610	122	CDD	996	67	1020.8/1201 (MCS11)	16.31	14.70	18.58	23.67	-5.09
	5690	138	CDD	996	67	1020.8/1201 (MCS11)	19.36	17.37	21.49	23.67	-2.18
	5775	155	CDD	996	67	1020.8/1201 (MCS11)	15.74	13.88	17.92	30.00	-12.08

Table 7-161. FCC CDD Diversity 80MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]
							Antenna 5T	Antenna 1b	Summed		
	5250	50	CDD	996x2	68	2041.6/2402 (MCS11)	11.12	9.22	13.28	23.98	-10.70
	5570	114	CDD	996x2	68	2041.6/2402 (MCS11)	10.18	8.09	12.27	23.67	-11.40

Table 7-162. FCC CDD Diversity 160MHz BW (UNII) Maximum Conducted Output Power (Fully-loaded RU)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 96 of 297

7.4.40 ISED CDD/SDM Diversity Conducted Output Power Measurements (Fully-loaded RU)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5180	36	SDM	242	61	243.8/286.8 (MCS11)	15.75	13.76	17.88	-	-	-1.60	16.28	22.58	-6.30
	5200	40	SDM	242	61	243.8/286.8 (MCS11)	18.35	16.62	20.58	-	-	-1.60	18.98	22.58	-3.60
	5240	48	SDM	242	61	243.8/286.8 (MCS11)	18.19	16.52	20.44	-	-	-1.60	18.84	22.58	-3.74
	5260	52	CDD	242	61	243.8/286.8 (MCS11)	17.96	16.14	20.15	23.64	-3.49	-0.30	19.85	29.64	-9.79
	5300	60	CDD	242	61	243.8/286.8 (MCS11)	17.86	15.99	20.03	23.64	-3.61	-0.30	19.73	29.64	-9.91
	5320	64	CDD	242	61	243.8/286.8 (MCS11)	15.73	13.94	17.94	23.64	-5.70	-0.30	17.64	29.64	-12.00
	5500	100	CDD	242	61	243.8/286.8 (MCS11)	14.31	12.50	16.51	23.67	-7.16	1.60	18.11	29.67	-11.56
	5520	104	CDD	242	61	243.8/286.8 (MCS11)	16.97	15.24	19.20	23.67	-4.47	1.60	20.80	29.67	-8.87
	5540	108	CDD	242	61	243.8/286.8 (MCS11)	17.85	16.00	20.04	23.67	-3.63	1.60	21.64	29.67	-8.03
	5580	116	CDD	242	61	243.8/286.8 (MCS11)	17.66	16.01	19.92	23.67	-3.75	1.60	21.52	29.67	-8.15
	5660	132	CDD	242	61	243.8/286.8 (MCS11)	17.71	16.20	20.03	23.67	-3.64	1.60	21.63	29.67	-8.04
	5680	136	CDD	242	61	243.8/286.8 (MCS11)	17.39	15.45	19.54	23.67	-4.13	1.60	21.14	29.67	-8.53
	5700	140	CDD	242	61	243.8/286.8 (MCS11)	12.74	11.03	14.98	23.67	-8.69	1.60	16.58	29.67	-13.09
	5720	144	CDD	242	61	243.8/286.8 (MCS11)	17.55	16.11	19.90	23.67	-3.77	1.60	21.50	29.67	-8.17
	5745	149	CDD	242	61	243.8/286.8 (MCS11)	19.22	17.54	21.47	30.00	-8.53	2.30	23.77	-	-
	5785	157	CDD	242	61	243.8/286.8 (MCS11)	19.28	17.44	21.47	30.00	-8.53	2.30	23.77	-	-
	5825	165	CDD	242	61	243.8/286.8 (MCS11)	19.28	17.58	21.52	30.00	-8.48	2.30	23.82	-	-

Table 7-163. ISED CDD/SDM Diversity 20MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5190	38	CDD	484	65	487.5/573.5 (MCS11)	14.46	12.69	16.68	-	-	-1.00	15.68	22.58	-6.90
	5230	46	SDM	484	65	487.5/573.5 (MCS11)	19.18	17.59	21.47	-	-	-1.60	19.87	22.58	-2.71
	5270	54	CDD	484	65	487.5/573.5 (MCS11)	18.39	16.73	20.64	23.64	-3.00	-0.30	20.34	29.64	-9.30
	5310	62	CDD	484	65	487.5/573.5 (MCS11)	13.64	12.04	15.92	23.64	-7.72	-0.30	15.62	29.64	-14.02
	5510	102	CDD	484	65	487.5/573.5 (MCS11)	12.20	10.62	14.49	23.67	-9.18	1.60	16.09	29.67	-13.58
	5550	110	CDD	484	65	487.5/573.5 (MCS11)	17.01	15.13	19.18	23.67	-4.49	1.60	20.78	29.67	-8.89
	5670	134	CDD	484	65	487.5/573.5 (MCS11)	14.68	12.81	16.85	23.67	-6.82	1.60	18.45	29.67	-11.22
	5710	142	CDD	484	65	487.5/573.5 (MCS11)	19.14	17.45	21.39	23.67	-2.28	1.60	22.99	29.67	-6.68
	5755	151	CDD	484	65	487.5/573.5 (MCS11)	19.37	17.61	21.59	30.00	-8.41	2.30	23.89	-	-
	5795	159	CDD	484	65	487.5/573.5 (MCS11)	19.32	17.52	21.52	30.00	-8.48	2.30	23.82	-	-

Table 7-164. ISED CDD/SDM Diversity 40MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 1b	Summed						
	5210	42	CDD	996	67	1020.8/1201 (MCS11)	13.92	12.11	16.12	-	-	-1.00	15.12	22.58	-7.46
	5290	58	CDD	996	67	1020.8/1201 (MCS11)	13.41	11.49	15.57	23.64	-8.07	-0.30	15.27	29.64	-14.37
	5530	106	CDD	996	67	1020.8/1201 (MCS11)	12.40	10.72	14.65	23.67	-9.02	1.60	16.25	29.67	-13.42
	5690	138	CDD	996	67	1020.8/1201 (MCS11)	19.36	17.37	21.49	23.67	-2.18	1.60	23.09	29.67	-6.58
	5775	155	CDD	996	67	1020.8/1201 (MCS11)	15.74	13.88	17.92	30.00	-12.08	2.30	20.22	-	-

Table 7-165. ISED CDD Diversity 80MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

5GHz (160MHz Bandwidth)	Freq [MHz]	Channel	Mode	RU Size	RU Index	Data Rate [Mbps]	Conducted Powers [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
							Antenna 5T	Antenna 3b	Summed						
	5250	50	CDD	996x2	68	2041.6/2402 (MCS11)	11.18	11.06	14.13	23.98	-9.85	-0.30	13.83	22.58	-8.75

Table 7-166. ISED CDD Diversity 160MHz BW (UNII) Maximum Conducted Output Power and Max EIRP (Fully-loaded RU)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 97 of 297

Note:

Per ANSI C63.10-2020 and KDB 662911 v02r01 Section E1), the conducted powers at Antenna 5T and Antenna 3b were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2020 Subclause 14.6.3, the correlated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = G_{ANT} + \text{Array Gain dBi}$$

Per ANSI C63.10-2020 Subclause 14.6.3, the uncorrelated directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}] \text{ dBi}$$

Sample CDD/SDM Calculation:

At 5180MHz in 802.11ax (20MHz BW) mode, the average conducted output power was measured to be 9.49 dBm for Antenna 5T and 9.30 dBm for Antenna 3b.

$$\text{Antenna 5T} + \text{Antenna 3b} = \text{CDD/SDM}$$

$$(9.49 \text{ dBm} + 9.30 \text{ dBm}) = (8.89 \text{ mW} + 8.51 \text{ mW}) = 17.40 \text{ mW} = 12.41 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 5180MHz in 802.11ax (20MHz BW, SDM) mode, the average SDM conducted power was calculated to be 12.41 dBm with directional gain of -1.83 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$12.41 \text{ dBm} + -1.83 \text{ dBi} = 10.58 \text{ dBm}$$

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 98 of 297

V 10.6 10/27/2023

7.5 Maximum Power Spectral Density

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3.i); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.15 – 5.25GHz band, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1 MHz band.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2020 – Section 12.4.2.2

KDB 789033 D02 v02r01 – Section F

ANSI C63.10-2020 – Section 14.5.2.2 Measure-and-Sum Technique

KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Set span to encompass the entire 99% OBW of the signal
3. RBW = 1MHz for U-NII 1, U-NII 2A, U-NII 2C; 500kHz for U-NII 3
4. VBW ≥ 3MHz for U-NII 1, U-NII 2A, U-NII 2C; ≥ 3 x RBW for U-NII 3
5. Number of sweep points ≥ 2 x (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 99 of 297

V 10.6 10/27/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. All of the partially-loaded RU configurations have been investigated for Power Spectral Density measurement and among all partially-loaded RU configurations, the lowest supported RU configuration was found to be the worst case. Therefore, only RU26, RU52 (Partially-loaded RU) and RU242 (Fully-loaded RU) data are included in this section.
2. Low, mid, and high channels were tested and tabular data has been reported. Only worst case PSD plots have been reported.

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 100 of 297

V 10.6 10/27/2023

7.5.1 Antenna 5T Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26	0	12.5/14.7 (MCS11)	7.50	11.0	-3.50
				26	4	12.5/14.7 (MCS11)	6.52	11.0	-4.48
				26	8	12.5/14.7 (MCS11)	7.18	11.0	-3.82
	5200	40	ax (20MHz)	26	0	12.5/14.7 (MCS11)	7.66	11.0	-3.34
				26	4	12.5/14.7 (MCS11)	6.86	11.0	-4.14
				26	8	12.5/14.7 (MCS11)	7.67	11.0	-3.33
	5240	48	ax (20MHz)	26	0	12.5/14.7 (MCS11)	8.34	11.0	-2.66
				26	4	12.5/14.7 (MCS11)	6.71	11.0	-4.29
				26	8	12.5/14.7 (MCS11)	7.33	11.0	-3.67
	5190	38	ax (40MHz)	26	0	12.5/14.7 (MCS11)	7.22	11.0	-3.78
				26	8	12.5/14.7 (MCS11)	7.84	11.0	-3.17
				26	17	12.5/14.7 (MCS11)	7.60	11.0	-3.40
	5230	46	ax (40MHz)	26	0	12.5/14.7 (MCS11)	7.36	11.0	-3.64
				26	8	12.5/14.7 (MCS11)	7.90	11.0	-3.10
				26	17	12.5/14.7 (MCS11)	7.84	11.0	-3.16
	5210	42	ax (80MHz)	26	0	12.5/14.7 (MCS11)	6.91	11.0	-4.09
				26	18	12.5/14.7 (MCS11)	6.45	11.0	-4.55
				26	36	12.5/14.7 (MCS11)	7.41	11.0	-3.59

Table 7-167. Bands 1 Power Spectral Density Measurements Antenna 5T (RU26)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 101 of 297

V 10.6 10/27/2023

	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1/2A	5250	50 (L)	ax (160MHz)	52	37	25/29.4 (MCS11)	7.12	11.0	-3.88
		52		52	25/29.4 (MCS11)	7.29	11.0	-3.71	
		50 (U)		52	52	25/29.4 (MCS11)	7.17	11.0	-3.83
Band 2A	5260	52	ax (20MHz)	52	37	25/29.4 (MCS11)	8.05	11.0	-2.95
				52	38	25/29.4 (MCS11)	7.96	11.0	-3.04
				52	40	25/29.4 (MCS11)	8.04	11.0	-2.96
	5280	60	ax (20MHz)	52	37	25/29.4 (MCS11)	7.70	11.0	-3.30
				52	38	25/29.4 (MCS11)	7.97	11.0	-3.03
				52	40	25/29.4 (MCS11)	7.98	11.0	-3.02
	5320	64	ax (20MHz)	52	37	25/29.4 (MCS11)	8.17	11.0	-2.83
				52	38	25/29.4 (MCS11)	8.04	11.0	-2.96
				52	40	25/29.4 (MCS11)	7.92	11.0	-3.08
	5270	54	ax (40MHz)	52	37	25/29.4 (MCS11)	7.83	11.0	-3.17
				52	40	25/29.4 (MCS11)	8.56	11.0	-2.44
				52	44	25/29.4 (MCS11)	7.86	11.0	-3.15
	5310	62	ax (40MHz)	52	37	25/29.4 (MCS11)	7.92	11.0	-3.08
				52	40	25/29.4 (MCS11)	7.95	11.0	-3.05
				52	44	25/29.4 (MCS11)	7.56	11.0	-3.44
	5290	58	ax (80MHz)	52	37	25/29.4 (MCS11)	7.53	11.0	-3.47
				52	44	25/29.4 (MCS11)	7.95	11.0	-3.06
				52	52	25/29.4 (MCS11)	7.81	11.0	-3.19
Band 2C	5500	100	ax (20MHz)	52	37	25/29.4 (MCS11)	8.05	11.0	-2.95
				52	38	25/29.4 (MCS11)	7.70	11.0	-3.30
				52	40	25/29.4 (MCS11)	8.15	11.0	-2.85
	5580	116	ax (20MHz)	52	37	25/29.4 (MCS11)	8.05	11.0	-2.95
				52	38	25/29.4 (MCS11)	8.20	11.0	-2.80
				52	40	25/29.4 (MCS11)	8.05	11.0	-2.95
	5720	144	ax (20MHz)	52	37	25/29.4 (MCS11)	7.83	11.0	-3.17
				52	38	25/29.4 (MCS11)	7.92	11.0	-3.08
				52	40	25/29.4 (MCS11)	8.16	11.0	-2.84
	5510	102	ax (40MHz)	52	37	25/29.4 (MCS11)	7.30	11.0	-3.70
				52	40	25/29.4 (MCS11)	6.77	11.0	-4.23
				52	44	25/29.4 (MCS11)	7.10	11.0	-3.90
	5550	110	ax (40MHz)	52	37	25/29.4 (MCS11)	7.66	11.0	-3.34
				52	40	25/29.4 (MCS11)	7.95	11.0	-3.05
				52	44	25/29.4 (MCS11)	7.53	11.0	-3.47
	*5590	118	ax (40MHz)	52	37	25/29.4 (MCS11)	7.97	11.0	-3.03
				52	40	25/29.4 (MCS11)	7.74	11.0	-3.26
				52	44	25/29.4 (MCS11)	8.06	11.0	-2.94
	5670	134	ax (40MHz)	52	37	25/29.4 (MCS11)	7.71	11.0	-3.29
				52	40	25/29.4 (MCS11)	8.09	11.0	-2.91
				52	44	25/29.4 (MCS11)	7.87	11.0	-3.13
	5710	142	ax (40MHz)	52	37	25/29.4 (MCS11)	7.08	11.0	-3.92
				52	40	25/29.4 (MCS11)	7.85	11.0	-3.15
				52	44	25/29.4 (MCS11)	7.52	11.0	-3.48
	5530	106	ax (80MHz)	52	37	25/29.4 (MCS11)	6.70	11.0	-4.30
				52	44	25/29.4 (MCS11)	6.65	11.0	-4.35
				52	52	25/29.4 (MCS11)	7.14	11.0	-3.86
*5610	122	ax (80MHz)	52	37	25/29.4 (MCS11)	8.66	11.0	-2.35	
			52	44	25/29.4 (MCS11)	7.92	11.0	-3.08	
			52	52	25/29.4 (MCS11)	7.78	11.0	-3.22	
5690	138	ax (80MHz)	52	37	25/29.4 (MCS11)	7.32	11.0	-3.68	
			52	44	25/29.4 (MCS11)	7.91	11.0	-3.09	
			52	52	25/29.4 (MCS11)	8.01	11.0	-2.99	
*5570	114 (L)	ax (160MHz)	52	37	25/29.4 (MCS11)	4.41	11.0	-6.59	
	114 (U)		52	52	25/29.4 (MCS11)	4.68	11.0	-6.32	
				52	52	25/29.4 (MCS11)	4.84	11.0	-6.17

Table 7-168. Bands 1, 2A, 2C Power Spectral Density Measurements Antenna 5T (RU52)

*TDWR channel is not supported for ISED (denoted by a * next to the frequency)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 102 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	242	61	121.9/143.4 (MCS11)	4.75	11.0	-6.25
	5200	40	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.53	11.0	-2.48
	5240	48	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.05	11.0	-2.95
	5190	38	ax (40MHz)	484	65	243.8/286.8 (MCS11)	0.39	11.0	-10.61
	5230	46	ax (40MHz)	484	65	243.8/286.8 (MCS11)	5.65	11.0	-5.35
	5210	42	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-2.95	11.0	-13.95
Band 1/2A	5250	50	ax (160MHz)	996x2	68	1020.8/1201 (MCS11)	-6.68	11.0	-17.68
Band 2A	5260	52	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.17	11.0	-2.83
	5280	60	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.05	11.0	-2.95
	5320	64	ax (20MHz)	242	61	121.9/143.4 (MCS11)	4.52	11.0	-6.48
	5270	54	ax (40MHz)	484	65	243.8/286.8 (MCS11)	5.38	11.0	-5.62
	5310	62	ax (40MHz)	484	65	243.8/286.8 (MCS11)	-0.55	11.0	-11.55
	5290	58	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-3.09	11.0	-14.09
Band 2C	5500	100	ax (20MHz)	242	61	121.9/143.4 (MCS11)	3.12	11.0	-7.88
	5580	116	ax (20MHz)	242	61	121.9/143.4 (MCS11)	7.97	11.0	-3.03
	5720	144	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.51	11.0	-2.49
	5510	102	ax (40MHz)	484	65	243.8/286.8 (MCS11)	-1.85	11.0	-12.85
	5550	110	ax (40MHz)	484	65	243.8/286.8 (MCS11)	3.11	11.0	-7.89
	*5590	118	ax (40MHz)	484	65	243.8/286.8 (MCS11)	5.52	11.0	-5.48
	5710	142	ax (40MHz)	484	65	243.8/286.8 (MCS11)	5.27	11.0	-5.73
	5530	106	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-4.51	11.0	-15.51
	*5610	122	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-0.41	11.0	-11.41
	5690	138	ax (80MHz)	996	67	510.4/600.5 (MCS11)	2.20	11.0	-8.80
	*5570	114	ax (160MHz)	996x2	68	1020.8/1201 (MCS11)	-9.01	11.0	-20.01


Table 7-169. Bands 1, 2A, 2C Power Spectral Density Measurements Antenna 5T (Fully-loaded RU)

*TDWR channel is not supported for ISSED (denoted by a * next to the frequency)


FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 103 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

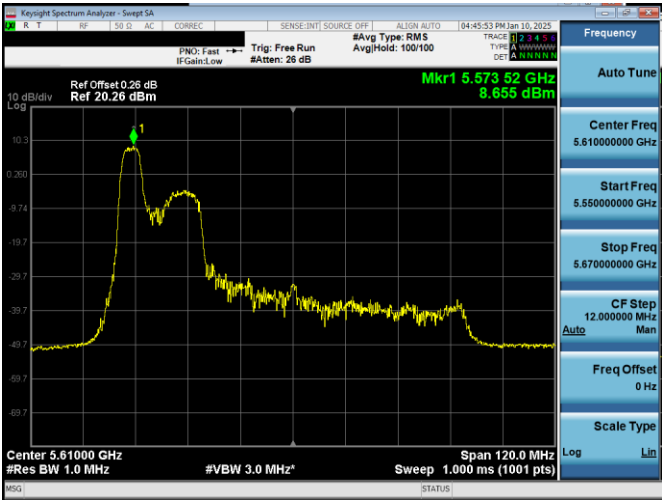

Plot 7-13. (FCC Only) PSD Antenna 5T (80MHz BW 11ax Index 37 – RU52 – Ch.122)

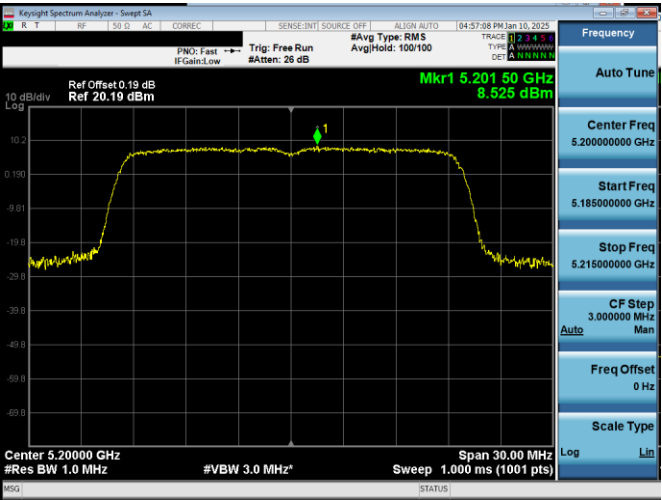

Plot 7-14. PSD Antenna 5T (20MHz BW 11ax– RU242 – Ch.40)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 104 of 297


	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	ax (20MHz)	26	0	12.5/14.7 (MCS11)	4.78	30.0	-25.22
				26	4	12.5/14.7 (MCS11)	4.94	30.0	-25.06
				26	8	12.5/14.7 (MCS11)	5.04	30.0	-24.96
	5785	157	ax (20MHz)	26	0	12.5/14.7 (MCS11)	4.38	30.0	-25.62
				26	4	12.5/14.7 (MCS11)	4.23	30.0	-25.77
				26	8	12.5/14.7 (MCS11)	4.81	30.0	-25.20
	5825	165	ax (20MHz)	26	0	12.5/14.7 (MCS11)	4.60	30.0	-25.40
				26	4	12.5/14.7 (MCS11)	4.86	30.0	-25.14
				26	8	12.5/14.7 (MCS11)	4.92	30.0	-25.08
	5755	151	ax (40MHz)	26	0	12.5/14.7 (MCS11)	4.56	30.0	-25.44
				26	8	12.5/14.7 (MCS11)	4.81	30.0	-25.19
				26	17	12.5/14.7 (MCS11)	4.68	30.0	-25.32
	5795	159	ax (40MHz)	26	0	12.5/14.7 (MCS11)	4.37	30.0	-25.63
				26	8	12.5/14.7 (MCS11)	4.49	30.0	-25.51
				26	17	12.5/14.7 (MCS11)	4.89	30.0	-25.11
	5775	155	ax (80MHz)	26	0	12.5/14.7 (MCS11)	5.28	30.0	-24.72
				26	18	12.5/14.7 (MCS11)	4.83	30.0	-25.17
				26	36	12.5/14.7 (MCS11)	5.06	30.0	-24.94

Table 7-170. Band 3 Power Spectral Density Measurements Antenna 5T (RU26)


	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	ax (20MHz)	242	61	121.9/143.4 (MCS11)	5.22	30.0	-24.78
	5785	157	ax (20MHz)	242	61	121.9/143.4 (MCS11)	5.03	30.0	-24.97
	5825	165	ax (20MHz)	242	61	121.9/143.4 (MCS11)	5.31	30.0	-24.70
	5755	151	ax (40MHz)	484	65	243.8/286.8 (MCS11)	2.25	30.0	-27.75
	5795	159	ax (40MHz)	484	65	243.8/286.8 (MCS11)	2.42	30.0	-27.58
	5775	155	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-3.35	30.0	-33.35

Table 7-171. Band 3 Power Spectral Density Measurements Antenna 5T (Fully-loaded RU)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 105 of 297

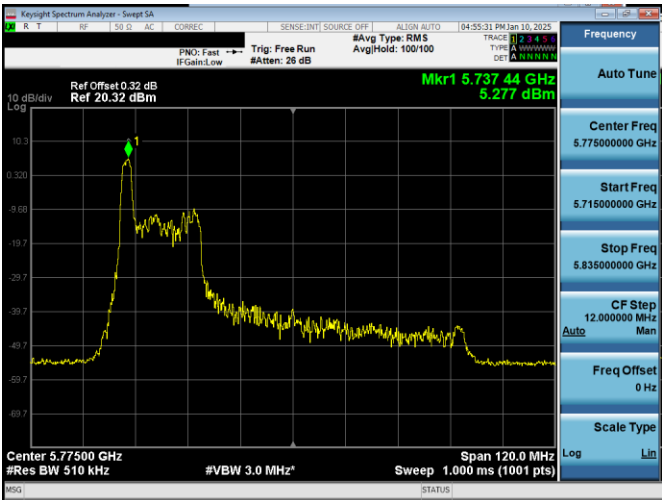

Plot 7-15. PSD Antenna 5T (80MHz BW 11ax Index 0 - RU26 - Ch.155)

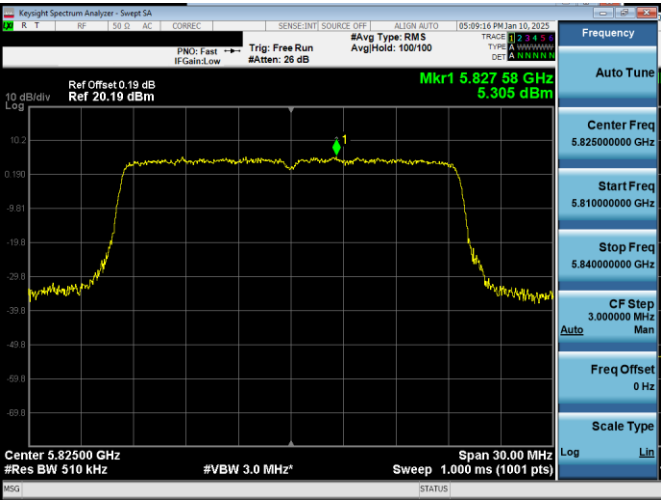

Plot 7-16. PSD Antenna 5T (20MHz BW 11ax- RU242 - Ch.165)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 106 of 297

	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26	0	12.5/14.7 (MCS11)	7.39	-2.30	5.09	10.0	-4.91
				26	4	12.5/14.7 (MCS11)	7.04	-2.30	4.74	10.0	-5.26
				26	8	12.5/14.7 (MCS11)	8.26	-2.30	5.96	10.0	-4.04
	5200	40	ax (20MHz)	26	0	12.5/14.7 (MCS11)	7.61	-2.30	5.31	10.0	-4.69
				26	4	12.5/14.7 (MCS11)	7.12	-2.30	4.82	10.0	-5.18
				26	8	12.5/14.7 (MCS11)	8.01	-2.30	5.71	10.0	-4.29
	5240	48	ax (20MHz)	26	0	12.5/14.7 (MCS11)	8.23	-2.30	5.93	10.0	-4.07
				26	4	12.5/14.7 (MCS11)	6.66	-2.30	4.36	10.0	-5.64
				26	8	12.5/14.7 (MCS11)	8.57	-2.30	6.27	10.0	-3.74
	5190	38	ax (40MHz)	26	0	12.5/14.7 (MCS11)	8.02	-2.30	5.72	10.0	-4.28
				26	8	12.5/14.7 (MCS11)	8.30	-2.30	6.00	10.0	-4.00
				26	17	12.5/14.7 (MCS11)	7.59	-2.30	5.29	10.0	-4.71
	5230	46	ax (40MHz)	26	0	12.5/14.7 (MCS11)	7.77	-2.30	5.47	10.0	-4.53
				26	8	12.5/14.7 (MCS11)	8.07	-2.30	5.77	10.0	-4.23
				26	17	12.5/14.7 (MCS11)	7.81	-2.30	5.51	10.0	-4.49
	5210	42	ax (80MHz)	26	0	12.5/14.7 (MCS11)	7.02	-2.30	4.72	10.0	-5.29
				26	18	12.5/14.7 (MCS11)	6.78	-2.30	4.48	10.0	-5.52
				26	36	12.5/14.7 (MCS11)	8.05	-2.30	5.75	10.0	-4.25
	5250	50 (L)	ax (160MHz)	52	37	25/29.4 (MCS11)	7.63	-2.30	5.33	10.0	-4.68
				52	52	25/29.4 (MCS11)	7.07	-2.30	4.77	10.0	-5.23


Table 7-172. ISED Band 1 e.i.r.p. Power Spectral Density Measurements Antenna 5T (RU26)

	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	242	61	121.9/143.4 (MCS11)	5.02	-2.30	2.72	10.0	-7.29
	5200	40	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.63	-2.30	6.33	10.0	-3.67
	5240	48	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.05	-2.30	5.75	10.0	-4.25
	5190	38	ax (40MHz)	484	65	243.8/286.8 (MCS11)	0.49	-2.30	-1.82	10.0	-11.82
	5230	46	ax (40MHz)	484	65	243.8/286.8 (MCS11)	5.59	-2.30	3.29	10.0	-6.71
	5210	42	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-2.71	-2.30	-5.01	10.0	-15.01
	5250	50	ax (160MHz)	996x2	68	1020.8/1201 (MCS11)	-6.36	-2.30	-8.66	10.0	-18.66


Table 7-173. ISED Band 1 e.i.r.p. Power Spectral Density Measurements Antenna 5T (Fully-loaded RU)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 107 of 297

V 10.6 10/27/2023

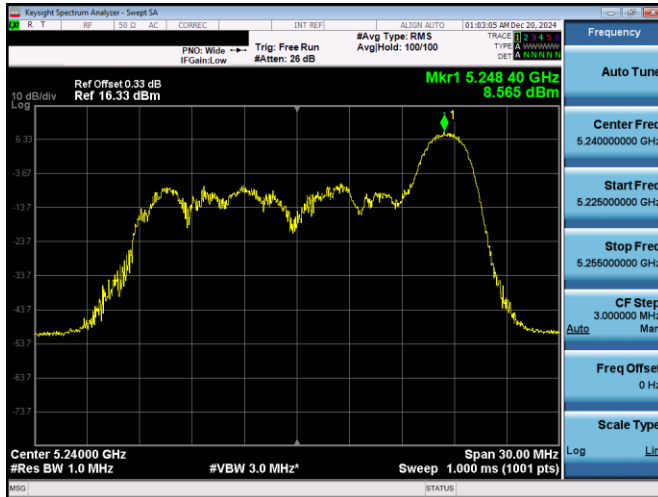

Plot 7-17. PSD Antenna 5T (20MHz BW 11ax Index 8 – RU26 – Ch.48)

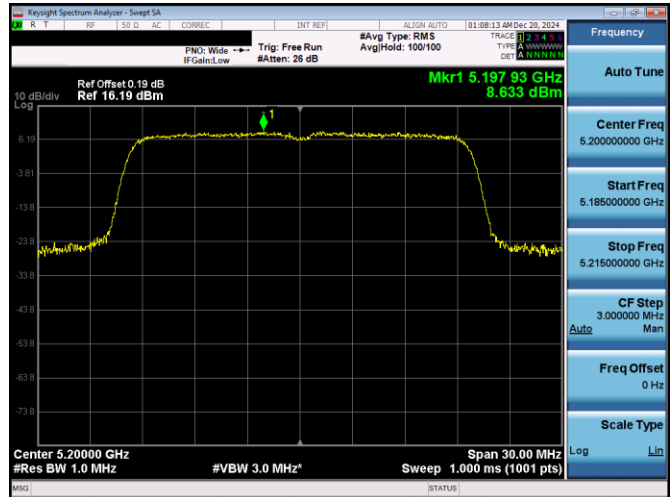

Plot 7-18. PSD Antenna 5T (20MHz BW 11ax– RU242 – Ch.40)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 108 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5.2 Antenna 3b Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26	0	12.5/14.7 (MCS11)	7.79	11.0	-3.21
				26	4	12.5/14.7 (MCS11)	6.88	11.0	-4.13
				26	8	12.5/14.7 (MCS11)	6.99	11.0	-4.01
	5200	40	ax (20MHz)	26	0	12.5/14.7 (MCS11)	7.32	11.0	-3.68
				26	4	12.5/14.7 (MCS11)	6.32	11.0	-4.68
				26	8	12.5/14.7 (MCS11)	7.71	11.0	-3.30
	5240	48	ax (20MHz)	26	0	12.5/14.7 (MCS11)	7.68	11.0	-3.32
				26	4	12.5/14.7 (MCS11)	7.28	11.0	-3.72
				26	8	12.5/14.7 (MCS11)	7.72	11.0	-3.29
	5190	38	ax (40MHz)	26	0	12.5/14.7 (MCS11)	7.58	11.0	-3.42
				26	8	12.5/14.7 (MCS11)	7.30	11.0	-3.71
				26	17	12.5/14.7 (MCS11)	7.67	11.0	-3.33
	5230	46	ax (40MHz)	26	0	12.5/14.7 (MCS11)	7.71	11.0	-3.29
				26	8	12.5/14.7 (MCS11)	7.66	11.0	-3.34
				26	17	12.5/14.7 (MCS11)	7.89	11.0	-3.11
	5210	42	ax (80MHz)	26	0	12.5/14.7 (MCS11)	7.68	11.0	-3.32
				26	18	12.5/14.7 (MCS11)	6.20	11.0	-4.80
				26	36	12.5/14.7 (MCS11)	7.62	11.0	-3.38

Table 7-174. Bands 1 Power Spectral Density Measurements Antenna 3b (RU26)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 109 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1/2A	5250	50 (L)	ax (160MHz)	52	37	25/29.4 (MCS11)	7.07	11.0	-3.93
		52		52	25/29.4 (MCS11)	6.22	11.0	-4.78	
		50 (U)		52	52	25/29.4 (MCS11)	6.80	11.0	-4.20
Band 2A	5260	52	ax (20MHz)	52	37	25/29.4 (MCS11)	8.06	11.0	-2.94
				52	38	25/29.4 (MCS11)	8.30	11.0	-2.71
				52	40	25/29.4 (MCS11)	7.88	11.0	-3.12
	5280	60	ax (20MHz)	52	37	25/29.4 (MCS11)	7.74	11.0	-3.26
				52	38	25/29.4 (MCS11)	7.95	11.0	-3.05
				52	40	25/29.4 (MCS11)	7.81	11.0	-3.19
	5320	64	ax (20MHz)	52	37	25/29.4 (MCS11)	7.53	11.0	-3.48
				52	38	25/29.4 (MCS11)	7.60	11.0	-3.40
				52	40	25/29.4 (MCS11)	7.92	11.0	-3.09
	5270	54	ax (40MHz)	52	37	25/29.4 (MCS11)	7.80	11.0	-3.21
				52	40	25/29.4 (MCS11)	7.90	11.0	-3.10
				52	44	25/29.4 (MCS11)	7.53	11.0	-3.47
	5310	62	ax (40MHz)	52	37	25/29.4 (MCS11)	8.06	11.0	-2.94
				52	40	25/29.4 (MCS11)	8.07	11.0	-2.94
				52	44	25/29.4 (MCS11)	7.79	11.0	-3.21
	5290	58	ax (80MHz)	52	37	25/29.4 (MCS11)	7.52	11.0	-3.48
				52	44	25/29.4 (MCS11)	7.14	11.0	-3.86
				52	52	25/29.4 (MCS11)	8.10	11.0	-2.90
Band 2C	5500	100	ax (20MHz)	52	37	25/29.4 (MCS11)	7.88	11.0	-3.12
				52	38	25/29.4 (MCS11)	7.95	11.0	-3.05
				52	40	25/29.4 (MCS11)	8.22	11.0	-2.78
	5580	116	ax (20MHz)	52	37	25/29.4 (MCS11)	7.71	11.0	-3.29
				52	38	25/29.4 (MCS11)	7.97	11.0	-3.03
				52	40	25/29.4 (MCS11)	8.46	11.0	-2.55
	5720	144	ax (20MHz)	52	37	25/29.4 (MCS11)	7.82	11.0	-3.18
				52	38	25/29.4 (MCS11)	7.59	11.0	-3.41
				52	40	25/29.4 (MCS11)	8.35	11.0	-2.65
	5510	102	ax (40MHz)	52	37	25/29.4 (MCS11)	6.98	11.0	-4.02
				52	40	25/29.4 (MCS11)	7.04	11.0	-3.96
				52	44	25/29.4 (MCS11)	6.95	11.0	-4.05
	5550	110	ax (40MHz)	52	37	25/29.4 (MCS11)	7.63	11.0	-3.37
				52	40	25/29.4 (MCS11)	8.24	11.0	-2.76
				52	44	25/29.4 (MCS11)	7.84	11.0	-3.16
	*5590	118	ax (40MHz)	52	37	25/29.4 (MCS11)	8.15	11.0	-2.85
				52	40	25/29.4 (MCS11)	8.11	11.0	-2.89
				52	44	25/29.4 (MCS11)	7.73	11.0	-3.27
	5670	134	ax (40MHz)	52	37	25/29.4 (MCS11)	8.04	11.0	-2.96
				52	40	25/29.4 (MCS11)	7.64	11.0	-3.36
				52	44	25/29.4 (MCS11)	7.79	11.0	-3.21
	5710	142	ax (40MHz)	52	37	25/29.4 (MCS11)	7.93	11.0	-3.07
				52	40	25/29.4 (MCS11)	8.15	11.0	-2.85
				52	44	25/29.4 (MCS11)	7.86	11.0	-3.15
	5530	106	ax (80MHz)	52	37	25/29.4 (MCS11)	6.94	11.0	-4.06
				52	44	25/29.4 (MCS11)	6.41	11.0	-4.59
				52	52	25/29.4 (MCS11)	7.17	11.0	-3.83
*5610	122	ax (80MHz)	52	37	25/29.4 (MCS11)	7.56	11.0	-3.44	
			52	44	25/29.4 (MCS11)	8.29	11.0	-2.71	
			52	52	25/29.4 (MCS11)	7.52	11.0	-3.49	
5690	138	ax (80MHz)	52	37	25/29.4 (MCS11)	7.60	11.0	-3.40	
			52	44	25/29.4 (MCS11)	7.63	11.0	-3.37	
			52	52	25/29.4 (MCS11)	7.34	11.0	-3.66	
*5570	114 (L)	ax (160MHz)	52	37	25/29.4 (MCS11)	4.39	11.0	-6.61	
	114 (U)		52	52	25/29.4 (MCS11)	4.55	11.0	-6.45	
				52	52	25/29.4 (MCS11)	4.37	11.0	-6.63

Table 7-175. Bands 1, 2A, 2C Power Spectral Density Measurements Antenna 3b (RU52)

*TDWR channel is not supported for ISED (denoted by a * next to the frequency)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 110 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	242	61	121.9/143.4 (MCS11)	4.39	11.0	-6.61
	5200	40	ax (20MHz)	242	61	121.9/143.4 (MCS11)	7.67	11.0	-3.33
	5240	48	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.23	11.0	-2.77
	5190	38	ax (40MHz)	484	65	243.8/286.8 (MCS11)	0.20	11.0	-10.80
	5230	46	ax (40MHz)	484	65	243.8/286.8 (MCS11)	5.19	11.0	-5.81
	5210	42	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-3.16	11.0	-14.16
Band 1/2A	5250	50	ax (160MHz)	996x2	68	1020.8/1201 (MCS11)	-7.24	11.0	-18.24
Band 2A	5260	52	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.08	11.0	-2.92
	5280	60	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.20	11.0	-2.80
	5320	64	ax (20MHz)	242	61	121.9/143.4 (MCS11)	4.48	11.0	-6.52
	5270	54	ax (40MHz)	484	65	243.8/286.8 (MCS11)	5.40	11.0	-5.60
	5310	62	ax (40MHz)	484	65	243.8/286.8 (MCS11)	-0.03	11.0	-11.03
	5290	58	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-2.92	11.0	-13.92
Band 2C	5500	100	ax (20MHz)	242	61	121.9/143.4 (MCS11)	3.53	11.0	-7.47
	5580	116	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.24	11.0	-2.76
	5720	144	ax (20MHz)	242	61	121.9/143.4 (MCS11)	7.91	11.0	-3.09
	5510	102	ax (40MHz)	484	65	243.8/286.8 (MCS11)	-1.66	11.0	-12.66
	5550	110	ax (40MHz)	484	65	243.8/286.8 (MCS11)	3.22	11.0	-7.78
	*5590	118	ax (40MHz)	484	65	243.8/286.8 (MCS11)	5.33	11.0	-5.67
	5710	142	ax (40MHz)	484	65	243.8/286.8 (MCS11)	5.42	11.0	-5.58
	5530	106	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-4.81	11.0	-15.81
	*5610	122	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-0.01	11.0	-11.01
	5690	138	ax (80MHz)	996	67	510.4/600.5 (MCS11)	2.50	11.0	-8.50
	*5570	114	ax (160MHz)	996x2	68	1020.8/1201 (MCS11)	-9.17	11.0	-20.17


Table 7-176. Bands 1, 2A, 2C Power Spectral Density Measurements Antenna 3b (Fully-loaded RU)

*TDWR channel is not supported for ISSED (denoted by a * next to the frequency)


FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 111 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

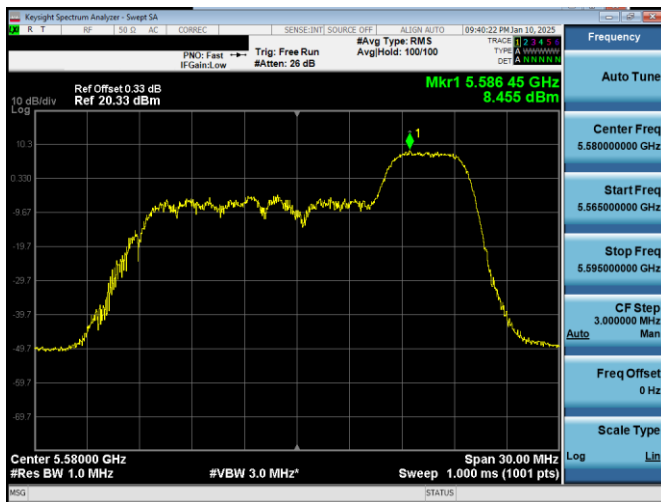

Plot 7-19. PSD Antenna 3b (20MHz BW 11ax Index40 - RU52 - Ch.116)

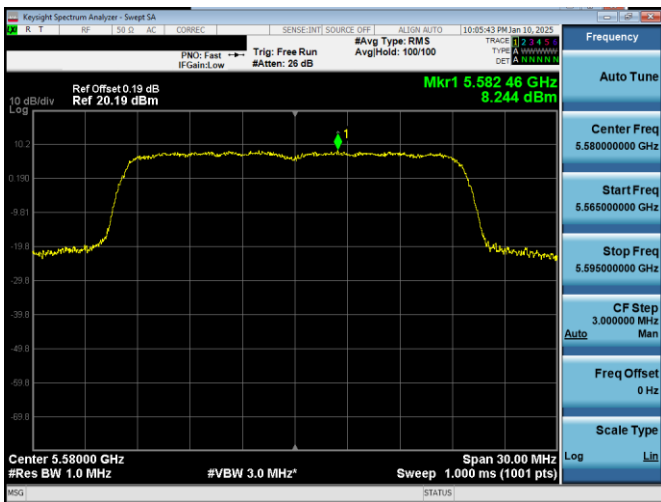

Plot 7-20. PSD Antenna 3b (20MHz BW 11ax- RU242 - Ch.116)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 112 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	ax (20MHz)	26	0	12.5/14.7 (MCS11)	4.45	30.0	-25.55
				26	4	12.5/14.7 (MCS11)	4.93	30.0	-25.07
				26	8	12.5/14.7 (MCS11)	4.28	30.0	-25.72
	5785	157	ax (20MHz)	26	0	12.5/14.7 (MCS11)	5.40	30.0	-24.60
				26	4	12.5/14.7 (MCS11)	4.49	30.0	-25.51
				26	8	12.5/14.7 (MCS11)	4.90	30.0	-25.10
	5825	165	ax (20MHz)	26	0	12.5/14.7 (MCS11)	4.59	30.0	-25.42
				26	4	12.5/14.7 (MCS11)	4.75	30.0	-25.25
				26	8	12.5/14.7 (MCS11)	5.59	30.0	-24.41
	5755	151	ax (40MHz)	26	0	12.5/14.7 (MCS11)	4.82	30.0	-25.18
				26	8	12.5/14.7 (MCS11)	4.32	30.0	-25.68
				26	17	12.5/14.7 (MCS11)	4.31	30.0	-25.69
	5795	159	ax (40MHz)	26	0	12.5/14.7 (MCS11)	4.56	30.0	-25.45
				26	8	12.5/14.7 (MCS11)	4.59	30.0	-25.41
				26	17	12.5/14.7 (MCS11)	4.60	30.0	-25.40
	5775	155	ax (80MHz)	26	0	12.5/14.7 (MCS11)	5.10	30.0	-24.90
				26	18	12.5/14.7 (MCS11)	3.58	30.0	-26.43
				26	36	12.5/14.7 (MCS11)	5.34	30.0	-24.66

Table 7-177. Band 3 Power Spectral Density Measurements Antenna 3b (RU26)


	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	ax (20MHz)	242	61	121.9/143.4 (MCS11)	5.27	30.0	-24.73
	5785	157	ax (20MHz)	242	61	121.9/143.4 (MCS11)	5.58	30.0	-24.42
	5825	165	ax (20MHz)	242	61	121.9/143.4 (MCS11)	5.47	30.0	-24.53
	5755	151	ax (40MHz)	484	65	243.8/286.8 (MCS11)	2.61	30.0	-27.39
	5795	159	ax (40MHz)	484	65	243.8/286.8 (MCS11)	2.03	30.0	-27.97
	5775	155	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-3.31	30.0	-33.31

Table 7-178. Band 3 Power Spectral Density Measurements Antenna 3b (Fully-loaded RU)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 113 of 297

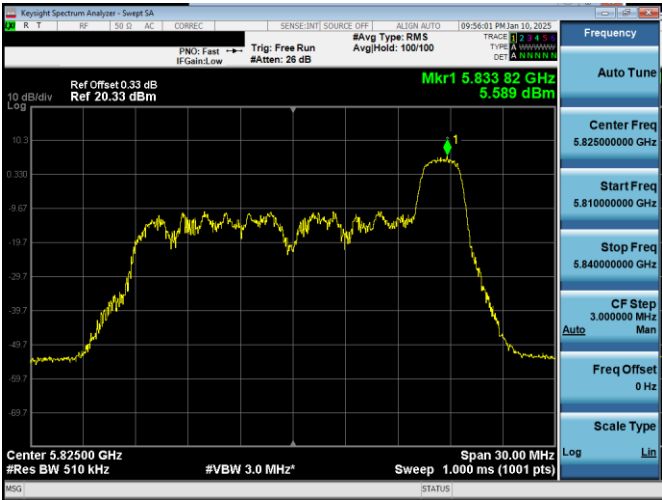

Plot 7-21. PSD Antenna 3b (20MHz BW 11ax Index 8 – RU26 – Ch.165)

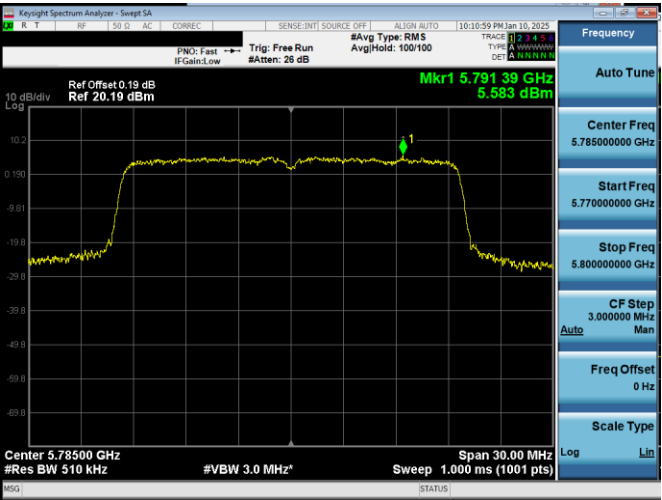

Plot 7-22. PSD Antenna 3b (20MHz BW 11ax– RU242 – Ch.157)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 114 of 297


	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26	0	12.5/14.7 (MCS11)	7.62	-1.40	6.22	10.0	-3.79
				26	4	12.5/14.7 (MCS11)	6.91	-1.40	5.51	10.0	-4.49
				26	8	12.5/14.7 (MCS11)	8.61	-1.40	7.21	10.0	-2.79
	5200	40	ax (20MHz)	26	0	12.5/14.7 (MCS11)	7.54	-1.40	6.14	10.0	-3.86
				26	4	12.5/14.7 (MCS11)	6.44	-1.40	5.04	10.0	-4.96
				26	8	12.5/14.7 (MCS11)	7.58	-1.40	6.18	10.0	-3.82
	5240	48	ax (20MHz)	26	0	12.5/14.7 (MCS11)	7.69	-1.40	6.29	10.0	-3.71
				26	4	12.5/14.7 (MCS11)	6.84	-1.40	5.44	10.0	-4.56
				26	8	12.5/14.7 (MCS11)	6.82	-1.40	5.42	10.0	-4.58
	5190	38	ax (40MHz)	26	0	12.5/14.7 (MCS11)	7.67	-1.40	6.27	10.0	-3.73
				26	8	12.5/14.7 (MCS11)	7.39	-1.40	5.99	10.0	-4.01
				26	17	12.5/14.7 (MCS11)	7.53	-1.40	6.13	10.0	-3.87
	5230	46	ax (40MHz)	26	0	12.5/14.7 (MCS11)	7.60	-1.40	6.20	10.0	-3.80
				26	8	12.5/14.7 (MCS11)	7.54	-1.40	6.14	10.0	-3.87
				26	17	12.5/14.7 (MCS11)	7.28	-1.40	5.88	10.0	-4.12
	5210	42	ax (80MHz)	26	0	12.5/14.7 (MCS11)	7.80	-1.40	6.40	10.0	-3.61
				26	18	12.5/14.7 (MCS11)	6.20	-1.40	4.80	10.0	-5.20
				26	36	12.5/14.7 (MCS11)	7.54	-1.40	6.14	10.0	-3.86
	5250	50 (L)	ax (160MHz)	52	37	25/29.4 (MCS11)	7.76	-1.40	6.36	10.0	-3.65
				52	52	25/29.4 (MCS11)	6.92	-1.40	5.52	10.0	-4.48

Table 7-179. ISED Band 1 e.i.r.p. Power Spectral Density Measurements Antenna 3b (RU26)


	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	242	61	121.9/143.4 (MCS11)	5.37	-1.40	3.97	10.0	-6.03
	5200	40	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.52	-1.40	7.12	10.0	-2.88
	5240	48	ax (20MHz)	242	61	121.9/143.4 (MCS11)	8.28	-1.40	6.88	10.0	-3.12
	5190	38	ax (40MHz)	484	65	243.8/286.8 (MCS11)	0.94	-1.40	-0.46	10.0	-10.46
	5230	46	ax (40MHz)	484	65	243.8/286.8 (MCS11)	5.24	-1.40	3.84	10.0	-6.16
	5210	42	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-2.68	-1.40	-4.08	10.0	-14.08
	5250	50	ax (160MHz)	996x2	68	1020.8/1201 (MCS11)	-6.70	-1.40	-8.10	10.0	-18.10

Table 7-180. ISED Band 1 e.i.r.p. Power Spectral Density Measurements Antenna 3b (Fully-loaded RU)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 115 of 297

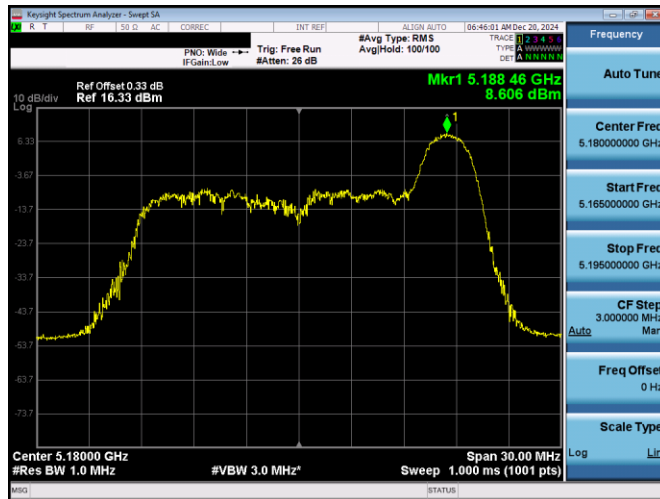

Plot 7-23. PSD Antenna 3b (20MHz BW 11ax Index 8 – RU26 – Ch.36)

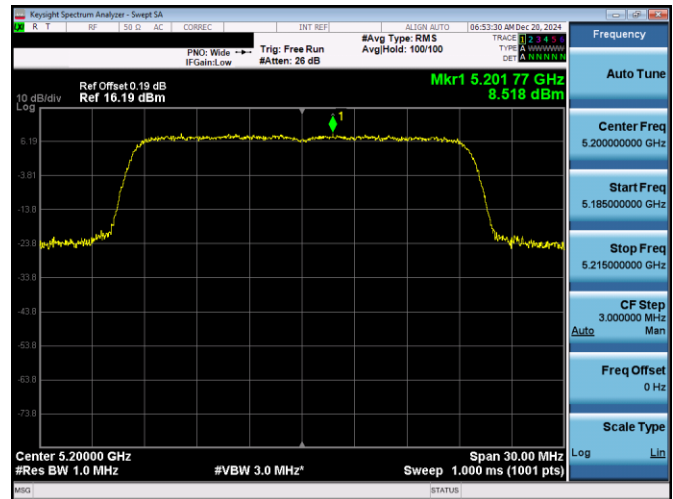

Plot 7-24. PSD Antenna 3b (20MHz BW 11ax– RU242 – Ch.40)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 116 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5.3 Antenna 1b Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26	0	12.5/14.7 (MCS11)	5.70	11.0	-5.30
				26	4	12.5/14.7 (MCS11)	5.04	11.0	-5.96
				26	8	12.5/14.7 (MCS11)	6.02	11.0	-4.98
	5200	40	ax (20MHz)	26	0	12.5/14.7 (MCS11)	6.02	11.0	-4.98
				26	4	12.5/14.7 (MCS11)	5.30	11.0	-5.70
				26	8	12.5/14.7 (MCS11)	5.82	11.0	-5.18
	5240	48	ax (20MHz)	26	0	12.5/14.7 (MCS11)	5.43	11.0	-5.57
				26	4	12.5/14.7 (MCS11)	5.42	11.0	-5.58
				26	8	12.5/14.7 (MCS11)	5.77	11.0	-5.23
	5190	38	ax (40MHz)	26	0	12.5/14.7 (MCS11)	5.41	11.0	-5.59
				26	8	12.5/14.7 (MCS11)	5.44	11.0	-5.56
				26	17	12.5/14.7 (MCS11)	5.66	11.0	-5.34
	5230	46	ax (40MHz)	26	0	12.5/14.7 (MCS11)	5.56	11.0	-5.44
				26	8	12.5/14.7 (MCS11)	5.72	11.0	-5.29
				26	17	12.5/14.7 (MCS11)	5.90	11.0	-5.10
	5210	42	ax (80MHz)	26	0	12.5/14.7 (MCS11)	6.23	11.0	-4.78
				26	18	12.5/14.7 (MCS11)	4.62	11.0	-6.39
				26	36	12.5/14.7 (MCS11)	6.18	11.0	-4.83

Table 7-181. Bands 1 Power Spectral Density Measurements Antenna 1b (RU26)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 117 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1/2A	5250	50 (L)	ax (160MHz)	52	37	25/29.4 (MCS11)	4.83	11.0	-6.18
		52		52	25/29.4 (MCS11)	4.78	11.0	-6.22	
		50 (U)		52	52	25/29.4 (MCS11)	4.86	11.0	-6.14
Band 2A	5260	52	ax (20MHz)	52	37	25/29.4 (MCS11)	6.41	11.0	-4.59
				52	38	25/29.4 (MCS11)	6.04	11.0	-4.96
				52	40	25/29.4 (MCS11)	5.93	11.0	-5.07
	5280	60	ax (20MHz)	52	37	25/29.4 (MCS11)	5.97	11.0	-5.03
				52	38	25/29.4 (MCS11)	6.09	11.0	-4.91
				52	40	25/29.4 (MCS11)	6.03	11.0	-4.97
	5320	64	ax (20MHz)	52	37	25/29.4 (MCS11)	5.64	11.0	-5.36
				52	38	25/29.4 (MCS11)	5.97	11.0	-5.03
				52	40	25/29.4 (MCS11)	5.85	11.0	-5.15
	5270	54	ax (40MHz)	52	37	25/29.4 (MCS11)	5.82	11.0	-5.18
				52	40	25/29.4 (MCS11)	6.17	11.0	-4.83
				52	44	25/29.4 (MCS11)	6.06	11.0	-4.94
	5310	62	ax (40MHz)	52	37	25/29.4 (MCS11)	6.23	11.0	-4.77
				52	40	25/29.4 (MCS11)	5.56	11.0	-5.44
				52	44	25/29.4 (MCS11)	5.63	11.0	-5.37
	5290	58	ax (80MHz)	52	37	25/29.4 (MCS11)	6.05	11.0	-4.95
				52	44	25/29.4 (MCS11)	5.68	11.0	-5.32
				52	52	25/29.4 (MCS11)	5.73	11.0	-5.27
Band 2C	5500	100	ax (20MHz)	52	37	25/29.4 (MCS11)	6.19	11.0	-4.81
				52	38	25/29.4 (MCS11)	6.02	11.0	-4.98
				52	40	25/29.4 (MCS11)	6.32	11.0	-4.69
	5580	116	ax (20MHz)	52	37	25/29.4 (MCS11)	6.25	11.0	-4.75
				52	38	25/29.4 (MCS11)	6.39	11.0	-4.62
				52	40	25/29.4 (MCS11)	6.36	11.0	-4.65
	5720	144	ax (20MHz)	52	37	25/29.4 (MCS11)	6.20	11.0	-4.80
				52	38	25/29.4 (MCS11)	6.19	11.0	-4.81
				52	40	25/29.4 (MCS11)	6.20	11.0	-4.80
	5510	102	ax (40MHz)	52	37	25/29.4 (MCS11)	4.79	11.0	-6.21
				52	40	25/29.4 (MCS11)	4.76	11.0	-6.24
				52	44	25/29.4 (MCS11)	4.76	11.0	-6.24
	5550	110	ax (40MHz)	52	37	25/29.4 (MCS11)	6.03	11.0	-4.98
				52	40	25/29.4 (MCS11)	5.96	11.0	-5.04
				52	44	25/29.4 (MCS11)	6.82	11.0	-4.18
	*5590	118	ax (40MHz)	52	37	25/29.4 (MCS11)	6.23	11.0	-4.77
				52	40	25/29.4 (MCS11)	6.04	11.0	-4.96
				52	44	25/29.4 (MCS11)	6.30	11.0	-4.70
	5670	134	ax (40MHz)	52	37	25/29.4 (MCS11)	6.07	11.0	-4.93
				52	40	25/29.4 (MCS11)	6.15	11.0	-4.85
				52	44	25/29.4 (MCS11)	5.62	11.0	-5.38
	5710	142	ax (40MHz)	52	37	25/29.4 (MCS11)	5.90	11.0	-5.11
				52	40	25/29.4 (MCS11)	6.00	11.0	-5.00
				52	44	25/29.4 (MCS11)	5.87	11.0	-5.13
	5530	106	ax (80MHz)	52	37	25/29.4 (MCS11)	5.36	11.0	-5.64
				52	44	25/29.4 (MCS11)	5.15	11.0	-5.85
				52	52	25/29.4 (MCS11)	5.30	11.0	-5.70
*5610	122	ax (80MHz)	52	37	25/29.4 (MCS11)	6.10	11.0	-4.90	
			52	44	25/29.4 (MCS11)	6.12	11.0	-4.88	
			52	52	25/29.4 (MCS11)	6.40	11.0	-4.60	
5690	138	ax (80MHz)	52	37	25/29.4 (MCS11)	5.82	11.0	-5.18	
			52	44	25/29.4 (MCS11)	5.92	11.0	-5.08	
			52	52	25/29.4 (MCS11)	5.80	11.0	-5.20	
*5570	114 (L)	ax (160MHz)	52	37	25/29.4 (MCS11)	2.87	11.0	-8.13	
	114 (U)		52	52	25/29.4 (MCS11)	3.27	11.0	-7.73	
			52	52	25/29.4 (MCS11)	3.03	11.0	-7.97	

Table 7-182. Bands 1, 2A, 2C Power Spectral Density Measurements Antenna 1b (RU52)

*TDWR channel is not supported for ISED (denoted by a * next to the frequency)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 118 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	242	61	121.9/143.4 (MCS11)	2.59	11.0	-8.41
	5200	40	ax (20MHz)	242	61	121.9/143.4 (MCS11)	6.11	11.0	-4.89
	5240	48	ax (20MHz)	242	61	121.9/143.4 (MCS11)	6.19	11.0	-4.81
	5190	38	ax (40MHz)	484	65	243.8/286.8 (MCS11)	-1.70	11.0	-12.70
	5230	46	ax (40MHz)	484	65	243.8/286.8 (MCS11)	3.56	11.0	-7.44
	5210	42	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-5.11	11.0	-16.11
Band 1/2A	5250	50	ax (160MHz)	996x2	68	1020.8/1201 (MCS11)	-9.14	11.0	-20.14
Band 2A	5260	52	ax (20MHz)	242	61	121.9/143.4 (MCS11)	6.07	11.0	-4.93
	5280	60	ax (20MHz)	242	61	121.9/143.4 (MCS11)	6.28	11.0	-4.72
	5320	64	ax (20MHz)	242	61	121.9/143.4 (MCS11)	2.60	11.0	-8.40
	5270	54	ax (40MHz)	484	65	243.8/286.8 (MCS11)	3.47	11.0	-7.54
	5310	62	ax (40MHz)	484	65	243.8/286.8 (MCS11)	-2.41	11.0	-13.41
	5290	58	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-4.53	11.0	-15.53
Band 2C	5500	100	ax (20MHz)	242	61	121.9/143.4 (MCS11)	1.49	11.0	-9.51
	5580	116	ax (20MHz)	242	61	121.9/143.4 (MCS11)	6.68	11.0	-4.32
	5720	144	ax (20MHz)	242	61	121.9/143.4 (MCS11)	6.60	11.0	-4.40
	5510	102	ax (40MHz)	484	65	243.8/286.8 (MCS11)	-3.71	11.0	-14.71
	5550	110	ax (40MHz)	484	65	243.8/286.8 (MCS11)	1.50	11.0	-9.50
	*5590	118	ax (40MHz)	484	65	243.8/286.8 (MCS11)	3.85	11.0	-7.15
	5710	142	ax (40MHz)	484	65	243.8/286.8 (MCS11)	3.60	11.0	-7.40
	5530	106	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-6.70	11.0	-17.70
	*5610	122	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-2.01	11.0	-13.01
	5690	138	ax (80MHz)	996	67	510.4/600.5 (MCS11)	0.47	11.0	-10.53
	*5570	114	ax (160MHz)	996x2	68	1020.8/1201 (MCS11)	-10.81	11.0	-21.81


Table 7-183. Bands 1, 2A, 2C Power Spectral Density Measurements Antenna 1b (Fully-loaded RU)

*TDWR channel is not supported for ISSED (denoted by a * next to the frequency)


FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 119 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

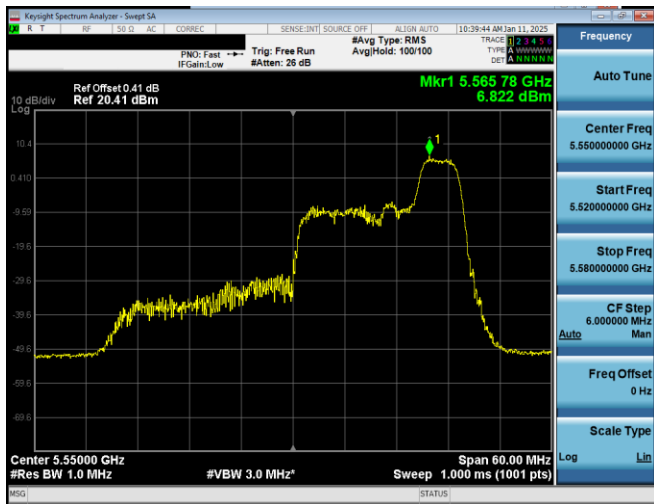

Plot 7-25. PSD Antenna 1b (40MHz BW 11ax Index 44 – RU52 – Ch.110)

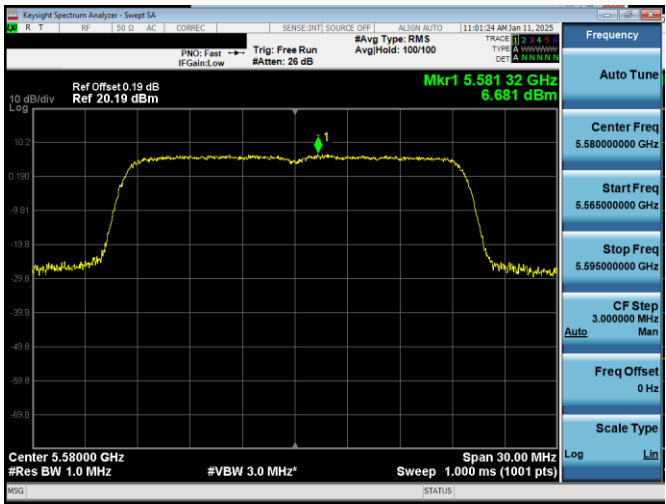

Plot 7-26. PSD Antenna 1b (20MHz BW 11ax– RU242 – Ch.116)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 120 of 297


	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	ax (20MHz)	26	0	12.5/14.7 (MCS11)	3.45	30.0	-26.55
				26	4	12.5/14.7 (MCS11)	2.90	30.0	-27.11
				26	8	12.5/14.7 (MCS11)	3.13	30.0	-26.87
	5785	157	ax (20MHz)	26	0	12.5/14.7 (MCS11)	3.44	30.0	-26.57
				26	4	12.5/14.7 (MCS11)	2.79	30.0	-27.21
				26	8	12.5/14.7 (MCS11)	2.74	30.0	-27.26
	5825	165	ax (20MHz)	26	0	12.5/14.7 (MCS11)	2.97	30.0	-27.03
				26	4	12.5/14.7 (MCS11)	3.06	30.0	-26.94
				26	8	12.5/14.7 (MCS11)	3.40	30.0	-26.60
	5755	151	ax (40MHz)	26	0	12.5/14.7 (MCS11)	3.28	30.0	-26.72
				26	8	12.5/14.7 (MCS11)	2.96	30.0	-27.04
				26	17	12.5/14.7 (MCS11)	3.00	30.0	-27.01
	5795	159	ax (40MHz)	26	0	12.5/14.7 (MCS11)	3.36	30.0	-26.64
				26	8	12.5/14.7 (MCS11)	2.98	30.0	-27.02
				26	17	12.5/14.7 (MCS11)	3.46	30.0	-26.54
	5775	155	ax (80MHz)	26	0	12.5/14.7 (MCS11)	3.75	30.0	-26.26
				26	18	12.5/14.7 (MCS11)	2.47	30.0	-27.53
				26	36	12.5/14.7 (MCS11)	3.33	30.0	-26.67

Table 7-184. Band 3 Power Spectral Density Measurements Antenna 1b (RU26)


	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	ax (20MHz)	242	61	121.9/143.4 (MCS11)	3.36	30.0	-26.64
	5785	157	ax (20MHz)	242	61	121.9/143.4 (MCS11)	4.10	30.0	-25.90
	5825	165	ax (20MHz)	242	61	121.9/143.4 (MCS11)	3.98	30.0	-26.02
	5755	151	ax (40MHz)	484	65	243.8/286.8 (MCS11)	0.66	30.0	-29.34
	5795	159	ax (40MHz)	484	65	243.8/286.8 (MCS11)	0.55	30.0	-29.45
	5775	155	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-5.16	30.0	-35.16

Table 7-185. Band 3 Power Spectral Density Measurements Antenna 1b (Fully-loaded RU)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 121 of 297

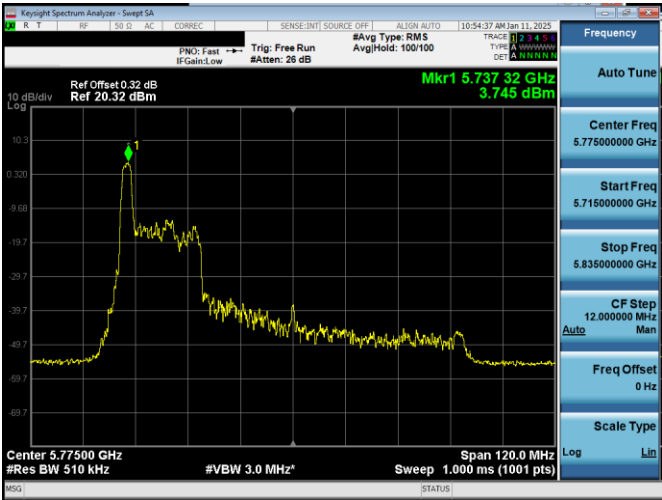

Plot 7-27. PSD Antenna 1b (20MHz BW 11ax Index 0 – RU26 – Ch.155)

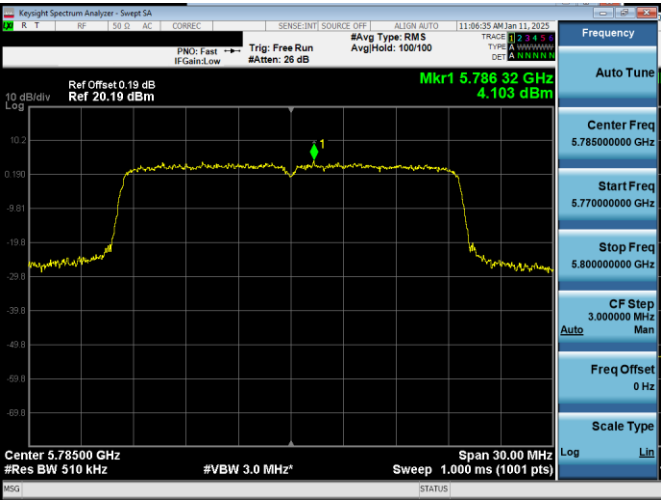

Plot 7-28. PSD Antenna 1b (20MHz BW 11ax– RU242 – Ch.157)

FCC ID: BCGA3269 IC: 579C-A3269	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 122 of 297


	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26	0	12.5/14.7 (MCS11)	6.30	-1.00	5.30	10.0	-4.70
				26	4	12.5/14.7 (MCS11)	5.08	-1.00	4.08	10.0	-5.92
				26	8	12.5/14.7 (MCS11)	5.83	-1.00	4.83	10.0	-5.17
	5200	40	ax (20MHz)	26	0	12.5/14.7 (MCS11)	6.02	-1.00	5.02	10.0	-4.98
				26	4	12.5/14.7 (MCS11)	4.97	-1.00	3.97	10.0	-6.03
				26	8	12.5/14.7 (MCS11)	5.76	-1.00	4.76	10.0	-5.24
	5240	48	ax (20MHz)	26	0	12.5/14.7 (MCS11)	6.40	-1.00	5.40	10.0	-4.60
				26	4	12.5/14.7 (MCS11)	4.96	-1.00	3.96	10.0	-6.04
				26	8	12.5/14.7 (MCS11)	5.36	-1.00	4.36	10.0	-5.64
	5190	38	ax (40MHz)	26	0	12.5/14.7 (MCS11)	6.01	-1.00	5.01	10.0	-4.99
				26	8	12.5/14.7 (MCS11)	5.65	-1.00	4.65	10.0	-5.35
				26	17	12.5/14.7 (MCS11)	5.86	-1.00	4.86	10.0	-5.14
	5230	46	ax (40MHz)	26	0	12.5/14.7 (MCS11)	5.55	-1.00	4.55	10.0	-5.45
				26	8	12.5/14.7 (MCS11)	5.51	-1.00	4.51	10.0	-5.49
				26	17	12.5/14.7 (MCS11)	5.68	-1.00	4.68	10.0	-5.32
	5210	42	ax (80MHz)	26	0	12.5/14.7 (MCS11)	5.86	-1.00	4.86	10.0	-5.14
				26	18	12.5/14.7 (MCS11)	4.20	-1.00	3.20	10.0	-6.80
				26	36	12.5/14.7 (MCS11)	5.49	-1.00	4.49	10.0	-5.51
	5250	50 (L)	ax (160MHz)	52	37	25/29.4 (MCS11)	5.29	-1.00	4.29	10.0	-5.71
				52	52	25/29.4 (MCS11)	5.13	-1.00	4.13	10.0	-5.87

Table 7-186. ISED Band 1 e.i.r.p. Power Spectral Density Measurements Antenna 1b (RU26)


	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	242	61	121.9/143.4 (MCS11)	3.33	-1.00	2.33	10.0	-7.67
	5200	40	ax (20MHz)	242	61	121.9/143.4 (MCS11)	6.44	-1.00	5.44	10.0	-4.56
	5240	48	ax (20MHz)	242	61	121.9/143.4 (MCS11)	6.43	-1.00	5.43	10.0	-4.57
	5190	38	ax (40MHz)	484	65	243.8/286.8 (MCS11)	-0.90	-1.00	-1.90	10.0	-11.90
	5230	46	ax (40MHz)	484	65	243.8/286.8 (MCS11)	3.36	-1.00	2.36	10.0	-7.64
	5210	42	ax (80MHz)	996	67	510.4/600.5 (MCS11)	-4.09	-1.00	-5.09	10.0	-15.09
	5250	50	ax (160MHz)	996x2	68	1020.8/1201 (MCS11)	-8.37	-1.00	-9.37	10.0	-19.37

Table 7-187. ISED Band 1 e.i.r.p. Power Spectral Density Measurements Antenna 1b (Fully-loaded RU)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 123 of 297

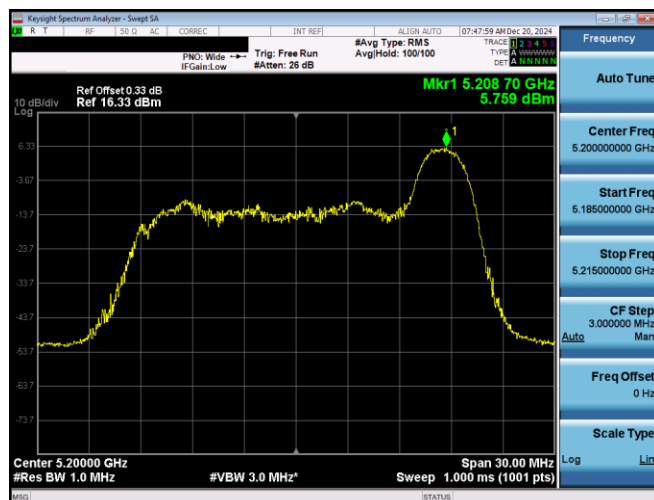

Plot 7-29. PSD Antenna 1b (0MHz BW 11ax Index 8 – RU26 – Ch.40)

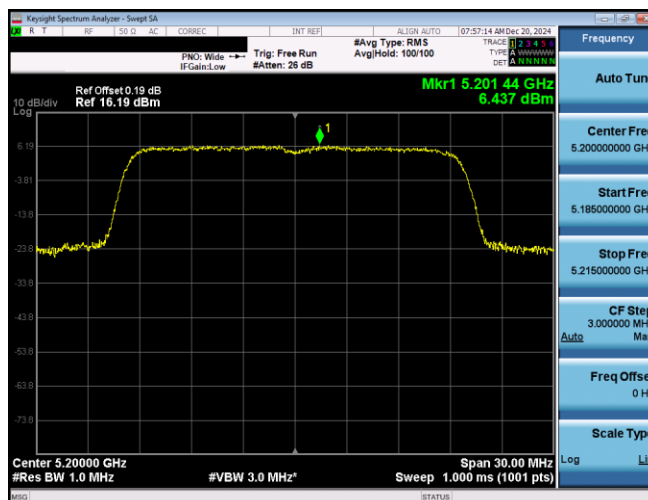

Plot 7-30. PSD Antenna 1b (20MHz BW 11ax– RU242 – Ch.40)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 124 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5.4 Summed CDD/SDM Primary Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Antenna 5T Power Density [dBm/MHz]	Antenna 3b Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26	0	25/29.4 (MCS11)	6.15	5.73	8.96	11.0	-2.04
				26	4	25/29.4 (MCS11)	5.16	5.04	8.11	11.0	-2.89
				26	8	25/29.4 (MCS11)	5.84	5.99	8.92	11.0	-2.08
	5200	40	ax (20MHz)	26	0	25/29.4 (MCS11)	5.69	5.81	8.76	11.0	-2.24
				26	4	25/29.4 (MCS11)	4.95	4.94	7.96	11.0	-3.04
				26	8	25/29.4 (MCS11)	6.18	5.90	9.05	11.0	-1.95
	5240	48	ax (20MHz)	26	0	25/29.4 (MCS11)	6.11	5.82	8.98	11.0	-2.02
				26	4	25/29.4 (MCS11)	5.94	5.14	8.57	11.0	-2.43
				26	8	25/29.4 (MCS11)	5.87	6.16	9.03	11.0	-1.97
	5190	38	ax (40MHz)	26	0	25/29.4 (MCS11)	5.55	5.77	8.67	11.0	-2.33
				26	8	25/29.4 (MCS11)	5.59	5.88	8.75	11.0	-2.25
				26	17	25/29.4 (MCS11)	5.64	6.01	8.83	11.0	-2.17
	5230	46	ax (40MHz)	26	0	25/29.4 (MCS11)	6.00	5.94	8.98	11.0	-2.02
				26	8	25/29.4 (MCS11)	5.75	5.95	8.86	11.0	-2.14
				26	17	25/29.4 (MCS11)	6.34	5.92	9.14	11.0	-1.86
	5210	42	ax (80MHz)	26	0	25/29.4 (MCS11)	6.24	6.15	9.20	11.0	-1.80
				26	18	25/29.4 (MCS11)	4.88	5.27	8.09	11.0	-2.91
				26	36	25/29.4 (MCS11)	6.08	6.36	9.23	11.0	-1.77

Table 7-188. Bands 1 Power Spectral Density Measurements CDD Primary (RU26)

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 125 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Antenna 5T Power Density [dBm/MHz]	Antenna 3b Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]	
Band 1/2A	5250	50 (L)	ax (160MHz)	52	37	50/58.8 (MCS11)	5.49	5.60	8.56	11.0	-2.44	
		52		52	50/58.8 (MCS11)	5.50	5.17	8.35	11.0	-2.65		
	50 (U)	52	52	50/58.8 (MCS11)	5.27	5.03	8.16	11.0	-2.84			
Band 2A	5260	52	ax (20MHz)	52	37	50/58.8 (MCS11)	6.29	6.28	9.29	11.0	-1.71	
				52	38	50/58.8 (MCS11)	6.54	6.78	9.67	11.0	-1.33	
				52	40	50/58.8 (MCS11)	6.35	6.07	9.22	11.0	-1.78	
	5280	60	ax (20MHz)	52	37	50/58.8 (MCS11)	6.45	6.11	9.29	11.0	-1.71	
				52	38	50/58.8 (MCS11)	6.30	6.73	9.53	11.0	-1.47	
				52	40	50/58.8 (MCS11)	6.37	6.53	9.46	11.0	-1.54	
	5320	64	ax (20MHz)	52	37	50/58.8 (MCS11)	6.56	5.98	9.29	11.0	-1.71	
				52	38	50/58.8 (MCS11)	6.67	6.50	9.60	11.0	-1.40	
				52	40	50/58.8 (MCS11)	6.54	6.48	9.52	11.0	-1.48	
	5270	54	ax (40MHz)	52	37	50/58.8 (MCS11)	5.85	6.09	8.98	11.0	-2.02	
				52	40	50/58.8 (MCS11)	6.55	6.18	9.38	11.0	-1.62	
				52	44	50/58.8 (MCS11)	6.15	6.49	9.33	11.0	-1.67	
	5310	62	ax (40MHz)	52	37	50/58.8 (MCS11)	6.36	6.09	9.24	11.0	-1.76	
				52	40	50/58.8 (MCS11)	6.39	6.03	9.22	11.0	-1.78	
				52	44	50/58.8 (MCS11)	6.15	6.08	9.12	11.0	-1.88	
	5290	58	ax (80MHz)	52	37	50/58.8 (MCS11)	6.60	6.49	9.55	11.0	-1.45	
				52	44	50/58.8 (MCS11)	5.98	6.22	9.11	11.0	-1.89	
				52	52	50/58.8 (MCS11)	5.84	6.50	9.19	11.0	-1.81	
Band 2C	5500	100	ax (20MHz)	52	37	50/58.8 (MCS11)	6.42	6.42	9.43	11.0	-1.57	
				52	38	50/58.8 (MCS11)	6.61	6.68	9.66	11.0	-1.34	
				52	40	50/58.8 (MCS11)	6.83	6.38	9.62	11.0	-1.38	
	5580	116	ax (20MHz)	52	37	50/58.8 (MCS11)	6.74	6.34	9.56	11.0	-1.44	
				52	38	50/58.8 (MCS11)	6.68	6.62	9.66	11.0	-1.34	
				52	40	50/58.8 (MCS11)	6.59	6.49	9.55	11.0	-1.45	
	5720	144	ax (20MHz)	52	37	50/58.8 (MCS11)	6.62	6.57	9.60	11.0	-1.40	
				52	38	50/58.8 (MCS11)	6.31	7.03	9.69	11.0	-1.31	
				52	40	50/58.8 (MCS11)	6.15	6.21	9.19	11.0	-1.81	
	5510	102	ax (40MHz)	52	37	50/58.8 (MCS11)	6.47	5.72	9.12	11.0	-1.88	
				52	40	50/58.8 (MCS11)	6.16	6.26	9.22	11.0	-1.78	
				52	44	50/58.8 (MCS11)	6.33	6.19	9.27	11.0	-1.73	
	5550	110	ax (40MHz)	52	37	50/58.8 (MCS11)	5.95	6.04	9.00	11.0	-2.00	
				52	40	50/58.8 (MCS11)	6.60	6.76	9.69	11.0	-1.31	
				52	44	50/58.8 (MCS11)	6.90	6.51	9.72	11.0	-1.28	
	*5590	118	ax (40MHz)	52	37	50/58.8 (MCS11)	6.41	6.90	9.67	11.0	-1.33	
				52	40	50/58.8 (MCS11)	6.20	6.35	9.28	11.0	-1.72	
				52	44	50/58.8 (MCS11)	6.65	6.42	9.54	11.0	-1.46	
	5670	134	ax (40MHz)	52	37	50/58.8 (MCS11)	6.45	6.23	9.36	11.0	-1.64	
				52	40	50/58.8 (MCS11)	6.41	6.67	9.55	11.0	-1.45	
				52	44	50/58.8 (MCS11)	6.16	5.87	9.03	11.0	-1.97	
	5710	142	ax (40MHz)	52	37	50/58.8 (MCS11)	6.38	6.47	9.44	11.0	-1.56	
				52	40	50/58.8 (MCS11)	5.82	6.41	9.13	11.0	-1.87	
				52	44	50/58.8 (MCS11)	6.30	6.50	9.41	11.0	-1.59	
	5530	106	ax (80MHz)	52	37	50/58.8 (MCS11)	6.66	6.42	9.55	11.0	-1.45	
				52	44	50/58.8 (MCS11)	6.58	6.12	9.36	11.0	-1.64	
				52	52	50/58.8 (MCS11)	6.37	6.99	9.70	11.0	-1.30	
	*5610	122	ax (80MHz)	52	37	50/58.8 (MCS11)	6.67	6.31	9.51	11.0	-1.49	
				52	44	50/58.8 (MCS11)	5.93	6.04	9.00	11.0	-2.00	
				52	52	50/58.8 (MCS11)	6.79	6.09	9.46	11.0	-1.54	
	5690	138	ax (80MHz)	52	37	50/58.8 (MCS11)	6.09	6.02	9.07	11.0	-1.93	
				52	44	50/58.8 (MCS11)	5.86	6.03	8.96	11.0	-2.04	
				52	52	50/58.8 (MCS11)	5.76	6.35	9.08	11.0	-1.92	
	*5570	114 (L)	ax (160MHz)	52	37	50/58.8 (MCS11)	4.39	4.23	7.32	11.0	-3.68	
		114 (U)		52	52	50/58.8 (MCS11)	4.26	4.42	7.35	11.0	-3.65	
				52	52	50/58.8 (MCS11)	4.06	4.65	7.38	11.0	-3.62	

Table 7-189. Bands 1, 2A, 2C Power Spectral Density Measurements CDD Primary (RU52)

*TDWR channel is not supported for ISD (denoted by a * next to the frequency)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 126 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Antenna 3c Power Density [dBm/MHz]	Antenna 3a Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	242	61	243.8/286.8 (MCS11)	4.65	4.00	7.35	11.0	-3.65
	5200	40	ax (20MHz)	242	61	243.8/286.8 (MCS11)	7.11	6.51	9.83	11.0	-1.17
	5240	48	ax (20MHz)	242	61	243.8/286.8 (MCS11)	6.45	6.80	9.64	11.0	-1.36
	5190	38	ax (40MHz)	484	65	487.5/573.5 (MCS11)	-0.32	-0.25	2.73	11.0	-8.27
	5230	46	ax (40MHz)	484	65	487.5/573.5 (MCS11)	5.44	5.17	8.31	11.0	-2.69
	5210	42	ax (80MHz)	996	67	1020.8/1201 (MCS11)	-3.23	-3.47	-0.34	11.0	-11.34
Band 1/2A	5250	50	ax (160MHz)	996x2	68	2041.6/2402 (MCS11)	-7.46	-8.29	-4.85	11.0	-15.85
Band 2A	5260	52	ax (20MHz)	242	61	243.8/286.8 (MCS11)	6.95	6.55	9.77	11.0	-1.23
	5280	60	ax (20MHz)	242	61	243.8/286.8 (MCS11)	6.69	6.71	9.71	11.0	-1.29
	5320	64	ax (20MHz)	242	61	243.8/286.8 (MCS11)	4.69	5.06	7.89	11.0	-3.11
	5270	54	ax (40MHz)	484	65	487.5/573.5 (MCS11)	5.08	5.42	8.26	11.0	-2.74
	5310	62	ax (40MHz)	484	65	487.5/573.5 (MCS11)	0.24	0.28	3.27	11.0	-7.73
	5290	58	ax (80MHz)	996	67	1020.8/1201 (MCS11)	-4.30	-3.91	-1.09	11.0	-12.09
Band 2C	5500	100	ax (20MHz)	242	61	243.8/286.8 (MCS11)	3.35	3.13	6.25	11.0	-4.75
	5580	116	ax (20MHz)	242	61	243.8/286.8 (MCS11)	6.82	7.13	9.99	11.0	-1.01
	5720	144	ax (20MHz)	242	61	243.8/286.8 (MCS11)	6.95	6.75	9.86	11.0	-1.14
	5510	102	ax (40MHz)	484	65	487.5/573.5 (MCS11)	-1.79	-1.69	1.27	11.0	-9.73
	5550	110	ax (40MHz)	484	65	487.5/573.5 (MCS11)	3.31	3.43	6.38	11.0	-4.62
	*5590	118	ax (40MHz)	484	65	487.5/573.5 (MCS11)	5.45	5.36	8.42	11.0	-2.58
	5710	142	ax (40MHz)	484	65	487.5/573.5 (MCS11)	5.56	5.46	8.52	11.0	-2.48
	5530	106	ax (80MHz)	996	67	1020.8/1201 (MCS11)	-4.14	-4.39	-1.25	11.0	-12.25
	*5610	122	ax (80MHz)	996	67	1020.8/1201 (MCS11)	-0.81	-0.87	2.17	11.0	-8.83
	5690	138	ax (80MHz)	996	67	1020.8/1201 (MCS11)	2.86	2.87	5.87	11.0	-5.13
	*5570	114	ax (160MHz)	996X2	68	2041.6/2402 (MCS11)	-8.85	-9.01	-5.92	11.0	-16.92





Table 7-190. Bands 1, 2A, 2C Power Spectral Density Measurements CDD Primary (Fully-loaded RU)

*TDWR channel is not supported for ISSED (denoted by a * next to the frequency)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 127 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

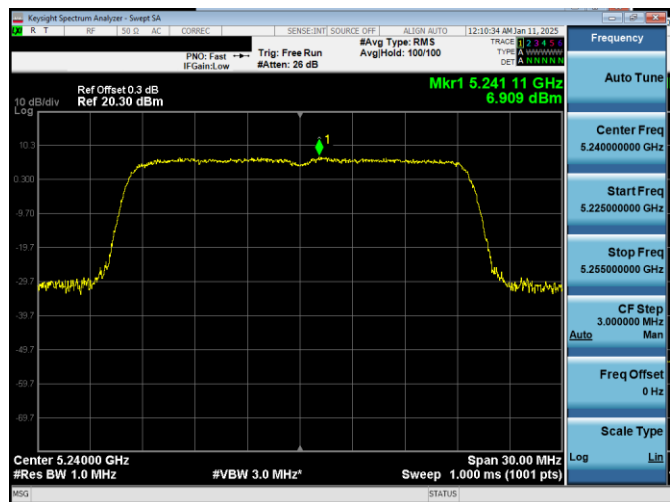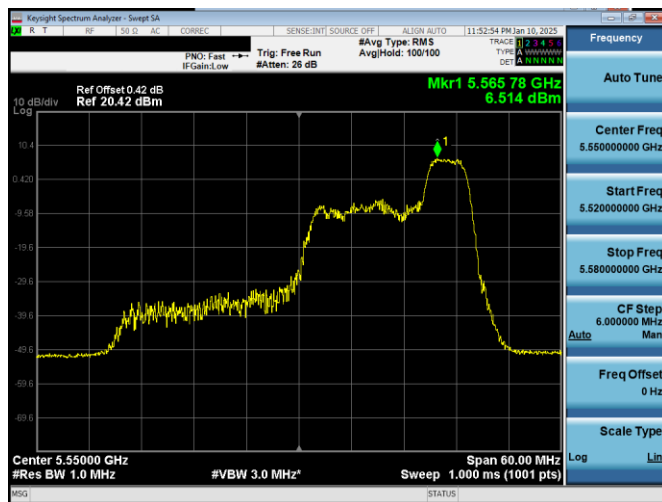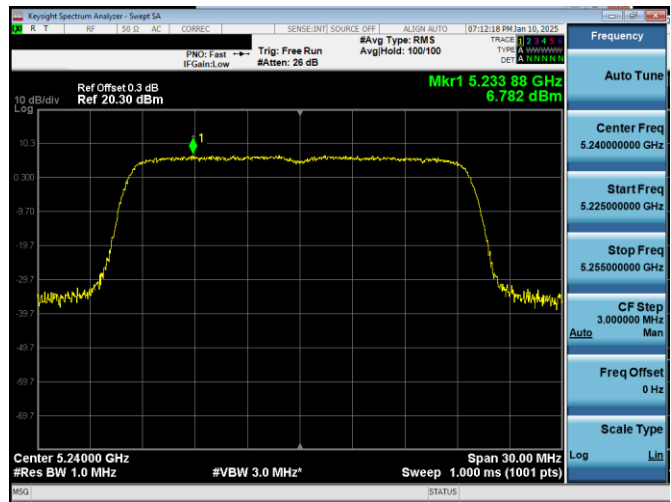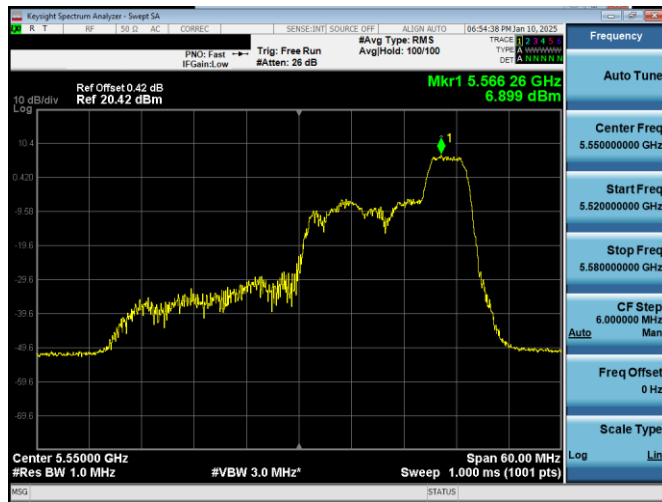

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 128 of 297

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

	Frequency [MHz]	Channel No.	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Antenna 5T Power Density [dBm/500kHz]	Antenna 3b Power Density [dBm/500kHz]	Summed Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	ax (20MHz)	26	0	25/29.4 (MCS11)	4.17	5.23	7.74	30.0	-22.26
				26	4	25/29.4 (MCS11)	5.10	4.51	7.83	30.0	-22.17
				26	8	25/29.4 (MCS11)	4.89	5.07	7.99	30.0	-22.01
	5785	157	ax (20MHz)	26	0	25/29.4 (MCS11)	4.40	4.66	7.54	30.0	-22.46
				26	4	25/29.4 (MCS11)	4.34	4.54	7.45	30.0	-22.55
				26	8	25/29.4 (MCS11)	4.98	4.19	7.61	30.0	-22.39
	5825	165	ax (20MHz)	26	0	25/29.4 (MCS11)	4.32	4.78	7.57	30.0	-22.43
				26	4	25/29.4 (MCS11)	4.52	4.15	7.35	30.0	-22.65
				26	8	25/29.4 (MCS11)	4.92	5.17	8.05	30.0	-21.95
	5755	151	ax (40MHz)	26	0	25/29.4 (MCS11)	4.38	4.51	7.45	30.0	-22.55
				26	8	25/29.4 (MCS11)	4.76	4.65	7.71	30.0	-22.29
				26	17	25/29.4 (MCS11)	4.42	4.58	7.51	30.0	-22.49
	5795	159	ax (40MHz)	26	0	25/29.4 (MCS11)	5.15	4.34	7.77	30.0	-22.23
				26	8	25/29.4 (MCS11)	4.86	4.10	7.51	30.0	-22.49
				26	17	25/29.4 (MCS11)	5.17	4.54	7.88	30.0	-22.12
	5775	155	ax (80MHz)	26	0	25/29.4 (MCS11)	5.34	4.65	8.02	30.0	-21.98
				26	18	25/29.4 (MCS11)	4.78	4.71	7.76	30.0	-22.24
				26	36	25/29.4 (MCS11)	4.68	4.76	7.73	30.0	-22.27





Table 7-191. Band 3 Power Spectral Density Measurements CDD Primary (RU26)

	Frequency [MHz]	Channel	802.11 MODE	RU Size	RU Index	Data Rate [Mbps]	Antenna 5T Power Density [dBm/500kHz]	Antenna 3b Power Density [dBm/500kHz]	Summed Power Density [dBm/500kHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	ax (20MHz)	242	61	243.8/286.8 (MCS11)	5.64	5.50	8.58	30.0	-21.42
	5785	157	ax (20MHz)	242	61	243.8/286.8 (MCS11)	5.31	5.24	8.29	30.0	-21.71
	5825	165	ax (20MHz)	242	61	243.8/286.8 (MCS11)	5.52	5.10	8.33	30.0	-21.67
	5755	151	ax (40MHz)	484	65	487.5/573.5 (MCS11)	2.44	2.32	5.39	30.0	-24.61
	5795	159	ax (40MHz)	484	65	487.5/573.5 (MCS11)	2.38	2.13	5.27	30.0	-24.73
	5775	155	ax (80MHz)	996	67	1020.8/1201 (MCS11)	-4.03	-4.04	-1.03	30.0	-31.03

Table 7-192. Band 3 Power Spectral Density Measurements CDD Primary (Fully-loaded RU)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 129 of 297

V 10.6 10/27/2023

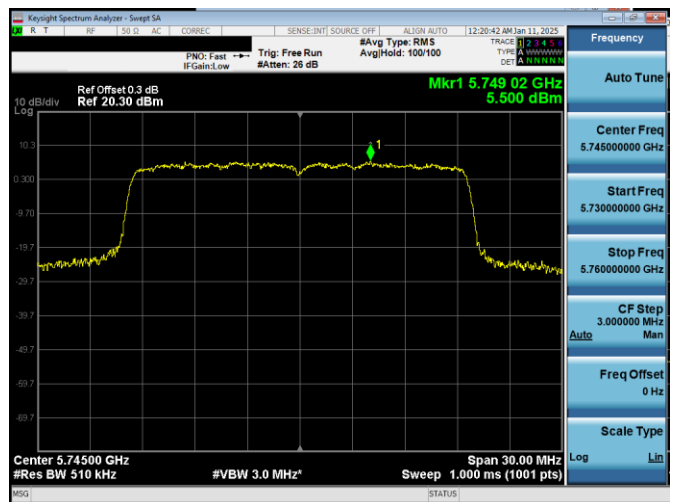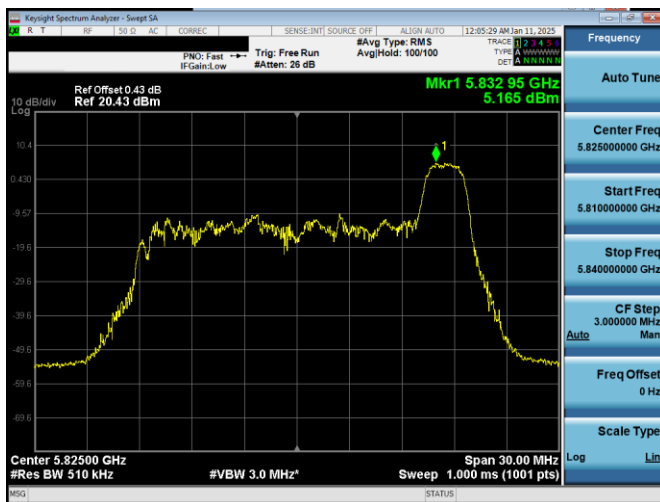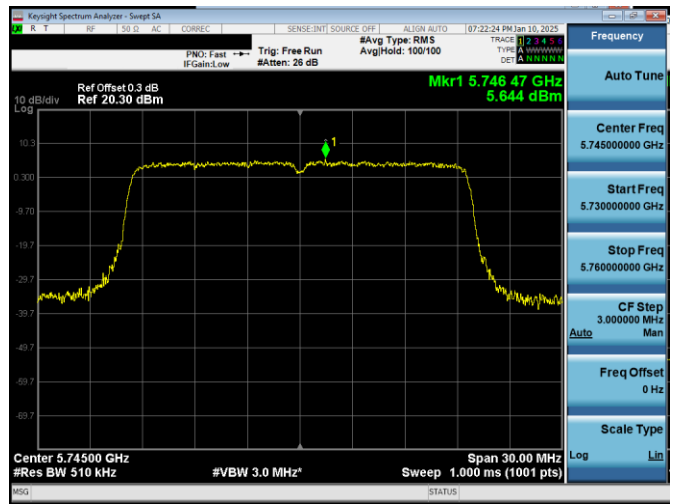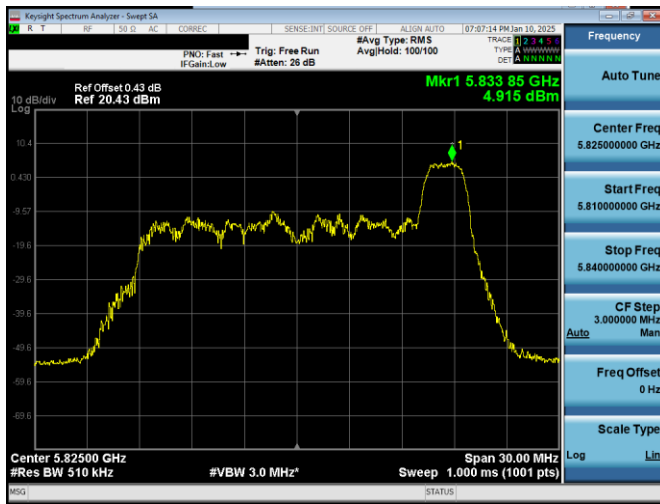

FCC ID: BCGA3269 IC: 579C-A3269		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 130 of 297

	Frequency [MHz]	Channel No.	802.11 MODE	Mode	RU Size	RU Index	Data Rate [Mbps]	Antenna 5T Power Density [dBm/MHz]	Antenna 3b Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Directional Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	SDM	26	0	25/29.4 (MCS11)	6.90	7.00	9.96	-1.83	8.13	10.0	-1.87
					26	4	25/29.4 (MCS11)	6.27	5.91	9.10	-1.83	7.28	10.0	-2.72
					26	8	25/29.4 (MCS11)	7.12	7.18	10.16	-1.83	8.33	10.0	-1.67
	5200	40	ax (20MHz)	SDM	26	0	25/29.4 (MCS11)	6.88	7.12	10.01	-1.83	8.19	10.0	-1.81
					26	4	25/29.4 (MCS11)	5.88	5.77	8.84	-1.83	7.01	10.0	-2.99
					26	8	25/29.4 (MCS11)	7.00	6.70	9.86	-1.83	8.04	10.0	-1.96
	5240	48	ax (20MHz)	SDM	26	0	25/29.4 (MCS11)	6.46	6.79	9.64	-1.83	7.81	10.0	-2.19
					26	4	25/29.4 (MCS11)	5.49	5.76	8.64	-1.83	6.81	10.0	-3.19
					26	8	25/29.4 (MCS11)	6.14	6.66	9.41	-1.83	7.59	10.0	-2.41
	5190	38	ax (40MHz)	SDM	26	0	25/29.4 (MCS11)	7.05	7.40	10.23	-1.83	8.41	10.0	-1.59
					26	8	25/29.4 (MCS11)	6.56	6.53	9.56	-1.83	7.73	10.0	-2.27
					26	17	25/29.4 (MCS11)	6.32	6.71	9.53	-1.83	7.70	10.0	-2.30
	5230	46	ax (40MHz)	SDM	26	0	25/29.4 (MCS11)	6.42	6.64	9.54	-1.83	7.71	10.0	-2.29
					26	8	25/29.4 (MCS11)	6.26	6.02	9.15	-1.83	7.32	10.0	-2.68
					26	17	25/29.4 (MCS11)	6.67	6.48	9.59	-1.83	7.76	10.0	-2.24
	5210	42	ax (80MHz)	SDM	26	0	25/29.4 (MCS11)	7.52	6.86	10.21	-1.83	8.38	10.0	-1.62
					26	18	25/29.4 (MCS11)	5.06	5.46	8.28	-1.83	6.45	10.0	-3.55
					26	36	25/29.4 (MCS11)	6.48	6.62	9.56	-1.83	7.73	10.0	-2.27
	5250	50 (L)	ax (160MHz)	SDM	52	37	50/58.8 (MCS11)	5.96	5.53	8.76	-1.83	6.93	10.0	-3.07
					52	52	50/58.8 (MCS11)	6.16	5.65	8.92	-1.83	7.10	10.0	-2.90

Table 7-193. ISED Band 1 e.i.r.p. Power Spectral Density Measurements SDM Primary (RU26)

	Frequency [MHz]	Channel	802.11 MODE	Mode	RU Size	RU Index	Data Rate [Mbps]	Antenna 5T Power Density [dBm/MHz]	Antenna 3b Power Density [dBm/MHz]	Summed Power Density [dBm/MHz]	Directional Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	SDM	242	61	243.8/286.8 (MCS11)	4.67	4.90	7.80	-1.83	5.97	10.0	-4.03
	5200	40	ax (20MHz)	SDM	242	61	243.8/286.8 (MCS11)	7.20	7.11	10.17	-1.83	8.34	10.0	-1.66
	5240	48	ax (20MHz)	SDM	242	61	243.8/286.8 (MCS11)	7.22	7.17	10.20	-1.83	8.38	10.0	-1.62
	5190	38	ax (40MHz)	CDD	484	65	487.5/573.5 (MCS11)	0.65	0.47	3.57	1.17	4.74	10.0	-5.26
	5230	46	ax (40MHz)	SDM	484	65	487.5/573.5 (MCS11)	5.28	5.35	8.33	-1.83	6.50	10.0	-3.50
	5210	42	ax (80MHz)	CDD	996	67	1020.8/1201 (MCS11)	-2.95	-3.02	0.02	1.17	1.19	10.0	-8.81
	5250	50	ax (160MHz)	CDD	996x2	68	2041.6/2402 (MCS11)	-7.75	-7.99	-4.86	1.17	-3.69	10.0	-13.69

Table 7-194. ISED Band 1 e.i.r.p. Power Spectral Density Measurements CDD/SDM Primary (Fully-loaded RU)

FCC ID: BCGA3269 IC: 579C-A3269	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210075-22-R1.BCG	Test Dates: 10/25/2024 - 1/14/2025	EUT Type: Tablet Device	Page 131 of 297