




Element Materials Technology

(formerly PCTEST)
18855 Adams Court, Morgan Hill, CA 95037 USA
Tel. 408.538.5600
<http://www.element.com>



MEASUREMENT REPORT

FCC PART 15.247 / ISED RSS-247 WLAN 802.11b/g/n/ax(SU)

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

10/25/2024 - 1/24/2025

Test Report Issue Date:

1/25/2025

Test Site/Location:

Element Materials Technology, Morgan Hill, CA, USA

Test Report Serial No.:

1C2410210076-03-R1.BCG

FCC ID:

BCGA3354

IC:

579C-A3354

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A3354

EUT Type:

Tablet Device

Frequency Range:

2412 – 2472MHz

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:

RSS-247 Issue 3

Test Procedure(s):

ANSI C63.10-2020, KDB 558074 D01 v05r02,
KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2020 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2410210076-03-R1.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez

Executive Vice President



FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 1 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope	4
1.2	Element Materials Technology Test Location.....	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Antenna Description	8
2.4	Test Support Equipment.....	8
2.5	Test Configuration	9
2.6	Software and Firmware	9
2.7	EMI Suppression Device(s)/Modifications	9
3.0	DESCRIPTION OF TESTS	10
3.1	Evaluation Procedure	10
3.2	AC Line Conducted Emissions	10
3.3	Radiated Emissions.....	11
3.4	Environmental Conditions.....	11
4.0	ANTENNA REQUIREMENTS	12
5.0	MEASUREMENT UNCERTAINTY.....	13
6.0	TEST EQUIPMENT CALIBRATION DATA	14
7.0	TEST RESULTS.....	15
7.1	Summary	15
7.2	6dB BW and 99% OBW Measurement.....	16
7.3	Output Power Measurement.....	24
7.4	Power Spectral Density	34
7.5	Conducted Authorized Band Edge	53
7.6	Conducted Spurious Emissions.....	100
7.7	Radiated Spurious Emissions – Above 1 GHz	108
7.8	Radiated Spurious Emissions – Below 1GHz.....	170
7.9	AC Line-Conducted Emissions Measurement	175
8.0	CONCLUSION	181


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 2 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



MEASUREMENT REPORT



Mode	Tx Frequency (MHz)	Antenna WF8				Antenna WF7b				CDD			
		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
		Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
802.11b	2412 - 2472	99.449	19.98	173.141	22.38	44.514	16.49	80.501	19.06	N/A	N/A	N/A	N/A
802.11g	2412 - 2472	76.436	18.83	236.755	23.74	76.348	18.83	241.991	23.84	134.276	21.28	393.550	25.95
802.11n	2412 - 2472	67.531	18.30	245.980	23.91	70.388	18.48	259.179	24.14	135.831	21.33	443.609	26.47
802.11ax (SU)	2412 - 2467	70.081	18.46	259.000	24.13	70.795	18.50	246.774	23.92	138.357	21.41	470.977	26.73

EUT Overview

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 3 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology located in Morgan Hill, CA 95037, U.S.A.

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 4 of 181

V 10.6 09/14/2023

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA3354, IC: 579C-A3354**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: LCM6C3J3GN, C5G6DF4TJX, X7WY7H45F6, J0V7G4XLJ6, H9HHAD0006G0000VYN

2.2 Device Capabilities

This device contains the following capabilities:

802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE1M, LE2M)

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13*	2472
7	2442		

Table 2-1. 802.11b/g/n/ax Frequency/Channel Operations

*Channel 13 is disabled for DTS 802.11ax HE20.

Note: The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10-2020. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 5 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Measured Duty Cycles				
802.11 Mode/Band		Duty Cycle [%]		
		Antenna WF8	Antenna WF7b	CDD
2.4GHz	b	98.7	98.6	N/A
	g (Low Data Rate)	98.6	97.9	97.2
	g (Mid Data Rate)	97.3	97.0	97.1
	g (High Data Rate)	98.9	96.8	98.2
	n (Low Data Rate)	98.4	99.0	97.6
	n (Mid Data Rate)	97.8	97.6	95.3
	n (High Data Rate)	96.0	96.6	93.7
	11ax (SU) (Low Data Rate)	98.3	98.3	98.6
	11ax (SU) (Mid Data Rate)	96.6	96.9	96.9
	11ax (SU) (High Data Rate)	94.0	94.0	94.5

Table 2-2. Measured Duty Cycles

The device employs CDD technology. Below are the possible configurations.

WiFi Configurations		SISO			CDD		SDM	
		Antenna WF8 (Common)	Antenna WF7b	Antenna WF8 (Dedicated)	Antenna WF8	Antenna WF7b	Antenna WF8	Antenna WF7b
2.4GHz	11b	✓	✓	✓	✓	✓	✗	✗
	11g	✓	✓	✓	✓	✓	✗	✗
	11n	✓	✓	✓	✓	✓	✗	✗
	11ax	✓	✓	✓	✓	✓	✗	✗

Table 2-3. Wi-Fi Configurations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – CDD function

CDD = Cyclic Delay Diversity - 2Tx Function

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 6 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

The device supports the following data rates (shown in Mbps):

802.11b	802.11g	MCS Index		Spatial Stream	802.11n		OFDM (802.11ax)			
20MHz					20MHz		20MHz			
		HT	VHT		0.8μs GI	0.4μs GI	0.8μs GI	1.6μs GI	3.2μs GI	
1	6	0	0	1	6.5	7.2	8.6	8.1	7.3	Low rate
2	9	1	1	1	13	14.4	17.2	16.3	14.6	
5.5	12	2	2	1	19.5	21.7	25.8	24.4	21.9	
11	18	3	3	1	26	28.9	34.4	32.5	29.3	Mid rate
-	24	4	4	1	39	43.3	51.6	48.8	43.9	
-	36	5	5	1	52	57.8	68.8	65	58.5	High Rate
-	48	6	6	1	58.5	65	77.4	73.1	65.8	
-	54	7	7	1	65	72.2	86	81.3	73.1	
-	-	-	8	1	78	86.7	103.2	97.5	87.8	
-	-	-	9	1	-	-	114.7	108.3	97.5	
-	6	8	0	2	13	14.4	17.2	16.3	14.6	Low rate
-	9	9	1	2	26	28.9	34.4	32.5	29.3	
-	12	10	2	2	39	43.3	51.6	48.8	43.9	
-	18	11	3	2	52	57.8	68.8	65	58.5	Mid rate
-	24	12	4	2	78	86.7	103.2	97.5	87.8	
-	36	13	5	2	104	115.6	137.6	130	117	High Rate
-	48	14	6	2	117	130	154.9	146.3	131.6	
-	54	15	7	2	130	144.4	172.1	162.5	146.3	
-	-	-	8	2	156	173.3	206.5	195	175.5	
-	-	-	9	2	-	-	229.4	216.7	195	

Table 2-4. Supported Data Rates

This device supports simultaneous transmission operations, which allows multiple transmitters to transmit simultaneously on the same antenna or across separate antennas. The table below shows all configurations possible.

Antenna	Simultaneous Tx Config	Bluetooth 2.4GHz	WLAN	WIFI 5GHz
		BDR, EDR, LE1/2M	802.11 b/g/n/ax	802.11 a/n/ac/ax
Ant WF8	Config 1	✓	✗	✓
Ant WF8	Config 2	✗	✓	✓
*Ant WF8	Config 3	✗	✓	✗
*Ant W7a		✗	✗	✓

Table 2-5. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support
 *= SDB enabled

Note:

All the above simultaneous transmission configurations have been tested and the worst-case configuration was found to be Config 1 and reported in RF Bluetooth and RF UNII OFDM test reports.

Specific 2.4 GHz Wi-Fi antenna that can only transmit simultaneously with 2.4 GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4 GHz), in both connected and disconnected modes, and Wi-Fi (2.4 GHz) – Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5 GHz on separate antenna.

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 7 of 181

V 10.6 09/14/2023

2.3 Antenna Description

The following antenna gains provided by manufacturer were used for the testing.

Frequency [GHz]	Antenna Gain (dBi)	
	Antenna WF8	Antenna WF7b
2.4	1.2	0.4

Table 2-6. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple MacBook Pro w/AC/DC Adapter	Model: A2141 Model: A2166	S/N: C02H604EQ05D S/N: C4H042705ZNPMOWA6
2	Apple USB-C Cable	Model: Spartan	S/N: GXK1336018XKTR024
3	USB-C Cable w/ AC Adapter	Model: A246C Model: A2305	S/N: DWH80115BK826GV19 S/N: C4H95160004PF4F4V
4	DC Power Supply	Model: KPS3010D	S/N: N/A

Table 2-7. Test Support Equipment List

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 8 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2020 and KDB 558074 D01 v05r02. ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, Section 3.3 for radiated emissions test setups, and, 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

802.11n CDD mode test data provided in this report covers 802.11n SDM.

802.11ax-SU HE20 2TX CDD mode test data provided in this report covers 802.11ax-SU HE20 2TX SDM.

The data rates have been categorized into three groups: low, middle, and high data rates (see Table 2-4). All three groups have been investigated, and only the worst-case data rate has been reported.

For 802.11ax-RU test results, see separate WLAN (OFDMA) report, 1C2410210076-04.BCG

Antenna WF8 supports two signal paths (Dedicated and Common) to a single port via a splitter with Common path power equal to or lower than Dedicated path power.

2.6 Software and Firmware

The test was conducted with firmware version 22D8 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 9 of 181

V 10.6 09/14/2023

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2020) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that the cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 10 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 11 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 12 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	2.07
AC Line Conducted Disturbance	1.91
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz - 1GHz)	4.85
Radiated Disturbance (1 - 18GHz)	5.08
Radiated Disturbance (>18GHz)	5.22

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 13 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance with the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Anritsu	ML2495A	Power Meter	7/8/2024	Annual	7/8/2025	1039008
Anritsu	MA2411B	Pulse Power Sensor	7/1/2024	Annual	7/1/2025	1911105
Anritsu	MA2411B	Pulse Power Sensor	10/21/2024	Annual	10/21/2025	1027293
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	3/14/2024	Annual	3/14/2025	T058701-01
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/9/2024	Annual	4/9/2025	00218555
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2024	Annual	6/10/2025	-
Keysight Technology	N9040B	UXA Signal Analyzer	5/28/2024	Annual	5/28/2025	MY57212015
Keysight Technology	N9030A	PXA Signal Analyzer	7/11/2024	Annual	7/11/2025	MY49430244
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	3/1/2024	Annual	3/1/2025	102145
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	8/14/2024	Annual	8/14/2025	101648
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/29/2024	Annual	5/29/2025	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	5/1/2024	Annual	5/1/2025	101867
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	7/3/2024	Annual	7/3/2025	102356
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/10/2024	Annual	6/10/2025	100057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	6/21/2024	Annual	6/21/2025	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	4/24/2024	Annual	4/24/2025	101364
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/29/2024	Annual	4/29/2025	00304

Table 6-1. Test Equipment List

Note:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. * denotes passive equipment that have been internally verified/calibrated.

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 14 of 181

V 10.6 09/14/2023

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.

FCC ID: BCGA3354

IC: 579C-A3354

FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 7.2
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		N/A	Section 7.2
15.247(b)(3)	RSS-247 [5.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 7.3
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.7, 7.8
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8])	AC LINE CONDUCTED	PASS	Section 7.9

Table 7-1. Summary of Test Results

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
4. For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Conducted Automation," Version 1.1.1
5. For radiated testing, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 3.1.0.

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 15 of 181

V 10.6 09/14/2023

7.2 6dB BW and 99% OBW Measurement

§15.247(a)(2); §2.1049; RSS-247 [5.2]; RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10-2020 – Subclause 11.8.2 Option 2

KDB 558074 D01 v05r02 – Section 8.2

RSS-Gen [6.7]

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 99% occupied bandwidth and the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, step 2 – 7 were repeated after changing the RBW such that it would be within 1 -5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 16 of 181

V 10.6 09/14/2023

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All antenna configurations and data rates have been investigated, with tabular data reported for the worst-case data rate. Only the worst-case plot per mode was reported which corresponds to the narrowest 6dB bandwidth.

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 17 of 181

V 10.6 09/14/2023


7.2.1 Antenna WF8 6 dB BW and 99% OBW Measurements

Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	b	11	12.49	8.34	0.50	Pass
2437	6	b	11	12.57	8.44	0.50	Pass
2462	11	b	11	12.52	7.62	0.50	Pass
2412	1	g	12	16.50	16.34	0.50	Pass
2437	6	g	12	16.56	16.33	0.50	Pass
2462	11	g	12	16.54	16.06	0.50	Pass
2412	1	n	19.5/21.7 (MCS2)	17.68	16.90	0.50	Pass
2437	6	n	19.5/21.7 (MCS2)	17.78	17.24	0.50	Pass
2462	11	n	19.5/21.7 (MCS2)	17.72	17.25	0.50	Pass
2412	1	ax (SU)	49/51.6 (MCS4)	18.88	18.94	0.50	Pass
2437	6	ax (SU)	24/25.8 (MCS2)	18.99	18.95	0.50	Pass
2462	11	ax (SU)	24/25.8 (MCS2)	18.97	18.94	0.50	Pass


Table 7-2. Conducted Bandwidth Measurements Antenna WF8

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 18 of 181

V 10.6 09/14/2023

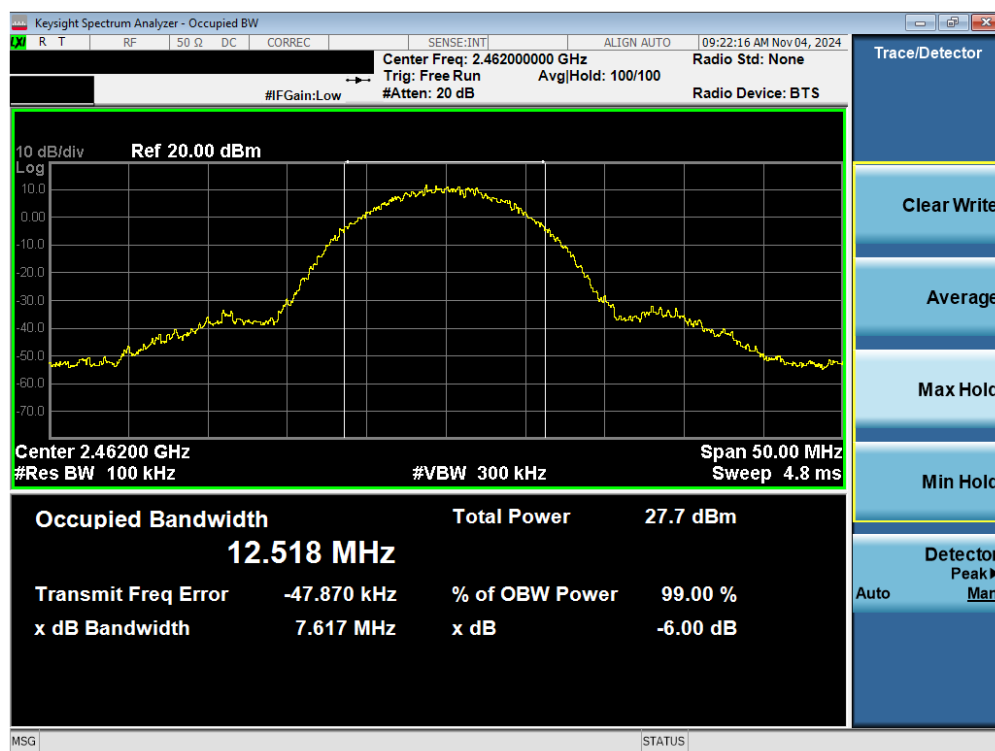


Plot 7-1. 6 dB BW and 99% OBW Plot Antenna WF8 (802.11b – Ch. 11)

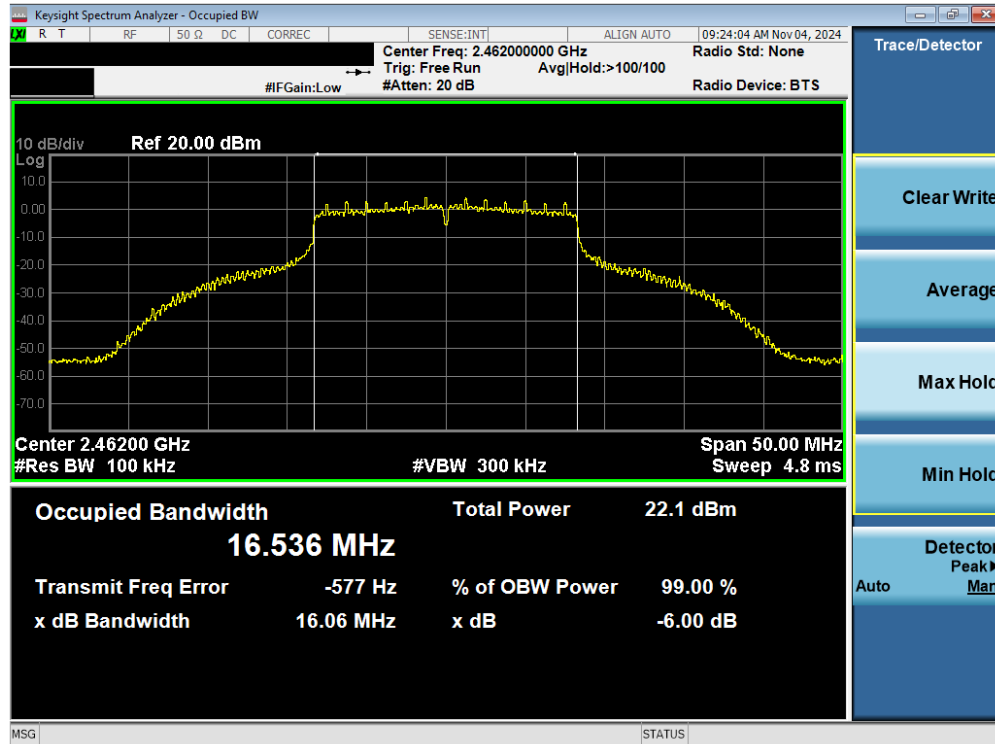


Plot 7-2. 6 dB BW and 99% OBW Plot Antenna WF8 (802.11g – Ch. 11)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 19 of 181

V 10.6 09/14/2023

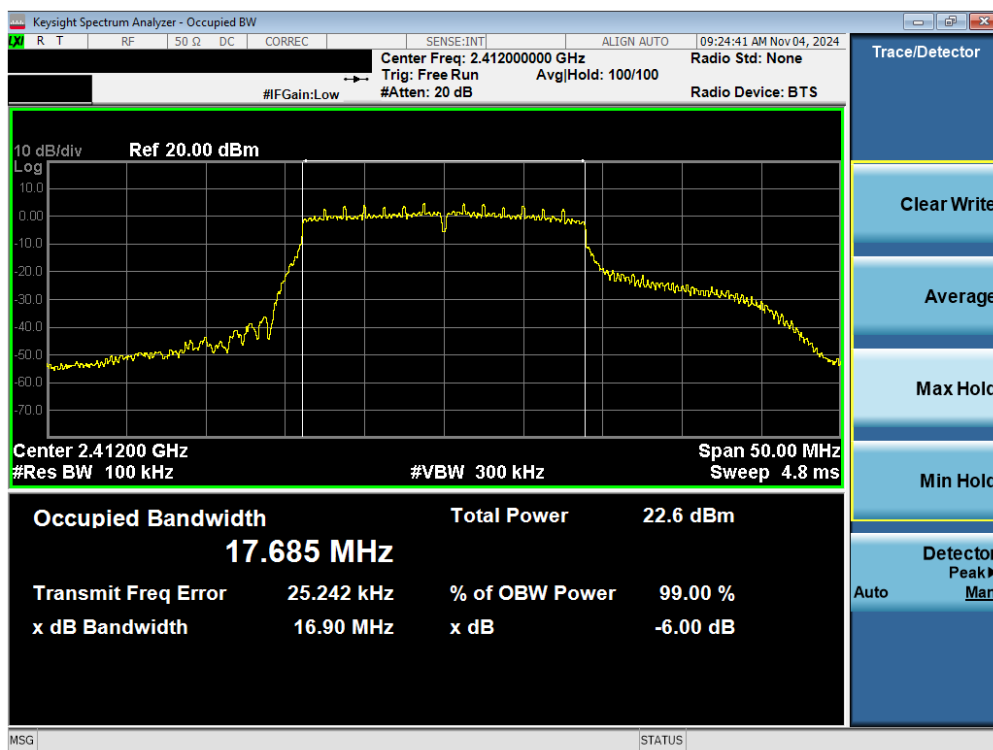

Plot 7-3. 6 dB BW and 99% OBW Plot Antenna WF8 (802.11n – Ch. 1)

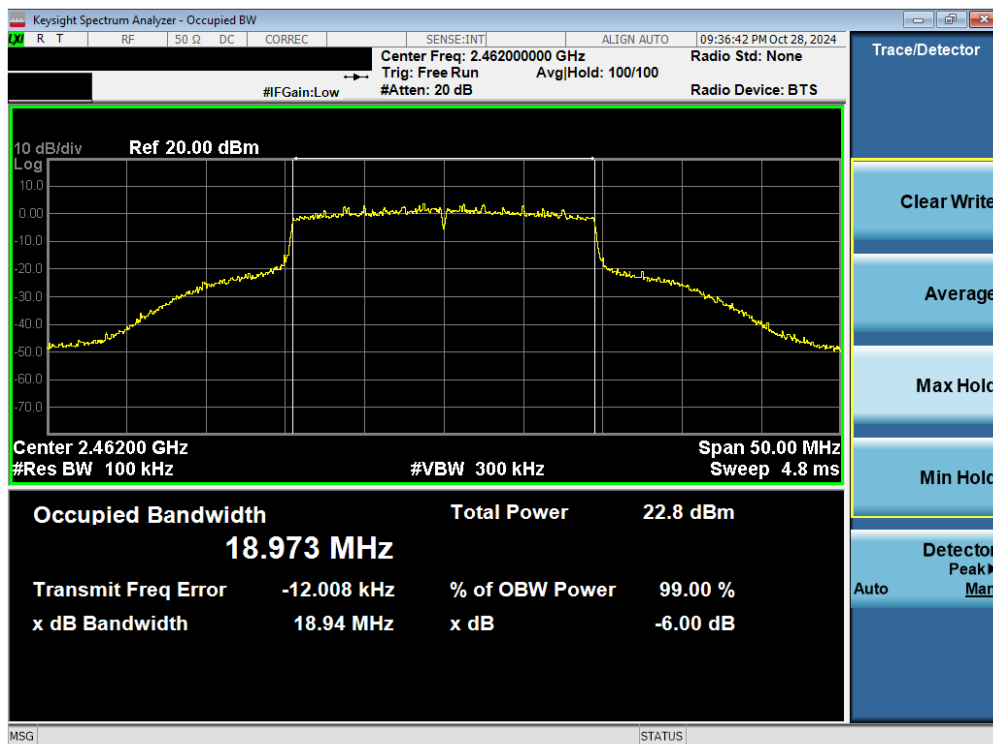

Plot 7-4. 6 dB BW and 99% OBW Plot Antenna WF8 (802.11axSU – Ch. 11)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 20 of 181

V 10.6 09/14/2023


7.2.2 Antenna WF7b 6 dB BW and 99% OBW Measurements

Frequency [MHz]	Channel	802.11 MODE	Data Rate [Mbps]	Measured 99% Occupied Bandwidth [MHz]	Measured 6dB Bandwidth [MHz]	Minimum 6dB Bandwidth [MHz]	Pass/Fail
2412	1	b	11	12.34	8.06	0.50	Pass
2437	6	b	11	12.38	7.42	0.50	Pass
2462	11	b	11	12.45	8.59	0.50	Pass
2412	1	g	12	16.51	16.33	0.50	Pass
2437	6	g	12	16.56	16.05	0.50	Pass
2462	11	g	12	16.54	16.32	0.50	Pass
2412	1	n	19.5/21.7 (MCS2)	17.69	17.30	0.50	Pass
2437	6	n	19.5/21.7 (MCS2)	17.76	17.01	0.50	Pass
2462	11	n	19.5/21.7 (MCS2)	17.73	16.96	0.50	Pass
2412	1	ax (SU)	24/25.8 (MCS2)	18.90	18.92	0.50	Pass
2437	6	ax (SU)	24/25.8 (MCS2)	18.98	18.74	0.50	Pass
2462	11	ax (SU)	24/25.8 (MCS2)	18.97	18.77	0.50	Pass


Table 7-3. Conducted Bandwidth Measurements Antenna WF7b

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 21 of 181

V 10.6 09/14/2023

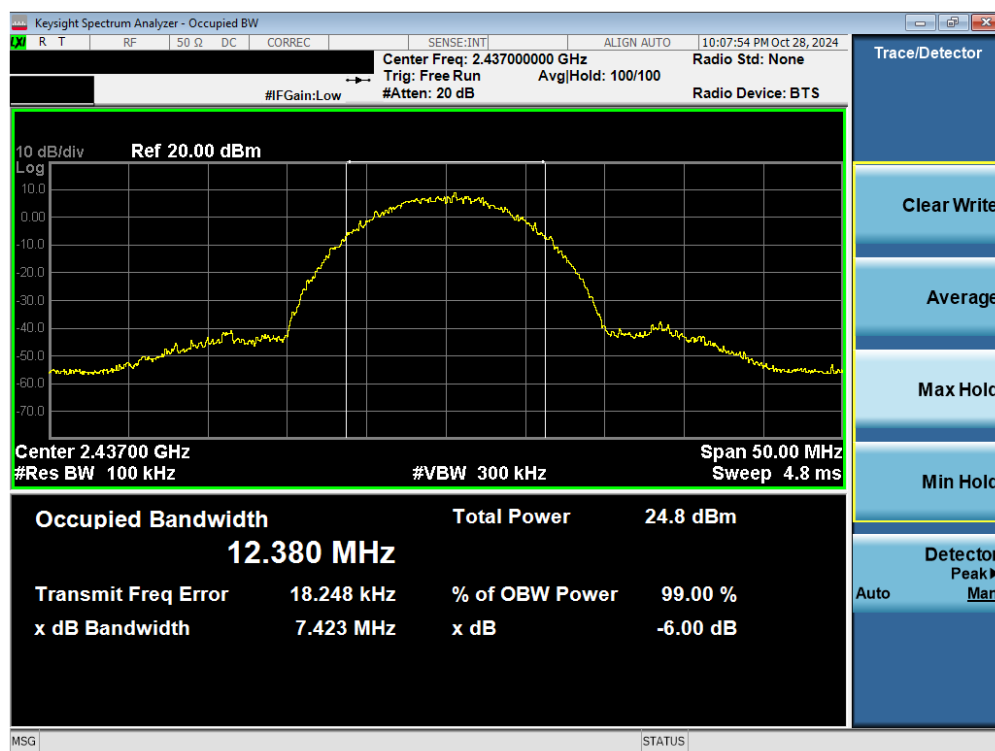


Plot 7-5. 6 dB BW and 99% OBW Plot Antenna WF7b (802.11b – Ch. 6)

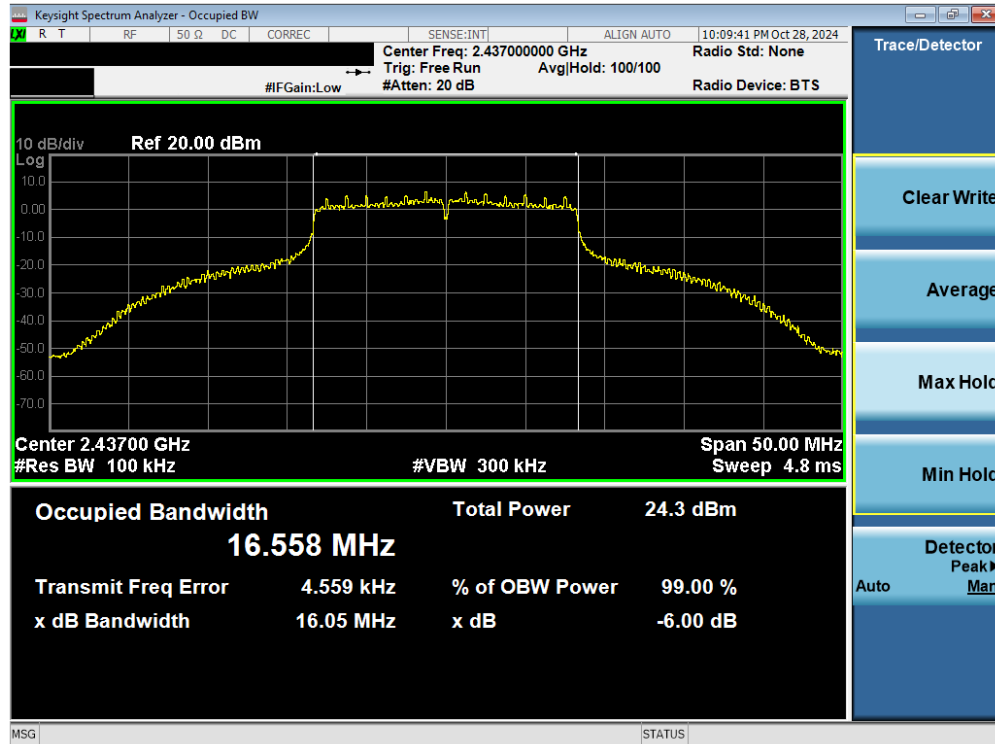


Plot 7-6. 6 dB BW and 99% OBW Plot Antenna WF7b (802.11g – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 22 of 181

V 10.6 09/14/2023

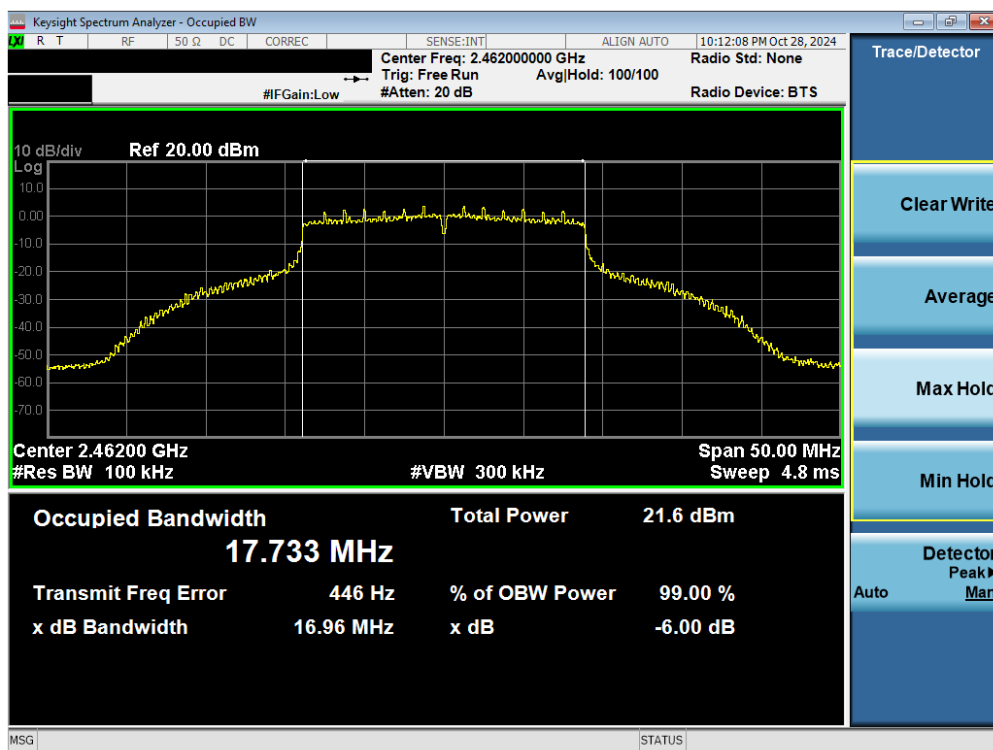

Plot 7-7. 6 dB BW and 99% OBW Plot Antenna WF7b (802.11n – Ch. 11)

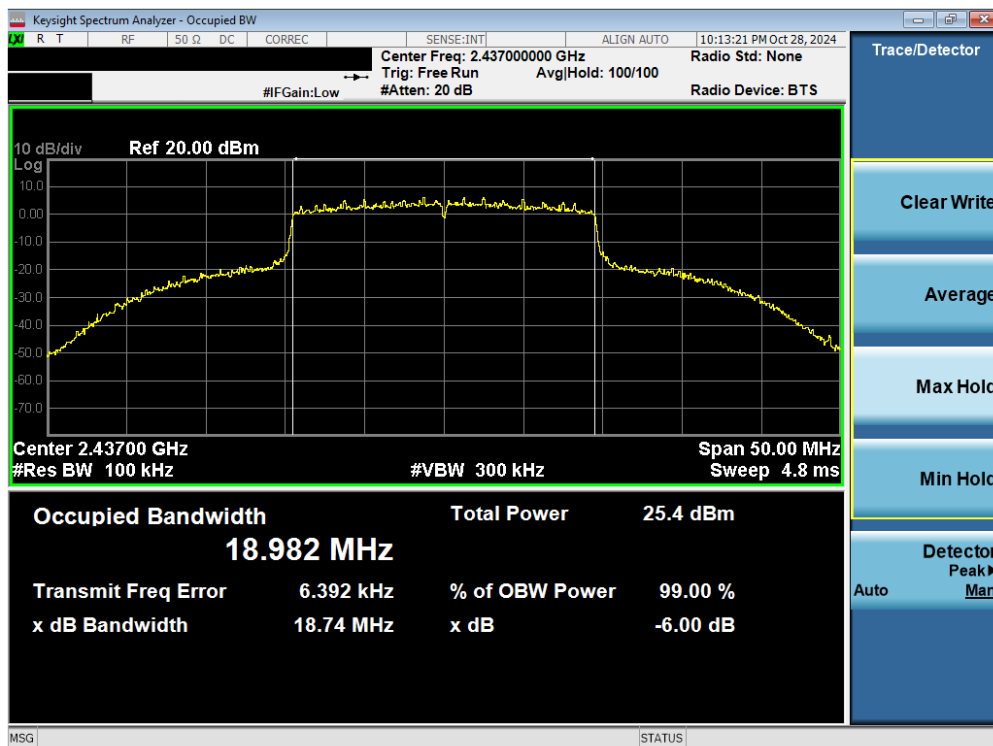

Plot 7-8. 6 dB BW and 99% OBW Plot Antenna WF7b (802.11axSU – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 23 of 181

V 10.6 09/14/2023

7.3 Output Power Measurement

§15.247(b)(3); RSS-247 [5.4]

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum peak conducted output power of digital modulation systems operating in the 2400-2483.5 MHz band is 1 Watt.

The conducted output power limit on paragraph above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For DTSSs employing digital modulation techniques operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.

Test Procedure Used

ANSI C63.10-2020 – Subclause 11.9.1.2 PKPM1 Peak Power Method
 KDB 558074 D01 v05r02 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method
 ANSI C63.10-2020 – Subclause 11.9.2.3.2 Method AVGPM-G
 KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)
 ANSI C63.10-2020 – Subclause 14.4 Measure-and-Sum Technique
 KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

1. 802.11ax does not support channel 13.

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 24 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.1 Average Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Freq [MHz]	Channel	Detector	Conducted Power [dBm]				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			802.11b	802.11g	802.11n	802.11ax (SU)						
2412	1	AVG	19.58	15.49	15.17	15.48	30.00	-10.42	1.20	20.78	36.02	-15.24
2417	2	AVG	19.59	18.45	18.18	16.84	30.00	-10.42	1.20	20.79	36.02	-15.24
2422	3	AVG	19.83	18.04	18.30	18.44	30.00	-10.17	1.20	21.03	36.02	-14.99
2427	4	AVG	19.83	18.04	18.29	18.45	30.00	-10.17	1.20	21.03	36.02	-14.99
2432	5	AVG	19.91	18.04	18.28	18.46	30.00	-10.09	1.20	21.11	36.02	-14.91
2437	6	AVG	19.64	18.60	18.28	18.45	30.00	-10.36	1.20	20.84	36.02	-15.18
2442	7	AVG	19.98	18.61	18.29	18.03	30.00	-10.02	1.20	21.18	36.02	-14.84
2447	8	AVG	19.79	18.83	18.05	18.30	30.00	-10.21	1.20	20.99	36.02	-15.03
2452	9	AVG	19.69	18.44	18.11	18.26	30.00	-10.31	1.20	20.89	36.02	-15.13
2457	10	AVG	19.79	17.94	17.62	17.34	30.00	-10.21	1.20	20.99	36.02	-15.03
2462	11	AVG	19.82	14.98	14.64	14.43	30.00	-10.18	1.20	21.02	36.02	-15.00
2467	12	AVG	14.90	13.48	13.17	11.94	30.00	-15.10	1.20	16.10	36.02	-19.92
2472	13	AVG	11.52	5.78	5.63	-	30.00	-18.48	1.20	12.72	36.02	-23.30

Table 7-4. Average Conducted Output Power Measurements Antenna WF8 (Dedicated)

Freq [MHz]	Channel	Detector	Conducted Power [dBm]				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			802.11b	802.11g	802.11n	802.11ax (SU)						
2412	1	AVG	16.17	14.16	14.44	13.71	30.00	-13.83	1.20	17.37	36.02	-18.65
2417	2	AVG	16.12	15.12	14.78	14.69	30.00	-13.88	1.20	17.32	36.02	-18.70
2422	3	AVG	16.26	15.22	14.93	14.71	30.00	-13.74	1.20	17.46	36.02	-18.56
2427	4	AVG	16.50	15.13	14.86	14.72	30.00	-13.50	1.20	17.70	36.02	-18.32
2432	5	AVG	16.49	15.14	14.90	14.72	30.00	-13.51	1.20	17.69	36.02	-18.33
2437	6	AVG	16.26	15.18	14.84	14.58	30.00	-13.74	1.20	17.46	36.02	-18.56
2442	7	AVG	16.48	15.14	14.83	14.60	30.00	-13.52	1.20	17.68	36.02	-18.34
2447	8	AVG	16.20	15.38	14.57	14.81	30.00	-13.80	1.20	17.40	36.02	-18.62
2452	9	AVG	16.27	15.42	14.70	14.77	30.00	-13.73	1.20	17.47	36.02	-18.55
2457	10	AVG	16.28	15.42	14.63	14.32	30.00	-13.72	1.20	17.48	36.02	-18.54
2462	11	AVG	16.23	11.60	11.70	10.92	30.00	-13.77	1.20	17.43	36.02	-18.59
2467	12	AVG	11.85	9.13	9.22	7.95	30.00	-18.15	1.20	13.05	36.02	-22.97
2472	13	AVG	9.93	3.70	3.82	-	30.00	-20.07	1.20	11.13	36.02	-24.89

Table 7-5. Average Conducted Output Power Measurements Antenna WF8 (Common)

Freq [MHz]	Channel	Detector	Conducted Power [dBm]				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			802.11b	802.11g	802.11n	802.11ax (SU)						
2412	1	AVG	16.46	15.12	15.36	15.08	30.00	-13.54	0.40	16.86	36.02	-19.16
2417	2	AVG	16.49	18.14	18.35	16.54	30.00	-11.65	0.40	18.75	36.02	-17.27
2422	3	AVG	16.43	18.24	18.40	18.08	30.00	-11.60	0.40	18.80	36.02	-17.22
2427	4	AVG	16.42	18.20	18.43	18.12	30.00	-11.57	0.40	18.83	36.02	-17.19
2432	5	AVG	16.48	18.22	18.46	18.12	30.00	-11.54	0.40	18.86	36.02	-17.16
2437	6	AVG	16.48	18.80	18.31	18.12	30.00	-11.20	0.40	19.20	36.02	-16.82
2442	7	AVG	16.00	18.83	18.48	18.18	30.00	-11.17	0.40	19.23	36.02	-16.79
2447	8	AVG	16.29	18.64	18.31	18.50	30.00	-11.36	0.40	19.04	36.02	-16.98
2452	9	AVG	16.33	18.11	18.36	18.36	30.00	-11.64	0.40	18.76	36.02	-17.26
2457	10	AVG	16.34	17.61	17.83	17.02	30.00	-12.18	0.40	18.23	36.02	-17.80
2462	11	AVG	16.39	14.66	14.86	14.06	30.00	-13.61	0.40	16.79	36.02	-19.23
2467	12	AVG	11.60	13.19	13.39	11.56	30.00	-16.61	0.40	13.79	36.02	-22.23
2472	13	AVG	9.80	5.97	5.72	-	30.00	-20.20	0.40	10.20	36.02	-25.82

Table 7-6. Average Conducted Output Power Measurements Antenna WF7b

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 25 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna WF7b	Antenna WF8	Summed						
2412	1	AVG	14.56	14.54	17.56	30.00	-12.44	3.82	21.38	36.02	-14.64
2417	2	AVG	17.48	17.42	20.46	30.00	-9.54	3.82	24.28	36.02	-11.74
2422	3	AVG	17.64	17.54	20.60	30.00	-9.40	3.82	24.42	36.02	-11.60
2427	4	AVG	17.66	17.98	20.83	30.00	-9.17	3.82	24.65	36.02	-11.37
2432	5	AVG	17.68	17.99	20.85	30.00	-9.15	3.82	24.67	36.02	-11.35
2437	6	AVG	18.18	18.06	21.13	30.00	-8.87	3.82	24.95	36.02	-11.07
2442	7	AVG	18.24	18.02	21.15	30.00	-8.85	3.82	24.97	36.02	-11.05
2447	8	AVG	18.05	18.30	21.18	30.00	-8.82	3.82	25.00	36.02	-11.02
2452	9	AVG	18.04	18.49	21.28	30.00	-8.72	3.82	25.10	36.02	-10.92
2457	10	AVG	17.59	17.58	20.59	30.00	-9.41	3.82	24.41	36.02	-11.61
2462	11	AVG	14.59	14.61	17.61	30.00	-12.39	3.82	21.43	36.02	-14.59
2467	12	AVG	13.05	13.16	16.11	30.00	-13.89	3.82	19.93	36.02	-16.09
2472	13	AVG	5.29	5.19	8.25	30.00	-21.75	3.82	12.07	36.02	-23.95

Table 7-7. Average Conducted Output Power Measurements CDD (Dedicated) (802.11g)

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna WF7b	Antenna WF8	Summed						
2412	1	AVG	14.61	14.77	17.70	30.00	-12.30	3.82	21.52	36.02	-14.50
2417	2	AVG	17.13	17.18	20.17	30.00	-9.83	3.82	23.99	36.02	-12.03
2422	3	AVG	17.68	17.72	20.71	30.00	-9.29	3.82	24.53	36.02	-11.49
2427	4	AVG	17.68	17.74	20.72	30.00	-9.28	3.82	24.54	36.02	-11.48
2432	5	AVG	17.72	17.72	20.73	30.00	-9.27	3.82	24.55	36.02	-11.47
2437	6	AVG	18.29	18.30	21.30	30.00	-8.70	3.82	25.12	36.02	-10.90
2442	7	AVG	18.34	18.30	21.33	30.00	-8.67	3.82	25.15	36.02	-10.87
2447	8	AVG	18.07	18.05	21.07	30.00	-8.93	3.82	24.89	36.02	-11.13
2452	9	AVG	18.11	18.05	21.09	30.00	-8.91	3.82	24.91	36.02	-11.11
2457	10	AVG	17.67	17.55	20.62	30.00	-9.38	3.82	24.44	36.02	-11.58
2462	11	AVG	14.65	14.66	17.66	30.00	-12.34	3.82	21.48	36.02	-14.54
2467	12	AVG	13.11	13.19	16.16	30.00	-13.84	3.82	19.98	36.02	-16.04
2472	13	AVG	5.41	5.20	8.31	30.00	-21.69	3.82	12.13	36.02	-23.89

Table 7-8. Average Conducted Output Power Measurements CDD (Dedicated) (802.11n)

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 26 of 181

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna WF7b	Antenna WF8	Summed						
2412	1	AVG	14.78	14.88	17.84	30.00	-12.16	3.82	21.66	36.02	-14.36
2417	2	AVG	16.26	16.28	19.28	30.00	-10.72	3.82	23.10	36.02	-12.92
2422	3	AVG	17.74	17.82	20.79	30.00	-9.21	3.82	24.61	36.02	-11.41
2427	4	AVG	17.77	17.88	20.84	30.00	-9.16	3.82	24.66	36.02	-11.36
2432	5	AVG	17.79	17.87	20.84	30.00	-9.16	3.82	24.66	36.02	-11.36
2437	6	AVG	18.32	18.31	21.33	30.00	-8.67	3.82	25.15	36.02	-10.87
2442	7	AVG	18.37	18.44	21.41	30.00	-8.59	3.82	25.23	36.02	-10.79
2447	8	AVG	18.20	18.15	21.18	30.00	-8.82	3.82	25.00	36.02	-11.02
2452	9	AVG	18.13	18.15	21.15	30.00	-8.85	3.82	24.97	36.02	-11.05
2457	10	AVG	16.71	16.67	19.70	30.00	-10.30	3.82	23.52	36.02	-12.50
2462	11	AVG	14.26	14.28	17.28	30.00	-12.72	3.82	21.10	36.02	-14.92
2467	12	AVG	11.71	11.83	14.78	30.00	-15.22	3.82	18.60	36.02	-17.42

Table 7-9. Average Conducted Output Power Measurements CDD (Dedicated) (802.11ax - SU)

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna WF8	Antenna WF7b	Summed						
2412	1	AVG	14.06	14.56	17.33	30.00	-12.67	3.82	21.15	36.02	-14.87
2417	2	AVG	14.73	17.48	19.33	30.00	-10.67	3.82	23.15	36.02	-12.87
2422	3	AVG	14.82	17.64	19.46	30.00	-10.54	3.82	23.28	36.02	-12.74
2427	4	AVG	14.83	17.66	19.48	30.00	-10.52	3.82	23.30	36.02	-12.72
2432	5	AVG	14.75	17.68	19.47	30.00	-10.53	3.82	23.29	36.02	-12.73
2437	6	AVG	14.80	18.18	19.82	30.00	-10.18	3.82	23.64	36.02	-12.38
2442	7	AVG	14.76	18.24	19.85	30.00	-10.15	3.82	23.67	36.02	-12.35
2447	8	AVG	14.98	18.05	19.79	30.00	-10.21	3.82	23.61	36.02	-12.41
2452	9	AVG	14.93	18.04	19.77	30.00	-10.23	3.82	23.59	36.02	-12.43
2457	10	AVG	14.94	17.59	19.47	30.00	-10.53	3.82	23.29	36.02	-12.73
2462	11	AVG	11.10	14.59	16.20	30.00	-13.80	3.82	20.02	36.02	-16.00
2467	12	AVG	8.67	13.05	14.40	30.00	-15.60	3.82	18.22	36.02	-17.80
2472	13	AVG	2.77	5.29	7.22	30.00	-22.78	3.82	11.04	36.02	-24.98

Table 7-10. Average Conducted Output Power Measurements CDD (Common) (802.11g)

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 27 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna WF8	Antenna WF7b	Summed						
2412	1	AVG	14.39	14.61	17.51	30.00	-12.49	3.82	21.33	36.02	-14.69
2417	2	AVG	14.74	17.13	19.11	30.00	-10.89	3.82	22.93	36.02	-13.09
2422	3	AVG	14.87	17.68	19.51	30.00	-10.49	3.82	23.33	36.02	-12.69
2427	4	AVG	14.83	17.68	19.49	30.00	-10.51	3.82	23.31	36.02	-12.71
2432	5	AVG	14.76	17.72	19.49	30.00	-10.51	3.82	23.31	36.02	-12.71
2437	6	AVG	14.88	18.29	19.92	30.00	-10.08	3.82	23.74	36.02	-12.28
2442	7	AVG	14.85	18.34	19.94	30.00	-10.06	3.82	23.76	36.02	-12.26
2447	8	AVG	14.62	18.07	19.69	30.00	-10.31	3.82	23.51	36.02	-12.51
2452	9	AVG	14.60	18.11	19.71	30.00	-10.29	3.82	23.53	36.02	-12.49
2457	10	AVG	14.61	17.67	19.42	30.00	-10.58	3.82	23.24	36.02	-12.78
2462	11	AVG	11.18	14.65	16.26	30.00	-13.74	3.82	20.08	36.02	-15.94
2467	12	AVG	8.84	13.11	14.49	30.00	-15.51	3.82	18.31	36.02	-17.71
2472	13	AVG	2.90	5.41	7.34	30.00	-22.66	3.82	11.16	36.02	-24.86

Table 7-11. Average Conducted Output Power Measurements CDD (Common) (802.11n)

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna WF8	Antenna WF7b	Summed						
2412	1	AVG	14.00	14.78	17.42	30.00	-12.58	3.82	21.24	36.02	-14.78
2417	2	AVG	14.83	16.26	18.61	30.00	-11.39	3.82	22.43	36.02	-13.59
2422	3	AVG	14.90	17.74	19.56	30.00	-10.44	3.82	23.38	36.02	-12.64
2427	4	AVG	14.91	17.77	19.58	30.00	-10.42	3.82	23.40	36.02	-12.62
2432	5	AVG	14.84	17.79	19.57	30.00	-10.43	3.82	23.39	36.02	-12.63
2437	6	AVG	14.98	18.32	19.98	30.00	-10.02	3.82	23.80	36.02	-12.22
2442	7	AVG	14.89	18.37	19.98	30.00	-10.02	3.82	23.80	36.02	-12.22
2447	8	AVG	14.69	18.20	19.80	30.00	-10.20	3.82	23.62	36.02	-12.40
2452	9	AVG	14.66	18.13	19.74	30.00	-10.26	3.82	23.56	36.02	-12.46
2457	10	AVG	14.22	16.71	18.65	30.00	-11.35	3.82	22.47	36.02	-13.55
2462	11	AVG	10.29	14.26	15.72	30.00	-14.28	3.82	19.54	36.02	-16.48
2467	12	AVG	7.87	11.71	13.21	30.00	-16.79	3.82	17.03	36.02	-18.99

Table 7-12. Average Conducted Output Power Measurements CDD (Common) (802.11ax - SU)

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 28 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.3.2 Peak Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Freq [MHz]	Channel	Detector	Conducted Power [dBm]				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			802.11b	802.11g	802.11n	802.11ax (SU)						
2412	1	PEAK	22.08	21.46	21.54	22.16	30.00	-7.84	1.20	23.36	36.02	-12.66
2417	2	PEAK	22.07	23.70	23.68	22.62	30.00	-6.30	1.20	24.90	36.02	-11.12
2422	3	PEAK	22.29	23.27	23.91	24.13	30.00	-5.87	1.20	25.33	36.02	-10.69
2427	4	PEAK	22.30	23.06	23.69	23.93	30.00	-6.07	1.20	25.13	36.02	-10.89
2432	5	PEAK	22.34	23.05	23.65	23.89	30.00	-6.11	1.20	25.09	36.02	-10.93
2437	6	PEAK	22.21	23.58	23.62	23.84	30.00	-6.16	1.20	25.04	36.02	-10.98
2442	7	PEAK	22.38	23.57	23.61	23.42	30.00	-6.39	1.20	24.81	36.02	-11.21
2447	8	PEAK	22.18	23.74	23.34	23.64	30.00	-6.26	1.20	24.94	36.02	-11.08
2452	9	PEAK	22.14	23.37	23.40	23.61	30.00	-6.39	1.20	24.81	36.02	-11.21
2457	10	PEAK	22.21	22.89	22.93	22.72	30.00	-7.08	1.20	24.13	36.02	-11.90
2462	11	PEAK	22.22	20.16	20.19	20.06	30.00	-7.78	1.20	23.42	36.02	-12.60
2467	12	PEAK	17.42	18.75	18.77	17.66	30.00	-11.23	1.20	19.97	36.02	-16.05
2472	13	PEAK	14.04	16.58	12.03	-	30.00	-13.42	1.20	17.78	36.02	-18.24

Table 7-13. Peak Conducted Output Power Measurements Antenna WF8 (Dedicated)

Freq [MHz]	Channel	Detector	Conducted Power [dBm]				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			802.11b	802.11g	802.11n	802.11ax (SU)						
2412	1	PEAK	18.69	20.01	20.90	20.34	30.00	-9.10	1.20	22.10	36.02	-13.92
2417	2	PEAK	18.60	20.13	20.19	20.40	30.00	-9.60	1.20	21.60	36.02	-14.42
2422	3	PEAK	18.81	20.47	20.52	20.38	30.00	-9.48	1.20	21.72	36.02	-14.30
2427	4	PEAK	18.95	20.12	20.20	20.10	30.00	-9.80	1.20	21.40	36.02	-14.62
2432	5	PEAK	18.93	20.18	20.16	20.15	30.00	-9.82	1.20	21.38	36.02	-14.64
2437	6	PEAK	18.80	20.11	20.04	19.99	30.00	-9.89	1.20	21.31	36.02	-14.71
2442	7	PEAK	18.90	20.14	20.20	20.01	30.00	-9.80	1.20	21.40	36.02	-14.62
2447	8	PEAK	18.68	20.28	19.88	20.04	30.00	-9.73	1.20	21.48	36.02	-14.55
2452	9	PEAK	18.68	20.43	19.88	20.04	30.00	-9.57	1.20	21.63	36.02	-14.39
2457	10	PEAK	18.69	20.34	20.00	19.56	30.00	-9.67	1.20	21.54	36.02	-14.49
2462	11	PEAK	18.66	16.66	17.16	16.45	30.00	-11.34	1.20	19.86	36.02	-16.16
2467	12	PEAK	14.36	14.22	14.67	13.57	30.00	-15.33	1.20	15.87	36.02	-20.15
2472	13	PEAK	12.44	9.63	10.13	-	30.00	-17.56	1.20	13.64	36.02	-22.38

Table 7-14. Peak Conducted Output Power Measurements Antenna WF8 (Common)

Freq [MHz]	Channel	Detector	Conducted Power [dBm]				Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			802.11b	802.11g	802.11n	802.11ax (SU)						
2412	1	PEAK	19.01	21.15	21.72	21.69	30.00	-8.28	0.40	22.12	36.02	-13.90
2417	2	PEAK	19.02	23.36	23.89	22.24	30.00	-6.11	0.40	24.29	36.02	-11.73
2422	3	PEAK	18.98	23.49	24.14	23.72	30.00	-5.86	0.40	24.54	36.02	-11.48
2427	4	PEAK	19.01	23.20	23.85	23.57	30.00	-6.16	0.40	24.25	36.02	-11.78
2432	5	PEAK	19.03	23.19	23.77	23.59	30.00	-6.23	0.40	24.17	36.02	-11.85
2437	6	PEAK	19.06	23.82	23.63	23.59	30.00	-6.18	0.40	24.22	36.02	-11.80
2442	7	PEAK	18.58	23.84	23.79	23.67	30.00	-6.16	0.40	24.24	36.02	-11.78
2447	8	PEAK	18.84	23.71	23.72	23.91	30.00	-6.09	0.40	24.31	36.02	-11.71
2452	9	PEAK	18.88	23.12	23.78	23.92	30.00	-6.08	0.40	24.32	36.02	-11.70
2457	10	PEAK	18.91	22.57	23.15	22.42	30.00	-6.85	0.40	23.55	36.02	-12.47
2462	11	PEAK	18.95	19.82	20.43	19.75	30.00	-9.57	0.40	20.83	36.02	-15.19
2467	12	PEAK	14.09	18.42	18.98	17.32	30.00	-11.02	0.40	19.38	36.02	-16.64
2472	13	PEAK	12.33	11.91	12.13	-	30.00	-17.67	0.40	12.73	36.02	-23.29

Table 7-15. Peak Conducted Output Power Measurements Antenna WF7b

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 29 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna WF7b	Antenna WF8	Summed						
2412	1	PEAK	20.37	20.34	23.36	30.00	-6.64	3.82	27.18	36.02	-8.84
2417	2	PEAK	22.43	22.36	25.40	30.00	-4.60	3.82	29.22	36.02	-6.80
2422	3	PEAK	22.56	22.48	25.53	30.00	-4.47	3.82	29.35	36.02	-6.67
2427	4	PEAK	22.39	22.74	25.58	30.00	-4.42	3.82	29.40	36.02	-6.62
2432	5	PEAK	22.41	22.70	25.57	30.00	-4.43	3.82	29.39	36.02	-6.63
2437	6	PEAK	22.91	22.83	25.88	30.00	-4.12	3.82	29.70	36.02	-6.32
2442	7	PEAK	22.95	22.70	25.84	30.00	-4.16	3.82	29.66	36.02	-6.36
2447	8	PEAK	22.75	22.93	25.85	30.00	-4.15	3.82	29.67	36.02	-6.35
2452	9	PEAK	22.76	23.12	25.95	30.00	-4.05	3.82	29.77	36.02	-6.25
2457	10	PEAK	22.32	22.25	25.30	30.00	-4.70	3.82	29.12	36.02	-6.90
2462	11	PEAK	19.57	19.58	22.59	30.00	-7.41	3.82	26.41	36.02	-9.61
2467	12	PEAK	18.09	18.22	21.16	30.00	-8.84	3.82	24.98	36.02	-11.04
2472	13	PEAK	11.14	10.95	14.05	30.00	-15.95	3.82	17.87	36.02	-18.15

Table 7-16. Peak Conducted Output Power Measurements CDD (Dedicated) (802.11g)

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna WF7b	Antenna WF8	Summed						
2412	1	PEAK	20.96	21.12	24.05	30.00	-5.95	3.82	27.87	36.02	-8.15
2417	2	PEAK	22.57	22.60	25.60	30.00	-4.40	3.82	29.42	36.02	-6.60
2422	3	PEAK	23.11	23.15	26.14	30.00	-3.86	3.82	29.96	36.02	-6.06
2427	4	PEAK	22.91	22.89	25.91	30.00	-4.09	3.82	29.73	36.02	-6.29
2432	5	PEAK	22.92	22.84	25.89	30.00	-4.11	3.82	29.71	36.02	-6.31
2437	6	PEAK	23.47	23.42	26.46	30.00	-3.54	3.82	30.28	36.02	-5.74
2442	7	PEAK	23.49	23.43	26.47	30.00	-3.53	3.82	30.29	36.02	-5.73
2447	8	PEAK	23.26	23.16	26.22	30.00	-3.78	3.82	30.04	36.02	-5.98
2452	9	PEAK	23.31	23.19	26.26	30.00	-3.74	3.82	30.08	36.02	-5.94
2457	10	PEAK	22.93	22.71	25.83	30.00	-4.17	3.82	29.65	36.02	-6.37
2462	11	PEAK	20.15	20.19	23.18	30.00	-6.82	3.82	27.00	36.02	-9.02
2467	12	PEAK	18.63	18.73	21.69	30.00	-8.31	3.82	25.51	36.02	-10.51
2472	13	PEAK	11.76	11.56	14.67	30.00	-15.33	3.82	18.49	36.02	-17.53

Table 7-17. Peak Conducted Output Power Measurements CDD (Dedicated) (802.11n)

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 30 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna WF7b	Antenna WF8	Summed						
2412	1	PEAK	21.42	21.46	24.45	30.00	-5.55	3.82	28.27	36.02	-7.75
2417	2	PEAK	21.97	22.00	25.00	30.00	-5.00	3.82	28.82	36.02	-7.20
2422	3	PEAK	23.36	23.47	26.42	30.00	-3.58	3.82	30.24	36.02	-5.78
2427	4	PEAK	23.15	23.28	26.23	30.00	-3.77	3.82	30.05	36.02	-5.97
2432	5	PEAK	23.19	23.21	26.21	30.00	-3.79	3.82	30.03	36.02	-5.99
2437	6	PEAK	23.68	23.47	26.58	30.00	-3.42	3.82	30.40	36.02	-5.62
2442	7	PEAK	23.75	23.69	26.73	30.00	-3.27	3.82	30.55	36.02	-5.47
2447	8	PEAK	23.58	23.32	26.46	30.00	-3.54	3.82	30.28	36.02	-5.74
2452	9	PEAK	23.52	23.43	26.49	30.00	-3.51	3.82	30.31	36.02	-5.71
2457	10	PEAK	22.12	22.04	25.09	30.00	-4.91	3.82	28.91	36.02	-7.11
2462	11	PEAK	19.96	19.96	22.97	30.00	-7.03	3.82	26.79	36.02	-9.23
2467	12	PEAK	17.48	17.60	20.55	30.00	-9.45	3.82	24.37	36.02	-11.65

Table 7-18. Peak Conducted Output Power Measurements CDD (Dedicated) (802.11ax - SU)

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna WF8	Antenna WF7b	Summed						
2412	1	PEAK	21.39	20.37	23.92	30.00	-6.08	3.82	27.74	36.02	-8.28
2417	2	PEAK	19.50	22.43	24.22	30.00	-5.78	3.82	28.04	36.02	-7.98
2422	3	PEAK	19.66	22.56	24.36	30.00	-5.64	3.82	28.18	36.02	-7.84
2427	4	PEAK	19.46	22.39	24.18	30.00	-5.82	3.82	28.00	36.02	-8.02
2432	5	PEAK	19.34	22.41	24.15	30.00	-5.85	3.82	27.97	36.02	-8.05
2437	6	PEAK	19.46	22.91	24.53	30.00	-5.47	3.82	28.35	36.02	-7.67
2442	7	PEAK	19.41	22.95	24.54	30.00	-5.46	3.82	28.36	36.02	-7.66
2447	8	PEAK	19.64	22.75	24.48	30.00	-5.52	3.82	28.30	36.02	-7.72
2452	9	PEAK	19.46	22.76	24.42	30.00	-5.58	3.82	28.24	36.02	-7.78
2457	10	PEAK	19.60	22.32	24.18	30.00	-5.82	3.82	28.00	36.02	-8.02
2462	11	PEAK	15.98	19.57	21.14	30.00	-8.86	3.82	24.96	36.02	-11.06
2467	12	PEAK	13.61	18.09	19.41	30.00	-10.59	3.82	23.23	36.02	-12.79
2472	13	PEAK	8.56	11.14	13.05	30.00	-16.95	3.82	16.87	36.02	-19.15

Table 7-19. Peak Conducted Output Power Measurements CDD (Common) (802.11g)

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 31 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna WF8	Antenna WF7b	Summed						
2412	1	PEAK	20.54	20.96	23.76	30.00	-6.24	3.82	27.58	36.02	-8.44
2417	2	PEAK	19.94	22.57	24.46	30.00	-5.54	3.82	28.28	36.02	-7.74
2422	3	PEAK	20.07	23.11	24.86	30.00	-5.14	3.82	28.68	36.02	-7.34
2427	4	PEAK	19.95	22.91	24.69	30.00	-5.31	3.82	28.51	36.02	-7.51
2432	5	PEAK	19.81	22.92	24.64	30.00	-5.36	3.82	28.46	36.02	-7.56
2437	6	PEAK	20.06	23.47	25.10	30.00	-4.90	3.82	28.92	36.02	-7.10
2442	7	PEAK	20.01	23.49	25.10	30.00	-4.90	3.82	28.92	36.02	-7.10
2447	8	PEAK	19.75	23.26	24.86	30.00	-5.14	3.82	28.68	36.02	-7.34
2452	9	PEAK	19.70	23.31	24.88	30.00	-5.12	3.82	28.70	36.02	-7.32
2457	10	PEAK	19.76	22.93	24.64	30.00	-5.36	3.82	28.46	36.02	-7.56
2462	11	PEAK	16.59	20.15	21.73	30.00	-8.27	3.82	25.55	36.02	-10.47
2467	12	PEAK	14.24	18.63	19.98	30.00	-10.02	3.82	23.80	36.02	-12.22
2472	13	PEAK	9.15	11.76	13.66	30.00	-16.34	3.82	17.48	36.02	-18.54

Table 7-20. Peak Conducted Output Power Measurements CDD (Common) (802.11n)

Freq [MHz]	Channel	Detector	Conducted Power [dBm]			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
			Antenna WF8	Antenna WF7b	Summed						
2412	1	PEAK	20.46	21.42	23.97	30.00	-6.03	3.82	27.79	36.02	-8.23
2417	2	PEAK	20.23	21.97	24.19	30.00	-5.81	3.82	28.01	36.02	-8.01
2422	3	PEAK	20.49	23.36	25.17	30.00	-4.83	3.82	28.99	36.02	-7.03
2427	4	PEAK	20.21	23.15	24.94	30.00	-5.06	3.82	28.76	36.02	-7.26
2432	5	PEAK	20.04	23.19	24.90	30.00	-5.10	3.82	28.72	36.02	-7.30
2437	6	PEAK	20.58	23.68	25.41	30.00	-4.59	3.82	29.23	36.02	-6.79
2442	7	PEAK	20.20	23.75	25.33	30.00	-4.67	3.82	29.15	36.02	-6.87
2447	8	PEAK	20.00	23.58	25.16	30.00	-4.84	3.82	28.98	36.02	-7.04
2452	9	PEAK	19.98	23.52	25.11	30.00	-4.89	3.82	28.93	36.02	-7.09
2457	10	PEAK	19.55	22.12	24.04	30.00	-5.96	3.82	27.86	36.02	-8.16
2462	11	PEAK	15.88	19.96	21.39	30.00	-8.61	3.82	25.21	36.02	-10.81
2467	12	PEAK	13.59	17.48	18.97	30.00	-11.03	3.82	22.79	36.02	-13.23

Table 7-21. Peak Conducted Output Power Measurements CDD (Common) (802.11ax - SU)

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 32 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



Note:

Per ANSI C63.10-2020 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Antenna WF8 (Common) and Antenna WF7b were first measured separately during TxBF transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2020 Section 14.6.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample CDD Calculation:

At 2412MHz the average conducted output power was measured to be 14.39 dBm for Antenna WF8 and 14.61 dBm for Antenna WF7b.

$$\text{Antenna WF8} + \text{Antenna WF7b} = \text{CDD}$$

$$(14.39 \text{ dBm} + 14.61 \text{ dBm}) = (27.479 \text{ mW} + 28.907 \text{ mW}) = 56.836 \text{ mW} = 17.51 \text{ dBm}$$

Sample e.i.r.p. Calculation:

At 2402MHz, the average conducted output power was calculated to be 17.51 dBm with directional gain of 3.82 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$17.51 \text{ dBm} + 3.82 \text{ dBi} = 21.33 \text{ dBm}$$

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 33 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2020 – Subclause 11.10.2 Method PKPSD

KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

ANSI C63.10-2020 – Subclause 14.5.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span > 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

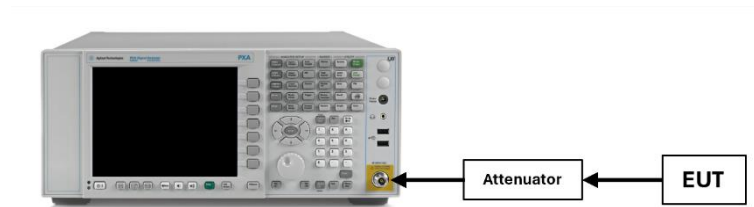


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. All data rates have been investigated, and tabular data has been reported for the worst-case data rate. Only the worst-case plot per mode was reported.

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 34 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.4.1 Antenna WF8 (Dedicated) Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 MODE	Data Rate [Mbps]	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]	Pass/Fail
2412	1	b	11	-3.67	8.00	-11.67	Pass
2437	6	b	11	-3.29	8.00	-11.29	Pass
2462	11	b	11	-1.19	8.00	-9.19	Pass
2412	1	g	12	-7.84	8.00	-15.84	Pass
2437	6	g	24	-4.82	8.00	-12.82	Pass
2462	11	g	12	-8.70	8.00	-16.70	Pass
2412	1	n	39/43.3 (MCS4)	-8.34	8.00	-16.34	Pass
2437	6	n	39/43.3 (MCS4)	-3.94	8.00	-11.94	Pass
2462	11	n	39/43.3 (MCS4)	-8.41	8.00	-16.41	Pass
2412	1	ax (SU)	24/25.8 (MCS2)	-9.75	8.00	-17.75	Pass
2437	6	ax (SU)	24/25.8 (MCS2)	-6.36	8.00	-14.36	Pass
2462	11	ax (SU)	24/25.8 (MCS2)	-10.52	8.00	-18.52	Pass


Table 7-22. Conducted Power Density Measurements Antenna WF8 (Dedicated)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 35 of 181

V 10.6 09/14/2023

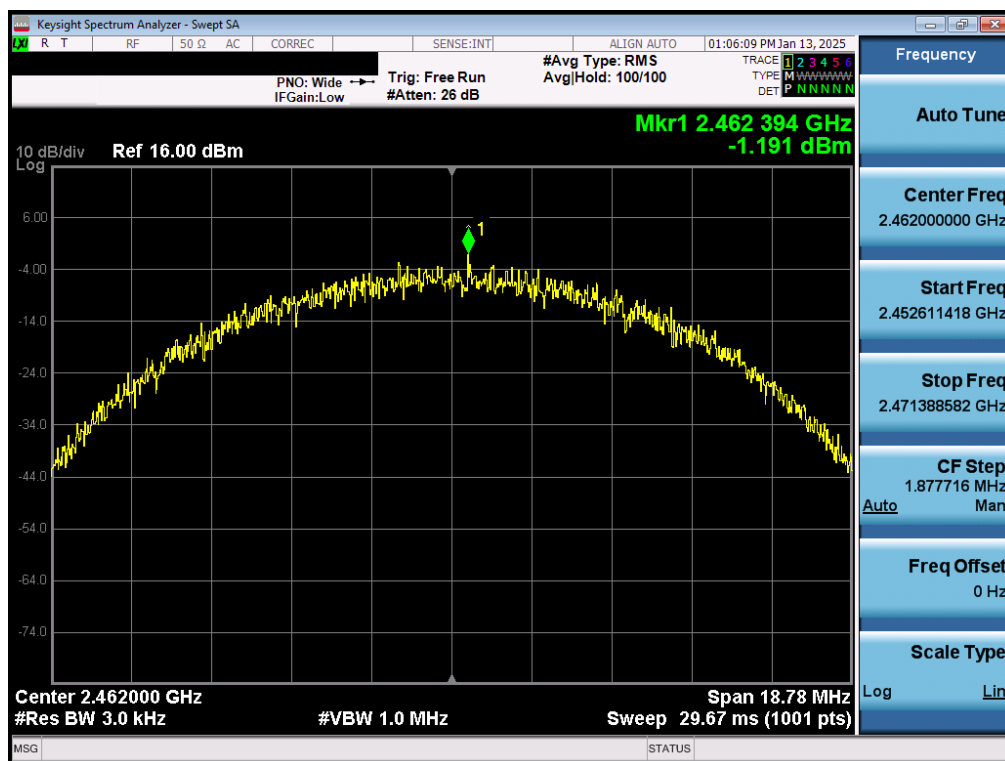


Plot 7-9. Power Spectral Density Plot Antenna WF8 (Dedicated) (802.11b – Ch. 11)

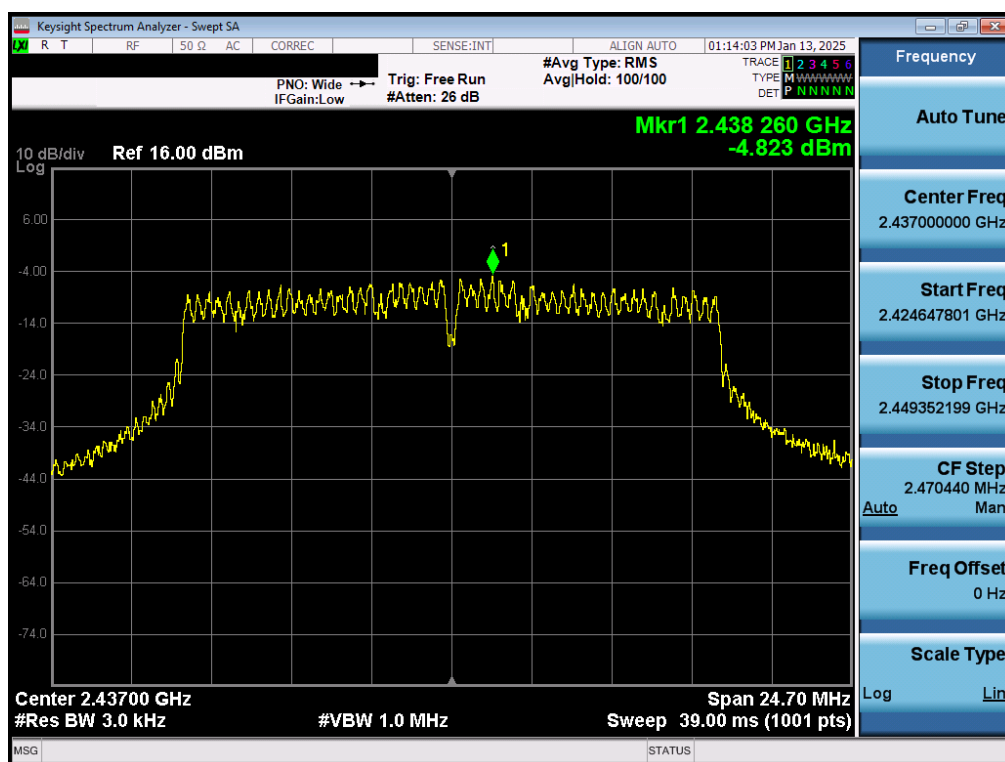


Plot 7-10. Power Spectral Density Plot Antenna WF8 (Dedicated) (802.11g – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 36 of 181

V 10.6 09/14/2023

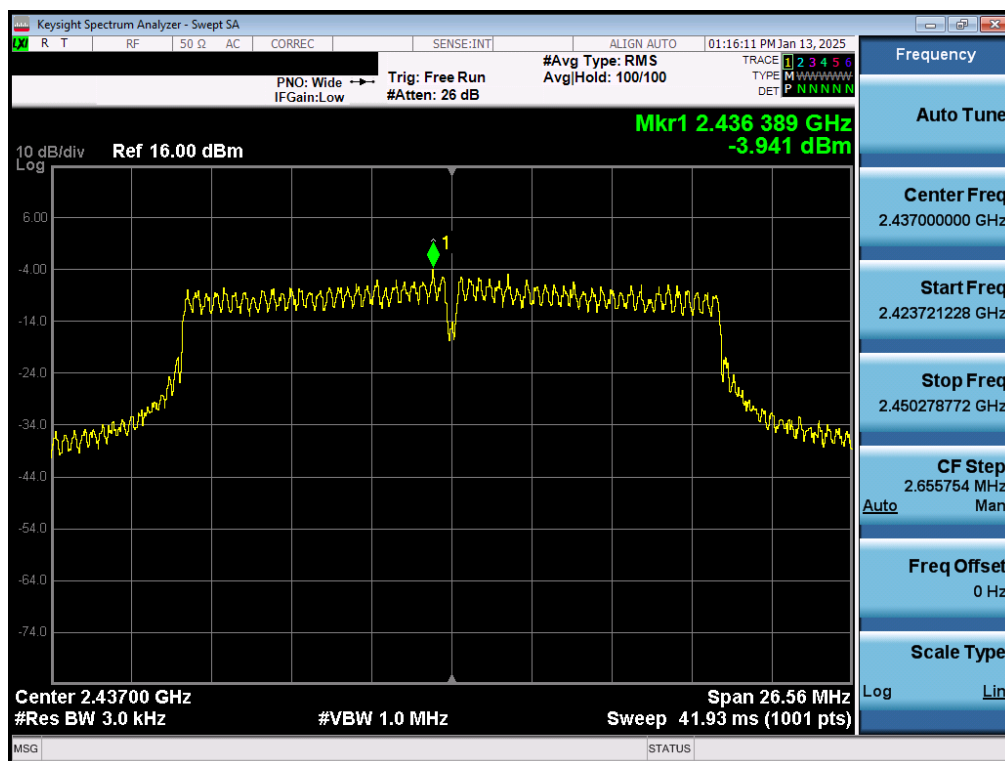

Plot 7-11. Power Spectral Density Plot Antenna WF8 (Dedicated) (802.11n – Ch. 6)

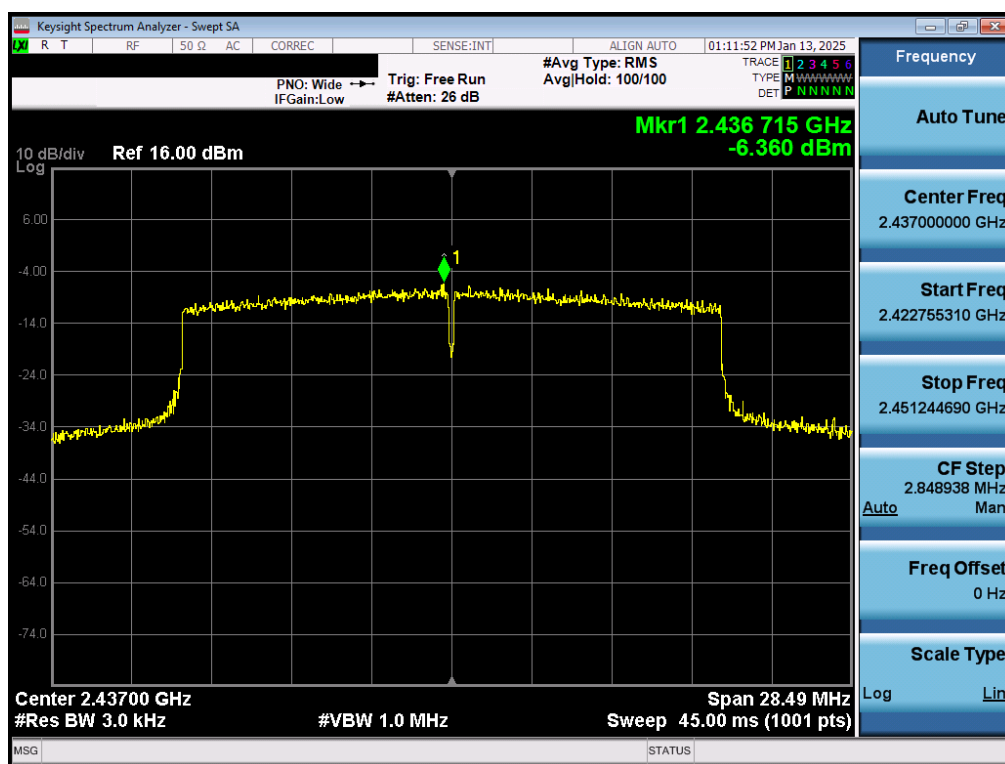

Plot 7-12. Power Spectral Density Plot Antenna WF8 (Dedicated) (802.11axSU – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 37 of 181

V 10.6 09/14/2023


7.4.2 Antenna WF8 (Common) Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 MODE	Data Rate [Mbps]	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]	Pass/Fail
2412	1	b	11	-6.16	8.00	-14.16	Pass
2437	6	b	11	-7.17	8.00	-15.17	Pass
2462	11	b	11	-5.30	8.00	-13.30	Pass
2412	1	g	12	-9.18	8.00	-17.18	Pass
2437	6	g	12	-7.92	8.00	-15.92	Pass
2462	11	g	12	-11.58	8.00	-19.58	Pass
2412	1	n	19.5/21.7 (MCS2)	-9.46	8.00	-17.46	Pass
2437	6	n	19.5/21.7 (MCS2)	-8.68	8.00	-16.68	Pass
2462	11	n	19.5/21.7 (MCS2)	-11.81	8.00	-19.81	Pass
2412	1	ax (SU)	24/25.8 (MCS2)	-11.08	8.00	-19.08	Pass
2437	6	ax (SU)	49/51.6 (MCS4)	-10.00	8.00	-18.00	Pass
2462	11	ax (SU)	24/25.8 (MCS2)	-14.12	8.00	-22.12	Pass


Table 7-23. Conducted Power Density Measurements Antenna WF8 (Common)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 38 of 181

V 10.6 09/14/2023

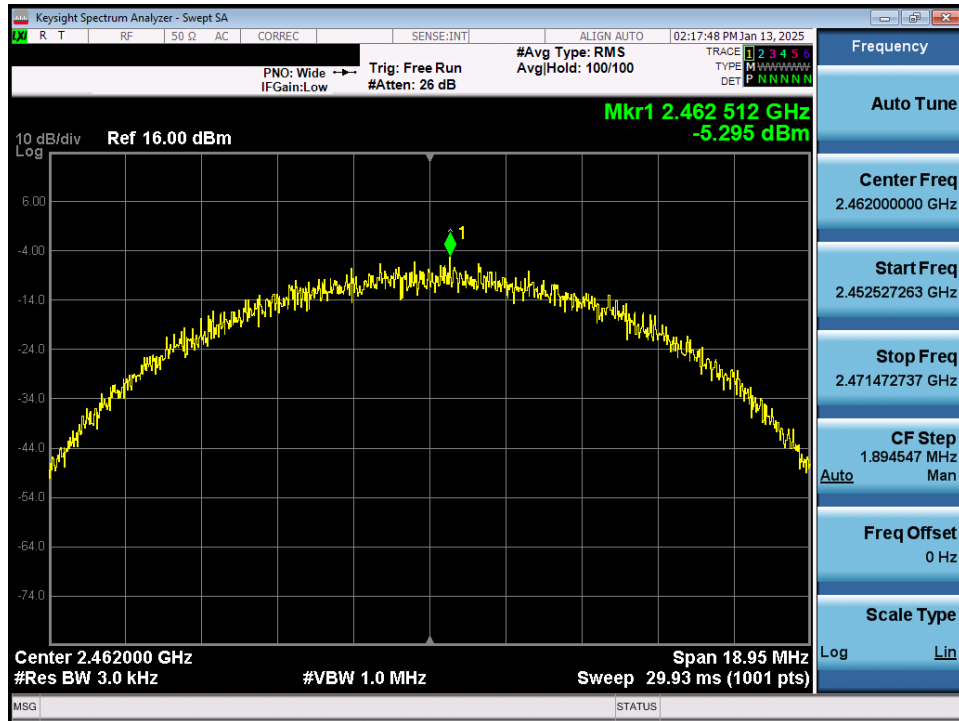


Plot 7-13. Power Spectral Density Plot Antenna WF8 (Common) (802.11b – Ch. 11)

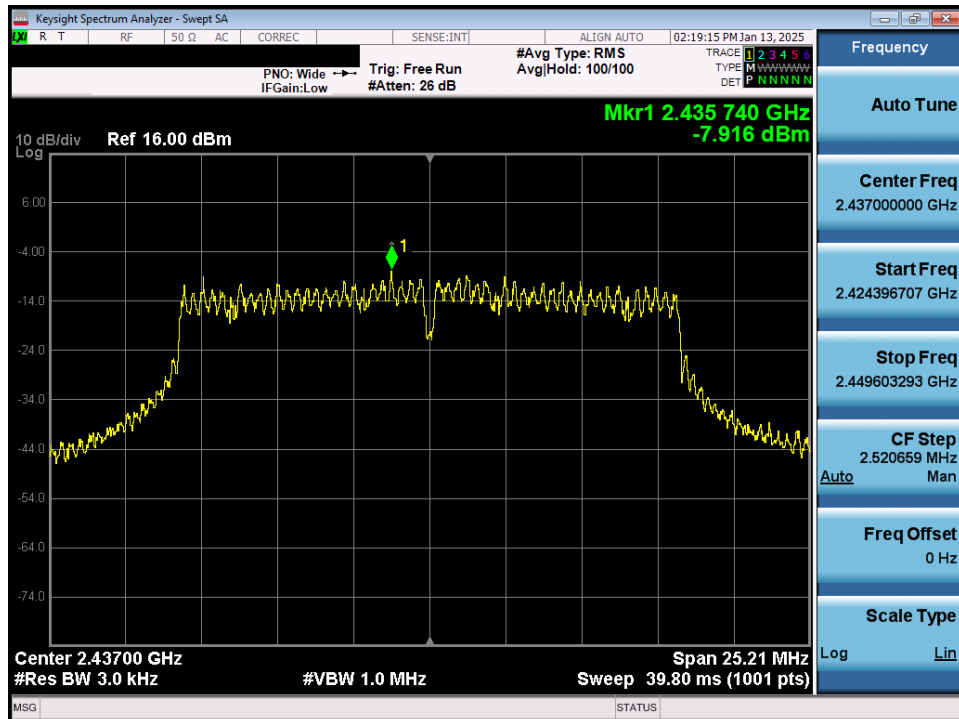


Plot 7-14. Power Spectral Density Plot Antenna WF8 (Common) (802.11g – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 39 of 181

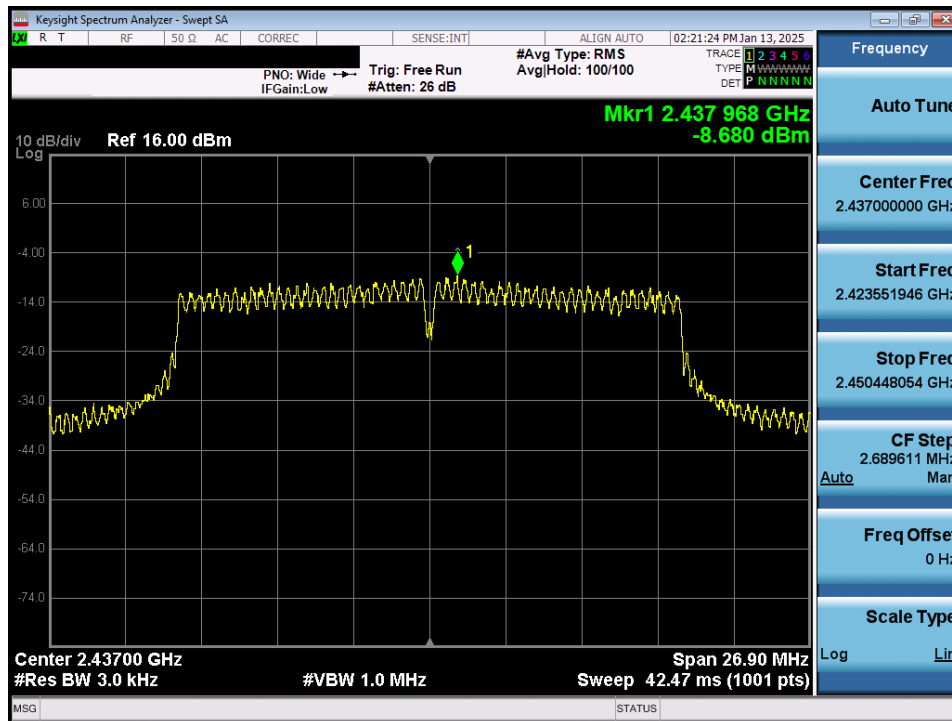

Plot 7-15. Power Spectral Density Plot Antenna WF8 (Common) (802.11n – Ch. 6)

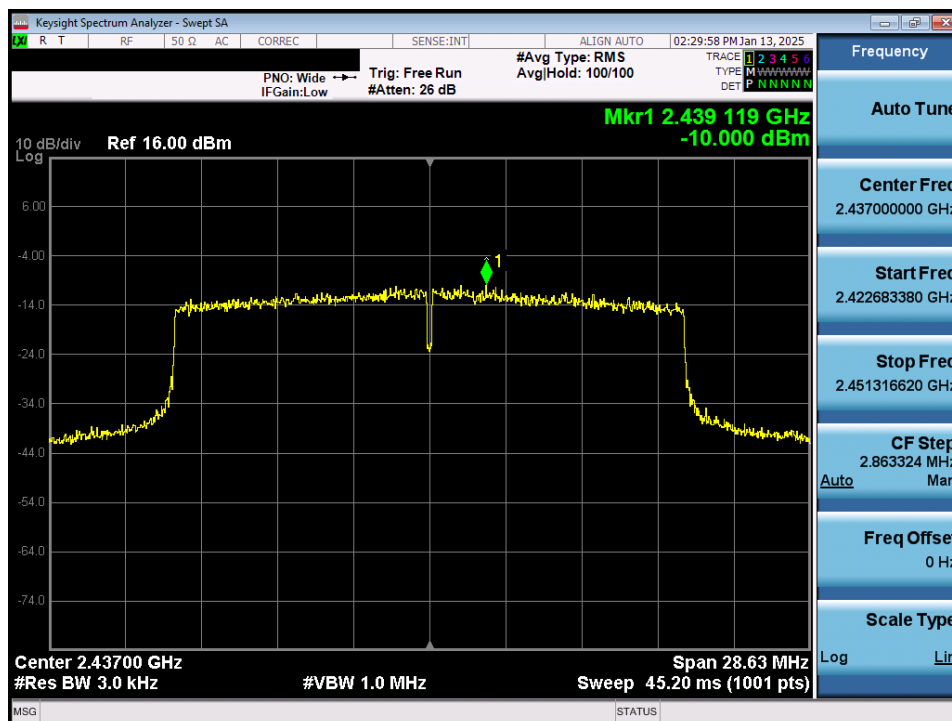

Plot 7-16. Power Spectral Density Plot Antenna WF8 (Common) (802.11axSU – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 40 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


7.4.3 Antenna WF7b Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 MODE	Data Rate [Mbps]	Measured Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]	Pass/Fail
2412	1	b	11	-3.97	8.00	-11.97	Pass
2437	6	b	11	-3.07	8.00	-11.07	Pass
2462	11	b	11	-3.03	8.00	-11.03	Pass
2412	1	g	24	-7.97	8.00	-15.97	Pass
2437	6	g	12	-5.00	8.00	-13.00	Pass
2462	11	g	12	-8.44	8.00	-16.44	Pass
2412	1	n	19.5/21.7 (MCS2)	-7.92	8.00	-15.92	Pass
2437	6	n	39/43.3 (MCS4)	-5.01	8.00	-13.01	Pass
2462	11	n	39/43.3 (MCS4)	-8.89	8.00	-16.89	Pass
2412	1	ax (SU)	24/25.8 (MCS2)	-10.47	8.00	-18.47	Pass
2437	6	ax (SU)	24/25.8 (MCS2)	-6.72	8.00	-14.72	Pass
2462	11	ax (SU)	49/51.6 (MCS4)	-10.07	8.00	-18.07	Pass


Table 7-24. Conducted Power Density Measurements Antenna WF7b

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 41 of 181

V 10.6 09/14/2023

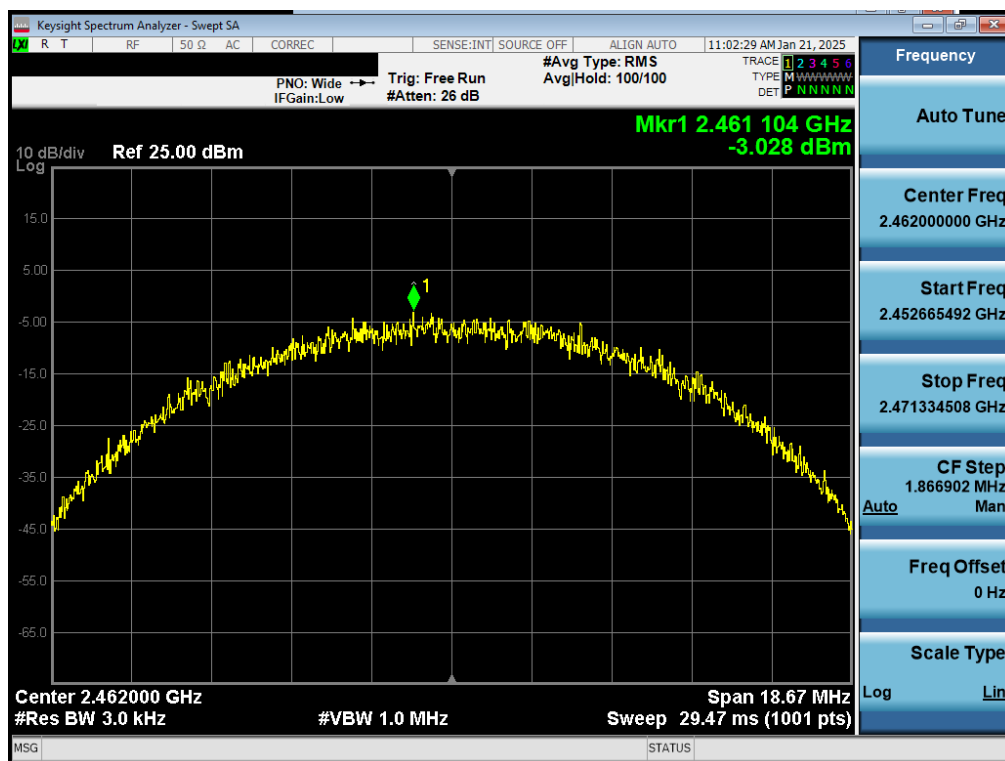


Plot 7-17. Power Spectral Density Plot Antenna WF7b (802.11b – Ch. 11)

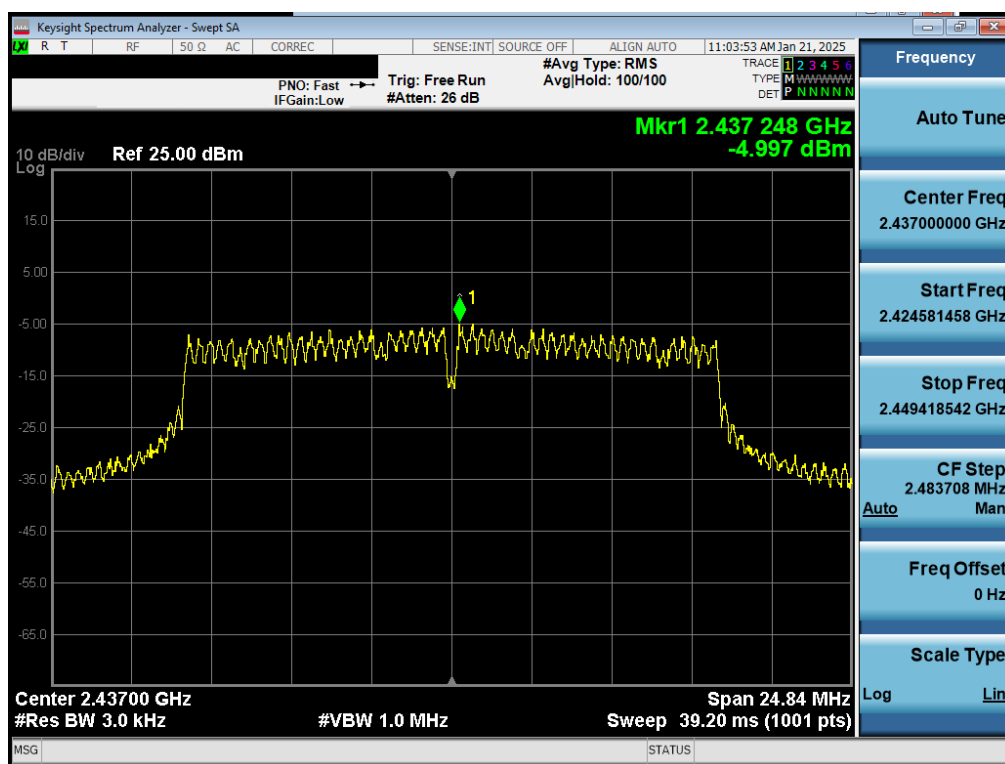


Plot 7-18. Power Spectral Density Plot Antenna WF7b (802.11g – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 42 of 181

V 10.6 09/14/2023

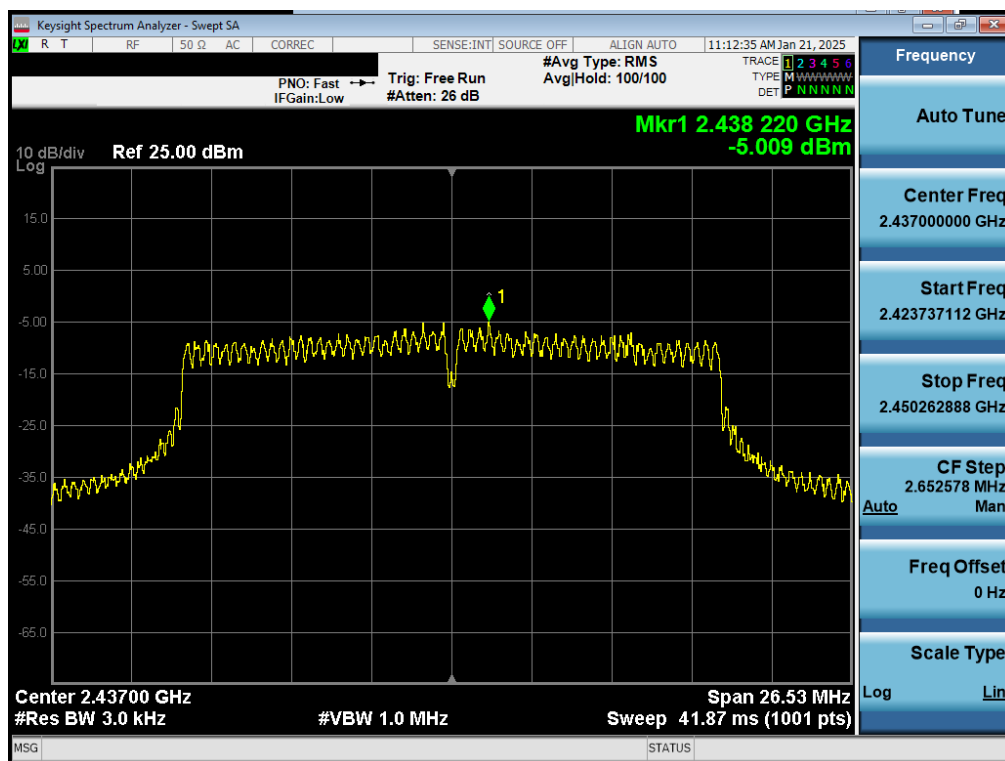

Plot 7-19. Power Spectral Density Plot Antenna WF7b (802.11n – Ch. 6)

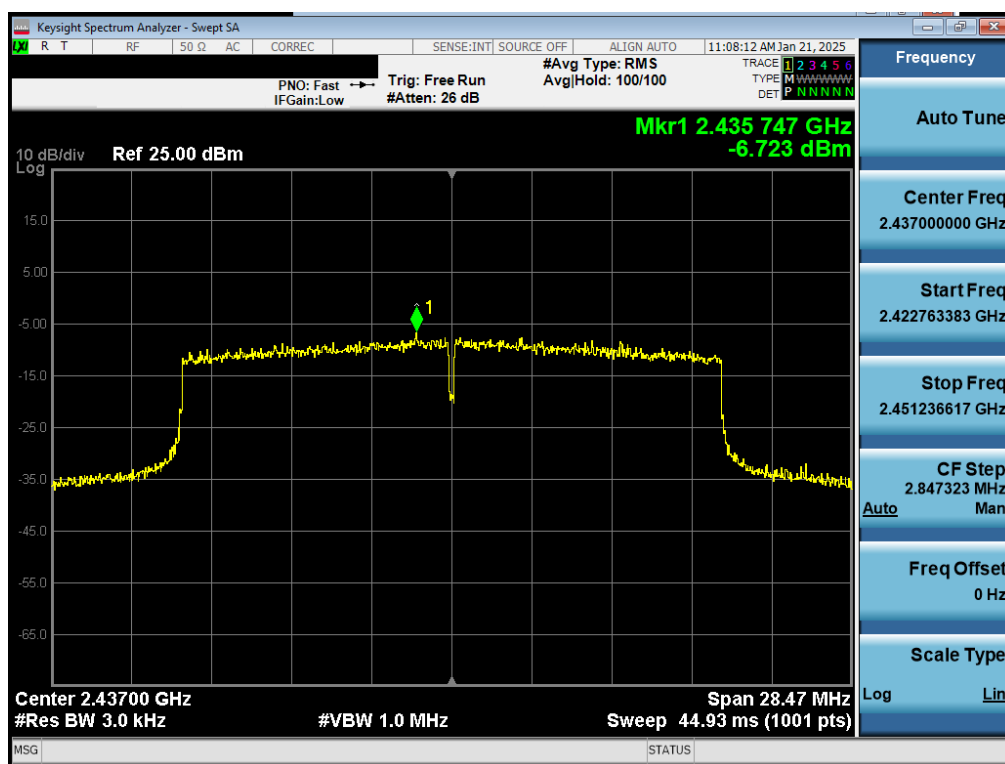

Plot 7-20. Power Spectral Density Plot Antenna WF7b (802.11axSU – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 43 of 181

V 10.6 09/14/2023


7.4.4 CDD (Dedicated) Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 MODE	Mode	Data Rate [Mbps]	Antenna WF8 Power Density [dBm/MHz]	Antenna WF7b Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]	Pass/Fail
2412	1	g	CDD	24.00	-8.40	-9.44	-5.88	8.00	-13.88	Pass
2437	6	g	CDD	24.00	-5.88	-6.19	-3.02	8.00	-11.02	Pass
2462	11	g	CDD	12.00	-9.14	-8.66	-5.88	8.00	-13.88	Pass
2412	1	n	CDD	78/86.7 (MCS12)	-8.85	-8.79	-5.81	8.00	-13.81	Pass
2437	6	n	CDD	39/43.3 (MCS10)	-5.42	-5.06	-2.23	8.00	-10.23	Pass
2462	11	n	CDD	78/86.7 (MCS12)	-8.71	-9.26	-5.97	8.00	-13.97	Pass
2412	1	ax (SU)	CDD	48/51.6 (MCS2)	-9.53	-10.78	-7.10	8.00	-15.10	Pass
2437	6	ax (SU)	CDD	48/51.6 (MCS2)	-6.49	-6.83	-3.65	8.00	-11.65	Pass
2462	11	ax (SU)	CDD	48/51.6 (MCS2)	-10.55	-10.80	-7.66	8.00	-15.66	Pass


Table 7-25. CDD (Dedicated) Conducted Power Density Measurements

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 44 of 181

V 10.6 09/14/2023

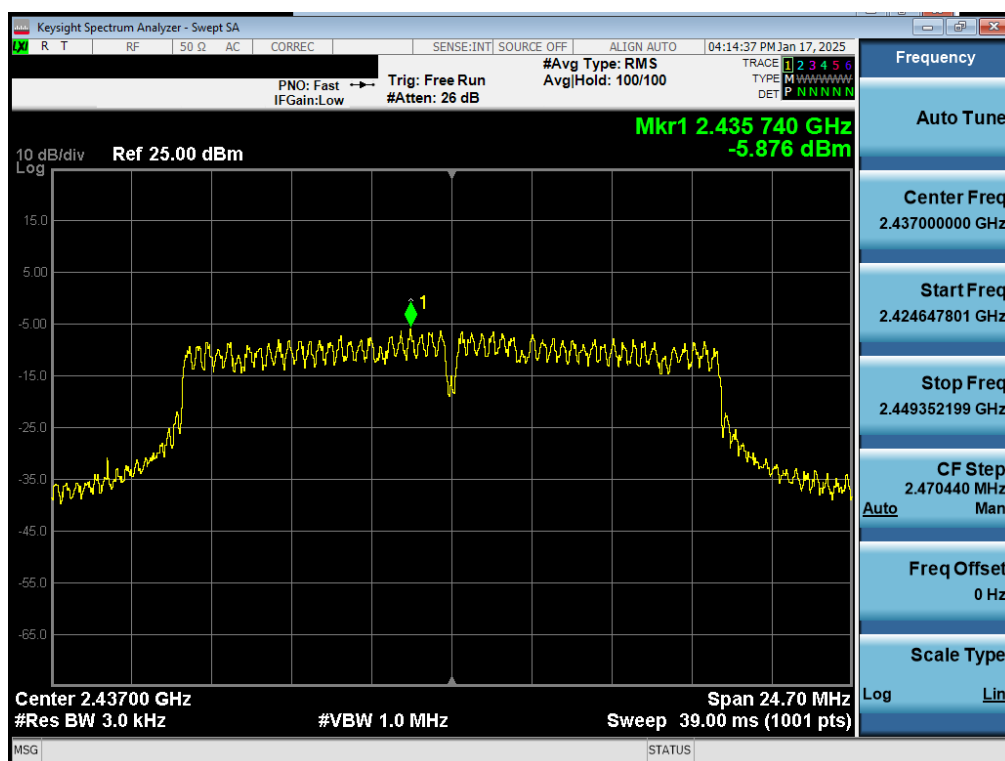


Plot 7-21. Power Spectral Density Plot CDD (Dedicated) Antenna WF8 (802.11g – Ch. 6)

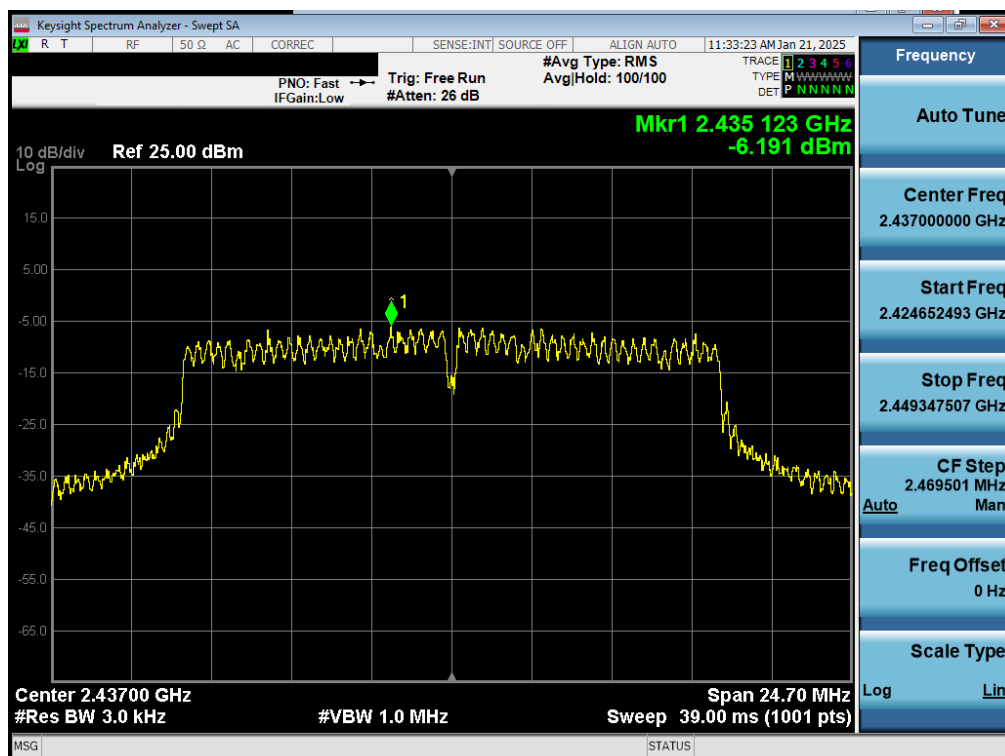


Plot 7-22. Power Spectral Density Plot CDD (Dedicated) Antenna WF7b (802.11g – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 45 of 181

V 10.6 09/14/2023

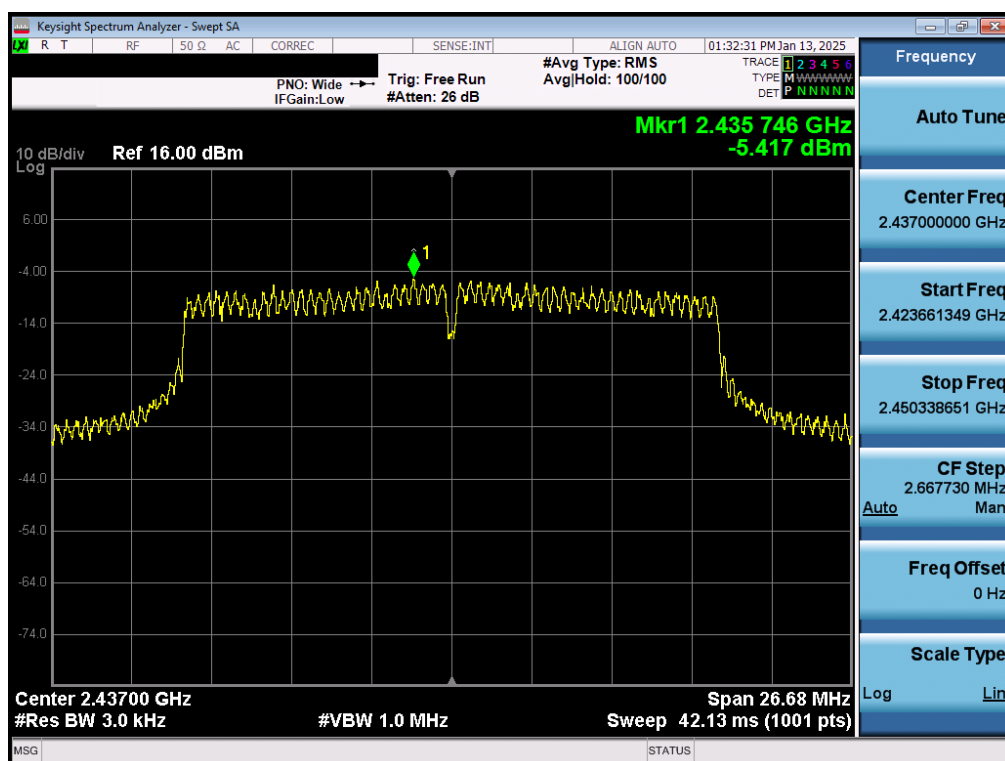


Plot 7-23. Power Spectral Density Plot CDD (Dedicated) Antenna WF8 (802.11n – Ch. 6)

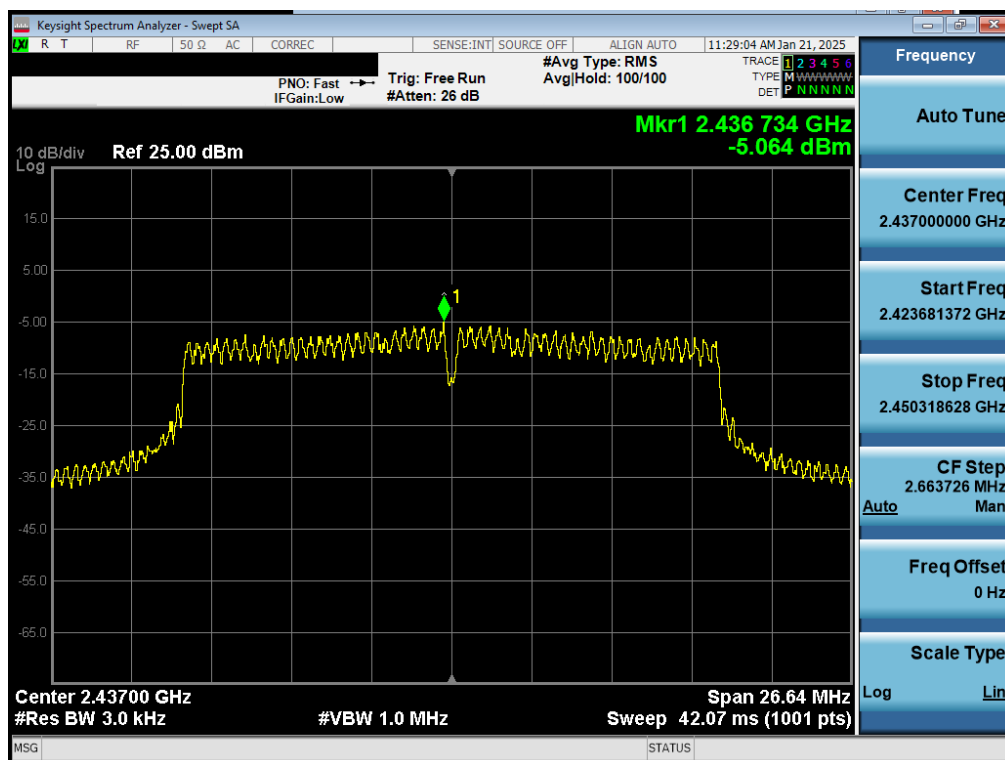


Plot 7-24. Power Spectral Density Plot CDD (Dedicated) Antenna WF7b (802.11n – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 46 of 181

V 10.6 09/14/2023

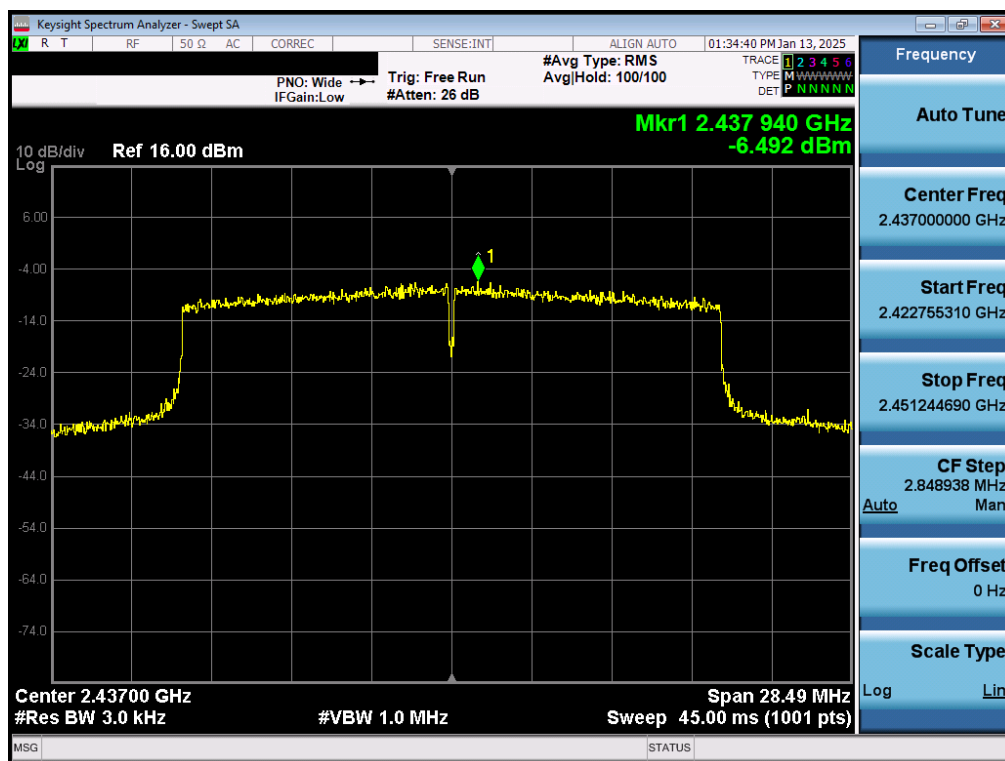

Plot 7-25. Power Spectral Density Plot CDD (Dedicated) Antenna WF8 (802.11axSU – Ch. 6)

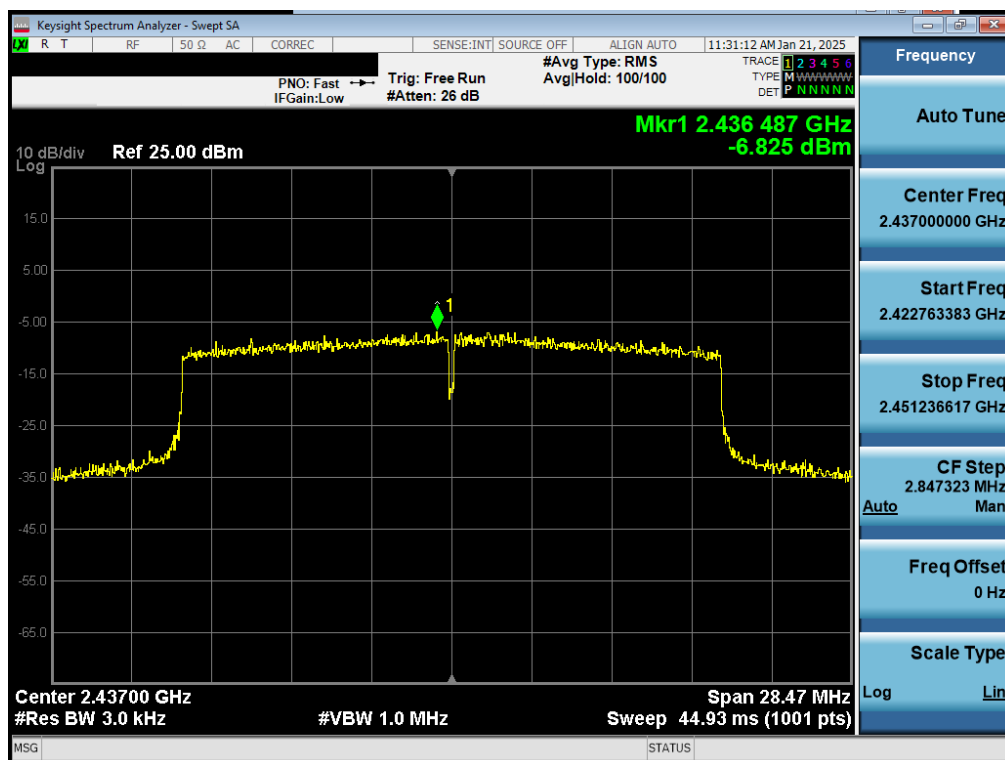

Plot 7-26. Power Spectral Density Plot CDD (Dedicated) Antenna WF7b (802.11axSU – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 47 of 181

V 10.6 09/14/2023


7.4.5 CDD (Common) Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 MODE	Mode	Data Rate [Mbps]	Antenna WF8 Power Density [dBm/3kHz]	Antenna WF7b Power Density [dBm/3kHz]	Summed Power Density [dBm/3kHz]	Max Power Density [dBm/3kHz]	Margin [dB]	Pass/Fail
2412	1	g	CDD	24.00	-10.12	-9.44	-6.76	8.00	-14.76	Pass
2437	6	g	CDD	12.00	-9.42	-6.15	-4.48	8.00	-12.48	Pass
2462	11	g	CDD	54.00	-9.62	-10.30	-6.94	8.00	-14.94	Pass
2412	1	n	CDD	39/43.3 (MCS10)	-9.44	-8.90	-6.15	8.00	-14.15	Pass
2437	6	n	CDD	39/43.3 (MCS10)	-9.58	-5.06	-3.75	8.00	-11.75	Pass
2462	11	n	CDD	39/43.3 (MCS10)	-12.14	-9.02	-7.29	8.00	-15.29	Pass
2412	1	ax (SU)	CDD	98/103.2 (MCS4)	-10.79	-11.16	-7.96	8.00	-15.96	Pass
2437	6	ax (SU)	CDD	98/103.2 (MCS4)	-10.86	-6.44	-5.10	8.00	-13.10	Pass
2462	11	ax (SU)	CDD	48/51.6 (MCS2)	-14.70	-10.80	-9.32	8.00	-17.32	Pass


Table 7-26. CDD (Common) Conducted Power Density Measurements

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 48 of 181

V 10.6 09/14/2023

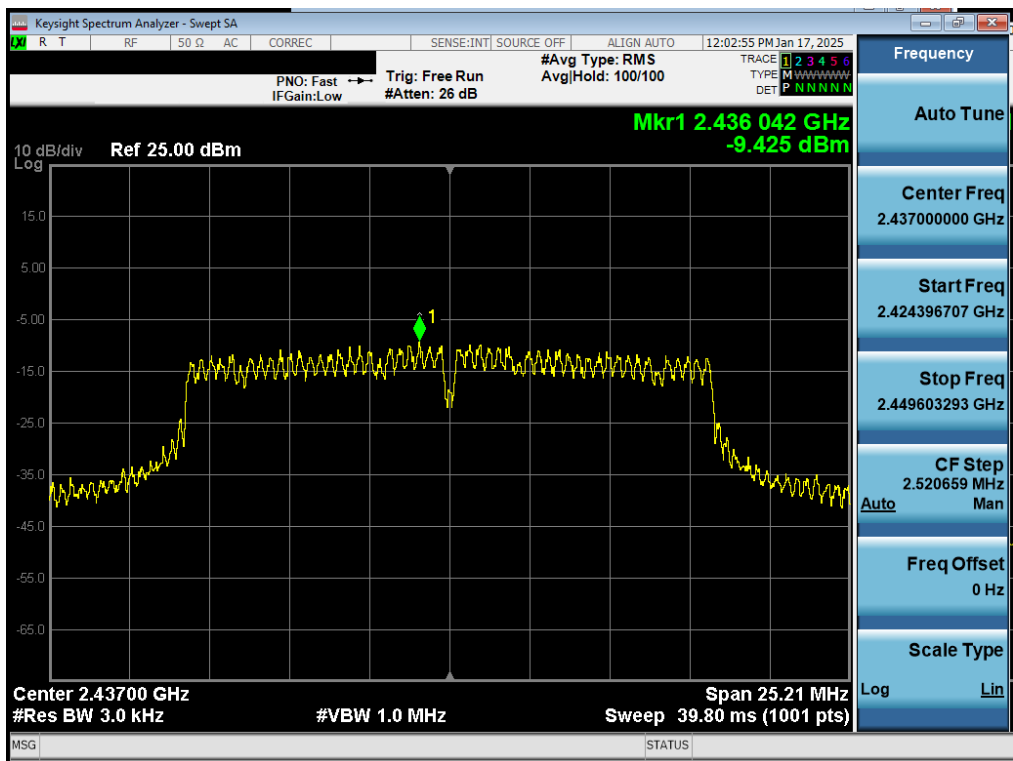


Plot 7-27. Power Spectral Density Plot CDD (Common) Antenna WF8 (Common) (802.11g – Ch. 6)

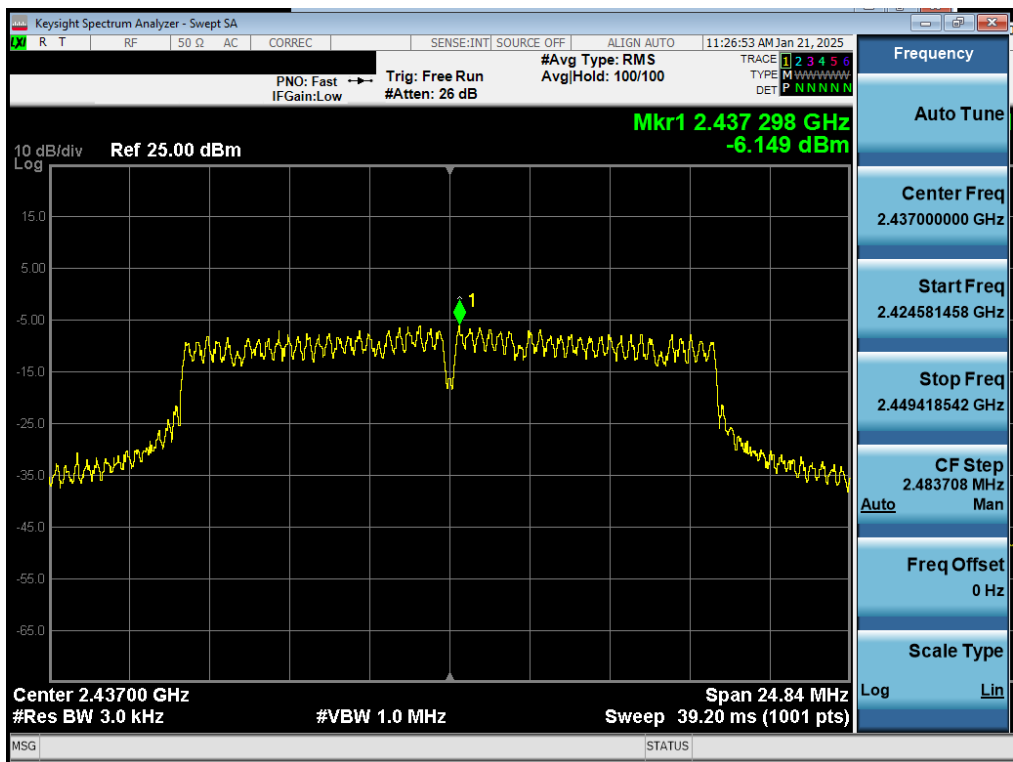


Plot 7-28. Power Spectral Density Plot CDD Antenna WF7b (802.11g – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354	element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 49 of 181

V 10.6 09/14/2023

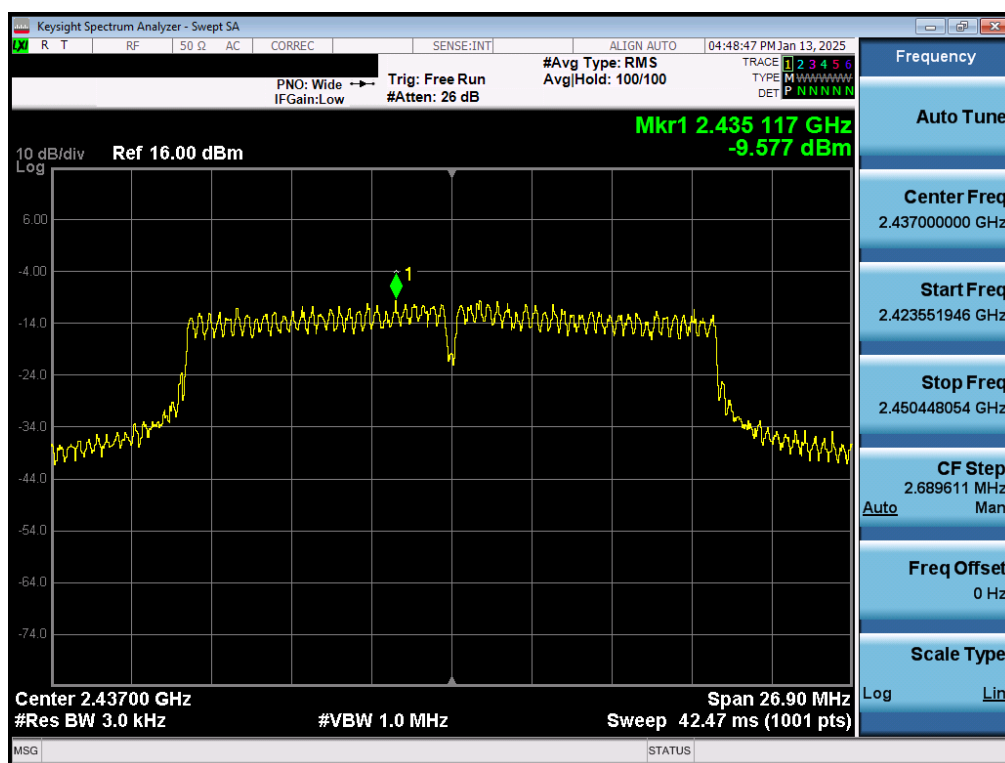


Plot 7-29. Power Spectral Density Plot CDD (Common) Antenna WF8 (Common) (802.11n – Ch. 6)

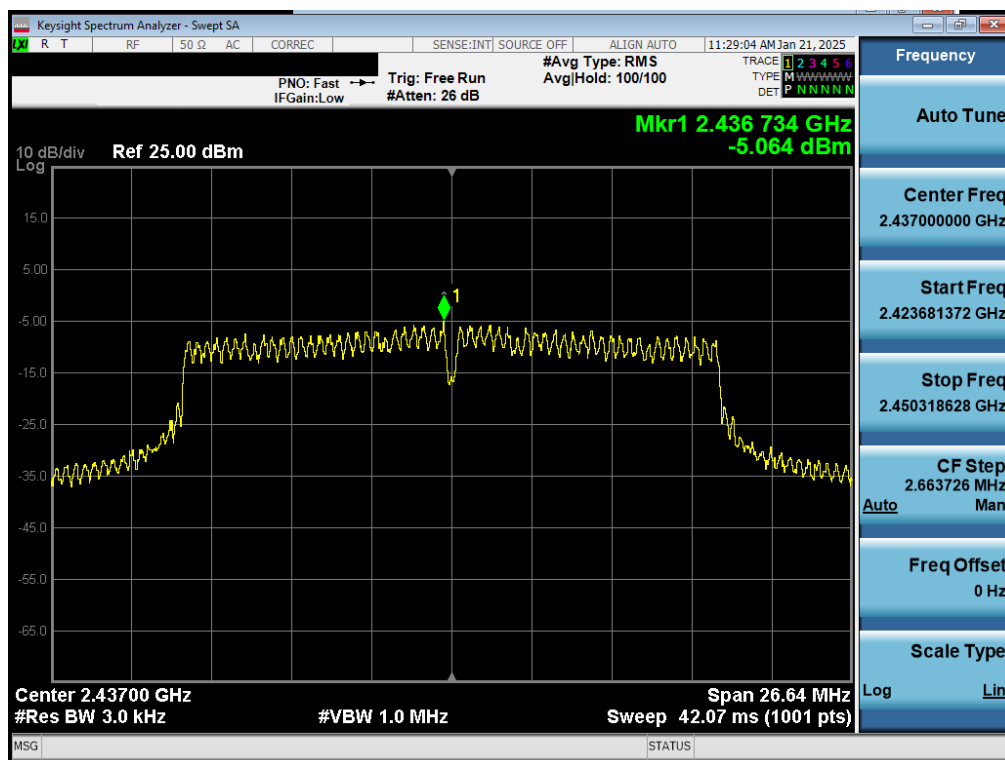


Plot 7-30. Power Spectral Density Plot CDD Antenna WF7b (802.11n – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 50 of 181

V 10.6 09/14/2023

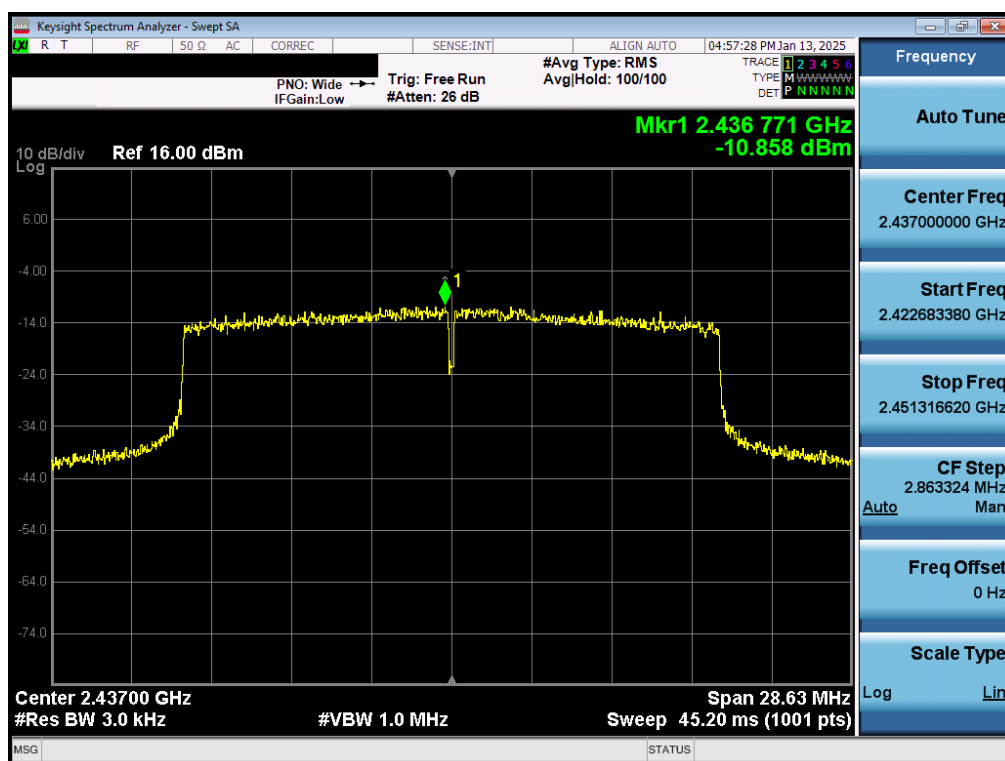

Plot 7-31. Power Spectral Density Plot CDD (Common) Antenna WF8 (Common) (802.11axSU – Ch. 6)

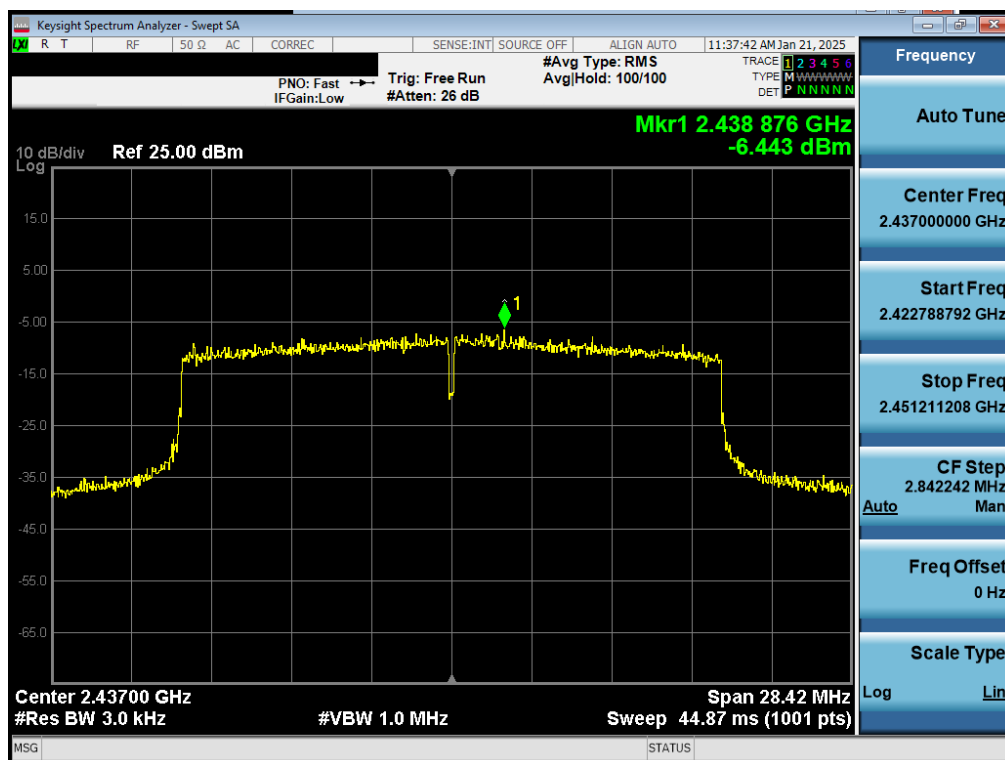

Plot 7-32. Power Spectral Density Plot CDD Antenna WF7b (802.11axSU – Ch. 6)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 51 of 181

V 10.6 09/14/2023



Note:

Per ANSI C63.10-2020 Section 14.5.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Antenna WF8 (Common) and Antenna WF7b were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample CDD Calculation:

At 2437MHz the average conducted power spectral density was measured to be -9.45 dBm for Antenna WF8 (Common) and -6.15 dBm for Antenna WF7b.

$$\text{Antenna WF8 (Common) + Antenna WF7b} = \text{CDD (Common)}$$

$$((-9.45 \text{ dBm}) + (-6.15 \text{ dBm})) = (0.114 \text{ mW} + 0.243 \text{ mW}) = 0.357 \text{ mW} = -4.48 \text{ dBm}$$

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 52 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.5 Conducted Authorized Band Edge

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 11Mbps for “b” mode, 12, 24, 54 Mbps for “g” mode, 19.5/21.7, 39/43.3, 65/72.2Mbps for “n” mode, and 24/25.8, 49/51.6, 81/86 for “ax-SU” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2020 – Subclause 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW $\geq 3 \times$ RBW
5. Detector = Peak
6. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup


Test Notes

1. All antenna configurations were investigated and only the worst case is reported.
2. All data rates have been investigated and only the worst case data rate is reported.


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 53 of 181

V 10.6 09/14/2023

7.5.1 Antenna WF8 Conducted Emissions at the Band Edge

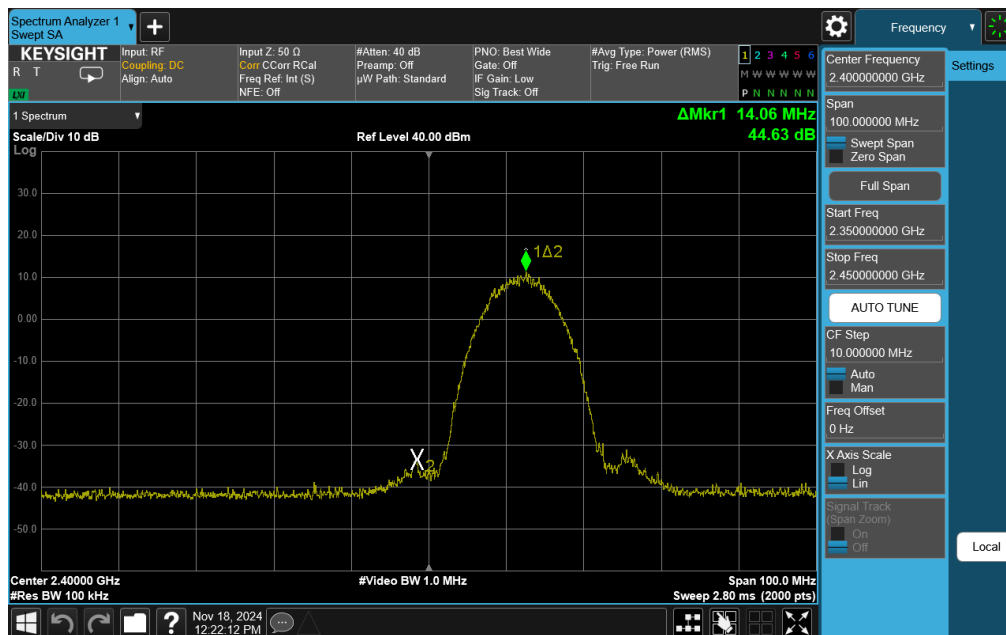

Plot 7-33. Band Edge Plot Antenna WF8 (802.11b – Ch. 1)


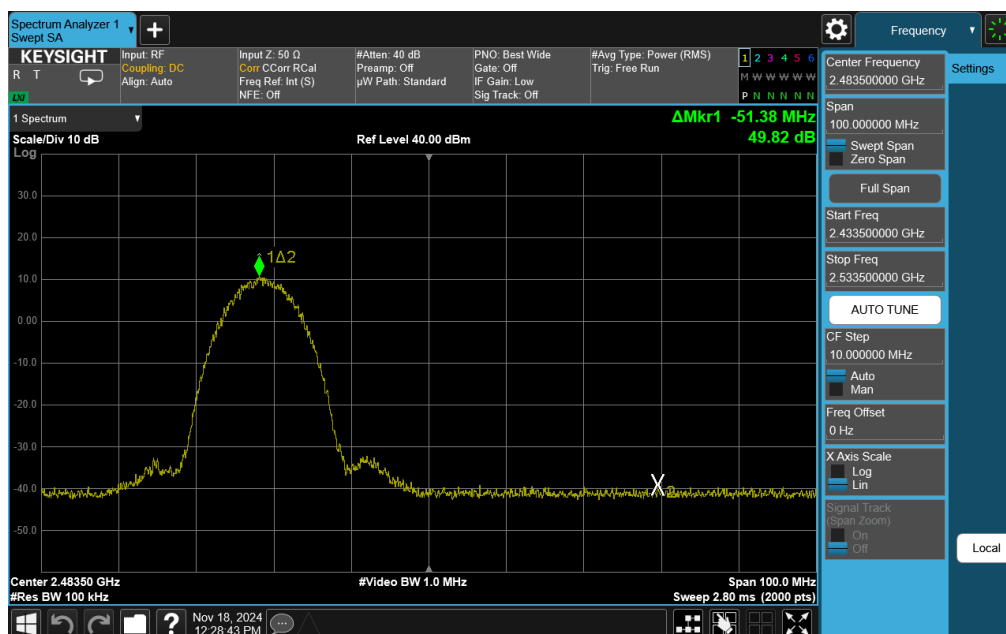


Plot 7-34. Band Edge Plot Antenna WF8 (802.11b – Ch. 11)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 54 of 181

V 10.6 09/14/2023


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

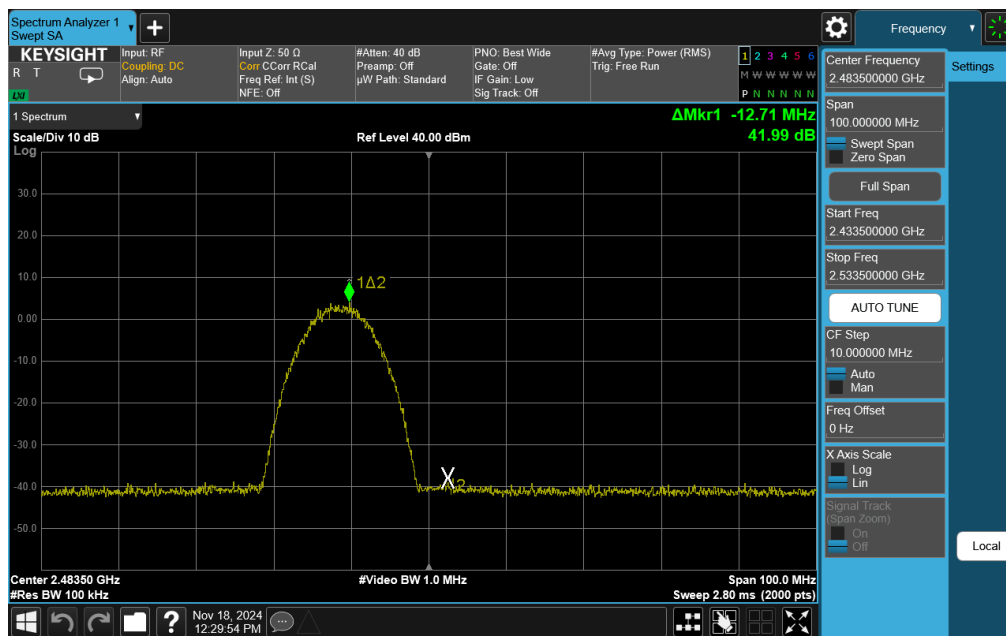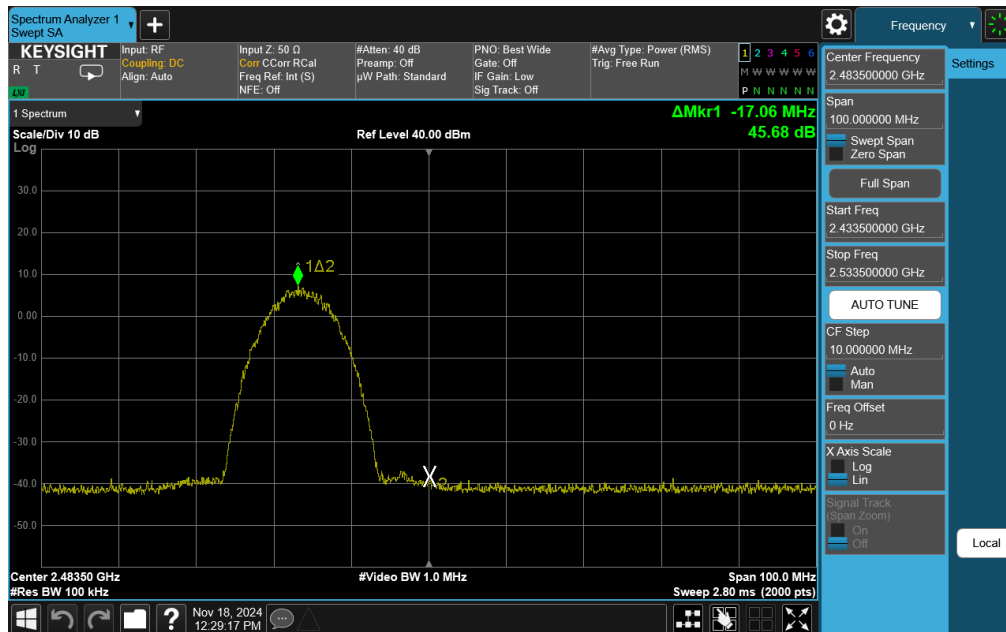


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 55 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

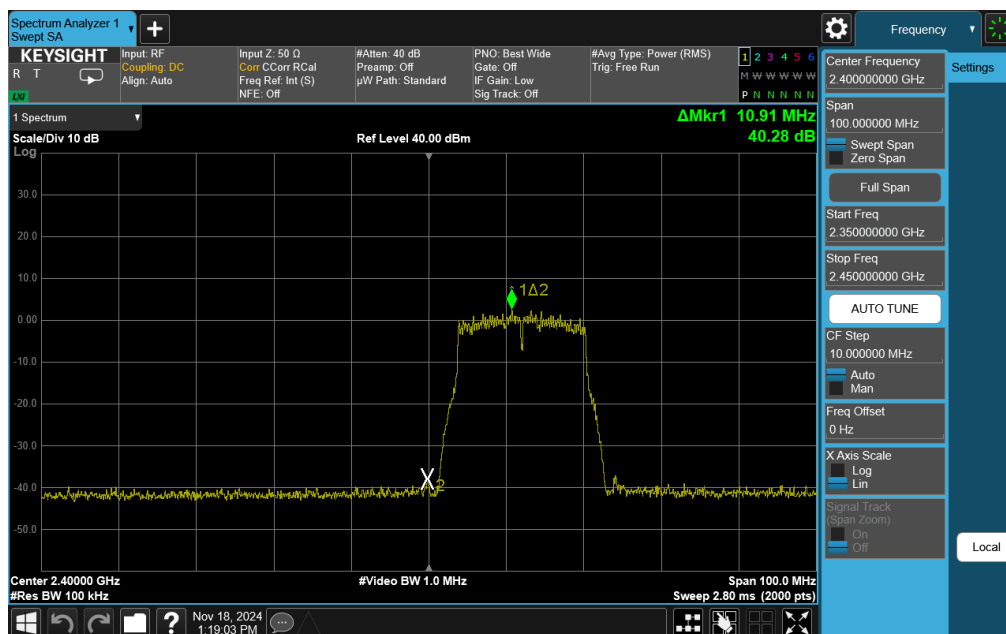

Plot 7-37. Band Edge Plot Antenna WF8 (802.11g – Ch. 1)

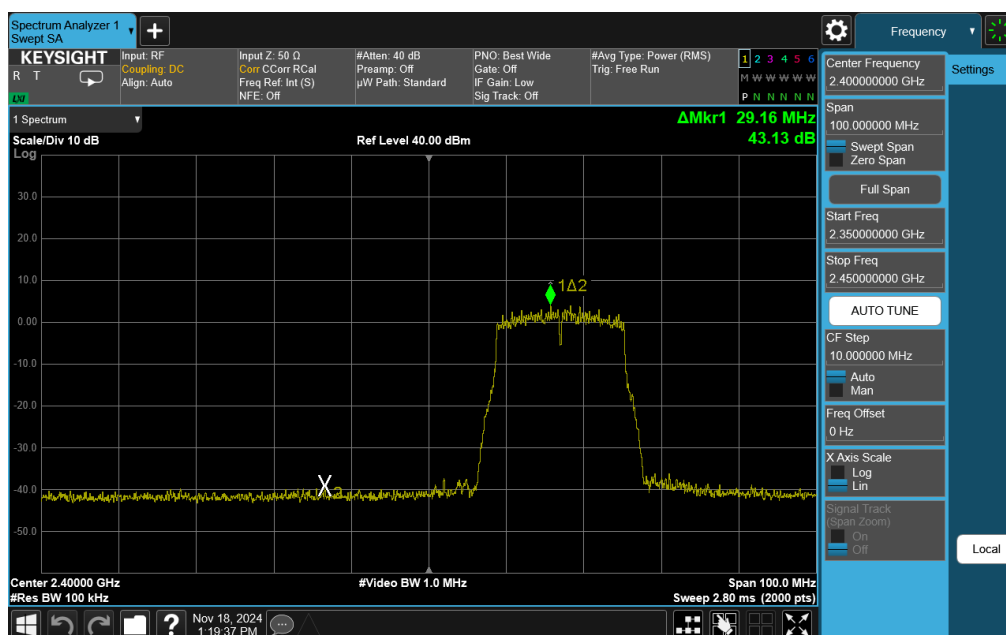


Plot 7-38. Band Edge Plot Antenna WF8 (802.11g – Ch. 2)


FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 56 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

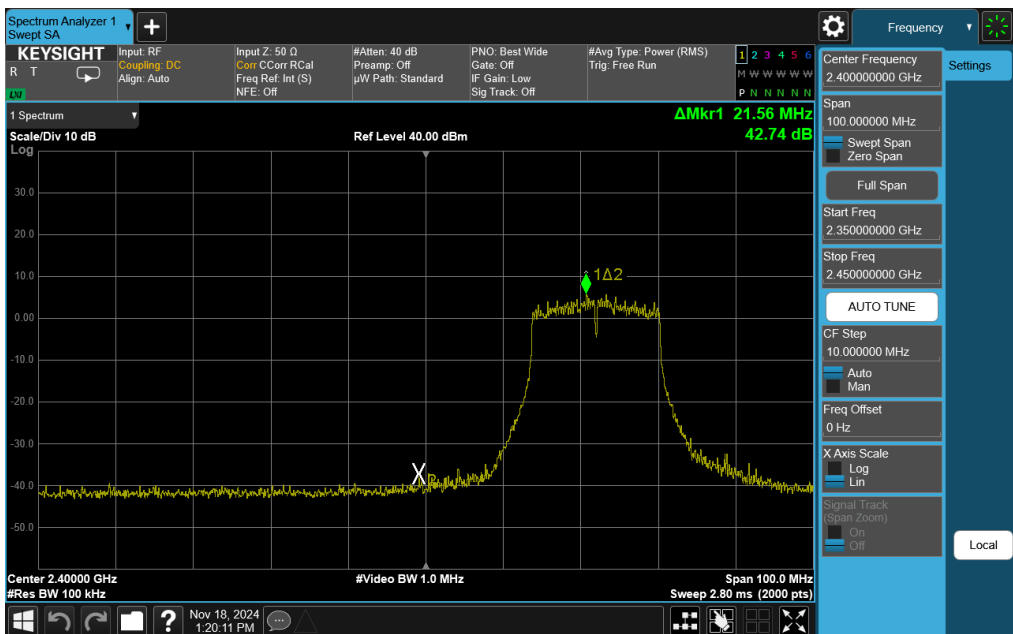


Plot 7-39. Band Edge Plot Antenna WF8 (802.11g – Ch. 3)

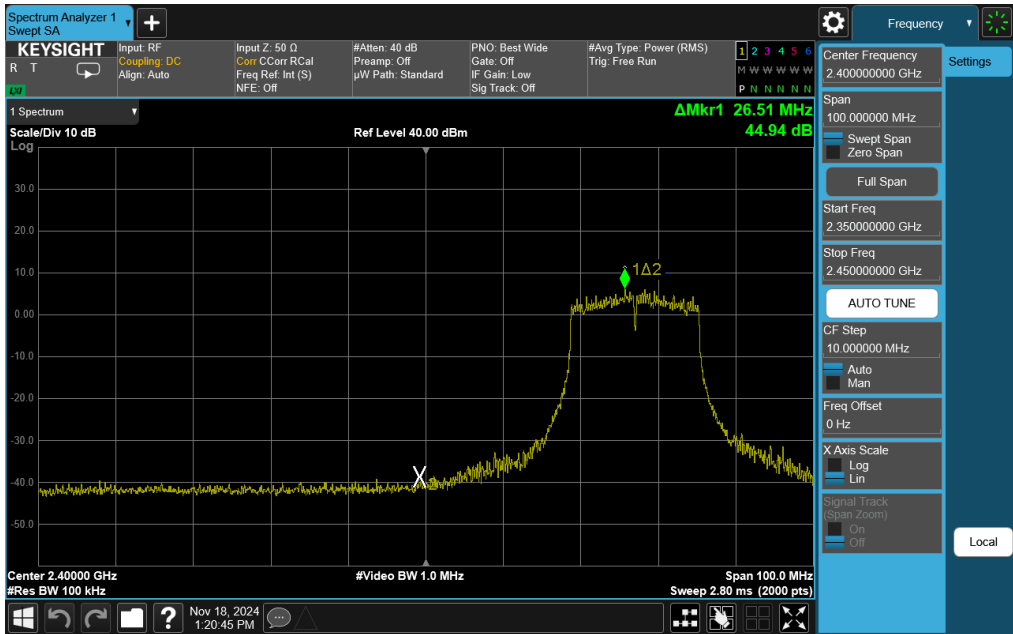


Plot 7-40. Band Edge Plot Antenna WF8 (802.11g – Ch. 4)

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 57 of 181

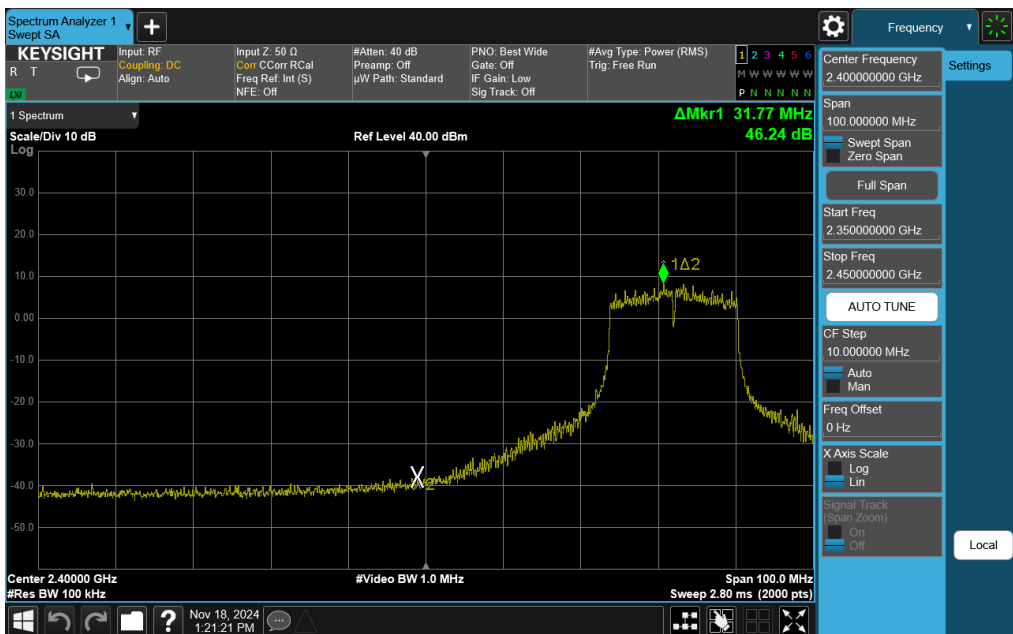


Plot 7-41. Band Edge Plot Antenna WF8 (802.11g – Ch. 5)

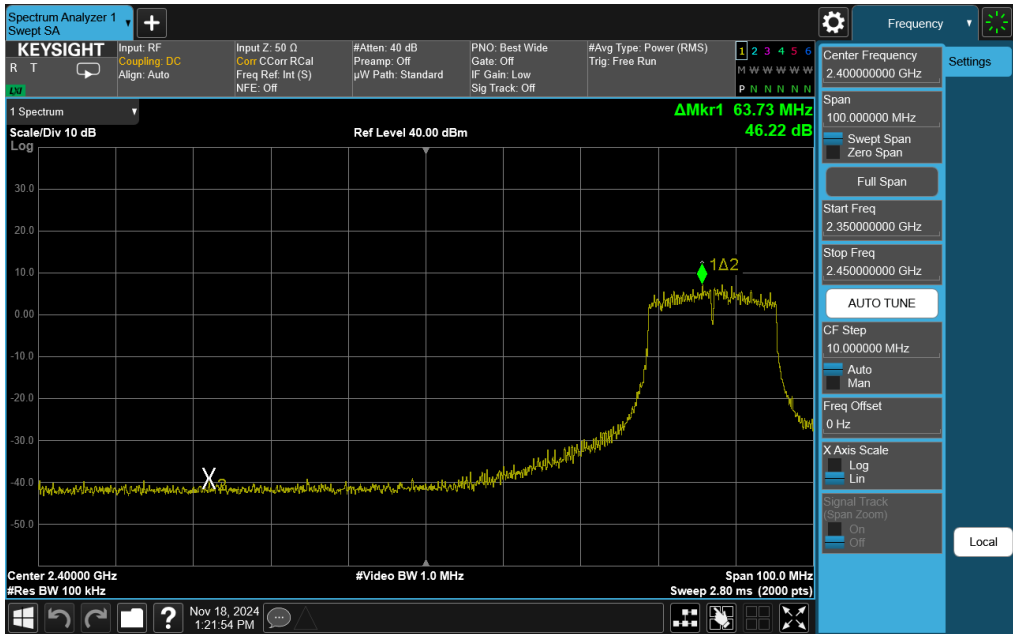


Plot 7-42. Band Edge Plot Antenna WF8 (802.11g – Ch. 6-Low)

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 58 of 181

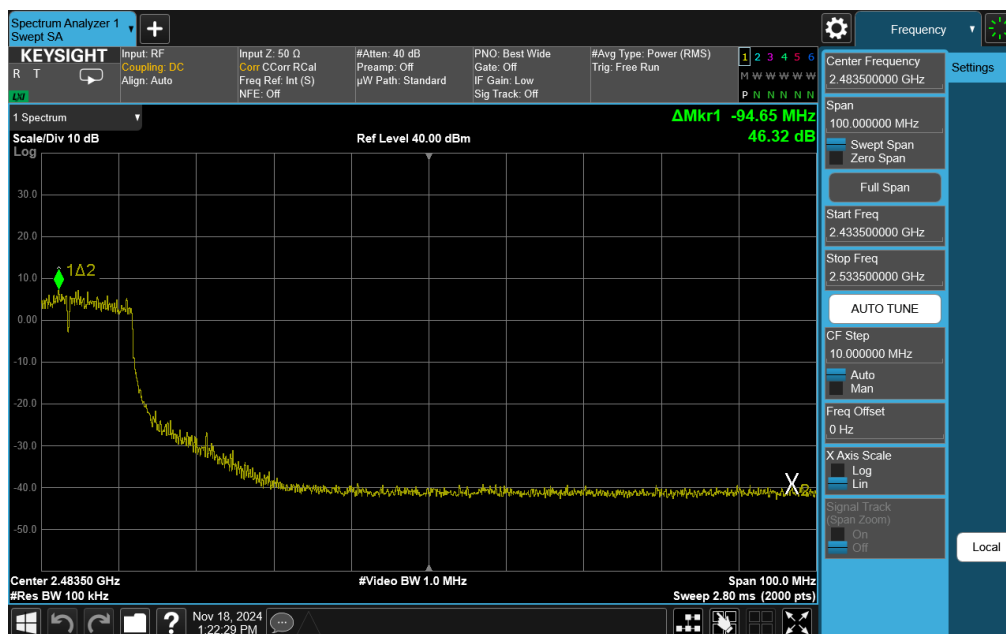

Plot 7-43. Band Edge Plot Antenna WF8 (802.11g – Ch. 6-High)

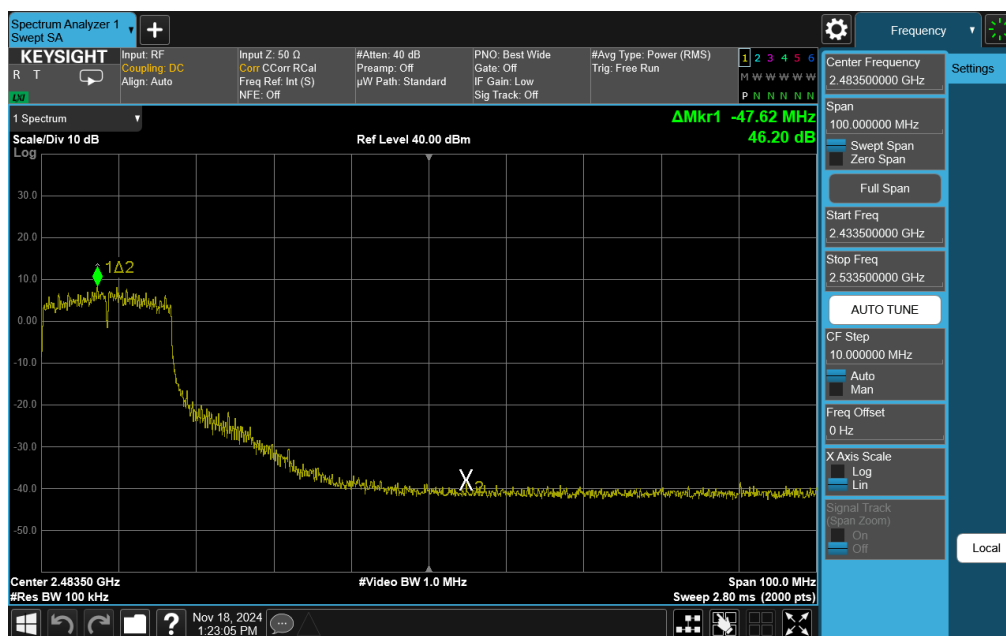


Plot 7-44. Band Edge Plot Antenna WF8 (802.11g – Ch. 7)


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 59 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

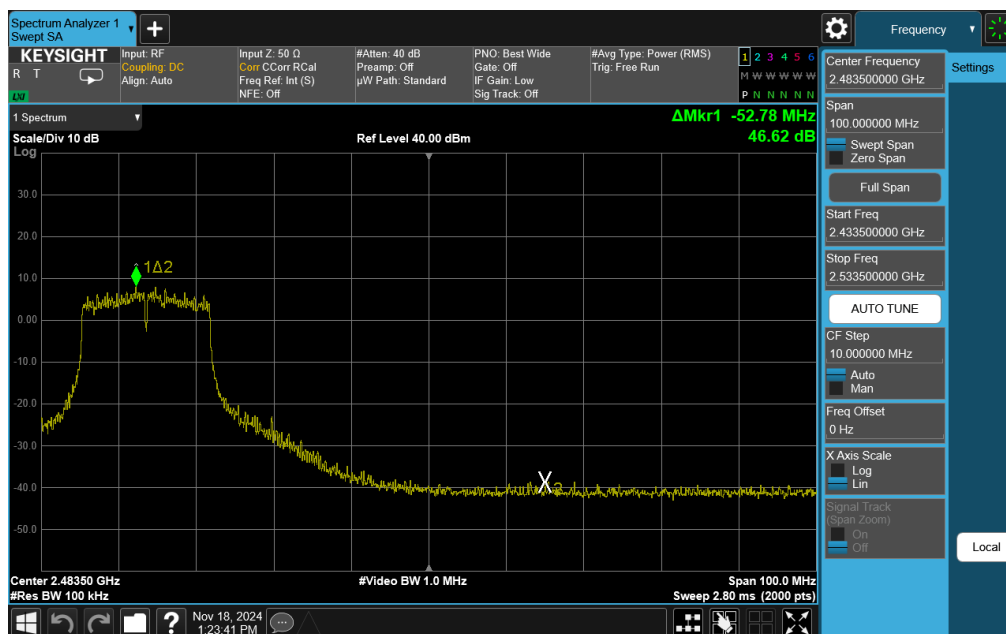

Plot 7-45. Band Edge Plot Antenna WF8 (802.11g – Ch. 8)

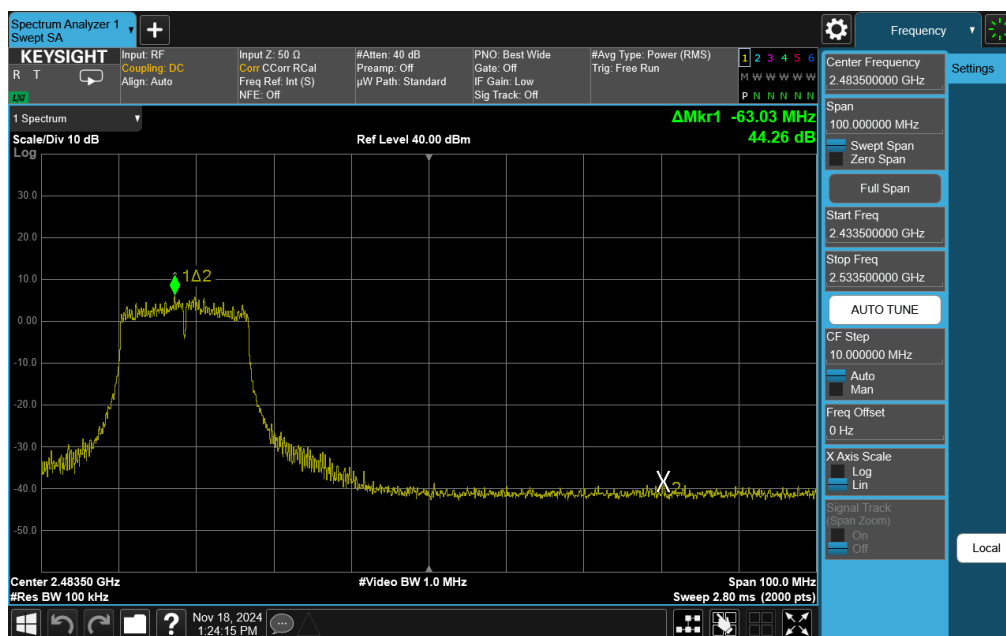


Plot 7-46. Band Edge Plot Antenna WF8 (802.11g – Ch. 9)


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 60 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

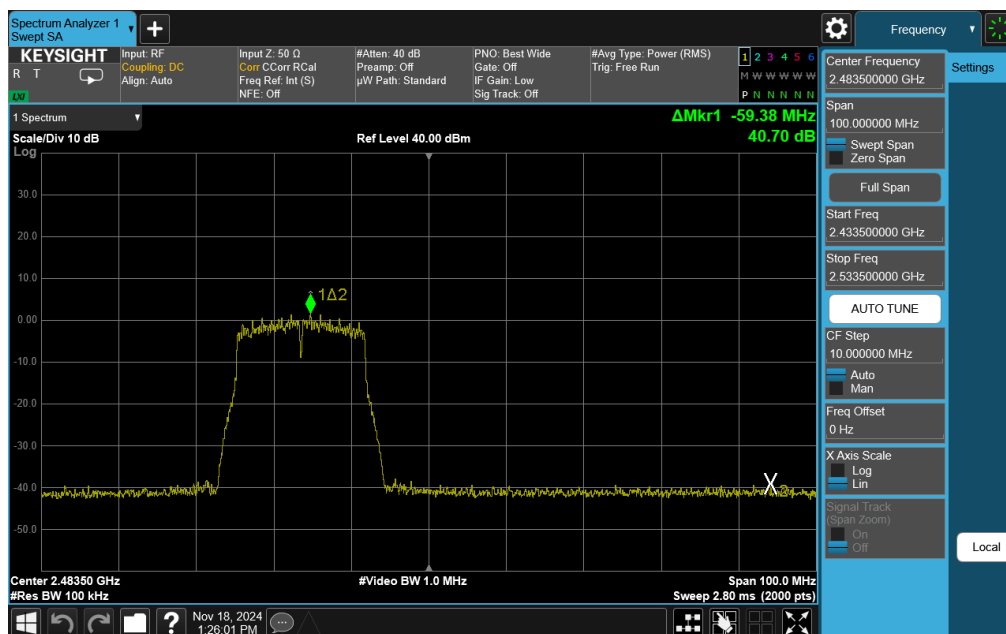

Plot 7-49. Band Edge Plot Antenna WF8 (802.11g – Ch. 12)

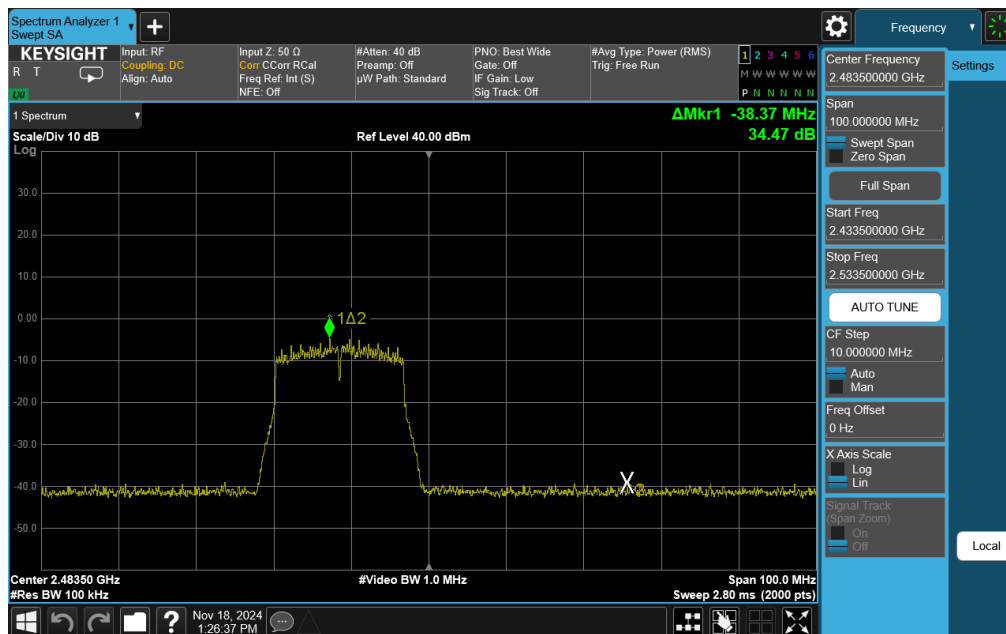


Plot 7-50. Band Edge Plot Antenna WF8 (802.11g – Ch. 13)


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 62 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

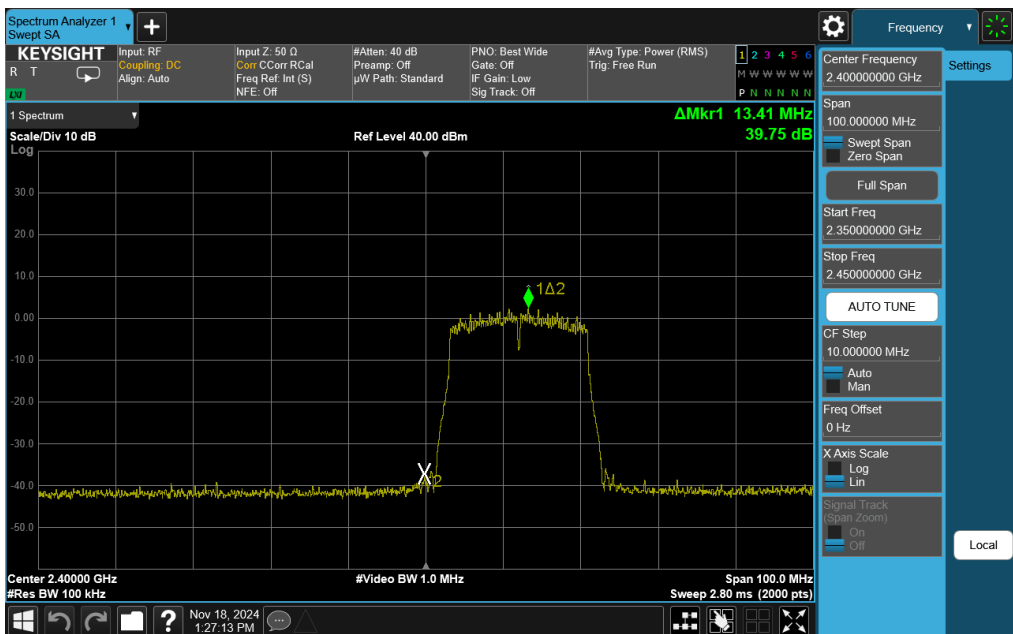

Plot 7-51. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 1)

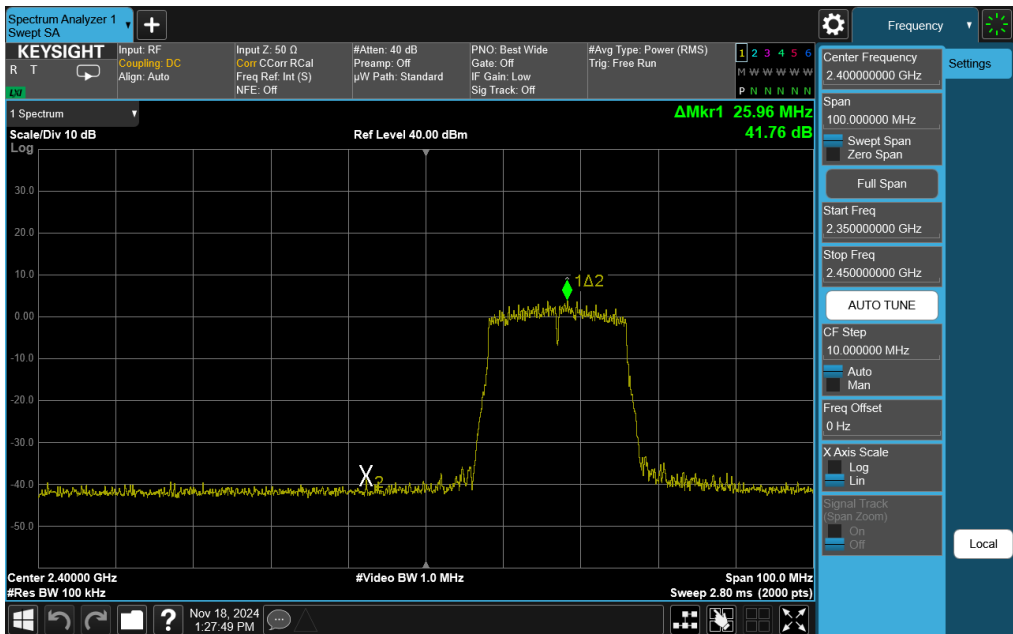


Plot 7-52. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 2)


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 63 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

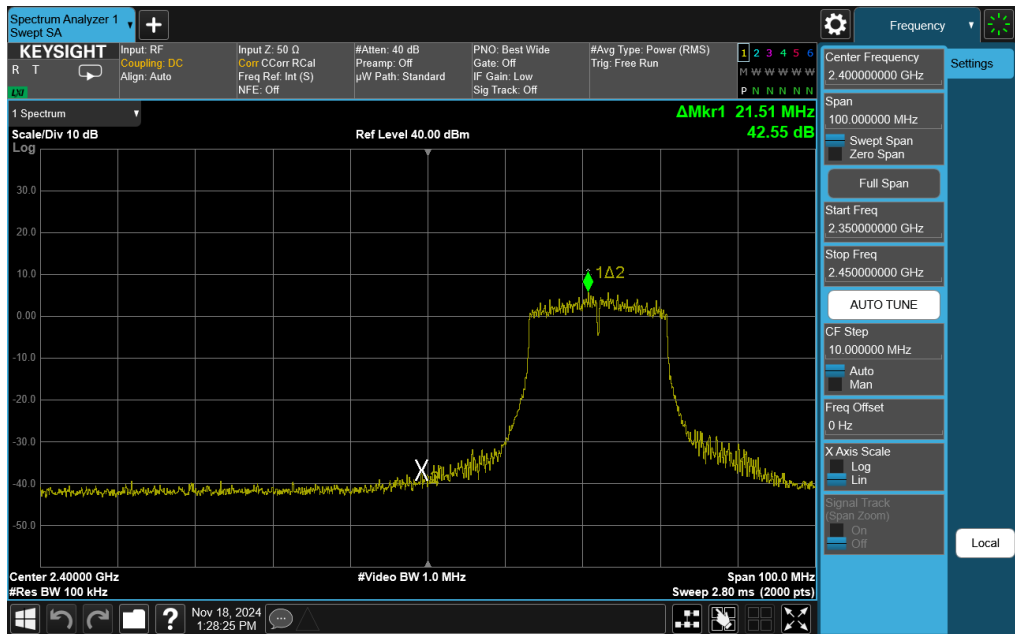


Plot 7-53. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 3)

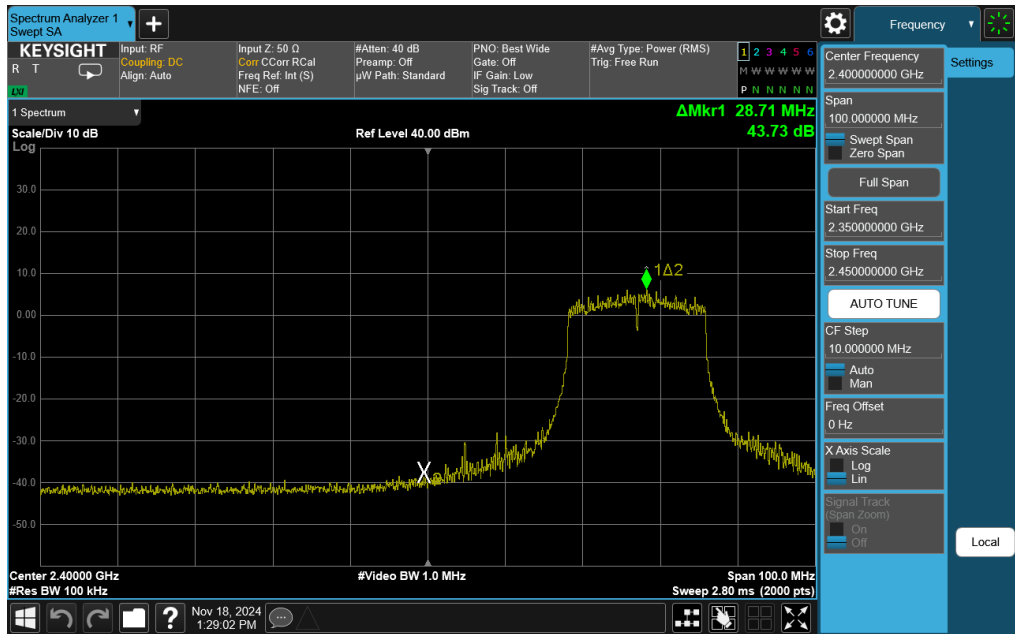


Plot 7-54. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 4)

FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 64 of 181

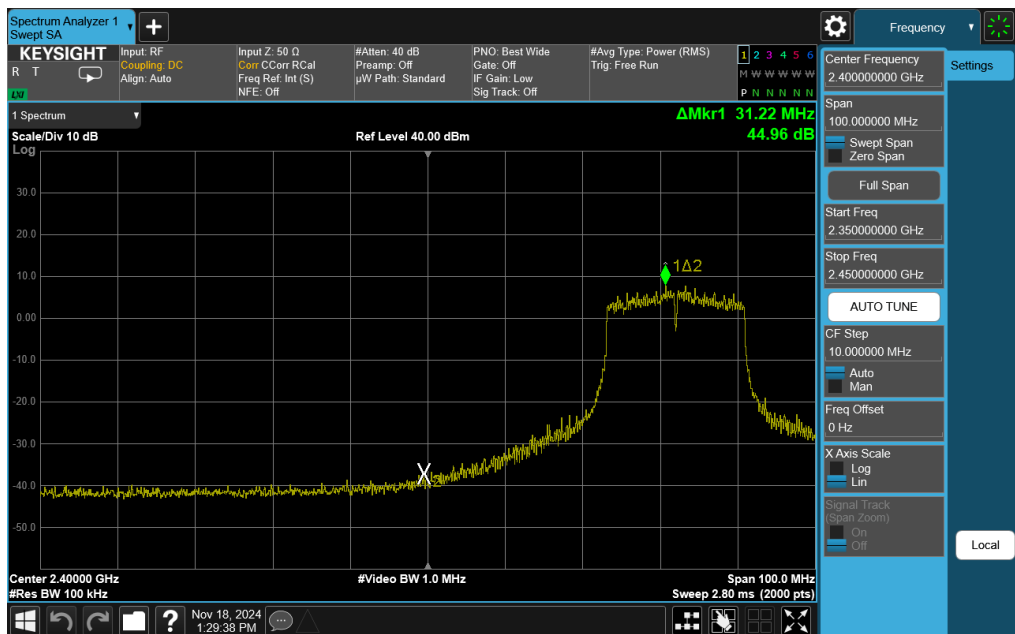

Plot 7-55. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 5)

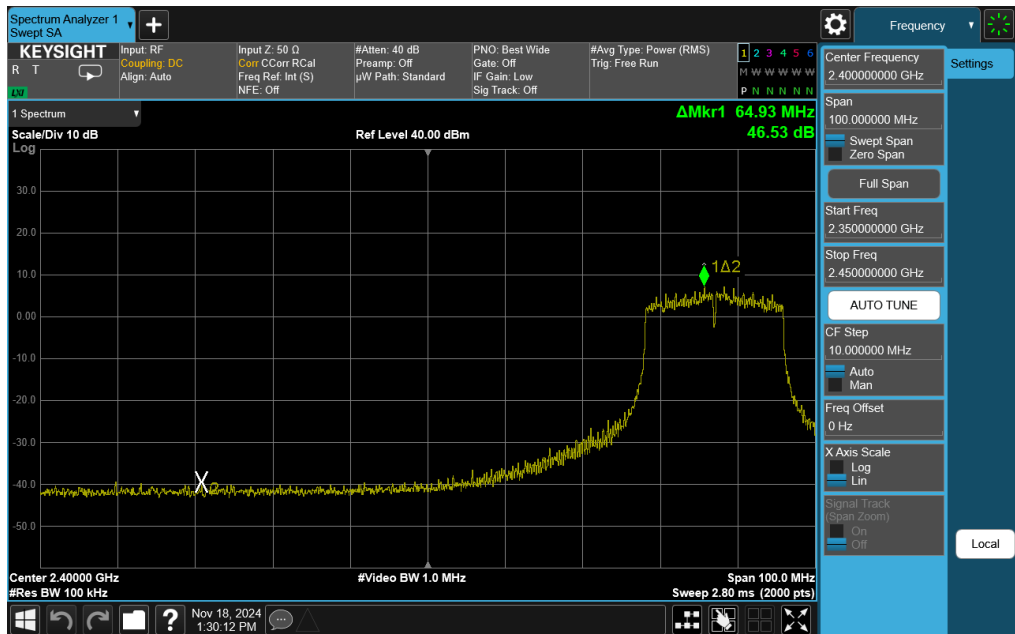


Plot 7-56. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 6-Low)


FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 65 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

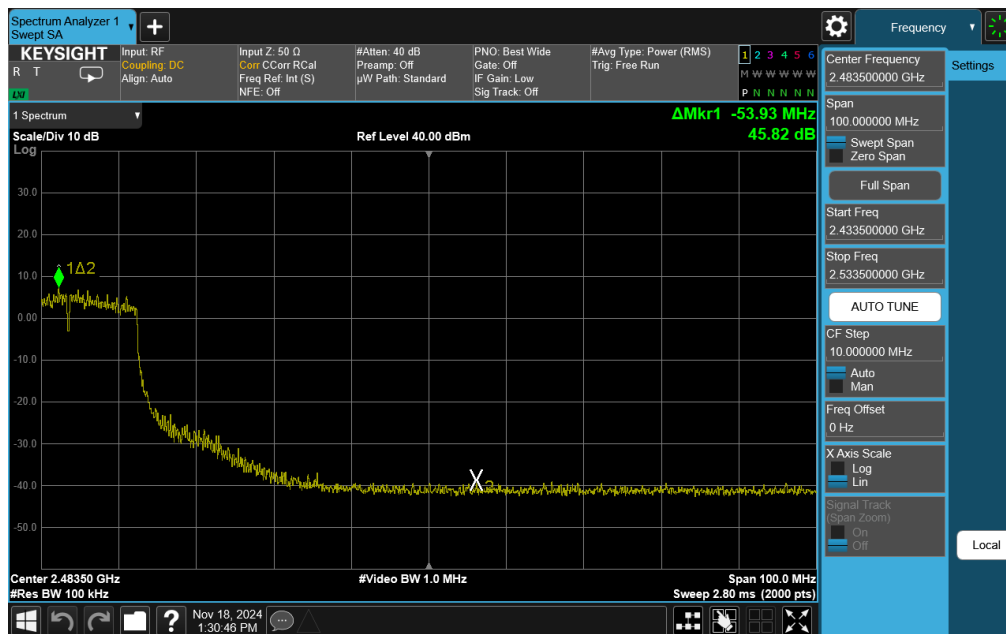

Plot 7-57. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 6-High)

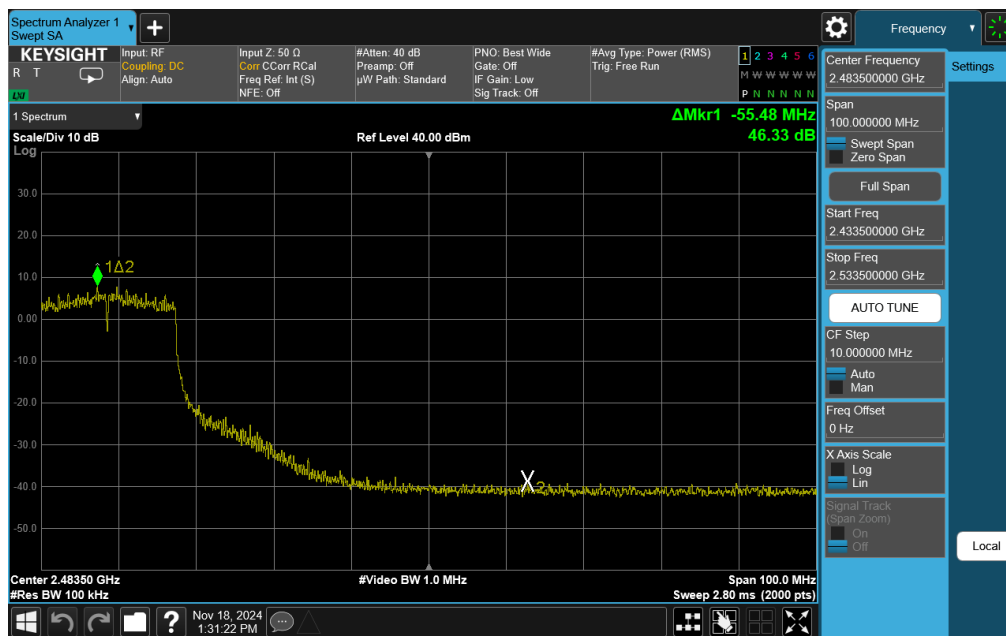


Plot 7-58. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 7)


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 66 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

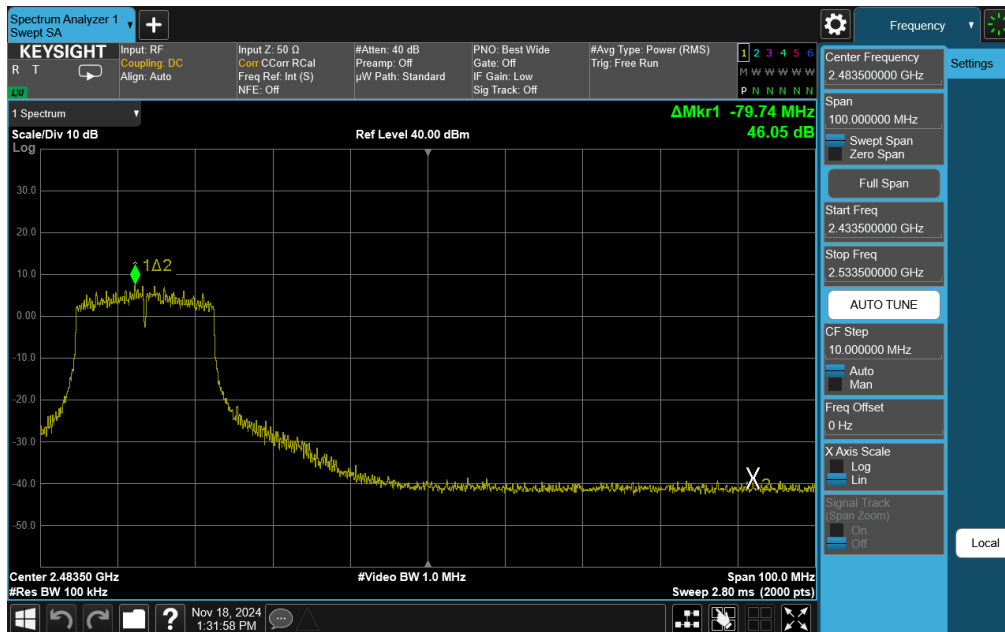

Plot 7-59. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 8)

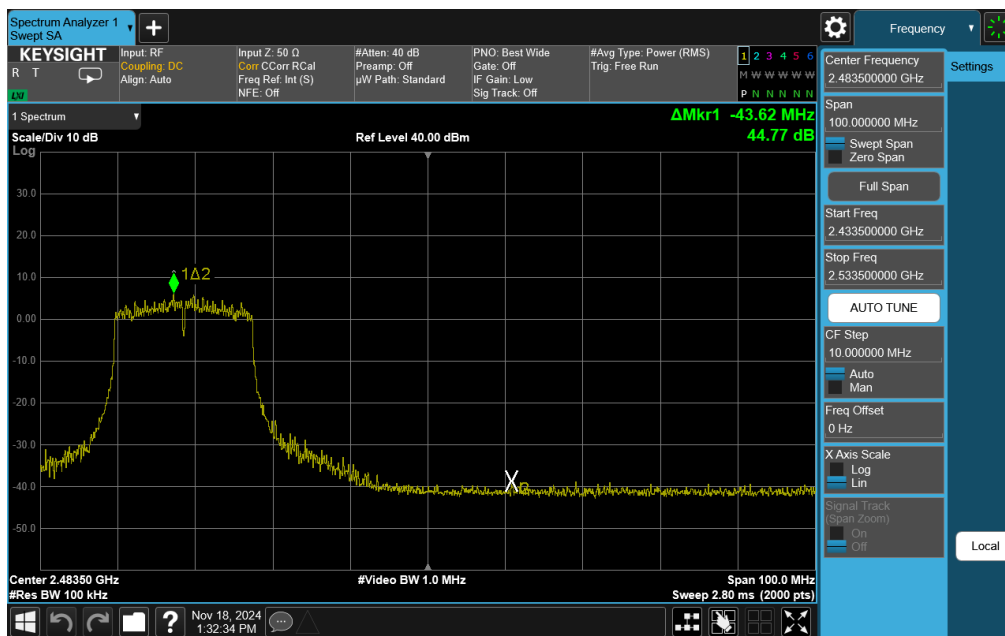


Plot 7-60. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 9)


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 67 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

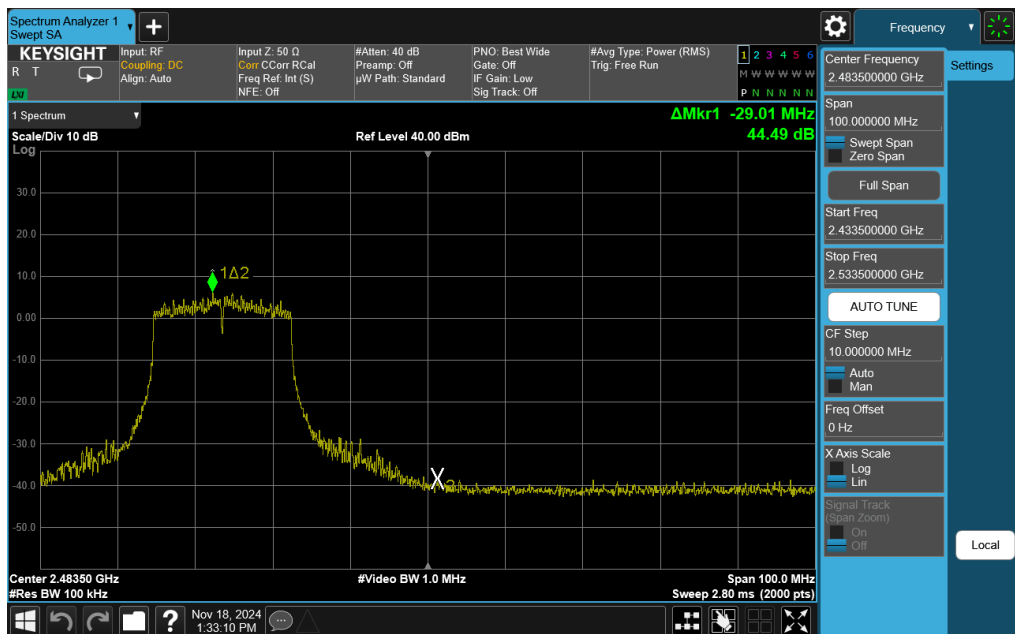

Plot 7-61. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 10)

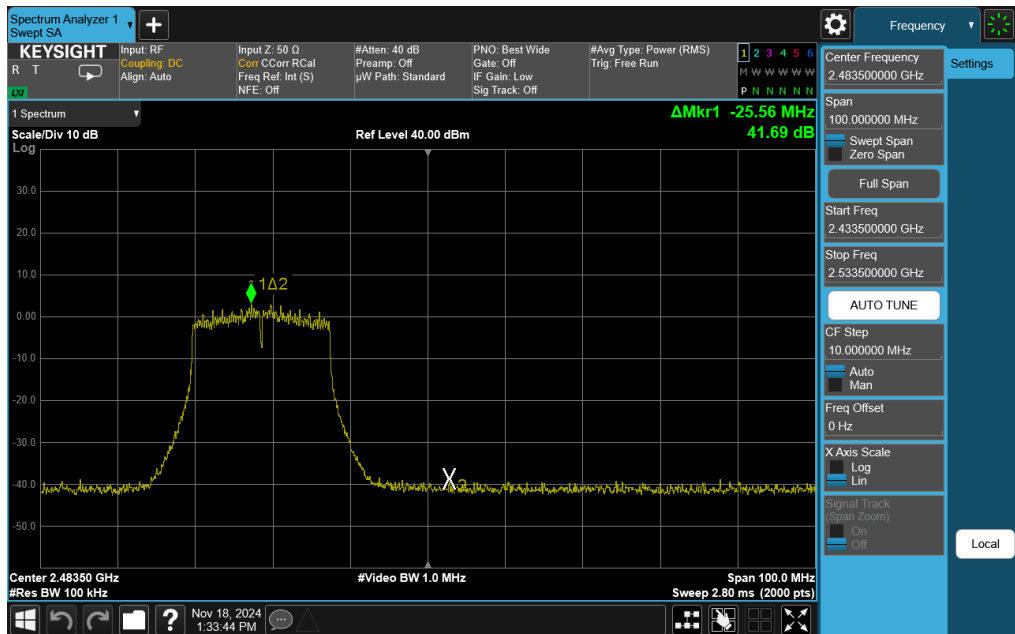


Plot 7-62. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 11)


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 68 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

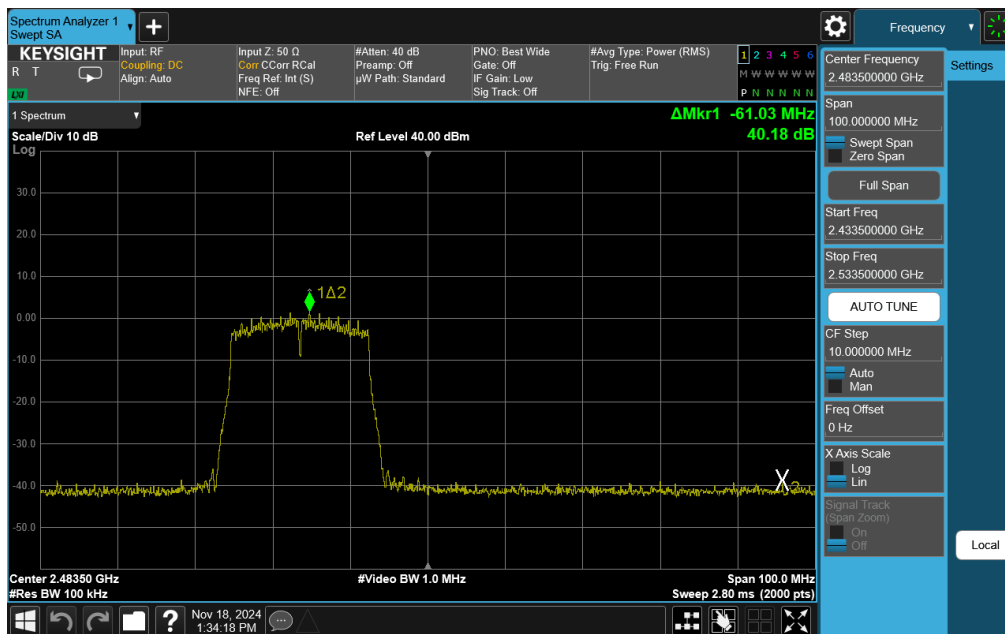

Plot 7-63. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 12)

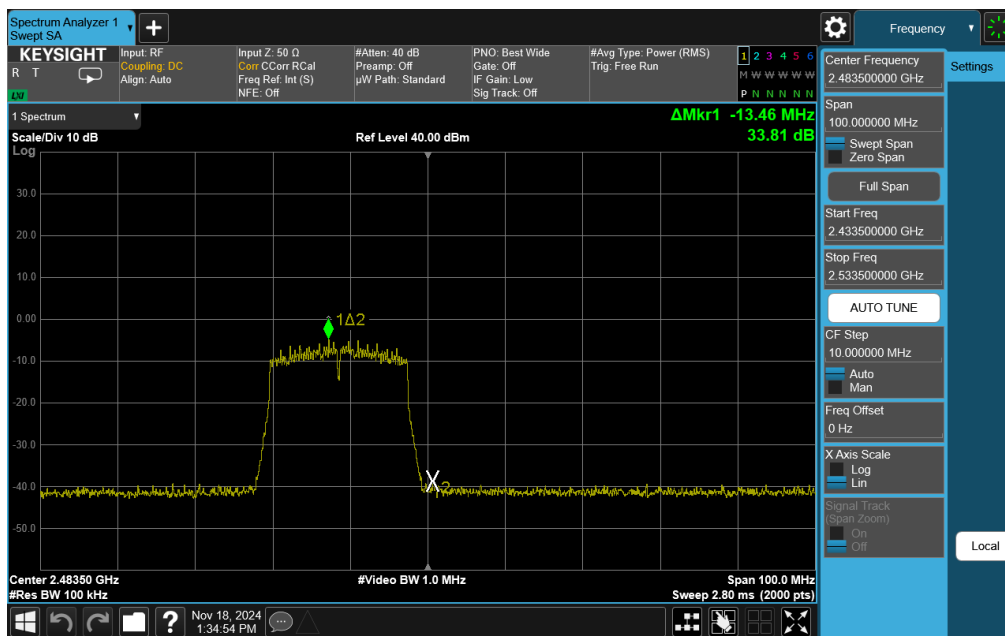


Plot 7-64. Band Edge Plot Antenna WF8 (802.11n (2.4GHz) – Ch. 13)


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 69 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

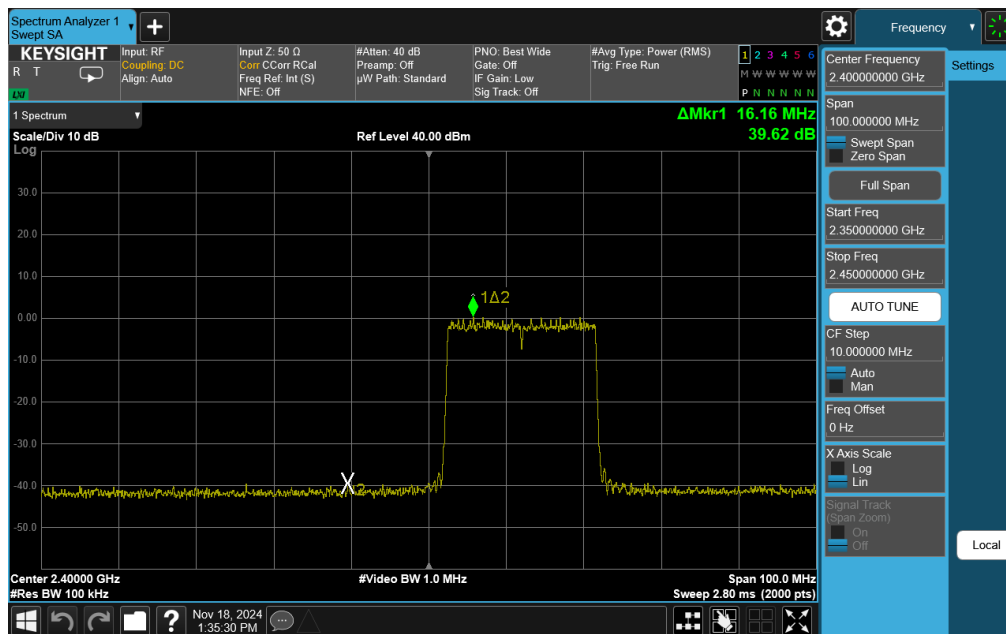

Plot 7-65. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 1)

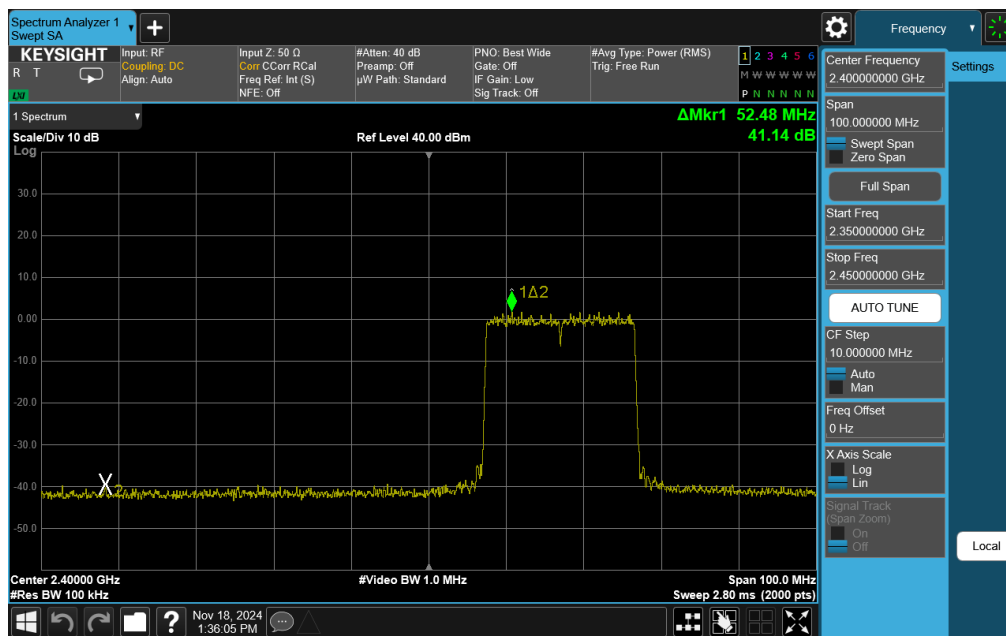


Plot 7-66. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 2)


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 70 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

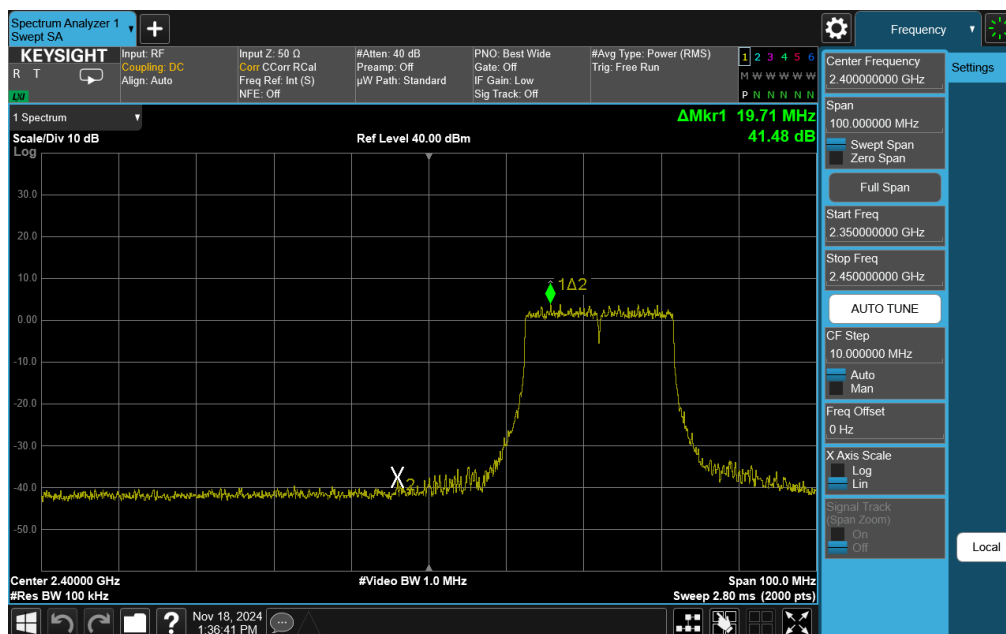

Plot 7-67. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 3)

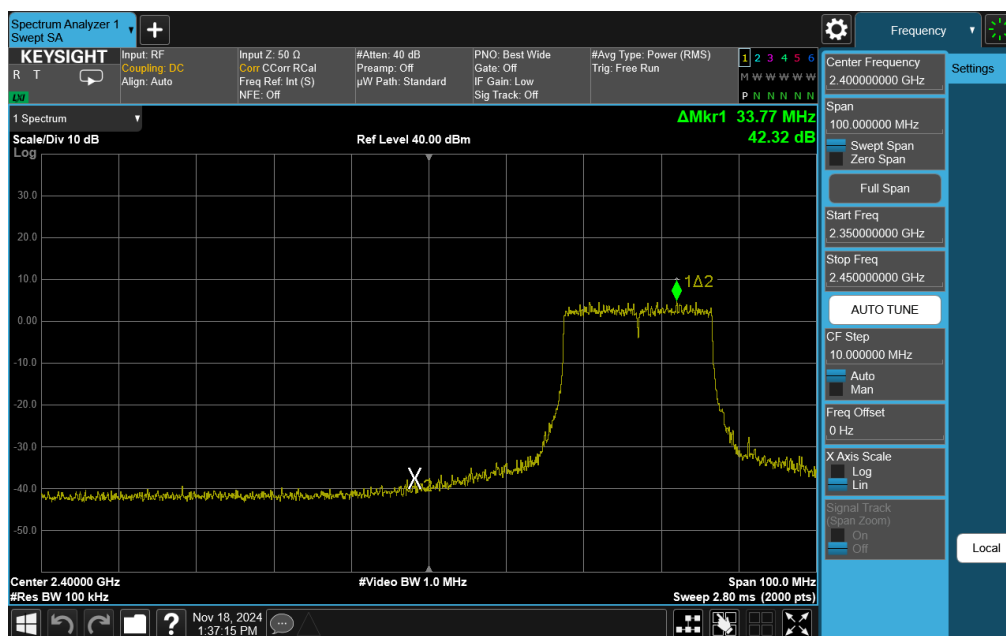


Plot 7-68. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 4)


FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 71 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

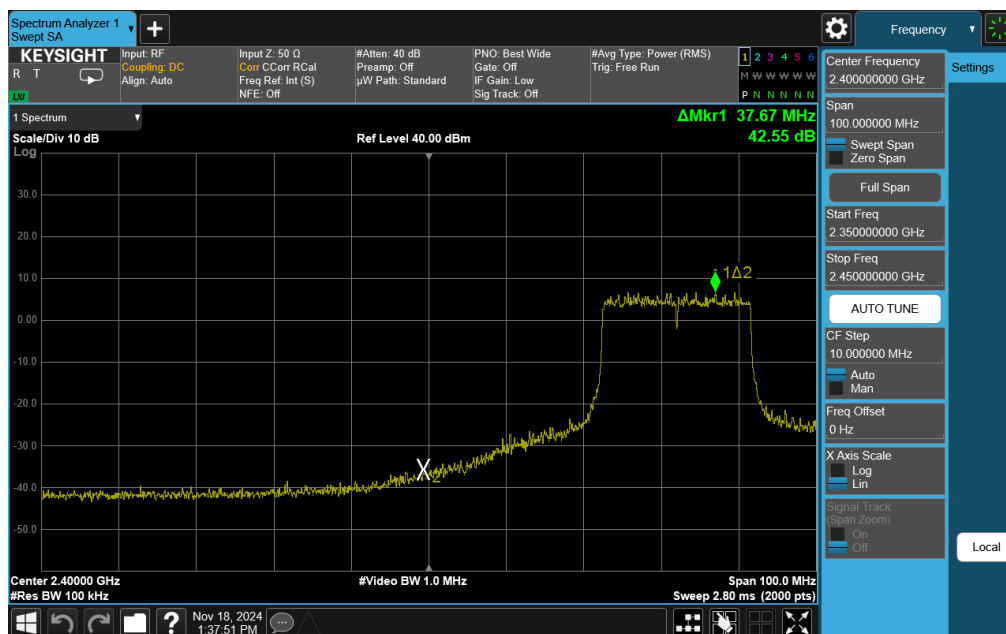

Plot 7-69. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 5)

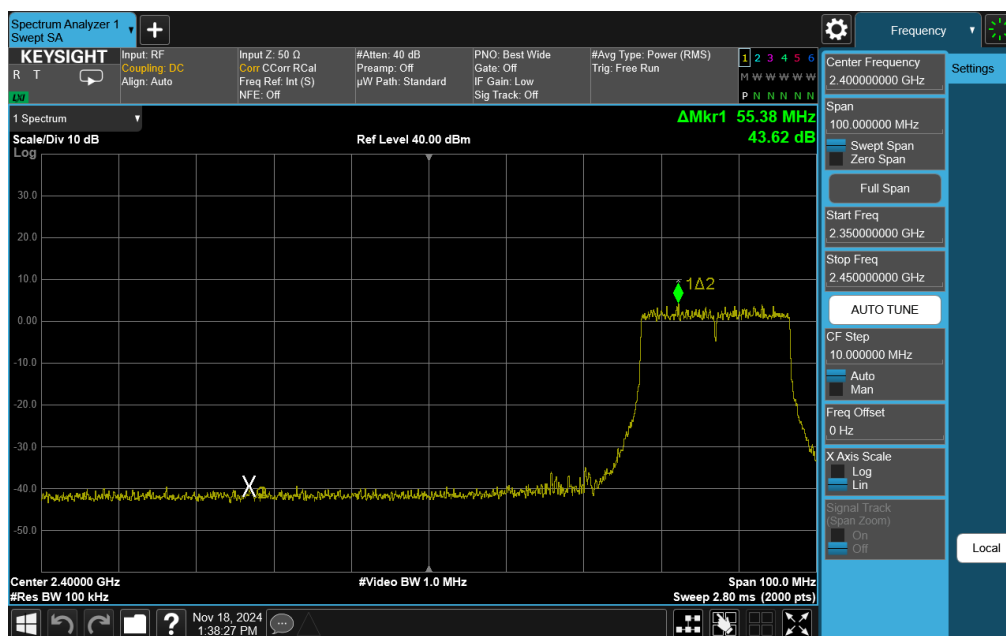


Plot 7-70. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 6-Low)


FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 72 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

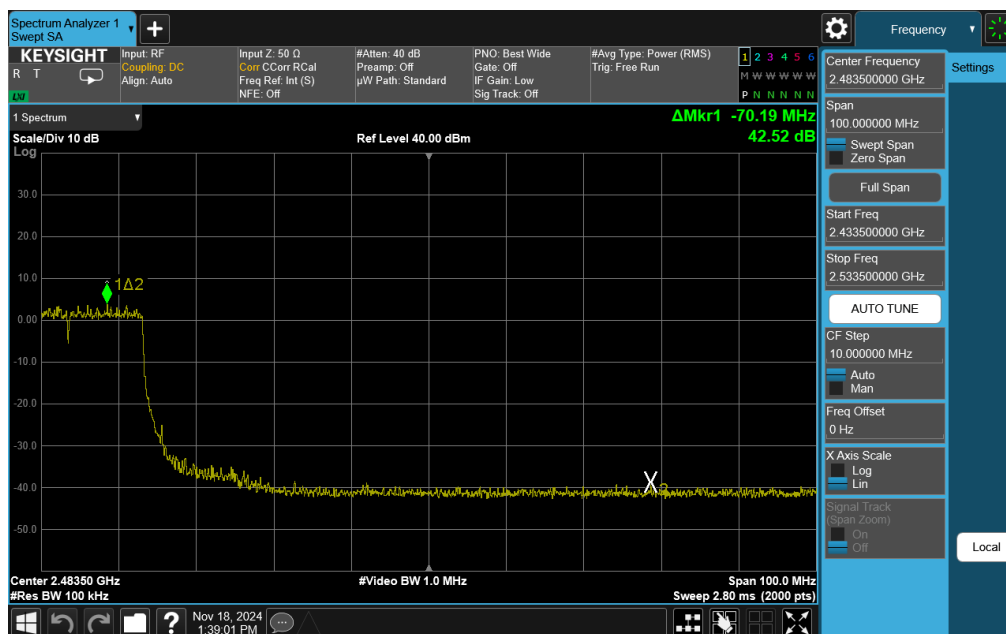

Plot 7-71. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 6-High)

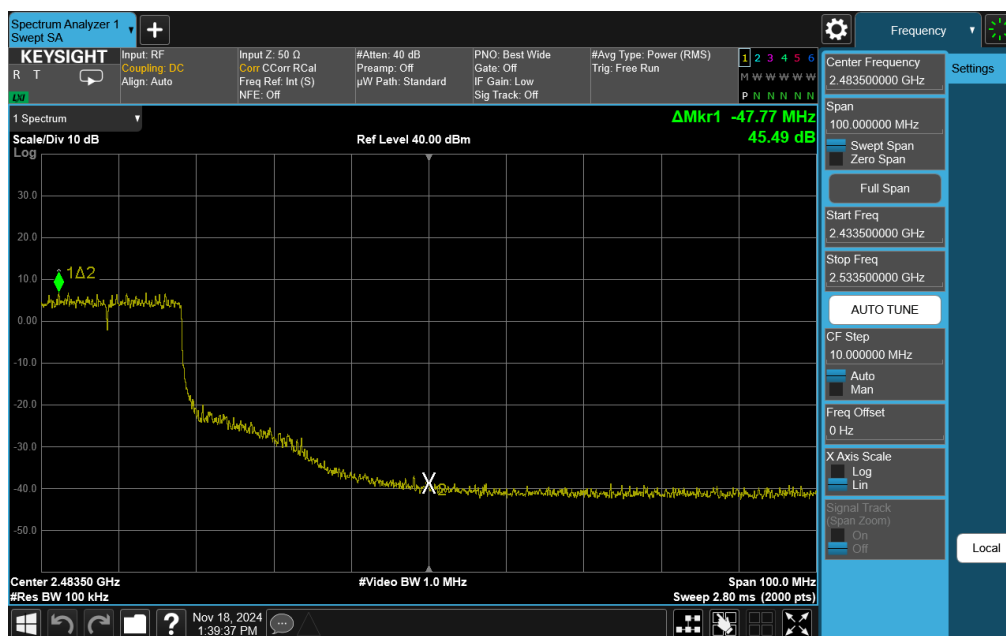


Plot 7-72. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 7)


FCC ID: BCGA3354 IC: 579C-A3354	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 73 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

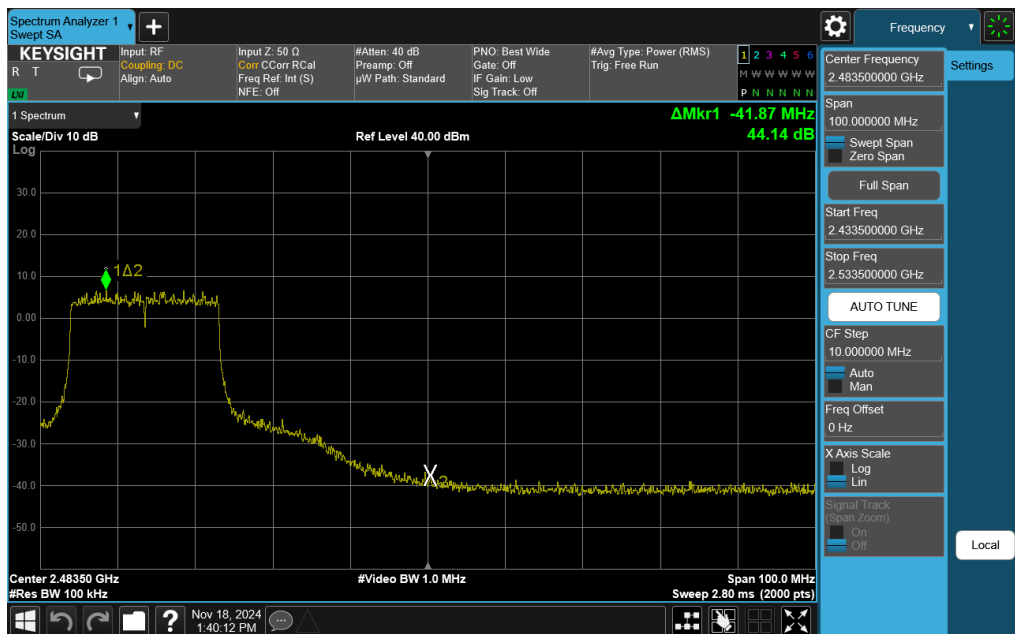

Plot 7-73. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 8)

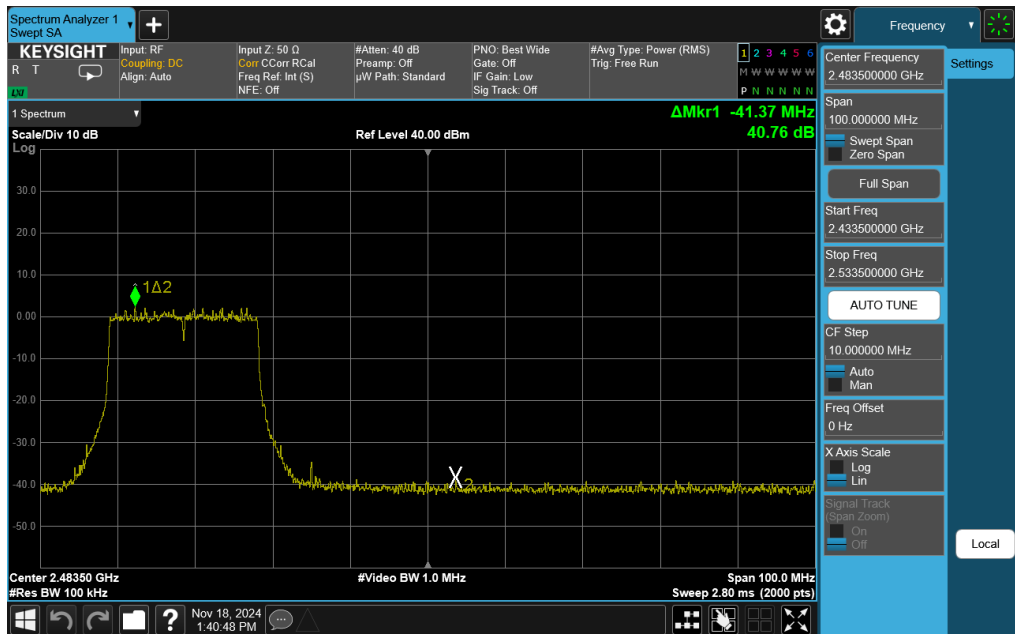


Plot 7-74. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 9)


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 74 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

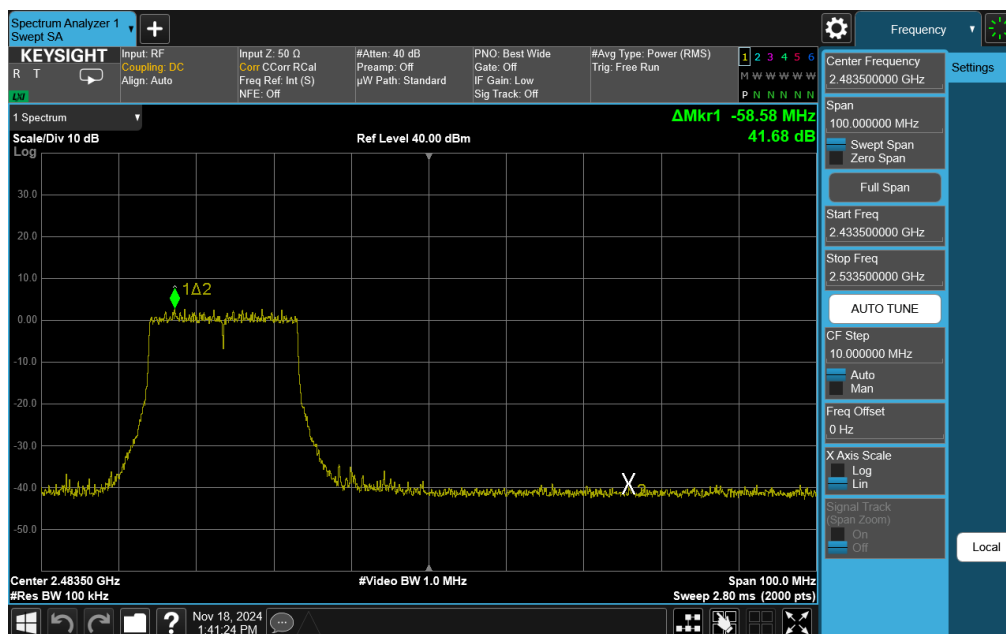

Plot 7-75. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 10)

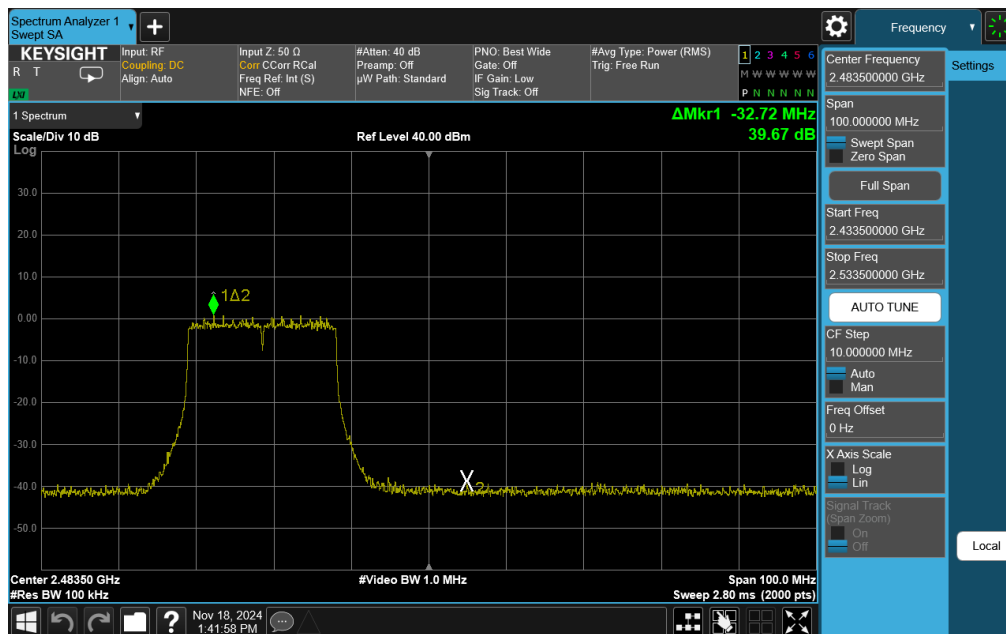


Plot 7-76. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 11)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 75 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


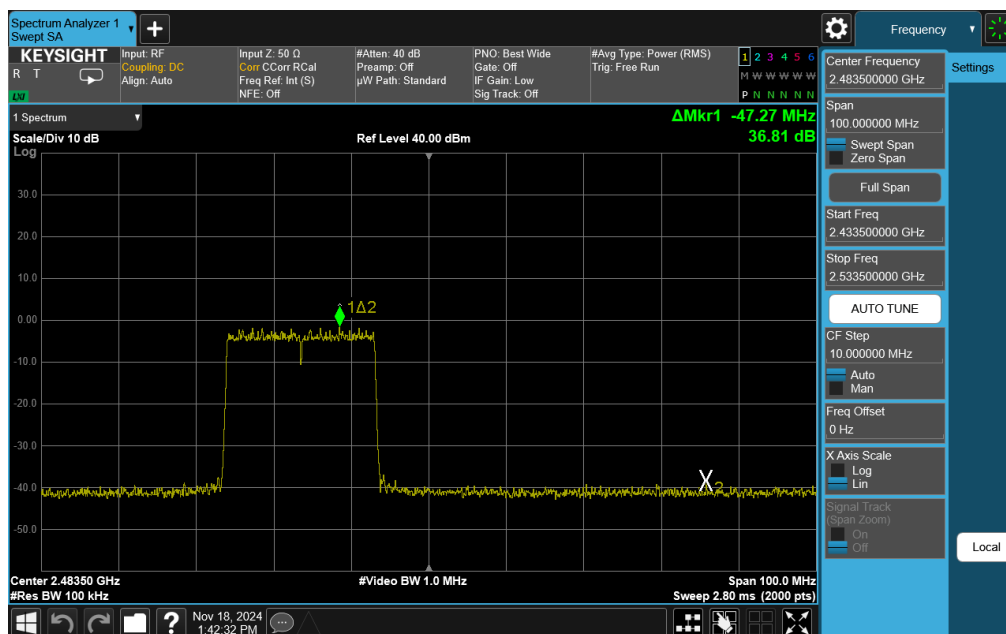


Plot 7-77. Band Edge Plot Antenna WF8 (802.11ax (SU - 2.4GHz) – Ch. 12)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 76 of 181

V 10.6 09/14/2023


7.5.2 Antenna WF7b Conducted Emissions at the Band Edge

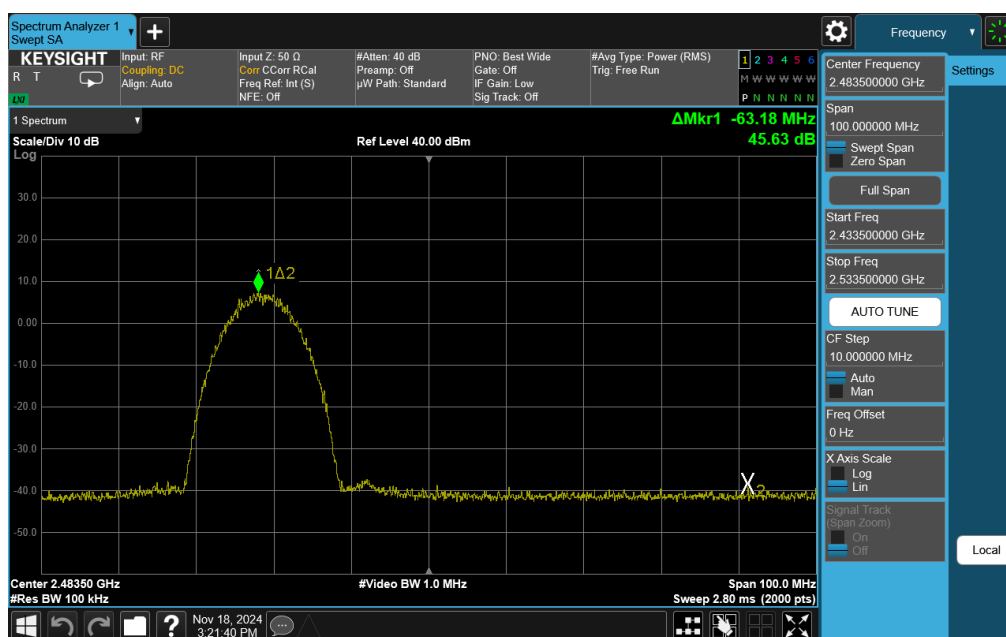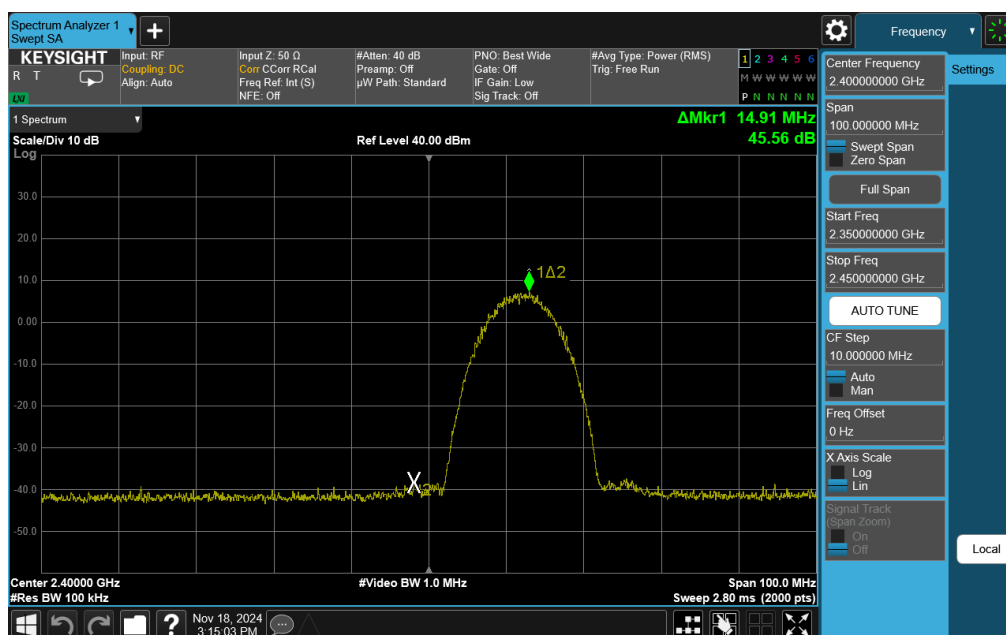


FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 77 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

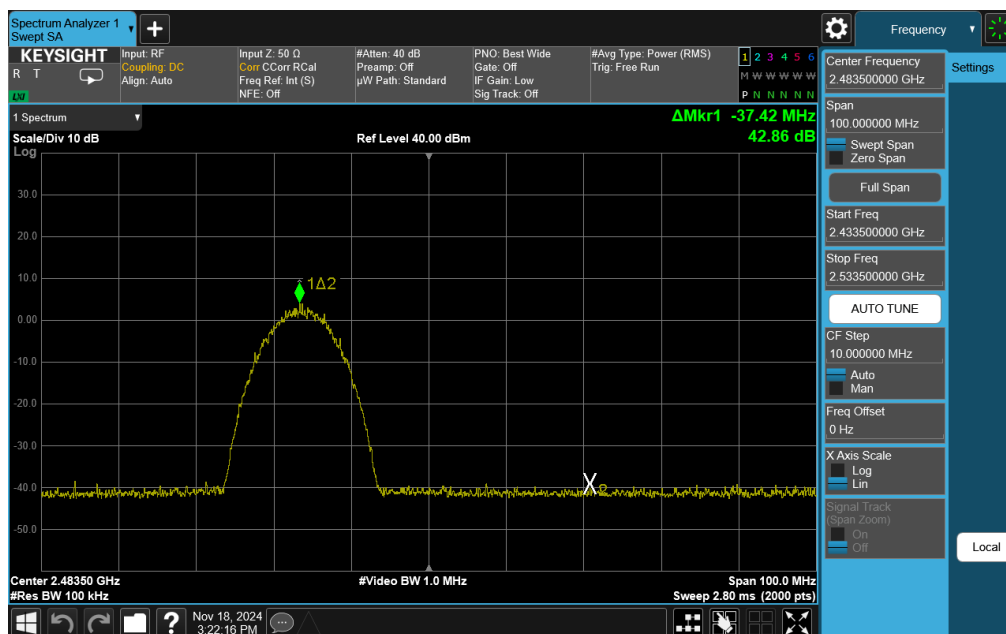

Plot 7-80. Band Edge Plot Antenna WF7b (802.11b – Ch. 12)

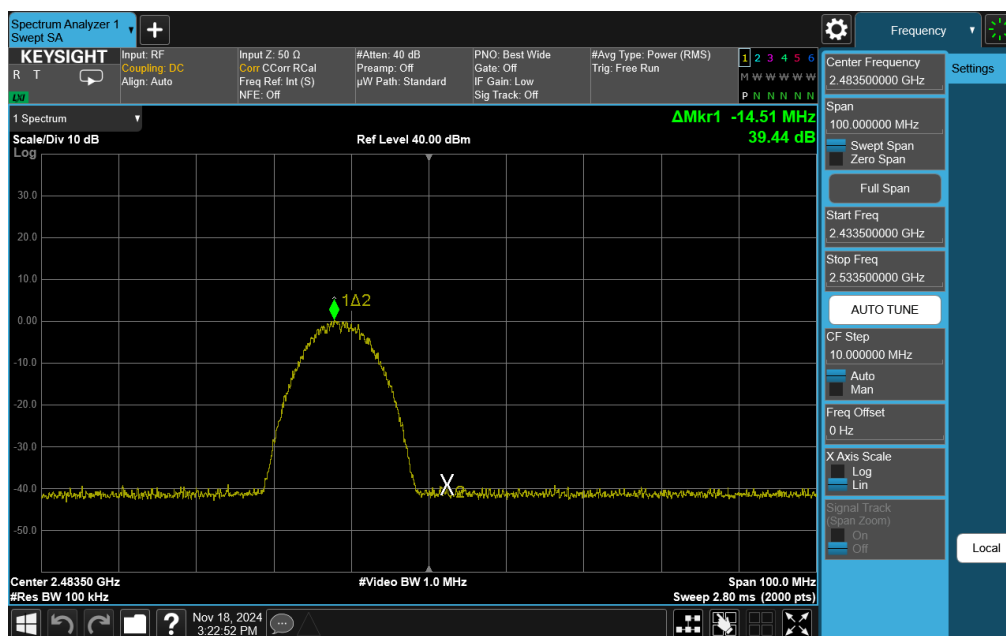

Plot 7-81. Band Edge Plot Antenna WF7b (802.11b – Ch. 13)

FCC ID: BCGA3354 IC: 579C-A3354		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2410210076-03-R1.BCG	Test Dates: 10/25/2024 - 1/24/2025	EUT Type: Tablet Device	Page 78 of 181

V 10.6 09/14/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Materials Technology. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.