



ESTECH Co., Ltd.



Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

Test Report for FCC

FCC ID:BEJ50PK750UA

Report Number		ESTF151001-001			
Applicant	Company name	LG Electronics USA			
	Address	1000 Sylvan Avenue Englewood Cliffs, NJ 07632			
	Telephone	847-941-8373			
Product	Product name	PLASMA TV/MONITOR			
	Model name	50PK750-UA	Manufacturer	LG Electronics Inc.	
	Serial number	NONE	Country of origin	KOREA	
Test date	5-Jan-10		Date of issue	14-Jan-10	
Testing location	ESTECH. Co., Ltd. 97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea				
Standard	FCC PART 15 (2008) & ICES-003 , ANSI C 63.4 2003				
Test item	<input checked="" type="checkbox"/> Conducted Emission	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B	Test result	OK
	<input checked="" type="checkbox"/> Radiated Emission	<input type="checkbox"/> Class A	<input checked="" type="checkbox"/> Class B	Test result	OK
Measurement facility registration number	94696				
Tested by	Senior Engineer H.H.Lee		 (Signature)		
Reviewed by	Engineering Manager J.M.Yang		 (Signature)		
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable				
<p>* Note</p> <ul style="list-style-type: none"> - Basic model: 50PK750-UA Additional model: 50PK750-UF Basic model and additional model are same product, only model name is different. - This test report is not permitted to copy partly without our permission - This test result is dependent on only equipment to be used - This test result based on a single evaluation of one sample of the above mentioned 					

Contents

1. Laboratory Information	3
2. Description of EUT	4
3. Test Standards	5
4. Measurement condition	6
5. Measurement of radiated emission	8
5.1 Measurement equipment	8
5.2 Environmental conditions	8
5.3 Test data	9
5.4 Test data	10
6. Measurement of conducted emission	11
6.1 Measurement equipment	11
6.2 Environmental conditions	11
6.3 Test data	12
7. Photographs of test setup	13
8. Photographs of EUT	15

Appendix 1. Spectral diagram



1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report. ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co., Ltd.

Head Office : Rm 1015, World Venture Center II, 426-5, Gasan-dong, Geumcheon-gu, Seoul, Korea
(Safety & Telecom. Test Lab)

EMC Test Lab : 97-1, Hoeok-ri, Majang-myun, Ichion-city, Kyonggi-do, South Korea

1.3 Official Qualification(s)

KCC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE



ESTECH Co., Ltd.

Rm 1015, World Venture Center 11,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



Electromagnetic Interference Test Report

2. Description of EUT

2.1 Summary of Equipment Under Test

Product Name : PLASMA TV/MONITOR
 Model Number : 50PK750-UA
 Serial Number : NONE
 Manufacturer : LG Electronics Inc.
 Country of origin : KOREA
 Rating : INPUT: AC100-240 V ~ 50 /60 Hz
 Receipt Date : 28-Dec-10
 X-tal list(s) : 4 MHz, 10 MHz, 54 MHz

2.2 General descriptions of EUT

MODELS		50PK750 (50PK750-UA)	Resolution	Horizontal Frequency(KHz)	Vertical Frequency(KHz)
Dimensions (Width x Height x Depth)	With stand	46.6 x 31.5 x 12.1 inches 1184.0 X 801.0 X 309.7 mm	640x350	31.468	70.09
	Without stand	46.6 x 29.0 x 2.0 inches 1184.0 X 738.5 X 52.4 mm	720x400	31.469	70.08
Weight	With stand	71.2 lbs / 32.3 kg	640x480	31.469	59.94
	Without stand	65.9 lbs / 29.9 kg	800x600	37.879	60.31
Power requirement	AC100-240V - 50/60Hz		1024x768	48.363	60.00
Television System	NTSC-M, ATSC, 64 & 256 QAM		1280x768	47.776	59.87
Program Coverage	VHF 2-13, UHF 14-69, CATV 1-135, DTV 2-69, CADTV 1-135		1360x768	47.712	60.015
External Antenna Impedance	75 ohm				
Environment condition	Operating Temperature	32 - 104°F (0 - 40°C)	1280x1024	63.981	60.02
	Operating Humidity	Less than 80%			
	Storage Temperature	-4 - 140°F (-20 - 60°C)	1600x1200	75.00	60.00
	Storage Humidity	Less than 85%			
			1920x1080 RGB-PC	66.587	59.934
			1920x1080 HDMI-PC	67.50	60.00



3. Test Standards

Test Standard : FCC PART 15 (2008) & ICES-003

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.4 (2003)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea




**Electromagnetic
Interference
Test Report**

4. Measurement Condition

4.1 EUT Operation.

- * The EUT was in the following operation mode during all testing
- * The operational conditions of the EUT was determined by the manufacturer according to the typical use of the EUT with respect to the expected highest level of emission
- * After setting as test arrangement diagram, we tested the EUT under continuous displaying "H" character and playing Audio out /Video
- * Using ping command between external Network, Transmission and Receiving test at between external Network.

4.2 Configuration and Peripherals

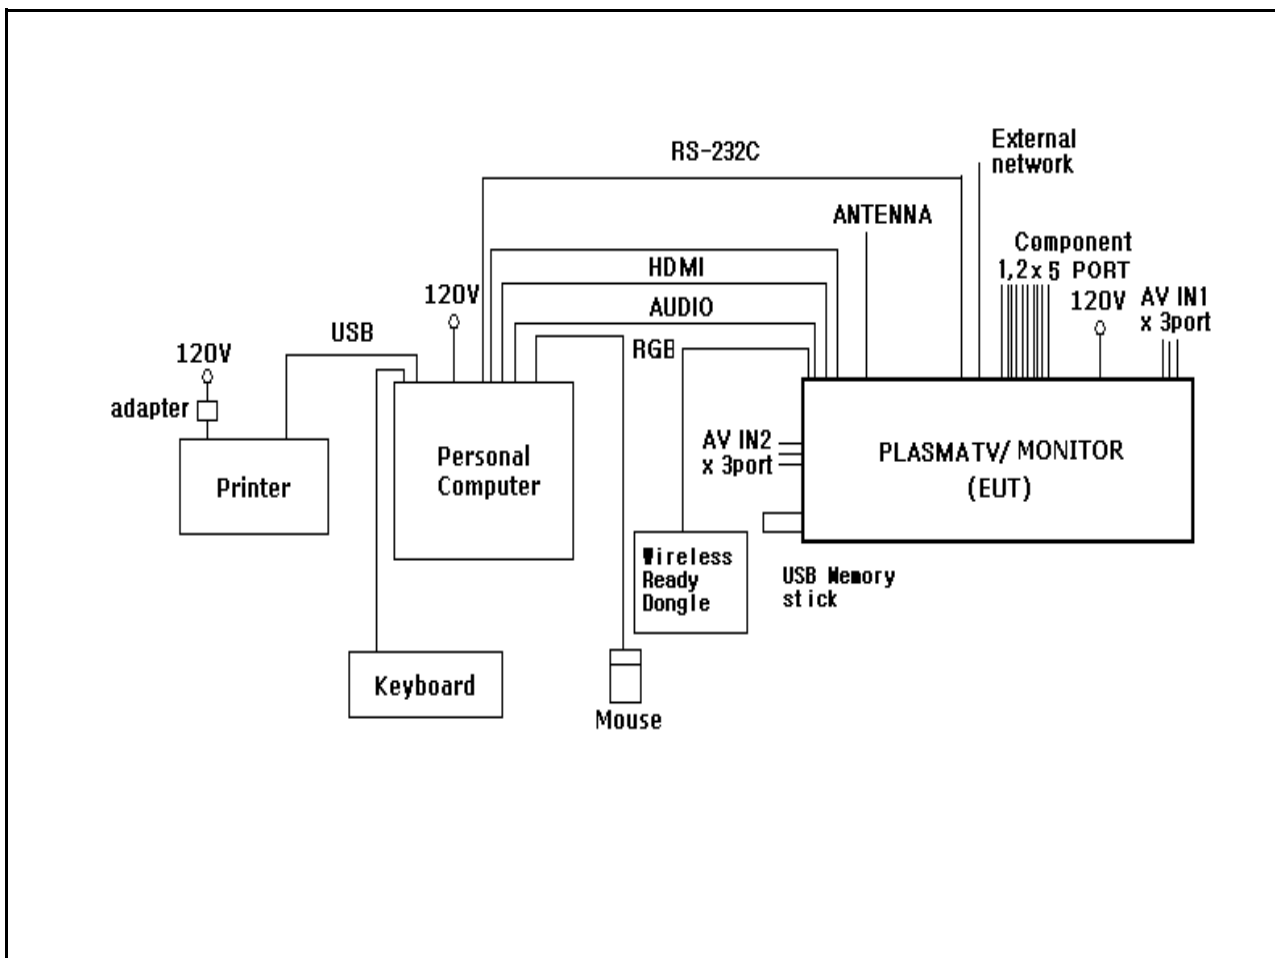

4.3 EUT and Support equipment

Equipment Name	Model	S/N	Manufacturer	Remark (FCC ID)
PLASMA TV/MONITOR	50PK750-UA	NONE	LG Electronics Inc.	EUT
Personal Computer	DCGAF	HKKPHBX	Dell Inc.	-
Printer	VCVRA-0702	TH7C6326RY	HEWLETT-PACKARD	-
Keyboard	KU-0459	7691401960296	Microsoft	-
Mouse	MO56UOA	G1701P6T	Dell Inc.	-
Wireless Ready Dongle	NONE	NONE	LG Electronics Inc.	-
USB Memory Stick	SUB-M1GLS	NONE	SAMSUNG	-
Adapter	PA8040WB	0703016326	Bestec Electronics (Dongguan) Co.,Ltd.	-

4.4 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
PLASMA TV/MONITOR	HDMI	Personal Computer	HDMI	2	Y	
PLASMA TV/MONITOR	RGB	Personal Computer	RGB	2	Y	
PLASMA TV/MONITOR	AUDIO IN	Personal Computer	AUDIO OUT	2	N	
PLASMA TV/MONITOR	LAN	External Network	LAN	20	N	
PLASMA TV/MONITOR	RS-232C	Personal Computer	USB	3	N	
PLASMA TV/MONITOR	Wirelss Control	Wireless Ready Dongle	Wirelss Control	0.7	Y	
PLASMA TV/MONITOR	AV IN 1 x3port	-	-	2	N	
PLASMA TV/MONITOR	Component 1 x5port	-	-	2	N	
PLASMA TV/MONITOR	Component 2 x5port	-	-	2	N	
PLASMA TV/MONITOR	AV IN 2 x3port	-	-	2	N	
PLASMA TV/MONITOR	ANTENNA	-	-	2	Y	
Personal Computer	USB	Keyboard	USB	2	Y	
Personal Computer	USB	Mouse	USB	2	Y	
Personal Computer	USB	Printer	USB	2	Y	
Printer	Power	Adapter	-	2	N	

5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC Part 15 (2008) & ICES-003. The test setup was made according to ANSI C 63.4 (2003) on an open test site, which allows a 3m distance measurement. The EUT was placed in the center of wooden turntable. The height of this table was 0.8m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

5.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESVS10	Rohde & Schwarz	838562/002	2010. 1. 29
Spectrum Analyzer	R3273	ADVANTEST	110600592	2010. 6. 04
LogBicon Antenna	VULB 9160	Schwarzbeck	3142	2010. 5. 13
Amplifier	8447F	HP	2805A02972	2010. 6. 24
Turn Table	2087	EMCO	2129	-
Antenna Mast	2070-01	EMCO	9702-203	-
ANT Mast Controller	2090	EMCO	1535	-
Turn Table Controller	2090	EMCO	1535	-

5.2 Environmental Condition

Test Place : Open site(3m)

RGB mode

Temperature (°C) : 4 °C

Humidity (%) : 50 %

HDMI mode

Temperature (°C) : 3 °C

Humidity (%) : 51 %



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

5.3 Test data

Test Date : 5-Jan-10

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
30.88	19.00	V	1.0	10.97	0.9	40.0	30.86	-9.14
54.00	12.80	H	4.0	12.50	1.1	40.0	26.42	-13.58
108.77	16.00	V	1.0	10.24	1.6	43.5	27.84	-15.66
125.04	8.20	H	2.7	11.61	1.8	43.5	21.58	-21.92
166.30	8.80	H	3.0	12.61	2.1	43.5	23.56	-19.94
216.04	6.20	H	2.1	10.32	2.5	46.0	19.01	-26.99
250.00	16.20	V	1.0	11.45	2.8	46.0	30.44	-15.56
276.74	15.40	H	1.5	12.40	3.1	46.0	30.86	-15.14
297.31	7.30	V	1.0	13.12	3.2	46.0	23.59	-22.41
356.38	6.40	H	1.0	14.34	3.7	46.0	24.42	-21.58
400.00	10.80	V	1.6	15.43	4.0	46.0	30.23	-15.77
415.15	16.30	V	1.4	15.81	4.2	46.0	36.26	-9.74
432.02	16.00	H	1.0	16.23	4.3	46.0	36.56	-9.44
479.27	15.50	V	1.0	17.08	4.6	46.0	37.17	-8.83
600.00	7.60	H	1.0	19.89	5.5	46.0	32.95	-13.05
794.34	6.80	V	2.1	22.40	6.9	46.0	36.14	-9.86

Remark

H : Horizontal, V : Vertical TEST MODE : Resolution1920*1080(60Hz) at RGB mode (Worse Case)
 *CL = Cable Loss-Amplifier Gain(In case of above1000Mhz)
 *CL = Cable Loss(In case of below1000Mhz)
 *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120KHz for Quasi-peak detection at frequency below 1GHz.
 *After connect with ferrite cores to RGB cable, tested radiated emission.

**ESTECH Co., Ltd.**Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea**Electromagnetic
Interference
Test Report****5.4 Test data**

Test Date : 5-Jan-10

Measurement Distance :

3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
30.00	20.10	V	1.0	10.94	0.9	40.0	31.92	-8.08
48.00	22.10	H	2.8	12.62	1.1	40.0	35.78	-4.22
54.00	21.60	H	4.0	12.50	1.1	40.0	35.22	-4.78
81.01	20.40	V	1.0	8.45	1.4	40.0	30.23	-9.77
110.25	11.60	H	2.6	10.37	1.6	43.5	23.59	-19.91
120.00	20.20	H	2.4	11.27	1.8	43.5	33.23	-10.27
144.03	20.00	H	1.8	12.68	2.0	43.5	34.68	-8.82
168.00	21.00	H	1.5	12.51	2.2	43.5	35.68	-7.82
191.99	20.10	H	1.4	10.57	2.3	43.5	32.99	-10.51
216.00	14.40	H	1.6	10.32	2.5	43.5	27.21	-16.29
222.98	8.00	H	1.4	10.55	2.6	46.0	21.10	-24.90
240.03	15.20	H	1.1	11.12	2.7	46.0	29.01	-16.99
250.00	12.60	V	1.0	11.45	2.8	46.0	26.84	-19.16
264.03	16.20	H	1.0	11.95	2.9	46.0	31.05	-14.95
315.00	11.80	H	1.0	13.51	3.3	46.0	28.65	-17.35
336.03	16.00	H	1.0	13.90	3.6	46.0	33.46	-12.54
384.03	13.20	H	1.0	15.03	3.9	46.0	32.12	-13.88
415.15	18.00	H	1.0	15.81	4.2	46.0	37.96	-8.04
480.03	19.10	H	1.0	17.09	4.6	46.0	40.78	-5.22
552.04	10.80	V	1.4	18.48	5.2	46.0	34.48	-11.52
600.00	9.00	H	1.0	19.89	5.5	46.0	34.35	-11.65
888.00	6.10	V	1.4	23.36	7.7	46.0	37.12	-8.88

Remark

H : Horizontal, V : Vertical TEST MODE : Resolution1920*1080(60Hz) at HDMI mode (Worse Case)
 *CL = Cable Loss-Amplifier Gain(In case of above1000Mhz)
 *CL = Cable Loss(In case of below1000Mhz)
 *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120KHz for Quasi-peak detection at frequency below 1GHz.
 *After connect with ferrite cores to RGB cable, tested radiated emission.

6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 to 30 MHz was measured in accordance to FCC Part 15 (2008) & ICES-003. The test setup was made according to ANSI C 63.4 (2003) in a shielded. The EUT was placed on a non-conductive table at least 80 cm above the ground plan. A grounded vertical reference plane was positioned in a distance of 40 cm from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

6.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
LISN	NNLA8120A	Schwarzbeck	8120161	2010. 2. 21
LISN	ESH3-Z5	Schwarzbeck	838979/010	2010. 2. 21
TEST Receive	ESPI7	Rohde & Schwarz	100185	2010. 8. 24
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	2010. 9. 09

6.2 Environmental Condition

Test Place : Shield Room
 Temperature (°C) : 21 °C
 Humidity (%) : 44 %



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

6.3 Test data

Test Date : 5-Jan-10

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Average Value		
	Lisn (dB)	Cable (dB)		Limit (dB μ V)	Reading (dB μ V)	Result (dB μ V)	Limit (dB μ V)	Reading (dB μ V)	Result (dB)
0.15	0.09	0.3	N	66.00	51.48	51.82	56.00	44.35	44.69
0.19	0.09	0.3	N	64.08	45.67	46.01	54.08	39.21	39.55
0.20	0.09	0.3	N	63.57	43.98	44.32	53.57	38.36	38.70
0.25	0.09	0.3	H	61.69	41.41	41.75	51.69	30.31	30.65
0.26	0.09	0.3	H	61.50	40.27	40.61	51.50	30.31	30.65
1.67	0.13	0.5	N	56.00	49.33	49.92	46.00	32.32	32.91
2.08	0.14	0.4	N	56.00	50.42	51.00	46.00	34.84	35.42
3.12	0.17	0.5	N	56.00	47.16	47.84	46.00	31.99	32.67
3.13	0.17	0.5	H	56.00	47.78	48.46	46.00	29.19	29.87
3.54	0.19	0.5	N	56.00	48.82	49.54	46.00	33.12	33.84
5.37	0.24	0.7	H	60.00	35.90	36.81	50.00	20.62	21.53
5.48	0.25	0.7	N	60.00	35.38	36.30	50.00	19.62	20.54
6.40	0.29	0.7	N	60.00	30.50	31.52	50.00	19.42	20.44
19.71	0.78	1.2	H	60.00	31.24	33.17	50.00	29.03	30.96
21.66	0.82	1.2	H	60.00	31.30	33.33	50.00	29.36	31.39
23.13	0.85	1.3	H	60.00	32.51	34.62	50.00	30.46	32.57
Remark	H : Hot Line, N : Neutral Line								



ESTECH Co., Ltd.

Rm 1015, World Venture Center 11,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

7. Photographs of test setup

7.1 Setup for Radiated Test : 30 ~ 1000 MHz

[Front]



[Rear]





ESTECH Co., Ltd.


Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea




**Electromagnetic
Interference
Test Report**

7.2 Setup for Conducted Test : 0.15 ~ 30 MHz

[Front]

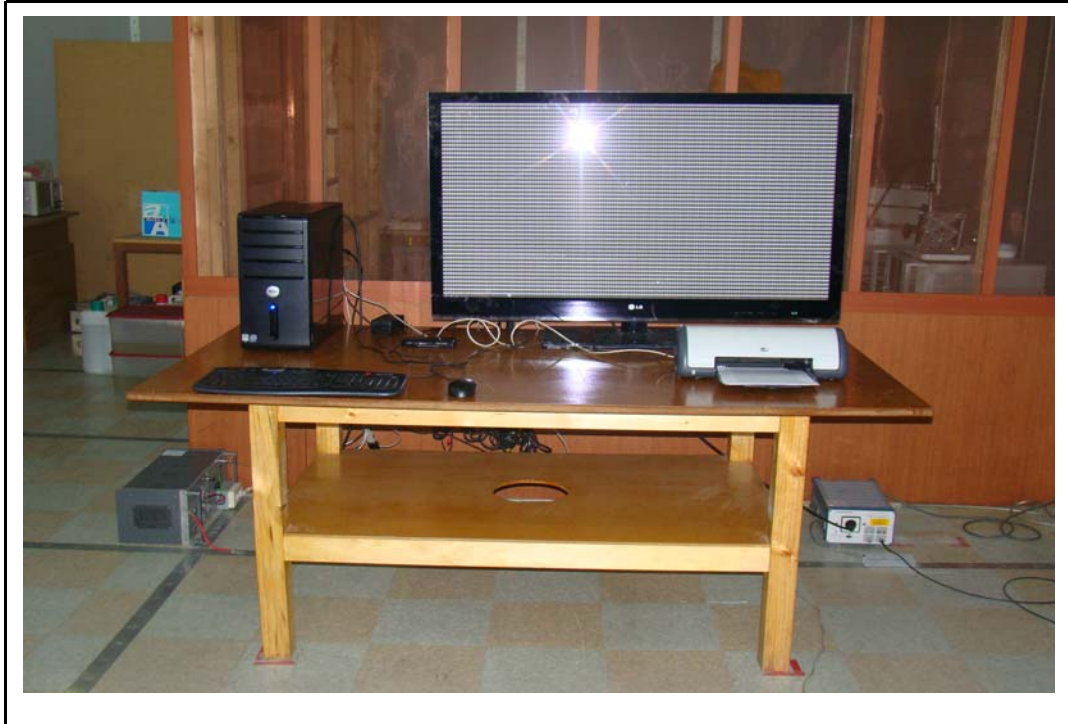

[Rear]

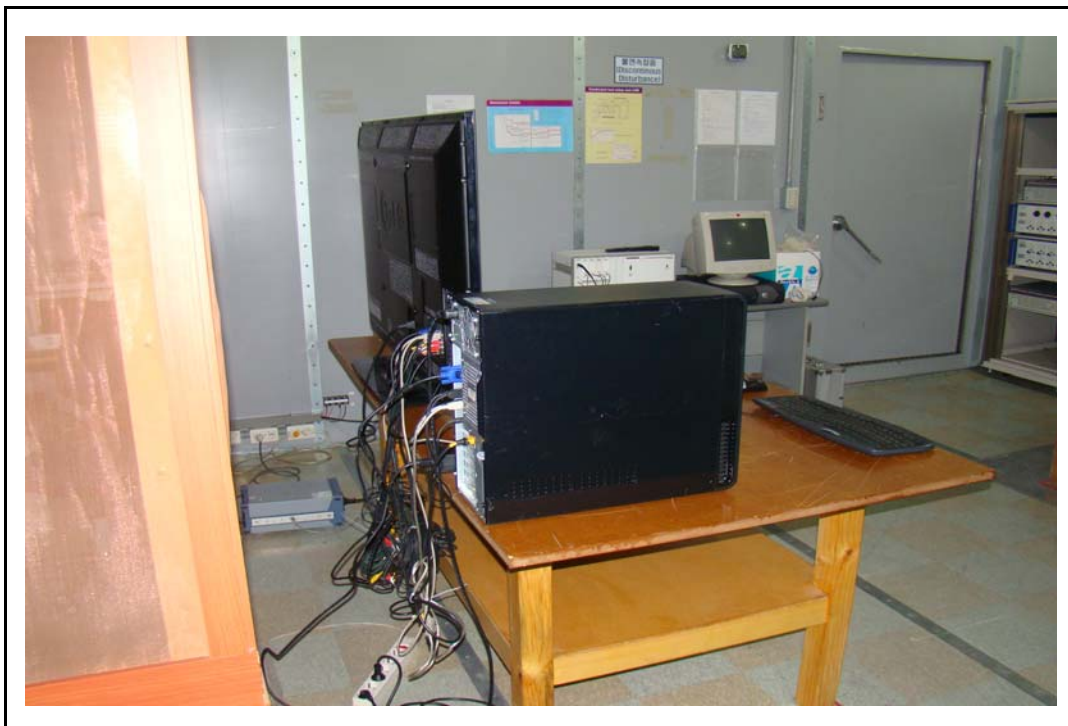



ESTECH Co., Ltd.

Rm 1015, World Venture Center 11,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**

8. Photographs of EUT

[Front]



[Rear]




Appendix 1. Spectral diagram

*HOT



RBW 9 kHz
MT 1 s

Att 10 dB AUTO PREAMP OFF

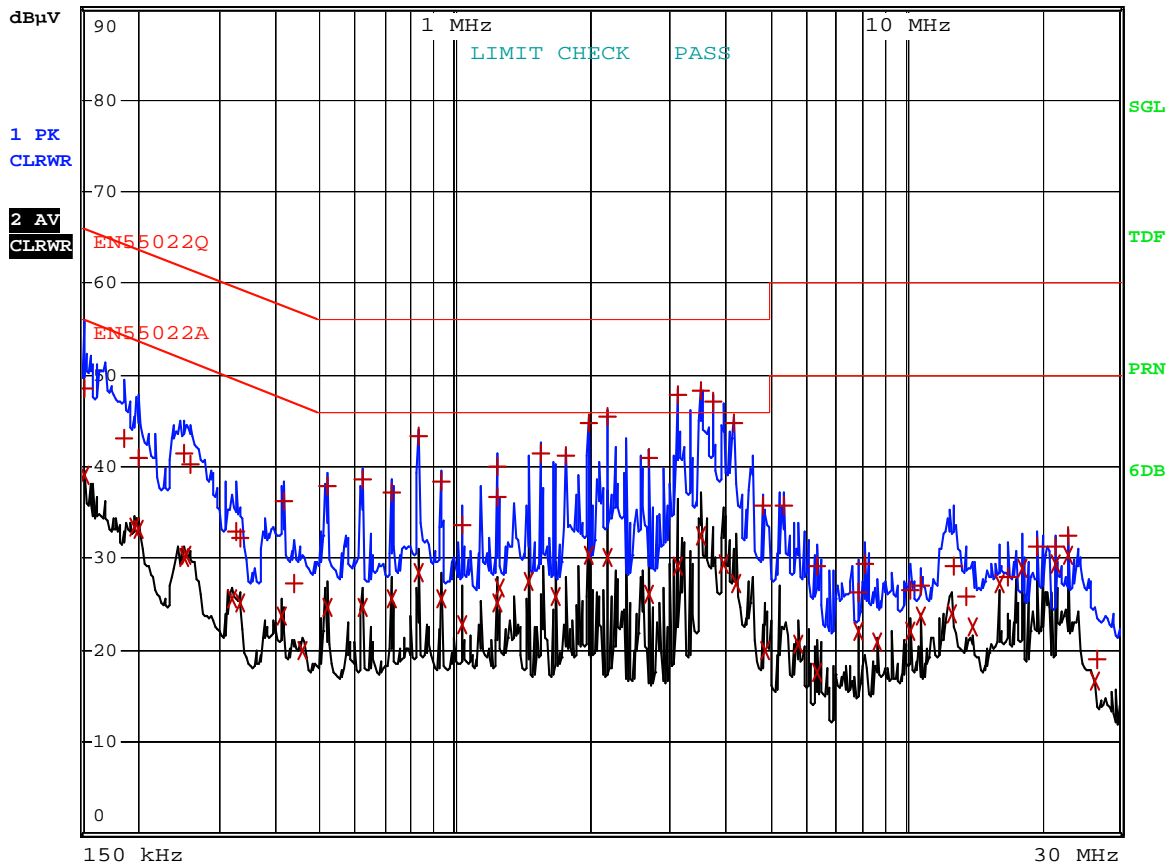

Comment: 50PK750_UA_HOT

Date: 5.JAN.2010 15:06:40


*NEUTRAL



RBW 9 kHz

MT 1 s

Att 10 dB AUTO PREAMP OFF

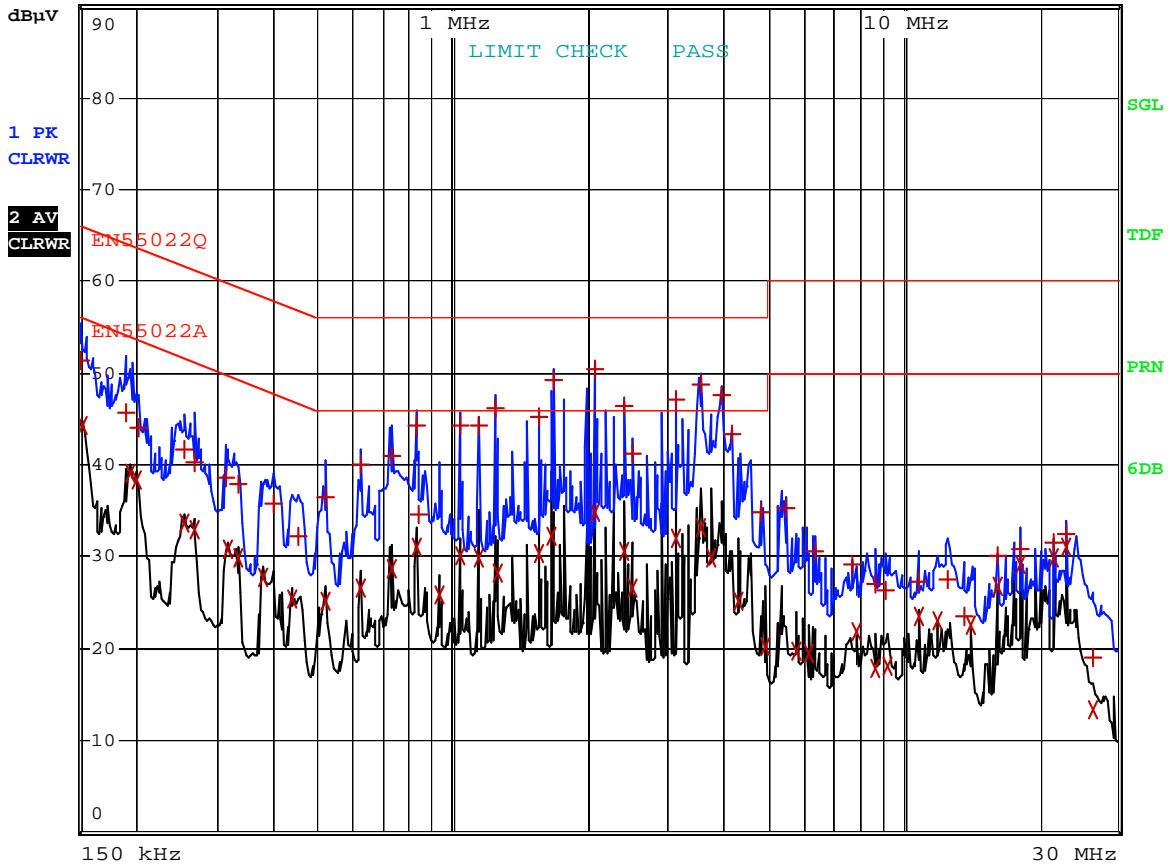

Comment: 50PK750-UA_NEUTRAL

Date: 5.JAN.2010 15:13:14