




Test Report for FCC

Report Number		ESTF150711-006			
Applicant	Company name	LG Electronics Inc.			
	Address	60-39, Gasan-dong, Gumchon-gu, Seoul, 153-023, Korea			
	Telephone	82-2-2033-3847			
Product	Product name	GSM Phone with Bluetooth			
	Model No.	KF300d, KF300c	Manufacturer	LG Electronics Inc.	
	Serial No.	NONE	Country of origin	KOREA	
Test date	2007-11-19 ~ 2007-11-20		Date of issue	23-Nov-07	
Testing location	ESTECH. Co., Ltd. 97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea				
Standard	FCC PART 15 2007 , ANSI C 63.4 2003				
Test item	Conducted Emission	Class A	Class B	Test result	OK
	Radiated Emission	Class A	Class B	Test result	OK
Measurement facility registration number		94696			
Tested by	Engineer M. J. Song  (Signature)				
Reviewed by	Engineering Manager J.M.Yang  (Signature)				
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable				
* Note - Basic Model : KF300d - Additional Model : KF300c - Basic Model and Addition Model are same product, only model name is different. - This test report is not permitted to copy partly without our permission - This test result is dependent on only equipment to be used - This test result based on a single evaluation of one sample of the above mentioned					

Contents

1. Laboratory Information	3
2. Description of EUT	4
3. Test Standards	5
4. Measurement condition	6
5. Measurement of radiated emission	8
5.1 Measurement equipment	8
5.2 Environmental conditions	8
5.3 Test data	9
6. Measurement of conducted emission	10
6.1 Measurement equipment	10
6.2 Environmental conditions	10
6.3 Test data	11

Appendix 1. Spectral diagram

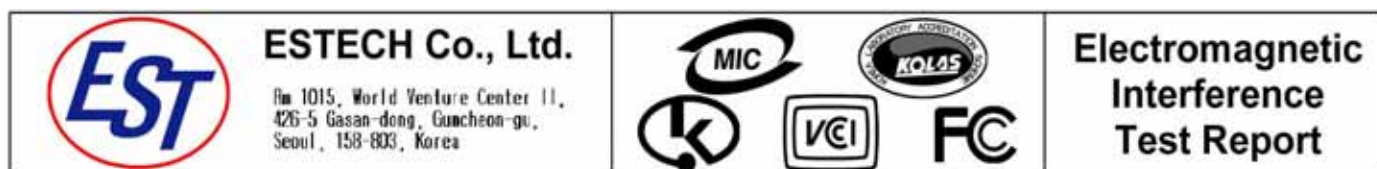

1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report.

ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co. Ltd

Head Office : Rm 1015, World Venture Center II, 426-5, Gasan-dong, Geumcheon-gu, Seoul, Korea
(Safety & Telecom. Test Lab)

EMC Test Lab : 58-1 Osan-Ri, GaNam-Myon, YeoJoo-Gun, KyungKi-Do, Korea
97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea

1.3 Official Qualification(s)

MIC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

2. Description of EUT

2.1 Summary of Equipment Under Test

Product name : GSM Phone with Bluetooth
Model Number : KF300d, KF300c
Serial Number : NONE
Manufacturer : LG Electronics Inc.
Country of origin : KOREA
Rating : Supplied from Note PC
Receipt Date : 6-Nov-07

3. Test Standards

Test Standard : FCC PART 15 (2007)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.4 (2003)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.


4. Measurement Condition

4.1 EUT Operation.

- * The EUT was in the following operation mode during all testing
- * The operational conditions of the EUT was determined by the manufacturer according to the typical use of the EUT with respect to the expected highest level of emission.
- * Connect the EUT to Note PC. *Osillator frequency:26MHz
- * Install sync program to Note PC.
- * Transferred "H" character data between the phone and note pc during the test.

*The supporting equipments used in the part15B testing were approved under Doc

4.2 Configuration and Peripherals

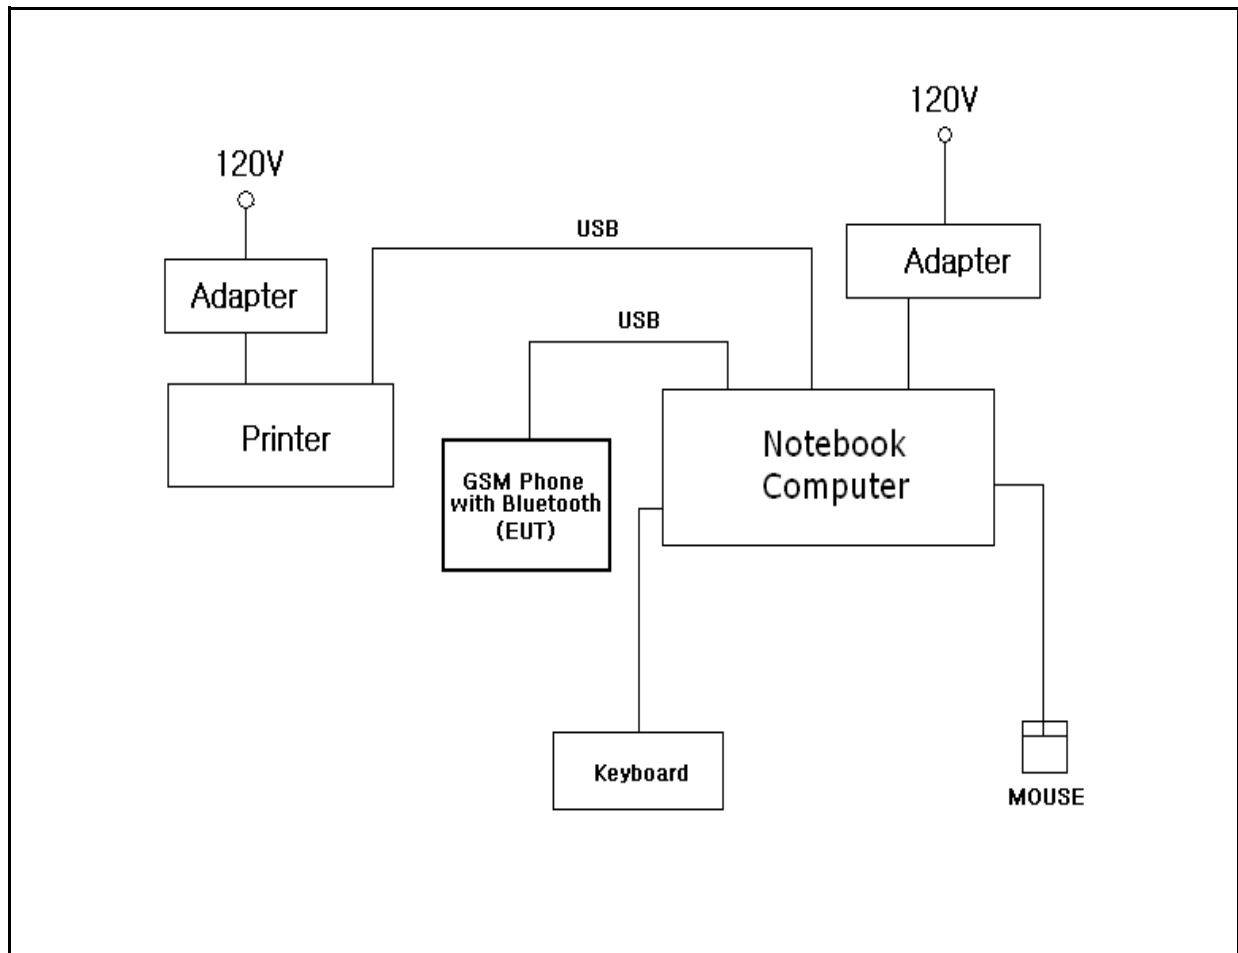

4.3 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
GSM Phone with Bluetooth	KF300d, KF300c	NONE	LG Electronics Inc.	EUT
Notebook Computer	HSTNN - 105C	CNU7281VY5	HEWLETT - PACKARD COMPANY	
Adapter	PPP009L	7608166702	DONGGUANG LITE POWER 2nd PLANT	
Printer	MJC - 5750	NA34BFFP313402V	SAMSUNG ELECTRONICS(SHANDONG)DIGITAL PRINTING CO.,LTD.	
Adapter	PA8040WB	0703016518	Bestec Electronics (DongGuan)Co.,Ltd.	
Keyboard	SK - 8115	61K - 19FM	YET FOUNDATE LTD.	
Mouse	M056U0A	F0204X2N	Dell Asia Pacific Sdn.	

4.4 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
GSM Phone with Bluetooth	USB	Notebook Computer	USB	2	Yes	
Notebook Computer	USB	Printer	USB	2	Yes	
Notebook Computer	USB	Keyboard	USB	2	Yes	
Notebook Computer	USB	Mouse	USB	2	Yes	
Notebook Computer	Power	Adapter	-	2	No	
Printer	Power	Adapter	-	2	No	

5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC Part 15 (2007) & ANSI C 63.4 (2003). The test setup was made according to FCC Part 15 (2007) & ANSI C 63.4 (2003) on an open test site, which allows a 3m distance measurement. The EUT was placed in the center of wooden turntable. The height of this table was 0.8m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

5.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESVS10	Rohde & Schwarz	838562/002	2008. 1. 23
Spectrum Analyzer	R3261C	ADVANTEST	61720116	2008. 4. 20
LogBicon Antenna	VULB 9160	Schwarzbeck	3142	2008. 5. 07
Amplifier	8447F	HP	2805A02972	2008. 6. 26
Spectrum Analyzer	8563E	HP	3623A05297	2008. 5. 06
PREAMPLIFIER	8449B	HP	3008A00581	2008. 5. 06
Horn Antenna	BBHA 9120 D	Schwarzbeck	469	2008. 3. 31
Turn Table	2087	EMCO	2129	-
Antenna Mast	2070-01	EMCO	9702-203	-
ANT Mast Controller	2090	EMCO	1535	-
Turn Table Controller	2090	EMCO	1535	-

5.2 Environmental Condition

Test Place : Open site(3m)
 Temperature (°C) : 6.1
 Humidity (%) : 48.2 %

5.3 Test data

Test Date : 20-Nov-07

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
33.97	19.60	V	1.0	11.07	1.0	40.0	31.63	-8.37
43.46	16.40	V	1.0	12.02	1.0	40.0	29.47	-10.53
50.00	8.30	V	1.0	12.55	1.1	40.0	21.97	-18.03
87.14	20.30	H	3.7	7.99	1.4	40.0	29.74	-10.26
170.14	14.10	V	1.0	12.07	2.0	43.5	28.18	-15.32
202.28	16.00	H	1.6	9.70	2.2	43.5	27.94	-15.56
225.07	22.80	H	1.5	10.57	2.4	46.0	35.80	-10.20
300.14	16.50	H	1.4	13.11	3.0	46.0	32.59	-13.41
340.40	9.20	V	1.2	14.01	3.2	46.0	26.45	-19.55
396.72	14.00	H	1.0	15.24	3.6	46.0	32.80	-13.20
431.99	13.30	V	1.2	16.19	3.8	46.0	33.30	-12.70
475.98	13.50	V	1.0	16.94	4.1	46.0	34.52	-11.48
529.12	7.80	V	1.5	17.81	4.4	46.0	30.05	-15.95
677.45	3.80	H	1.2	20.38	5.2	46.0	29.38	-16.62
Remark	H : Horizontal, V : Vertical *Checked in all 3 axis and the maximum measured data were reported. *CL = Cable Loss - Amplifier Gain(In case of above1000Mhz) *CL = Cable Loss(In case of below1000Mhz) *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120KHz for Quasi-peak detection at frequency below 1GHz.							

6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 to 30 MHz was measured in accordance to FCC Part 15 (2007) & ANSI C 63.4 (2003). The test setup was made according to FCC Part 15 (2007) & ANSI C 63.4 (2003) in a shielded Room. The EUT was placed on a non-conductive table at least 80 above the ground plan. A grounded vertical reference plane was positioned in a distance of 40cm from the EUT. The distance from the EUT to other metal surfaces was at least 0.8m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0m.. The test receiver with Quasi Peak detector complies with CISPR 16.

6.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
LISN	ESH3-Z5	Schwarzbeck	838979/010	2008. 2. 28
LISN	NNLA8120A	Schwarzbeck	8120161	2008. 2. 28
TEST Receiver	ESPI7	Rohde & Schwarz	100185	2008. 8. 27
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	-

6.2 Environmental Condition

Test Place : Shielded Room
 Temperature (°C) : 12.3
 Humidity (%) : 39.2 %


6.3 Test data

Test Date : 19-Nov-07

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Average Value		
	Lisn (dB)	Cable (dB)		Limit (dB μ V)	Reading (dB μ V)	Result (dB μ V)	Limit (dB μ V)	Reading (dB μ V)	Result (dB)
0.15	0.17	0.0	N	65.89	36.90	37.11	55.89	21.57	21.78
0.19	0.13	0.0	H	63.86	46.23	46.40	53.86	36.50	36.67
0.20	0.12	0.1	H	63.61	46.14	46.31	53.61	36.78	36.95
0.25	0.13	0.1	N	61.63	35.59	35.77	51.63	24.43	24.61
0.26	0.13	0.1	H	61.37	38.31	38.49	51.37	27.25	27.43
0.46	0.15	0.1	H	56.73	35.69	35.92	46.73	28.73	28.96
0.51	0.15	0.1	N	56.00	33.15	33.39	46.00	22.79	23.03
0.58	0.15	0.1	H	56.00	31.17	31.43	46.00	23.97	24.23
0.73	0.17	0.1	H	56.00	31.91	32.21	46.00	23.40	23.70
0.93	0.23	0.2	N	56.00	30.52	30.90	46.00	22.74	23.12
1.20	0.26	0.2	H	56.00	30.46	30.90	46.00	22.59	23.03
1.46	0.27	0.2	H	56.00	30.38	30.85	46.00	21.77	22.24
8.36	0.55	0.7	N	60.00	23.78	24.98	50.00	15.83	17.03
8.57	0.56	0.7	H	60.00	22.18	23.40	50.00	14.37	15.59
13.09	0.76	0.9	N	60.00	26.35	28.00	50.00	17.03	18.68
17.40	0.88	1.1	N	60.00	28.66	30.60	50.00	25.82	27.76
17.61	0.88	1.1	H	60.00	28.66	30.62	50.00	24.97	26.93
21.63	0.93	1.2	H	60.00	25.24	27.38	50.00	18.99	21.13
Remark	H : Hot Line, N : Neutral Line								

Appendix 1. Spectral diagram

*HOT

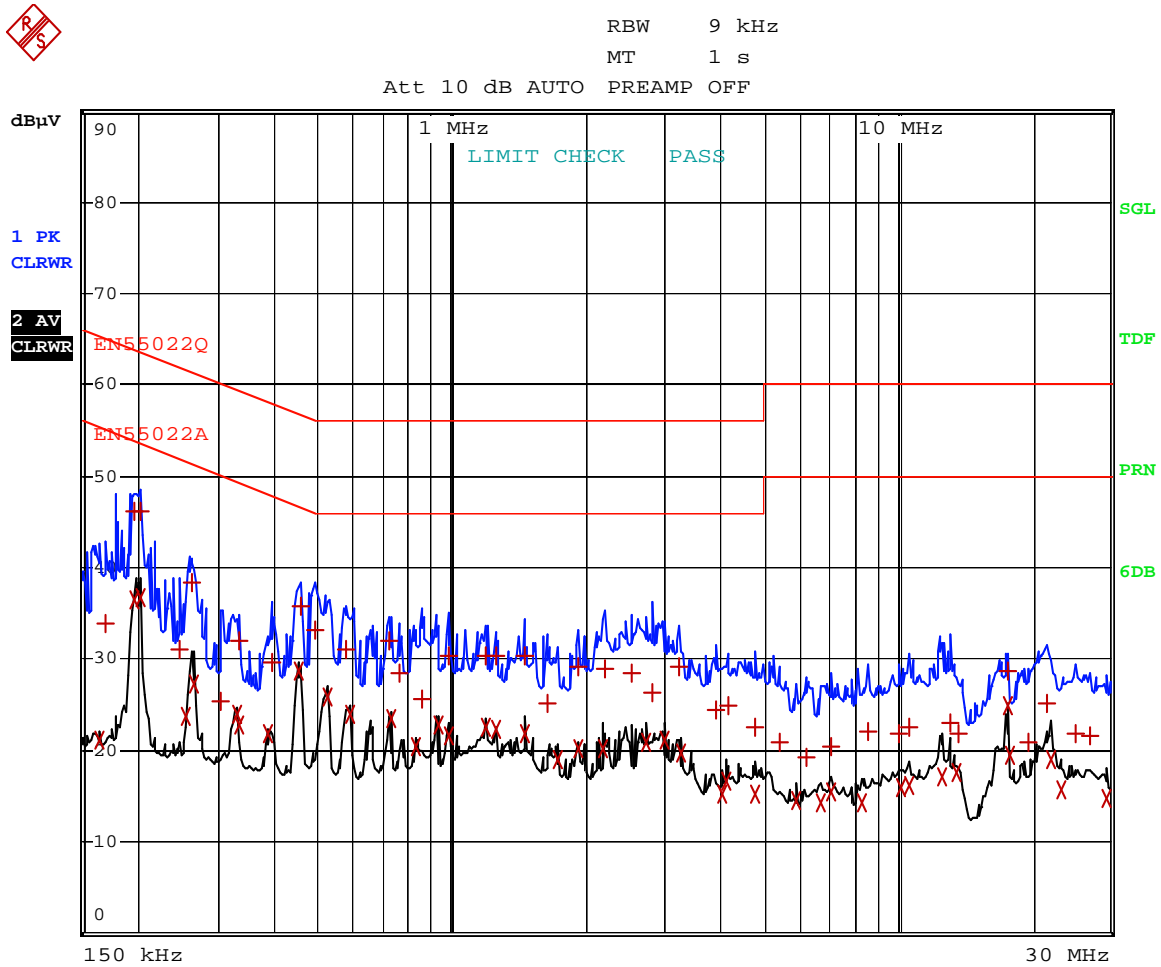

Comment: KF300d_HOT

Date: 19.NOV.2007 17:10:57


*NEUTRAL



RBW 9 kHz

MT 1 s

Att 10 dB AUTO PREAMP OFF

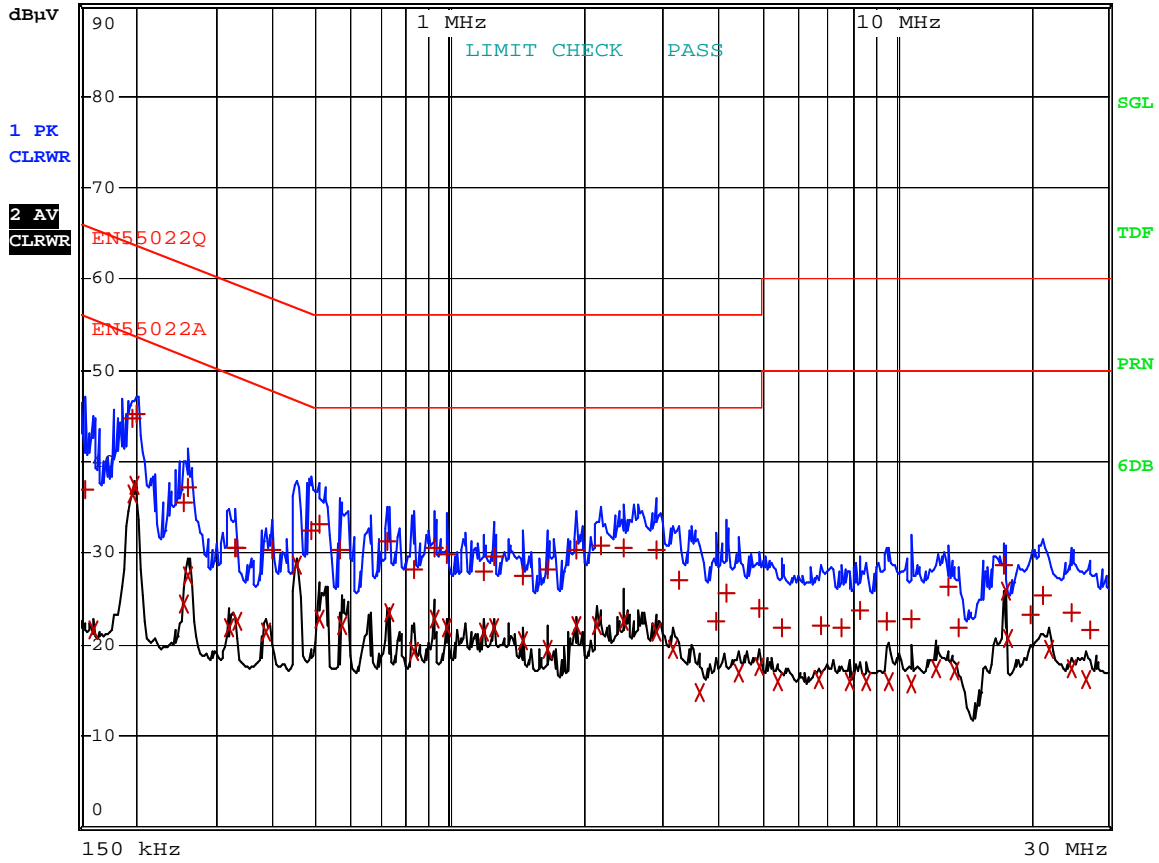

Comment: KF300d_NEUTRAL

Date: 19.NOV.2007 17:15:45