

MEASUREMENT REPORT
Bluetooth (Low Energy)**Applicant Name:**

Microsoft Corporation
1 Microsoft Way
Redmond, WA 98052-8300
United States

Date of Testing:

4/1/2025 – 6/23/2025

Test Report Issue Date:

6/24/2025

Test Site/Location:

Element lab., Columbia, MD, USA

Test Report Serial No.:

1M2504010035-15.C3K

FCC ID:**C3K00002102A****APPLICANT:****Microsoft Corporation****Application Type:**

Class II Permissive Change, Module Host Integration

EUT Type:

Limited Modular Approval - Host Integration (Portable Computing Device)

Frequency Range:

2402 – 2480MHz

FCC Classification:

Digital Transmission System20 (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

Test Procedure(s):

ANSI C63.10:2020

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10:2020. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 1 of 33 |

T A B L E O F C O N T E N T S

| | | |
|-----|--|----|
| 1.0 | INTRODUCTION..... | 3 |
| 1.1 | Scope..... | 3 |
| 1.2 | Element Test Location..... | 3 |
| 1.3 | Test Facility / Accreditations..... | 3 |
| 2.0 | PRODUCT INFORMATION..... | 4 |
| 2.1 | Equipment Description | 4 |
| 2.2 | Device Capabilities | 4 |
| 2.3 | Antenna Description | 4 |
| 2.4 | Test Configuration | 5 |
| 2.5 | Software and Firmware | 5 |
| 2.6 | EMI Suppression Device(s)/Modifications..... | 5 |
| 3.0 | DESCRIPTION OF TESTS | 6 |
| 3.1 | Evaluation Procedure | 6 |
| 3.2 | AC Line Conducted Emissions | 6 |
| 3.3 | Radiated Emissions..... | 7 |
| 3.4 | Environmental Conditions..... | 7 |
| 4.0 | ANTENNA REQUIREMENTS | 8 |
| 5.0 | MEASUREMENT UNCERTAINTY..... | 9 |
| 6.0 | TEST EQUIPMENT CALIBRATION DATA..... | 10 |
| 7.0 | TEST RESULTS | 12 |
| 7.1 | Summary..... | 12 |
| 7.2 | Output Power Measurement – Bluetooth (LE)..... | 13 |
| 7.3 | Radiated Spurious Emission Measurements | 25 |
| 7.4 | Radiated Restricted Band Edge Measurements | 29 |
| 7.5 | Line-Conducted Test Data..... | 30 |
| 8.0 | CONCLUSION | 33 |

| | | |
|--|--|--|
| MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| FCC ID: C3K00002102A | Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under U.S. and Canada Mutual Recognition Agreements (MRAs).

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 3 of 33 |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Microsoft Portable Computing Device containing module FCC ID: C3K00002102A**. The data found in this test report was taken with the EUT operating in Bluetooth low energy mode. While in low energy mode, the Bluetooth transmitter hops pseudo-randomly between 40 channels, three of which are “advertising channels”. When the transmitter is hopping only between the three advertising channels, the EUT does not fall under the category of a “hopper” as defined in 15.247(a)(iii) which states that a “frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.” As operation on only the advertising channels does not qualify the EUT as a hopper, the EUT is certified as a DTS device in this mode. The data found in this report is representative of the device when it transmits on its advertising channels. Typical Bluetooth operation is covered under the DSS report found with this application.

The equipment under test (EUT), model: 2119, is a portable computing device, which integrates two previously certified modules. The first module is a WLAN/Bluetooth module authorized under FCC ID: C3K00002102A, and the second is a cellular module authorized under FCC ID: C3K2119. No hardware or software modifications have been made to either module as part of this host integration. The evaluation in this report demonstrates compliance of the host device with the applicable FCC rules, considering the co-location and simultaneous transmission of the integrated modules.

Test Device Serial No.: 0F3K4CP24453Q6, 0F3K4CT24453Q6, 0F3K4CW24453Q6, 0F3K4CK24453Q6

2.2 Device Capabilities

This device contains the following capabilities:

Bluetooth (1x, EDR, LE), 802.11b/g/n/ac/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and GHz), Multi-band LTE, Multi-Band NR (FR1)

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 0 | 2402 |
| : | : |
| 19 | 2440 |
| : | : |
| 39 | 2480 |

Table 2-1. Frequency / Channel Operations

2.3 Antenna Description

Following antenna was used for the testing.

| Frequency [GHz] | Directional Gain (dBi) |
|-----------------|------------------------|
| 2.4 | 6.01 |

Table 2-2. Antenna Peak Gain

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 4 of 33 |



The antenna gains shown in this table were provided by the manufacturer.

Note: This device is capable of operating in hopping and non-hopping mode. The EUT can hop between 79 different channels in the 2400 – 2483.5MHz band.

2.4 Test Configuration

The EUT was tested per the guidance of ANSI C63.10:2020. ANSI C63.10:2020 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and EUT powered by AC/DC was the worst case.

- EUT powered by AC/DC adaptor via USB cable with wire charger

2.5 Software and Firmware

The test was conducted with software/firmware version 3.1.0.1407 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 5 of 33 |

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2020) and the guidance provided in were used in the measurement of the EUT.

Deviation from measurement procedure..... **None**

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50µH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that those cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.5. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
|---|--|--|-----------------------------------|
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 6 of 33 |

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 7 of 33 |

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna(s) of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
|---|--|--|-----------------------------------|
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 8 of 33 |

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10:2020. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13 |
| Line Conducted Disturbance | 3.09 |
| Radiated Disturbance (<1GHz) | 4.98 |
| Radiated Disturbance (>1GHz) | 5.07 |
| Radiated Disturbance (>18GHz) | 5.09 |

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 9 of 33 |

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-----------------------|-------------|-------------------------------|------------|--------------|------------|---------------|
| - | WL25-1 | Conducted Cable Set (25GHz) | 2/25/2025 | Annual | 2/25/2026 | WL25-1 |
| - | WL25-2 | Conducted Cable Set (25GHz) | 2/25/2025 | Annual | 2/25/2026 | WL25-2 |
| - | WL40-1 | Conducted Cable Set (40GHz) | 2/25/2025 | Annual | 2/25/2026 | WL40-1 |
| - | MD 1M 18-40 | EMCCable and Switch System | 2/25/2025 | Annual | 2/25/2026 | MD 1M 18-40 |
| - | AP2-001 | EMCCable and Switch System | 2/25/2025 | Annual | 2/25/2026 | AP2-001 |
| - | ETS-001 | EMCCable and Switch System | 2/25/2025 | Annual | 2/25/2026 | ETS-001 |
| Agilent | N9038A | MXE EMI Receiver | 9/16/2024 | Annual | 9/16/2025 | MY51210133 |
| Agilent | N9020A | MXA Signal Analyzer | 5/7/2025 | Annual | 5/7/2026 | US46470561 |
| Agilent | N9030A | PXA Signal Analyzer (44GHz) | 10/16/2024 | Annual | 10/16/2025 | MY49430494 |
| Anritsu | MA24408A | Microwave Peak Power Sensor | 10/2/2024 | Annual | 10/2/2025 | 11675 |
| EMCO | 3115 | Horn Antenna (1-18GHz) | 9/6/2024 | Biennial | 9/6/2025 | 9704-5182 |
| EMCO | 3116 | Horn Antenna (18-40GHz) | 7/5/2023 | Biennial | 7/5/2025 | 9203-2178 |
| ETS-Lindgren | 3116C | Horn Antenna (18-40GHz) | 4/22/2025 | Biennial | 4/22/2027 | 218893 |
| Keysight Technologies | N9020A | MXA Signal Analyzer | 2/7/2025 | Annual | 2/7/2026 | MY53421544 |
| Keysight Technologies | N9030A | PXA Signal Analyzer | 8/26/2024 | Annual | 8/26/2025 | MY54490576 |
| Keysight Technologies | N9030B | PXA Signal Analyzer | 9/19/2024 | Annual | 9/19/2025 | MY57141001 |
| Pasternack | NMLC-2 | Line Conduted Emissions Cable | 3/25/2025 | Annual | 3/25/2026 | NMLC-2 |
| Rohde & Schwarz | TC-TA18 | Vivaldi Antenna | 4/15/2024 | Biennial | 4/15/2026 | 101058 |
| Rohde & Schwarz | ESU26 | EMI Test Receiver (26.5GHz) | 10/16/2024 | Annual | 10/16/2025 | 100342 |
| Rohde & Schwarz | ESU40 | EMI Test Receiver (40GHz) | 11/25/2024 | Annual | 11/25/2025 | 100348 |
| Rohde & Schwarz | ESW44 | EMI Test Receiver (44GHz) | 3/25/2025 | Annual | 3/25/2026 | 101716 |
| Rohde & Schwarz | CMX500 | 5G Radio Communication Tester | | N/A | | 101202 |
| Sunol | JB6 | Bi-Log Antenna (20M-6GHz) | 3/24/2025 | Biennial | 3/25/2027 | A082816 |
| Sunol | JB5 | Bi-Log Antenna (20M-5GHz) | 9/11/2024 | Biennial | 9/11/2026 | A051107 |

Table 6-1. Test Equipment Calibration Table – MD

| Component | Serial Number |
|------------------------------------|---------------|
| MegaPhase Cable TM26-S1S1-36 | 18160103 003 |
| Pasternack 6dB Attenuator PE7005-6 | N/A |

Table 6-2. WL25-1 Conducted Cable Set Components

| Component | Serial Number |
|----------------------------------|---------------|
| MiniCircuits Cable CBL-2FT-SMSM+ | 77743 |
| MCL 6dB Attenuator BW-S6W2+ | 1314 |

Table 6-3. WL25-2 Conducted Cable Set Components

| Component | Serial Number |
|----------------------------------|---------------|
| MegaPhase Cable TM40K1K1-36 | 18160102 001 |
| MCL 10dB Attenuator BW-K10 2W44+ | 1902 |

Table 6-4. WL40-1 Conducted Cable Set Components

| | | | | |
|---|--|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | | Page 10 of 33 |

| Component | Serial Number |
|-------------------------|---------------|
| Pasternak Cable RG214/U | 111815 |
| Sucoflex Cable 106A | 246420-001 |
| Rohde & Schwarz SF Unit | 102134 |

Table 6-5. ETS-001 EMC Cable and Switch System Components

| Component | Serial Number |
|--|---------------|
| MiniCircuits Cable CBL-0.5M-SMNM+ | 47261 |
| Micro-Coax Utiflex Cable UFB311A-Q-3346-50U50U MFR 64639 | 231978-001 |
| Micro-Coax Utiflex Cable UFB311A-1-0629-50U50U MFR 64639 | 231986-002 |
| MegaPhase Cable NC29-N1N1-324 | 19046401 001 |
| MegaPhase Flex Cable 10511-1 | 15044701-006 |
| Micro-Coax Utiflex Cable UFB311A-Q-3446-50U50U MFR 64639 | 231978-002 |
| Micro-Coax Utiflex Cable UFB311A-1-0629-50U50U MFR 64639 | 231986-001 |
| Micro-Coax Utiflex Cable UFB142A-0-0659-50U50U MFR 64639 | 232069-001 |
| Rohde & Schwarz SF Unit | 102138 |

Table 6-6. AP2-001 EMC Cable and Switch System Components

| Component | Serial Number |
|---|------------------|
| MegaPhase Cable TM40-K1K1-30 | 20233002-004 |
| UTIPLEX Cable | 64639 232063-001 |
| Rohde & Schwarz Pre-amp RS-PR1840 18G-40G | 9037.7670.02 |

Table 6-7. MD 1M 18-40 EMC Cable and Switch System Components

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

| | | | | |
|---|--|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | | Page 11 of 33 |

7.0 TEST RESULTS

7.1 Summary

Company Name: Microsoft Corporation
 FCC ID: C3K00002102A
 FCC Classification: Digital Transmission System (DTS)
 Number of Channels: 40

| FCC Part Section(s) | RSS Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|---------------------|------------------|---|--|----------------|-------------|--------------------------------|
| 15.247(a)(2) | RSS-247 [5.2] | 6dB Bandwidth | > 500kHz | CONDUCTED | PASS | See Original Filing for Module |
| 15.247(b)(3) | RSS-247 [5.4(4)] | Transmitter Output Power | < 1 Watt | | PASS | 7.2 |
| 15.247(e) | RSS-247 [5.2] | Transmitter Power Spectral Density | < 8dBm / 3kHz Band | | PASS | See Original Filing for Module |
| 15.247(d) | RSS-247 [5.5] | Band Edge / Out-of-Band Emissions | ≥ 20dBc | | PASS | See Original Filing for Module |
| 15.205 15.209 | RSS-Gen [8.9] | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9]) | RADIATED | PASS | Sections 7.3, 7.4 |
| 15.207 | RSS-Gen [8.8] | AC Conducted Emissions 150kHz – 30MHz | < FCC 15.207 limits (RSS-Gen[8.8]) | LINE CONDUCTED | PASS | Section 7.5 |

Table 7-1. Summary of Test Results

Notes:

1. All modes of operation were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
4. For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Bluetooth LE Automation,” Version 3.6.
5. For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element “Chamber Automation,” Version 1.3.1.

| | | | | |
|---|--|--|---------------|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 12 of 33 | |

7.2 Output Power Measurement – Bluetooth (LE)

§15.247(b.3); RSS-247 [5.4(4)]

Test Overview and Limits

The transmitter antenna terminal of the EUT is connected to the input of a spectrum analyzer. Measurements are made while the EUT is operating at maximum power and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

ANSI C63.10:2020 – Section 11.9.1.1

Test Settings

1. RBW = 3MHz
2. VBW = 50MHz
3. Span \geq 3 x RBW
4. Sweep = auto couple
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

Only mid channel power plots are included as representative plots.

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 13 of 33 |

| Frequency [MHz] | Data Rate [Mbps] | Channel No. | Bluetooth Mode | Peak Conducted Power | |
|--------------------|------------------------|----------------|-------------------|-------------------------|--------|
| | | | | [dBm] | [mW] |
| 2402 | 125 kbps | 37 | LE | 14.53 | 28.353 |
| 2440 | 125 kbps | 17 | LE | 14.93 | 31.110 |
| 2480 | 125 kbps | 39 | LE | 14.49 | 28.093 |
| 2402 | 500 kbps | 37 | LE | 14.58 | 28.728 |
| 2440 | 500 kbps | 17 | LE | 14.93 | 31.110 |
| 2480 | 500 kbps | 39 | LE | 14.49 | 28.100 |
| 2402 | 1 Mbps | 37 | LE | 14.59 | 28.754 |
| 2440 | 1 Mbps | 17 | LE | 14.99 | 31.565 |
| 2480 | 1 Mbps | 39 | LE | 14.44 | 27.823 |
| 2404 | 2 Mbps | 0 | LE | 14.56 | 28.589 |
| 2440 | 2 Mbps | 17 | LE | 15.02 | 31.754 |
| 2478 | 2 Mbps | 36 | LE | 14.28 | 26.810 |

Table 7-2. Conducted Output Power Measurements (Bluetooth (LE)) – SISO Ant0


| | | | | |
|---|--|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | | Page 14 of 33 |

| Frequency [MHz] | Data Rate [Mbps] | Channel No. | Bluetooth Mode | Peak Conducted Power | |
|--------------------|------------------------|----------------|-------------------|-------------------------|--------|
| | | | | [dBm] | [mW] |
| 2402 | 125 kbps | 37 | LE | 14.07 | 25.545 |
| 2440 | 125 kbps | 17 | LE | 14.28 | 26.773 |
| 2480 | 125 kbps | 39 | LE | 14.22 | 26.394 |
| 2402 | 500 kbps | 37 | LE | 14.11 | 25.787 |
| 2440 | 500 kbps | 17 | LE | 14.63 | 29.060 |
| 2480 | 500 kbps | 39 | LE | 14.22 | 26.394 |
| 2402 | 1 Mbps | 37 | LE | 14.13 | 25.870 |
| 2440 | 1 Mbps | 17 | LE | 14.24 | 26.564 |
| 2480 | 1 Mbps | 39 | LE | 14.22 | 26.394 |
| 2404 | 2 Mbps | 0 | LE | 14.06 | 25.474 |
| 2440 | 2 Mbps | 17 | LE | 14.23 | 26.485 |
| 2478 | 2 Mbps | 36 | LE | 14.15 | 25.996 |


Table 7-3. Conducted Output Power Measurements (Bluetooth (LE)) – SISO Ant1

| | | | | |
|---|--|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | | Page 15 of 33 |


| Frequency [MHz] | Data Rate [Mbps] | Channel No. | Bluetooth Mode | Peak Conducted Power -Chain 0 | | Peak Conducted Power -Chain 1 | | Peak Conducted Power - Dual | |
|-----------------|------------------|-------------|----------------|-------------------------------|--------|-------------------------------|--------|-----------------------------|--------|
| | | | | [dBm] | [mW] | [dBm] | [mW] | [dBm] | [mW] |
| 2402 | 125 kbps | 37 | LE | 9.94 | 9.872 | 10.00 | 9.995 | 12.98 | 19.867 |
| 2440 | 125 kbps | 17 | LE | 10.34 | 10.802 | 10.24 | 10.566 | 13.30 | 21.368 |
| 2480 | 125 kbps | 39 | LE | 10.09 | 10.207 | 9.79 | 9.521 | 12.95 | 19.728 |
| 2402 | 500 kbps | 37 | LE | 10.37 | 10.882 | 9.85 | 9.656 | 13.13 | 20.538 |
| 2440 | 500 kbps | 17 | LE | 10.60 | 11.471 | 10.28 | 10.668 | 13.45 | 22.139 |
| 2480 | 500 kbps | 39 | LE | 9.94 | 9.858 | 9.83 | 9.609 | 12.89 | 19.468 |
| 2402 | 1 Mbps | 37 | LE | 10.06 | 10.134 | 9.85 | 9.656 | 12.96 | 19.791 |
| 2440 | 1 Mbps | 17 | LE | 10.44 | 11.074 | 10.26 | 10.610 | 13.36 | 21.684 |
| 2480 | 1 Mbps | 39 | LE | 9.77 | 9.480 | 9.97 | 9.927 | 12.88 | 19.406 |
| 2404 | 2 Mbps | 0 | LE | 10.13 | 10.306 | 10.02 | 10.055 | 13.09 | 20.362 |
| 2440 | 2 Mbps | 17 | LE | 10.52 | 11.264 | 10.28 | 10.671 | 13.41 | 21.935 |
| 2478 | 2 Mbps | 36 | LE | 9.89 | 9.754 | 9.89 | 9.752 | 12.90 | 19.507 |

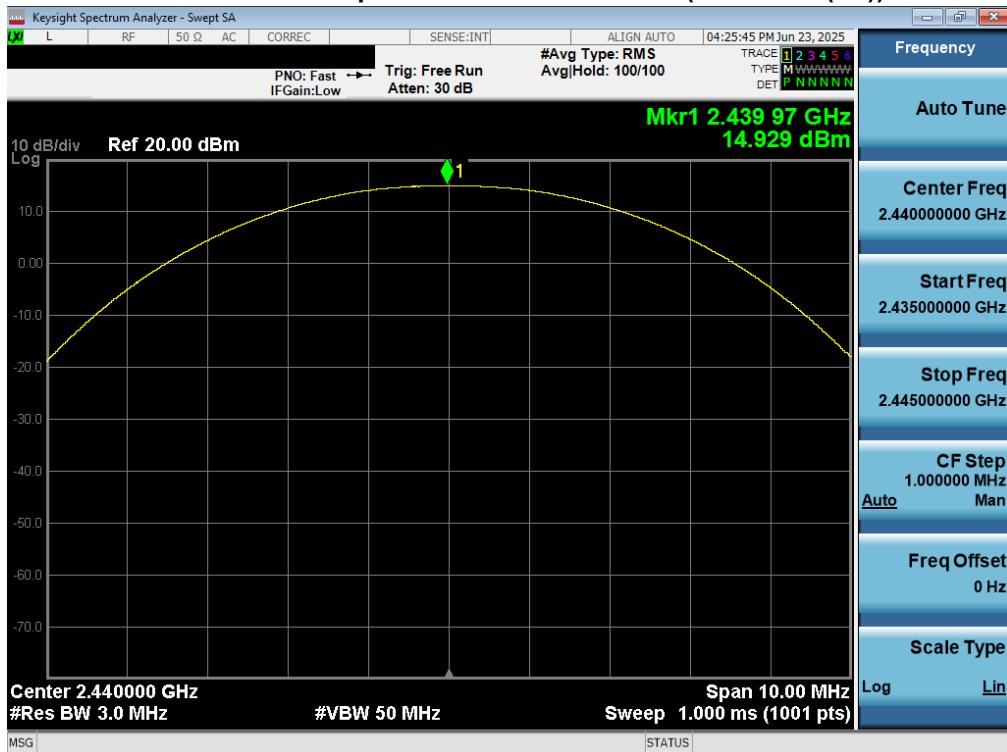Table 7-4. Conducted Output Power Measurements (Bluetooth (LE)) – MIMO

Plot 7-1. Peak Power Plot (Bluetooth (LE), 125kbps – Ch. 17) – SISO Ant0
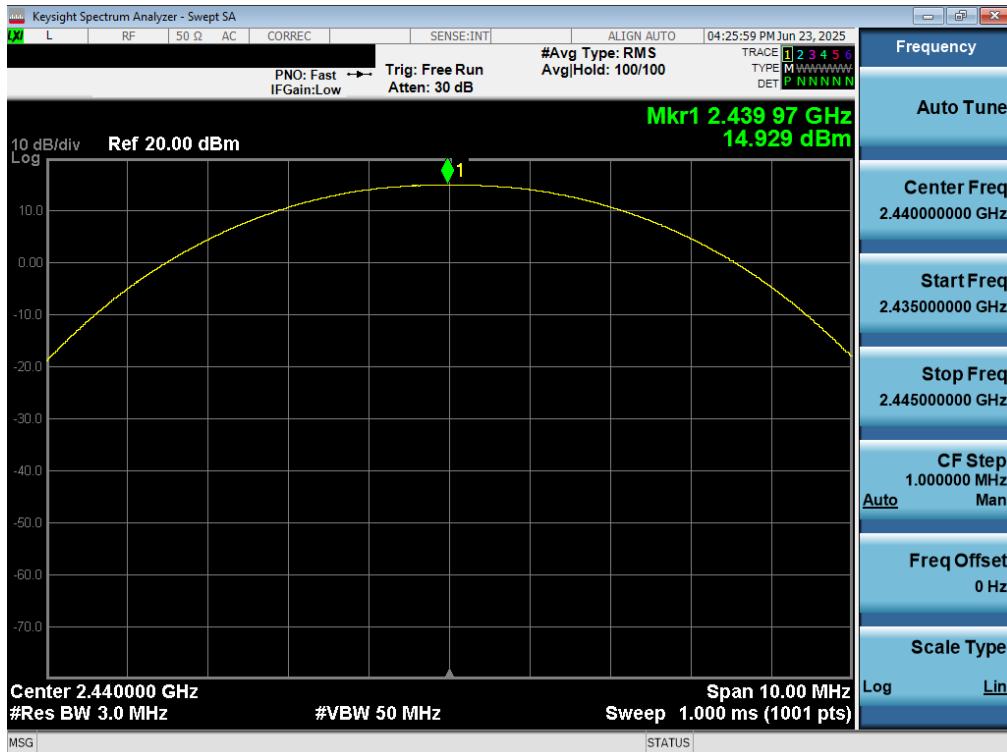
| | | | | | |
|---|--|--|---------------|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 16 of 33 | | |

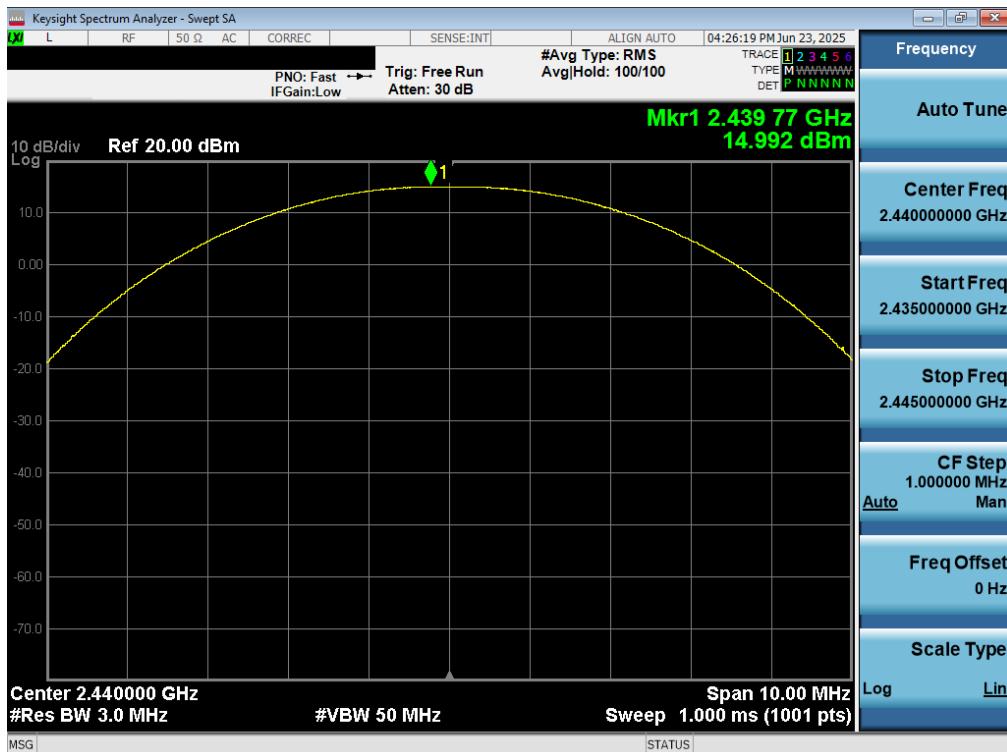


Plot 7-2. Peak Power Plot (Bluetooth (LE), 500kbps – Ch. 17) – SISO Ant0



Plot 7-3. Peak Power Plot (Bluetooth (LE), 1Mbps – Ch. 17) – SISO Ant0

| | | | | |
|---|--|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | | Page 17 of 33 |

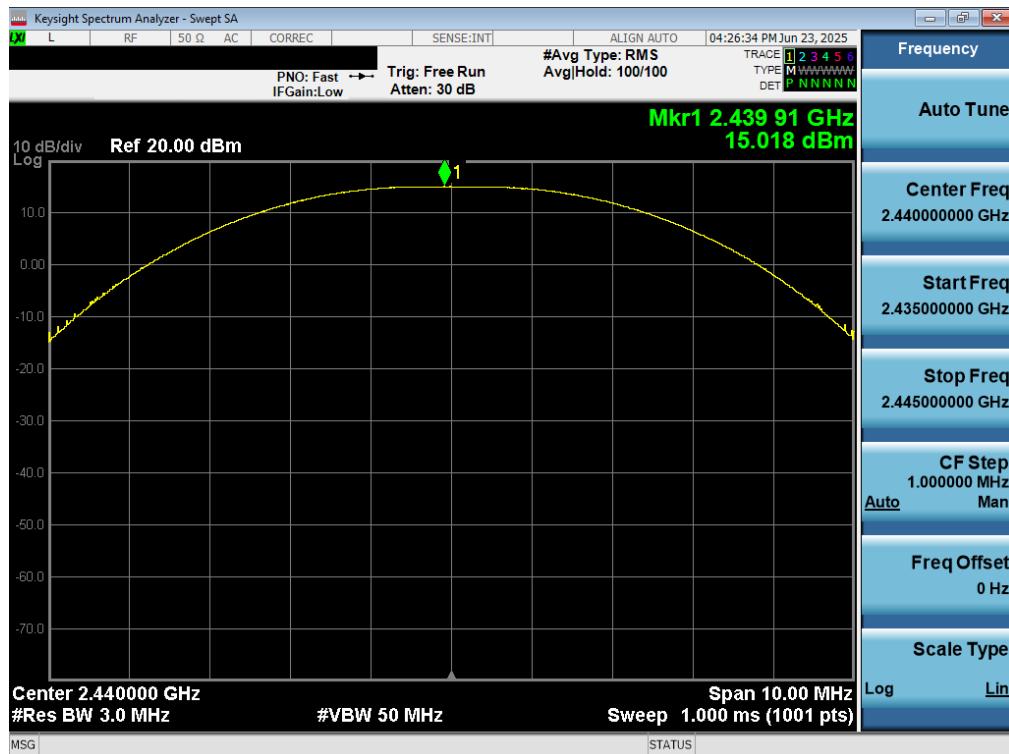

Plot 7-4. Peak Power Plot (Bluetooth (LE), 2Mbps – Ch. 17) – SISO Ant0




Plot 7-5. Peak Power Plot (Bluetooth (LE), 125kbps – Ch. 17) – SISO Ant1

| | | | | |
|---|--|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | | Page 18 of 33 |




Plot 7-6. Peak Power Plot (Bluetooth (LE), 500kbps – Ch. 17) – SISO Ant1

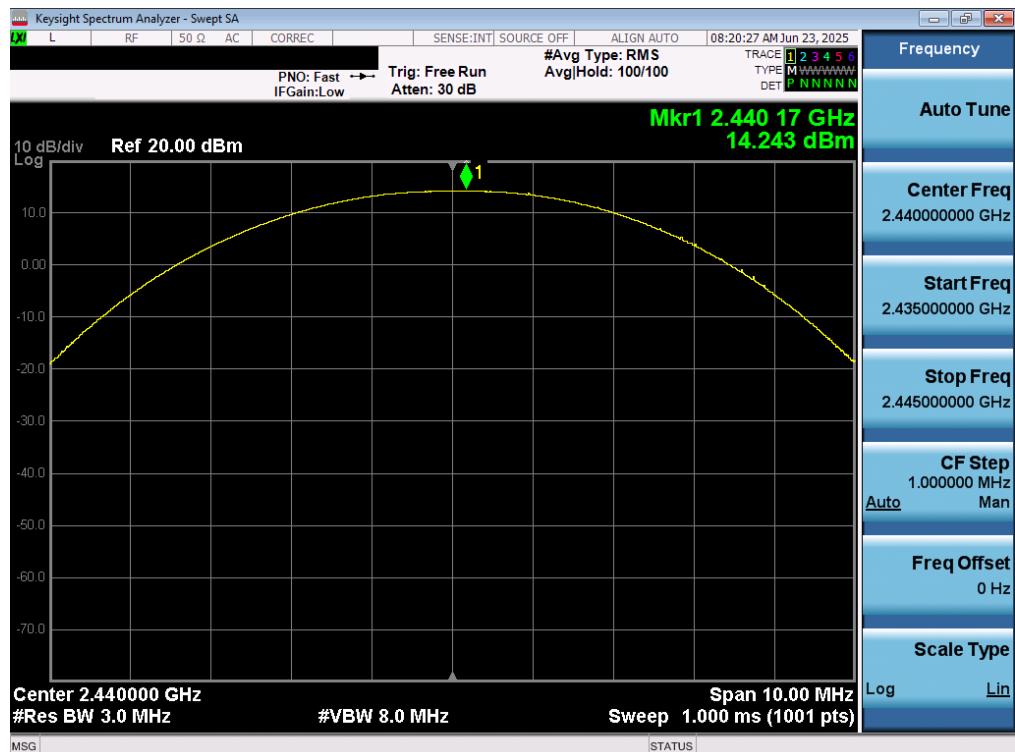

Plot 7-7. Peak Power Plot (Bluetooth (LE), 1Mbps – Ch. 17) – SISO Ant1

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 19 of 33 |

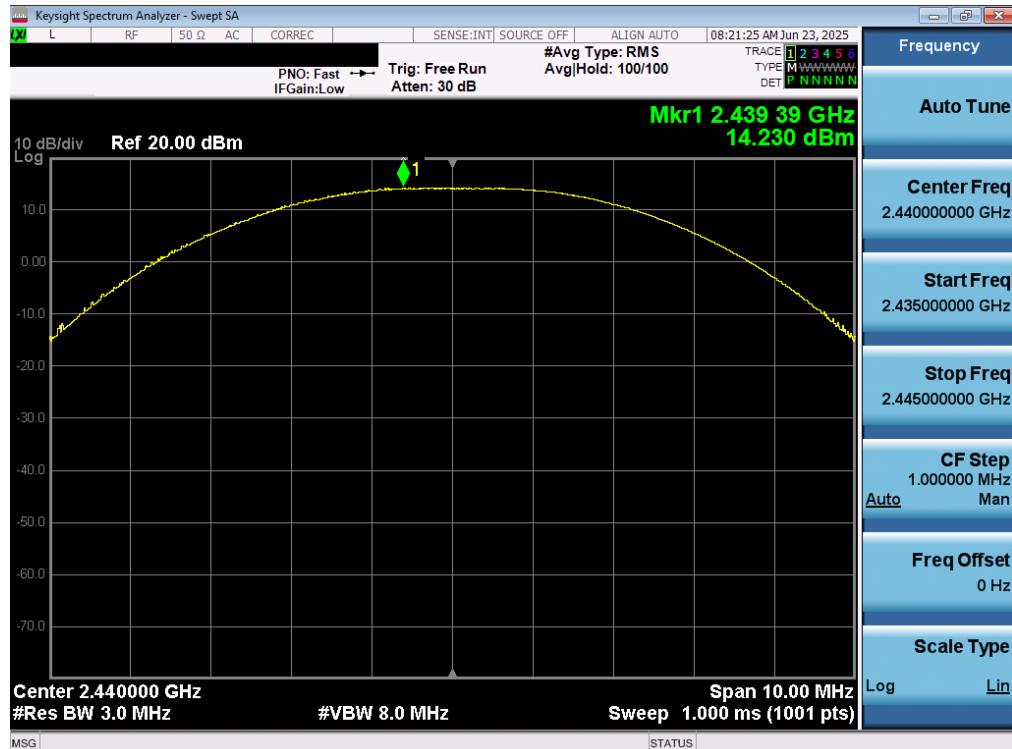

Plot 7-8. Peak Power Plot (Bluetooth (LE), 2Mbps – Ch. 17) – SISO Ant1



Plot 7-9. Peak Power Plot (Bluetooth (LE), 125kbps – Ch. 17) – MIMO Ant0

| | | | | |
|---|--|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | | Page 20 of 33 |




Plot 7-10. Peak Power Plot (Bluetooth (LE), 500kbps – Ch. 17) – MIMO Ant0




Plot 7-11. Peak Power Plot (Bluetooth (LE), 1Mbps – Ch. 17) – MIMO Ant0

| | | | | |
|---|--|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | | Page 21 of 33 |

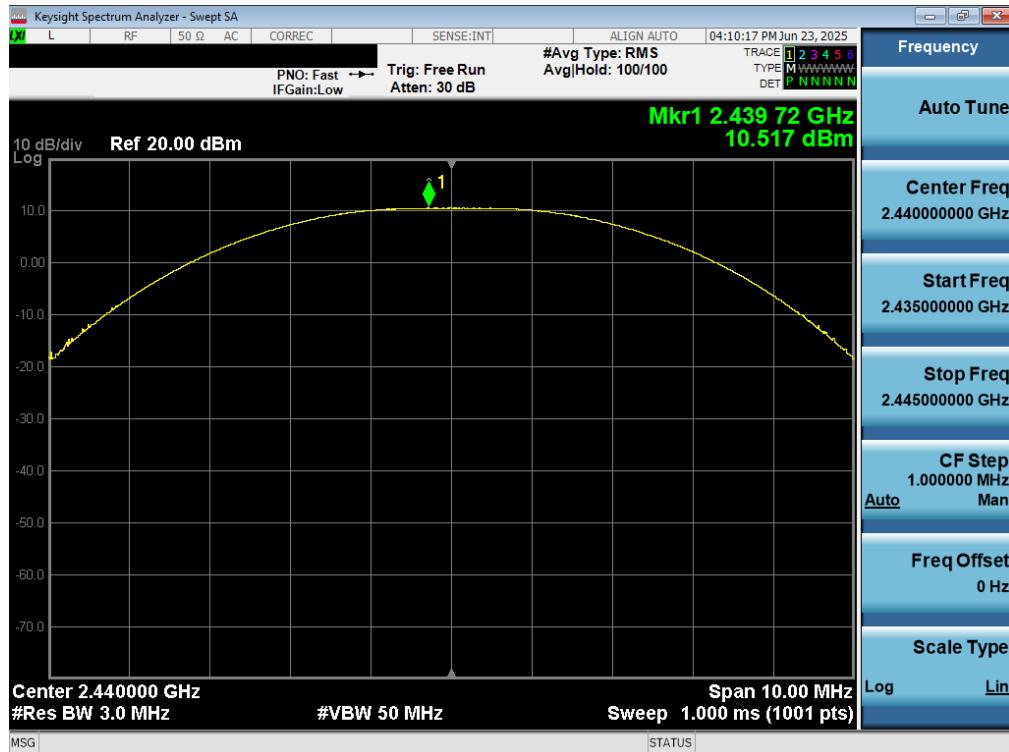


Plot 7-12. Peak Power Plot (Bluetooth (LE), 2Mbps – Ch. 17) – MIMO Ant0

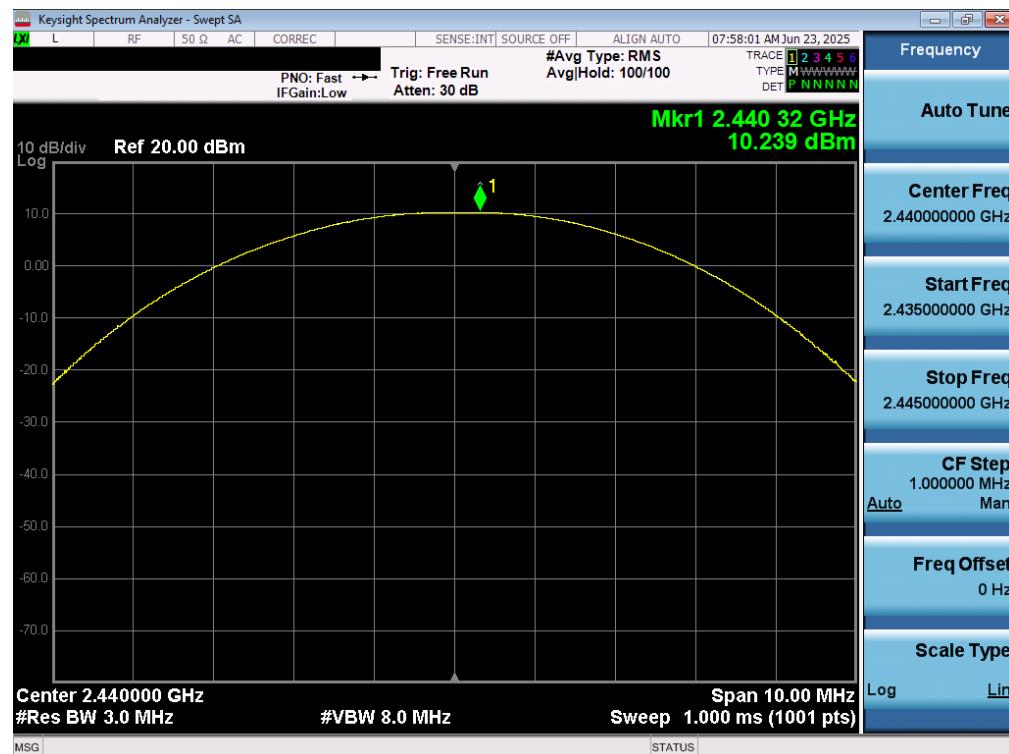


Plot 7-13. Peak Power Plot (Bluetooth (LE), 125kbps – Ch. 17) – MIMO Ant1

| | | | | |
|---|--|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | | Page 22 of 33 |

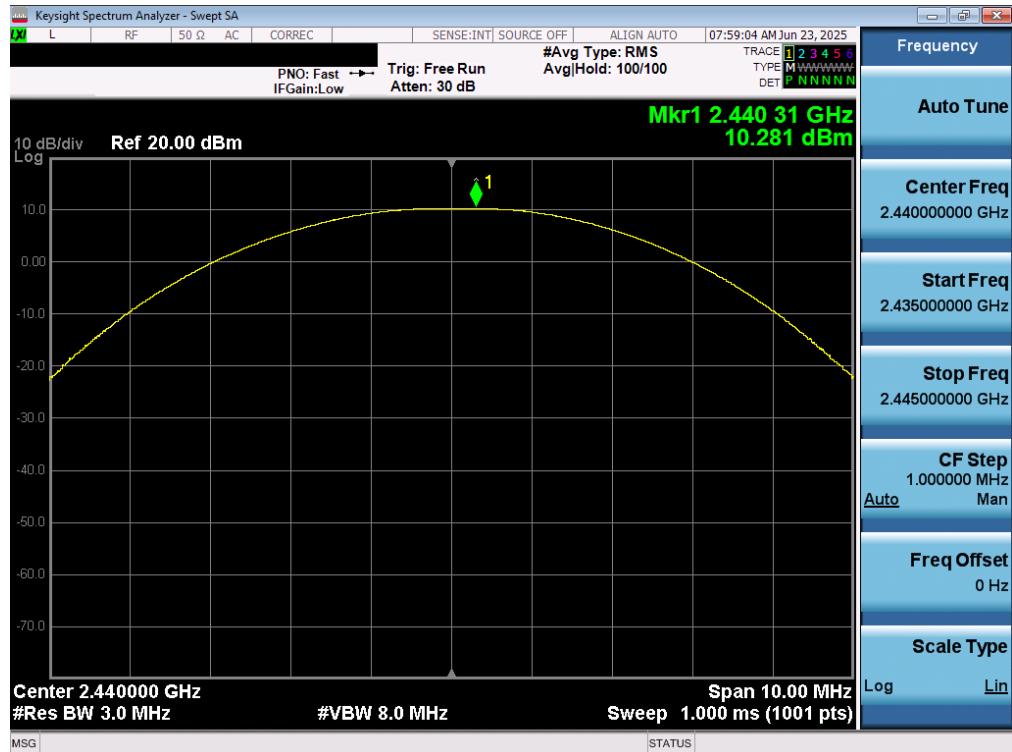


Plot 7-14. Peak Power Plot (Bluetooth (LE), 500kbps – Ch. 17) – MIMO Ant1

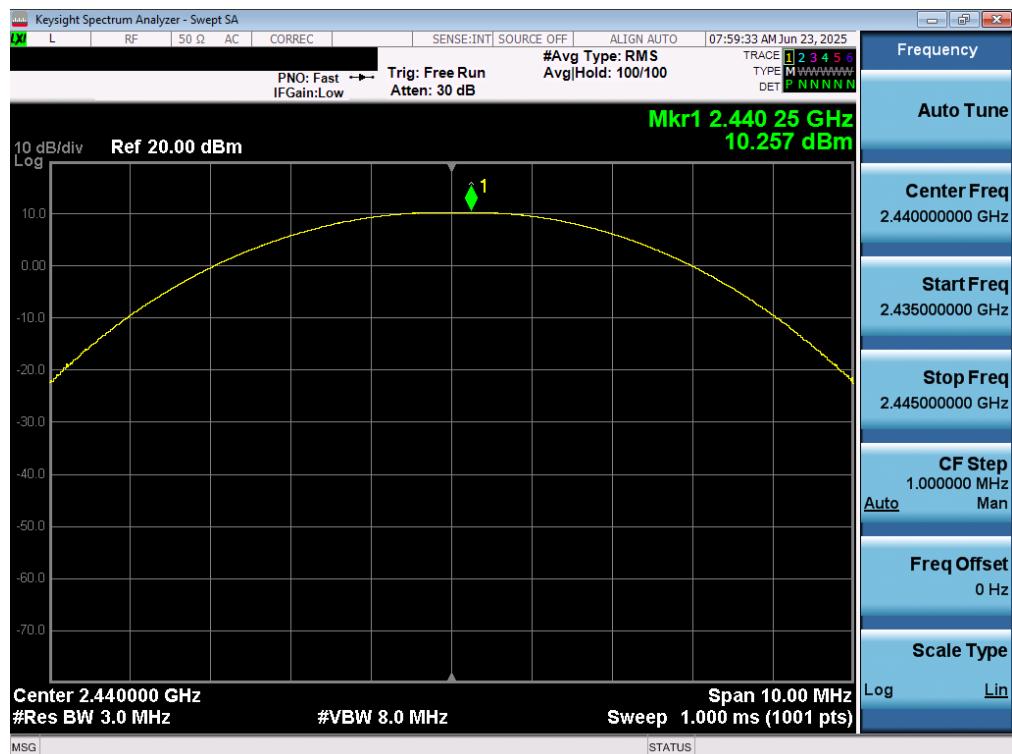

Plot 7-15. Peak Power Plot (Bluetooth (LE), 1Mbps – Ch. 17) – MIMO Ant1

| | | | | |
|---|--|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | | Page 23 of 33 |

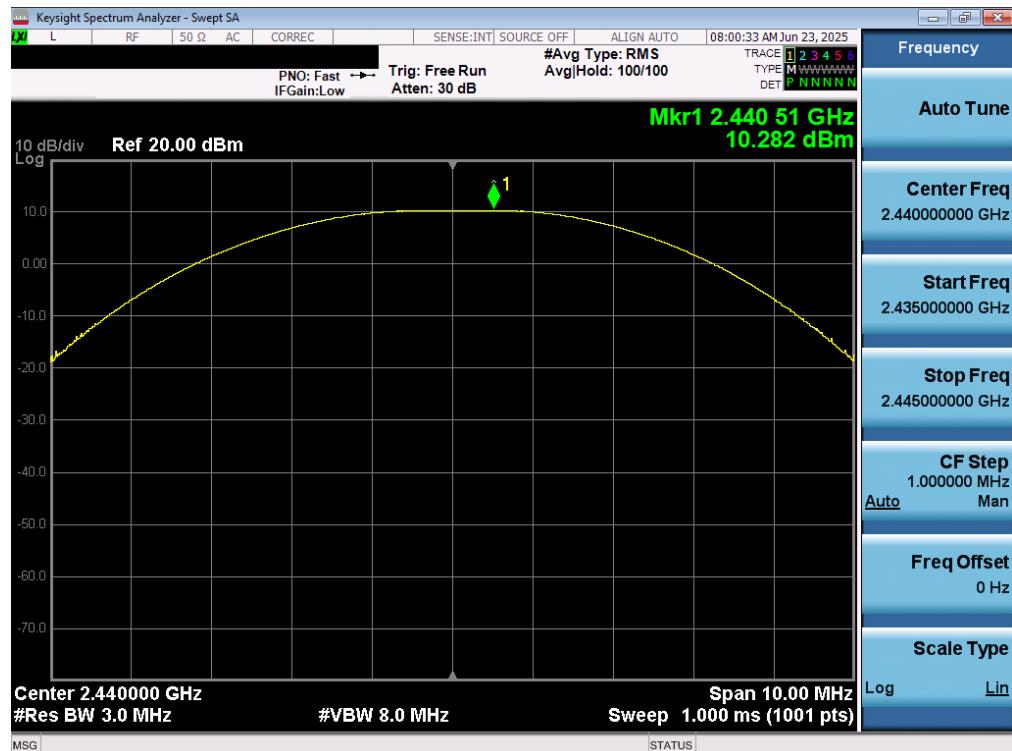

Plot 7-16. Peak Power Plot (Bluetooth (LE), 2Mbps – Ch. 17) – MIMO Ant1

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 24 of 33 |

7.3 Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-5 per Section 15.209 and RSS-Gen (8.9).

| Frequency | Field Strength [μ V/m] | Measured Distance [Meters] |
|-------------------|--------------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz) | 300 |
| 0.490 – 1.705 MHz | 24000/F (kHz) | 30 |
| 1.705 – 30.00 MHz | 30 | 30 |
| 30.00 – 88.00 MHz | 100 | 3 |
| 88.00 – 216.0 MHz | 150 | 3 |
| 216.0 – 960.0 MHz | 200 | 3 |
| Above 960.0 MHz | 500 | 3 |

Table 7-5. Radiated Limits

Test Procedures Used

ANSI C63.10:2020 – Section 6.6.4.3

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3kHz > 1/T
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times (1/duty cycle) traces

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 25 of 33 |

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in Table 7-6 below
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

| Frequency | RBW |
|--------------|--------------|
| 9 – 150kHz | 200 – 300Hz |
| 0.15 – 30MHz | 9 – 10kHz |
| 30 – 1000MHz | 100 – 120kHz |
| > 1000MHz | 1MHz |

Table 7-6. RBW as a Function of Frequency

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

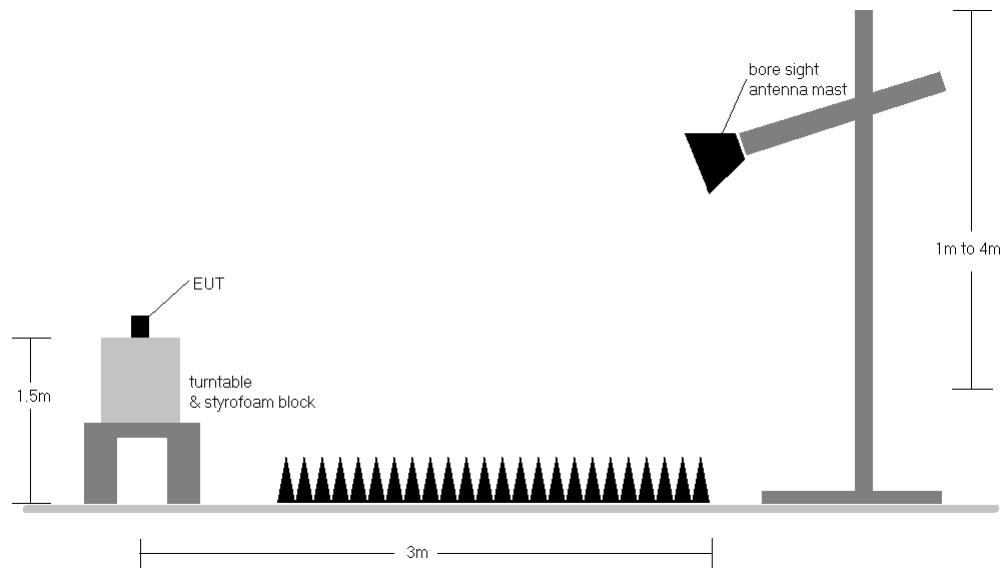


Figure 7-2. Radiated Test Setup >1GHz

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 26 of 33 |

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-5.
2. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
3. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
4. Average measurements were recorded using a VBW of 3kHz, per Section 4.1.4.2.3 of ANSI C63.10:2020, since 1/T is equal to just under 3kHz. This method was used because the EUT could not be configured to operate with a duty cycle > 98%. Both average and peak measurements were made using a peak detector
5. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
6. No significant radiated band edge emissions were found in the 2310 – 2390MHz restricted band.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ = Analyzer Level $[\text{dBm}] + 107 + \text{AFCL} [\text{dB/m}]$
- AFCL $[\text{dB/m}]$ = Antenna Factor $[\text{dB/m}] + \text{Cable Loss} [\text{dB}]$
- Margin $[\text{dB}]$ = Field Strength Level $[\text{dB}_{\mu\text{V/m}}] - \text{Limit} [\text{dB}_{\mu\text{V/m}}]$

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.4 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 27 of 33 |



Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d); RSS-Gen [8.9]

DUAL

Bluetooth Mode: LE
Distance of Measurements: 3 Meters
Operating Frequency: 2440MHz
Channel: 17

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dB μ V/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------------|----------------------|-------------|
| 4880.00 | Avg | H | - | - | -79.63 | 7.14 | 34.51 | 53.98 | -19.47 |
| 4880.00 | Peak | H | - | - | -68.30 | 7.14 | 45.84 | 73.98 | -28.14 |
| 7320.00 | Avg | H | - | - | -80.53 | 12.47 | 38.94 | 53.98 | -15.04 |
| 7320.00 | Peak | H | - | - | -68.36 | 12.47 | 51.11 | 73.98 | -22.87 |
| 12200.00 | Avg | H | - | - | -81.60 | 19.37 | 44.77 | 53.98 | -9.21 |
| 12200.00 | Peak | H | - | - | -70.91 | 19.37 | 55.46 | 73.98 | -18.52 |

Table 7-7. Radiated Measurements @ 3 meters

| | | | | |
|---|--|--|---------------|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 28 of 33 | |

7.4 Radiated Restricted Band Edge Measurements


§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

| | |
|-----------------------|----------|
| Bluetooth Mode: | LE |
| Measurement Distance: | 3 Meters |
| Operating Frequency: | 2480MHz |
| Channel: | 39 |

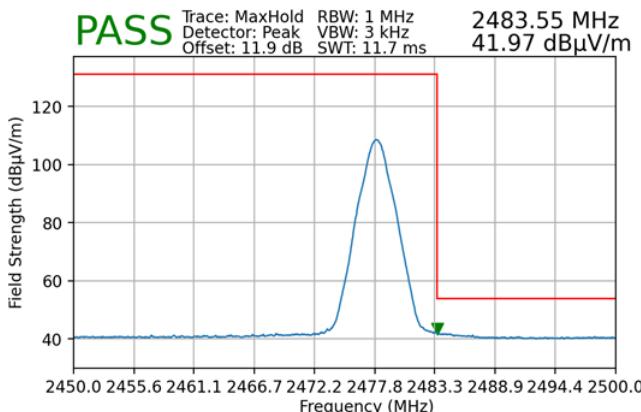

Plot 7-17. Radiated Restricted Upper Band Edge Measurement (Average) – DUAL

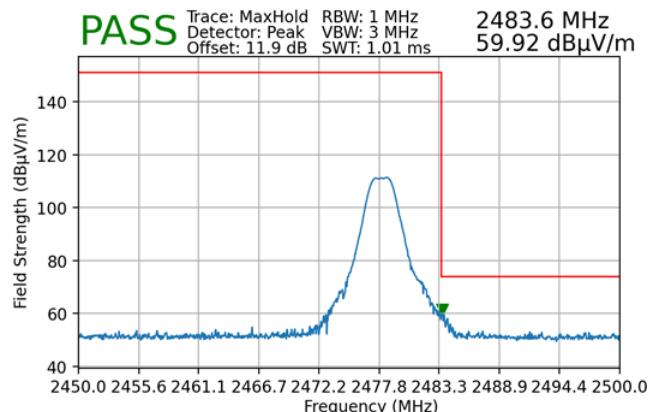

Plot 7-18. Radiated Restricted Upper Band Edge Measurement (Peak) – DUAL

| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | Approved by: Technical Manager |
|---|--|--|--|-----------------------------------|
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | | Page 29 of 33 |

7.5 Line-Conducted Test Data

§15.207; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

| Frequency of emission (MHz) | Conducted Limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 – 0.5 | 66 to 56* | 56 to 46* |
| 0.5 – 5 | 56 | 46 |
| 5 – 30 | 60 | 50 |

Table 7-8. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10:2020, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 30 of 33 |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

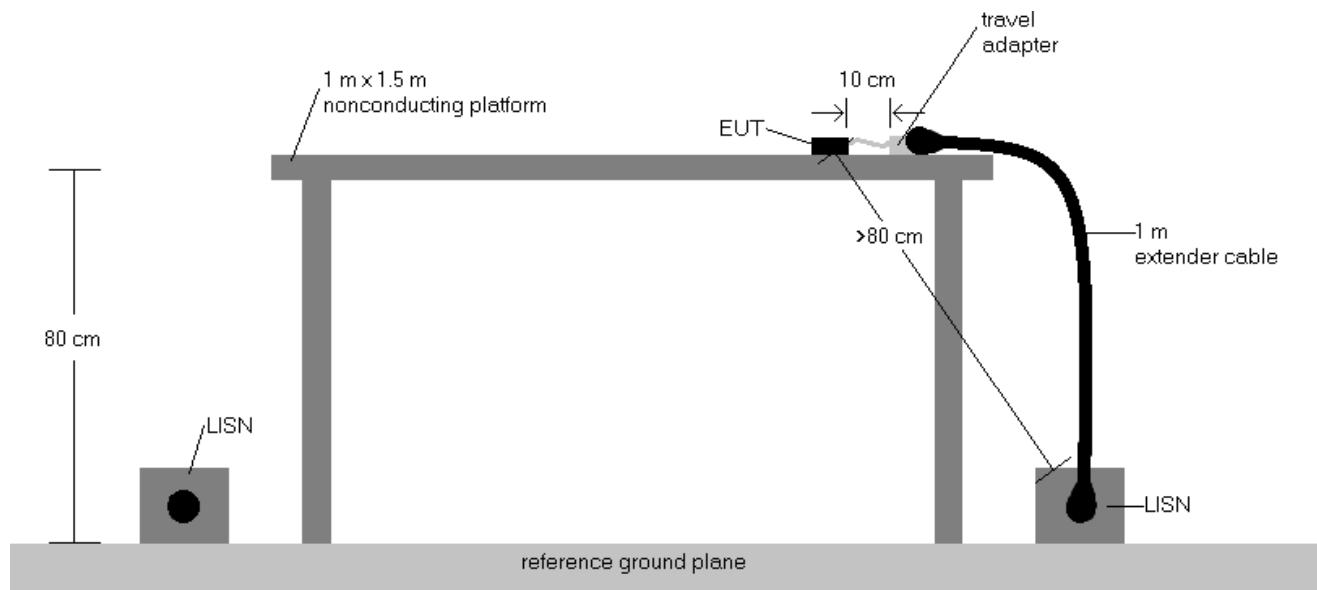
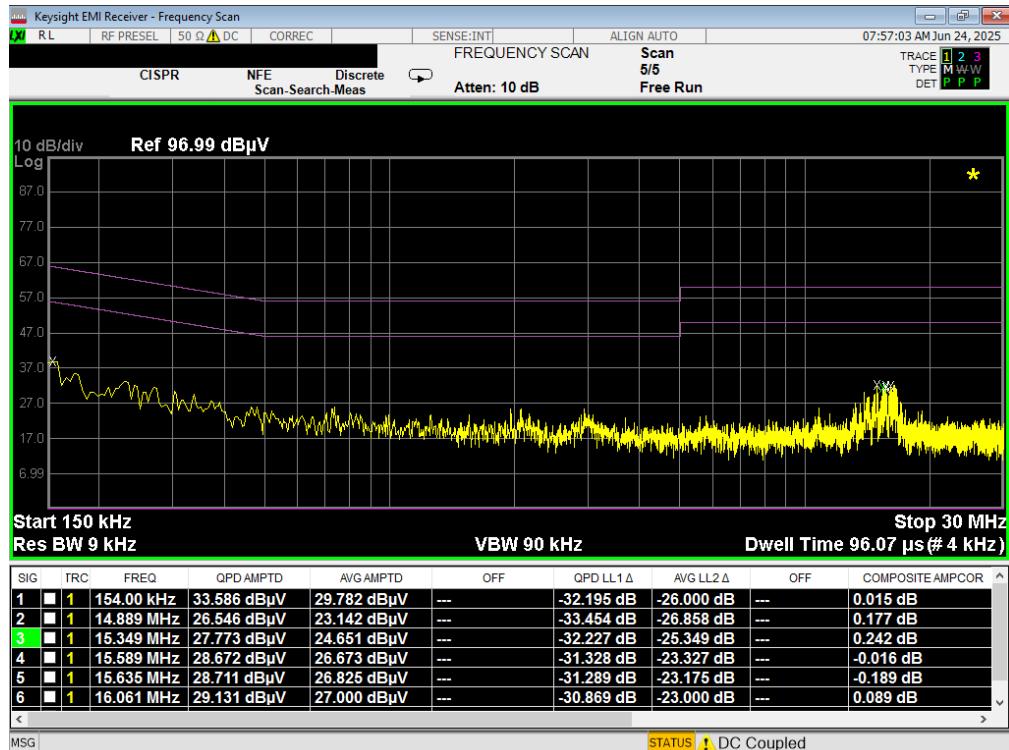
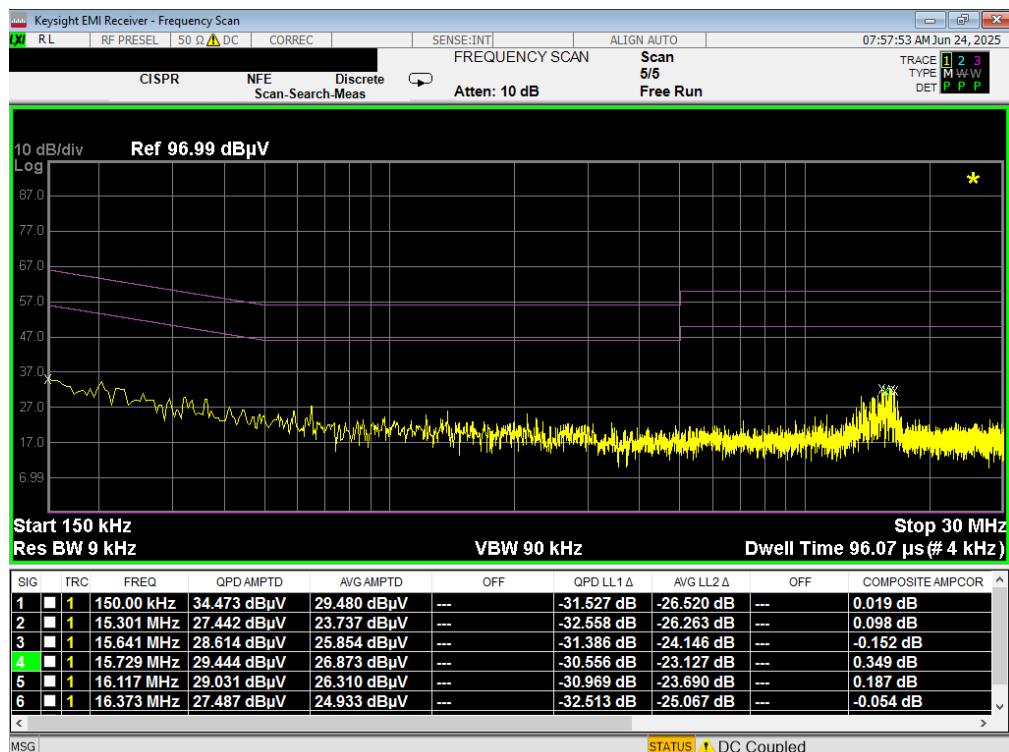


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen (8.8).
3. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Corr. (dB)
5. Margin (dB) = QP/AV Limit (dB μ V) - QP/AV Level (dB μ V)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

| FCC ID: C3K00002102A | | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
|---|-------------------------------------|--|--|-----------------------------------|
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | | Page 31 of 33 |


Plot 7-19. Line Conducted Plot with Bluetooth LE (L1)

Plot 7-20. Line Conducted Plot with Bluetooth LE (N)

| | | | | | |
|---|--|--|---------------|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 32 of 33 | | |

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Microsoft module FCC ID: C3K00002102A** is in compliance the relevant FCC rules for module integration into a host product.

| | | | |
|---|--|--|-----------------------------------|
| FCC ID: C3K00002102A | MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE) | | Approved by: Technical Manager |
| Test Report S/N: 1M2504010035-15.C3K | Test Dates: 4/1/2025 – 6/23/2025 | EUT Type: Limited Modular Approval - Host Integration (Portable Computing Device) | Page 33 of 33 |