



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	<b>Microsoft Corporation</b>
Applicant Address	One Microsoft Way Redmond WA 98052 USA
FCC ID	<b>C3K1804</b>
Manufacturer's company	<b>Microsoft Corporation</b>
Manufacturer Address	One Microsoft Way Redmond WA 98052 USA

Product Name	802.11n 1T2R wireless radio
Brand Name	Microsoft
Model No.	1804
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Jul. 07, 2016
Final Test Date	Jul. 23, 2016
Submission Type	Original Equipment

### Statement

**Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r05**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes.....	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units .....	8
3.8. Table for Parameters of Test Software Setting .....	9
3.9. EUT Operation during Test .....	9
3.10. Duty Cycle.....	9
3.11. Test Configurations .....	10
<b>4. TEST RESULT .....</b>	<b>13</b>
4.1. AC Power Line Conducted Emissions Measurement.....	13
4.2. Maximum Conducted Output Power Measurement.....	17
4.3. Power Spectral Density Measurement .....	19
4.4. 6dB Spectrum Bandwidth Measurement .....	24
4.5. Radiated Emissions Measurement.....	30
4.6. Emissions Measurement.....	46
4.7. Antenna Requirements .....	60
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>61</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>63</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A7</b>



## History of This Test Report



Report No.: FR670537AA

Project No: CB10507317

## 1. VERIFICATION OF COMPLIANCE

Product Name : 802.11n 1T2R wireless radio  
Brand Name : Microsoft  
Model No. : 1804  
Applicant : Microsoft Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 07, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read "Sam Chen".

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C			
Part	Rule Section	Description of Test	Result
4.1	15.207	AC Power Line Conducted Emissions	Complies
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies
4.3	15.247(e)	Power Spectral Density	Complies
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies
4.5	15.247(d)	Radiated Emissions	Complies
4.6	15.247(d)	Band Edge Emissions	Complies
4.7	15.203	Antenna Requirements	Complies

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description	
Product Type	WLAN (1TX, 1RX)	
Radio Type	Intentional Transceiver	
Power Type	From host system	
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: see the below table	
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)	
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table	
Frequency Range	2400 ~ 2483.5MHz	
Channel Number	11 for 20MHz bandwidth	
Channel Bandwidth (99%)	IEEE 802.11b: 13.02 MHz IEEE 802.11g: 17.28 MHz IEEE 802.11n MCS0 (HT20): 18.23 MHz	
Maximum Conducted Output Power	IEEE 802.11b: 22.15 dBm IEEE 802.11g: 19.32 dBm IEEE 802.11n MCS0 (HT20): 18.74 dBm	
Carrier Frequencies	Please refer to section 3.4	
Antenna	Please refer to section 3.3	

Items	Description	
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming

#### Antenna and Bandwidth

Antenna	Single (TX)
Bandwidth Mode	20 MHz
IEEE 802.11b	V
IEEE 802.11g	V
IEEE 802.11n	V

#### IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	1	MCS 0-7

Note: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT only supports HT20.

### 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name (P/N)	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	LYNwave	ALA110-222050-300011	PIFA Antenna	I-PEX	3.5	5.0
2	Amphenol	C-8243-15-000-74-TA	Dipole Antenna	I-PEX	-	6.49

Note: The EUT has two antennas.

For 2.4GHz WLAN function:

For IEEE 802.11b/g/n mode (1TX/1RX):


Only Chain 1 can be used as transmitting antenna and receiving antenna.

For 5GHz WLAN function:

For IEEE 802.11a/n mode (1TX/2RX):

Only Chain 2 can be used as transmitting antenna.

Both Chain 2 and Chain 3 can be used as receiving antenna.

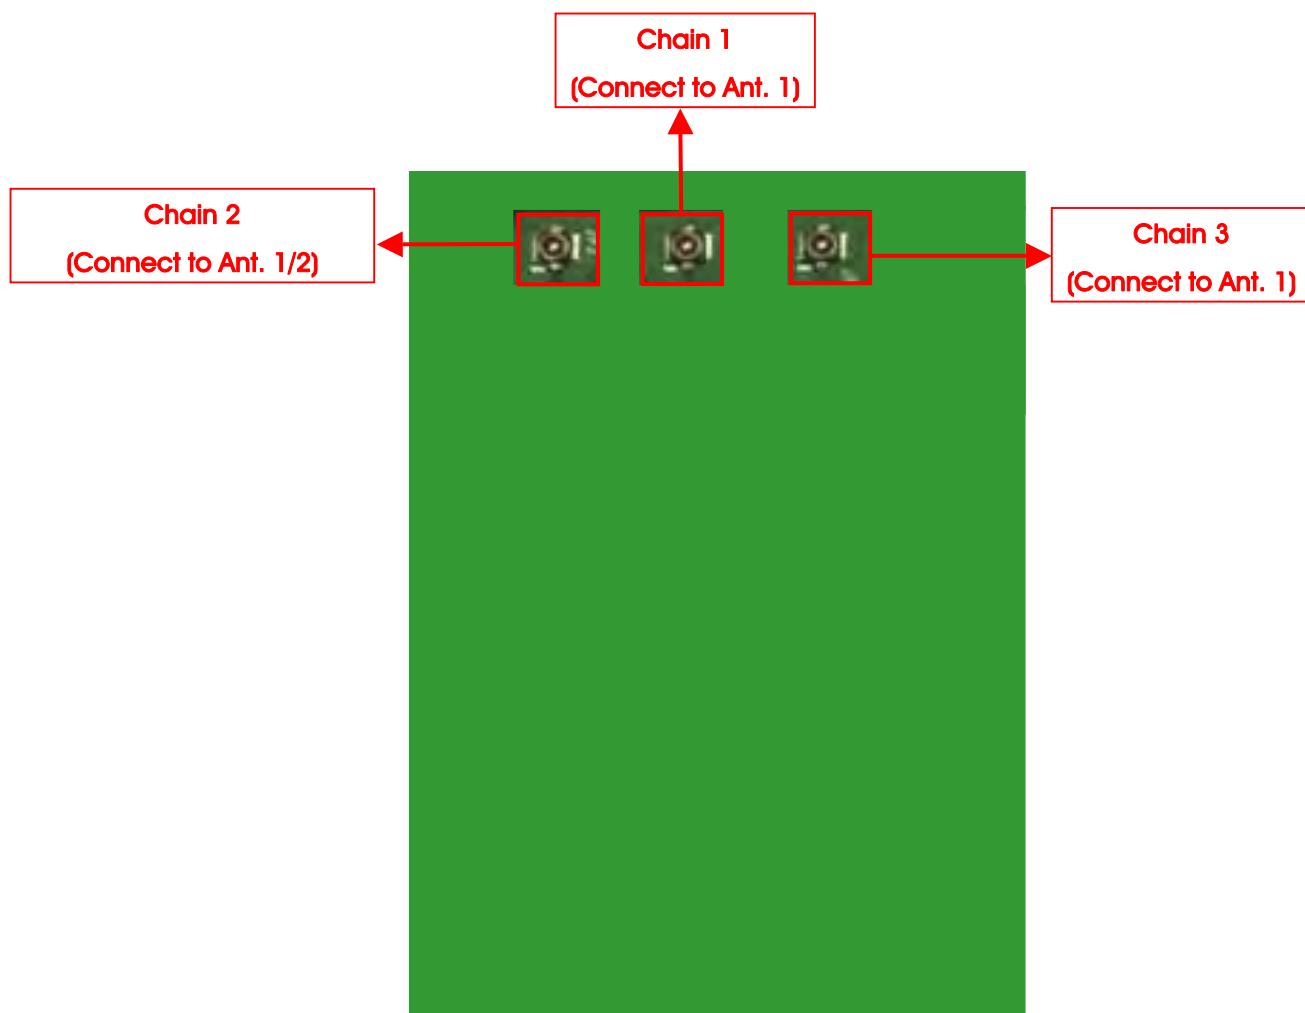

### 3.4. Table for Carrier Frequencies

There is only one bandwidth system.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
	11n HT20	MCS0	1/6/11	1

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. EUT - 2.4GHz

Mode 2. EUT - 5GHz

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test (Below 1GHz):**

Mode 1. EUT - 2.4GHz

Mode 2. EUT - 5GHz

Mode 2 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test (Above 1GHz):**

The EUT can be placed in X-axis, Y-axis and Z-axis. After evaluating, The worst case was found at X-axis, so it's recorded in this report.

Mode 1. CTX

### 3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
AP Router	Planex	GW-AP54SGX	KA220030603014-1
NB	DELL	E6430	DoC
Test fixture	Liteon	WCBN3501R(PC)_EVB	N/A
Earphone	SHYARO CHI	MIC-04	DoC
Mouse	Logitech	M-U0026	DoC

For Test Site No: 03CH01-CB (Below 1GHz)

Support Unit	Brand	Model	FCC ID
WLAN AP	Netgear	R7500	PY314300288
NB	DELL	E4300	DoC
Test fixture	Liteon	WCBN3501R(PC)_EVB	N/A
Earphone	e-Power	S90W	DoC
Mouse	Logitech	M-U0026	DoC

For Test Site No: 03CH01-CB (Above 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
Test fixture	Liteon	WCBN3501R(PC)_EVB	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Test Fixture	Liteon	WCBN3501R(PC)_EVB	N/A

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version		MT 7662 QA V1.0.3.13					
Mode	Test Frequency (MHz)						
	NCB: 20MHz						
	2412 MHz	2437 MHz	2462 MHz				
802.11b	34	3E	31				
802.11g	2B	3E	2A				
802.11n MCS0 HT20	2D	3E	28				

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	8.360	8.800	95.00	0.22	0.12
802.11g	1.440	1.640	87.80	0.56	0.69
802.11n MCS0 HT20	1.340	1.550	86.45	0.63	0.75

### 3.11. Test Configurations


#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

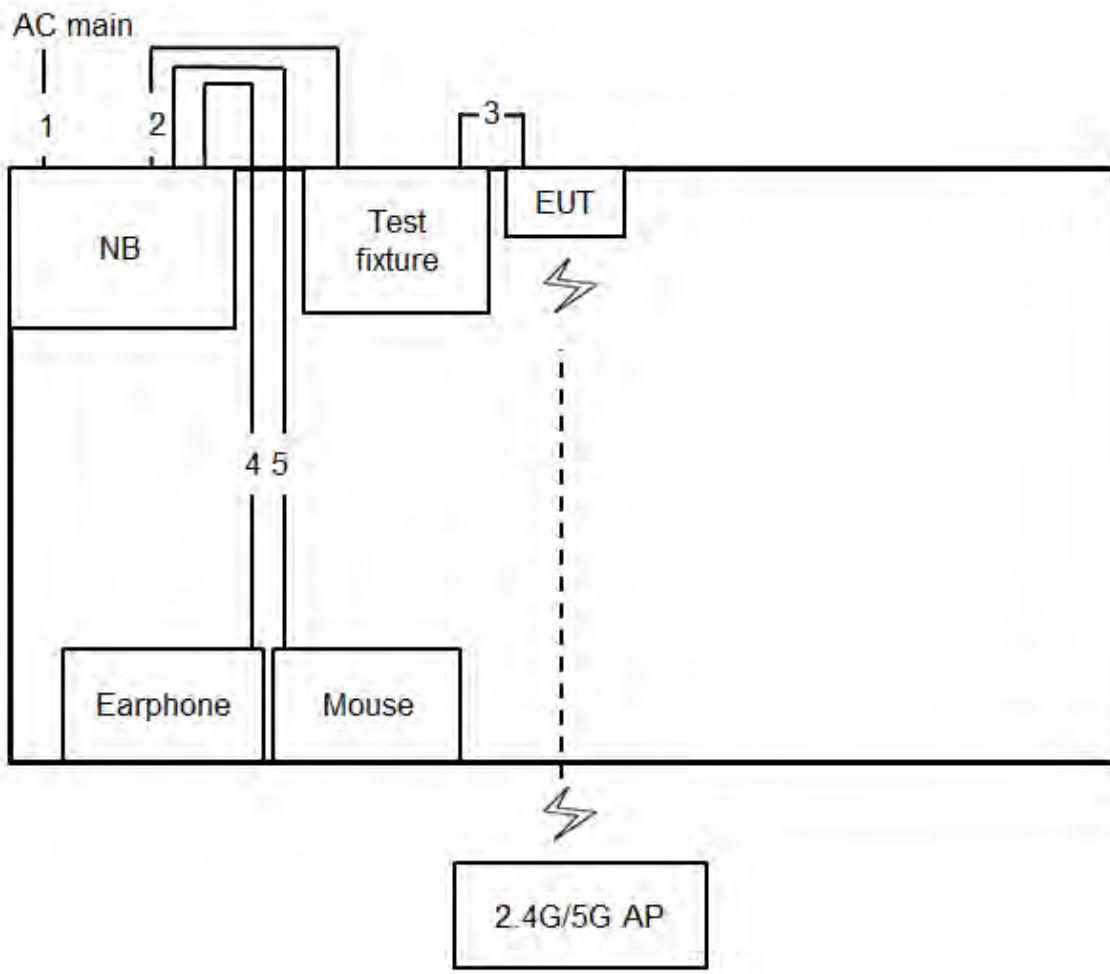

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	USB cable	Yes	0.2m
3	Bus cable	No	0.1m
4	Audio cable	No	1.4m
5	USB cable	Yes	1.8m


### 3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

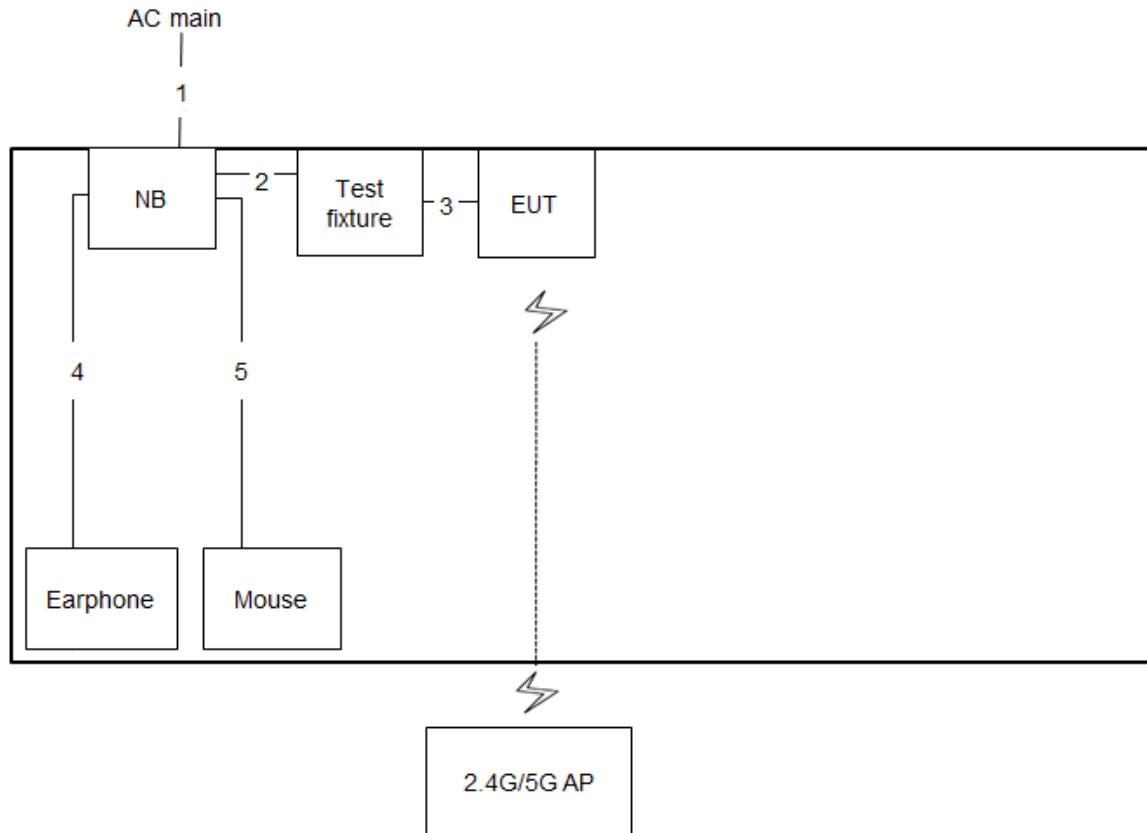

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	USB cable	Yes	0.2m
3	Bus cable	No	0.1m
4	Audio cable	No	1.4m
5	USB cable	Yes	1.8m

Test Configuration: above 1GHz

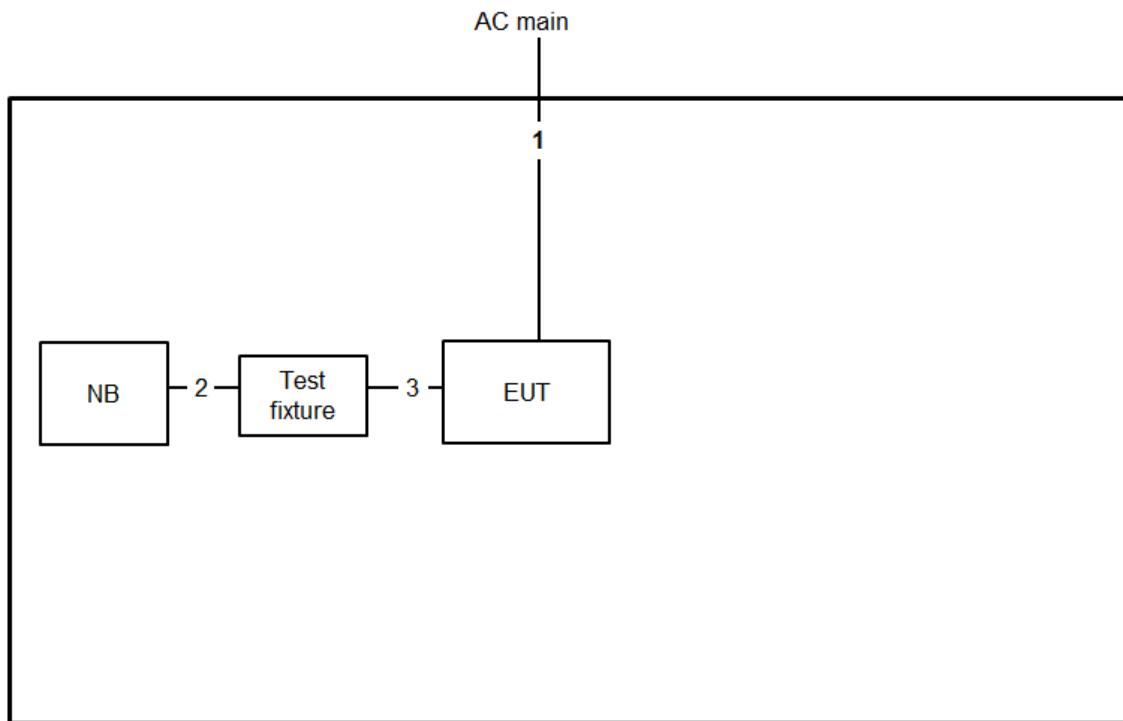

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	USB cable	Yes	0.2m
3	Bus cable	No	0.1m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

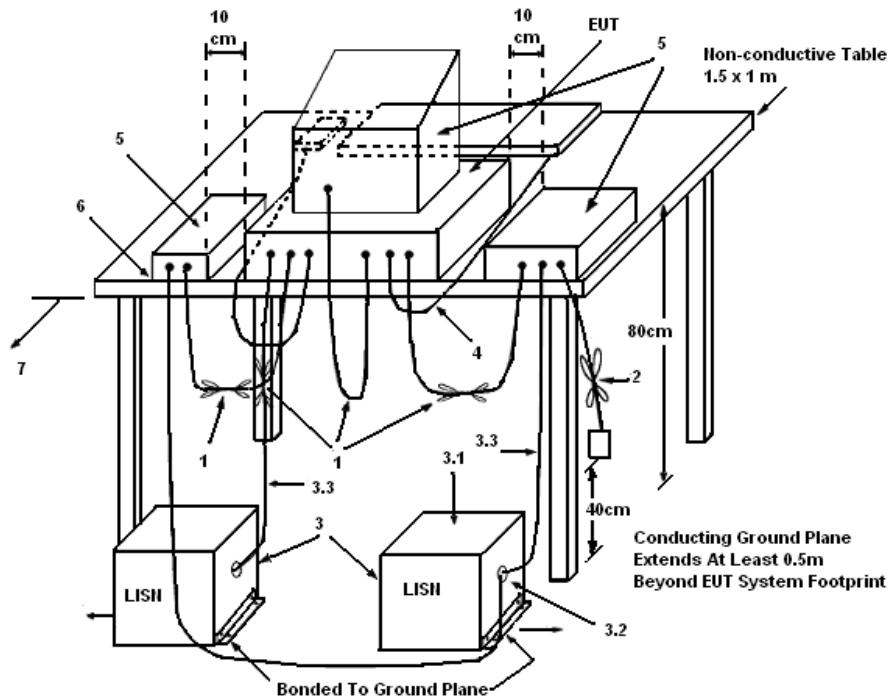

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	60%
Test Engineer	GN Hou	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1

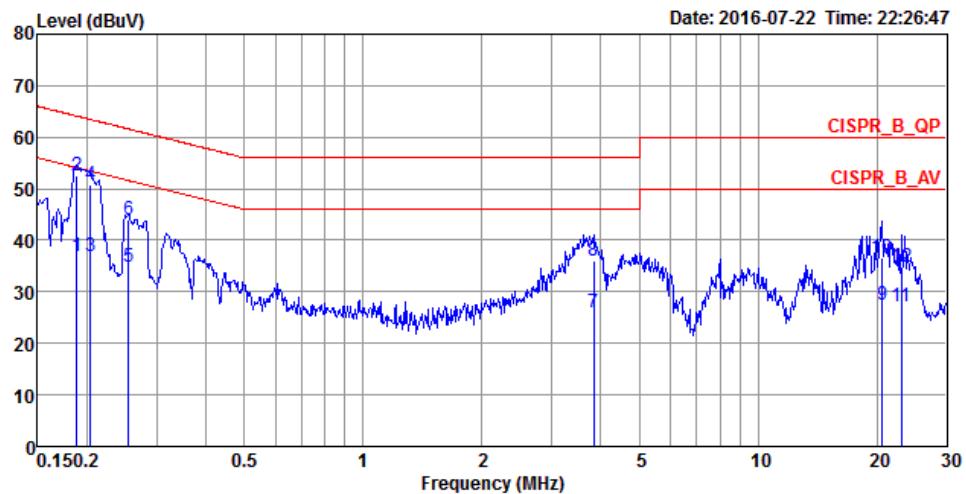

Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase	Remark
		Line	Level	Factor	Loss	dB		
MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1884	36.86	-17.25	54.11	26.76	9.92	0.18	LINE Average
2	0.1884	52.53	-11.58	64.11	42.43	9.92	0.18	LINE QP
3	0.2040	36.80	-16.65	53.45	26.70	9.92	0.18	LINE Average
4	0.2040	50.63	-12.82	63.45	40.53	9.92	0.18	LINE QP
5	0.2548	34.90	-16.70	51.60	24.85	9.92	0.13	LINE Average
6	0.2548	44.05	-17.55	61.60	34.00	9.92	0.13	LINE QP
7	3.8399	25.97	-20.03	46.00	15.89	9.99	0.09	LINE Average
8	3.8399	36.08	-19.92	56.00	26.00	9.99	0.09	LINE QP
9	20.5944	27.38	-22.62	50.00	16.82	10.32	0.24	LINE Average
10	20.5944	36.63	-23.37	60.00	26.07	10.32	0.24	LINE QP
11	23.0181	27.02	-22.98	50.00	16.37	10.39	0.26	LINE Average
12	23.0181	34.78	-25.22	60.00	24.13	10.39	0.26	LINE QP

<b>Temperature</b>	22°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	GN Hou	<b>Phase</b>	Neutral
<b>Configuration</b>	Normal Link	<b>Test Mode</b>	Mode 1

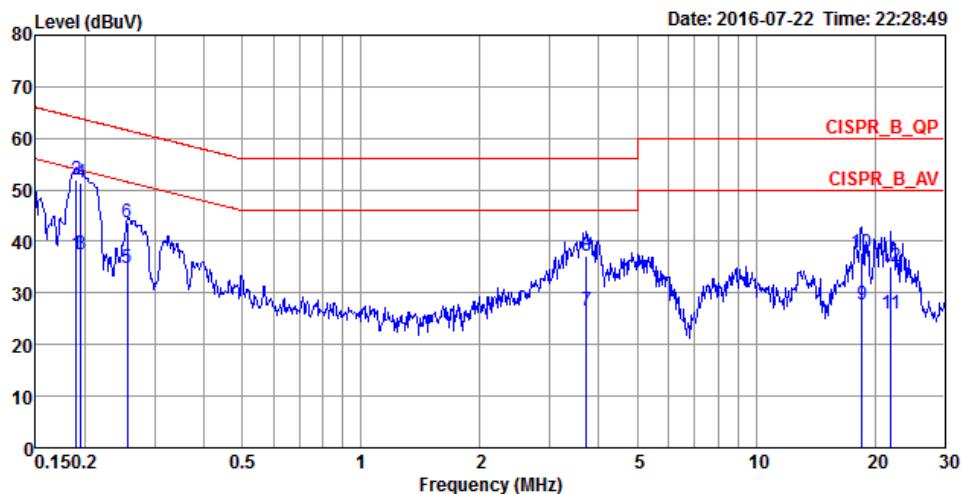

Freq	Level	Over Limit	Limit Line	Read Level		LISN Factor	Cable Loss	Pol/Phase	Remark
				dBuV	dB				
1	0.1904	37.46	-16.56	54.02	27.35	9.92	0.19	NEUTRAL	Average
2	0.1904	52.09	-11.93	64.02	41.98	9.92	0.19	NEUTRAL	QP
3	0.1955	37.59	-16.21	53.80	27.48	9.92	0.19	NEUTRAL	Average
4	0.1955	51.37	-12.43	63.80	41.26	9.92	0.19	NEUTRAL	QP
5	0.2562	34.82	-16.74	51.56	24.77	9.92	0.13	NEUTRAL	Average
6	0.2562	43.59	-17.97	61.56	33.54	9.92	0.13	NEUTRAL	QP
7	3.7198	26.54	-19.46	46.00	16.46	9.99	0.09	NEUTRAL	Average
8	3.7198	37.23	-18.77	56.00	27.15	9.99	0.09	NEUTRAL	QP
9	18.5237	27.89	-22.11	50.00	17.37	10.29	0.23	NEUTRAL	Average
10	18.5237	37.67	-22.33	60.00	27.15	10.29	0.23	NEUTRAL	QP
11	21.9463	26.10	-23.90	50.00	15.49	10.36	0.25	NEUTRAL	Average
12	21.9463	35.19	-24.81	60.00	24.58	10.36	0.25	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

The limit for output power is 30dBm.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r05 section 9.2.3.2 Measurement using a power meter (PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

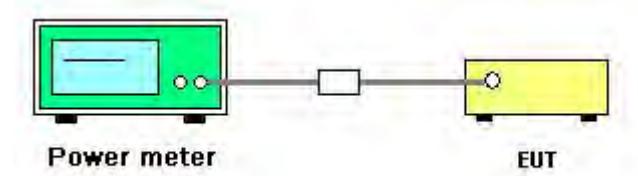

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	24°C	Humidity	51%
Test Engineer	Paul Chen	Test Date	Jul. 23, 2016

Mode	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
		Chain 1		
802.11b	2412 MHz	20.41	30.00	Complies
	2437 MHz	22.15	30.00	Complies
	2462 MHz	19.53	30.00	Complies
802.11g	2412 MHz	15.02	30.00	Complies
	2437 MHz	19.32	30.00	Complies
	2462 MHz	15.71	30.00	Complies
802.11n MCS0 HT20	2412 MHz	15.48	30.00	Complies
	2437 MHz	18.74	30.00	Complies
	2462 MHz	14.21	30.00	Complies

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

#### 4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD).
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout

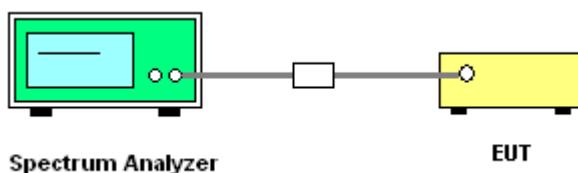

#### **4.3.5. Test Deviation**

There is no deviation with the original standard.

#### **4.3.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

## 4.3.7. Test Result of Power Spectral Density


Temperature	24°C	Humidity	51%
Test Engineer	Paul Chen		

Mode	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
		Chain 1		
802.11b	2412 MHz	-5.12	8.00	Complies
	2437 MHz	0.04	8.00	Complies
	2462 MHz	-10.21	8.00	Complies
802.11g	2412 MHz	-10.61	8.00	Complies
	2437 MHz	-4.54	8.00	Complies
	2462 MHz	-15.39	8.00	Complies
802.11n MCS0 HT20	2412 MHz	-9.59	8.00	Complies
	2437 MHz	-4.61	8.00	Complies
	2462 MHz	-12.67	8.00	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

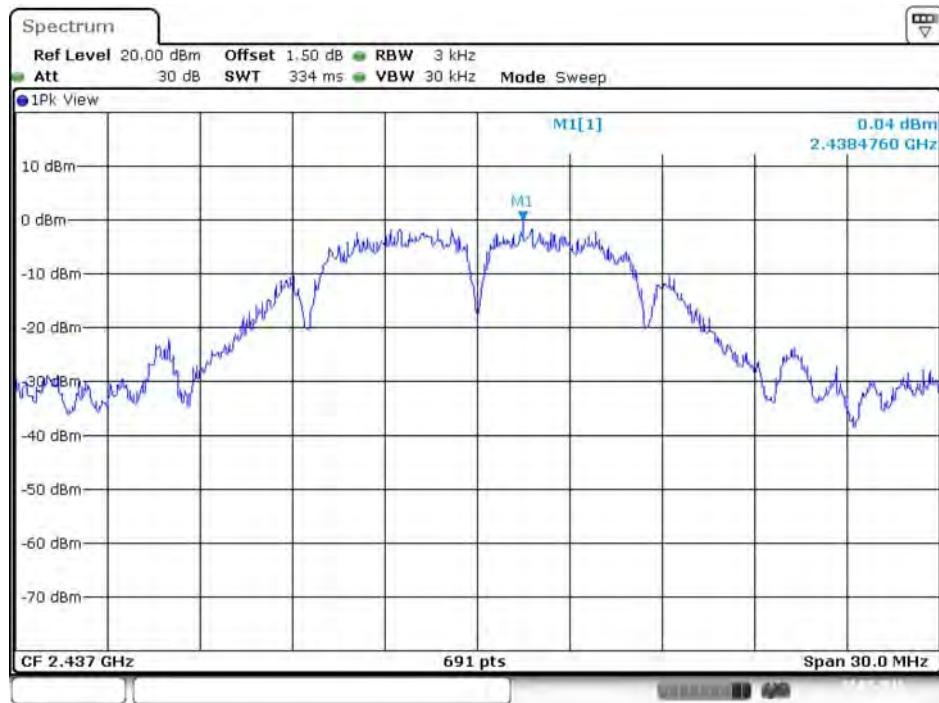


Date: 23.JUL.2016 16:08:54

### Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

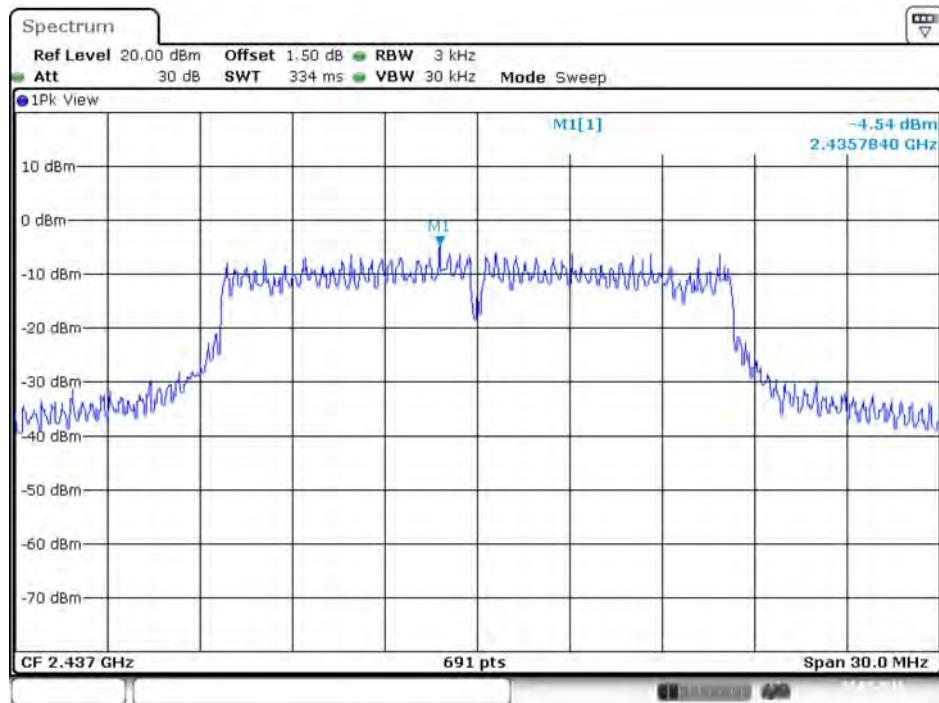

Date: 23.JUL.2016 16:19:53

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1**

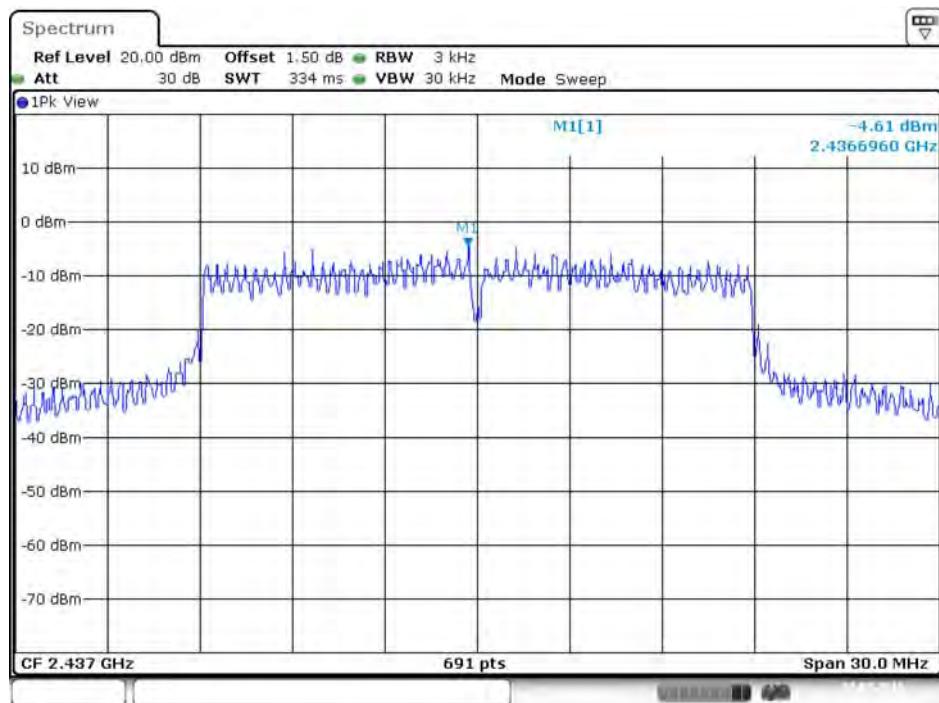

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

### 4.4.3. Test Procedures

#### For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout

#### For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.4.5. Test Deviation**

There is no deviation with the original standard.

#### **4.4.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

## 4.4.7. Test Result of 6dB Spectrum Bandwidth


Temperature	24°C	Humidity	51%
Test Engineer	Paul Chen		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	9.62	12.42	500	Complies
	2437 MHz	10.03	13.02	500	Complies
	2462 MHz	9.04	12.33	500	Complies
802.11g	2412 MHz	16.35	16.93	500	Complies
	2437 MHz	15.94	17.28	500	Complies
	2462 MHz	16.35	16.85	500	Complies
802.11n MCS0 HT20	2412 MHz	17.28	17.80	500	Complies
	2437 MHz	17.28	18.23	500	Complies
	2462 MHz	17.16	17.80	500	Complies


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


### 6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1

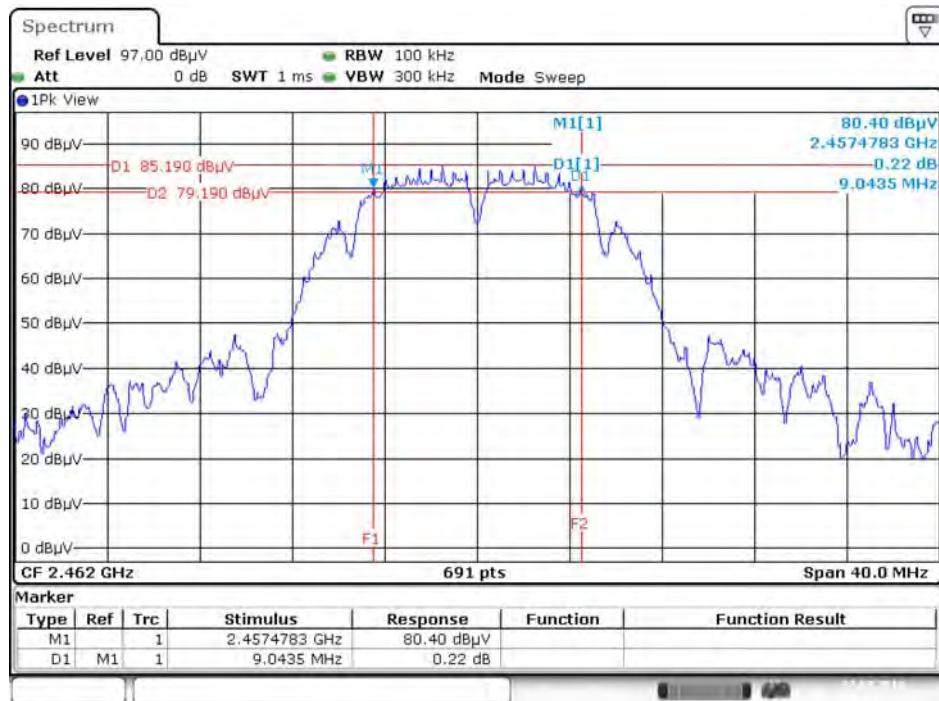

### 99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1

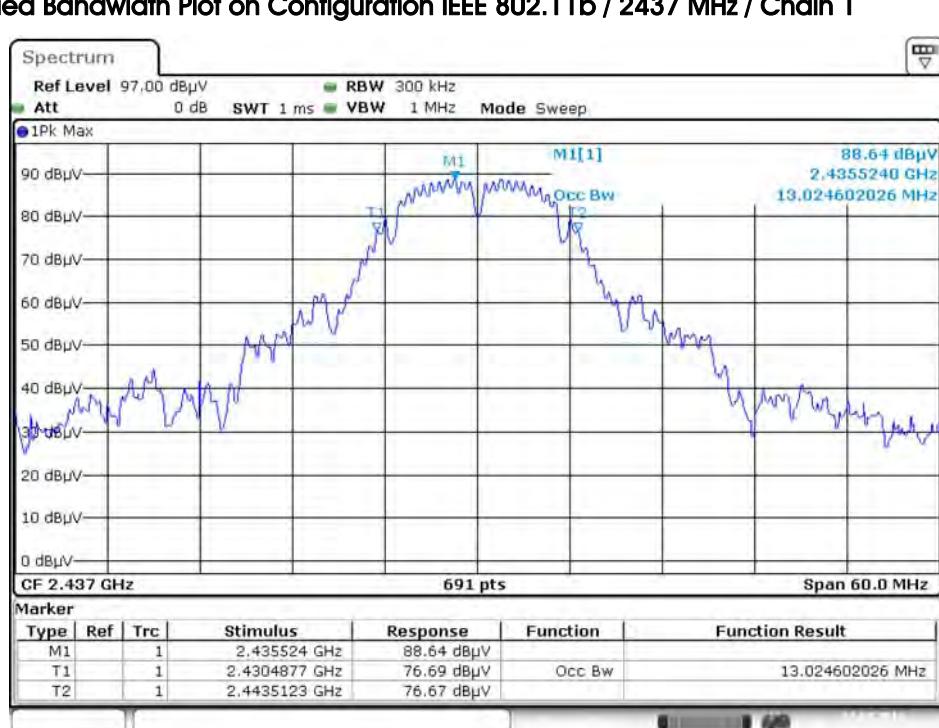


### 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

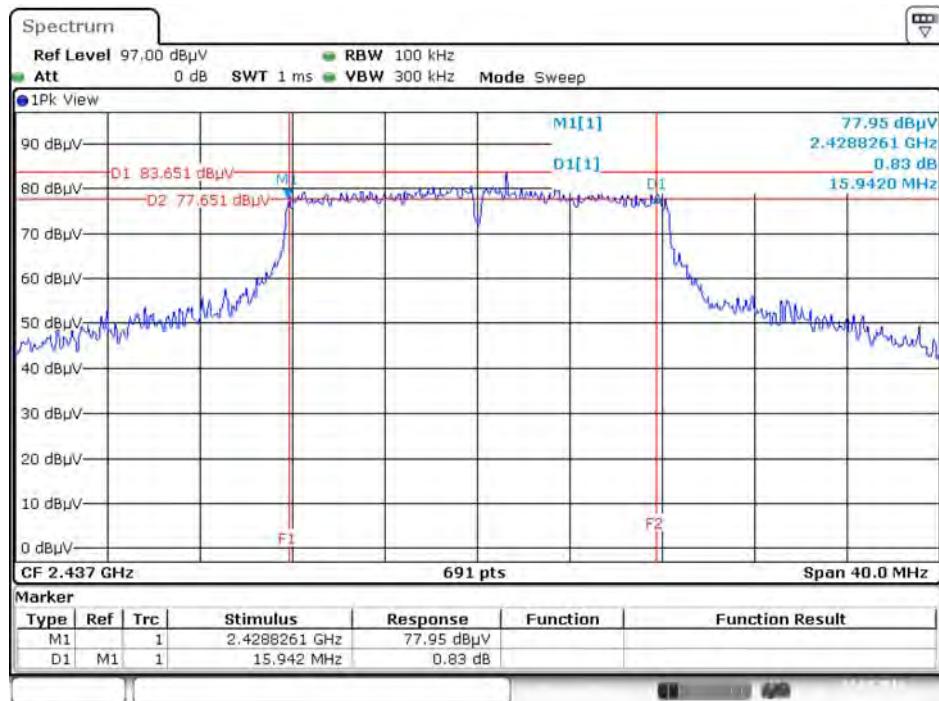


### 99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1



### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2462 MHz / Chain 1

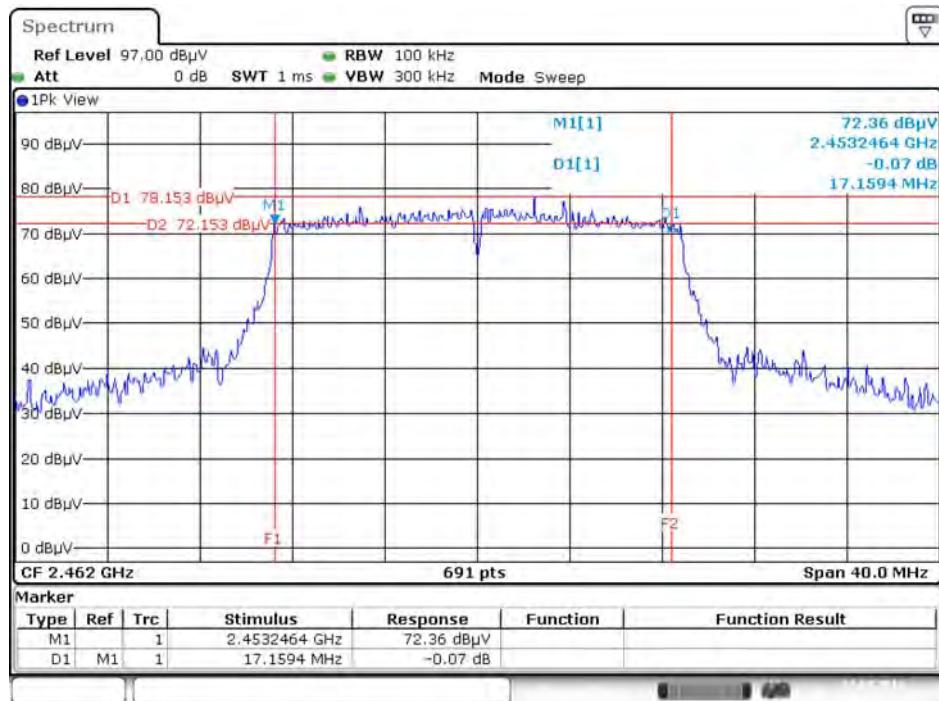

### 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1

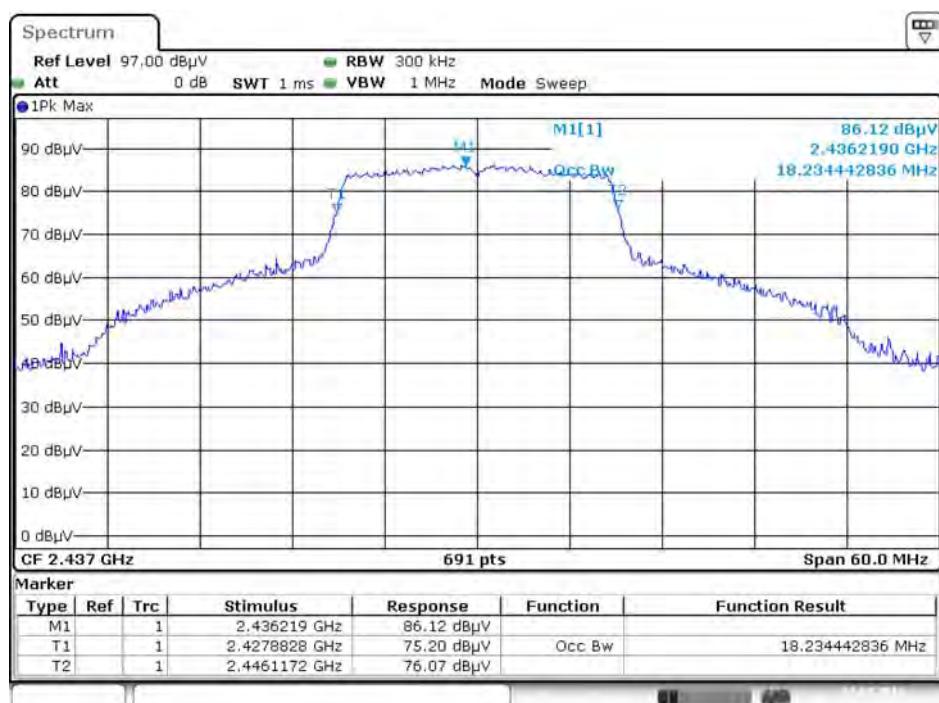

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

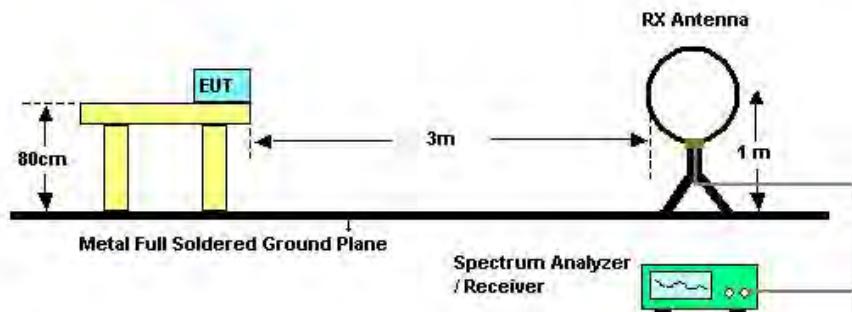

For Radiated Emissions: 30MHz~1GHz

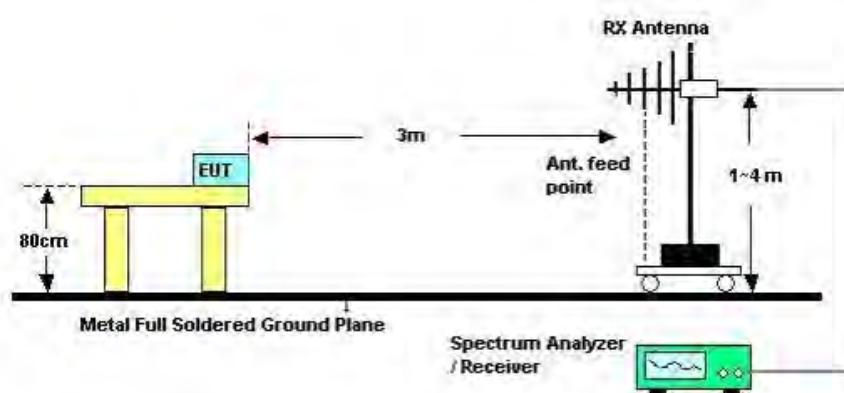

For Radiated Emissions: Above 1GHz

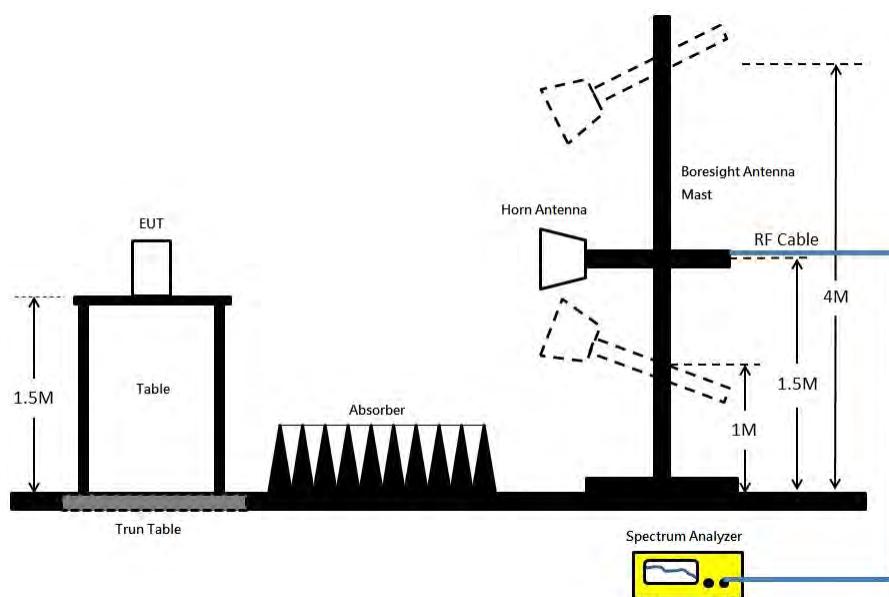

#### **4.5.5. Test Deviation**

There is no deviation with the original standard.

#### **4.5.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	Normal Link
Test Date	Jul. 20, 2016	Test Mode	Mode 2

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	Normal Link
Test Mode	Mode 2		

*Horizontal*

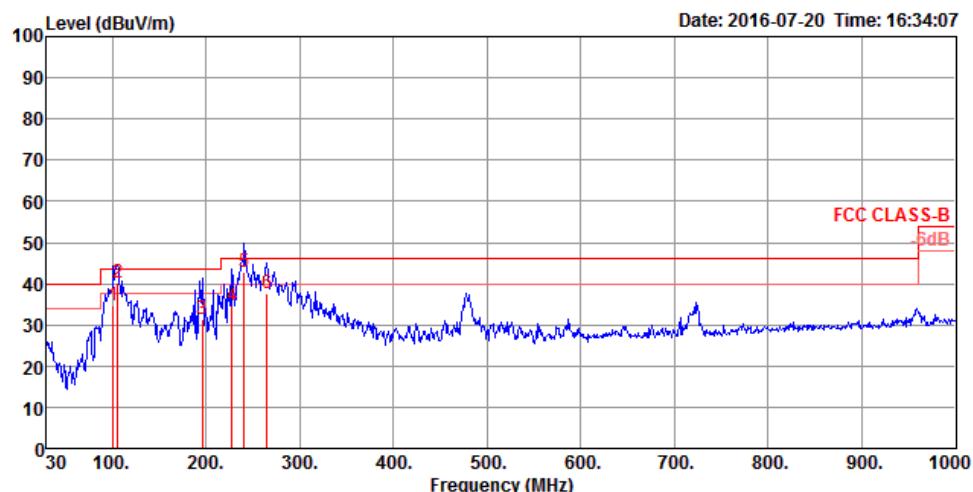

Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB									
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB	dB/m	dB	cm	deg		
1	100.81	34.80	43.50	-8.70	48.59	0.87	17.73	32.39	200	359	QP	HORIZONTAL
2	105.66	40.24	43.50	-3.26	53.45	0.89	18.29	32.39	200	337	QP	HORIZONTAL
3	195.87	31.30	43.50	-12.20	46.00	1.21	16.42	32.33	200	170	QP	HORIZONTAL
4	227.88	34.84	46.00	-11.16	48.50	1.29	17.36	32.31	100	3	QP	HORIZONTAL
5	240.49	42.68	46.00	-3.32	55.21	1.32	18.46	32.31	200	50	QP	HORIZONTAL
6	264.74	37.54	46.00	-8.46	48.70	1.38	19.76	32.30	125	207	QP	HORIZONTAL

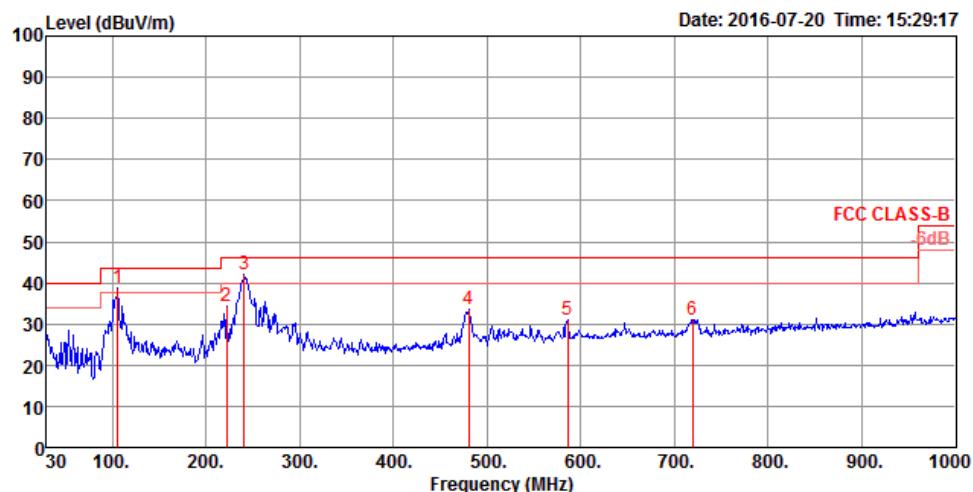**Vertical**


Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	105.66	38.72	43.50	-4.78	51.93	0.89	18.29	32.39	200	263	Peak	VERTICAL
2	222.06	34.24	46.00	-11.76	48.24	1.28	17.04	32.32	150	178	Peak	VERTICAL
3	240.49	42.13	46.00	-3.87	54.66	1.32	18.46	32.31	125	190	Peak	VERTICAL
4	480.08	33.43	46.00	-12.57	40.17	1.90	23.71	32.35	200	282	Peak	VERTICAL
5	585.81	31.01	46.00	-14.99	36.09	2.09	25.23	32.40	200	276	Peak	VERTICAL
6	719.67	31.16	46.00	-14.84	35.09	2.31	26.10	32.34	125	295	Peak	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	IEEE 802.11b CH 1 / Chain 1
Test Date	Jul. 19, 2016		

## Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			Antenna	Preamp					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	4823.89	52.42	74.00	-21.58	46.61	6.54	34.17	34.90	177	197	Peak	HORIZONTAL
2	4823.97	48.75	54.00	-5.25	42.94	6.54	34.17	34.90	177	197	Average	HORIZONTAL

## Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			Antenna	Preamp					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	4823.97	51.52	74.00	-22.48	45.71	6.54	34.17	34.90	173	213	Peak	VERTICAL
2	4823.98	47.49	54.00	-6.51	41.68	6.54	34.17	34.90	173	213	Average	VERTICAL

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11b CH 6 / Chain 1
<b>Test Date</b>	Jul. 19, 2016		

**Horizontal**

	Freq	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Level	Line			Loss	Factor						
		MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.87	50.30	74.00	-23.70	44.22	6.64	34.34	34.90	197	194	Peak		HORIZONTAL
2	4873.96	42.79	54.00	-11.21	36.71	6.64	34.34	34.90	197	194	Average		HORIZONTAL

**Vertical**

	Freq	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Level	Line			Loss	Factor						
		MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg	
1	4873.80	51.53	74.00	-22.47	45.45	6.64	34.34	34.90	203	178	Peak		VERTICAL
2	4873.92	45.63	54.00	-8.37	39.55	6.64	34.34	34.90	203	178	Average		VERTICAL

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	IEEE 802.11b CH 11 / Chain 1
Test Date	Jul. 19, 2016		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			dB	dB/m	dB	
1	4923.96	43.49	54.00	-10.51	37.15	6.74	34.50	34.90	200	234	Average	HORIZONTAL	
2	4923.99	50.88	74.00	-23.12	44.54	6.74	34.50	34.90	200	234	Peak	HORIZONTAL	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			dB	dB/m	dB	
1	4923.90	51.42	74.00	-22.58	45.08	6.74	34.50	34.90	225	200	Peak	VERTICAL	
2	4923.92	44.60	54.00	-9.40	38.26	6.74	34.50	34.90	225	200	Average	VERTICAL	



Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	IEEE 802.11g CH 1 / Chain 1
Test Date	Jul. 19, 2016		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m	dB	cm	deg	
1	4822.91	34.23	54.00	-19.77	28.42	6.54	34.17	34.90	224	311	Average	HORIZONTAL	
2	4825.35	47.34	74.00	-26.66	41.47	6.56	34.21	34.90	224	311	Peak	HORIZONTAL	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m	dB	cm	deg	
1	4823.02	47.21	74.00	-26.79	41.40	6.54	34.17	34.90	213	213	Peak	VERTICAL	
2	4823.55	34.19	54.00	-19.81	28.38	6.54	34.17	34.90	213	213	Average	VERTICAL	

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	IEEE 802.11g CH 6 / Chain 1
Test Date	Jul. 19, 2016		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	4874.82	35.80	54.00	-18.20	29.72	6.64	34.34	34.90	129	148	Average	HORIZONTAL
2	4875.81	49.35	74.00	-24.65	43.27	6.64	34.34	34.90	129	148	Peak	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	4871.68	35.72	54.00	-18.28	29.64	6.64	34.34	34.90	160	31	Average	VERTICAL
2	4876.08	49.12	74.00	-24.88	43.04	6.64	34.34	34.90	160	31	Peak	VERTICAL

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	IEEE 802.11g CH 11 / Chain 1
Test Date	Jul. 19, 2016		

**Horizontal**

	Freq	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Level	Line			Loss	dB/m						
	1	4922.69	48.30	74.00	-25.70	42.02	6.72	34.46	34.90	182	159	Peak	HORIZONTAL
	2	4924.57	35.08	54.00	-18.92	28.74	6.74	34.50	34.90	182	159	Average	HORIZONTAL

**Vertical**

	Freq	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Level	Line			Loss	dB/m						
	1	4924.61	35.57	54.00	-18.43	29.23	6.74	34.50	34.90	170	240	Average	VERTICAL
	2	4925.38	48.52	74.00	-25.48	42.18	6.74	34.50	34.90	170	240	Peak	VERTICAL

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1
Test Date	Jul. 19, 2016		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			dB	dB/m	dB	cm
1	4822.42	47.80	74.00	-26.20	41.99	6.54	34.17	34.90	186	95	Peak		HORIZONTAL
2	4823.27	34.41	54.00	-19.59	28.60	6.54	34.17	34.90	186	95	Average		HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			dB	dB/m	dB	cm
1	4823.97	34.55	54.00	-19.45	28.74	6.54	34.17	34.90	178	311	Average		VERTICAL
2	4825.99	47.03	74.00	-26.97	41.16	6.56	34.21	34.90	178	311	Peak		VERTICAL



Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1
Test Date	Jul. 19, 2016		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			dB	dB/m	dB	cm
1	4872.31	35.26	54.00	-18.74	29.18	6.64	34.34	34.90	34.90	150	206	Average	HORIZONTAL
2	4876.33	48.27	74.00	-25.73	42.19	6.64	34.34	34.90	34.90	150	206	Peak	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			dB	dB/m	dB	cm
1	4872.35	48.04	74.00	-25.96	41.96	6.64	34.34	34.90	34.90	187	125	Peak	VERTICAL
2	4875.15	35.20	54.00	-18.80	29.12	6.64	34.34	34.90	34.90	187	125	Average	VERTICAL

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1
Test Date	Jul. 19, 2016		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Antenna Factor		Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m				cm	deg
1	4924.81	48.25	74.00	-25.75	41.91	6.74	34.50	34.90	184	95	Peak			HORIZONTAL
2	4925.21	35.05	54.00	-18.95	28.71	6.74	34.50	34.90	184	95	Average			HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss		Antenna Factor		Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m				cm	deg
1	4925.19	47.89	74.00	-26.11	41.55	6.74	34.50	34.90	198	242	Peak			VERTICAL
2	4926.15	35.08	54.00	-18.92	28.74	6.74	34.50	34.90	198	242	Average			VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Emissions Measurement

### 4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

### 4.6.3. Test Procedures

#### For Radiated band edges Measurement:

The test procedure is the same as section 4.5.3.

#### For Radiated Out of Band Emission Measurement:

Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance

Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 11.0 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

#### **4.6.4. Test Setup Layout**

##### For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

##### For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.6.5. Test Deviation**

There is no deviation with the original standard.

#### **4.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1
Test Date	Jul. 19, 2016		

##### Channel 1

Freq	Level	Limit		Over Limit	Read Level	Cable Loss			Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz	dBuV/m	dBuV/m		dB							cm	deg		
1	2386.80	61.66	74.00	-12.34	28.55	4.54	28.57	0.00	206	204	Peak		HORIZONTAL	
2	2390.00	53.92	54.00	-0.08	20.81	4.54	28.57	0.00	206	204	Average		HORIZONTAL	
3	2410.20	107.33			74.15	4.57	28.61	0.00	206	204	Average		HORIZONTAL	
4	2410.60	111.47			78.29	4.57	28.61	0.00	206	204	Peak		HORIZONTAL	

Item 3, 4 are the fundamental frequency at 2412 MHz.

##### Channel 6

Freq	Level	Limit		Over Limit	Read Level	Cable Loss			Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz	dBuV/m	dBuV/m		dB							cm	deg		
1	2377.00	50.56	54.00	-3.44	17.46	4.54	28.56	0.00	207	203	Average		HORIZONTAL	
2	2377.40	60.20	74.00	-13.80	27.10	4.54	28.56	0.00	207	203	Peak		HORIZONTAL	
3	2435.40	109.11			75.85	4.59	28.67	0.00	207	203	Average		HORIZONTAL	
4	2435.40	113.32			80.06	4.59	28.67	0.00	207	203	Peak		HORIZONTAL	
5	2483.50	57.74	74.00	-16.26	24.34	4.63	28.77	0.00	207	203	Peak		HORIZONTAL	
6	2497.00	49.15	54.00	-4.85	15.71	4.64	28.80	0.00	207	203	Average		HORIZONTAL	

Item 3, 4 are the fundamental frequency at 2437 MHz.

##### Channel 11

Freq	Level	Limit		Over Limit	Read Level	Cable Loss			Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB						
MHz	dBuV/m	dBuV/m		dB							cm	deg		
1	2460.20	106.87			73.55	4.61	28.71	0.00	207	203	Average		HORIZONTAL	
2	2463.00	110.40			77.06	4.61	28.73	0.00	207	203	Peak		HORIZONTAL	
3	2483.50	53.56	54.00	-0.44	20.16	4.63	28.77	0.00	207	203	Average		HORIZONTAL	
4	2486.60	63.66	74.00	-10.34	30.26	4.63	28.77	0.00	207	203	Peak		HORIZONTAL	

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23.7°C	Humidity	52%
Test Engineer	John Tang	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1
Test Date	Jul. 19, 2016		

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	2389.60	66.12	74.00	-7.88	33.01	4.54	28.57	0.00	210	205	Peak	HORIZONTAL
2	2390.00	50.90	54.00	-3.10	17.79	4.54	28.57	0.00	210	205	Average	HORIZONTAL
3	2411.20	97.98			64.78	4.57	28.63	0.00	210	205	Average	HORIZONTAL
4	2413.00	107.45			74.25	4.57	28.63	0.00	210	205	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	2388.20	46.58	54.00	-7.42	13.47	4.54	28.57	0.00	253	348	Average	HORIZONTAL
2	2389.80	58.87	74.00	-15.13	25.76	4.54	28.57	0.00	253	348	Peak	HORIZONTAL
3	2433.80	111.78			78.52	4.59	28.67	0.00	253	348	Peak	HORIZONTAL
4	2436.20	102.37			69.11	4.59	28.67	0.00	253	348	Average	HORIZONTAL
5	2483.80	47.19	54.00	-6.81	13.79	4.63	28.77	0.00	253	348	Average	HORIZONTAL
6	2484.20	58.75	74.00	-15.25	25.35	4.63	28.77	0.00	253	348	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	2463.00	99.52			66.18	4.61	28.73	0.00	210	202	Average	HORIZONTAL
2	2463.20	108.97			75.63	4.61	28.73	0.00	210	202	Peak	HORIZONTAL
3	2483.50	53.53	54.00	-0.47	20.13	4.63	28.77	0.00	210	202	Average	HORIZONTAL
4	2484.20	72.46	74.00	-1.54	39.06	4.63	28.77	0.00	210	202	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	23.7°C	<b>Humidity</b>	52%
<b>Test Engineer</b>	John Tang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1
<b>Test Date</b>	Jul. 19, 2016		

### Channel 1

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
			MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	2389.20	67.27	74.00	-6.73	34.16	4.54	28.57	0.00	210	202 Peak		HORIZONTAL
2	2390.00	52.64	54.00	-1.36	19.53	4.54	28.57	0.00	210	202 Average		HORIZONTAL
3	2410.40	107.35			74.17	4.57	28.61	0.00	210	202 Peak		HORIZONTAL
4	2411.20	98.20			65.00	4.57	28.63	0.00	210	202 Average		HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
			MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	2389.40	62.29	74.00	-11.71	29.18	4.54	28.57	0.00	200	202 Peak		HORIZONTAL
2	2389.80	47.51	54.00	-6.49	14.40	4.54	28.57	0.00	200	202 Average		HORIZONTAL
3	2435.80	112.28			79.02	4.59	28.67	0.00	200	202 Peak		HORIZONTAL
4	2438.20	103.24			69.98	4.59	28.67	0.00	200	202 Average		HORIZONTAL
5	2483.50	48.17	54.00	-5.83	14.77	4.63	28.77	0.00	200	202 Average		HORIZONTAL
6	2483.80	61.23	74.00	-12.77	27.83	4.63	28.77	0.00	200	202 Peak		HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 11

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
			MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	2461.40	96.24			62.90	4.61	28.73	0.00	222	204 Average		HORIZONTAL
2	2462.40	105.67			72.33	4.61	28.73	0.00	222	204 Peak		HORIZONTAL
3	2483.50	50.47	54.00	-3.53	17.07	4.63	28.77	0.00	222	204 Average		HORIZONTAL
4	2484.60	66.69	74.00	-7.31	33.29	4.63	28.77	0.00	222	204 Peak		HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


**For Emission not in Restricted Band**

**Plot on Configuration IEEE 802.11b / Reference Level**

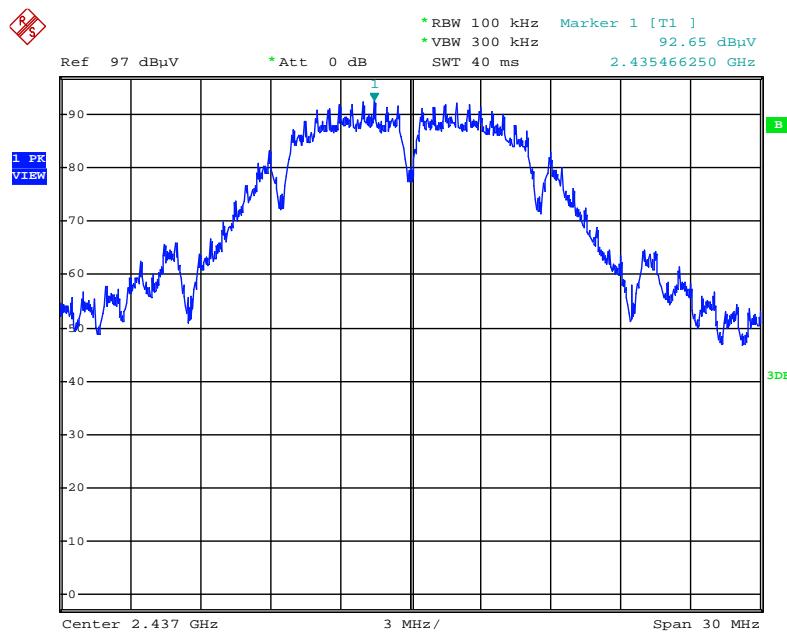


Date: 19.JUL.2016 23:09:57

**Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)**

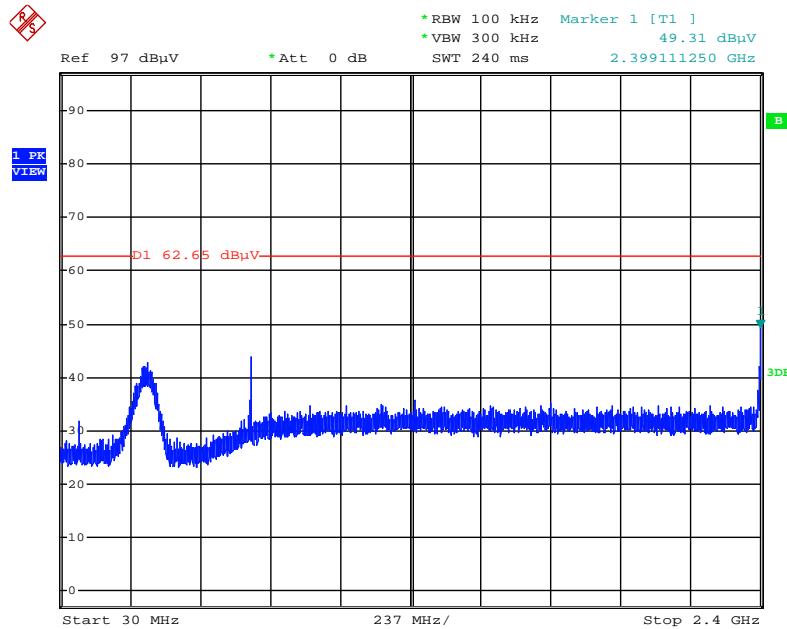


Date: 19.JUL.2016 23:11:09

**Plot on Configuration IEEE 802.11b / CH 1 / 2483.5MHz~26500MHz (down 30dBc)**

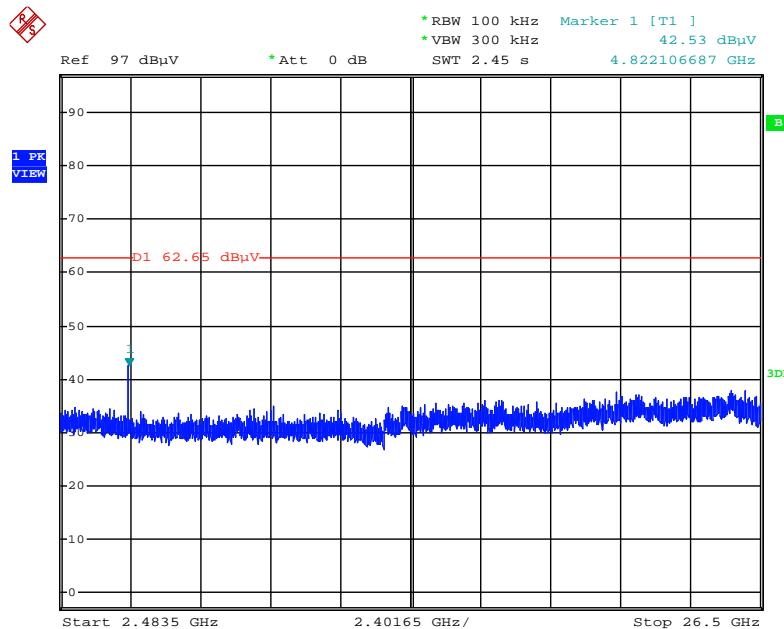


Date: 19.JUL.2016 23:11:49

**Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)**

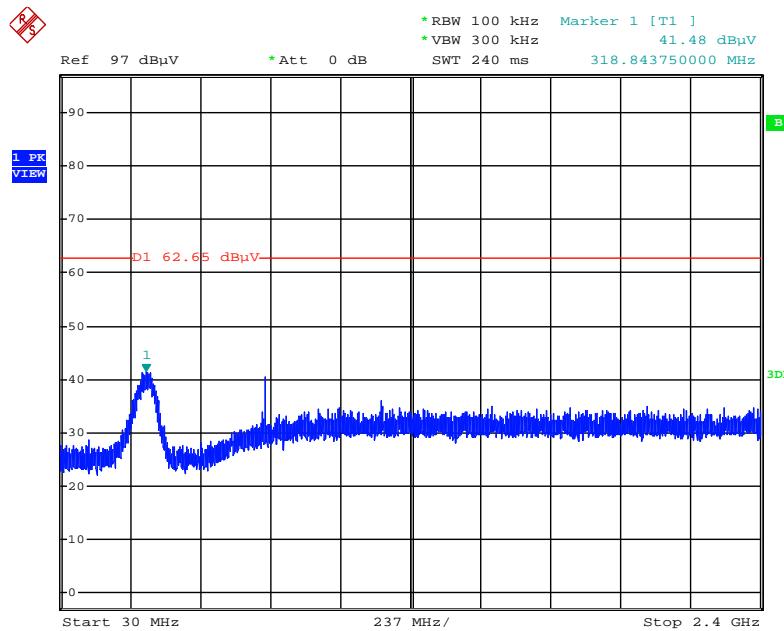


Date: 19.JUL.2016 23:12:22

**Plot on Configuration IEEE 802.11b / CH 11 / 2483.5MHz~26500MHz (down 30dBc)**

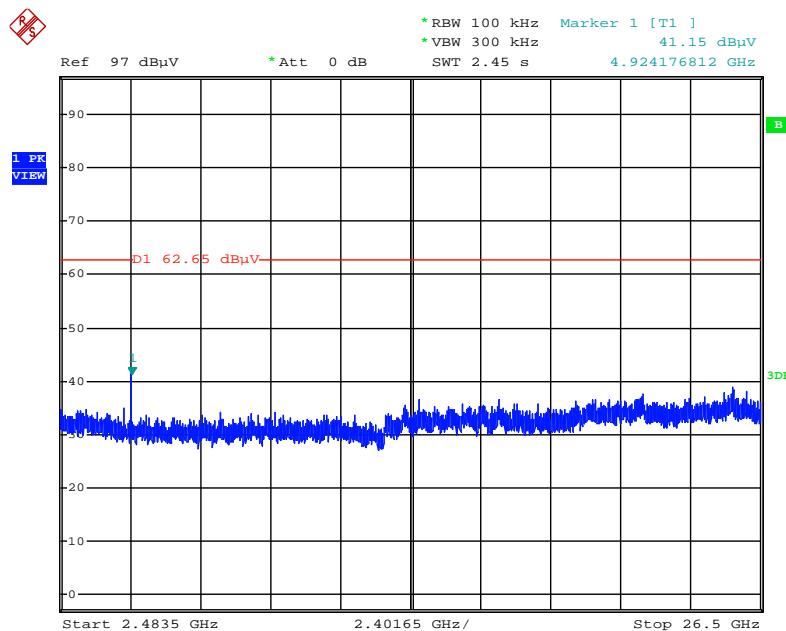


Date: 19.JUL.2016 23:12:51

**Plot on Configuration IEEE 802.11g / Reference Level**

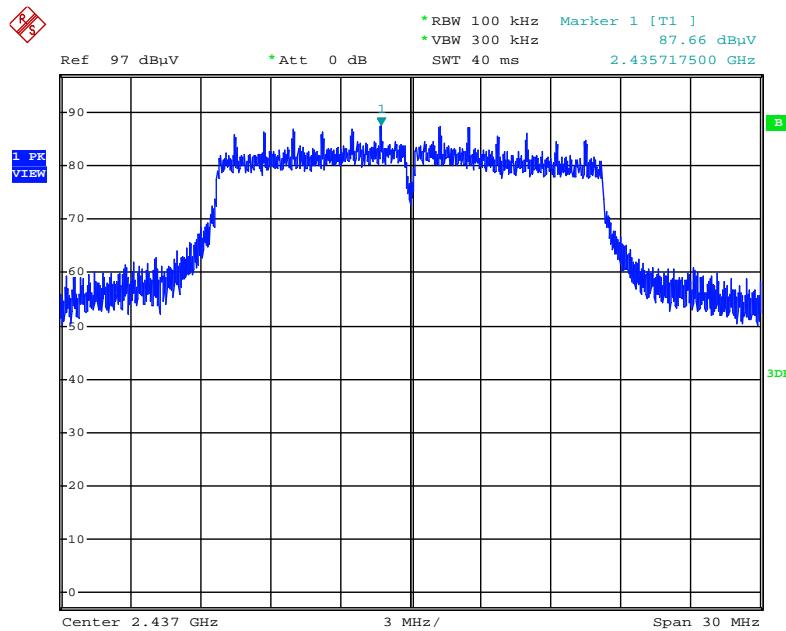


Date: 19.JUL.2016 23:14:13

**Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)**

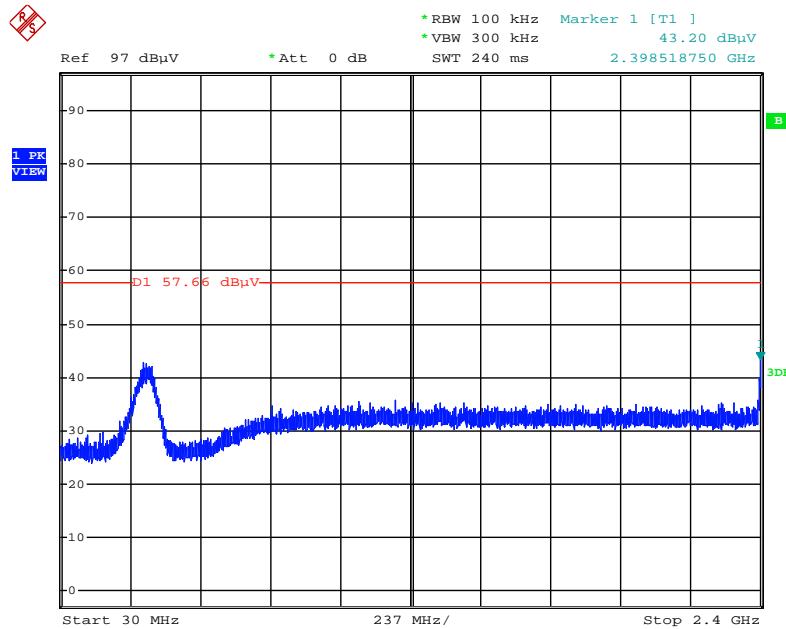


Date: 19.JUL.2016 23:16:13

**Plot on Configuration IEEE 802.11g / CH 1 / 2483.5MHz~26500MHz (down 30dBc)**

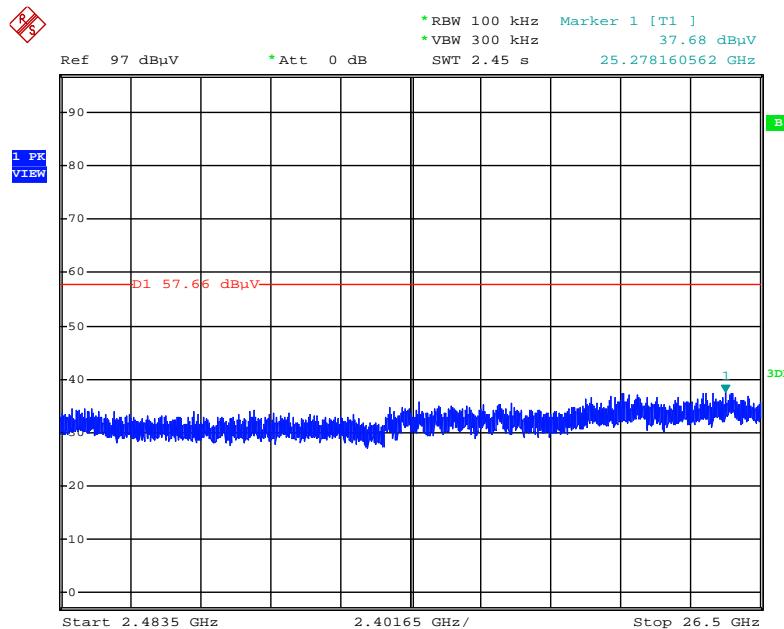


Date: 19.JUL.2016 23:19:20

**Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)**

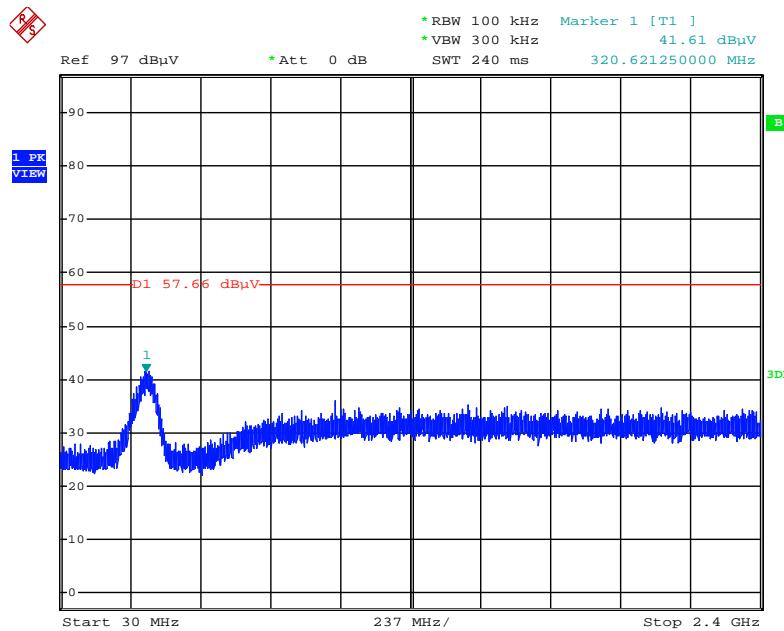


Date: 19.JUL.2016 23:20:13

**Plot on Configuration IEEE 802.11g / CH 11 / 2483.5MHz~26500MHz (down 30dBc)**

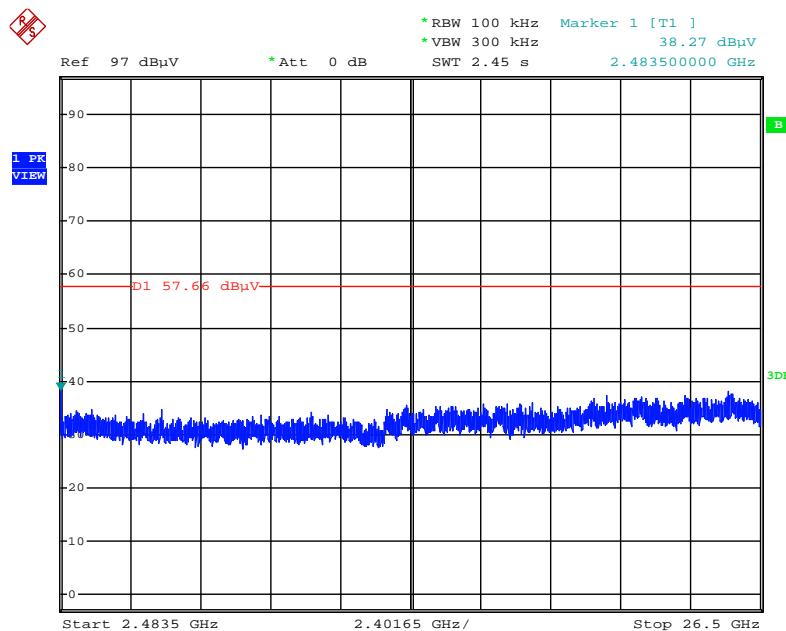


Date: 19.JUL.2016 23:20:48

### Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

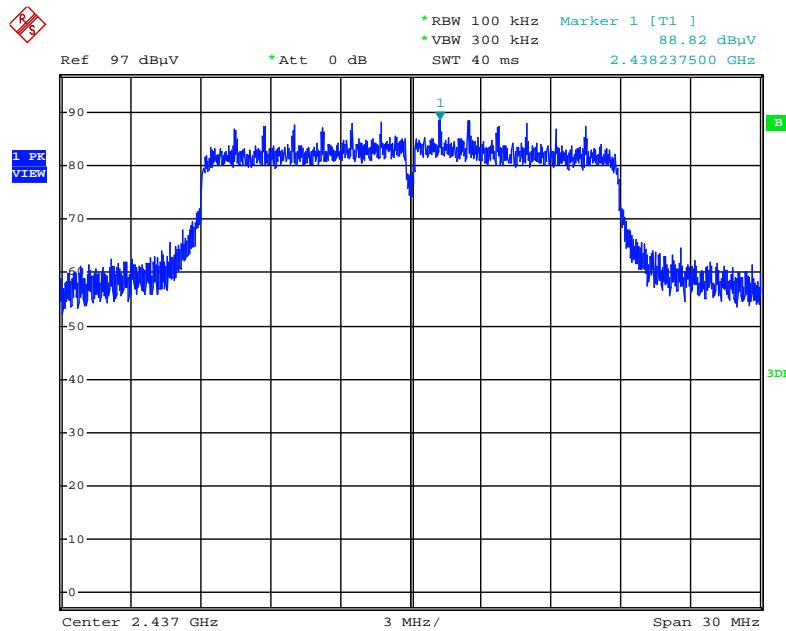


Date: 19.JUL.2016 23:22:19

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

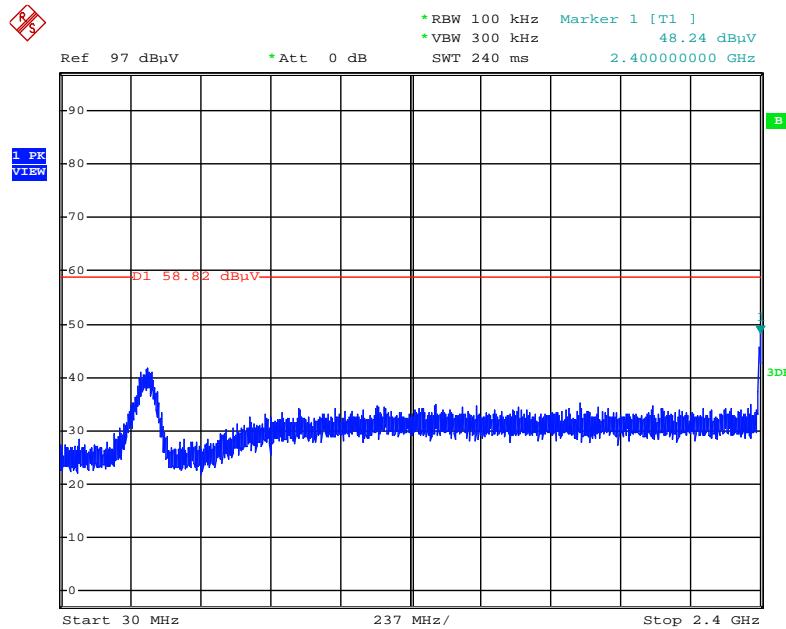


Date: 19.JUL.2016 23:23:32

**Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2483.5MHz~26500MHz (down 30dBc)**

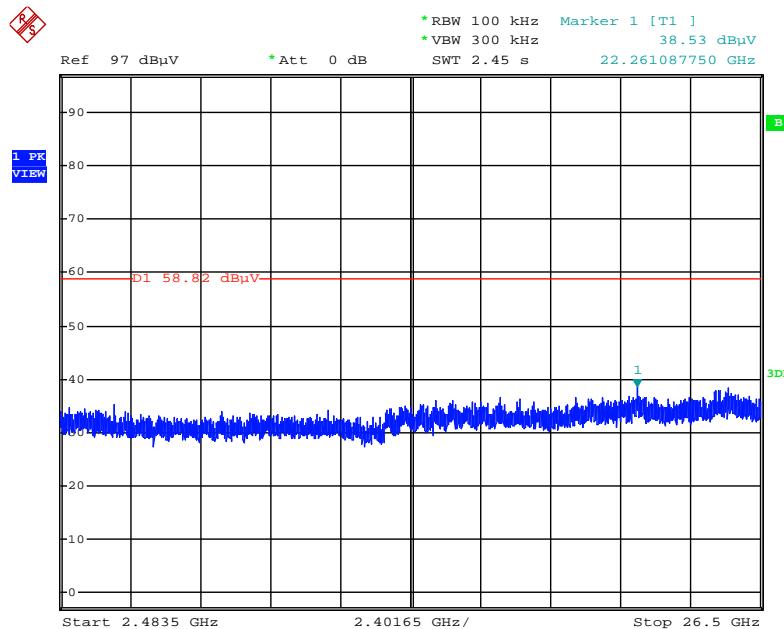


Date: 19.JUL.2016 23:24:06

**Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)**

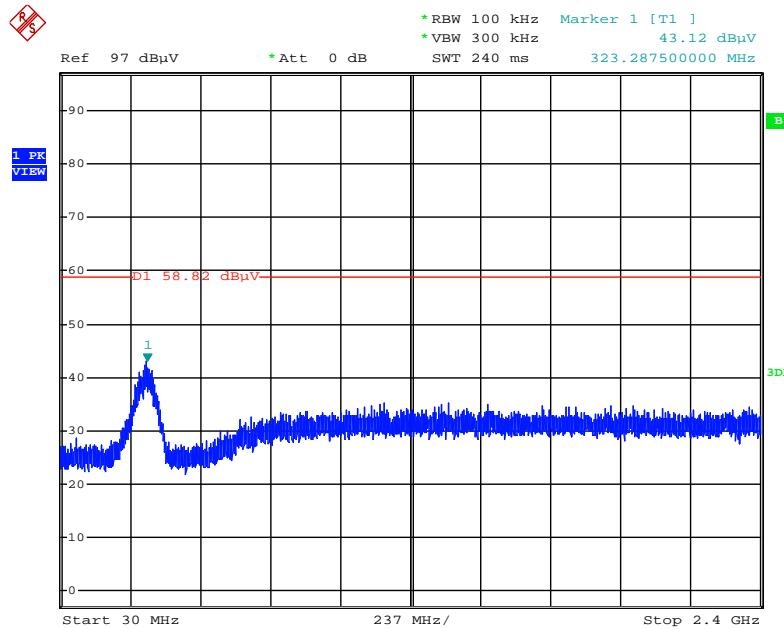

Date: 19.JUL.2016 23:24:41

**Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2483.5MHz~26500MHz (down 30dBc)**

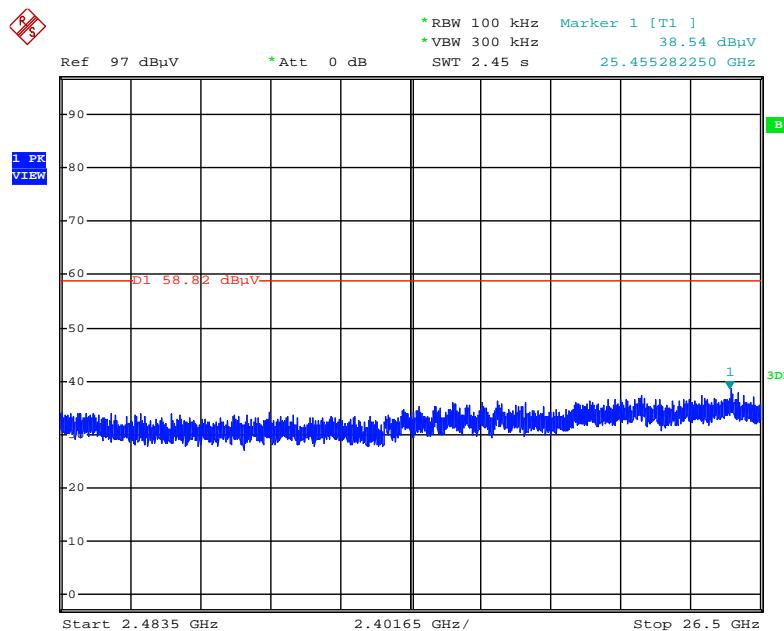

Date: 19.JUL.2016 23:25:10

## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
BILOG ANTENNA	TESEQ	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Mar. 01, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%