



TEST REPORT

No. 24T04N002718-006-WLAN 2G

For

Ademco Inc

Quicksilver wireless tablet

Model Name: PROWLTOUCH/PROWLTOUCHC/VISTAHTCHWLC

With

Hardware Version: Q1982_MB_V2

Software Version: GMTS700_Wireless_01.03.424.00025

FCC ID: CFS8DLPROWLTOUCH

IC: 573F-PROWLTOUCH

Issued Date: 2024-11-28

Designation Number: CN1210

ISED Assigned Code: 23289

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001

Email: yewu@caict.ac.cn, website: www.cszit.com

©Copyright. All rights reserved by SAICT



No. 24T04N002718-006-WLAN 2G

REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04N002718-006-WLAN 2G	Rev.0	1st edition	2024-11-28

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT.....	4
1.3. PROJECT DATA	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT	6
3.3. INTERNAL IDENTIFICATION OF AE	6
3.4. GENERAL DESCRIPTION.....	6
4. REFERENCE DOCUMENTS	7
4.1. DOCUMENTS SUPPLIED BY APPLICANT	7
4.2. REFERENCE DOCUMENTS FOR TESTING.....	7
5. TEST RESULTS	8
5.1. SUMMARY OF TEST RESULTS.....	8
5.2. STATEMENTS.....	8
5.3. TERMS USED IN THE RESULT TABLE	8
5.4. LABORATORY ENVIRONMENT.....	9
6. TEST FACILITIES UTILIZED	10
7. MEASUREMENT UNCERTAINTY	11
ANNEX A: DETAILED TEST RESULTS.....	12
A.0 ANTENNA REQUIREMENT	12
A.1 TEST CONFIGURATION	13
A.2 MAXIMUM OUTPUT POWER.....	14
A.3 PEAK POWER SPECTRAL DENSITY	15
A.4 6dB BANDWIDTH.....	20
A.5 BAND EDGES COMPLIANCE	25
A.6 CONDUCTED EMISSION.....	29
A.7 RADIATED EMISSION.....	34
A.8 AC POWER LINE CONDUCTED EMISSION	47
A.9 99% OCCUPIED BANDWIDTH.....	53
ANNEX B: SPOT CHECK OF TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	58

1. Test Laboratory

1.1. Testing Location

Location: Shenzhen Academy of Information and Communications Technology
Address: Building G, Shenzhen International Innovation Center, No.1006
Shennan Road, Futian District, Shenzhen, Guangdong Province,
China
Postal Code: 518026
Telephone: +86(0)755-33322000
Fax: +86(0)755-33322001


1.2. Testing Environment

Normal Temperature: 15-35℃
Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2019-07-02
Testing End Date: 2019-07-19

1.4. Signature



Lin Kanfeng
(Prepared this test report)



An Ran
(Reviewed this test report)



Zhang Bojun
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Ademco Inc
Address: 2 Corporate Center Drive Suite - 100 PO Box 9040 Melville, New York
11747, USA
Contact: Christian Fouth
Email: Christian.fouth@resideo.com
Tel.: 516-577-2000

2.2. Manufacturer Information

Company Name: Huaqin Telecom Techonology Co., Ltd.
Address: No.1 Building, No.9 Building, No. 399, Keyuan Road, Zhangjiang
Hi-tech Park, Shanghai, P.R. China
Contact: Stephanie Yin
Email: yinxuan@huaqin.com
Tel.: +86 19974076309

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Quicksilver wireless tablet
Model Name	PROWLTOUCH/PROWLTOUCHC/VISTAHTCHWLC
Brand Name	Honeywell home / Resideo
RF Protocol	IEEE 802.11 b/g/n-HT20
Operating Frequency	2412MHz~2462MHz
Number of Channels	11
Antenna Type	Integrated
Antenna Gain	0.15dBi
Power Supply	3.85V DC by Battery
FCC ID	CFS8DLPROWLTOUCH
IC	573F-PROWLTOUCH
Condition of EUT as received	No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer.

3.2. Internal Identification of EUT

EUT ID*	IMEI	HW Version	SW Version	Receive Date
EUT1	HK52400332	Q1982_MB_V2	GMTS700_Wireless_01.03.424.00025	2019-07-02

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	Mode	Manufacturer
AE1	Battery	P-504478	Dongguan Amperex Technology Limited
AE2	Charger	TPA-97050150U01	SHENZHEN TIANYIN ELECTRONICS CO., LTD

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of Quicksilver wireless tablet with integrated antenna and battery.

It consists of normal options: travel charger, USB cable and Phone.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

According to the customer's description, PROWLTOUCH/PROWLTOUCHC/VISTAHTCHWLC (24T04N002718) is a variant product of PROWLTOUCH/PROWLTOUCHC (I19N01349). All results were from the initial model.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz	2023
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
RSS-247	Spectrum Management and Telecommunications Radio Standards Specification Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices	Issue 3 August, 2023
RSS-Gen	Spectrum Management and Telecommunications Radio Standards Specification General Requirements for Compliance of Radio Apparatus	Issue 5 A2 February, 2021

5. Test Results

5.1. Summary of Test Results

No	Test cases	Sub-clause of Part 15C	Sub-clause of IC	Verdict
0	Antenna Requirement	15.203	/	P
1	Maximum Output Power	15.247 (b)	RSS-247 section 5.4	P
2	Peak Power Spectral Density	15.247 (e)	RSS-247 section 5.2	P
3	6dB Bandwidth	15.247 (a)	RSS-247 section 5.2	P
4	Band Edges Compliance	15.247 (d)	RSS-247 section 5.5	P
5	Conducted Emission	15.247 (d)	RSS-247 section 5.5/ RSS-Gen section 6.13	P
6	Radiated Emission	15.247, 15.205, 15.209	RSS-247 section 5.5/ RSS-Gen section 6.13	P
7	AC Power line Conducted	15.107, 15.207	RSS-Gen section 8.8	P
8	Occupied Bandwidth	/	RSS-Gen section 6.7	P

See **ANNEX A** for details.

5.2. Statements

SAICT has evaluated the test cases requested by the applicant/manufacture as listed in section 5.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

5.3. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
AFH	Adaptive Frequency Hopping
BW	Band Width
E.I.R.P.	equivalent isotropic radiated power
ISM	Industrial, Scientific and Medical
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter

5.4. Laboratory Environment

Semi-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014 MHz - 1 MHz, > 60 dB; 1 MHz - 1000 MHz, > 90 dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014 MHz - 1 MHz, > 60 dB; 1 MHz - 1000 MHz, > 90 dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014 MHz - 1MHz, > 60dB; 1 MHz - 1000 MHz, > 90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3m distance

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2020-01-16	1 year
2	Power Sensor	U2021XA	MY55430013	Agilent	2020-01-16	1 year
3	Data Acquisition	U2531A	TW55443507	Agilent	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Date	Calibration Period
1	LISN	ESH2-Z5	100196	R&S	2020-01-03	1 year
2	Test Receiver	ESCI	100701	R&S	2019-08-07	1 year
3	Loop Antenna	HLA6120	35779	TESEQ	2022-05-01	3 year
4	BiLog Antenna	VULB9163	9163 329	Schwarzbeck	2020-02-17	3 year
5	Horn Antenna	3117	00066585	ETS-Lindgren	2022-03-04	3 year
6	Test Receiver	ESR7	101675	R&S	2020-07-18	1 year
7	Spectrum Analyzer	FSP 40	100378	R&S	2019-12-13	1 year
8	Chamber	FACT5-2.0	4166	ETS-Lindgren	2021-05-12	3 year
9	Antenna	QSH-SL-1 8-26-S-20	17013	Q-par	2020-01-15	3 year
10	Antenna	QSH-SL-2 6-40-K-20	17014	Q-par	2020-01-11	3 year

Test software

No.	Equipment	Manufacturer	Version
1	TechMgr Software	CAICT	2.1.1
2	EMC32	Rohde & Schwarz	8.53.0
3	EMC32	Rohde & Schwarz	10.01.00

EUT is engineering software provided by the customer to control the transmitting signal. The EUT was programmed to be in continuously transmitting mode.

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren

7. Measurement Uncertainty

Test Name	Uncertainty	
1. RF Output Power - Conducted	$\pm 1.32\text{dB}$	
2. Power Spectral Density - Conducted	$\pm 2.32\text{dB}$	
3. Occupied channel bandwidth - Conducted	$\pm 66\text{Hz}$	
4 Transmitter Spurious Emission - Conducted	$30\text{MHz} \leq f \leq 1\text{GHz}$	$\pm 1.41\text{dB}$
	$1\text{GHz} \leq f \leq 7\text{GHz}$	$\pm 1.92\text{dB}$
	$7\text{GHz} \leq f \leq 13\text{GHz}$	$\pm 2.31\text{dB}$
	$13\text{GHz} \leq f \leq 26\text{GHz}$	$\pm 2.61\text{dB}$
5. Transmitter Spurious Emission - Radiated	$9\text{kHz} \leq f \leq 30\text{MHz}$	$\pm 1.84\text{dB}$
	$30\text{MHz} \leq f \leq 1\text{GHz}$	$\pm 4.90\text{dB}$
	$1\text{GHz} \leq f \leq 18\text{GHz}$	$\pm 5.12\text{dB}$
	$18\text{GHz} \leq f \leq 40\text{GHz}$	$\pm 4.66\text{dB}$
6. AC Power line Conducted Emission	$150\text{kHz} \leq f \leq 30\text{MHz}$	$\pm 3.10\text{dB}$

ANNEX A: Detailed Test Results

A.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.


Conclusion: The Directional gains of antenna used for transmitting is 0.15dBi. The RF transmitter uses an integrate antenna without connector.

A.1 Test Configuration

A.1.1 Conducted Measurements


The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values.



A.1.2 Radiated Measurements

Test setup: EUT was placed on a 1.5 meter high non-conductive table at a 3 meter test distance from the receive antenna. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiving antenna polarization.

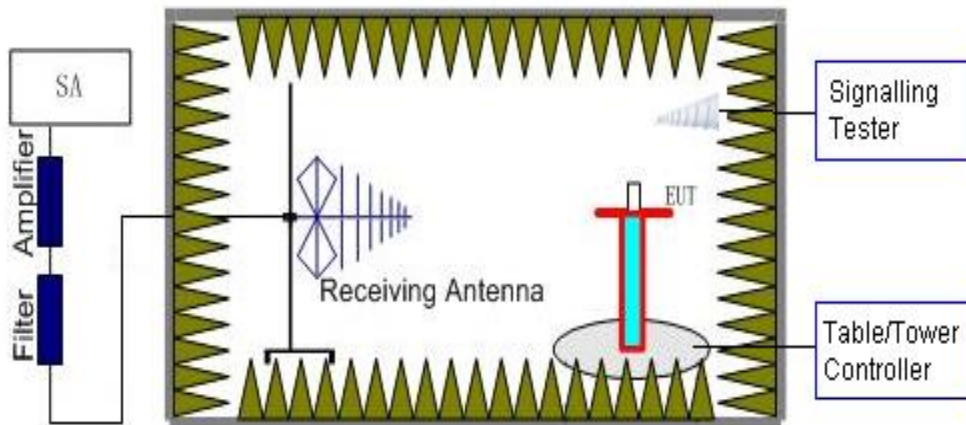

A.2 Maximum Output Power

Measurement of method :See ANSI C63.10-Clause 11.9.2.3.2

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Measurement Limit:

Standard	Limit (dBm)	E.I.R.P Limit (dBm)
FCC CRF Part 15.247(b) & RSS-247 section 5.4	< 30	< 36

Measurement Results:

Mode	Channel	Frequency (MHz)	Average Conducted Power (dBm)	E.I.R.P (dBm)	Conclusion
802.11b	CH 1	2412	15.71	15.86	P
	CH 6	2437	15.52	15.67	P
	CH 11	2462	15.35	15.50	P
802.11g	CH 1	2412	13.87	14.02	P
	CH 6	2437	13.74	13.89	P
	CH 11	2462	13.51	13.66	P
802.11n HT20	CH 1	2412	12.01	12.16	P
	CH 6	2437	11.85	12.00	P
	CH 11	2462	11.63	11.78	P

Note: E.I.R.P value = Conducted values (with conducted samples) + Antenna Gain.

Note: Worst-case data rates as provided by the client were: 1Mbps (802.11b), 6Mbps (802.11g), MCS0 (802.11n). The following cases and test graphs are performed with this condition. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

A.3 Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(e) & RSS-247 section 5.2	< 8 dBm/3 kHz

Measurement Results:

Mode	Channel	Frequency (MHz)	Test Results (dBm)		Conclusion
802.11b	CH 1	2412	Fig.1	-9.90	P
	CH 6	2437	Fig.2	-9.25	P
	CH 11	2462	Fig.3	-9.62	P
802.11g	CH 1	2412	Fig.4	-13.25	P
	CH 6	2437	Fig.5	-12.95	P
	CH 11	2462	Fig.6	-13.25	P
802.11n HT20	CH 1	2412	Fig.7	-15.51	P
	CH 6	2437	Fig.8	-14.99	P
	CH 11	2462	Fig.9	-15.51	P

See below for test graphs.

Conclusion: PASS

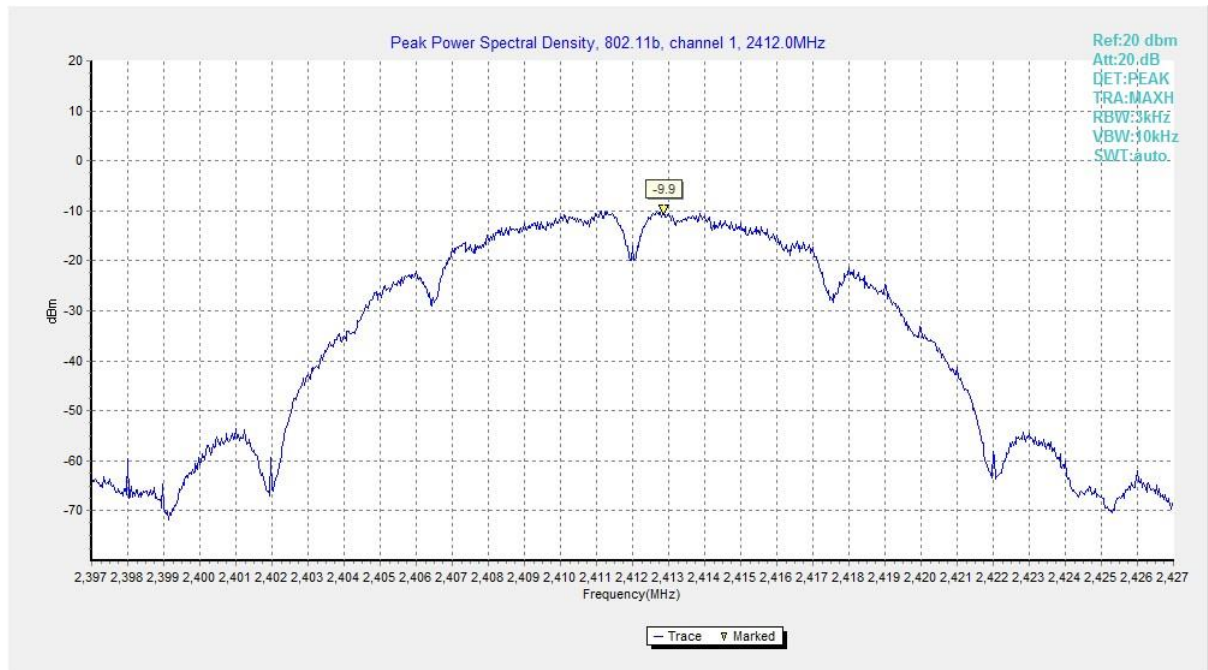


Fig.1 Power Spectral Density (802.11b, CH 1)

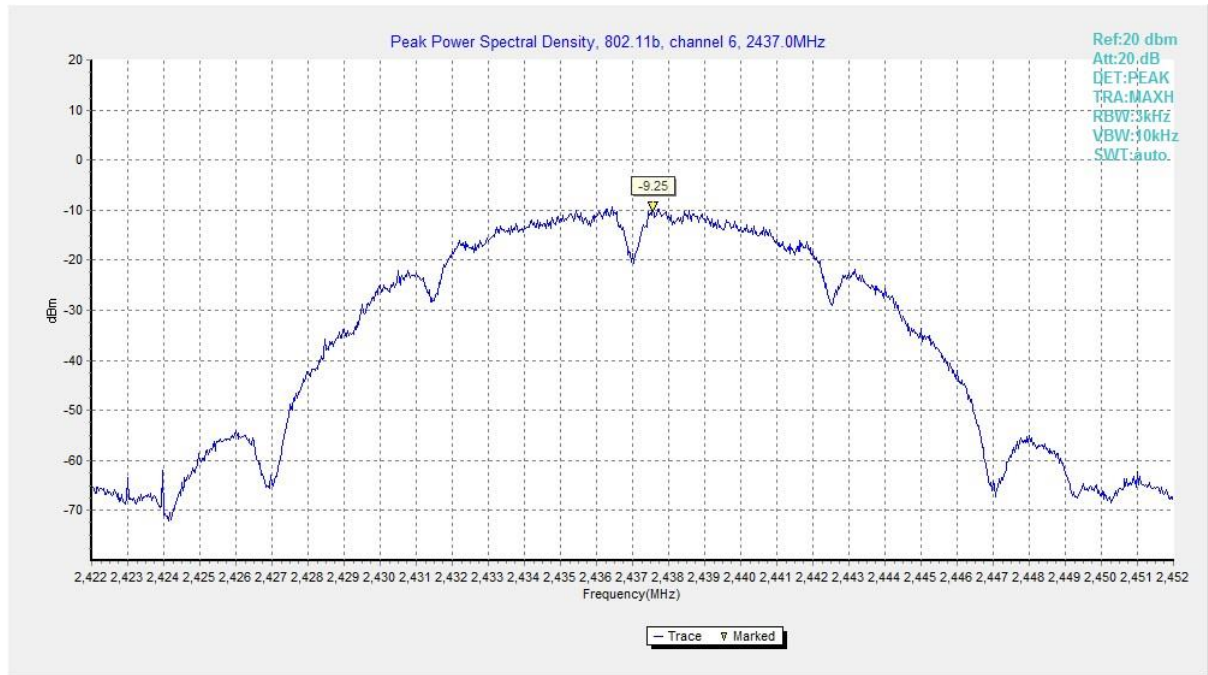


Fig.2 Power Spectral Density (802.11b, CH 6)



Fig.3 Power Spectral Density (802.11b, CH 11)

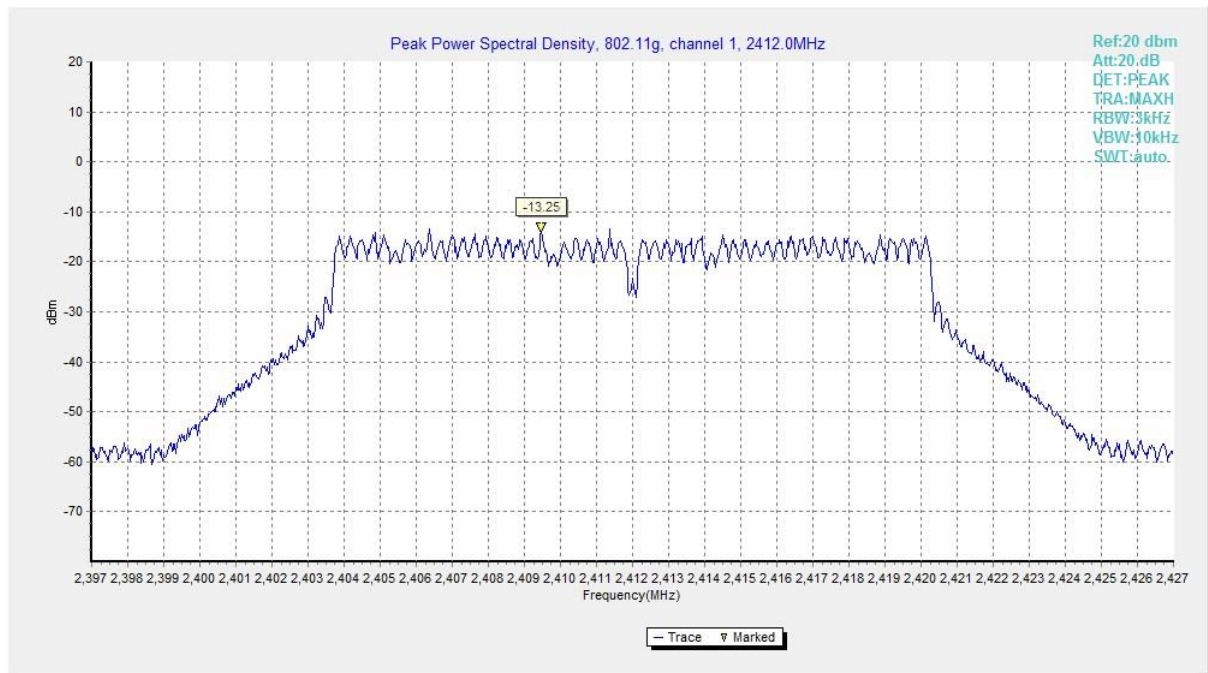


Fig.4 Power Spectral Density (802.11g, CH 1)

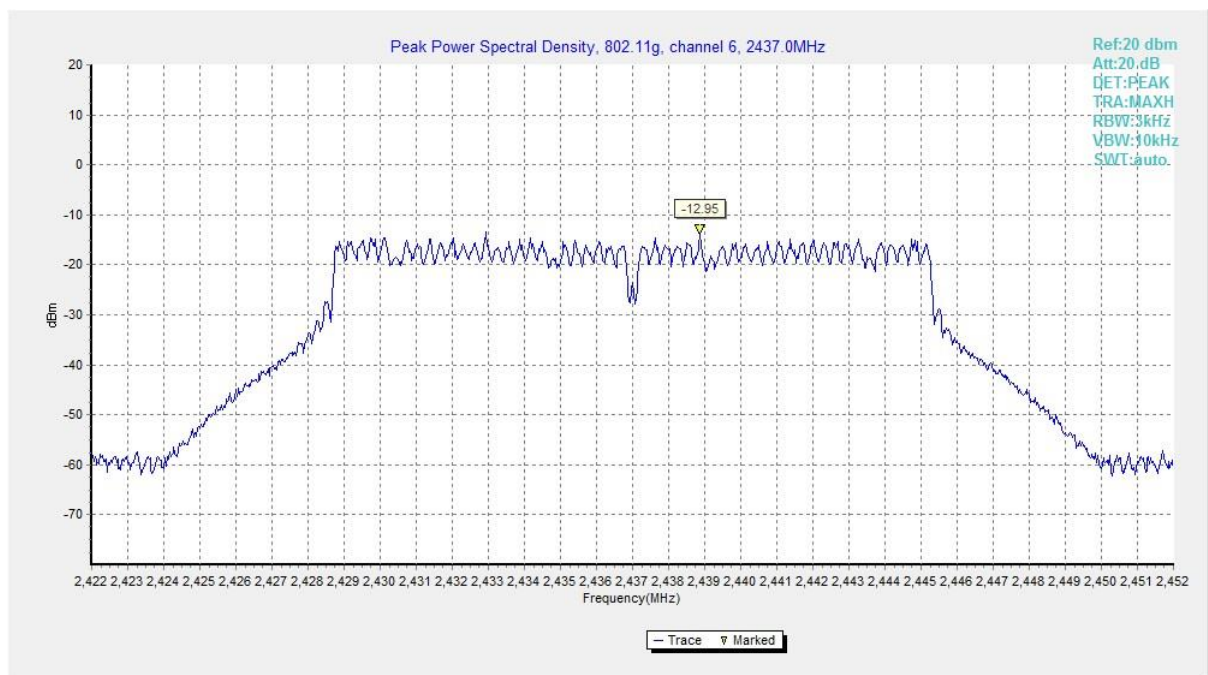


Fig.5 Power Spectral Density (802.11g, CH 6)

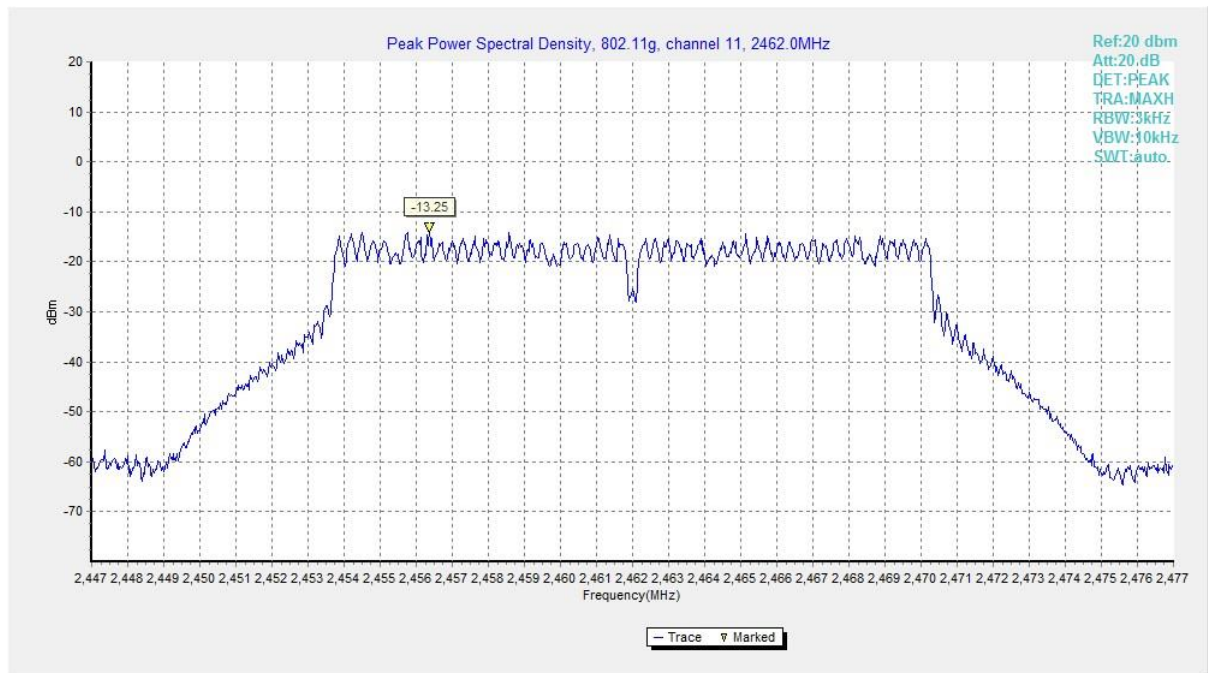


Fig.6 Power Spectral Density (802.11g, CH 11)

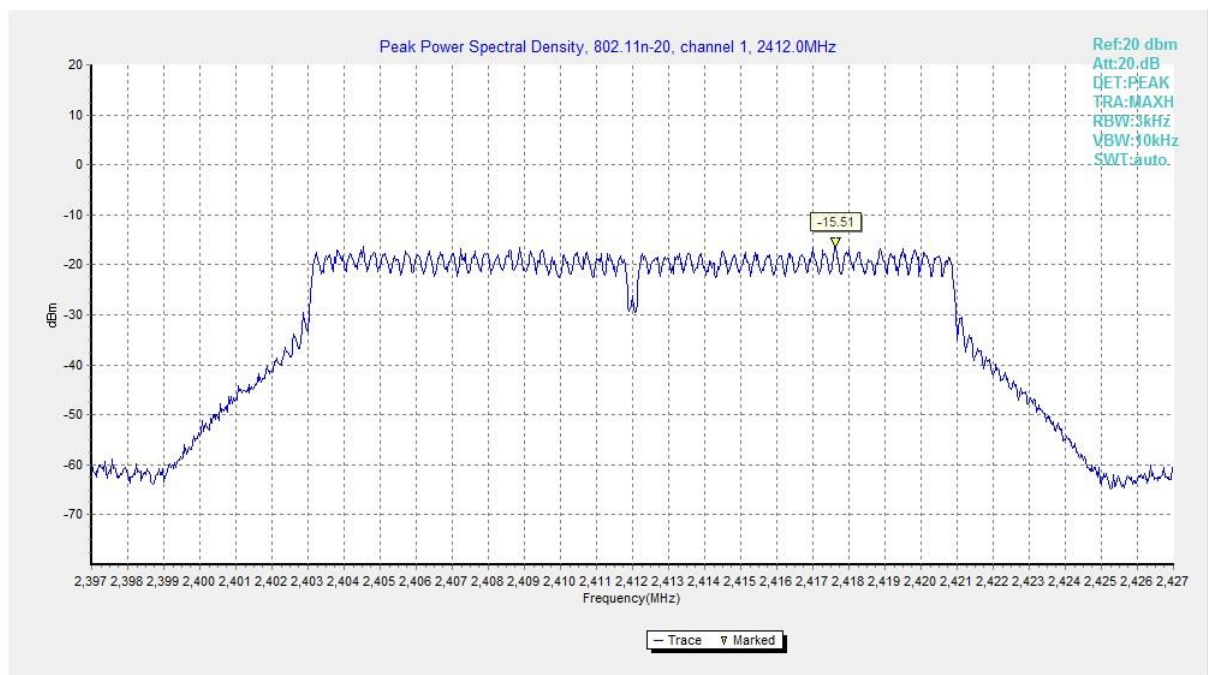


Fig.7 Power Spectral Density (802.11n HT20, CH 1)

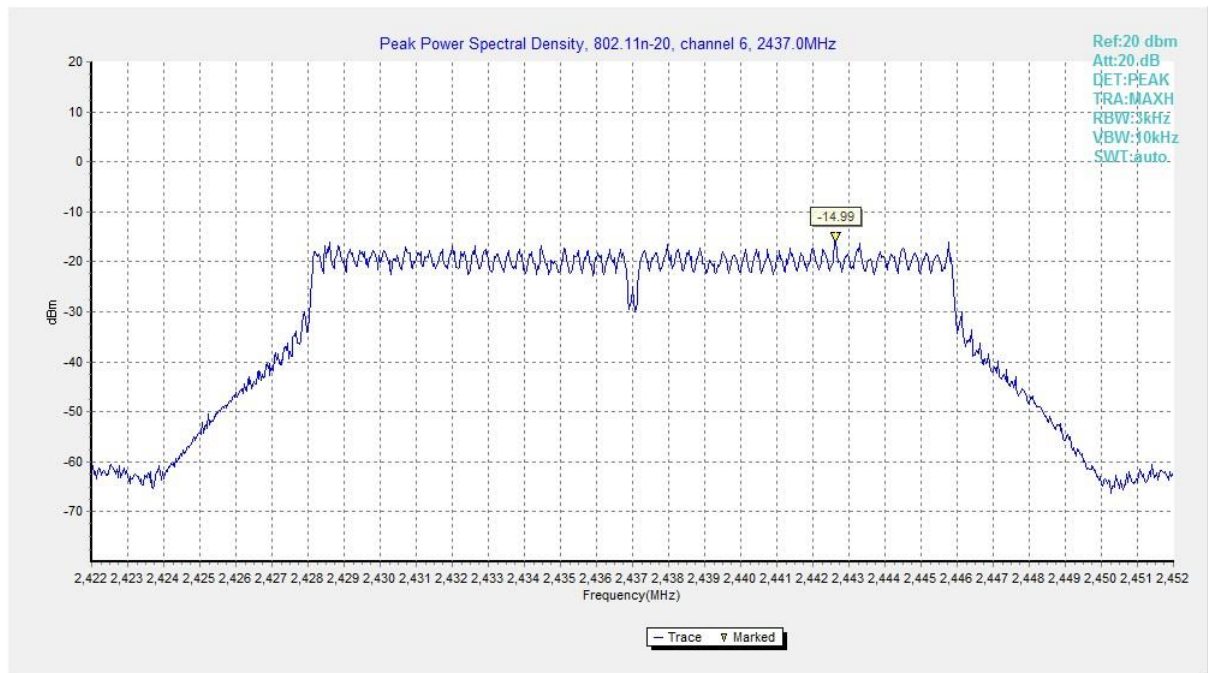


Fig.8 Power Spectral Density (802.11n HT20, CH 6)

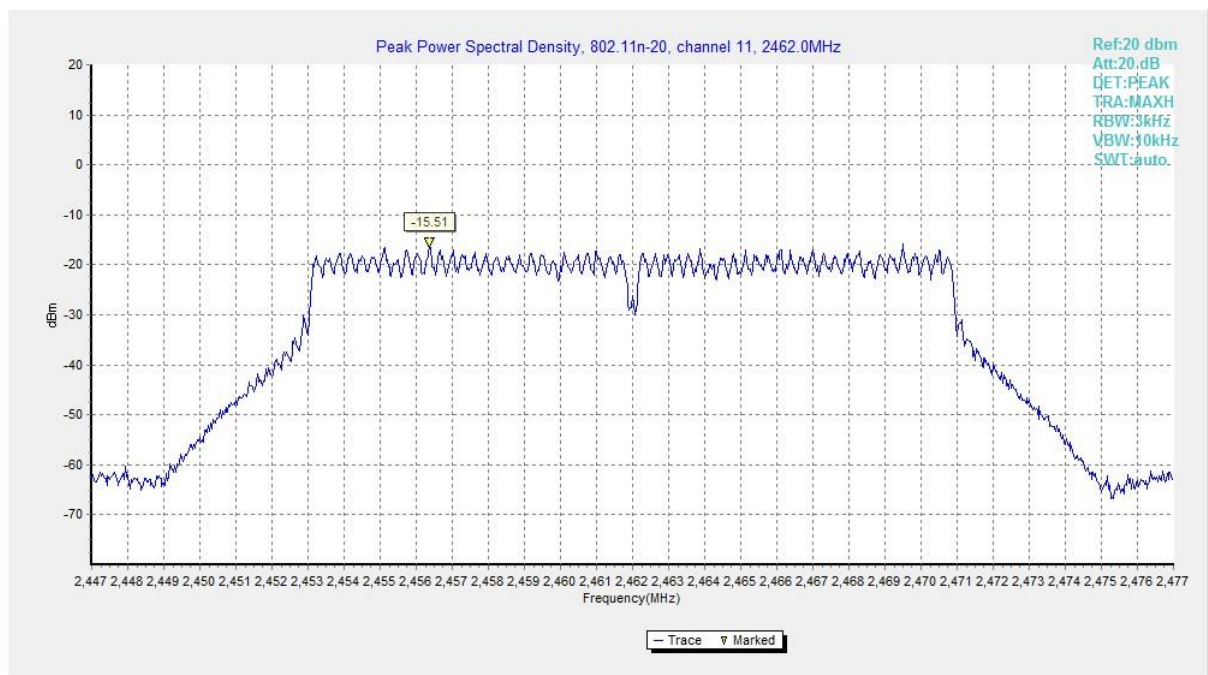


Fig.9 Power Spectral Density (802.11n HT20, CH 11)

A.4 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a) & RSS-247 section 5.2	≥ 500

Measurement Result:

Mode	Channel	Frequency (MHz)	Test Results (kHz)		Conclusion
802.11b	CH 1	2412	Fig.10	8550	P
	CH 6	2437	Fig.11	8550	P
	CH 11	2462	Fig.12	8550	P
802.11g	CH 1	2412	Fig.13	16350	P
	CH 6	2437	Fig.14	16300	P
	CH 11	2462	Fig.15	16350	P
802.11n HT20	CH 1	2412	Fig.16	17550	P
	CH 6	2437	Fig.17	17600	P
	CH 11	2462	Fig.18	17600	P

See below for test graphs.

Conclusion: PASS

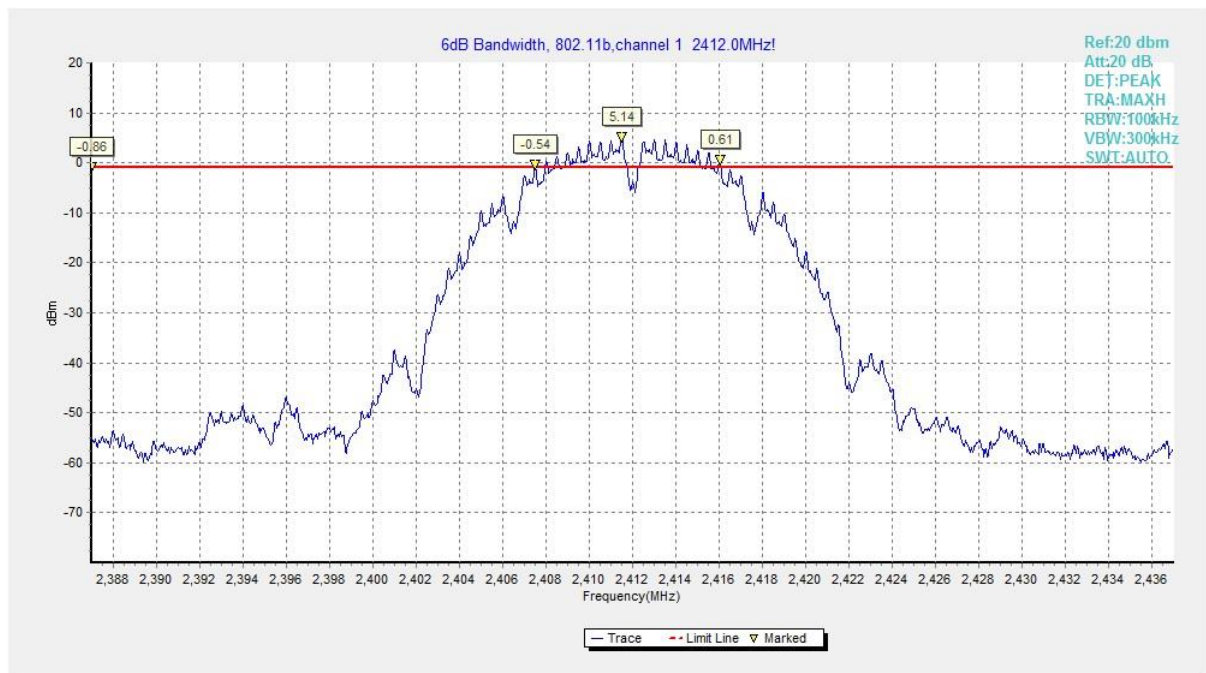


Fig.10 6dB Bandwidth (802.11b, CH 1)

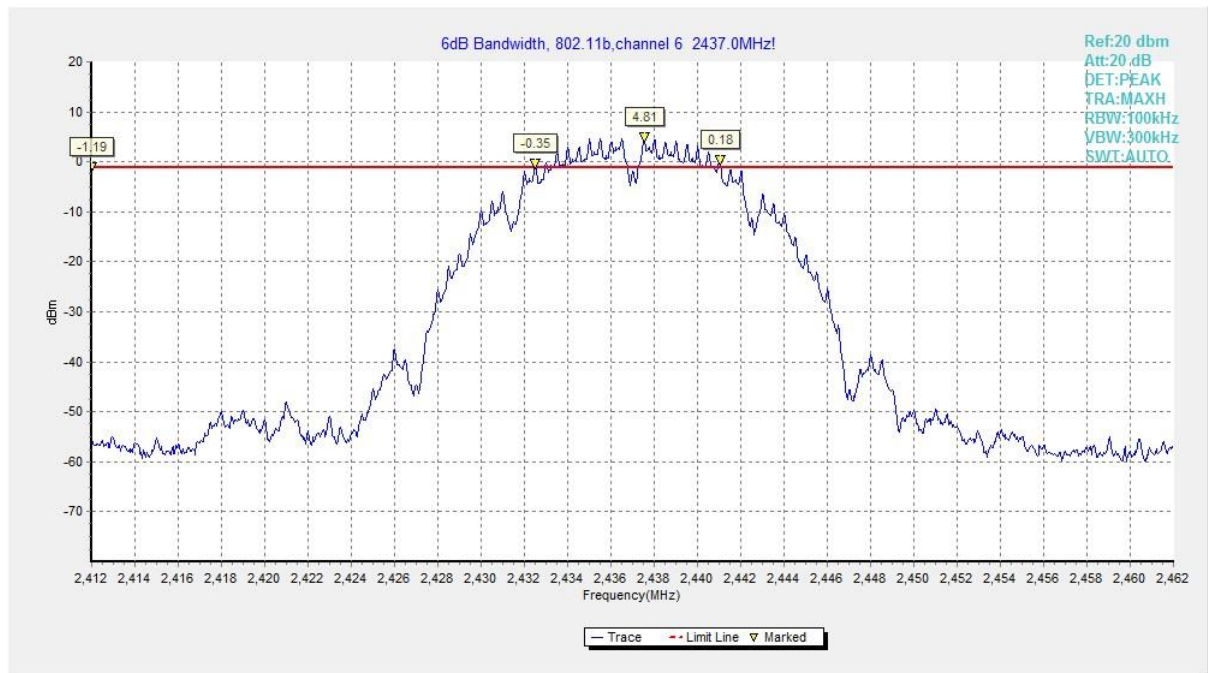


Fig.11 6dB Bandwidth (802.11b, CH 6)

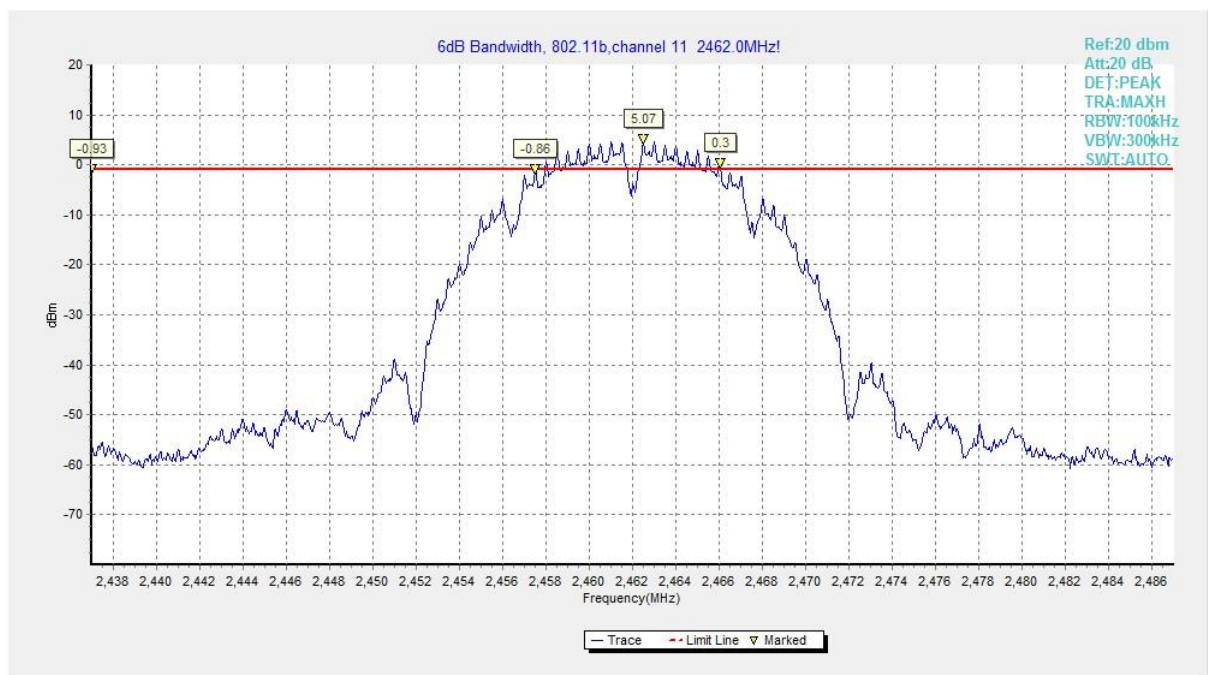


Fig.12 6dB Bandwidth (802.11b, CH 11)

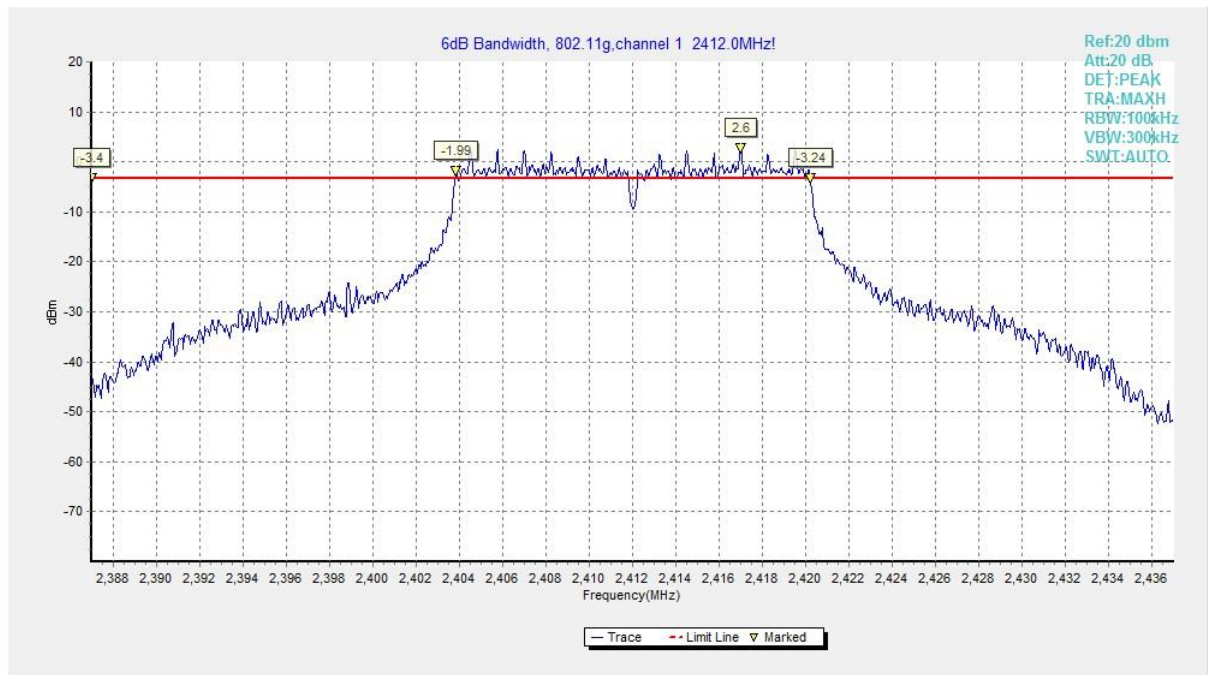


Fig.13 6dB Bandwidth (802.11g, CH 1)

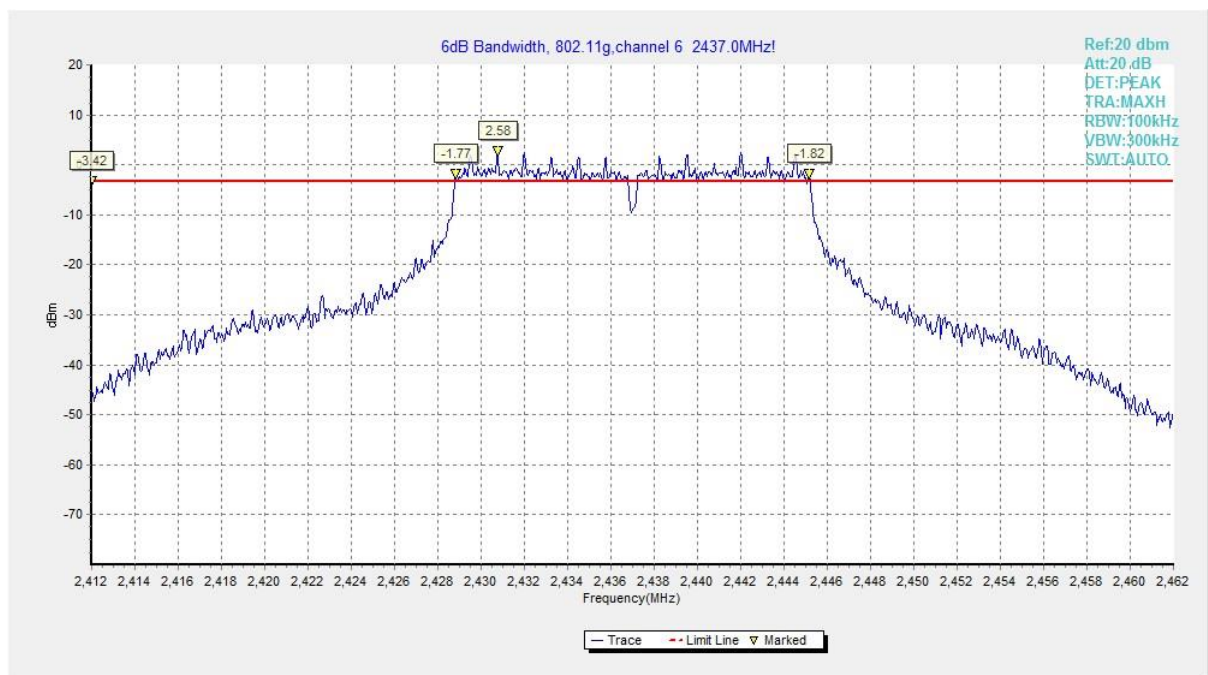


Fig.14 6dB Bandwidth (802.11g, CH 6)

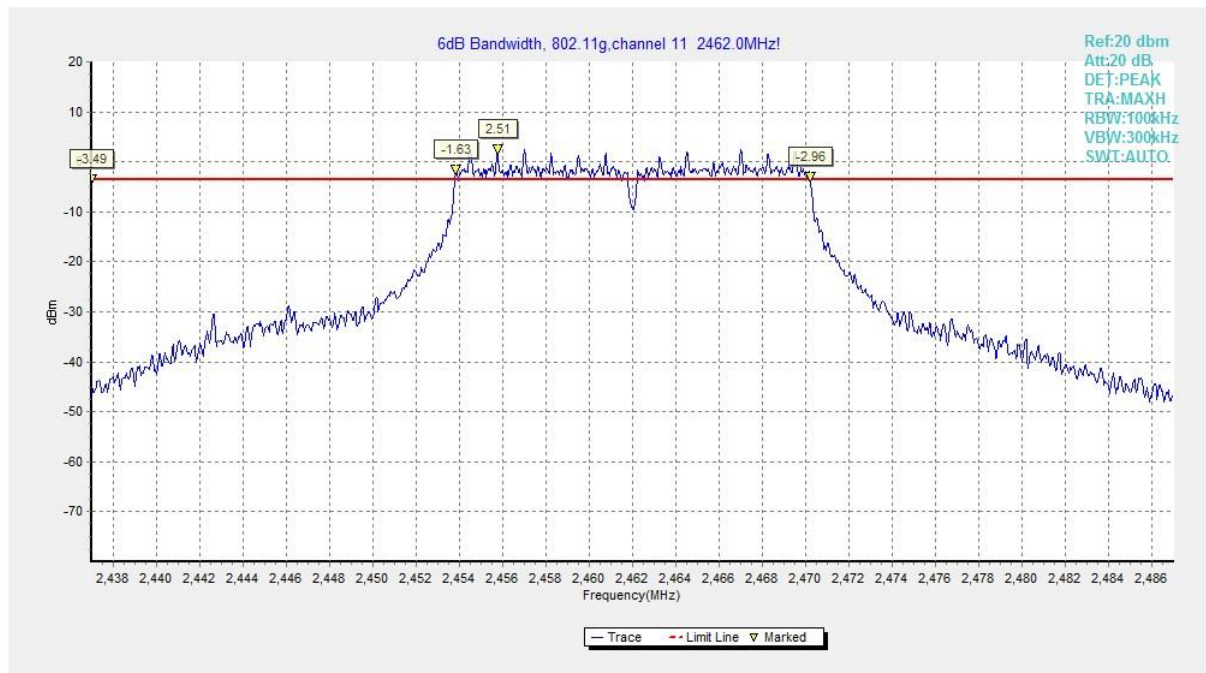


Fig.15 6dB Bandwidth (802.11g, CH 11)

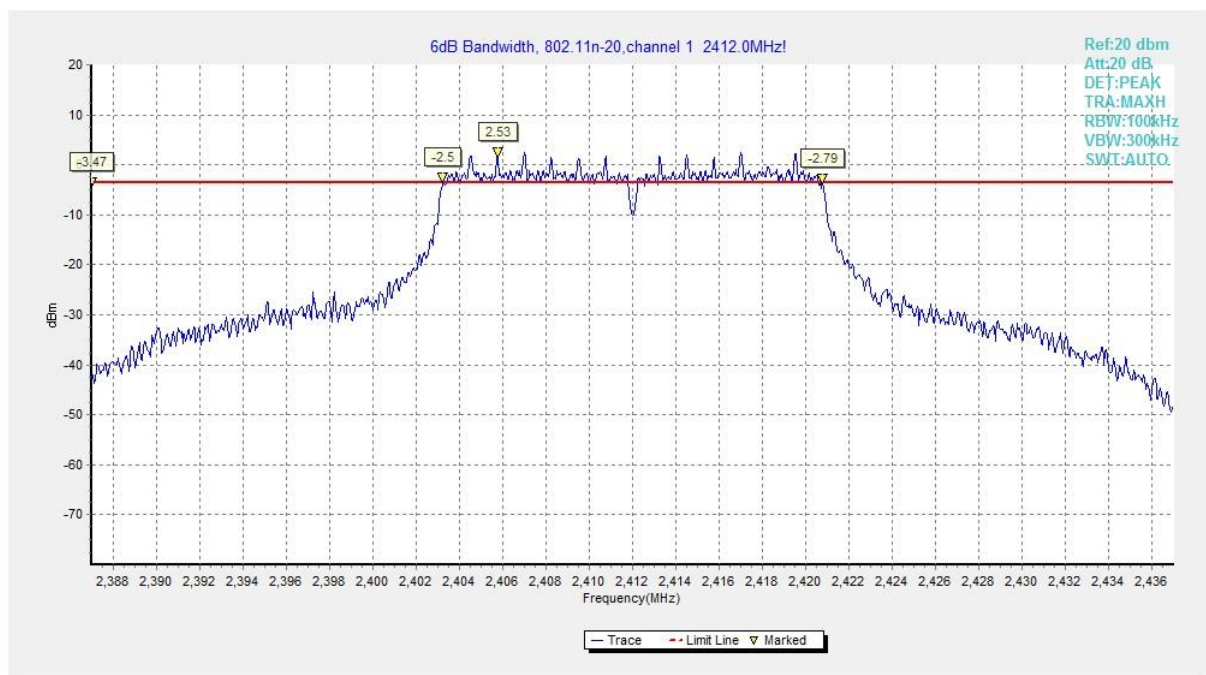


Fig.16 6dB Bandwidth (802.11n HT20, CH 1)

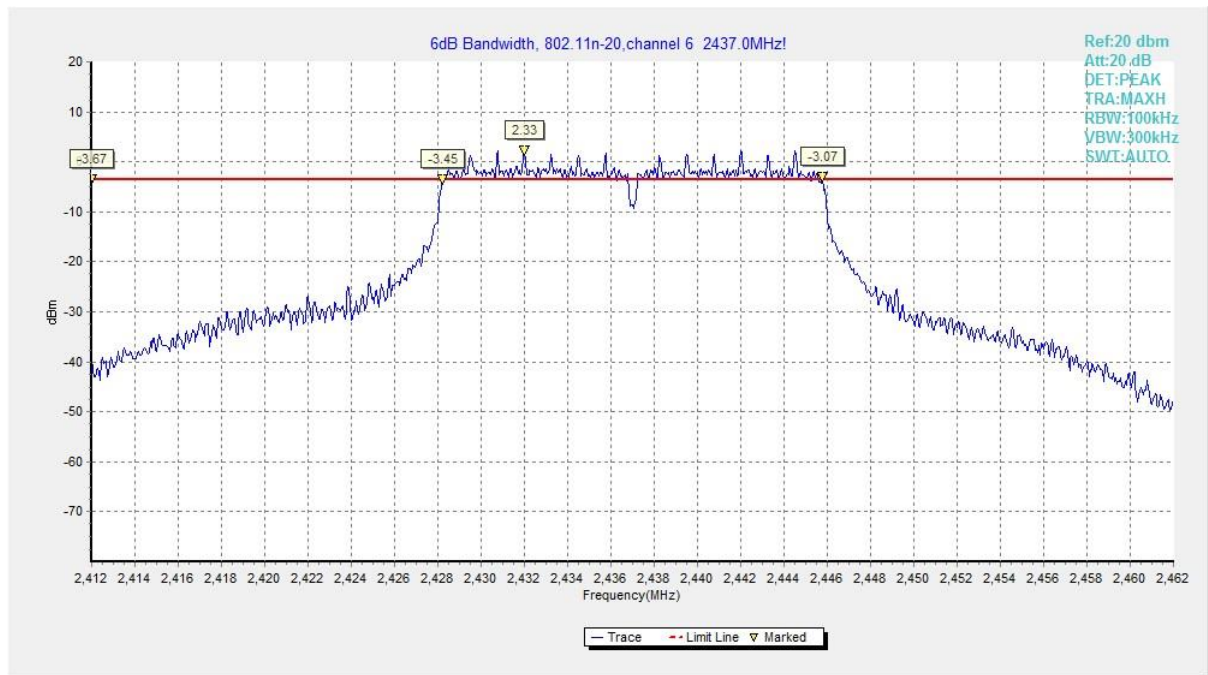


Fig.17 6dB Bandwidth (802.11n HT20, CH 6)

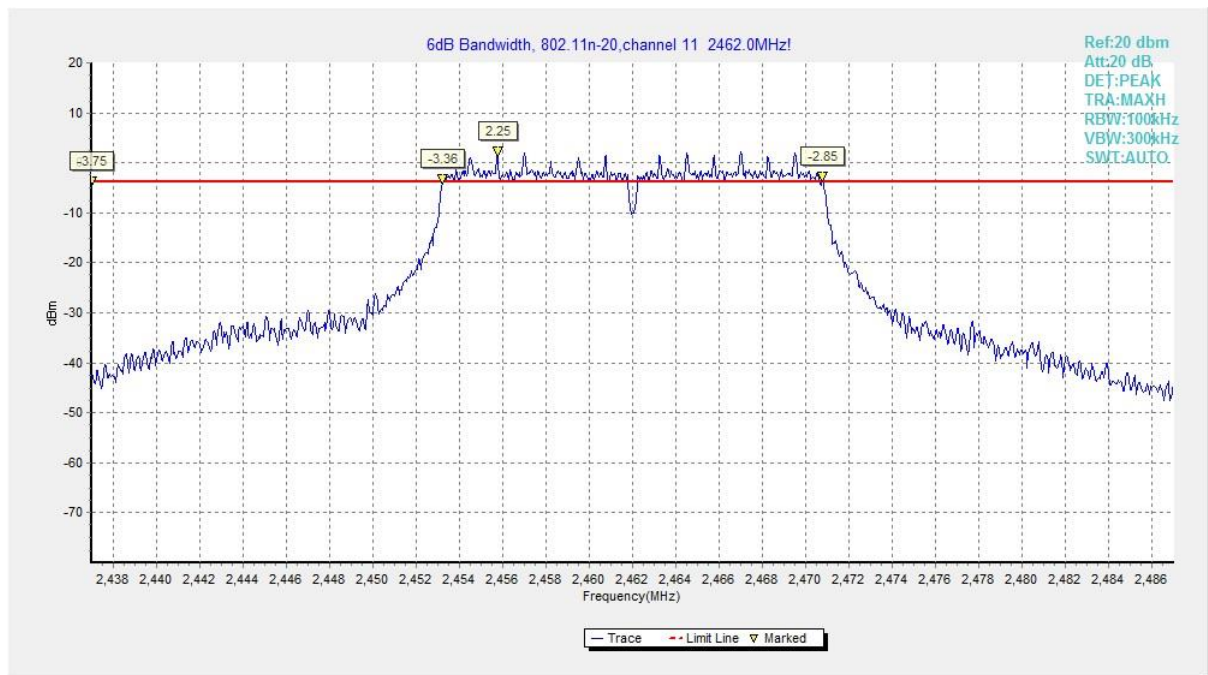


Fig.18 6dB Bandwidth (802.11n HT20, CH 11)

A.5 Band Edges Compliance

Measurement Limit:

Standard	Limit (dB)
FCC 47 CFR Part 15.247 (d) & RSS-247 section 5.5	> 20

Measurement Result:

Mode	Channel	Frequency (MHz)	Test Results (dB)		Conclusion
802.11b	CH1	2412	Fig.19	52.00	P
	CH11	2462	Fig.20	61.68	P
802.11g	CH1	2412	Fig.21	29.78	P
	CH11	2462	Fig.22	43.28	P
802.11n HT20	CH1	2412	Fig.23	30.05	P
	CH11	2462	Fig.24	43.56	P

See below for test graphs.

Conclusion: PASS

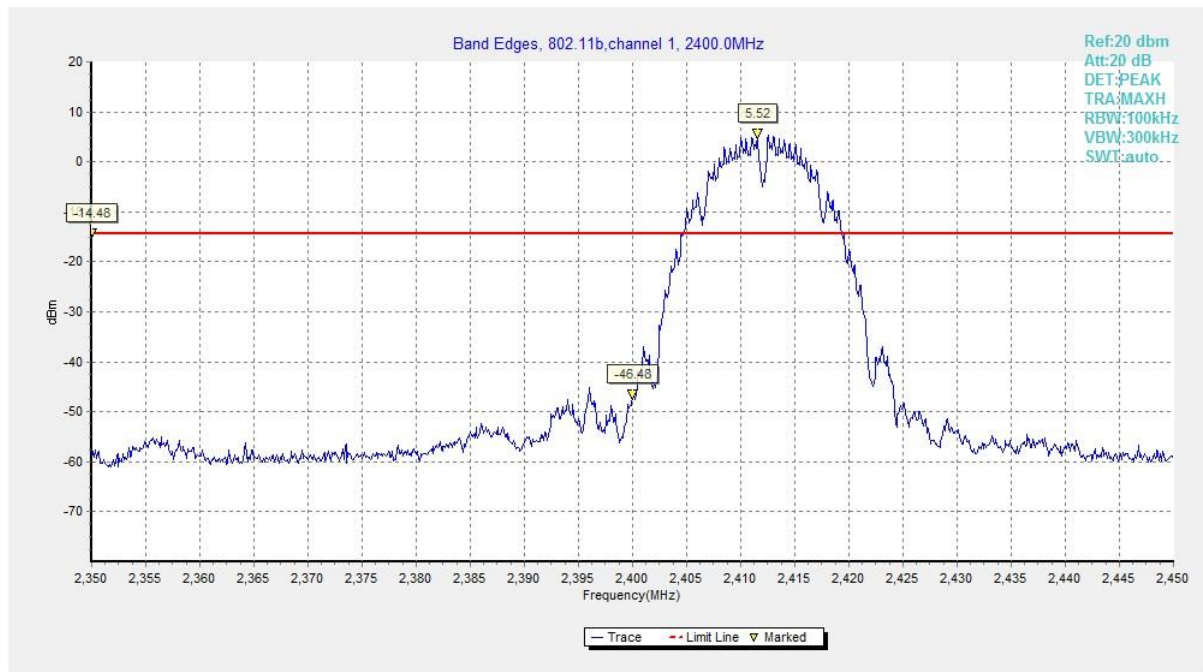


Fig.19 Band Edges (802.11b, CH 1)

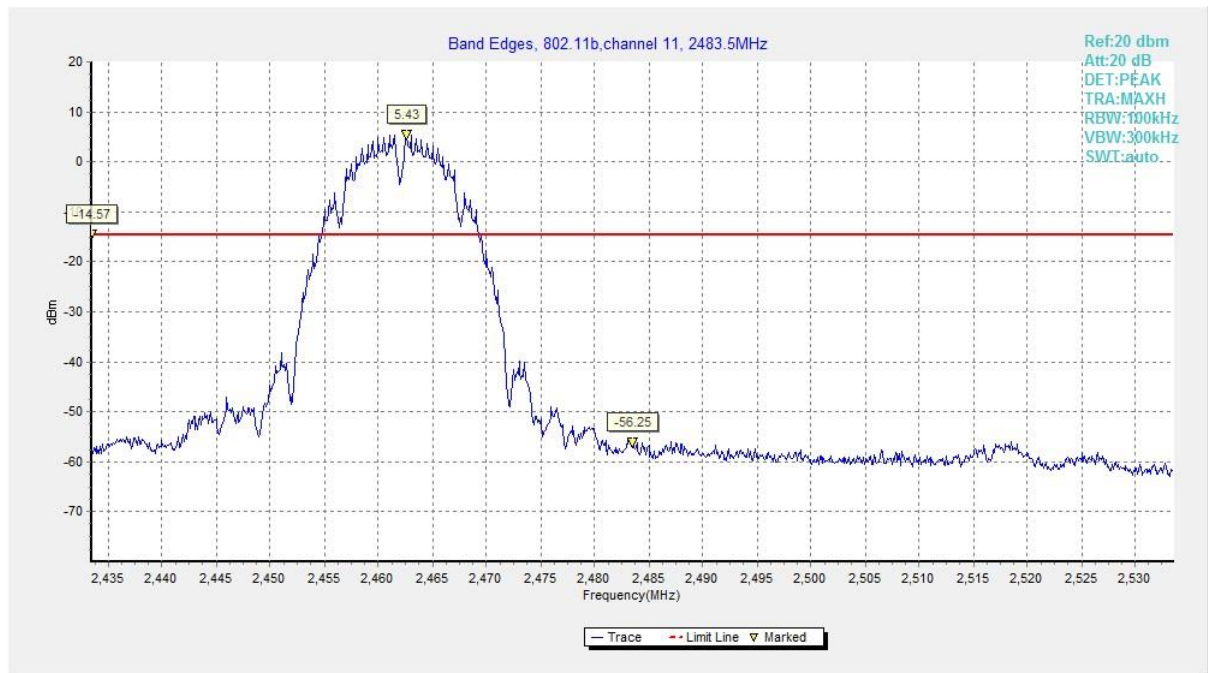


Fig.20 Band Edges (802.11b, CH 11)

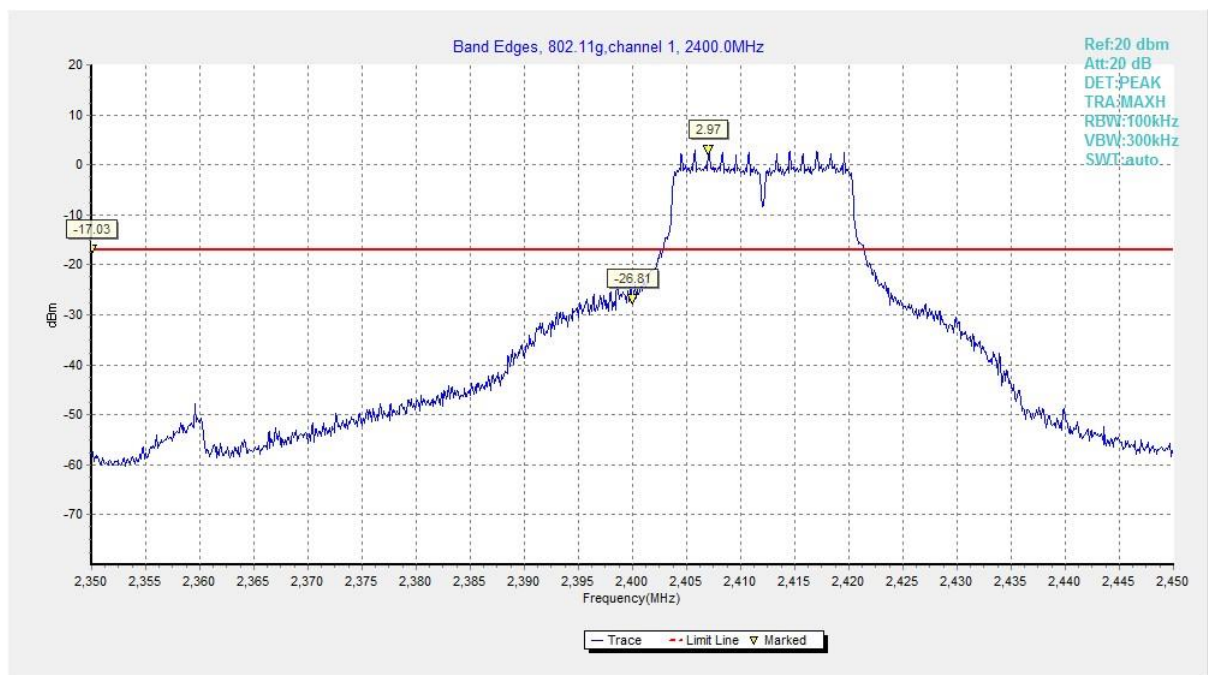


Fig.21 Band Edges (802.11g, CH 1)

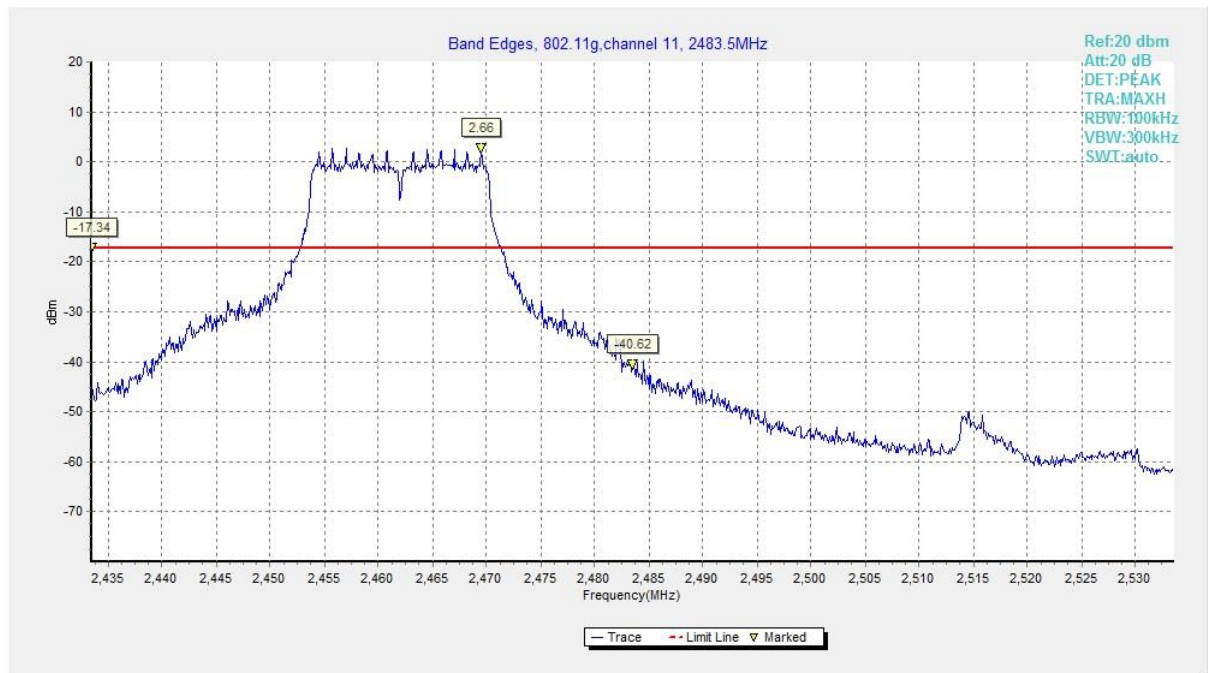


Fig.22 Band Edges (802.11g, CH 11)

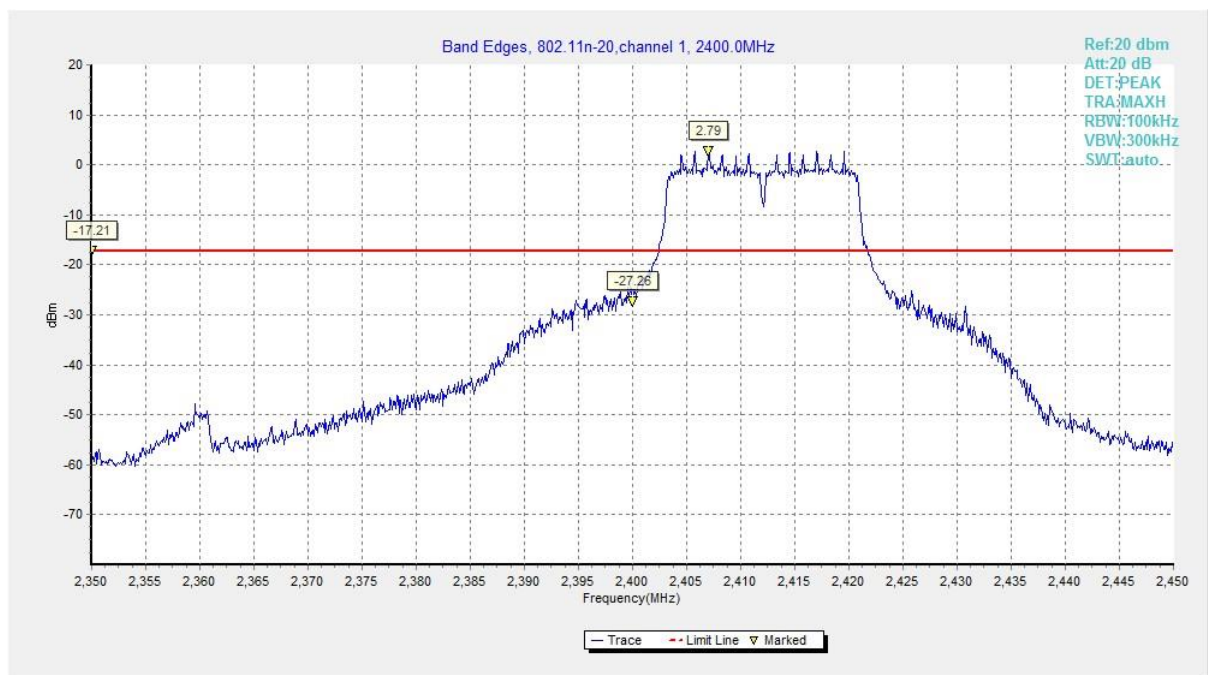


Fig.23 Band Edges (802.11n HT20, CH 1)

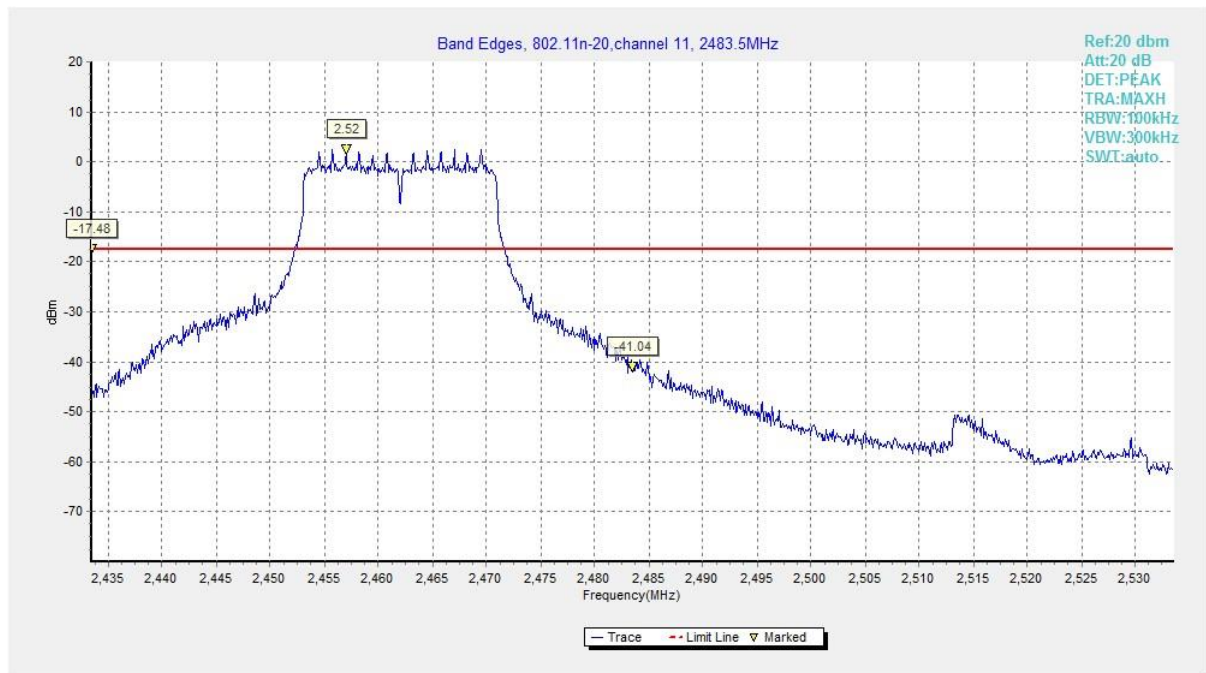


Fig.24 Band Edges (802.11n HT20, CH 11)

A.6 Conducted Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d) & RSS-247 section 5.5/ RSS-Gen section 6.13	30dB below peak output power in 100kHz bandwidth

Measurement Results:

Mode	Channel	Frequency (MHz)	Frequency Range	Test Results	Conclusion
802.11b	CH 1	2412	30MHz-26GHz	Fig.25	P
	CH 6	2437	30MHz-26GHz	Fig.26	P
	CH 11	2462	30MHz-26GHz	Fig.27	P
802.11g	CH 1	2412	30MHz-26GHz	Fig.28	P
	CH 6	2437	30MHz-26GHz	Fig.29	P
	CH 11	2462	30MHz-26GHz	Fig.30	P
802.11n HT20	CH 1	2412	30MHz-26GHz	Fig.31	P
	CH 6	2437	30MHz-26GHz	Fig.32	P
	CH 11	2462	30MHz-26GHz	Fig.33	P

See below for test graphs.

Conclusion: PASS

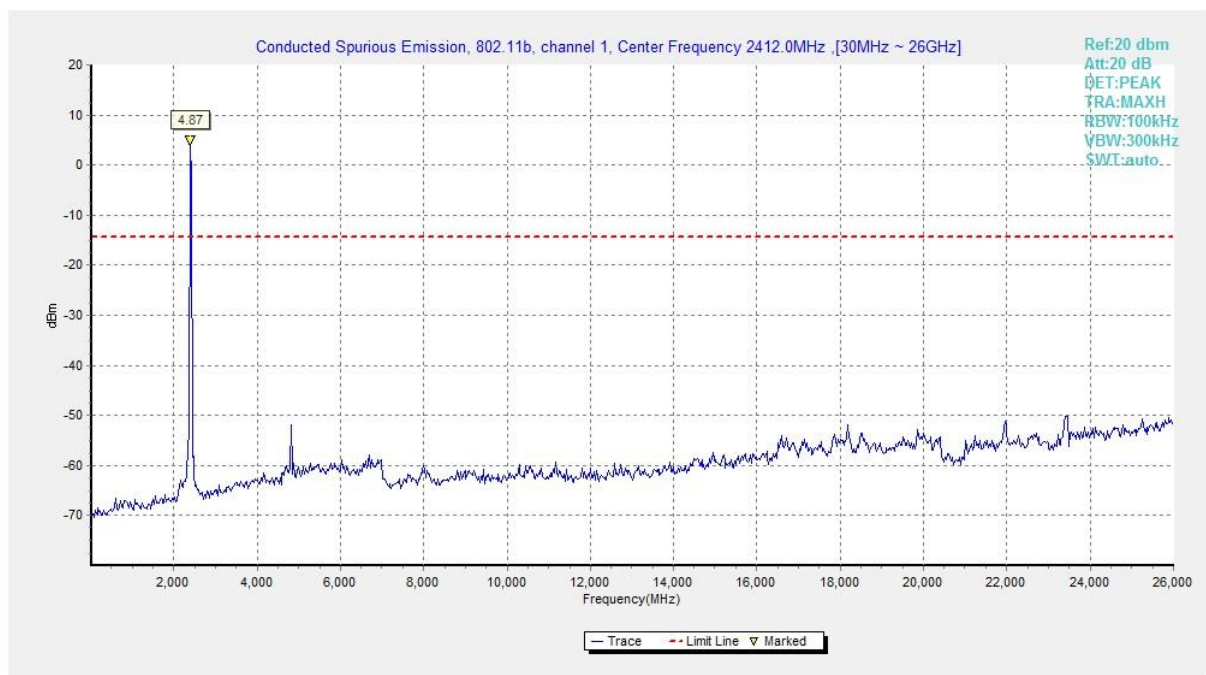


Fig.25 Conducted Spurious Emission (802.11b, CH1)

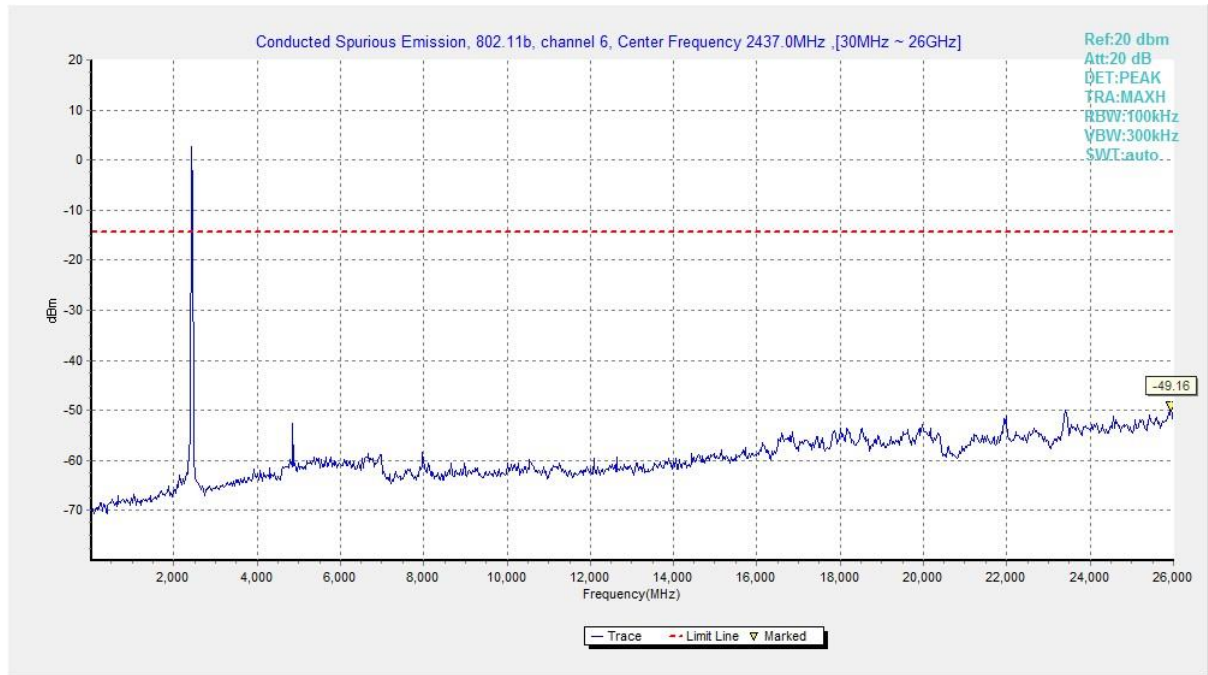


Fig.26 Conducted Spurious Emission (802.11b, CH6)

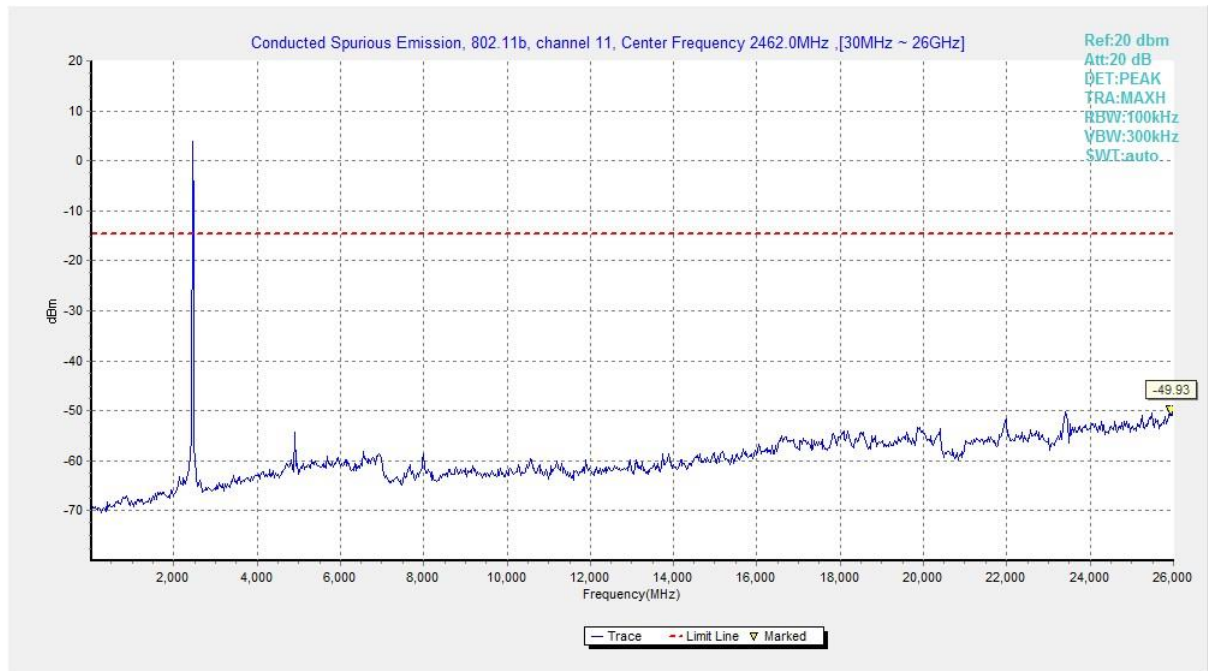


Fig.27 Conducted Spurious Emission (802.11b, CH11)

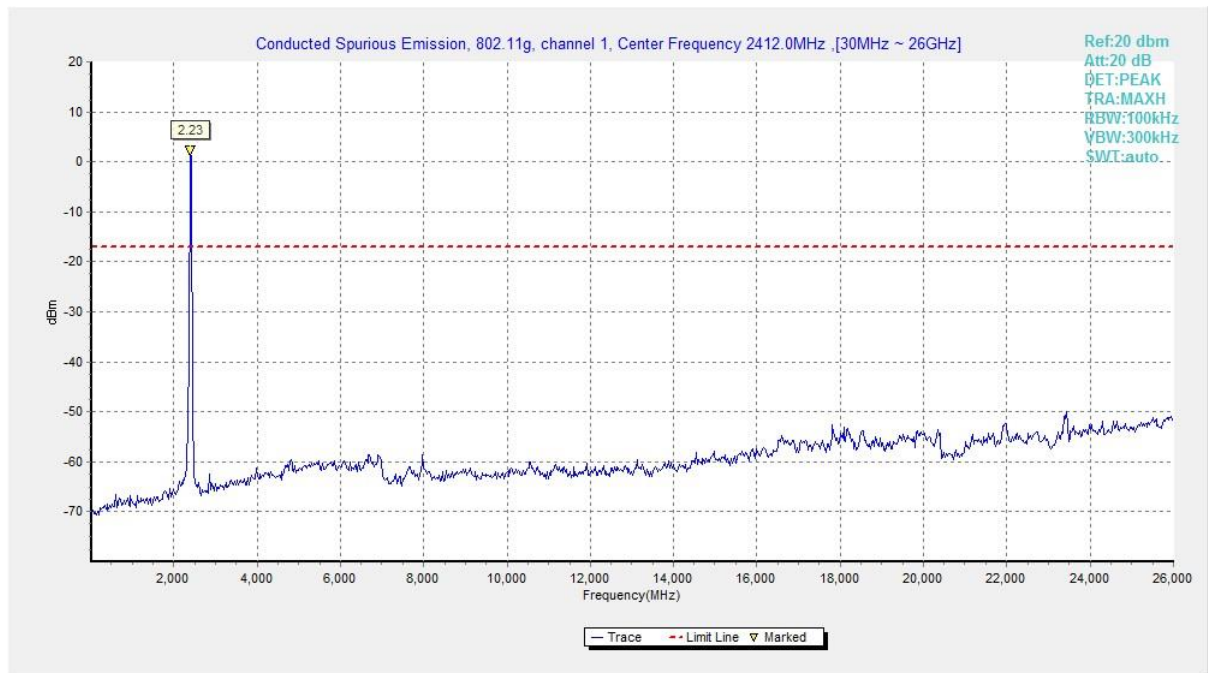


Fig.28 Conducted Spurious Emission (802.11g, CH1)

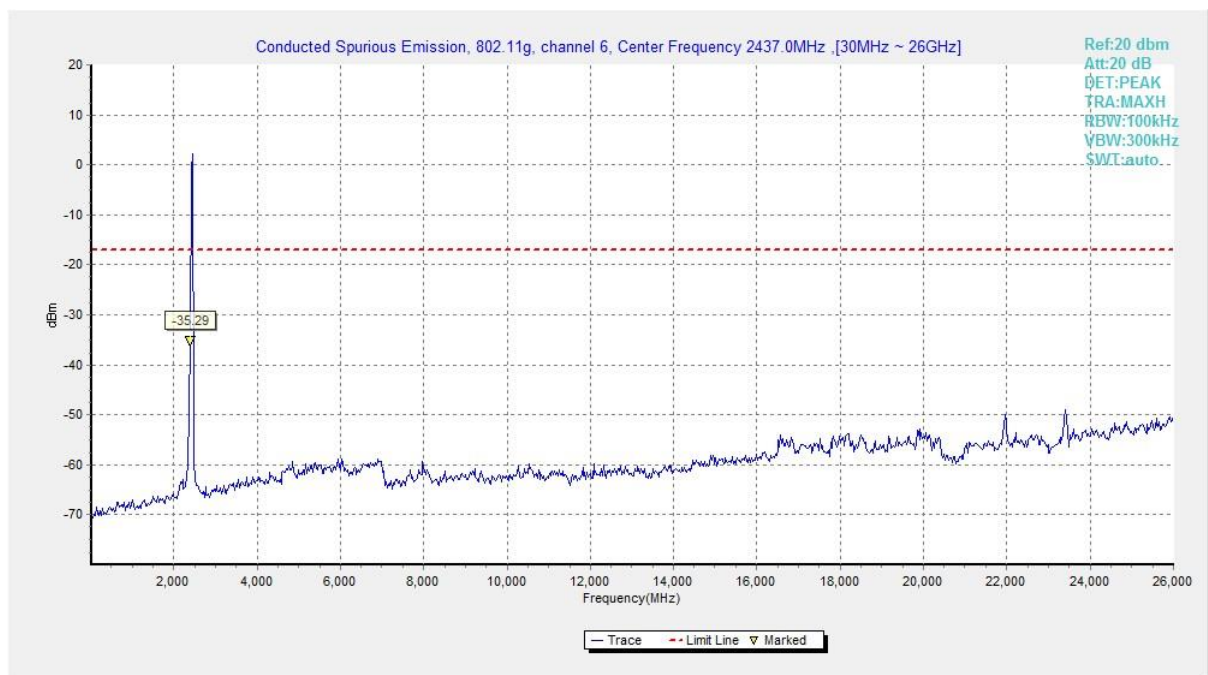


Fig.29 Conducted Spurious Emission (802.11g, CH6)

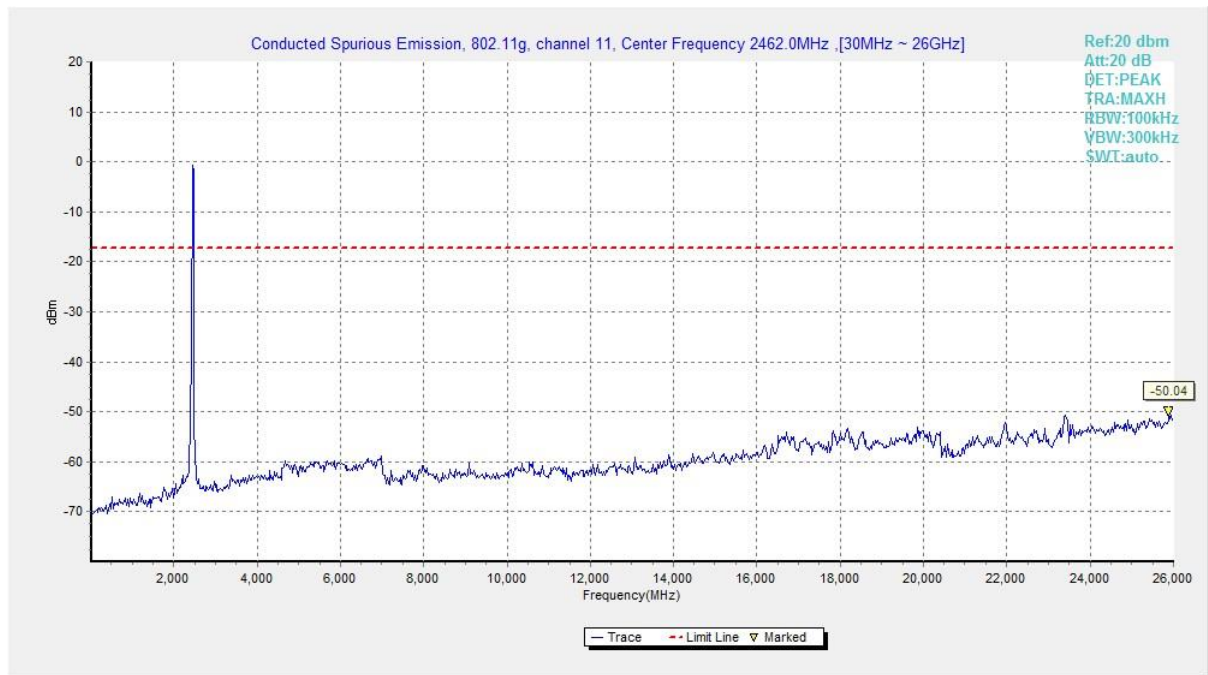


Fig.30 Conducted Spurious Emission (802.11g, CH11)

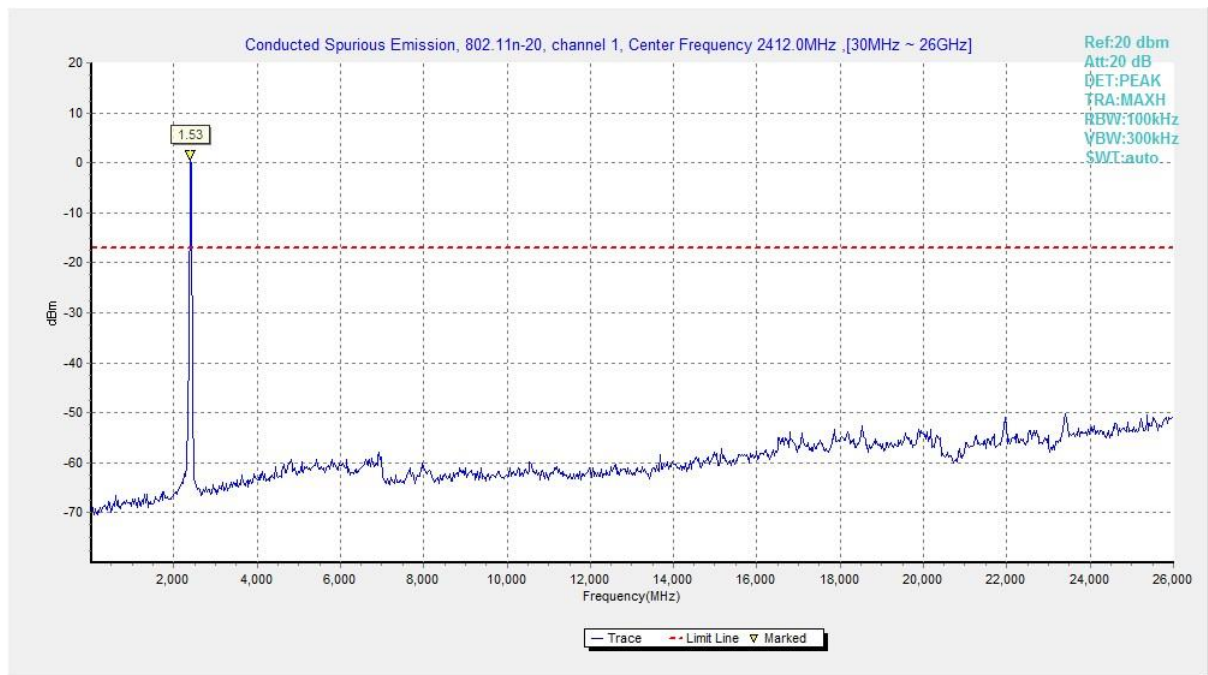


Fig.31 Conducted Spurious Emission (802.11n HT20, CH1)

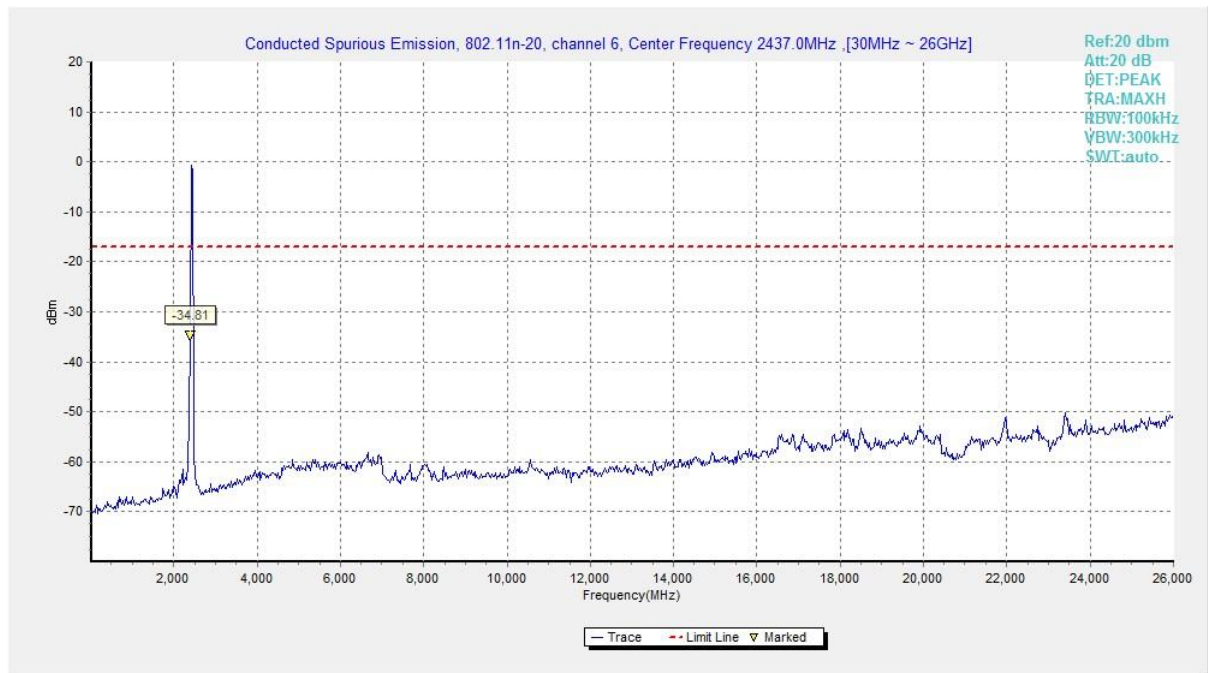


Fig.32 Conducted Spurious Emission (802.11n HT20, CH6)

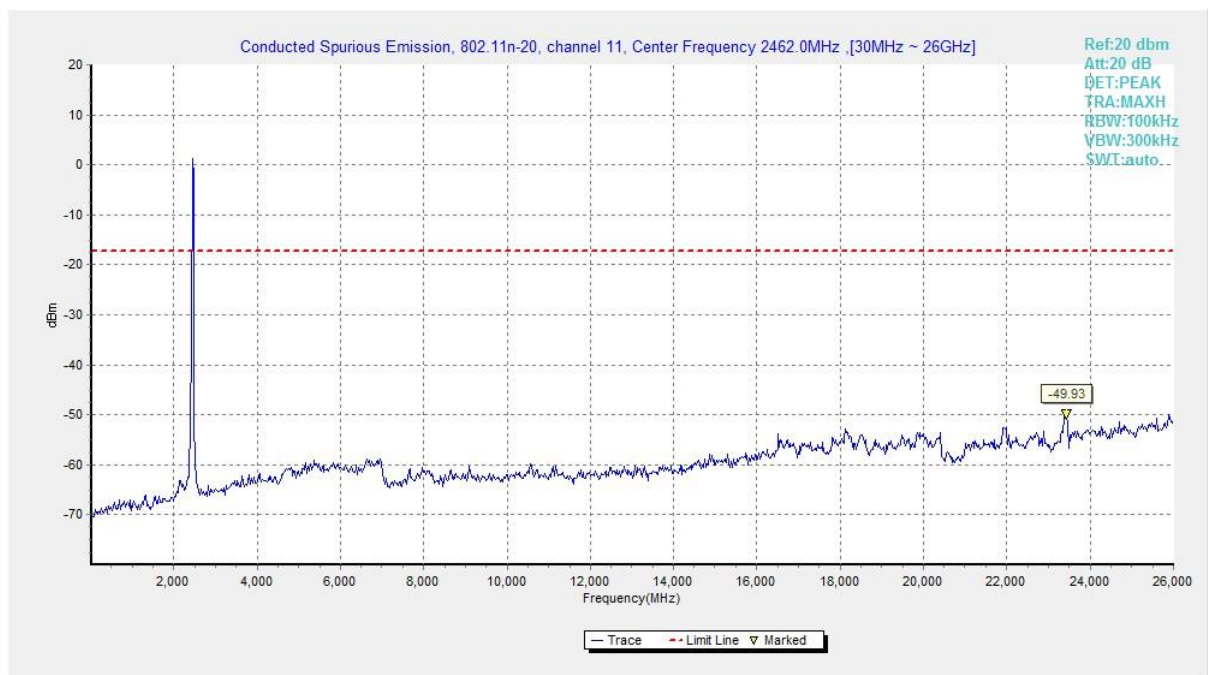


Fig.33 Conducted Spurious Emission (802.11n HT20, CH11)

A.7 Radiated Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209 & RSS-247 section 5.5/RSS-Gen section 6.13	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength (μV/m)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time (s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note: According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band from 9kHz to 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic. The measurement results include the horizontal polarization and vertical polarization measurements.

Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	CH 1	1 GHz ~ 18 GHz	Fig.34	P
	CH 6	1 GHz ~ 18 GHz	Fig.35	P
	CH 11	1 GHz ~ 18 GHz	Fig.36	P
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.37	P
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.38	P
802.11g	CH 1	1 GHz ~ 18 GHz	Fig.39	P
	CH 6	1 GHz ~ 18 GHz	Fig.40	P
	CH 11	1 GHz ~ 18 GHz	Fig.41	P
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.42	P
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.43	P
802.11n HT20	CH 1	1 GHz ~ 18 GHz	Fig.44	P
	CH 6	1 GHz ~ 18 GHz	Fig.45	P
	CH 11	1 GHz ~ 18 GHz	Fig.46	P
	Restricted Band (CH1)	2.38 GHz ~ 2.45 GHz	Fig.47	P
	Restricted Band (CH11)	2.45 GHz ~ 2.5 GHz	Fig.48	P
/	All Channels	9 kHz ~ 30 MHz	Fig.49	P
		30 MHz ~ 1 GHz	Fig.50	P
		18 GHz ~ 26.5 GHz	Fig.51	P

Worst-Case Result:
802.11b CH1 (1-18GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
13760.000000	53.63	74.00	20.37	H	16.9
14526.000000	54.32	74.00	19.68	H	17.9
15111.500000	55.87	74.00	18.13	H	18.3
16277.500000	57.10	74.00	16.90	V	20.8
16634.000000	58.12	74.00	15.88	V	22.0
17707.500000	58.47	74.00	15.53	H	23.1

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
13950.000000	41.74	54.00	12.26	H	17.2
14546.500000	42.42	54.00	11.58	V	17.9
15572.500000	43.86	54.00	10.14	V	19.6
15650.000000	45.09	54.00	8.91	V	20.0
16645.500000	45.76	54.00	8.24	V	21.9
17697.000000	45.57	54.00	8.43	H	23.1

802.11g CH1 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
13395.500000	53.52	74.00	20.48	V	17.0
13896.500000	53.60	74.00	20.40	V	17.4
14683.500000	54.29	74.00	19.71	V	17.8
15662.000000	56.78	74.00	17.22	H	20.1
16596.000000	59.13	74.00	14.87	V	22.3
17707.000000	57.39	74.00	16.61	V	23.1

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
12902.500000	41.59	54.00	12.41	V	17.0
13967.500000	41.60	54.00	12.40	V	17.1
14559.500000	42.31	54.00	11.69	H	17.9
15647.000000	45.12	54.00	8.88	V	20.0
16594.500000	45.62	54.00	8.38	H	22.3
17700.000000	45.32	54.00	8.68	H	23.2

802.11n HT20 CH1 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
13251.000000	53.39	74.00	20.61	V	17.3
13894.500000	54.02	74.00	19.98	V	17.4
14545.500000	54.63	74.00	19.37	V	17.9
15643.000000	56.77	74.00	17.23	V	20.0
16638.500000	58.01	74.00	15.99	H	21.9
17889.000000	57.17	74.00	16.83	H	24.1

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol	Corr. (dB)
13395.500000	41.42	54.00	12.58	H	17.0
13952.000000	41.81	54.00	12.19	V	17.2
14545.500000	42.41	54.00	11.59	V	17.9
15650.500000	45.08	54.00	8.92	H	20.0
16645.500000	45.70	54.00	8.30	V	21.9
17699.500000	45.33	54.00	8.67	V	23.1

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss. P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result = P_{Mea} + Cable Loss + Antenna Factor - Gain of the preamplifier

See below for test graphs.

Conclusion: PASS



Fig.34 Radiated Spurious Emission (802.11b, CH1, 1GHz-18GHz)

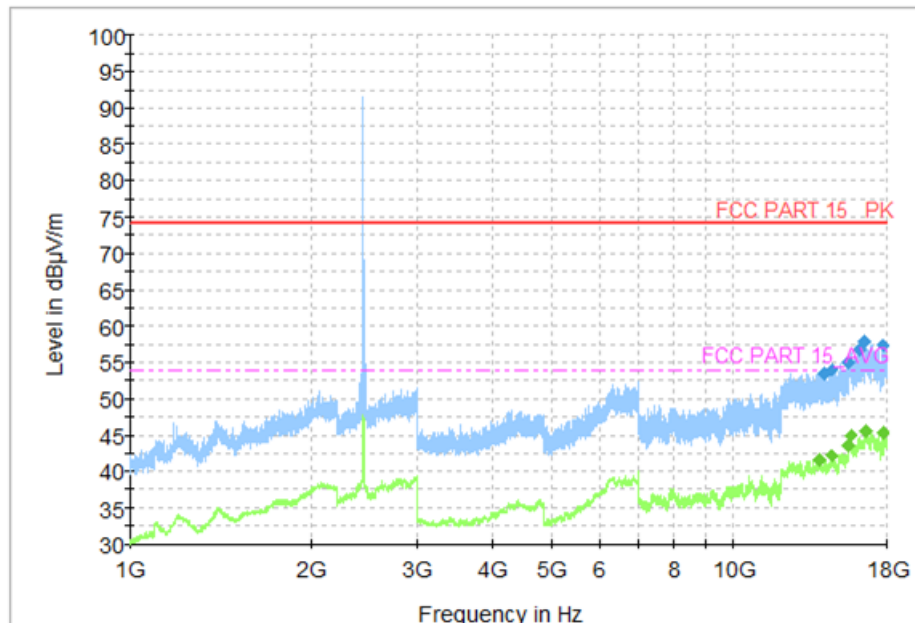


Fig.35 Radiated Spurious Emission (802.11b, CH6, 1GHz-18GHz)

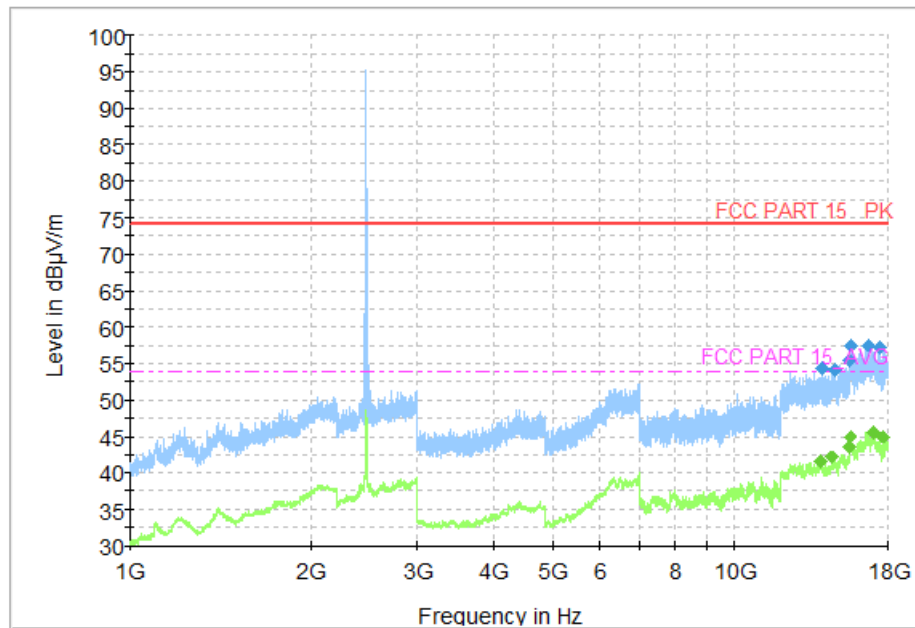


Fig.36 Radiated Spurious Emission (802.11b, CH11, 1GHz-18GHz)

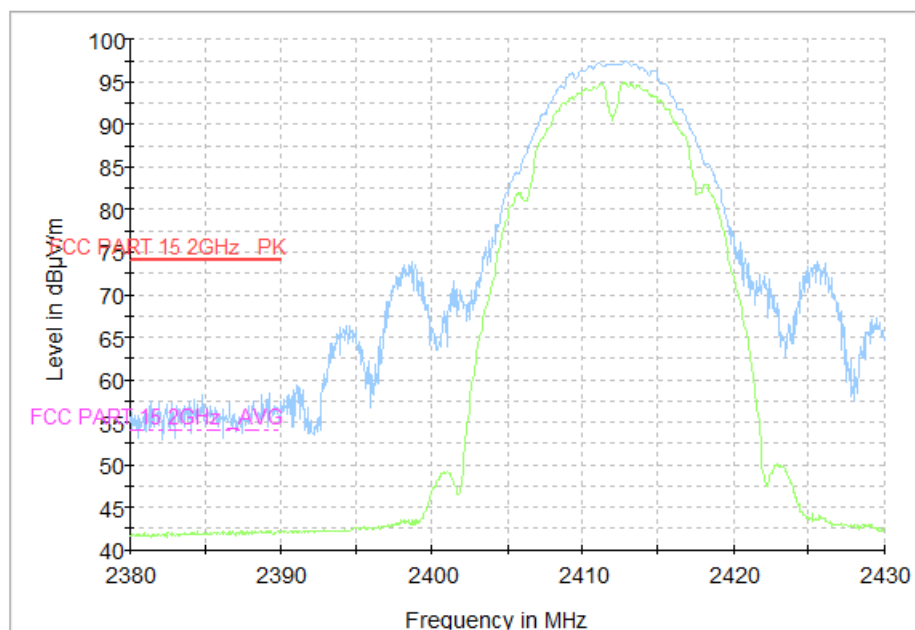


Fig.37 Radiated Restricted Band (802.11b, CH1, 2.38GHz~2.45GHz)

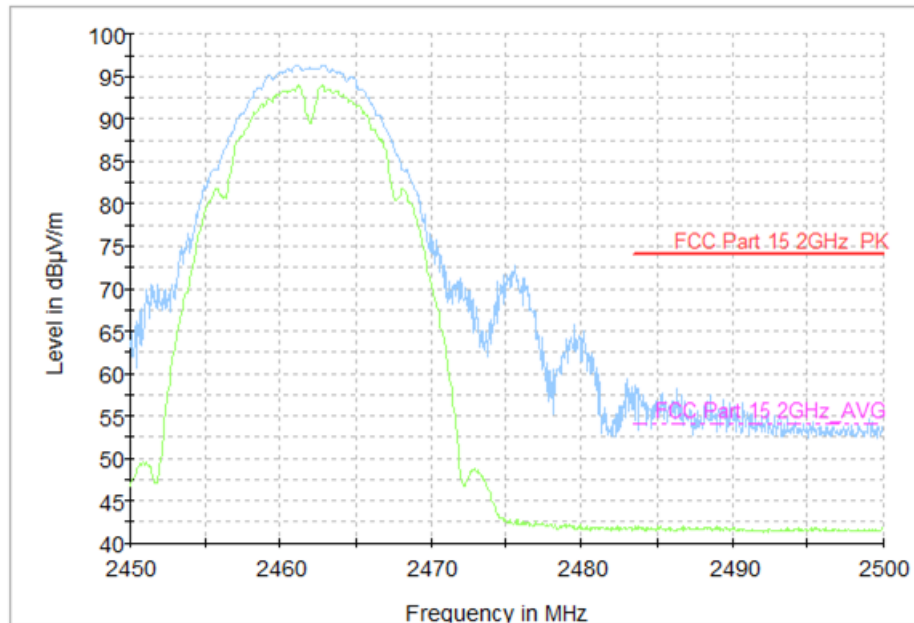


Fig.38 Radiated Restricted Band (802.11b, CH11, 2.45GHz~2.5GHz)

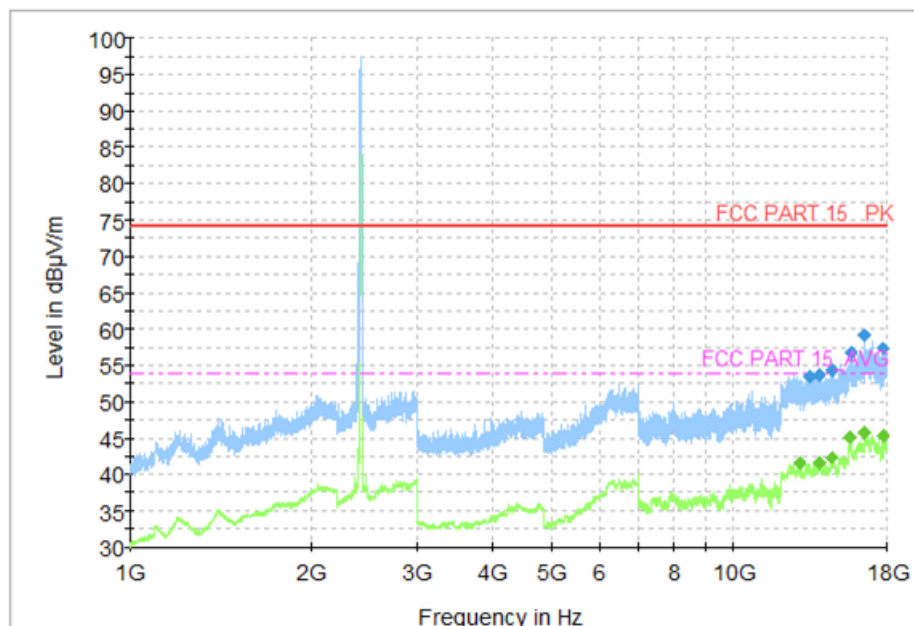


Fig.39 Radiated Spurious Emission (802.11g, CH1, 1GHz~18GHz)

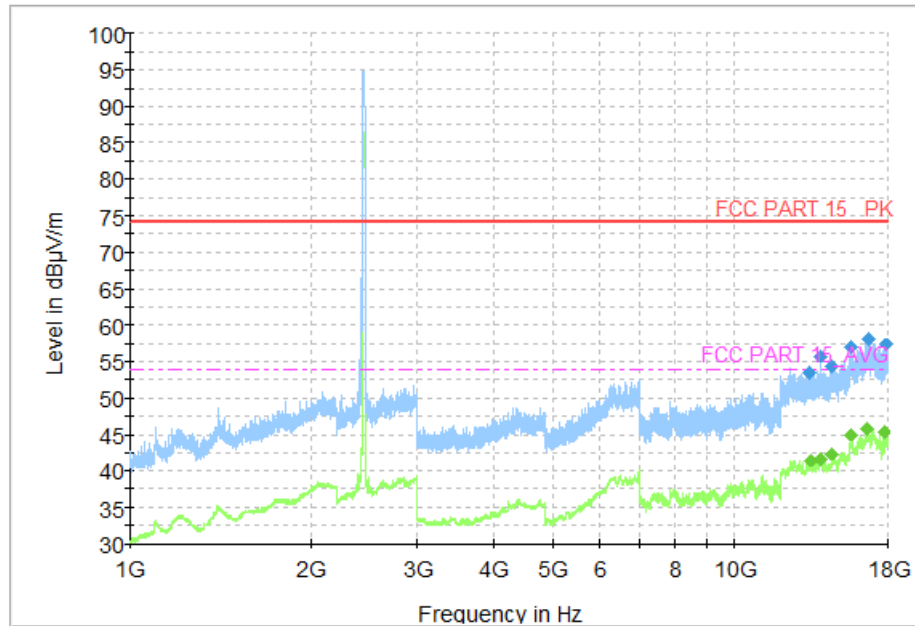


Fig.40 Radiated Spurious Emission (802.11g, CH6, 1GHz-18GHz)

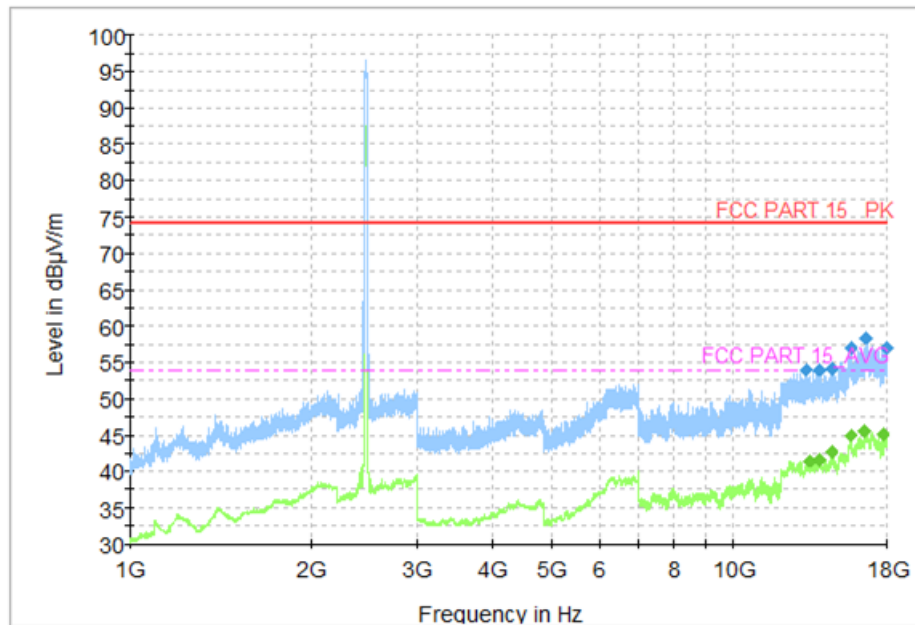


Fig.41 Radiated Spurious Emission (802.11g, CH11, 1GHz-18GHz)

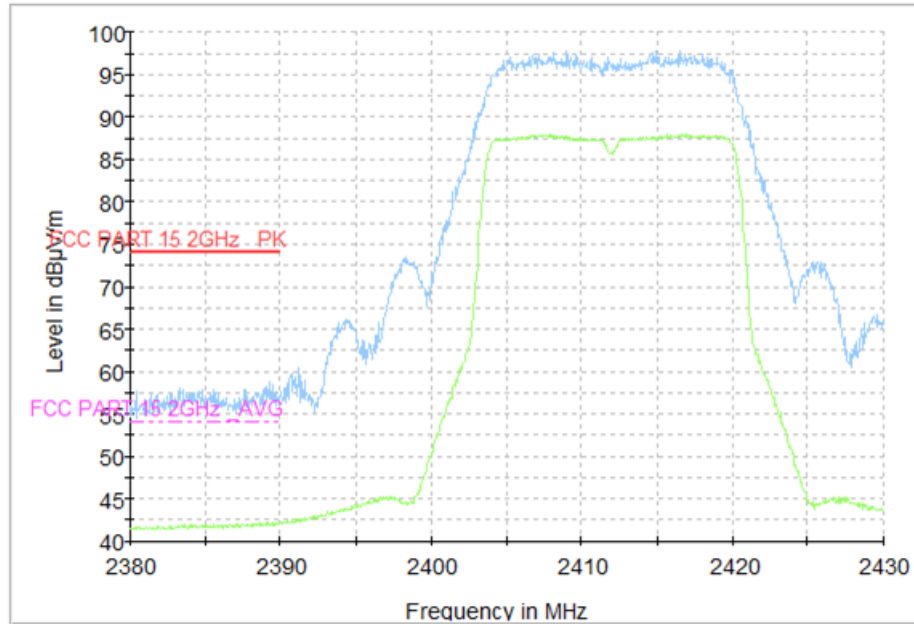


Fig.42 Radiated Restricted Band (802.11g, CH1, 2.38GHz~2.45GHz)

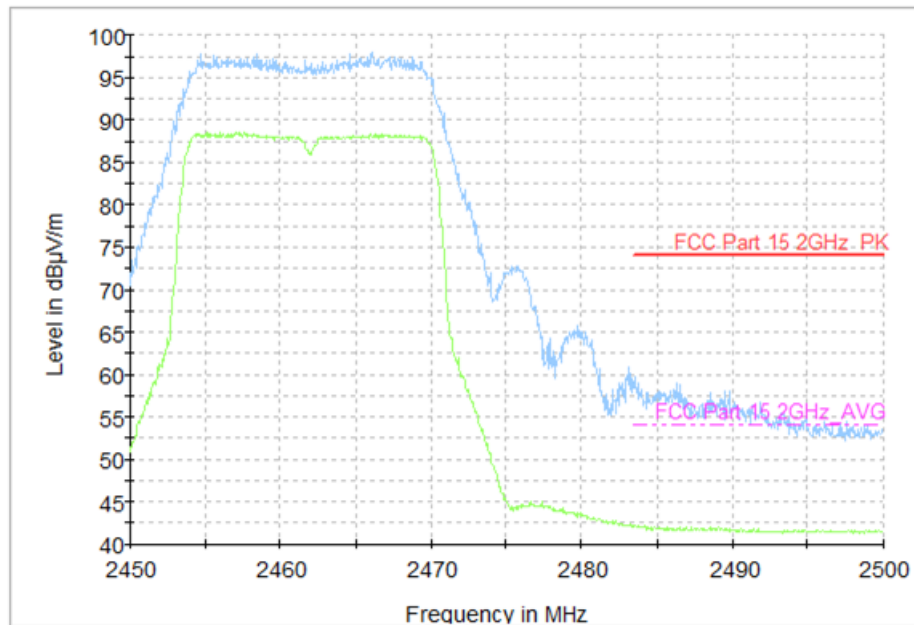


Fig.43 Radiated Restricted Band (802.11g, CH11, 2.45GHz~2.5GHz)

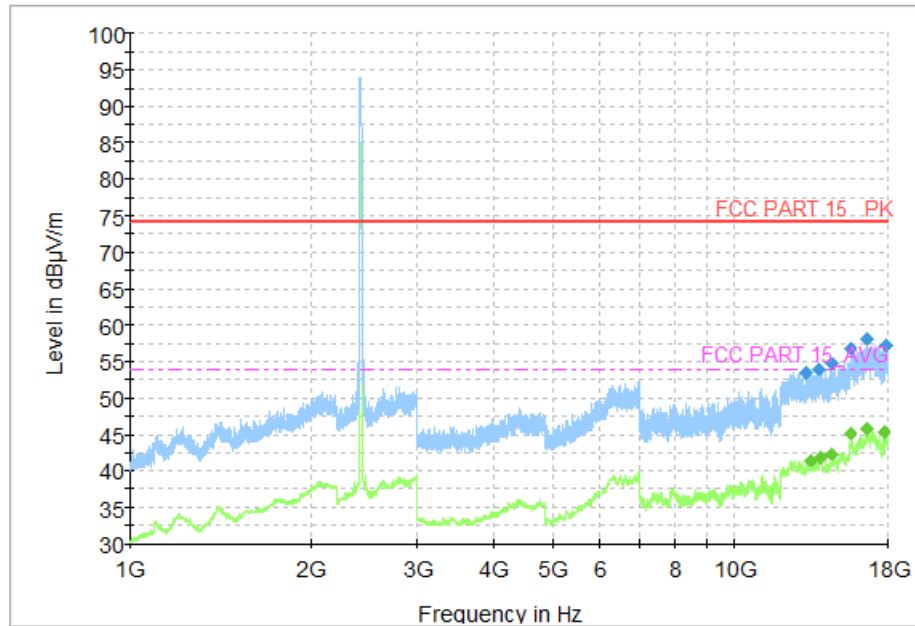


Fig.44 Radiated Spurious Emission (802.11n HT20, CH1, 1GHz-18GHz)

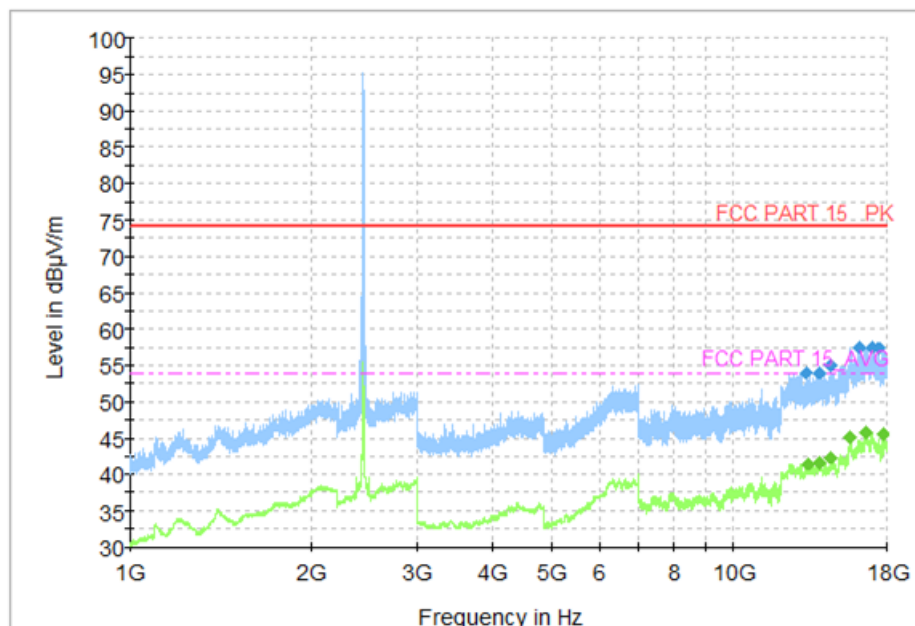


Fig.45 Radiated Spurious Emission (802.11n HT20, CH6, 1GHz-18GHz)

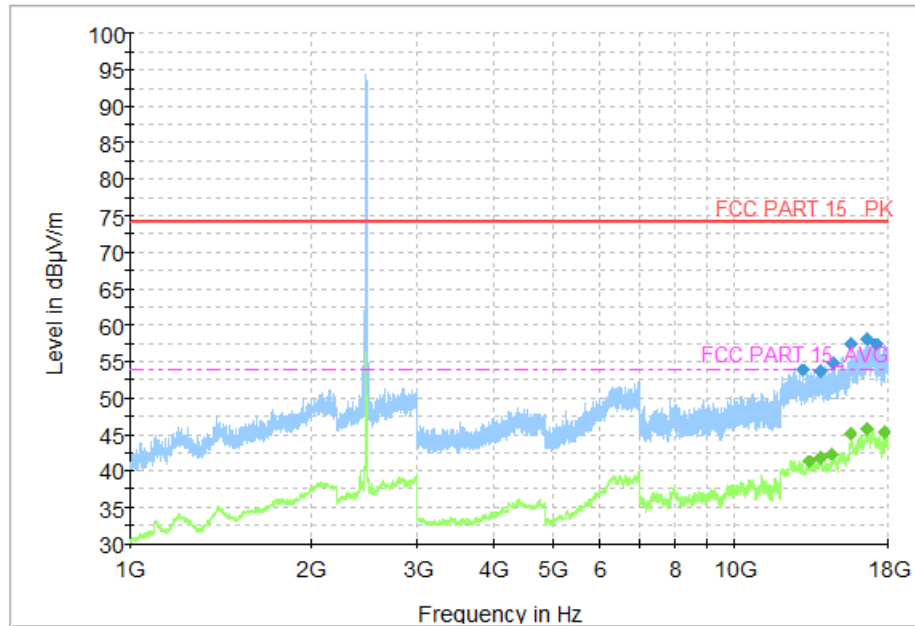


Fig.46 Radiated Spurious Emission (802.11n HT20, CH11, 1GHz-18GHz)

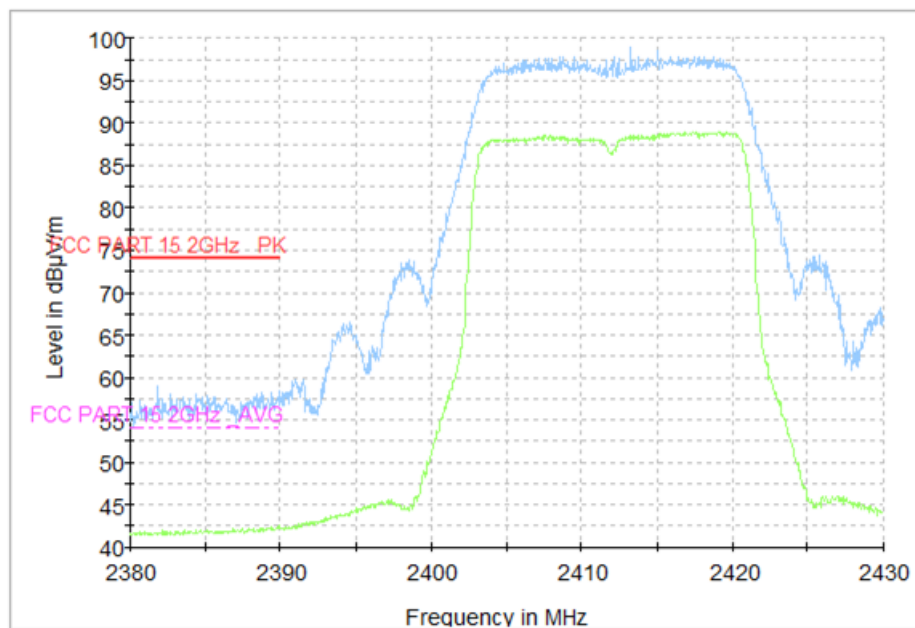


Fig.47 Radiated Restricted Band (802.11n HT20, CH1, 2.38GHz~2.45GHz)

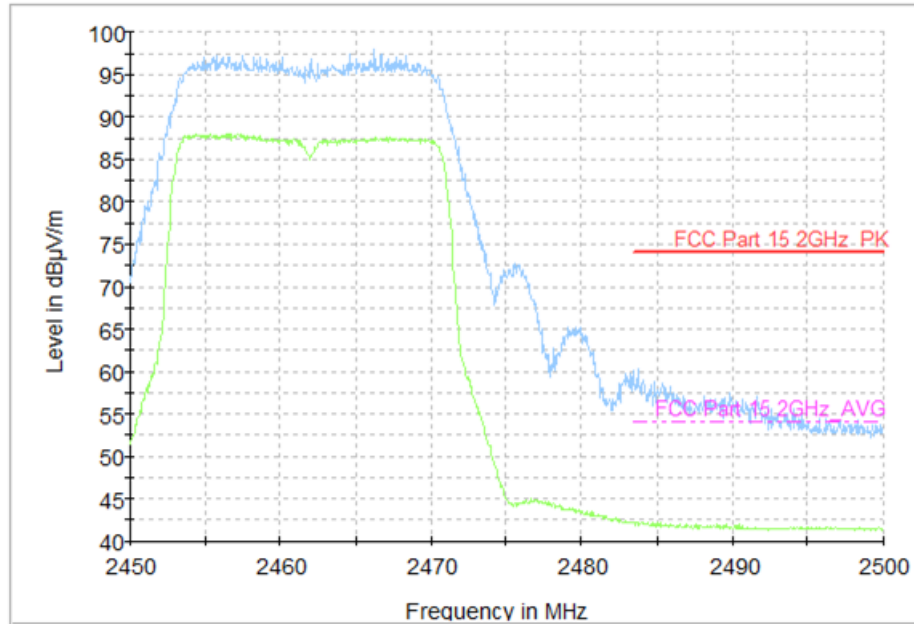


Fig.48 Radiated Restricted Band (802.11n HT20, CH11, 2.45GHz~2.5GHz)

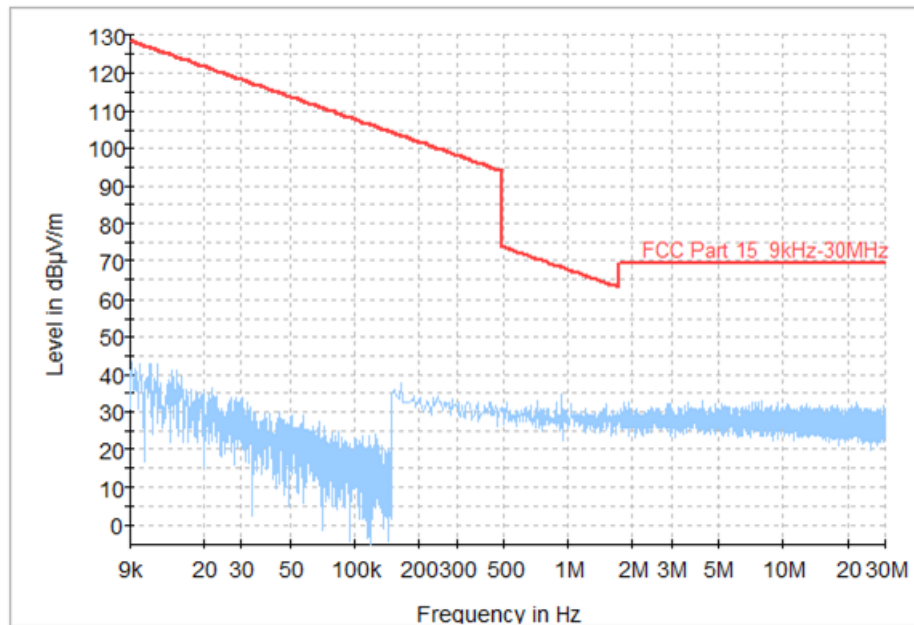


Fig.49 Radiated Spurious Emission (All Channels, 9KHz-30MHz)

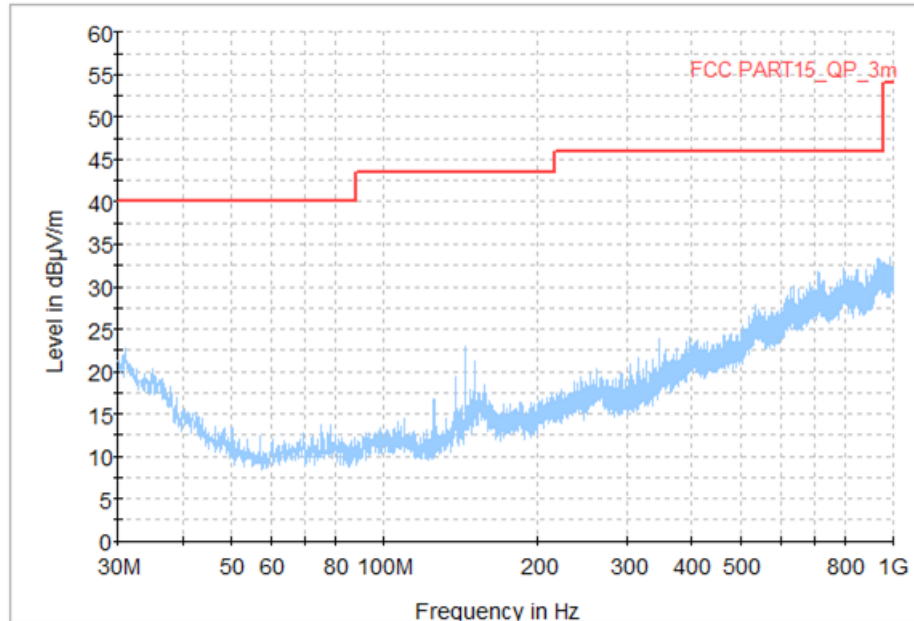


Fig.50 Radiated Spurious Emission (All Channels, 30MHz-1GHz)

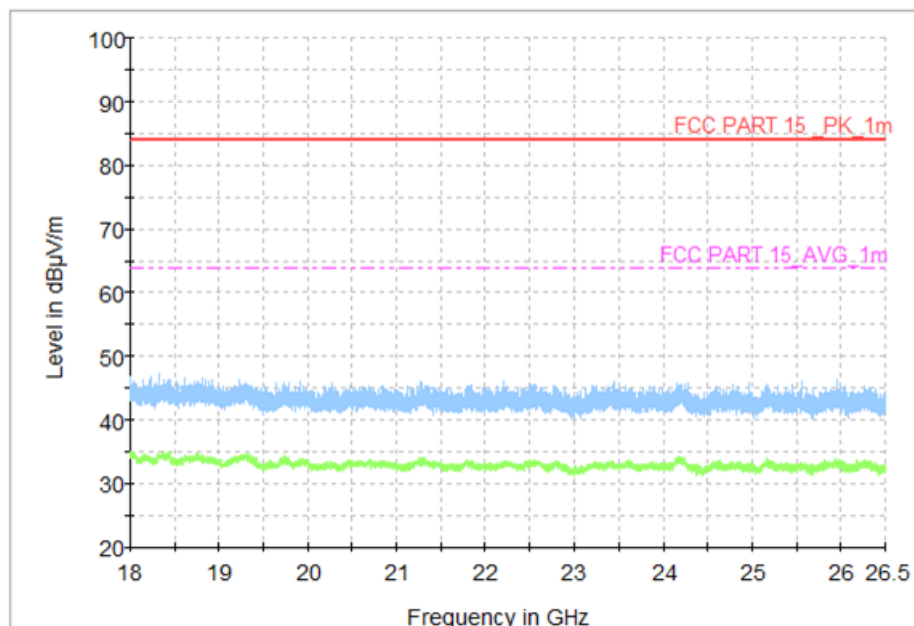


Fig.51 Radiated Spurious Emission (All Channels, 18GHz-26.5GHz)

A.8 AC Power line Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit) - AE2

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	66 to 56	Fig.52	Fig.53	P
0.5 to 5	56			
5 to 30	60			

Note: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit) - AE2

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	56 to 46	Fig.52	Fig.53	P
0.5 to 5	46			
5 to 30	50			

Note: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Test Condition:

Voltage (V)	Frequency (Hz)
240	60

Measurement Result and limit:

WLAN (Quasi-peak Limit) - AE2

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	66 to 56	Fig.54	Fig.55	P
0.5 to 5	56			
5 to 30	60			

Note: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit) - AE2

Frequency	Average-peak	Result (dB μ V)	Conclusion
-----------	--------------	---------------------	------------



range (MHz)	Limit (dBμV)	Traffic	Idle	
0.15 to 0.5	56 to 46	Fig.54	Fig.55	P
0.5 to 5	46			
5 to 30	50			
Note: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Note: The measurement results include the L1 and N measurements.

See below for test graphs.

Conclusion: PASS

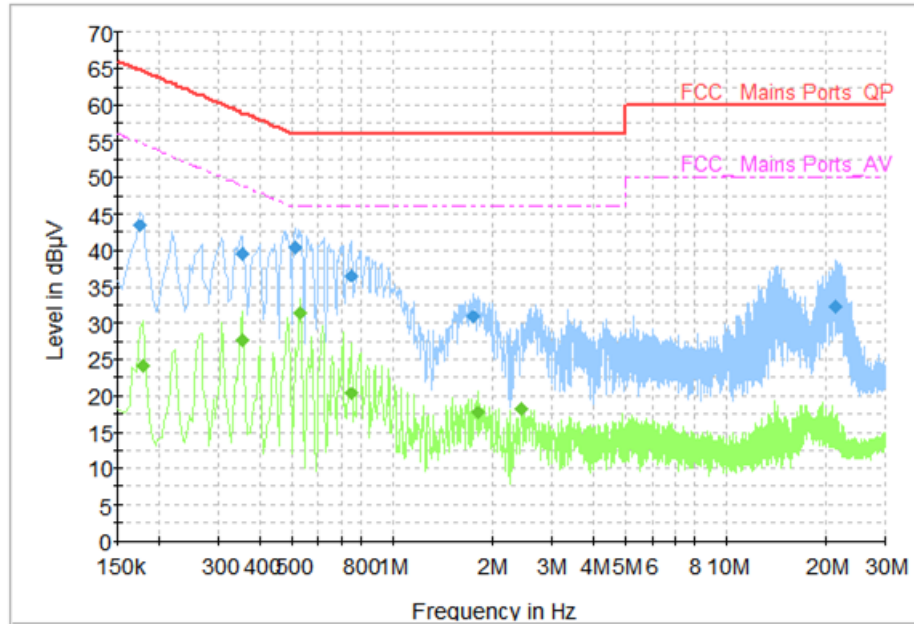


Fig.52 AC Power line Conducted Emission (Traffic, AE2, 120V)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.174000	43.31	64.77	21.45	N	ON	9.6
0.354000	39.43	58.87	19.44	L1	ON	9.7
0.510000	40.43	56.00	15.57	N	ON	9.7
0.754000	36.54	56.00	19.46	L1	ON	9.7
1.746000	30.85	56.00	25.15	N	ON	9.7
21.170000	32.26	60.00	27.74	N	ON	10.4

Measurement Results: Average

Frequency (MHz)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.178000	24.17	54.58	30.41	N	ON	9.6
0.354000	27.66	48.87	21.21	L1	ON	9.7
0.530000	31.34	46.00	14.66	L1	ON	9.7
0.754000	20.36	46.00	25.64	L1	ON	9.7
1.814000	17.66	46.00	28.34	N	ON	9.7
2.430000	18.08	46.00	27.92	L1	ON	9.7

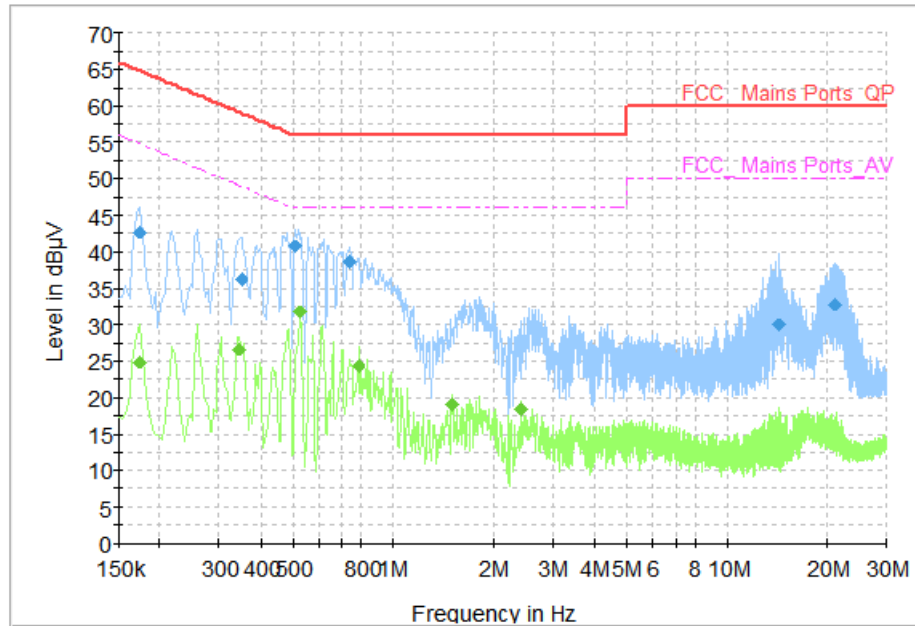


Fig.53 AC Power line Conducted Emission (Idle, AE2, 120V)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.174000	42.69	64.77	22.07	N	ON	9.6
0.350000	36.22	58.96	22.74	L1	ON	9.7
0.510000	40.76	56.00	15.24	N	ON	9.7
0.742000	38.53	56.00	17.47	L1	ON	9.7
14.242000	29.97	60.00	30.03	N	ON	9.9
20.962000	32.80	60.00	27.20	N	ON	10.4

Measurement Results: Average

Frequency (MHz)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.174000	24.86	54.77	29.91	N	ON	9.6
0.346000	26.60	49.06	22.46	L1	ON	9.7
0.530000	31.65	46.00	14.35	L1	ON	9.7
0.786000	24.29	46.00	21.71	L1	ON	9.7
1.506000	19.03	46.00	26.97	L1	ON	9.7
2.426000	18.37	46.00	27.63	L1	ON	9.7

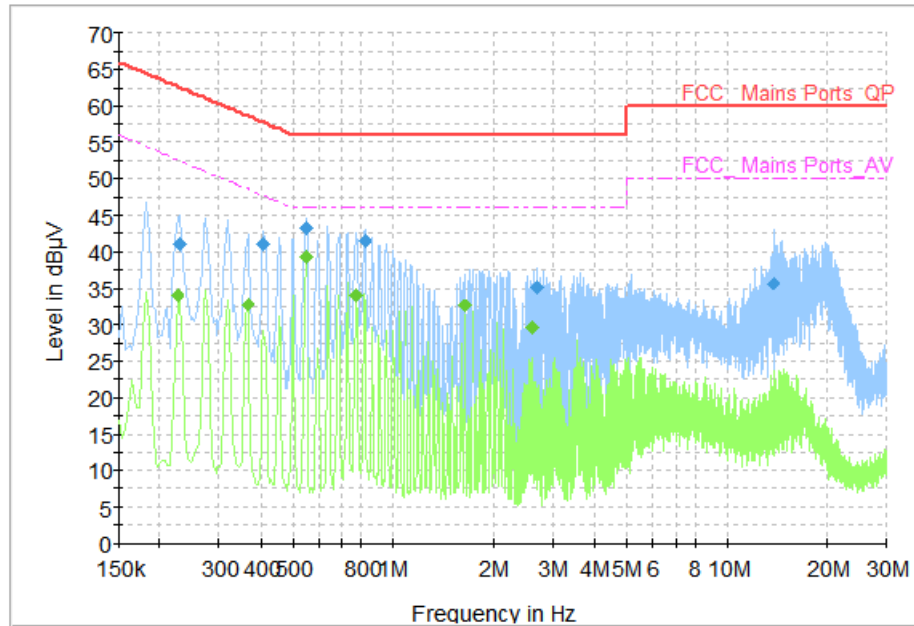


Fig.54 AC Power line Conducted Emission (Traffic, AE2, 240V)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.230000	41.13	62.45	21.32	L1	ON	9.7
0.410000	41.00	57.65	16.65	N	ON	9.7
0.546000	43.13	56.00	12.87	L1	ON	9.7
0.822000	41.46	56.00	14.54	N	ON	9.7
2.690000	35.14	56.00	20.86	L1	ON	9.7
13.786000	35.53	60.00	24.47	N	ON	9.9

Measurement Results: Average

Frequency (MHz)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.226000	34.01	52.60	18.59	L1	ON	9.7
0.366000	32.87	48.59	15.72	L1	ON	9.7
0.546000	39.40	46.00	6.60	L1	ON	9.7
0.774000	34.02	46.00	11.98	L1	ON	9.7
1.638000	32.67	46.00	13.33	L1	ON	9.7
2.590000	29.55	46.00	16.45	L1	ON	9.7

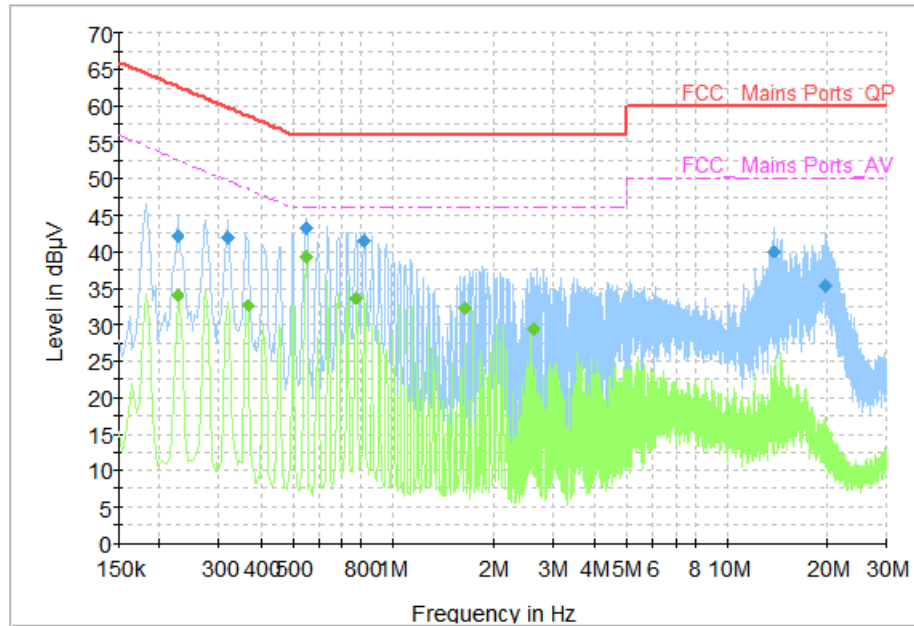


Fig.55 AC Power line Conducted Emission (Idle, AE2, 240V)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.226000	42.16	62.60	20.44	L1	ON	9.7
0.318000	42.03	59.76	17.72	N	ON	9.6
0.546000	43.24	56.00	12.76	L1	ON	9.7
0.818000	41.41	56.00	14.59	N	ON	9.7
13.862000	40.09	60.00	19.91	N	ON	9.9
19.698000	35.19	60.00	24.81	N	ON	10.4

Measurement Results: Average

Frequency (MHz)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.226000	34.04	52.60	18.56	L1	ON	9.7
0.366000	32.66	48.59	15.93	L1	ON	9.7
0.546000	39.39	46.00	6.61	L1	ON	9.7
0.774000	33.73	46.00	12.27	L1	ON	9.7
1.638000	32.22	46.00	13.78	L1	ON	9.7
2.634000	29.49	46.00	16.51	L1	ON	9.7

A.9 99% Occupied Bandwidth

Measurement Limit:

Standard	Limit (kHz)
RSS-Gen section 6.7	/

Measurement Result:

Mode	Channel	Frequency (MHz)	Test Results (MHz)		Conclusion
802.11b	CH 1	2412	Fig.56	13.20	P
	CH 6	2437	Fig.57	13.16	P
	CH 11	2462	Fig.58	13.12	P
802.11g	CH 1	2412	Fig.59	16.88	P
	CH 6	2437	Fig.60	16.84	P
	CH 11	2462	Fig.61	16.76	P
802.11n HT20	CH 1	2412	Fig.62	17.92	P
	CH 6	2437	Fig.63	17.92	P
	CH 11	2462	Fig.64	17.84	P

See below for test graphs.

Conclusion: PASS

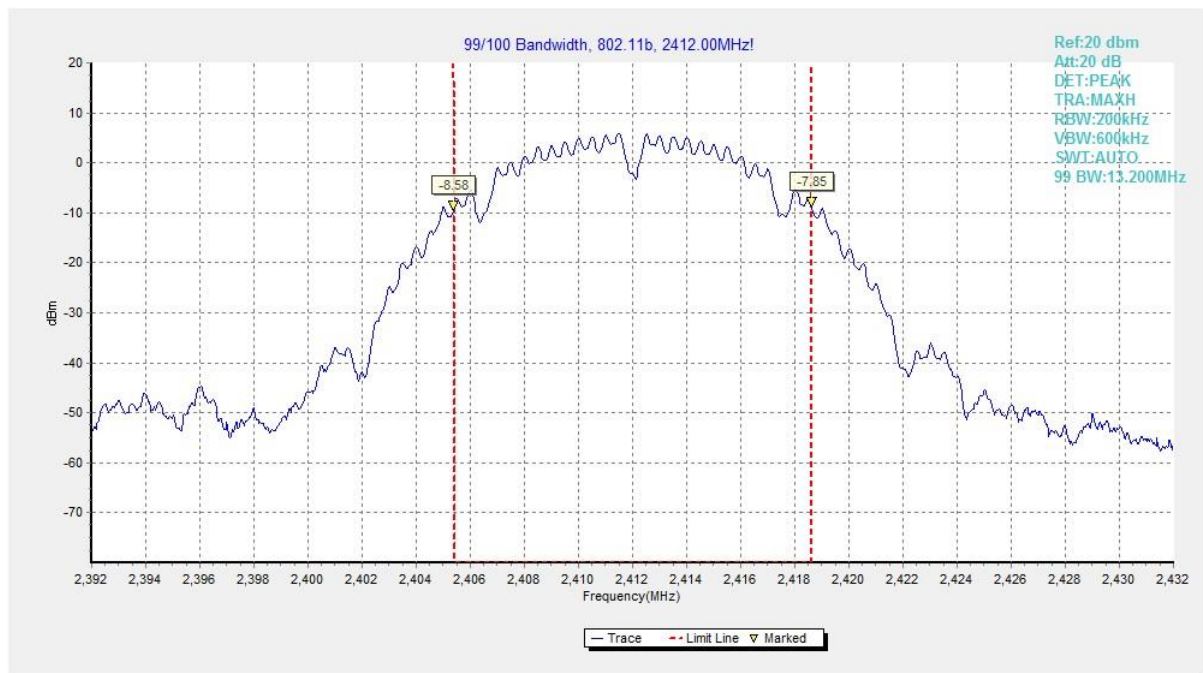


Fig.56 99% Occupied Bandwidth (802.11b, CH 1)

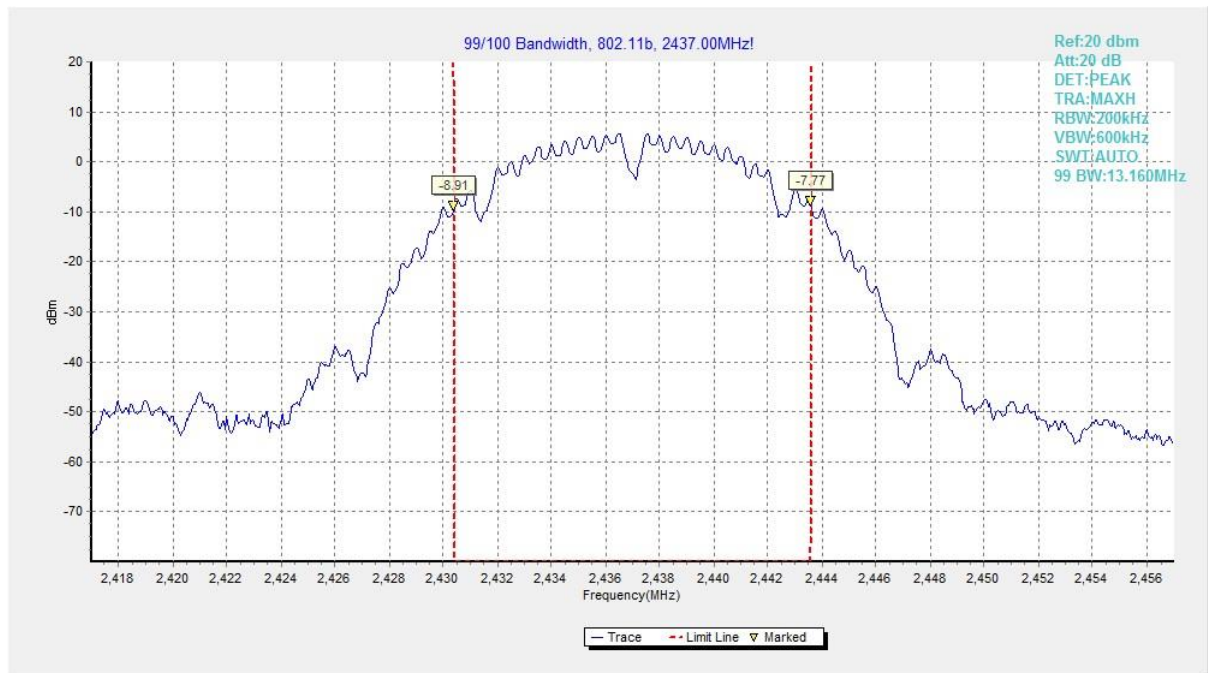


Fig.57 99% Occupied Bandwidth (802.11b, CH 6)

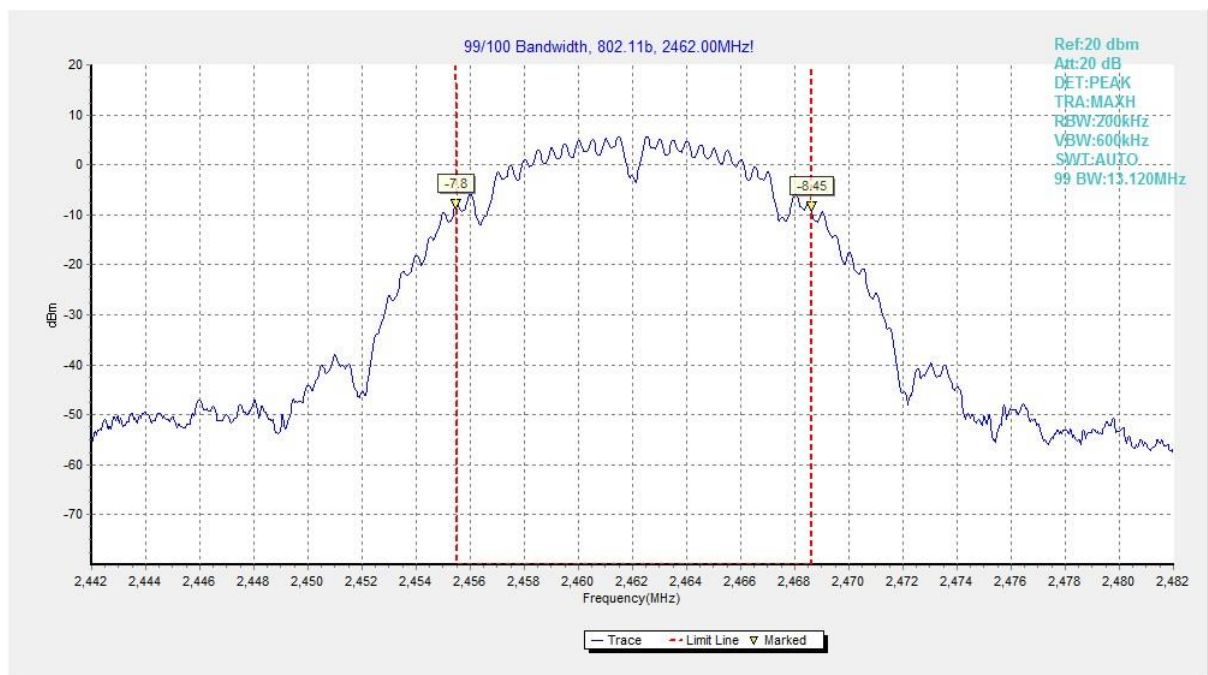


Fig.58 99% Occupied Bandwidth (802.11b, CH 11)

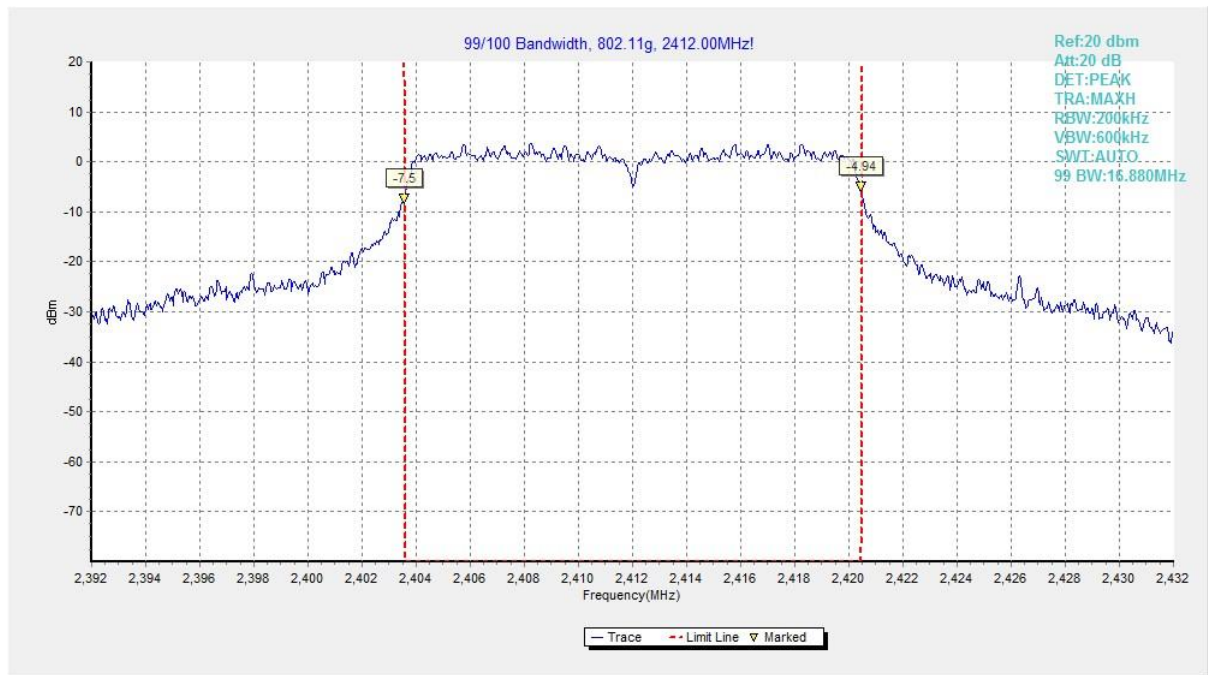


Fig.59 99% Occupied Bandwidth (802.11g, CH 1)

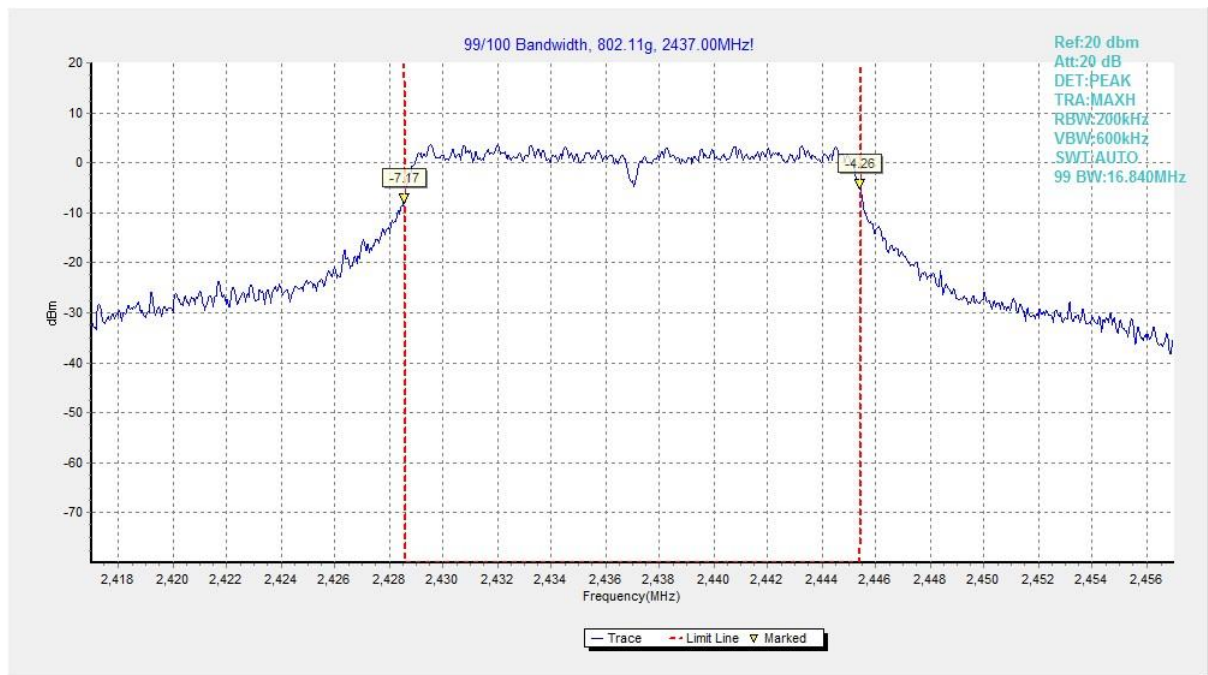


Fig.60 99% Occupied Bandwidth (802.11g, CH 6)

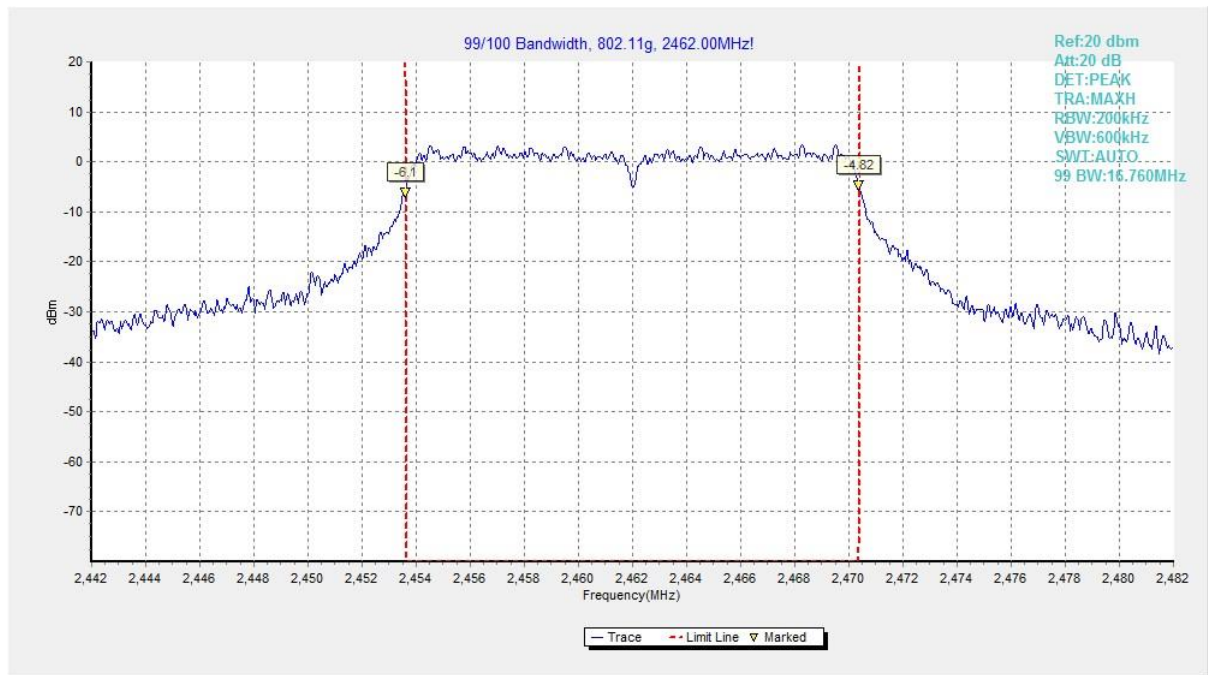


Fig.61 99% Occupied Bandwidth (802.11g, CH 11)

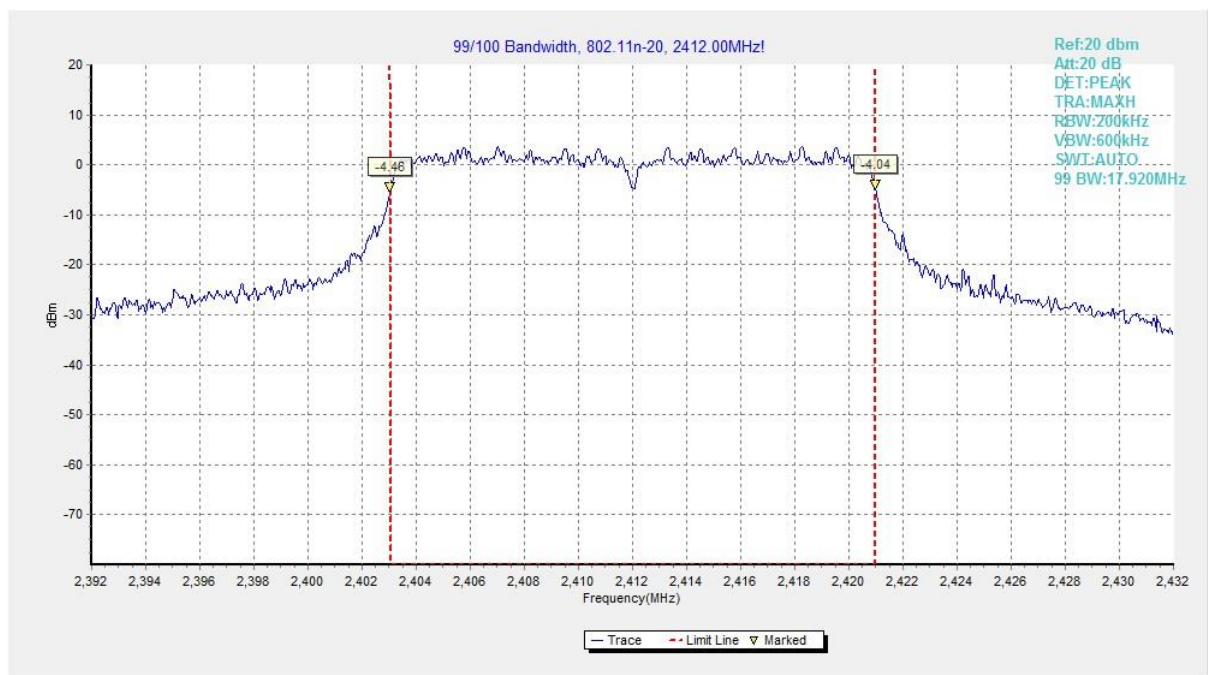


Fig.62 99% Occupied Bandwidth (802.11n HT20, CH 1)

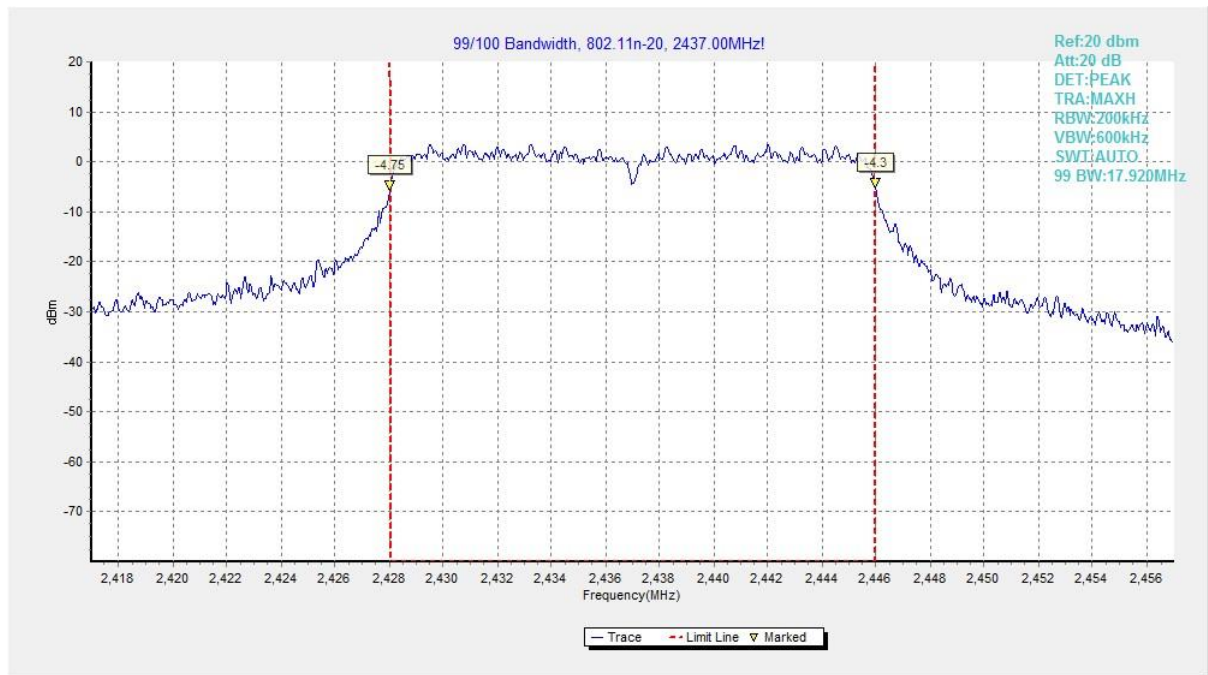


Fig.63 99% Occupied Bandwidth (802.11n HT20, CH 6)

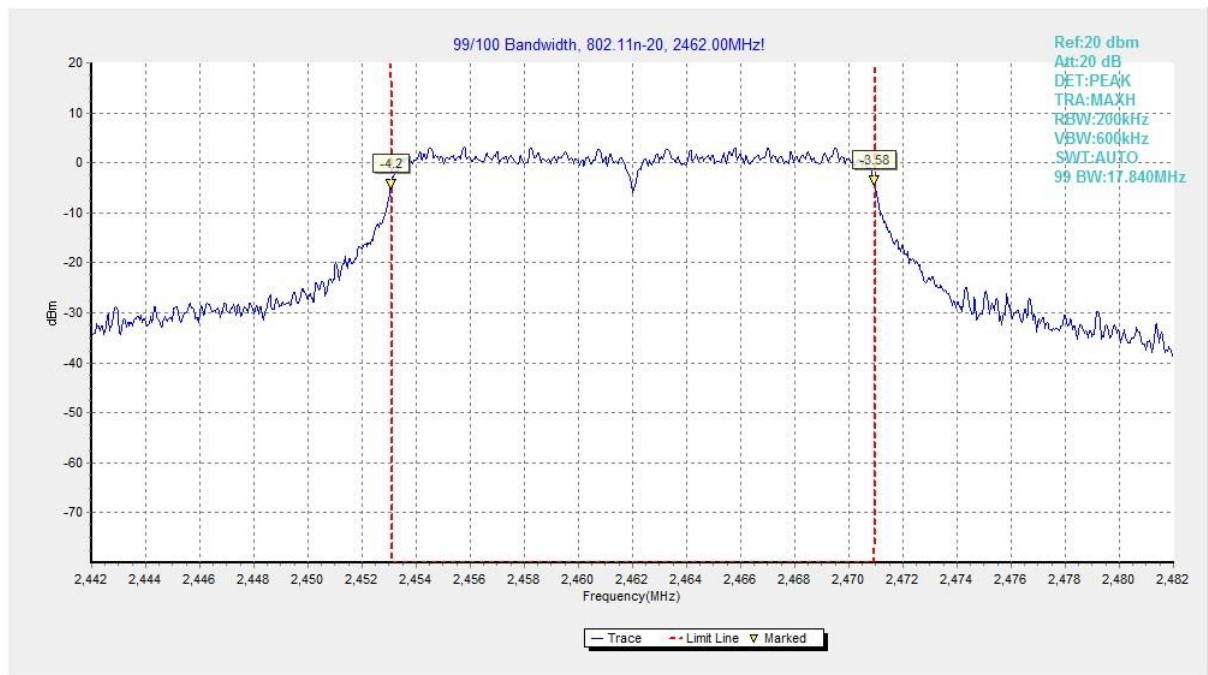


Fig.64 99% Occupied Bandwidth (802.11n HT20, CH 11)



ANNEX B: Spot Check of Transmitter unwanted emissions in the spurious domain

Company Name: Ademco Inc

Product Name: Quicksilver wireless tablet

Model Name: PROWLTOUCH/PROWLTOUCHC/VISTAHTCHWLC

FCC ID: CFS8DLPROWLTOUCH

IC: 573F-PROWLTOUCH

Spot Check

Model Name	The Mode of the worst data of original report	Frequency (MHz)	The worst result of Radiated Emission (dBμV/m)	The worst Margin (dB)
PROWLTOUCH/PROWLTOUCHC	802.11b	2412 (CH1)	45.57	8.43
PROWLTOUCH/PROWLTOUCHC/VISTAHTCHWLC	802.11b	2412 (CH1)	43.38	10.62

Spot check test data included for the variants based on worst-case results reported in the original FCC ID filing.

From the above data, it can be concluded that the Radiated Emission of the variant is better than that of the original. And the variant test data can refer to the original report.

This condition applies to the reports I19N01349 and 24T04N002718.

Testing Date: 2024-11-12

Test Facilities Utilized

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Date	Calibration Period
1	Test Receiver	ESR7	101676	R&S	2024-11-22	1 year
2	Hybrid antenna	VULB 9163	330	Schwarzbeck	2027-04-21	3 years
3	Horn Antenna	3117	00066577	ETS-lindgren	2025-04-17	1 year
4	Anechoic Chamber	FACT3-2.0	1285	ETS-Lindgren	2025-05-28	2 years
5	Spectrum Analyzer	FSV40	101192	R&S	2025-01-12	1 year
6	Loop Antenna	HLA6120	35779	TESEQ	2025-05-10	3 years
7	Horn Antenna	QSH-SL-18-26-S-20	17013	Q-par	2026-02-01	3 years



No. 24T04N002718-006-WLAN 2G

*****END OF REPORT*****