



## FCC 47 CFR PART 15 SUBPART C

### TEST REPORT

For

**TABLET PC**

**Model: DASH**

**Trade Name: ASTERIX**

*Issued to*

**PIONEER POS SOLUTION INC**  
238 Benton Ct, City of Industry, CA 91789, USA.

*Issued by*

**Compliance Certification Services Inc.**  
No.11, Wu-Gong 6th Rd., Wugu Industrial Park,  
New Taipei City 248, Taiwan (R.O.C.)

<http://www.ccsrf.com>

[service@ccsrf.com](mailto:service@ccsrf.com)

**Issued Date: November 15, 2012**



---

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



### **Revision History**

Rev.		Issue Date		Revisions	Effect Page	Revised By
00		November 15, 2012		Initial Issue	ALL	Rachel Wu



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>6</b>
3.1 EUT CONFIGURATION .....	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES .....	8
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>9</b>
4.1 MEASURING INSTRUMENT CALIBRATION.....	9
4.2 MEASUREMENT EQUIPMENT USED.....	10
4.3 MEASUREMENT UNCERTAINTY .....	11
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>12</b>
5.1 FACILITIES .....	12
5.2 EQUIPMENT.....	12
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	13
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>14</b>
6.1 SETUP CONFIGURATION OF EUT.....	14
6.2 SUPPORT EQUIPMENT .....	14
<b>7. FCC PART 15.247 REQUIREMENTS.....</b>	<b>15</b>
7.1 6DB BANDWIDTH .....	15
7.2 PEAK POWER .....	29
7.3 AVERAGE POWER .....	31
7.4 BAND EDGES MEASUREMENT .....	33
7.5 PEAK POWER SPECTRAL DENSITY .....	50
7.6 SPURIOUS EMISSIONS.....	64
7.7 RADIATED EMISSIONS .....	77
7.8 POWERLINE CONDUCTED EMISSIONS.....	94
<b>APPENDIX I RADIO FREQUENCY EXPOSURE .....</b>	<b>97</b>
<b>APPENDIX II PHOTOGRAPHS OF TEST SETUP .....</b>	<b>100</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	



## 1. TEST RESULT CERTIFICATION

**Applicant:** PIONEER POS SOLUTION INC  
238 Benton Ct, City of Industry, CA 91789, USA.

**Equipment Under Test:** TABLET PC

**Trade Name:** ASTERIX

**Model:** DASH

**Date of Test:** August 11, 2011 ~ September 1, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**

---

Miller Lee  
Section Manager  
Compliance Certification Services Inc.

**Reviewed by:**

---

Gina Lo  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	TABLET PC
<b>Trade Name</b>	ASTERIX
<b>Model Number</b>	DASH
<b>Model Discrepancy</b>	N/A
<b>Received Date</b>	November 15, 2012
<b>Power Rating</b>	1. Power Adapter FSP GROUP INC. / FSP065-RAB I/P: 100-240V, 1.5A, 50-60Hz O/P: 19V, 3.42A 2. Battery Internal Battery Pack Rating: 7.4V, 3800mAh/28.12Wh External Battery Pack Rating: 7.4V, 4200mAh/31.08Wh
<b>Frequency Range</b>	2412 ~ 2462 MHz
<b>Transmit Power</b>	IEEE 802.11b mode: 17.41 dBm IEEE 802.11g mode: 16.22 dBm IEEE 802.11n HT 20 MHz mode: 16.12 dBm IEEE 802.11n HT 40 MHz mode: 16.18 dBm
<b>Modulation Technique</b>	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) IEEE 802.11n HT 20 MHz mode: OFDM (6.5, 13, 19.5, 26, 39, 52, 58.5, 65.0Mbps) IEEE 802.11n HT 40 MHz mode: OFDM (13.5, 27, 40.5, 54, 81, 108, 121.5, 135Mbps)
<b>Number of Channels</b>	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels IEEE 802.11n HT 40 MHz mode: 7 Channels
<b>Antenna Specification</b>	PCB Antenna / Gain: 1.4 dBi

**Remark:**

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **CPODASH** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



### **3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

<b>MHz</b>	<b>MHz</b>	<b>MHz</b>	<b>GHz</b>
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-Peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



### **3.5 DESCRIPTION OF TEST MODES**

The EUT (model: DASH) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

#### **IEEE 802.11b mode:**

Channel Low (2412MHz), Channel Mid (2442MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

#### **IEEE 802.11g mode:**

Channel Low (2412MHz), Channel Mid (2442MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

#### **IEEE 802.11n HT 20 MHz mode:**

Channel Low (2412MHz), Channel Mid (2442MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

#### **IEEE 802.11n HT 40 MHz mode:**

Channel Low (2422MHz), Channel Mid (2442MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Y axis) and the worst case was recorded.



## **4. INSTRUMENT CALIBRATION**

### **4.1 MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



## 4.2 MEASUREMENT EQUIPMENT USED

### Equipment Used for Emissions Measurement

**Remark:** Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/16/2013
Power Meter	Anritsu	ML2495A	1012009	04/26/2013
Power Sensor	Anritsu	MA2411B	0917072	04/26/2013

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	11/02/2012
EMI Test Receiver	R&S	ESCI	100064	02/02/2013
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/11/2013
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/18/2012
Bilog Antenna	Sunol Sciences	JB3	A030105	10/05/2012
Horn Antenna	EMCO	3117	00055165	01/11/2013
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/25/2012
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TEST RECEIVER	R&S	ESHS20	840455/006	02/21/2013
LISN (EUT)	SCHWARZBECK	NSLK 8127	8127527	12/12/2012
LISN	SCHWARZBECK	NSLK 8127	8127526	12/12/2012
BNC CABLE	MIYAZAKI	5D-FB	BNC A5	02/06/2013
THERMO-HYGRO METER	TECPTEL	DTM-303	NO.3	11/17/2012
Test S/W	EZ-EMC			



### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.0717
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

*Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.*



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.  
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- Remark: The powerline conducted emissions test items was tested at Compliance Certification Services Inc. (Hsintien Lab.) The test equipments were listed in page 10 and the test data, please refer page 95-96.*
- No.11, Wu-Gong 6th Rd., Wugu Industrial Park, New Taipei City 248, Taiwan (R.O.C.)  
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.  
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-Peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, “Radio Interference Measuring Apparatus and Measurement Methods.”



### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Earphone & Microphone	e-Sense	MSB301	N/A	N/A	Unshielded, 2.0m	N/A
2.	USB HDD	GOOD WAY	NU6020	N/A	N/A	Shielded, 1.8m with a core	N/A
3.	USB Keyboard	HP	KU-0316	BC3870FVBWH079	N/A	Shielded, 1.8m	N/A
4.	Wireless Router (Remote)	ASUS	WL-500g	471GA12838	MSQWL500G	N/A	Unshielded, 1.8m
5.	Notebook PC (Remote)	IBM	2672 (X31)	99PBTKB	FCC DoC	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 6DB BANDWIDTH

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the Peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted*



## Test Data

### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	10166.6	>500	PASS
Mid	2442	10166.6		PASS
High	2462	10250		PASS

### Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	16583.3	>500	PASS
Mid	2442	16583.3		PASS
High	2462	16583.3		PASS

### Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	17833.4	>500	PASS
Mid	2442	17833.4		PASS
High	2462	17833.4		PASS


### Test mode: IEEE 802.11n HT 40 MHz mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2422	36500	>500	PASS
Mid	2442	36500		PASS
High	2452	36500		PASS



IEEE 802.11b mode

6dB Bandwidth (CH Low)

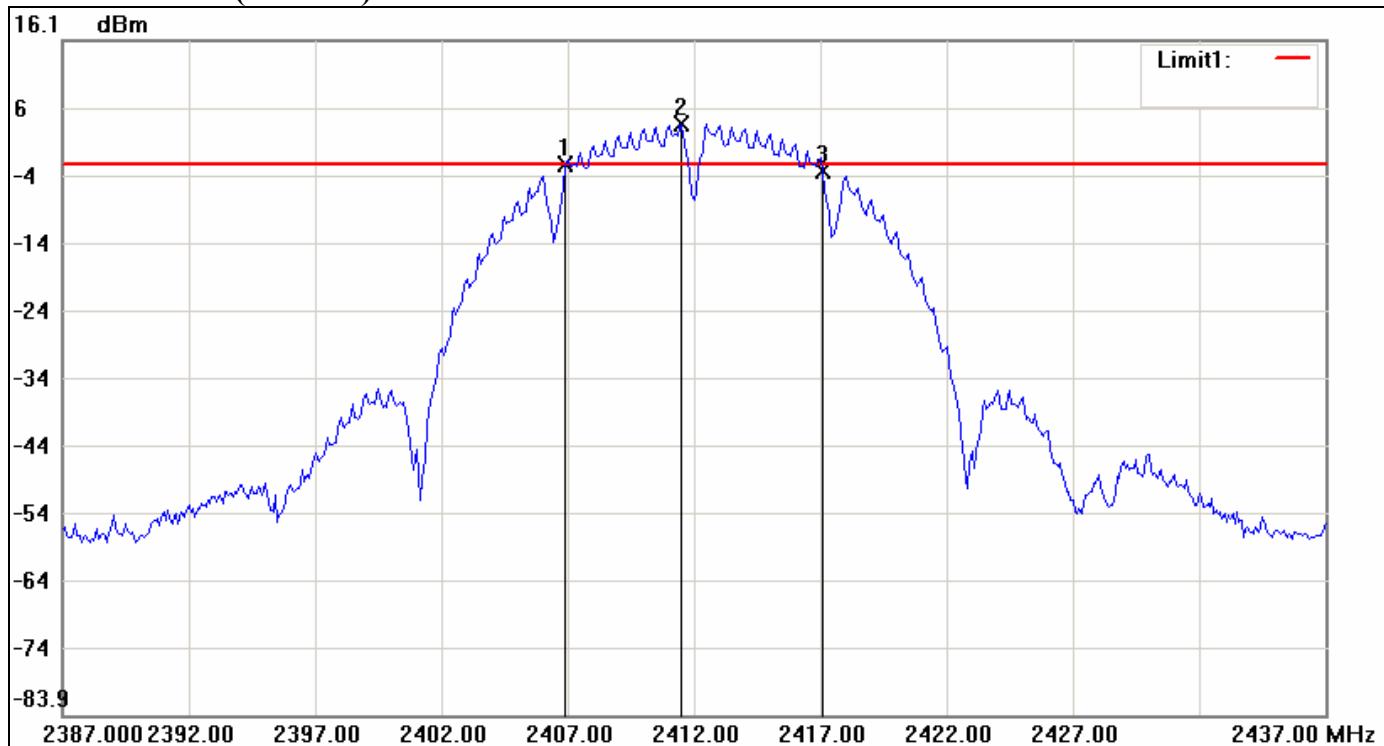


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2406.9167	-2.35	-2.33	-0.02
2	2411.5000	3.67	-2.33	6.00
3	2417.0833	-3.26	-2.33	-0.93

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	10.1666	-0.91



### 6dB Bandwidth (CH Mid)

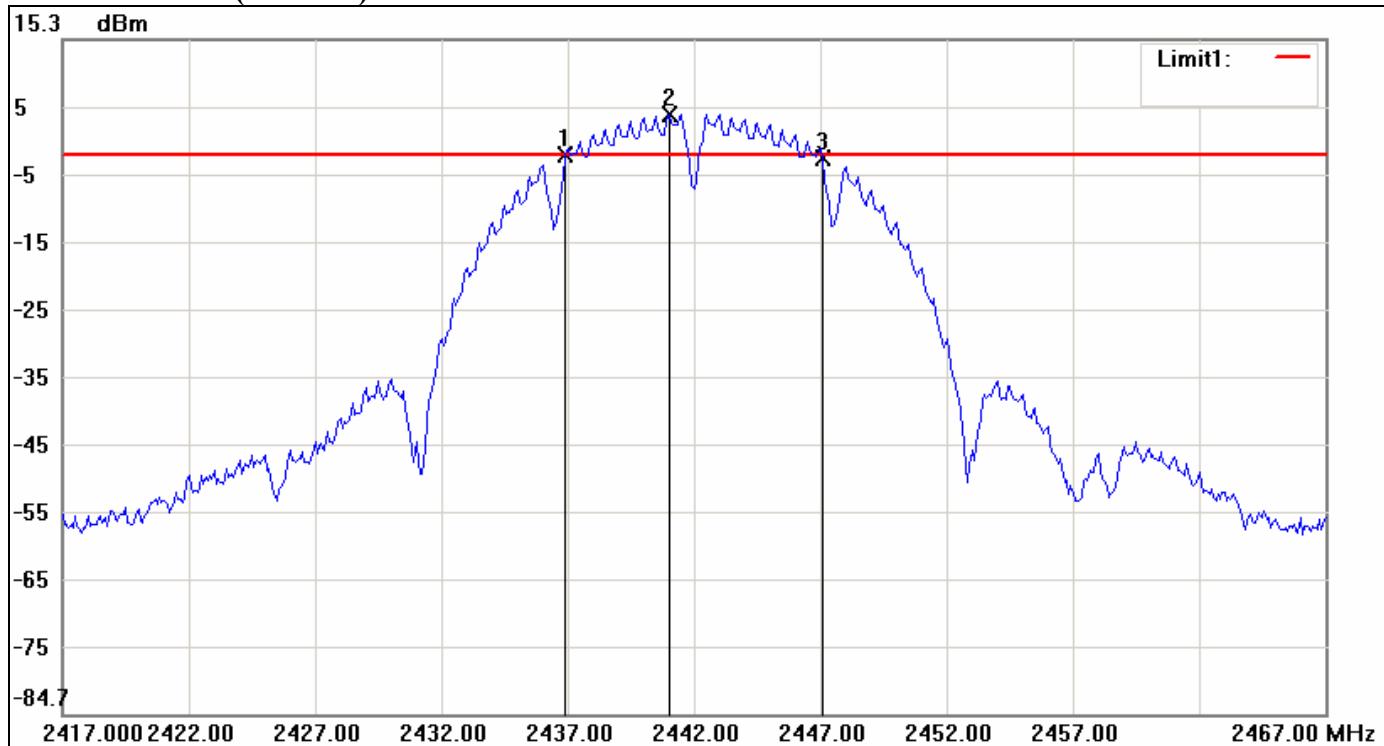


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2436.9167	-1.85	-1.77	-0.08
2	2441.0000	4.23	-1.77	6.00
3	2447.0833	-2.38	-1.77	-0.61

No.	△Frequency(MHz)	△Level(dB)
1	mk3-mk1	10.1666



### 6dB Bandwidth (CH High)

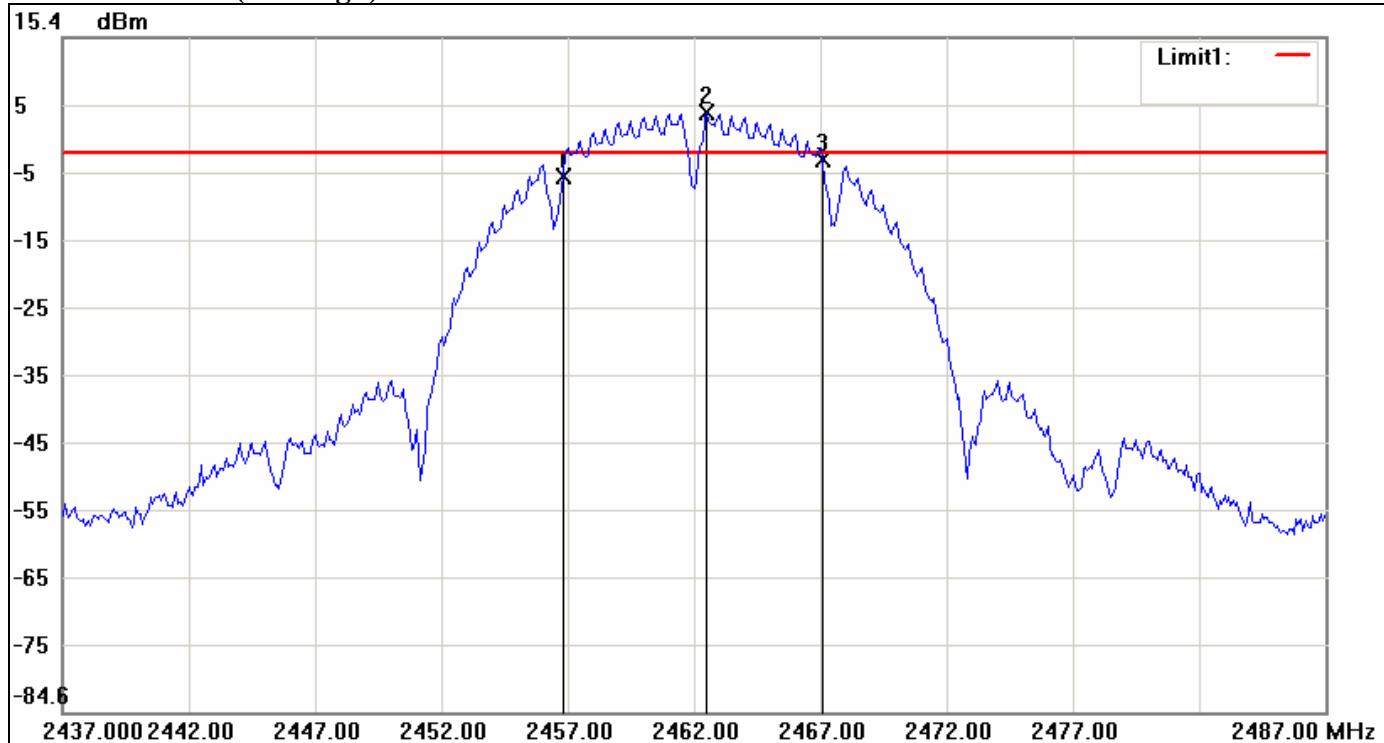


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2456.8333	-5.24	-1.81	-3.43
2	2462.5000	4.19	-1.81	6.00
3	2467.0833	-2.66	-1.81	-0.85

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	10.25	2.58



### IEEE 802.11g mode

#### 6dB Bandwidth (CH Low)

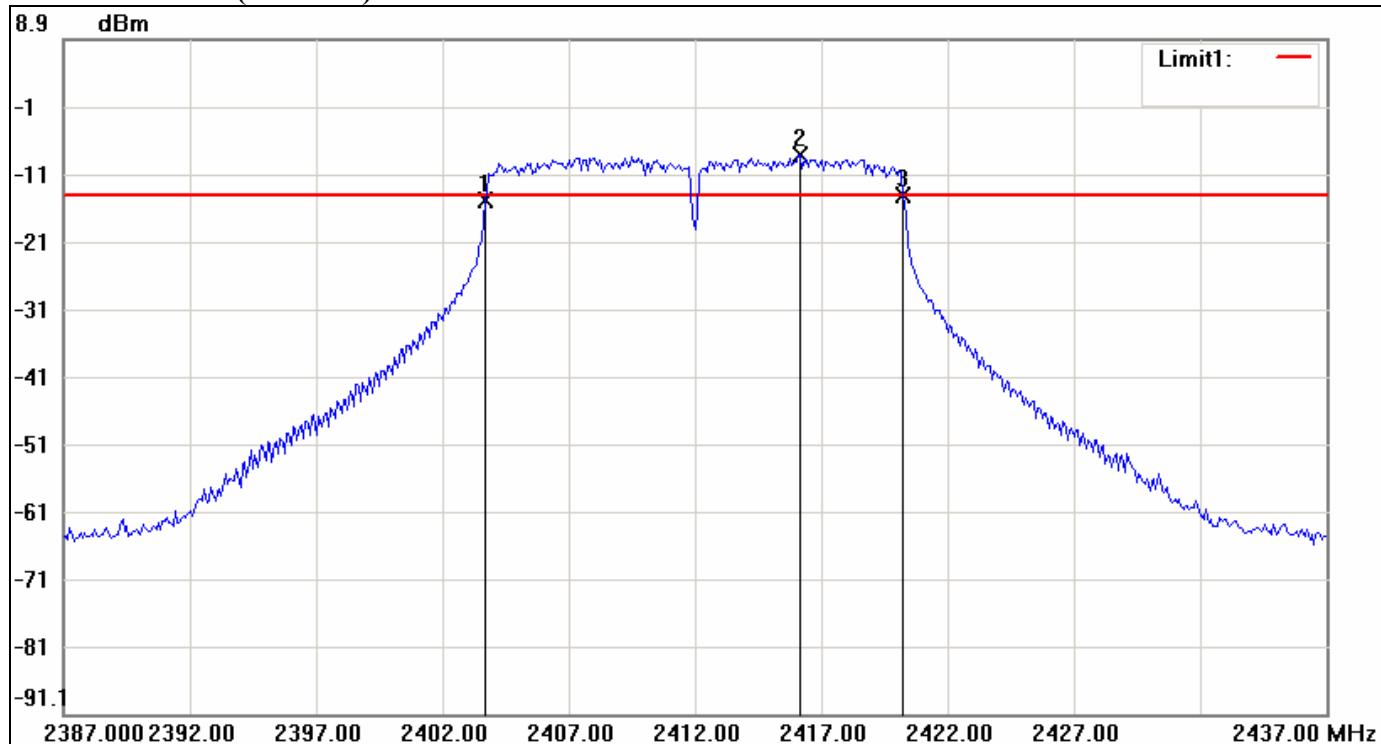


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2403.6667	-14.93	-14.17	-0.76
2	2416.1667	-8.17	-14.17	6.00
3	2420.2500	-14.24	-14.17	-0.07

No.	△Frequency(MHz)	△Level(dB)
1	mk3-mk1	16.5833



### 6dB Bandwidth (CH Mid)

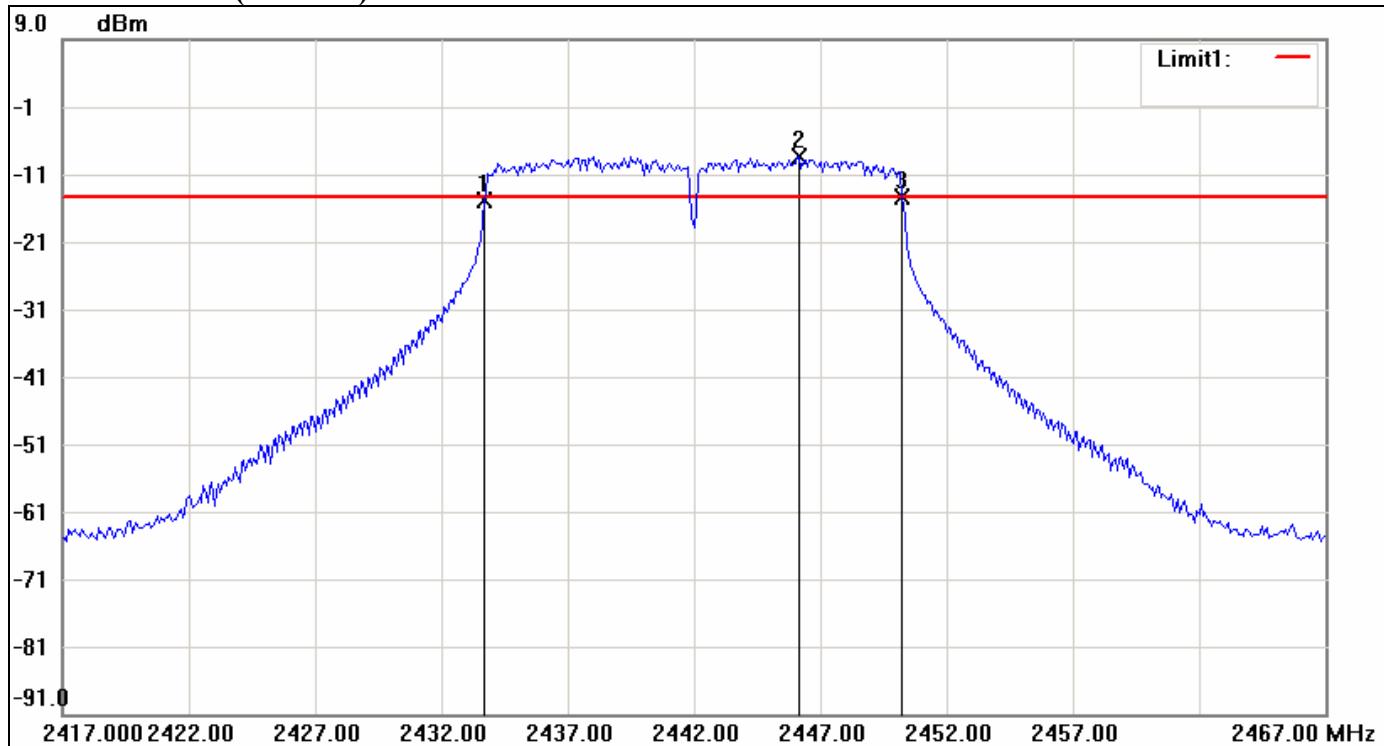


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2433.6667	-14.96	-14.25	-0.71
2	2446.1667	-8.25	-14.25	6.00
3	2450.2500	-14.33	-14.25	-0.08

No.	△Frequency(MHz)	△Level(dB)
1	mk3-mk1	16.5833



### 6dB Bandwidth (CH High)

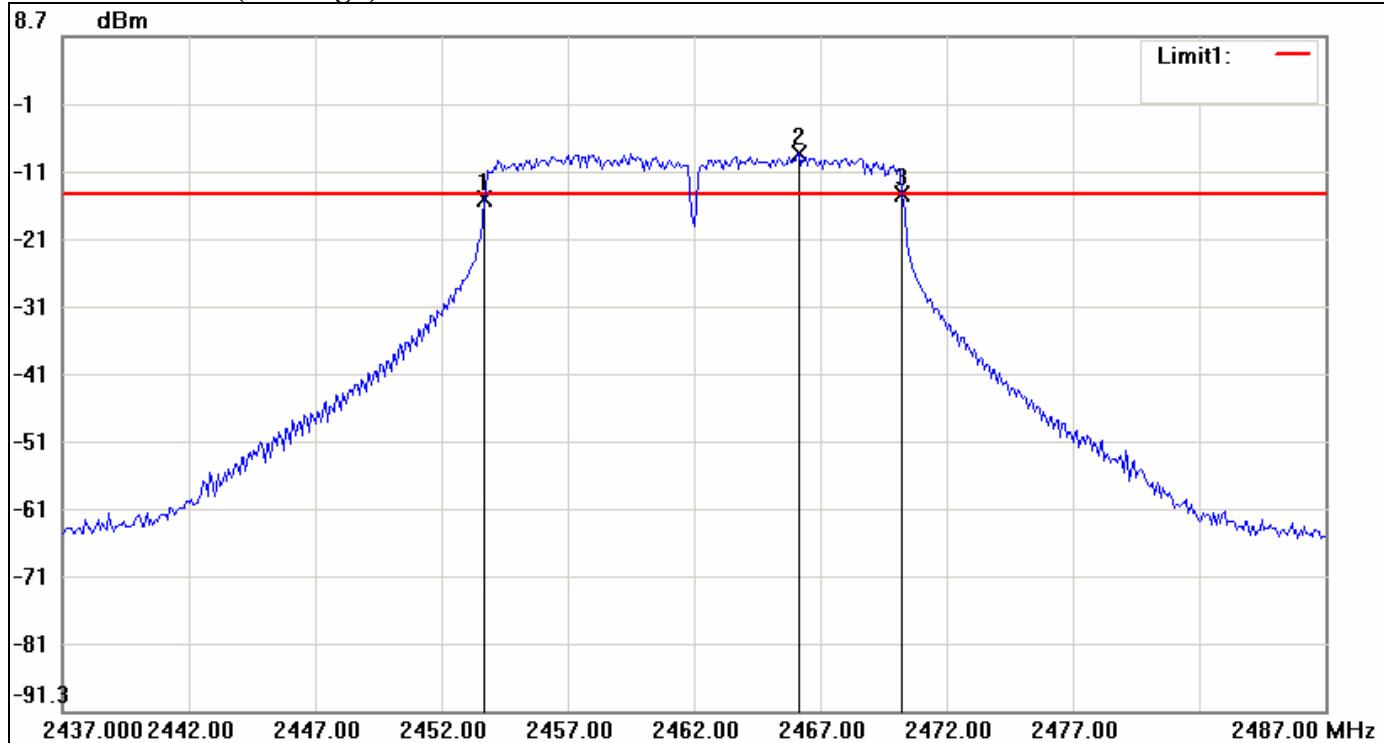


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2453.6667	-15.50	-14.59	-0.91
2	2466.1667	-8.59	-14.59	6.00
3	2470.2500	-14.68	-14.59	-0.09

No.	△Frequency(MHz)	△Level(dB)
1	mk3-mk1	16.5833



IEEE 802.11n HT 20 MHz mode

6dB Bandwidth (CH Low)

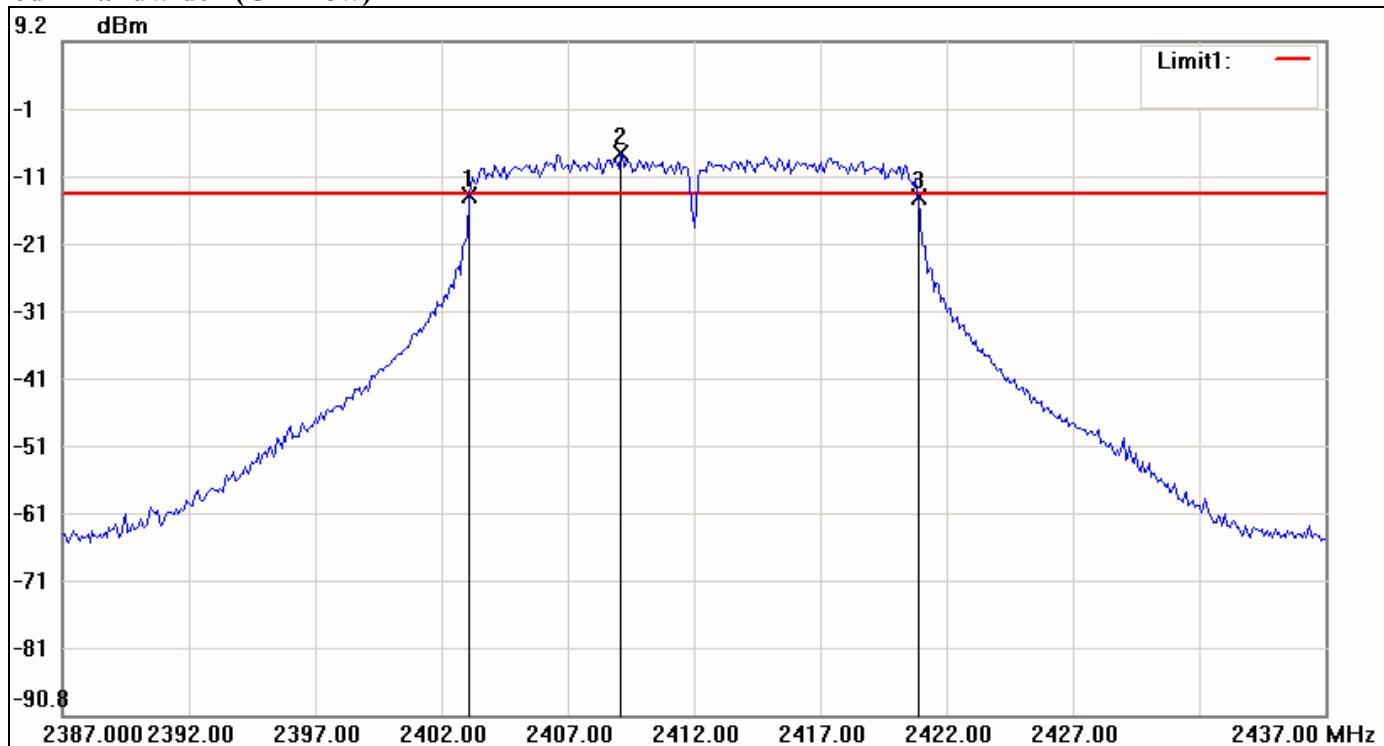


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2403.0833	-13.78	-13.44	-0.34
2	2409.0833	-7.44	-13.44	6.00
3	2420.9167	-14.00	-13.44	-0.56

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	17.8334	-0.22



### 6dB Bandwidth (CH Mid)

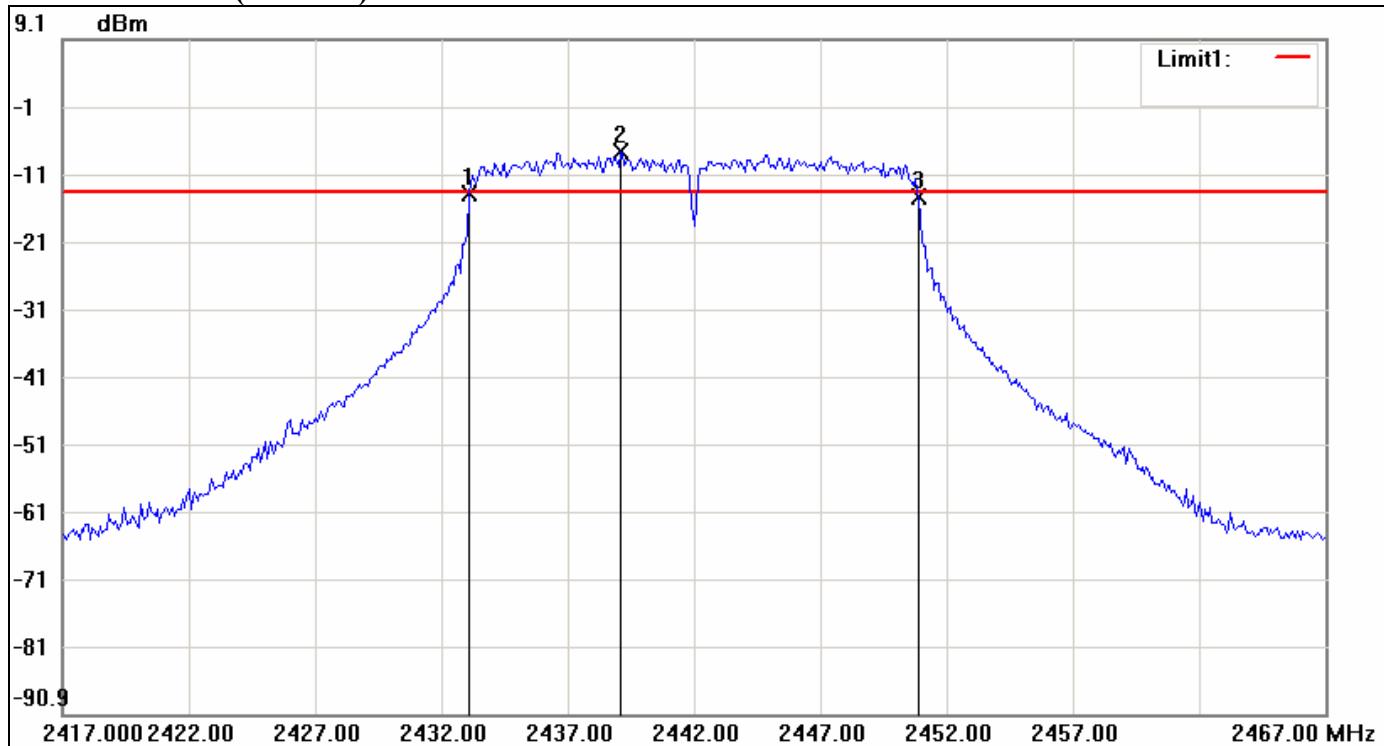


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2433.0833	-13.81	-13.54	-0.27
2	2439.0833	-7.54	-13.54	6.00
3	2450.9167	-14.18	-13.54	-0.64

No.	△Frequency(MHz)	△Level(dB)
1	mk3-mk1	17.8334



### 6dB Bandwidth (CH High)

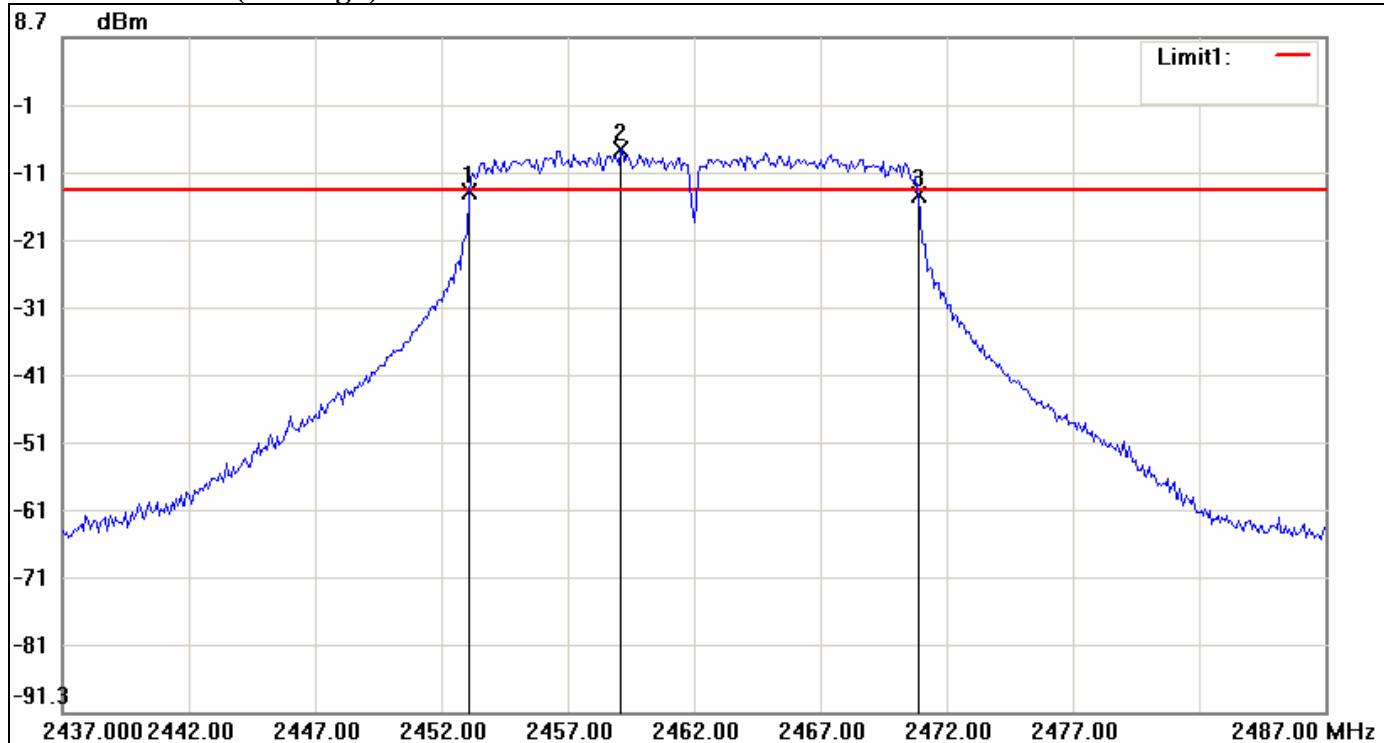


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2453.0833	-14.15	-13.89	-0.26
2	2459.0833	-7.89	-13.89	6.00
3	2470.9167	-14.63	-13.89	-0.74

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	17.8334	-0.48



**IEEE 802.11n HT 40 MHz mode**

**6dB Bandwidth (CH Low)**

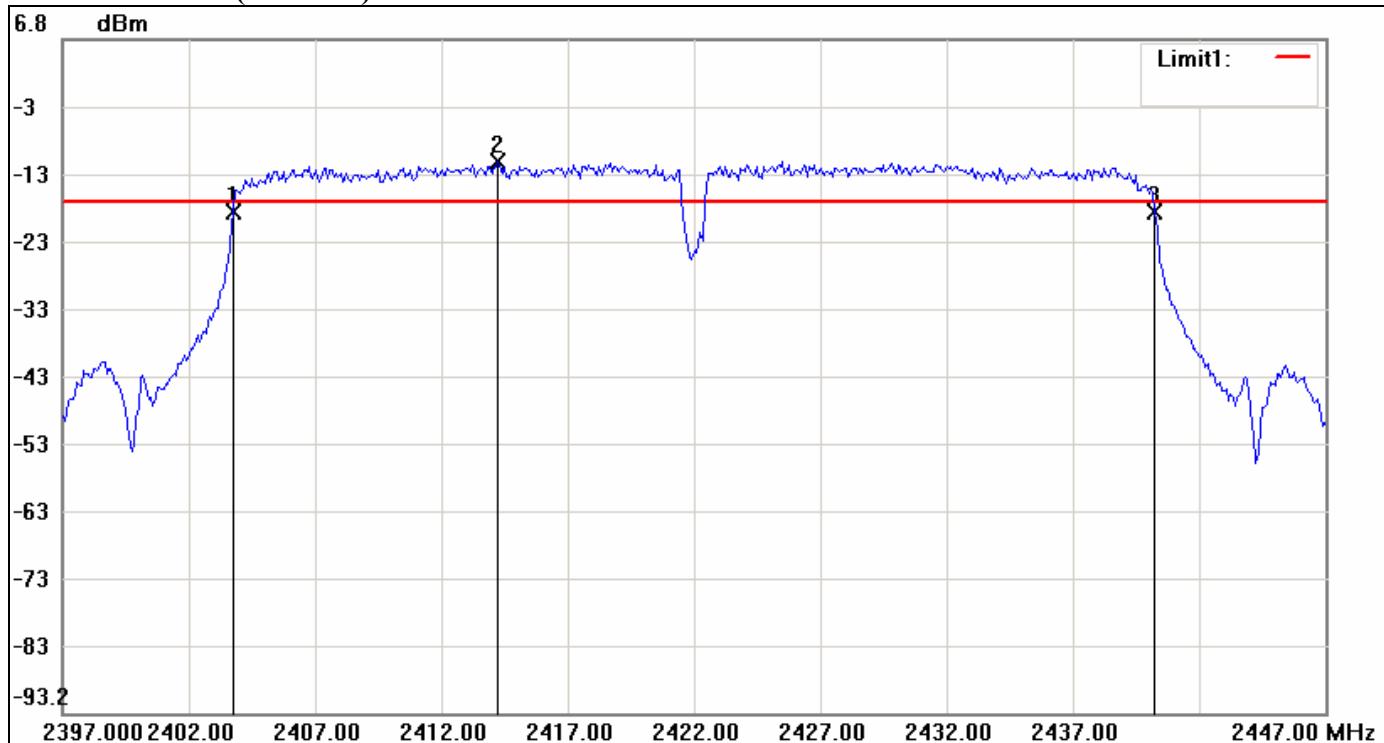


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2403.7500	-18.74	-17.28	-1.46
2	2414.2500	-11.28	-17.28	6.00
3	2440.2500	-18.78	-17.28	-1.50

No.	△Frequency(MHz)	△Level(dB)
1	mk3-mk1	36.5



### 6dB Bandwidth (CH Mid)

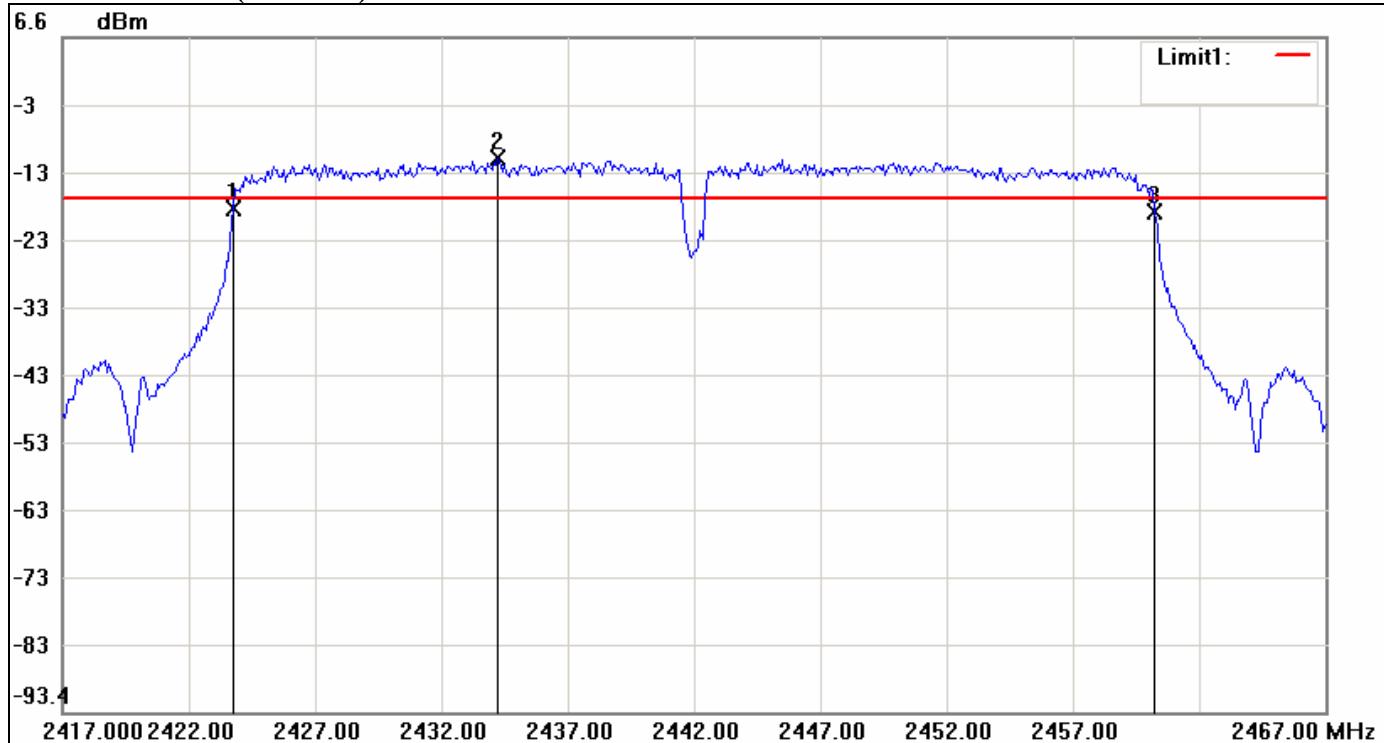


No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2423.7500	-18.76	-17.36	-1.40
2	2434.2500	-11.36	-17.36	6.00
3	2460.2500	-19.14	-17.36	-1.78

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	36.5	-0.38



### 6dB Bandwidth (CH High)

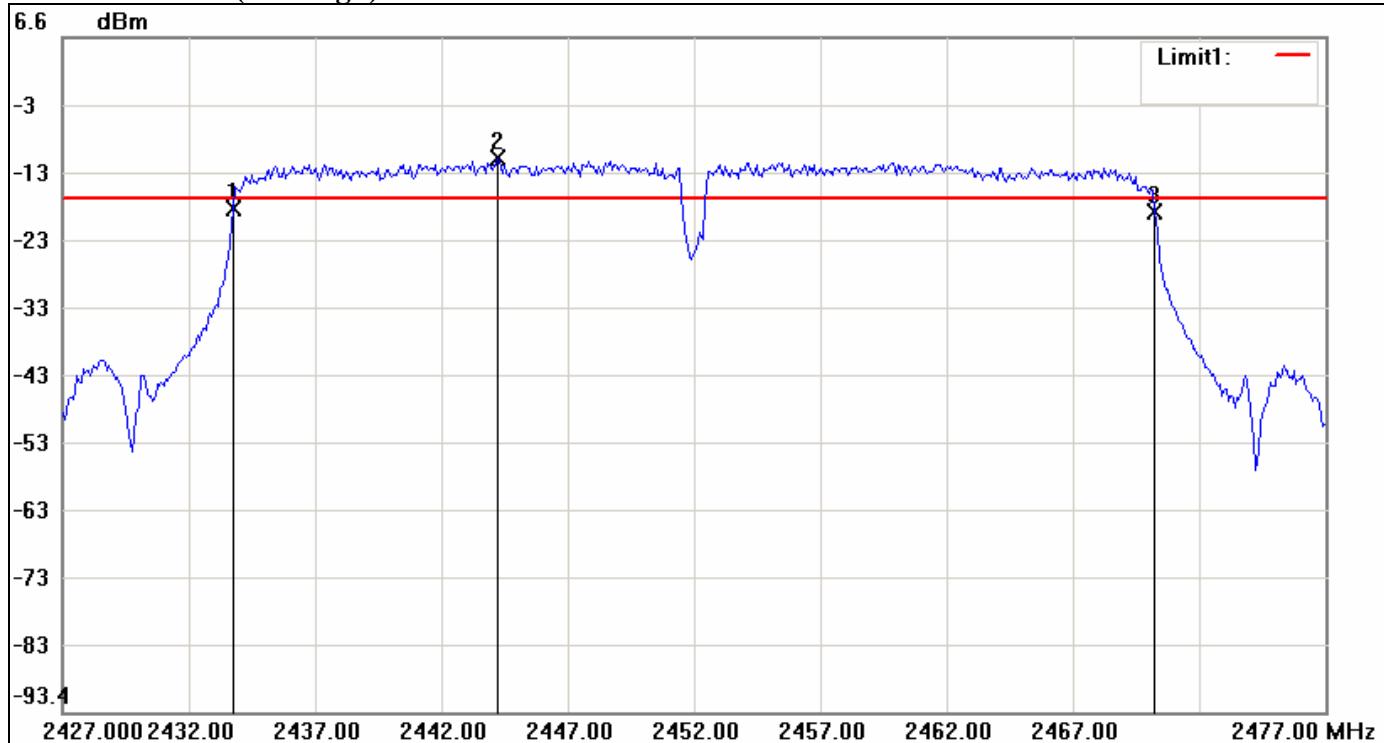

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2433.7500	-18.74	-17.41	-1.33
2	2444.2500	-11.41	-17.41	6.00
3	2470.2500	-19.32	-17.41	-1.91

No.		$\Delta$ Frequency(MHz)	$\Delta$ Level(dB)
1	mk3-mk1	36.5	-0.58




## 7.2 PEAK POWER

### LIMIT

The maximum Peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration

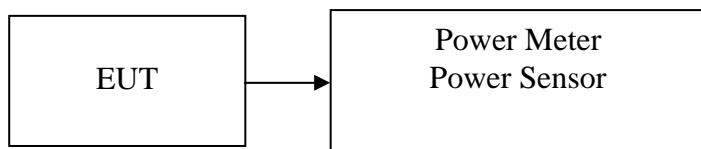

### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the Peak power detection.

### TEST RESULTS

*No non-compliance noted*



## **Test Data**

### **Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.74	0.0472	1.00	PASS
Mid	2442	17.26	0.0532		PASS
High	2462	17.41	0.0551		PASS

### **Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.22	0.0419	1.00	PASS
Mid	2442	16.14	0.0411		PASS
High	2462	16.01	0.0399		PASS

### **Test mode: IEEE 802.11n HT 20 MHz mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.09	0.0406	1.00	PASS
Mid	2442	16.12	0.0409		PASS
High	2462	16.06	0.0404		PASS

### **Test mode: IEEE 802.11n HT 40 MHz mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	16.18	0.0415	1.00	PASS
Mid	2442	16.17	0.0414		PASS
High	2452	16.11	0.0408		PASS




## 7.3 AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the Peak power detection.



## **TEST RESULTS**

*No non-compliance noted*

### **Test Data**

#### **Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	14.34	0.0272
Mid	2442	14.89	0.0308
High	2462	14.96	0.0313

#### **Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	6.67	0.0046
Mid	2442	6.51	0.0045
High	2462	6.37	0.0043

#### **Test mode: IEEE 802.11n HT 20 MHz mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	7.02	0.0050
Mid	2442	6.67	0.0046
High	2462	6.88	0.0049

#### **Test mode: IEEE 802.11n HT 40 MHz mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2422	6.67	0.0046
Mid	2442	6.6	0.0046
High	2452	6.47	0.0044




## 7.4 BAND EDGES MEASUREMENT

### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the Peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### Test Configuration

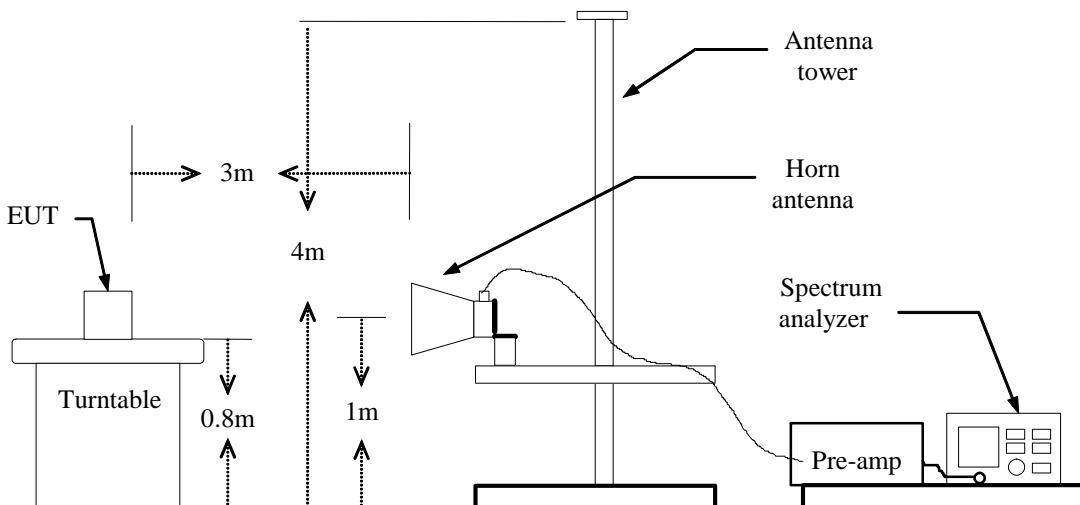

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS


Refer to attach spectrum analyzer data chart.



### Band Edges (IEEE 802.11b mode / CH Low)


Detector mode: Peak

Polarity: Vertical

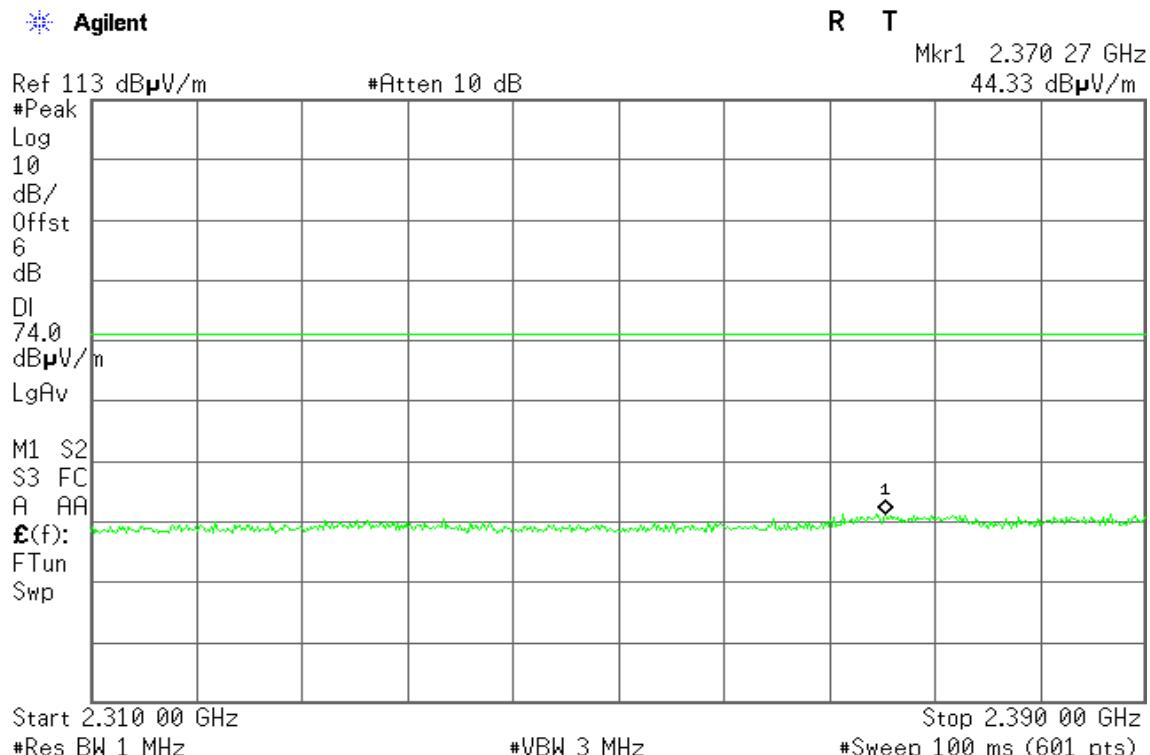

Detector mode: Average


Polarity: Vertical

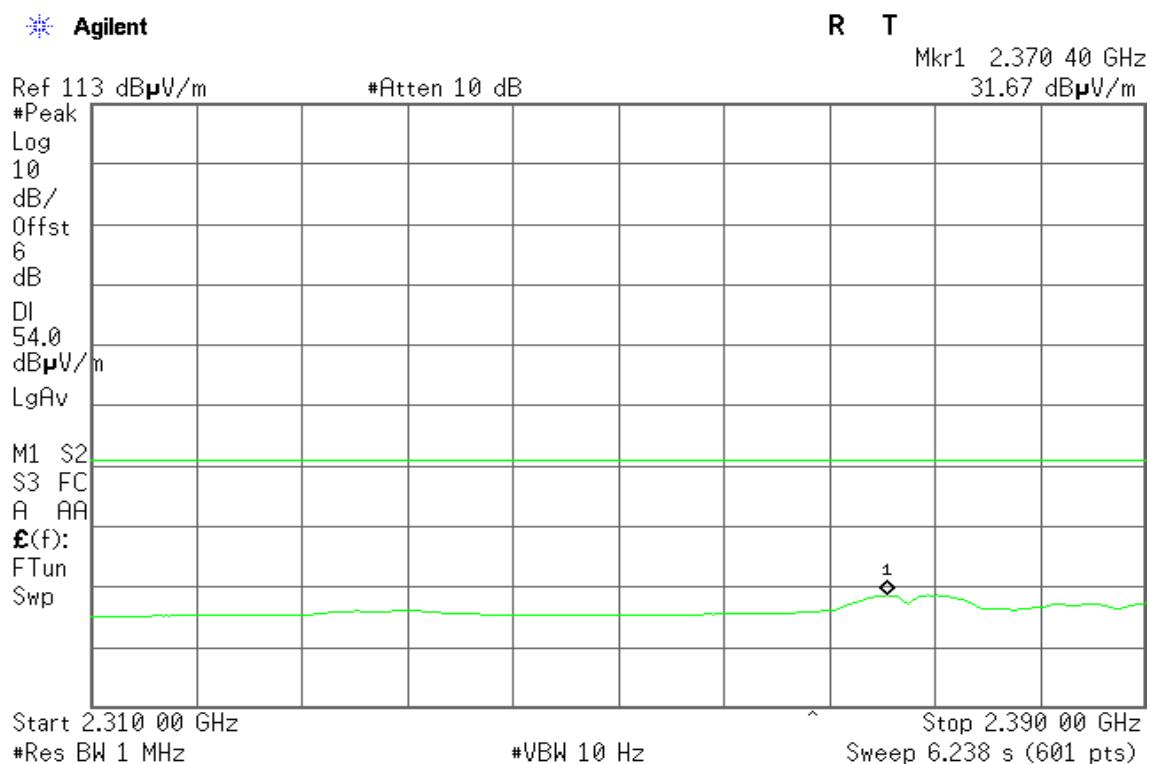




**Detector mode: Peak**

**Polarity: Horizontal**

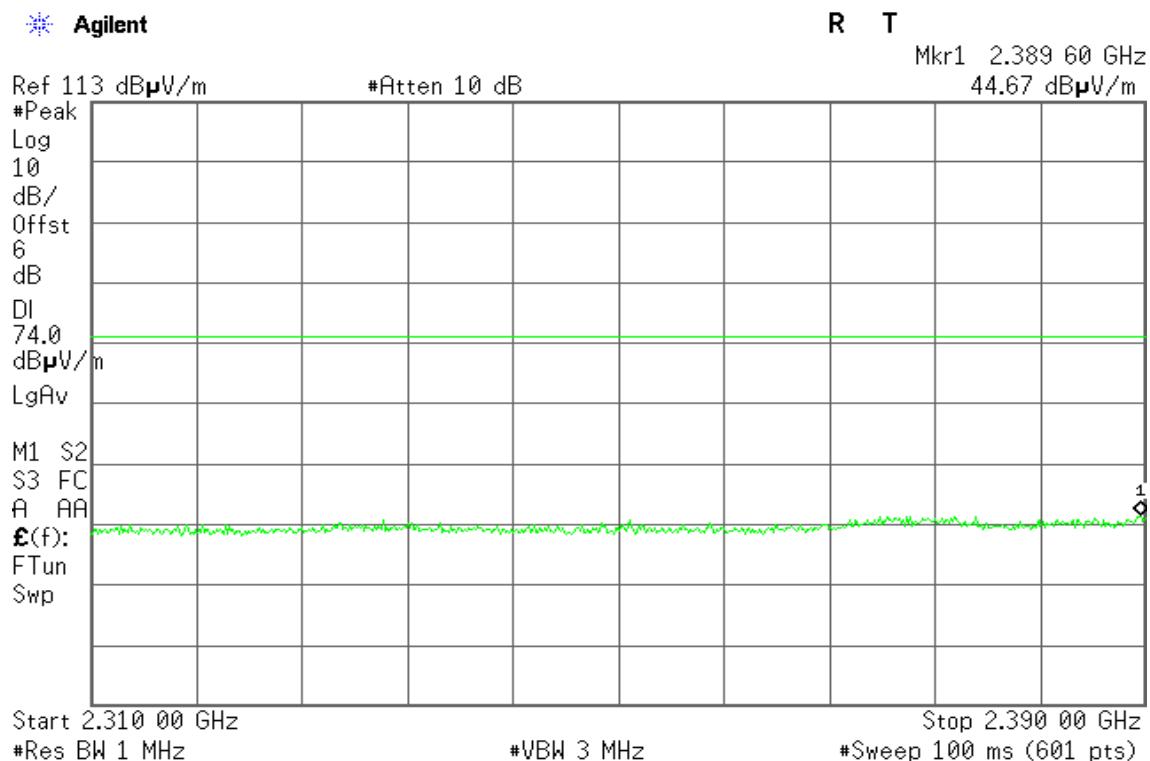

**Detector mode: Average**

**Polarity: Horizontal**

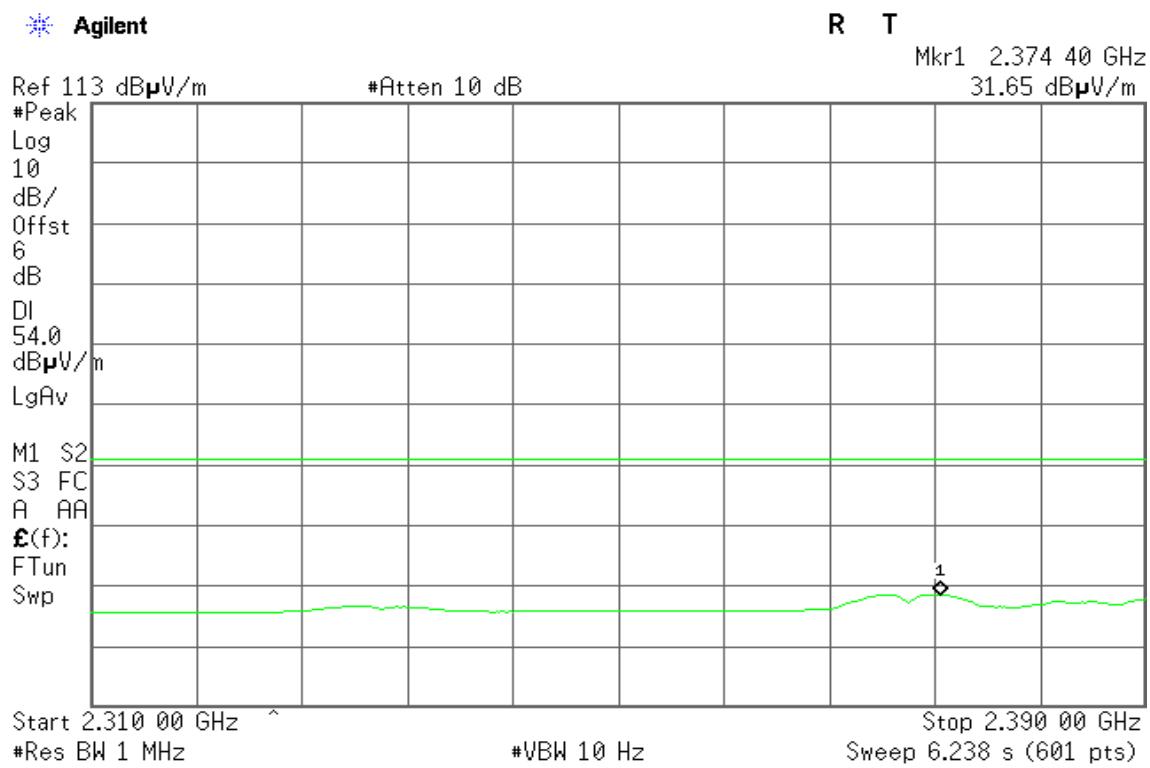




**Band Edges (IEEE 802.11b mode / CH High)**


**Detector mode: Peak**

**Polarity: Vertical**

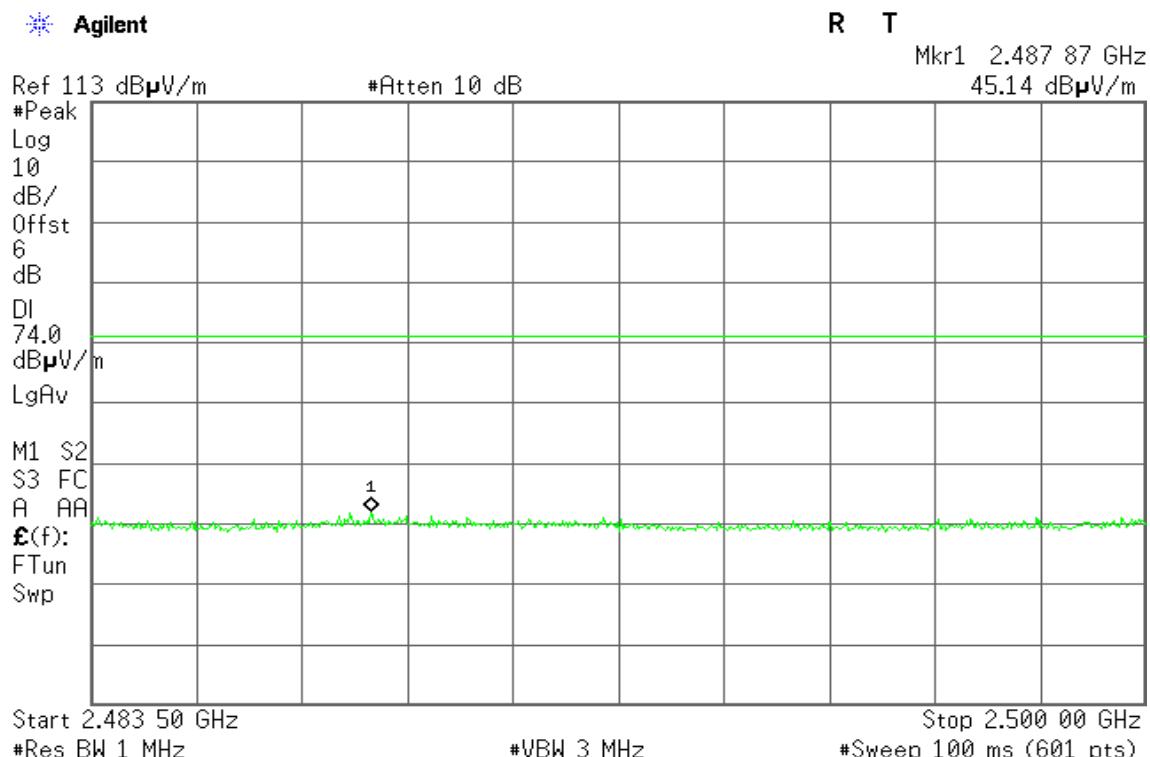

**Detector mode: Average**


**Polarity: Vertical**

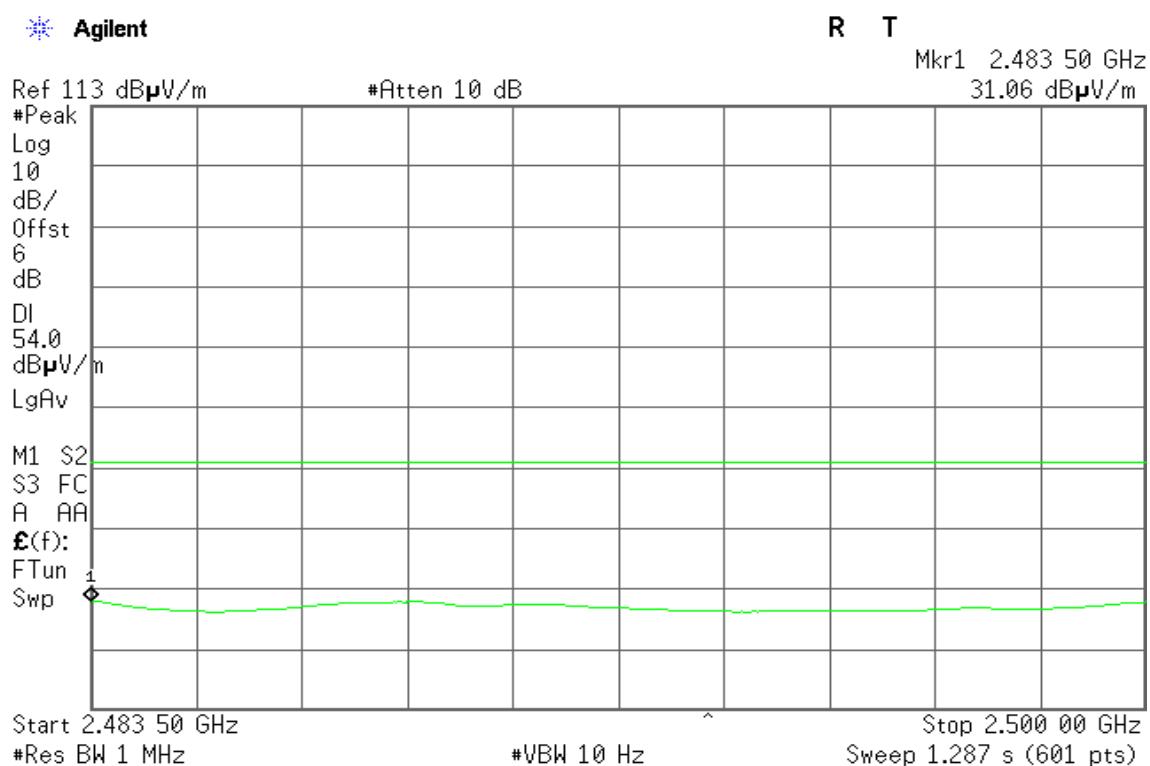




**Detector mode: Peak**

**Polarity: Horizontal**

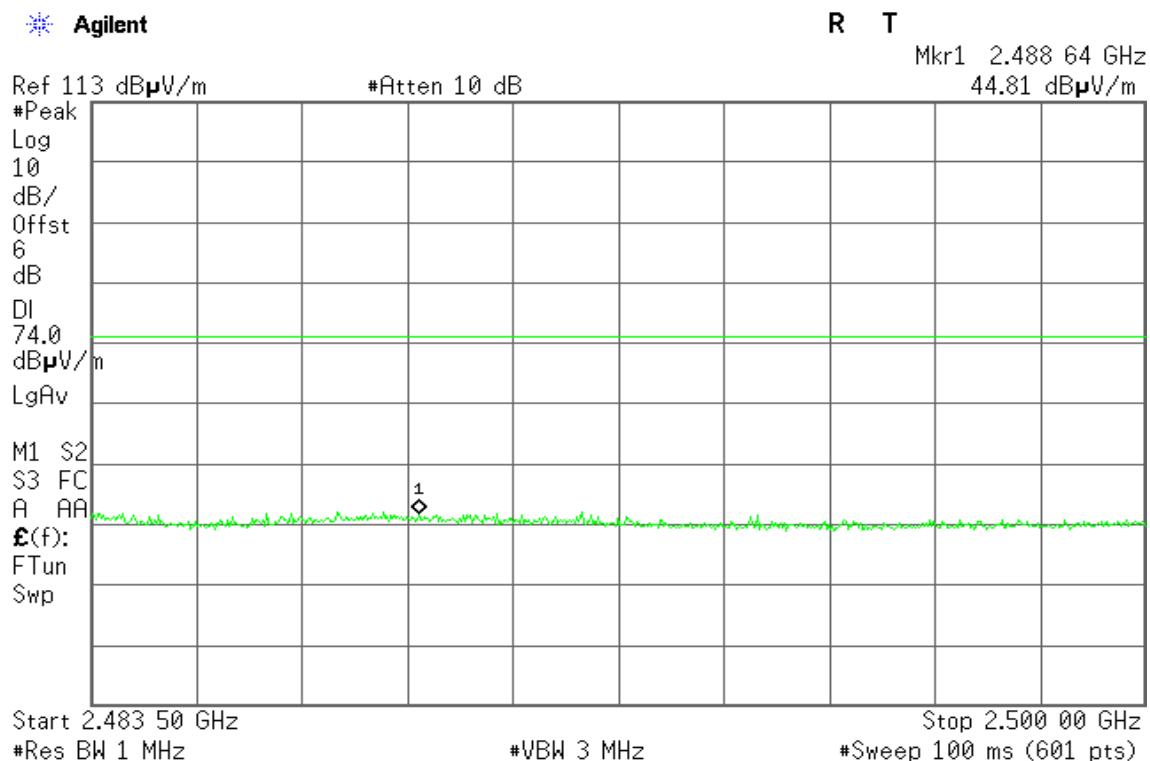

**Detector mode: Average**

**Polarity: Horizontal**

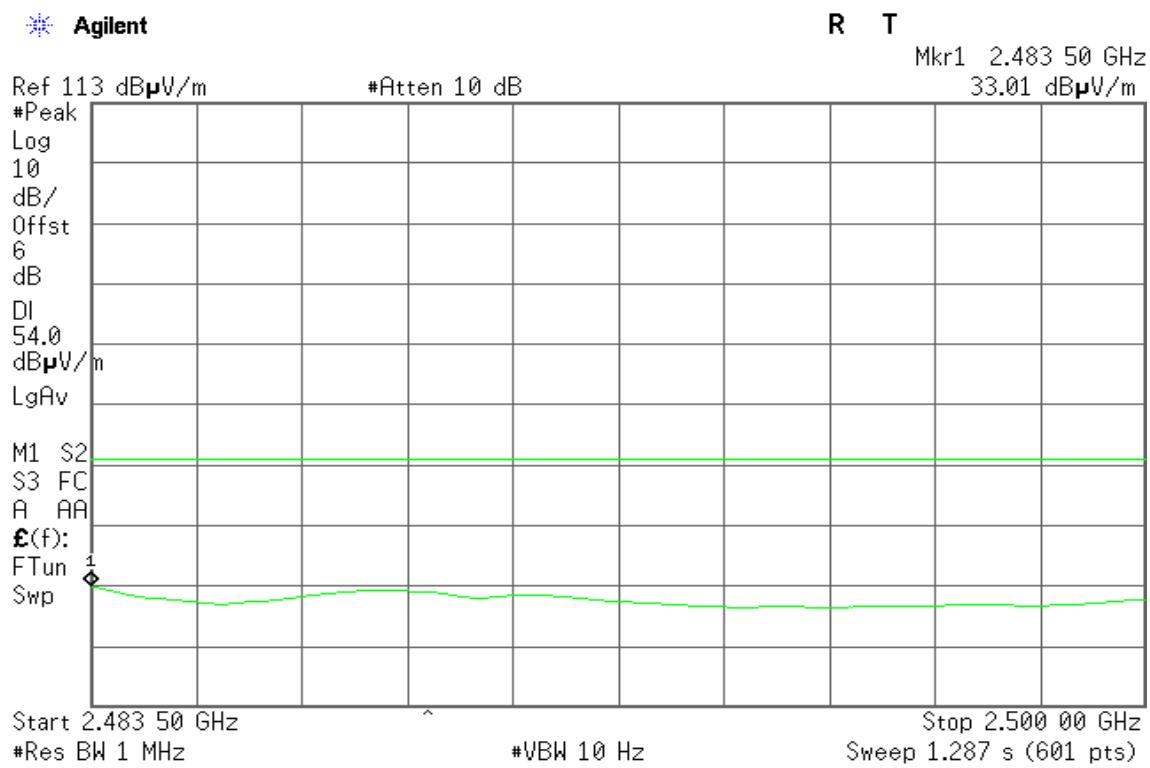




**Band Edges (IEEE 802.11g mode / CH Low)**


**Detector mode: Peak**

**Polarity: Vertical**

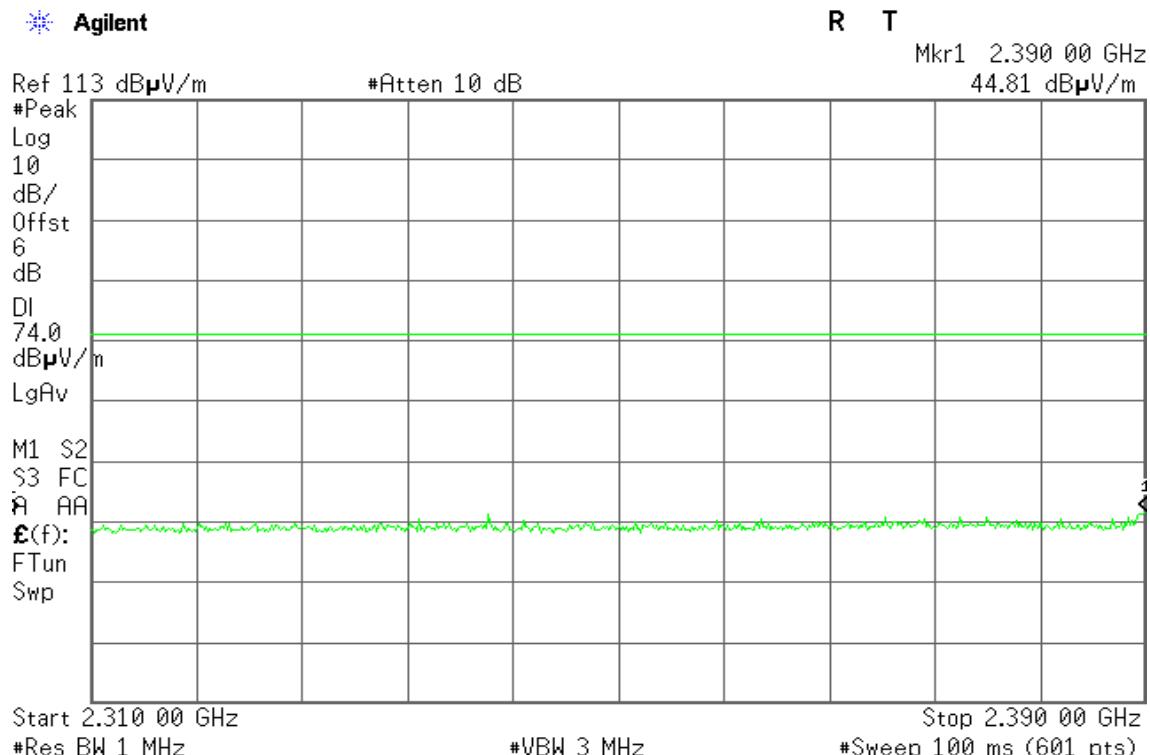

**Detector mode: Average**


**Polarity: Vertical**

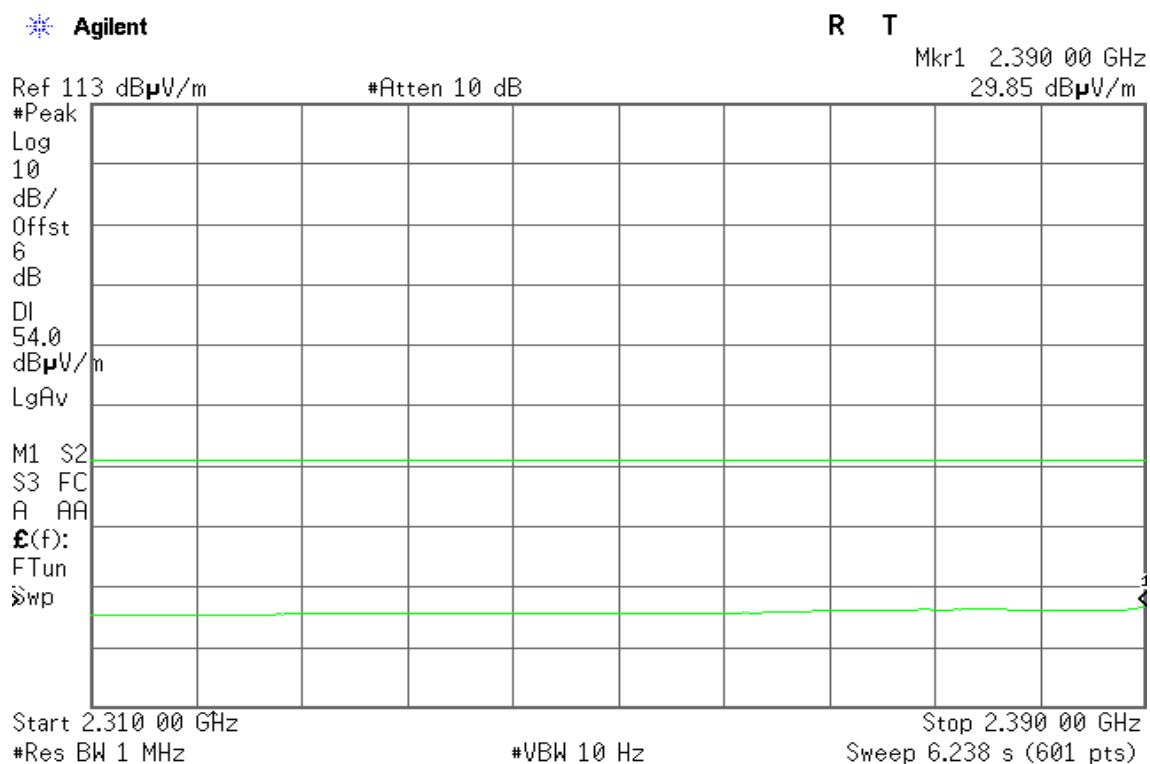




**Detector mode: Peak**

**Polarity: Horizontal**

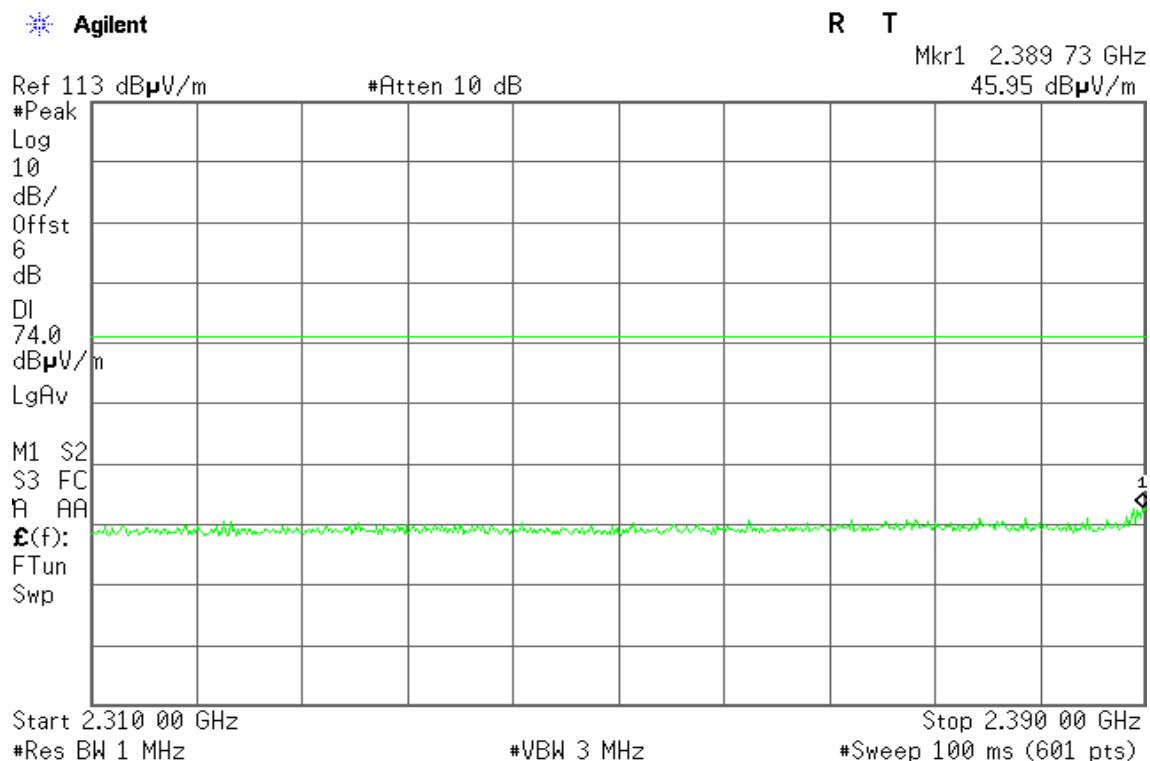

**Detector mode: Average**

**Polarity: Horizontal**

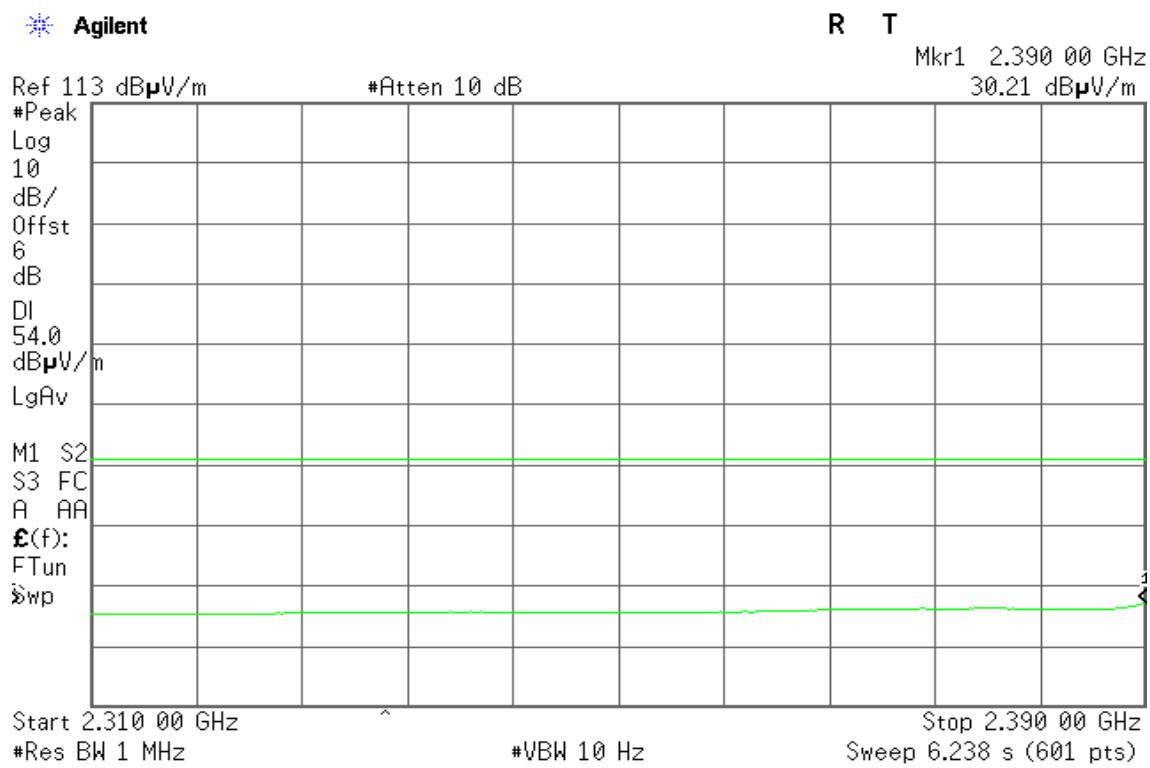




### Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

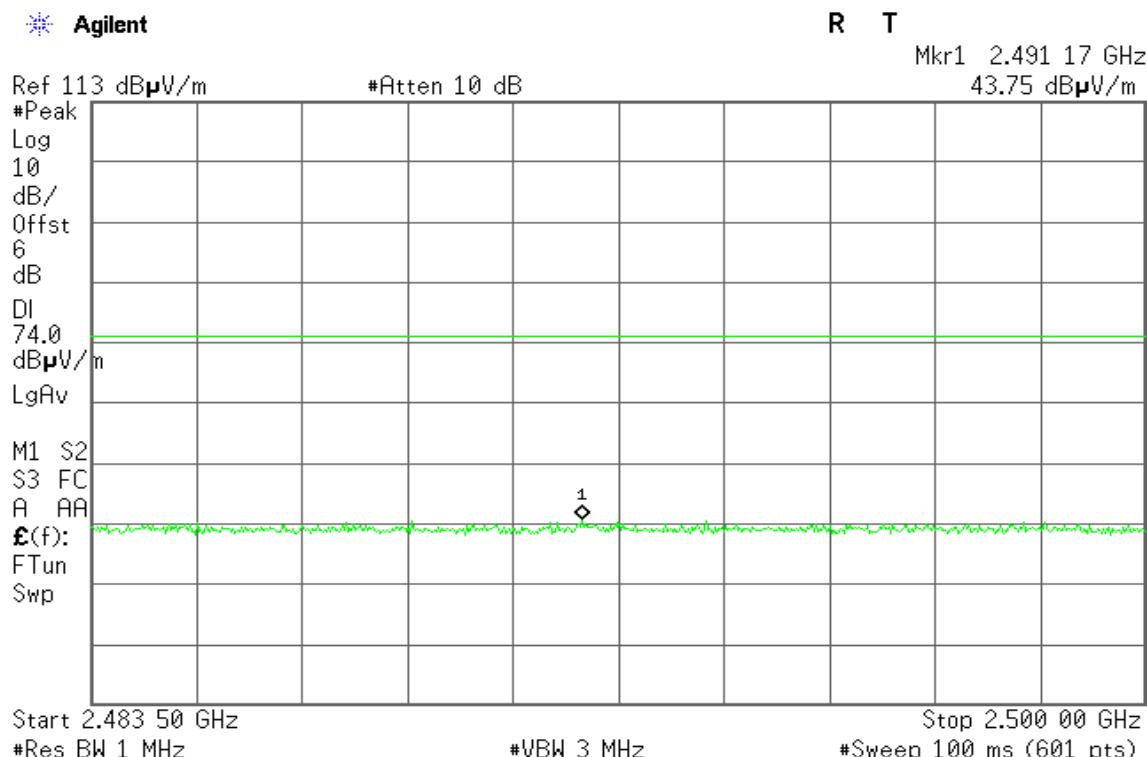

Detector mode: Average


Polarity: Vertical

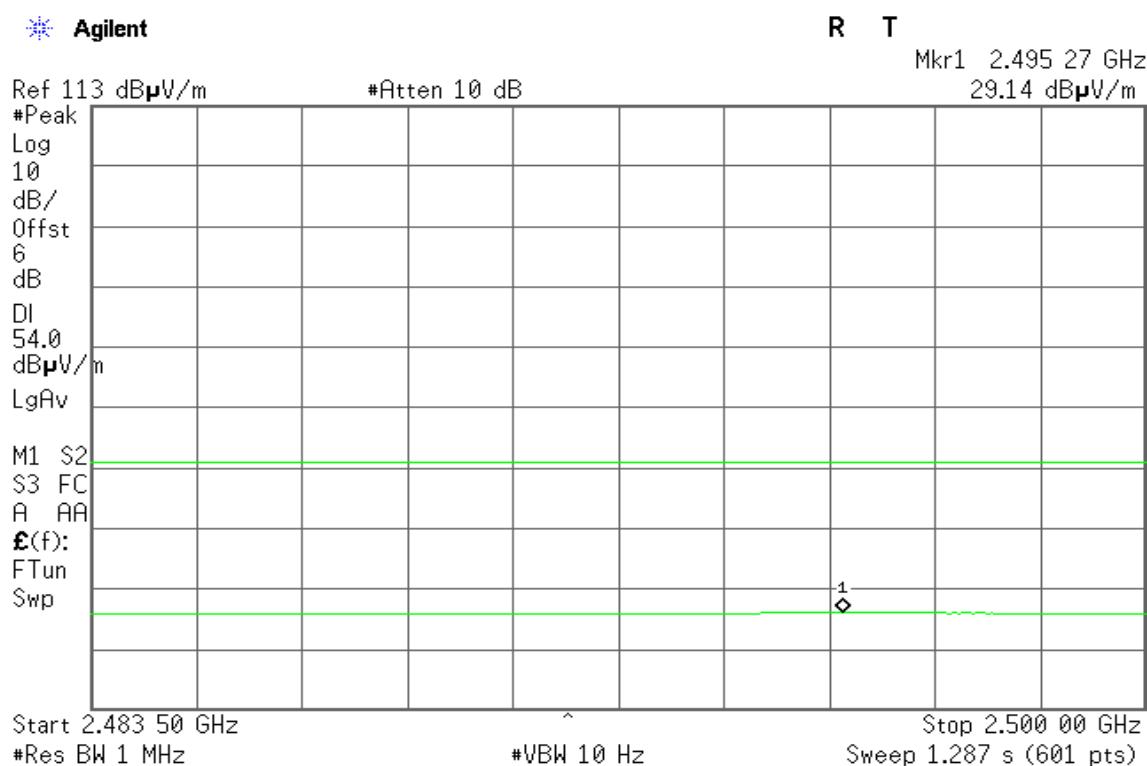




**Detector mode: Peak**

**Polarity: Horizontal**

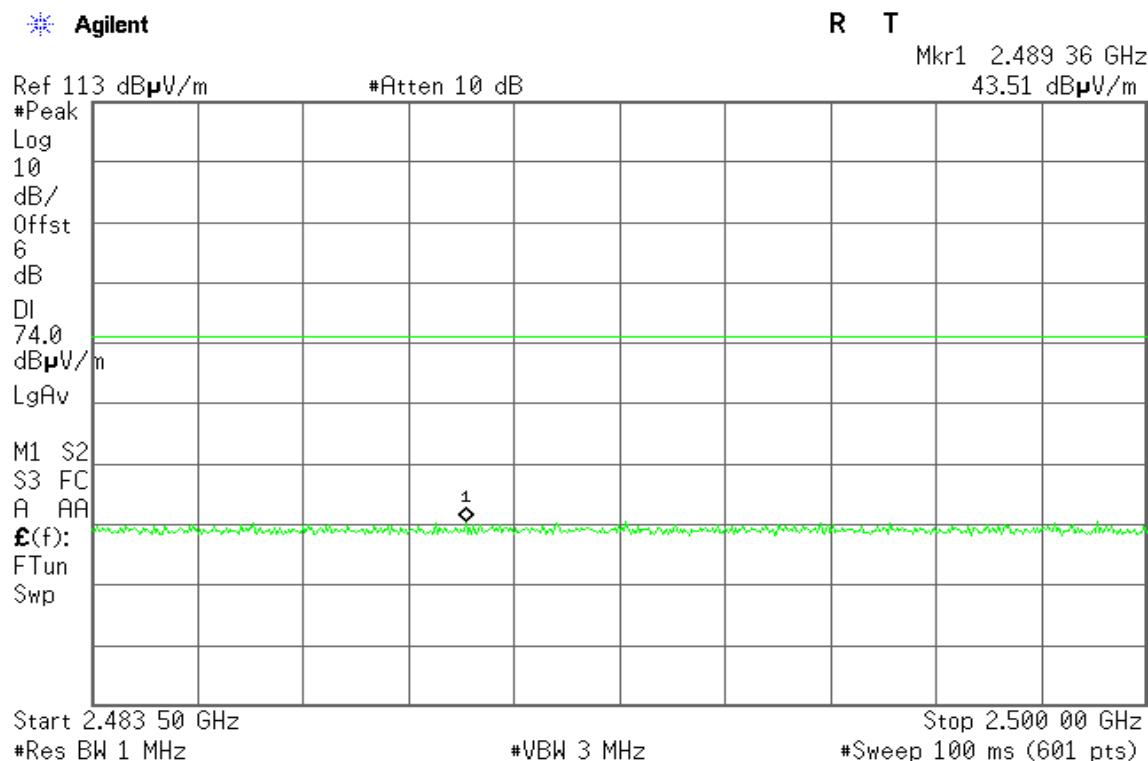

**Detector mode: Average**

**Polarity: Horizontal**

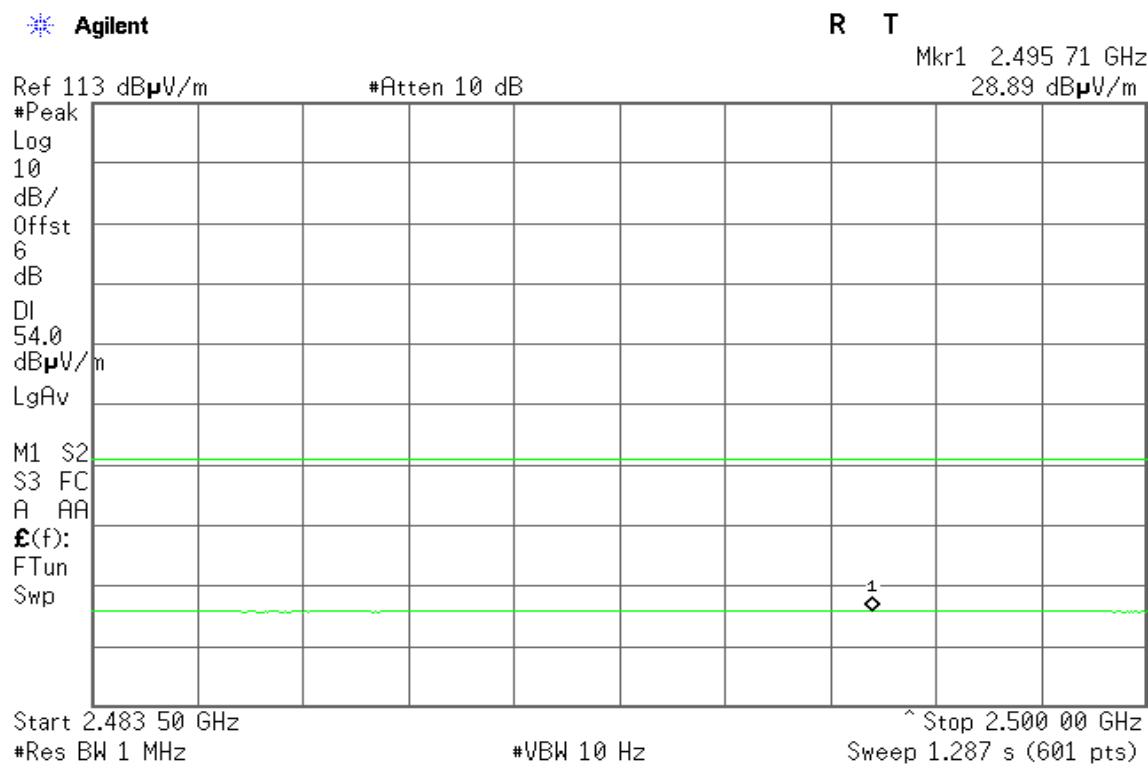




**Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)**


**Detector mode: Peak**

**Polarity: Vertical**

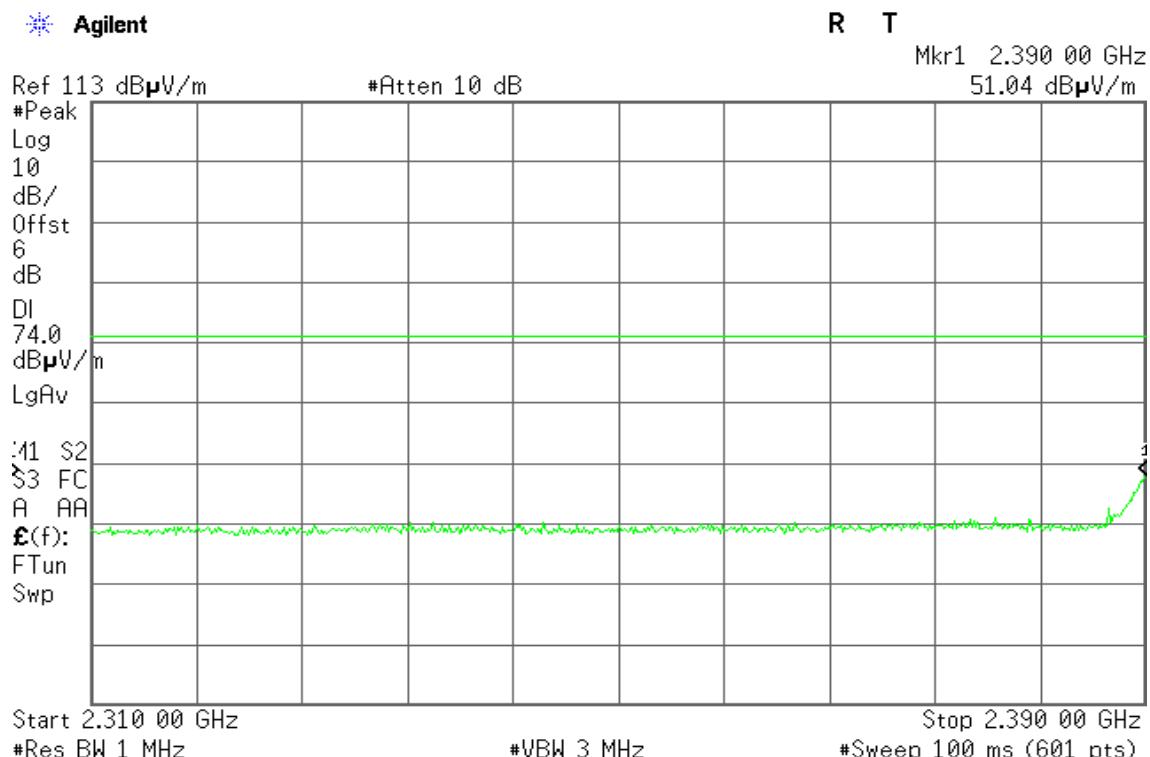

**Detector mode: Average**


**Polarity: Vertical**

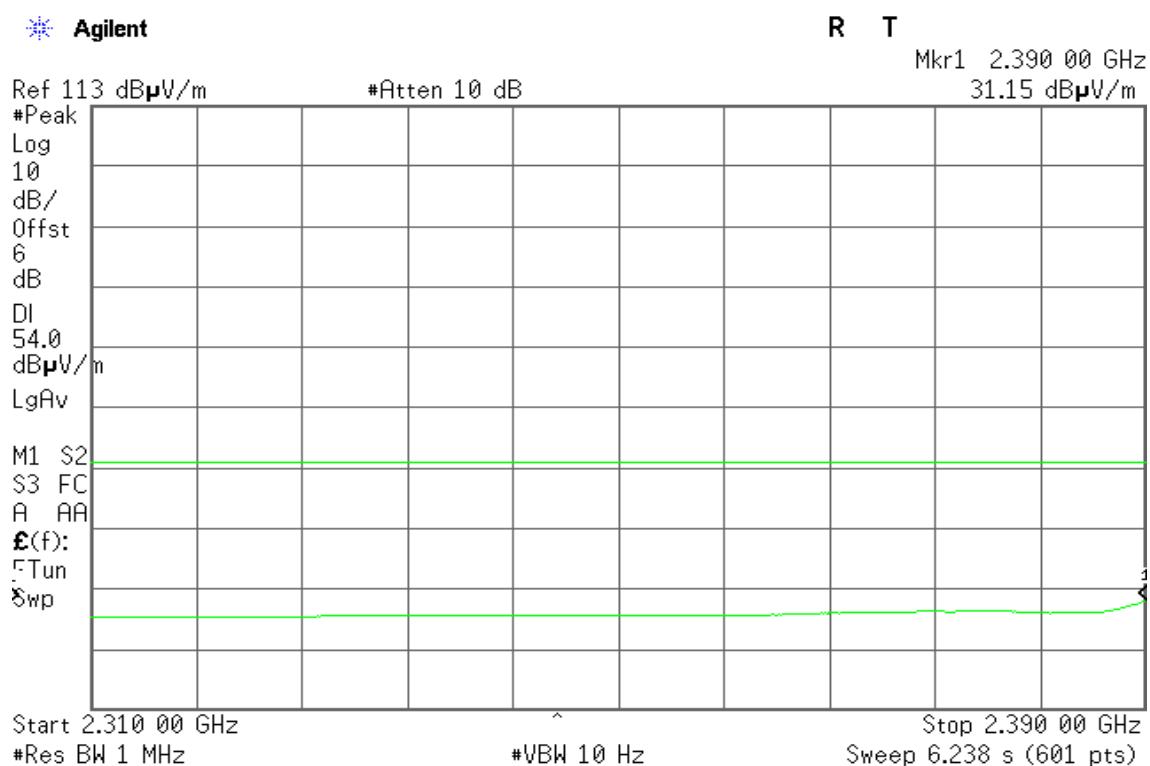




**Detector mode: Peak**

**Polarity: Horizontal**

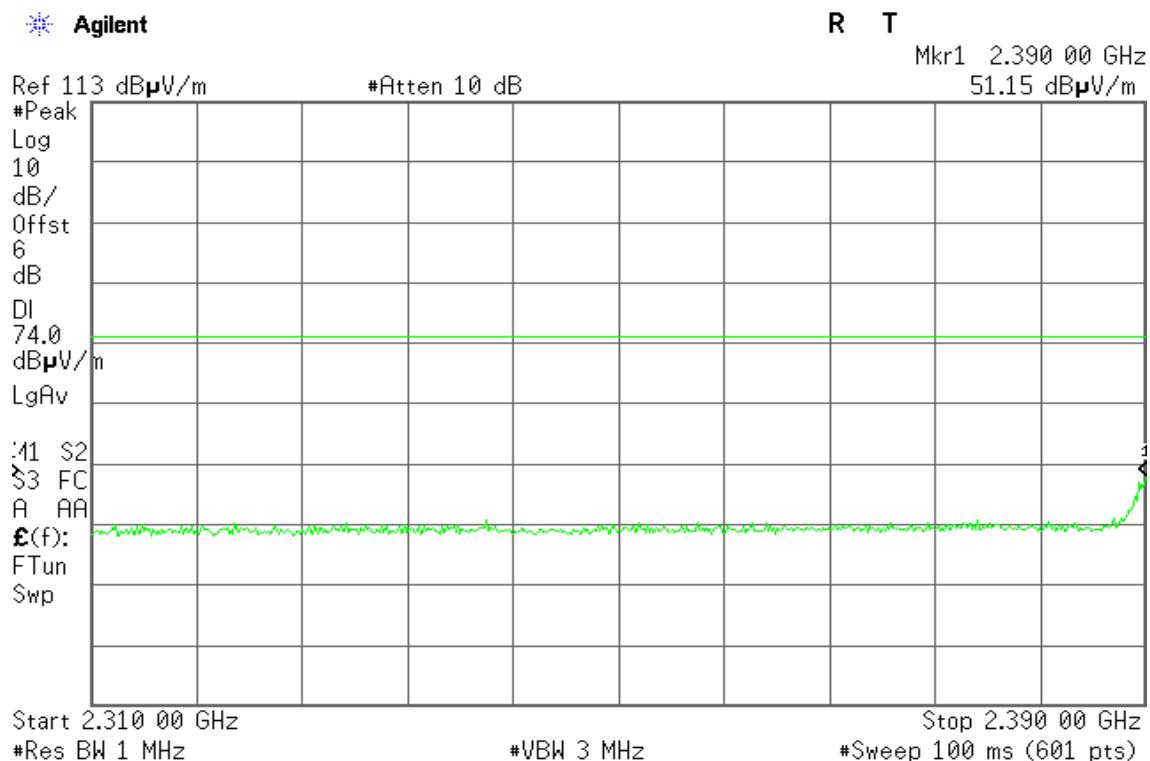

**Detector mode: Average**

**Polarity: Horizontal**

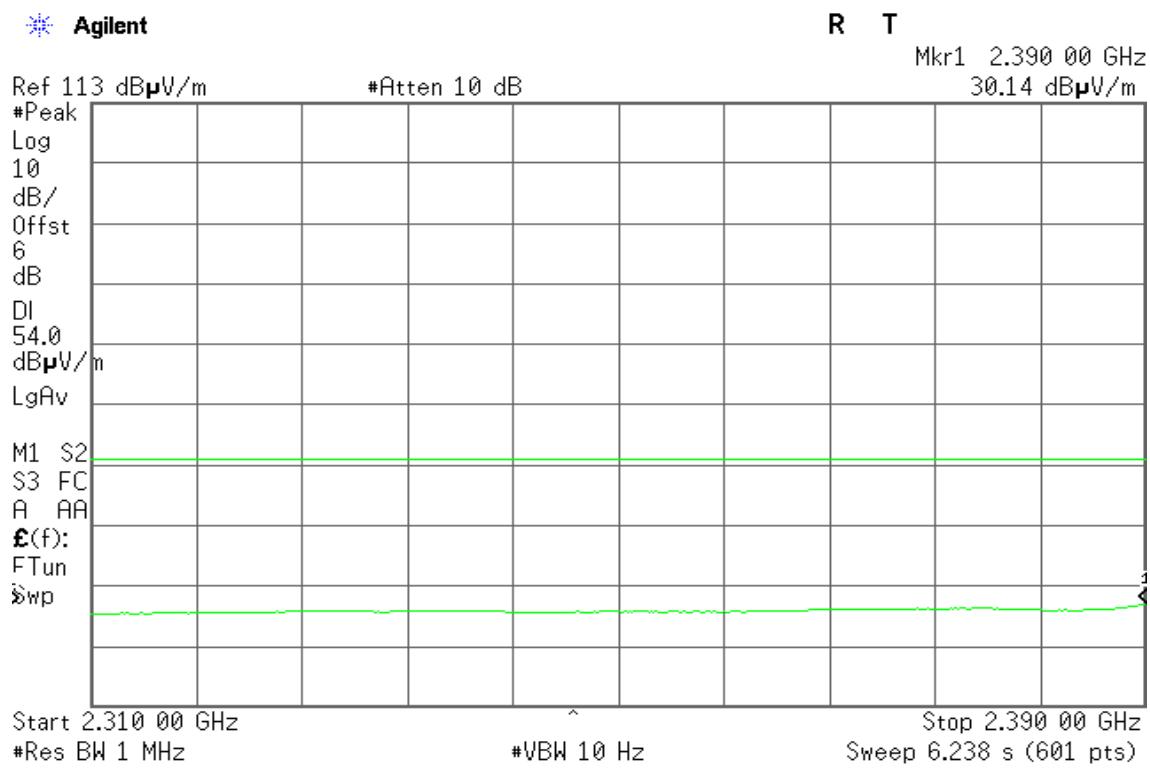




**Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)**


**Detector mode: Peak**

**Polarity: Vertical**

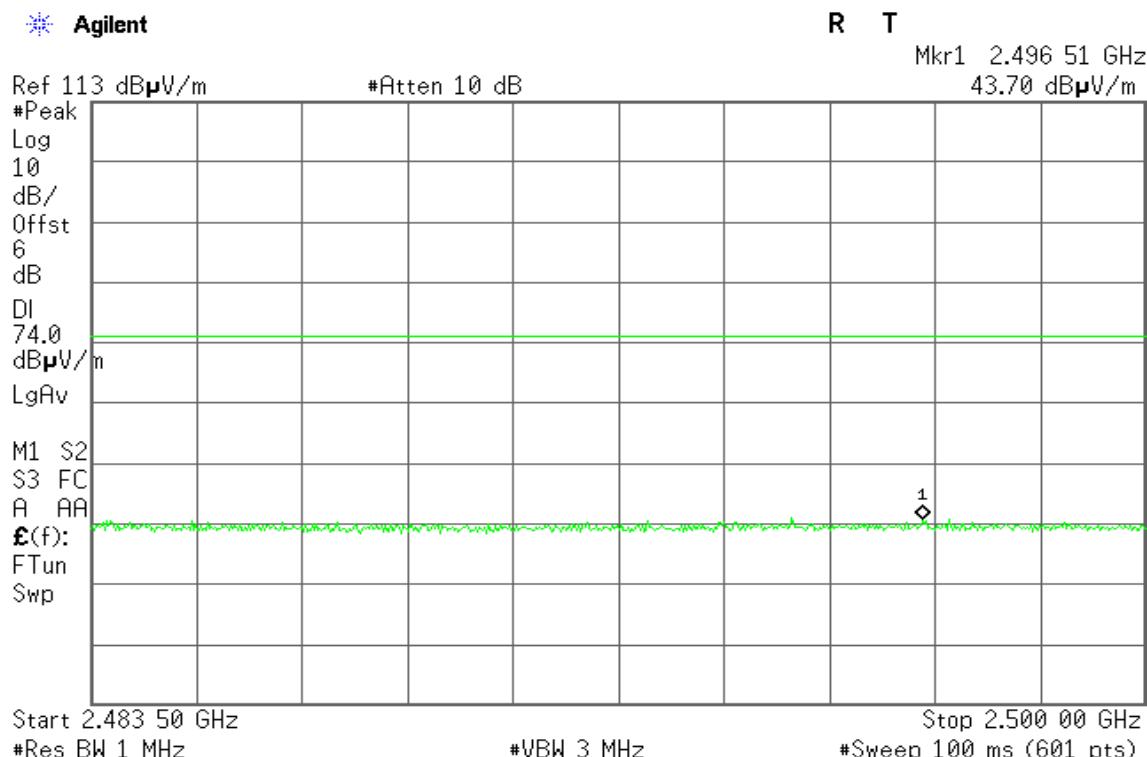

**Detector mode: Average**


**Polarity: Vertical**

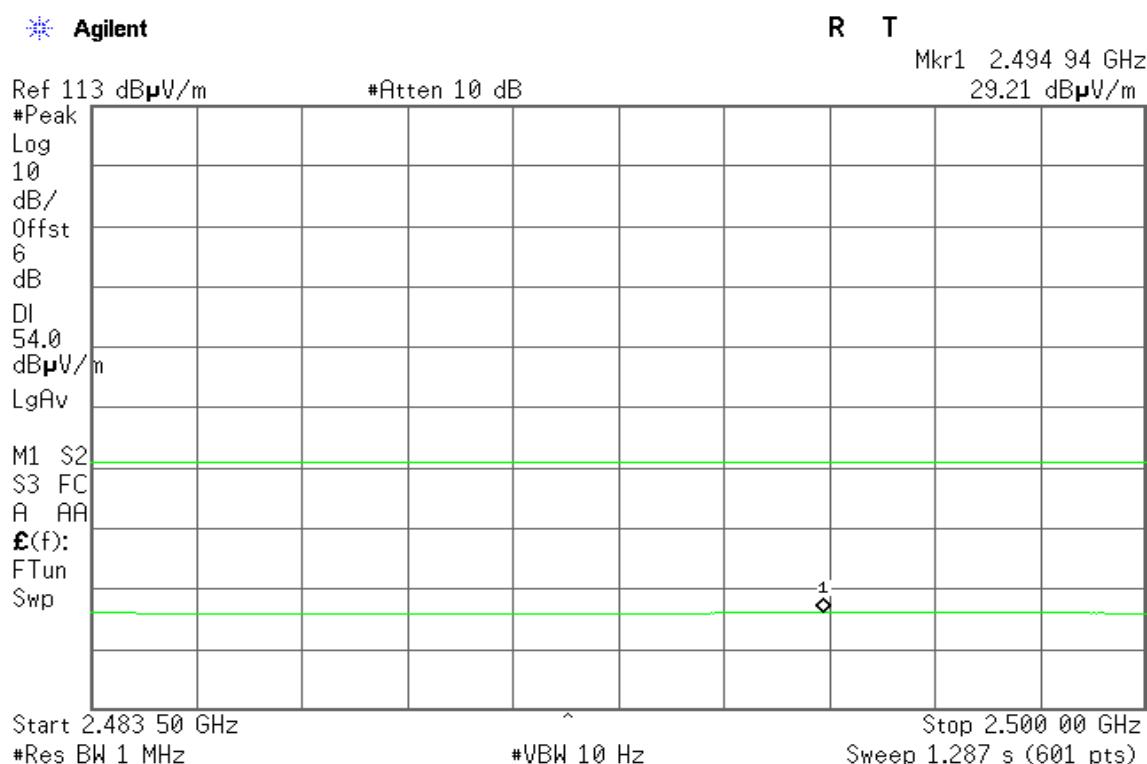




**Detector mode: Peak**

**Polarity: Horizontal**

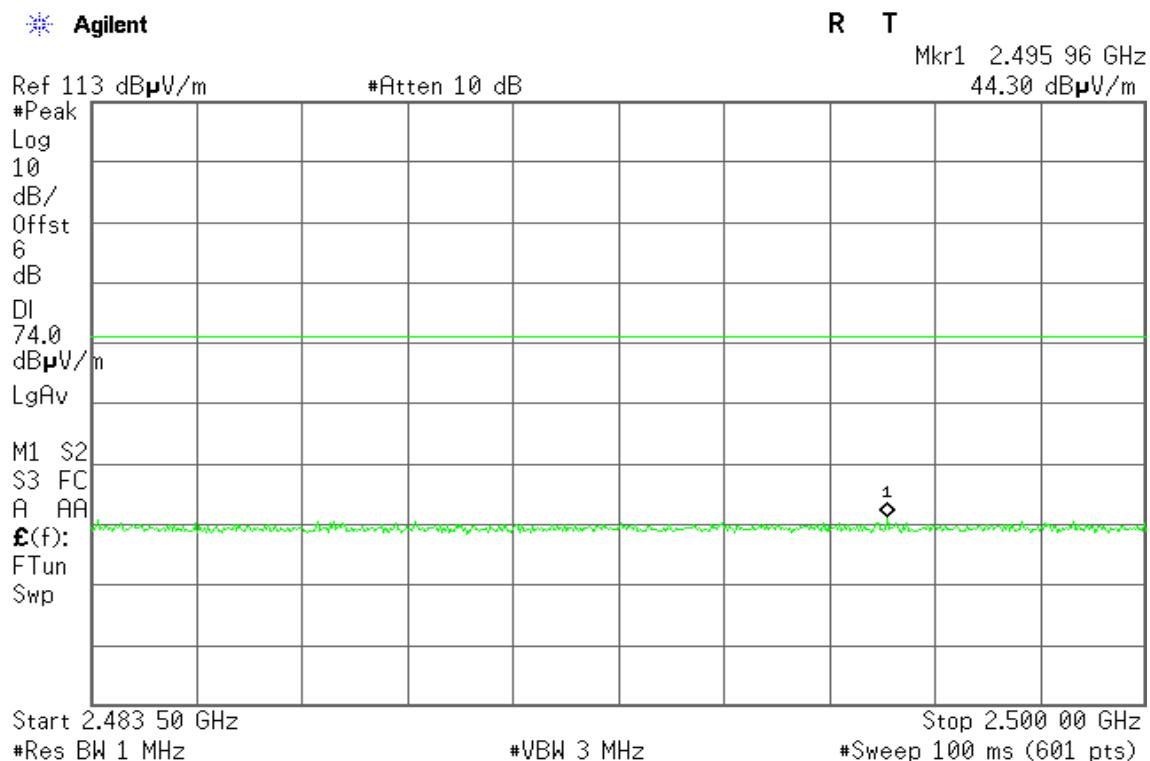

**Detector mode: Average**

**Polarity: Horizontal**

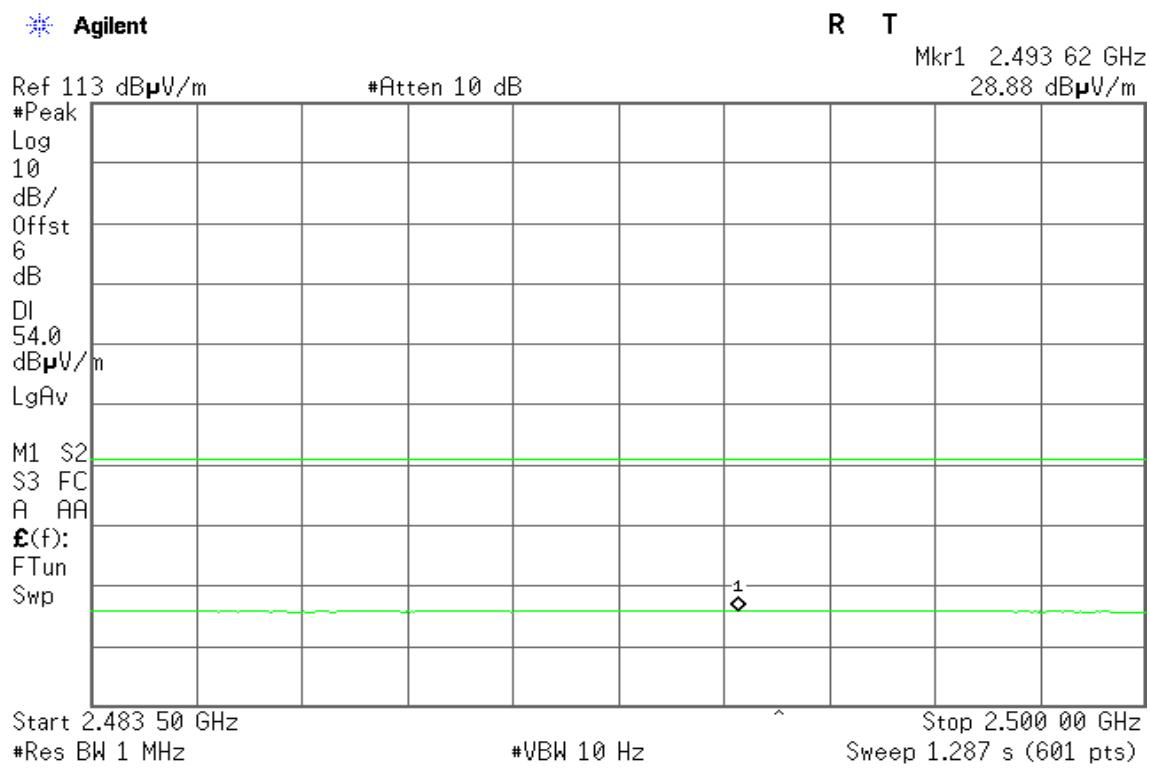




**Band Edges (IEEE 802.11n HT 40 MHz mode / CH Low)**


**Detector mode: Peak**

**Polarity: Vertical**

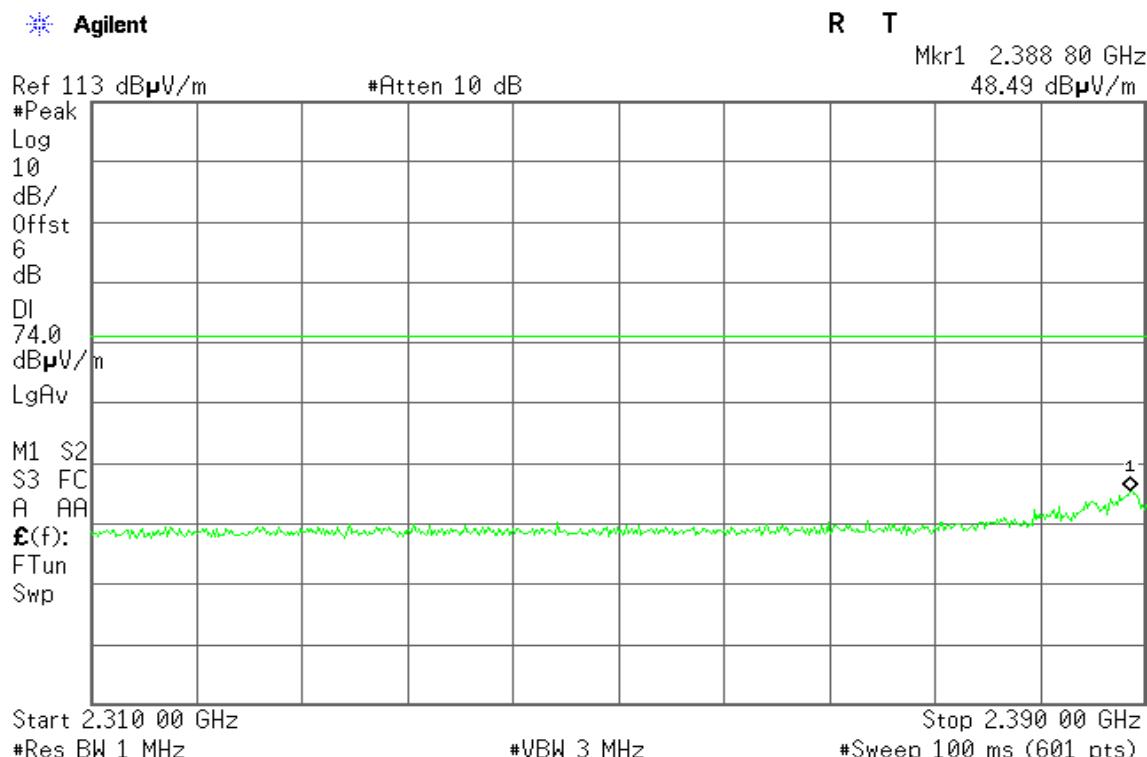

**Detector mode: Average**


**Polarity: Vertical**

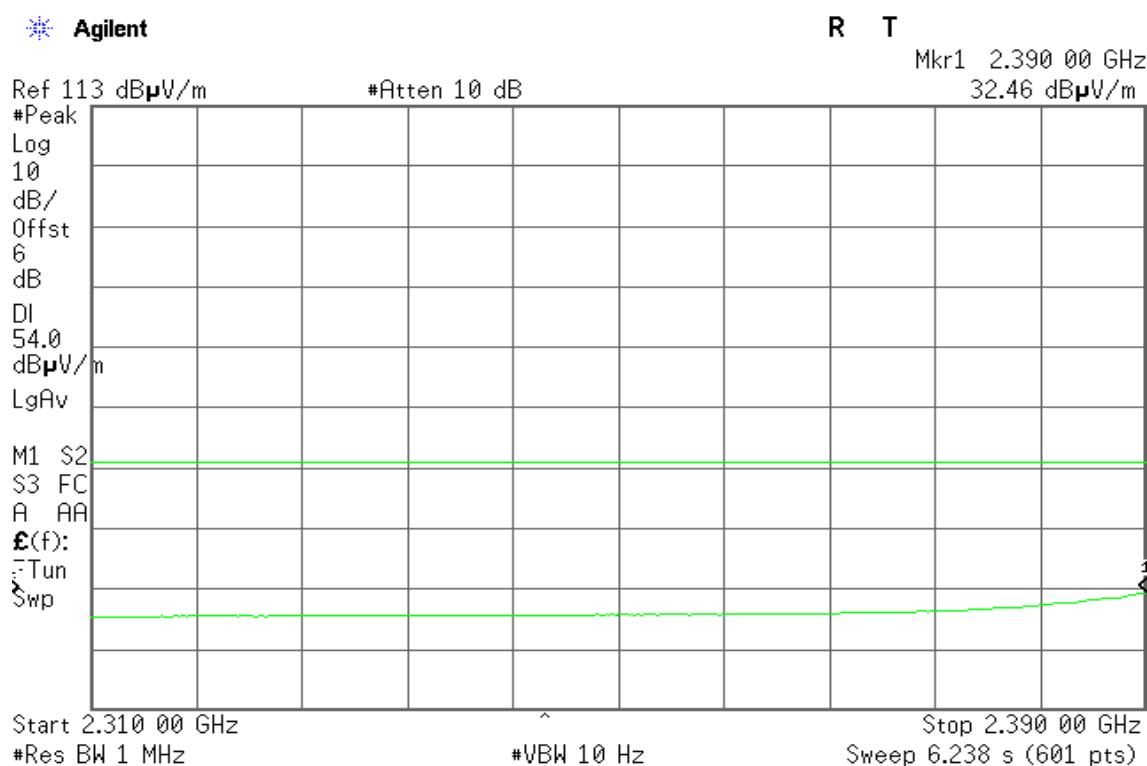




**Detector mode: Peak**

**Polarity: Horizontal**

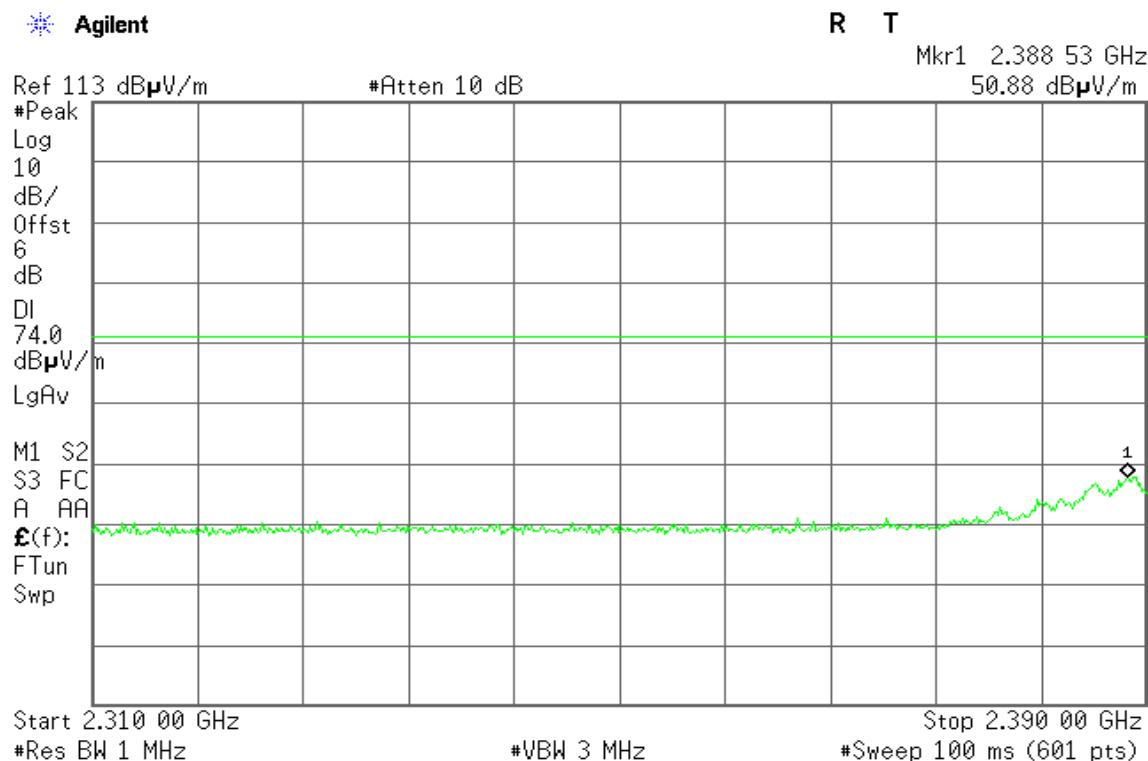

**Detector mode: Average**

**Polarity: Horizontal**

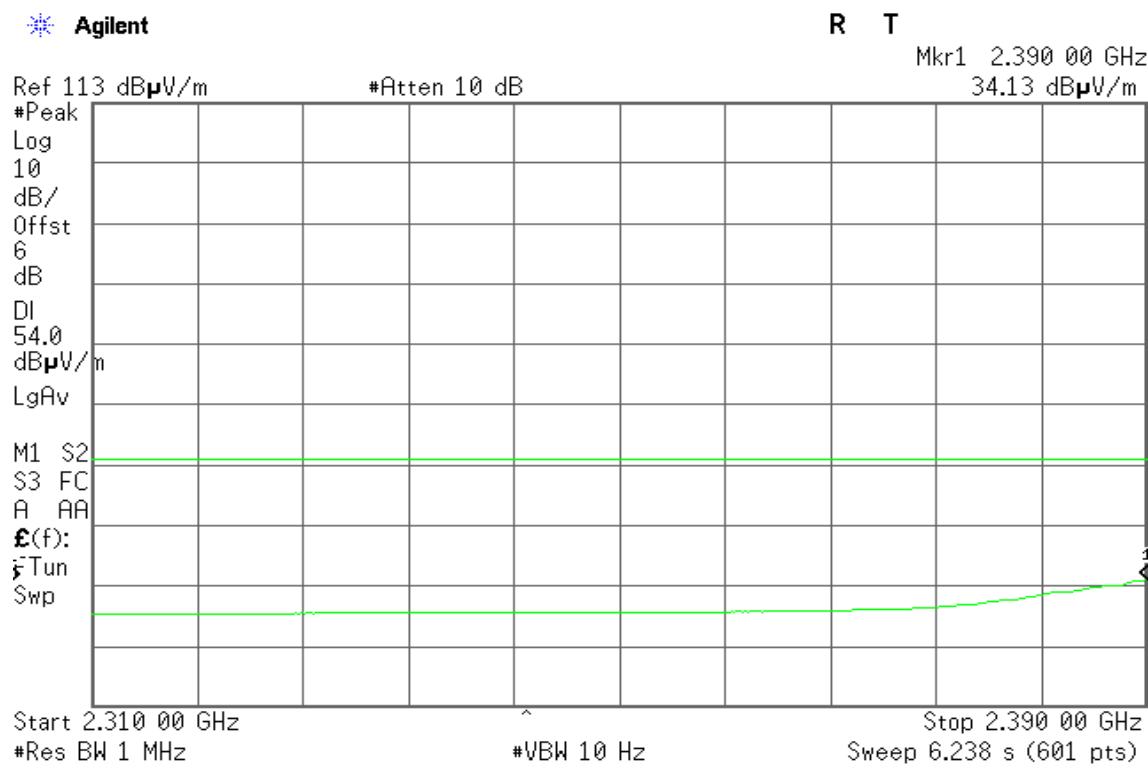




**Band Edges (IEEE 802.11n HT 40 MHz mode / CH High)**


**Detector mode: Peak**

**Polarity: Vertical**

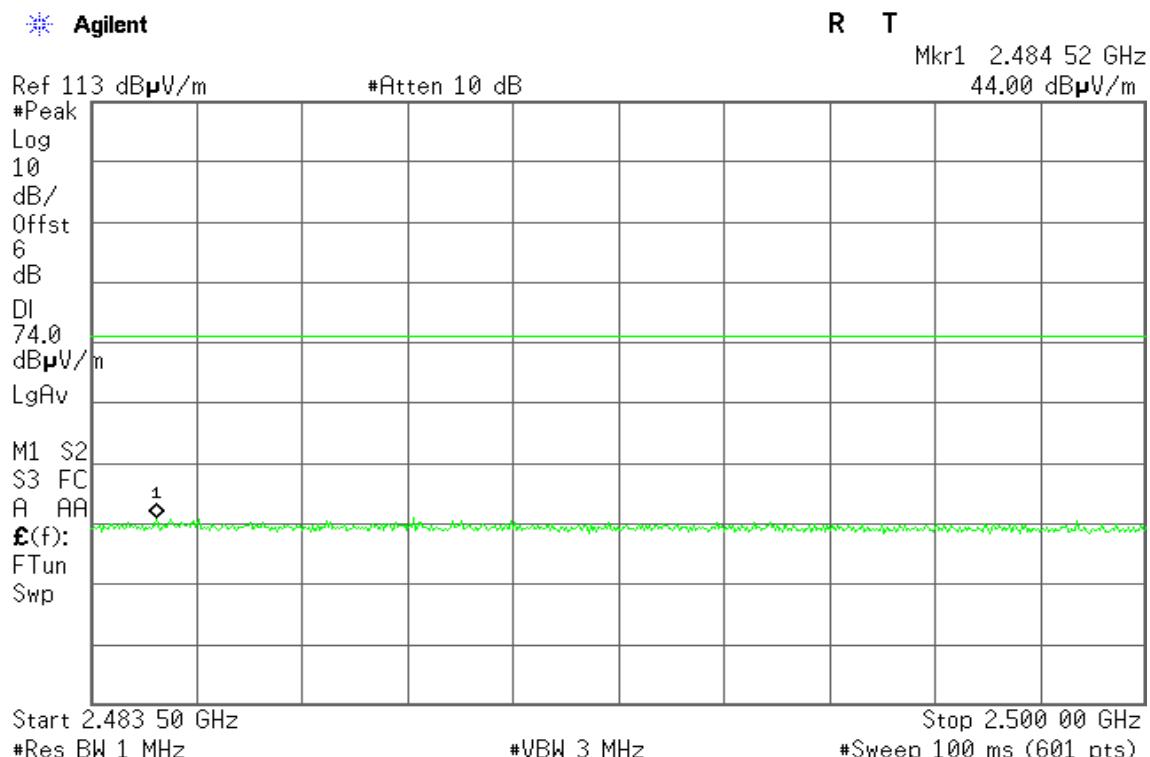

**Detector mode: Average**


**Polarity: Vertical**

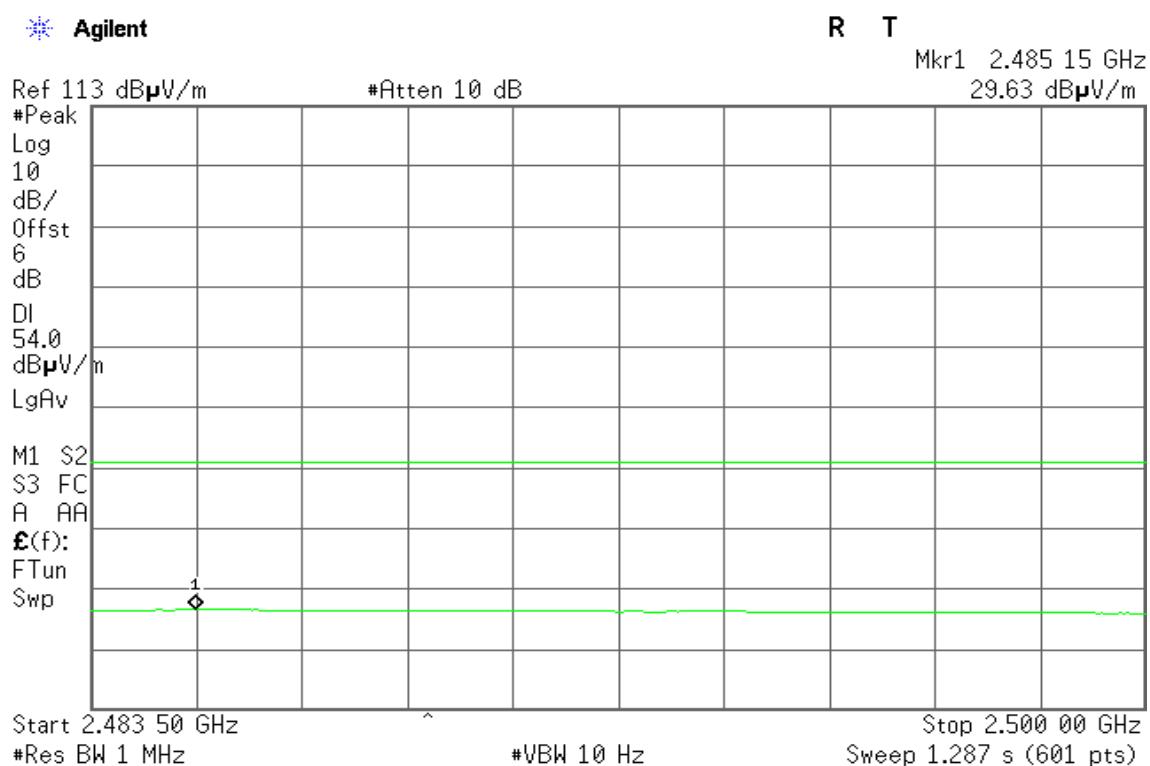




**Detector mode: Peak**

**Polarity: Horizontal**

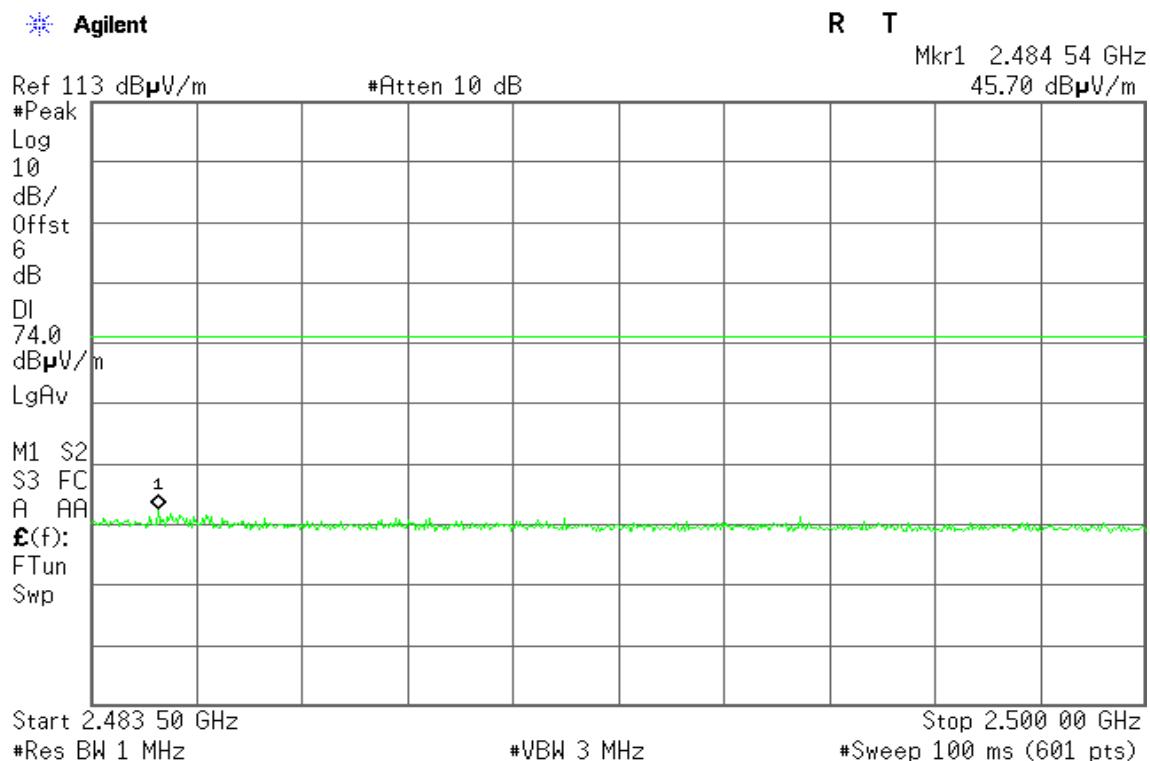

**Detector mode: Average**

**Polarity: Horizontal**

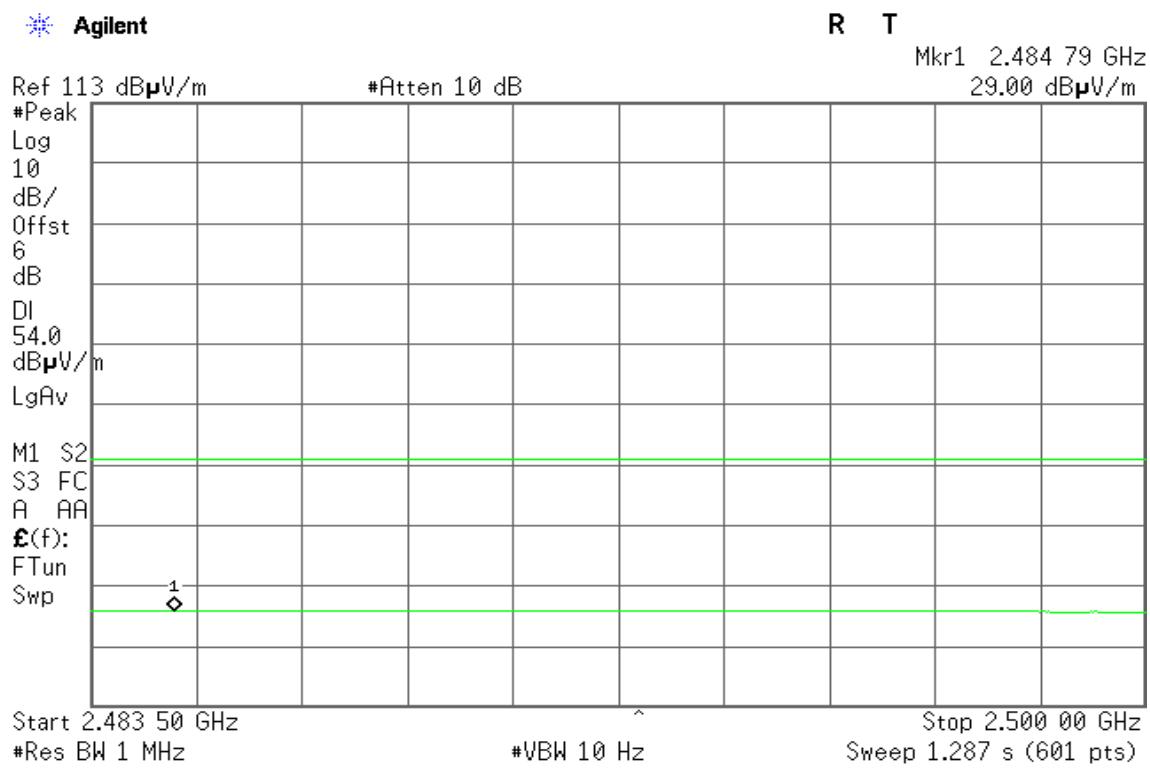




## 7.5 PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.



## **TEST RESULTS**

*No non-compliance noted*

### **Test Data**

#### **Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-16.73	8.00	PASS
Mid	2442	-16.26		PASS
High	2462	-16.57		PASS

#### **Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-22.58	8.00	PASS
Mid	2442	-22.94		PASS
High	2462	-23.82		PASS

#### **Test mode: IEEE 802.11n HT 20 MHz mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-23.41	8.00	PASS
Mid	2442	-23.44		PASS
High	2462	-23.84		PASS

#### **Test mode: IEEE 802.11n HT 40 MHz mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-22.79	8.00	PASS
Mid	2442	-22.68		PASS
High	2452	-22.76		PASS



## Test Plot

IEEE 802.11b mode


PPSD (CH Low)



No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2411.3301	-16.73	8.00	-24.73




**PPSD (CH Mid)**

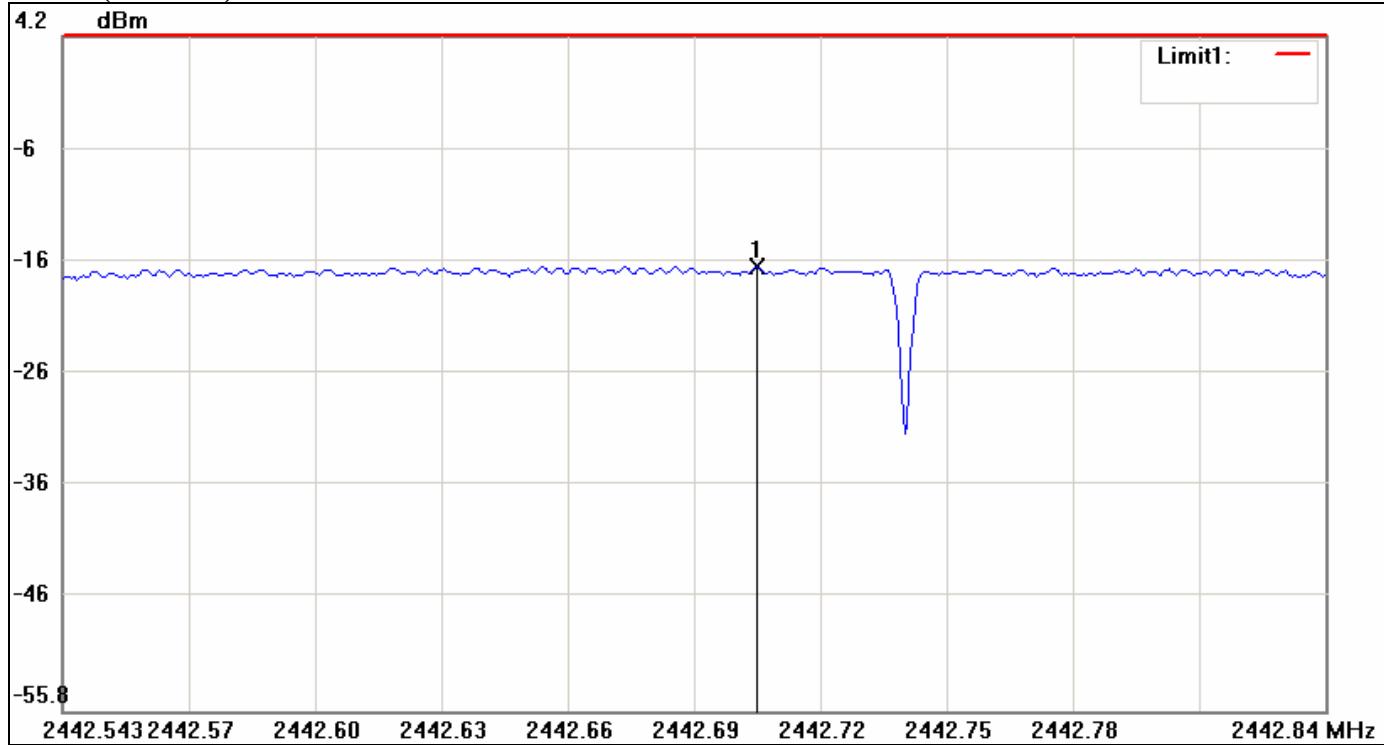

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2442.7084	-16.26	8.00	-24.26



**PPSD (CH High)**

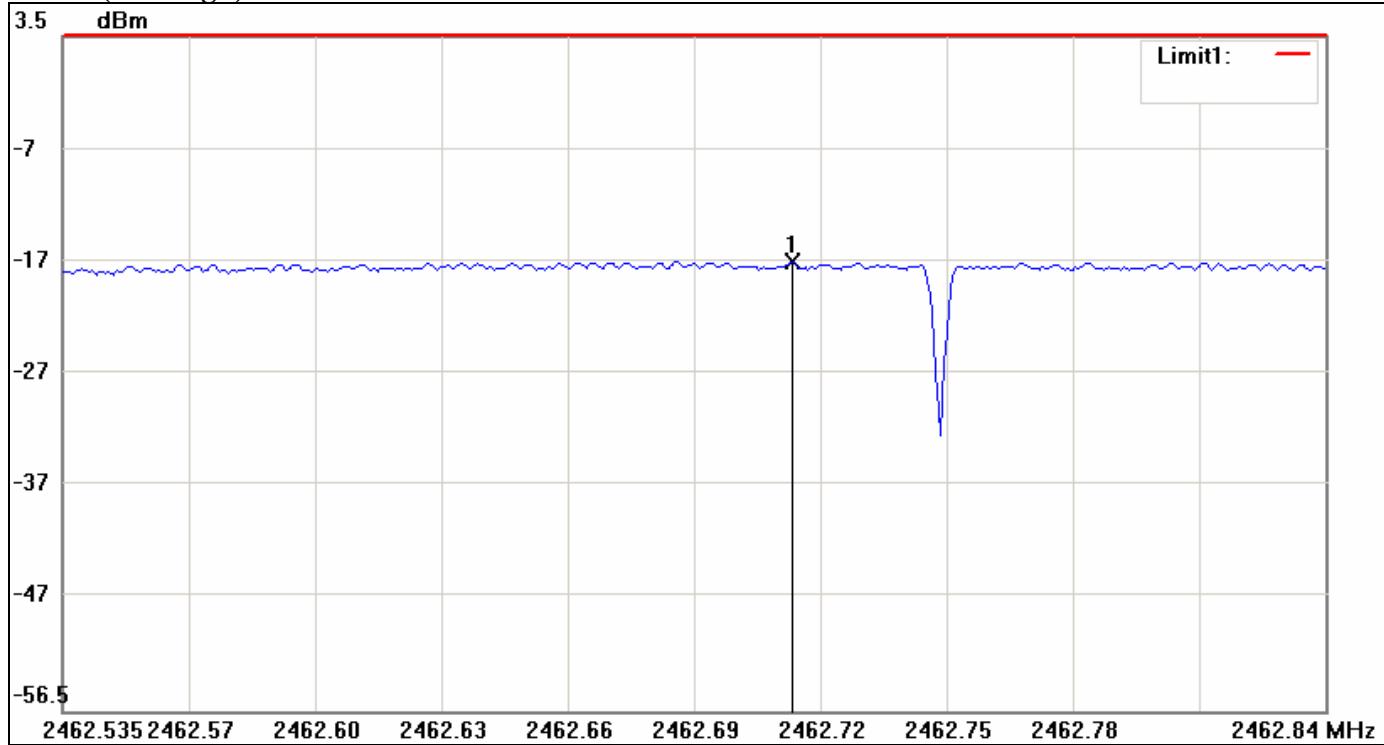

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2462.7088	-16.57	8.00	-24.57



**IEEE 802.11g mode**


**PPSD (CH Low)**



No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2410.1117	-22.58	8.00	-30.58




**PPSD (CH Mid)**

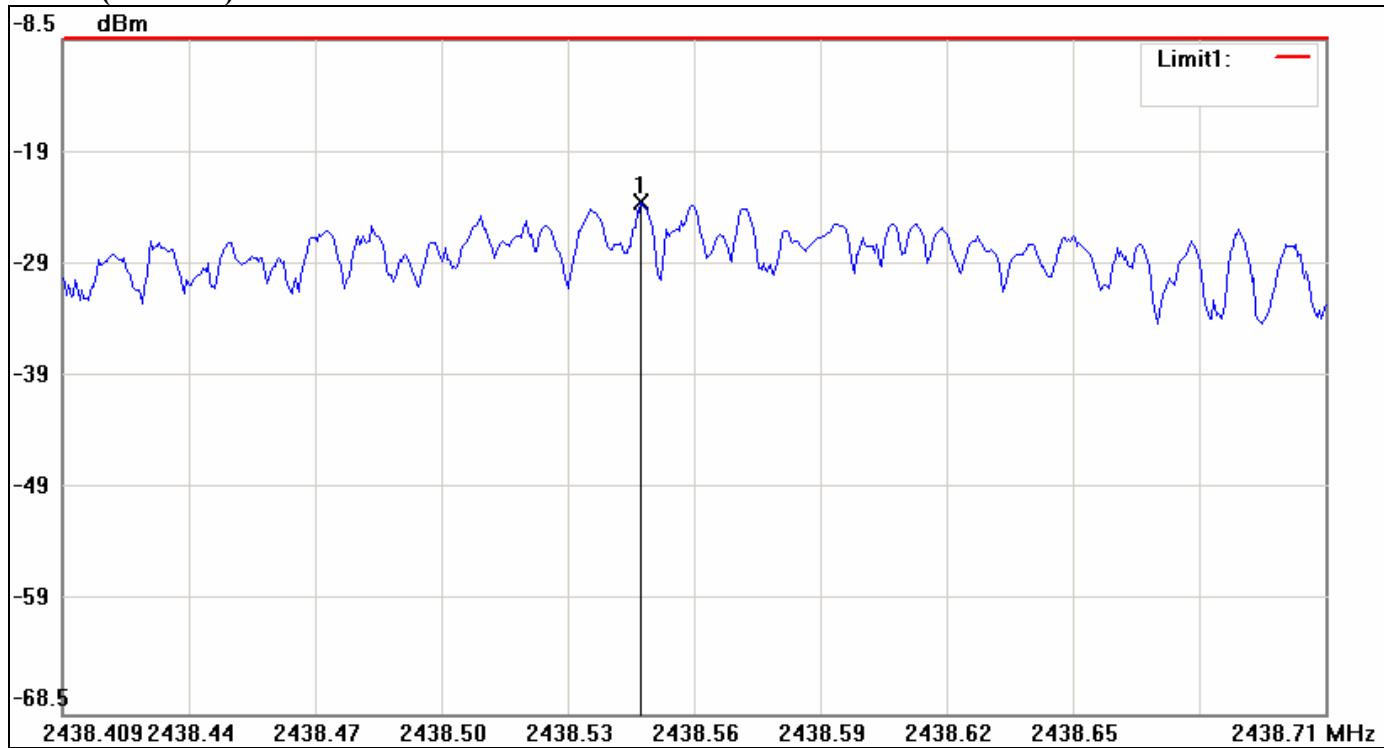

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2438.5465	-22.94	8.00	-30.94



**PPSD (CH High)**

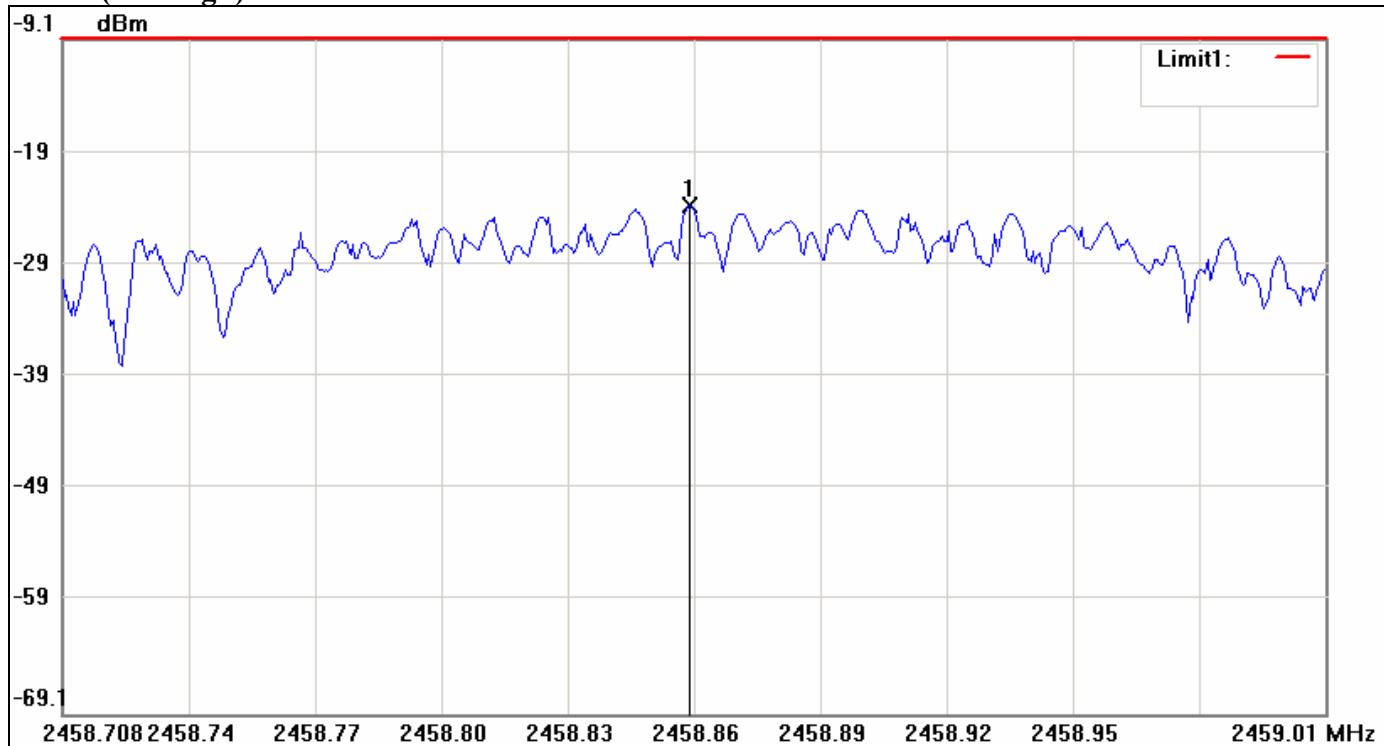

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2458.8566	-23.82	8.00	-31.82



**IEEE 802.11n HT 20 MHz mode**

**PPSD (CH Low)**



No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2417.0149	-23.41	8.00	-31.41



**PPSD (CH Mid)**



No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2447.3400	-23.44	8.00	-31.44



**PPSD (CH High)**




No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2467.3406	-23.84	8.00	-31.84



**IEEE 802.11n HT 40 MHz mode**


**PPSD (CH Low)**

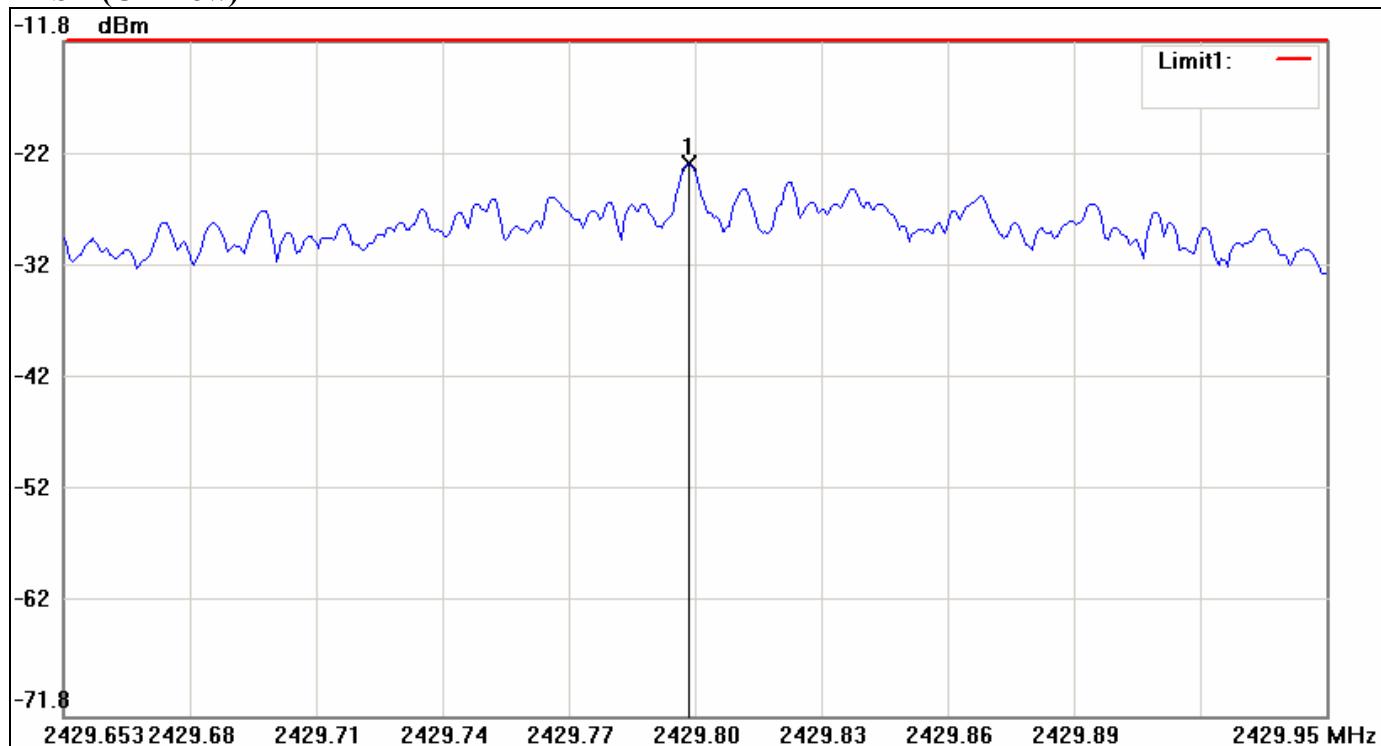

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2429.8014	-22.79	8.00	-30.79




**PPSD (CH Mid)**

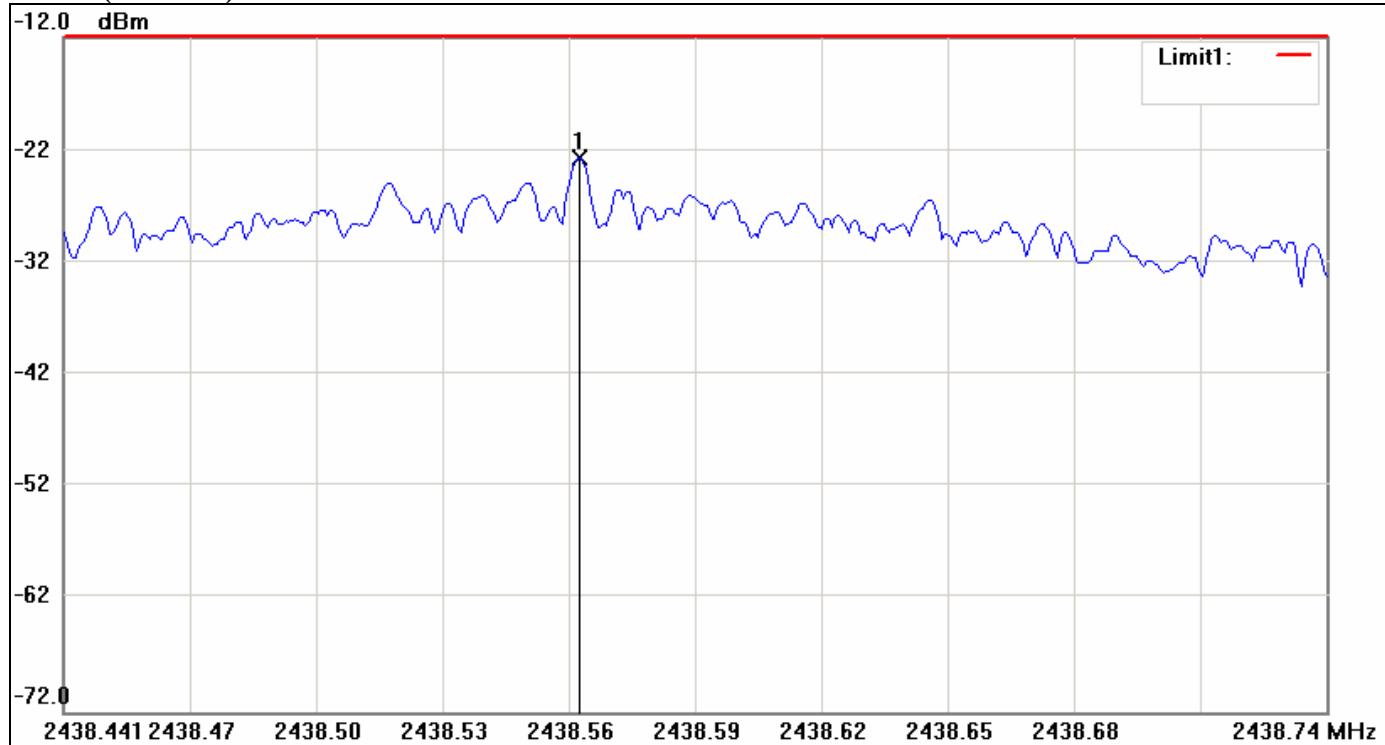

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2438.5640	-22.68	8.00	-30.68



**PPSD (CH High)**

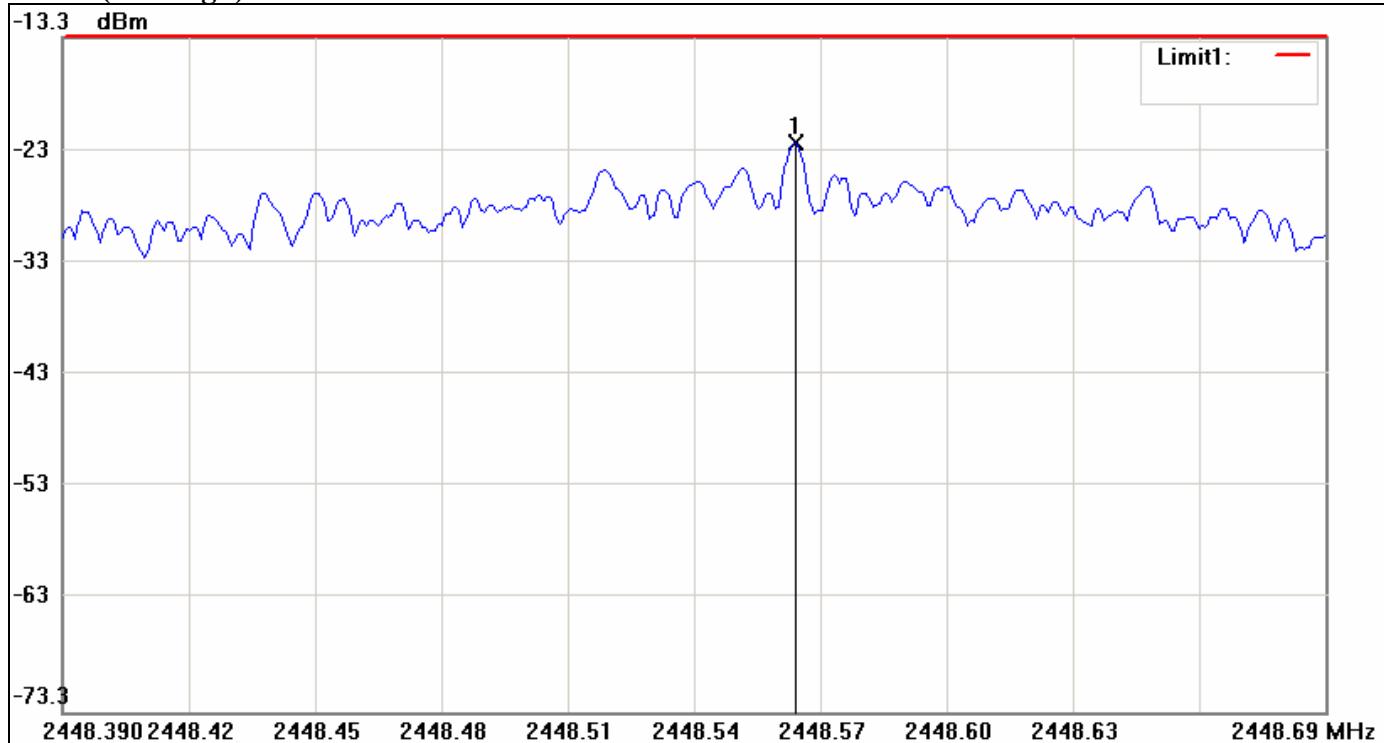

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	2448.5639	-22.76	8.00	-30.76




## 7.6 SPURIOUS EMISSIONS

### 7.6.1 Conducted Measurement

#### **LIMIT**

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the Peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### **Test Configuration**



#### **TEST PROCEDURE**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

#### **TEST RESULTS**


*No non-compliance noted*



### Test Plot

IEEE 802.11b mode


CH Low

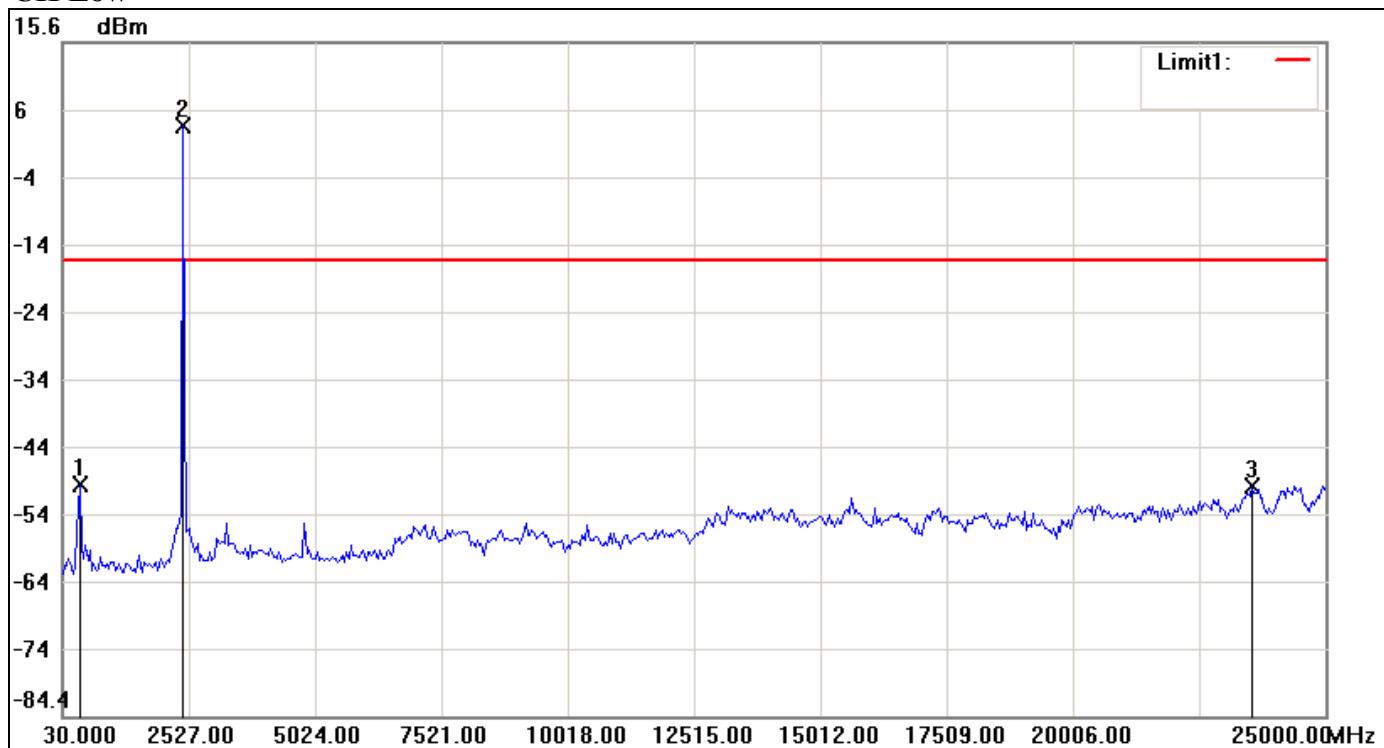

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	362.9333	-50.09	-16.64	-33.45
2	2402.1500	3.36	-16.64	20.00
3	23543.4167	-50.15	-16.64	-33.51




**CH Mid**

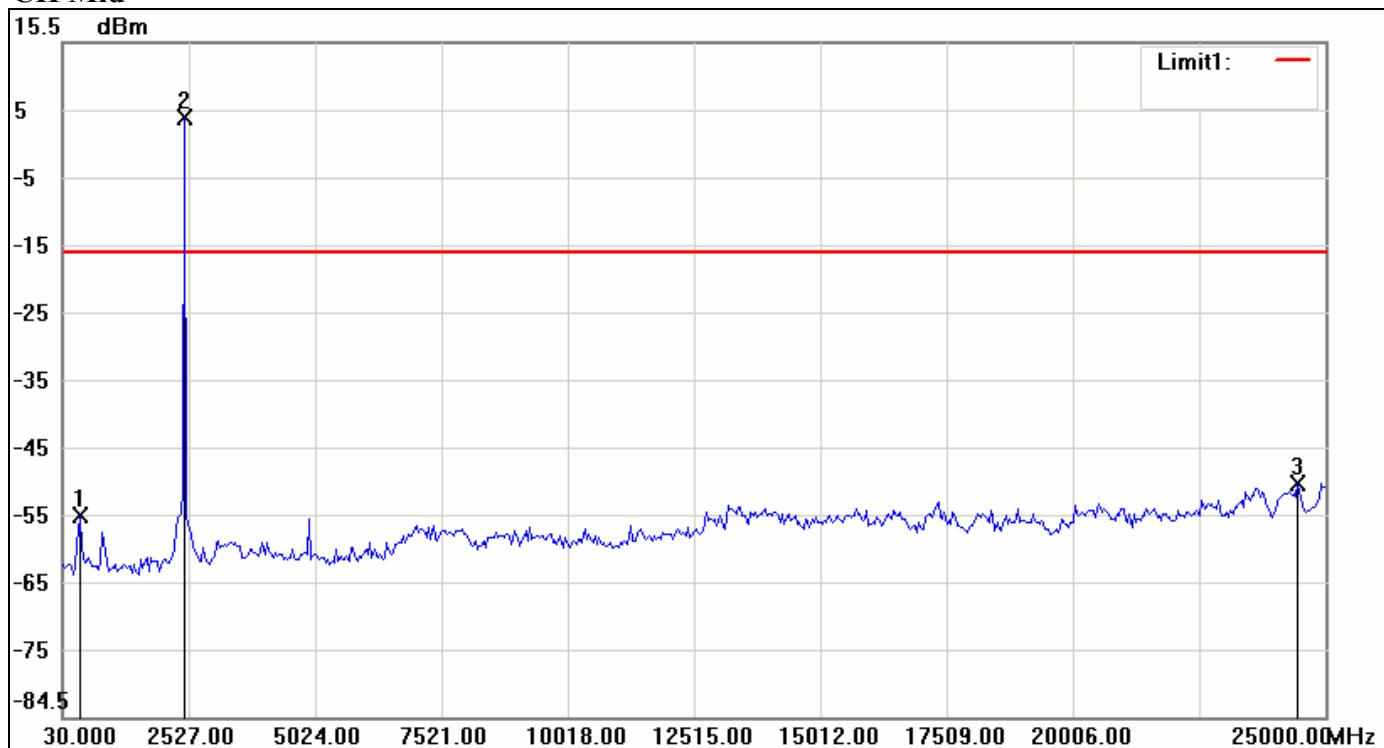

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	362.9333	-54.52	-15.62	-38.90
2	2443.7667	4.38	-15.62	20.00
3	24458.9833	-49.87	-15.62	-34.25



**CH High**

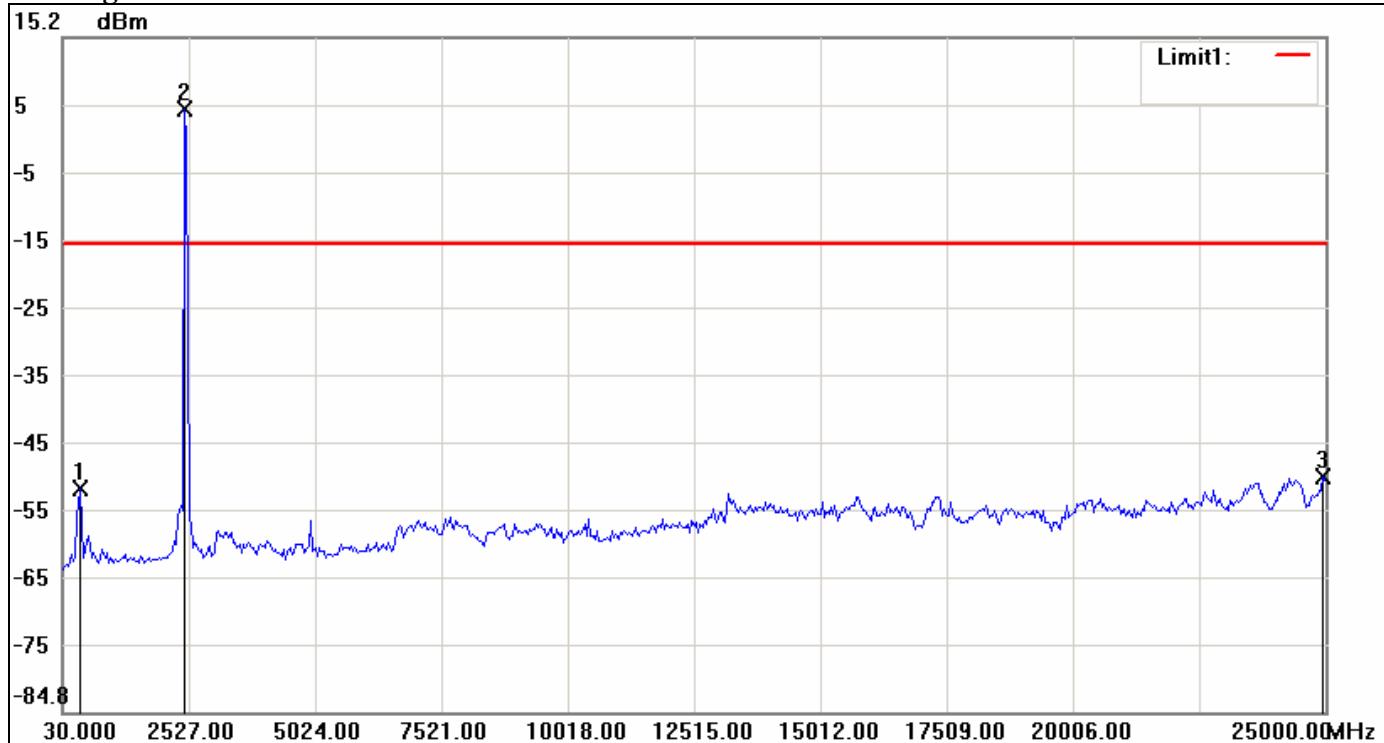

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	362.9333	-51.62	-15.34	-36.28
2	2443.7667	4.66	-15.34	20.00
3	24958.3833	-50.02	-15.34	-34.68



IEEE 802.11g mode


CH Low



No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	362.9333	-48.28	-28.96	-19.32
2	2402.1500	-8.96	-28.96	20.00
3	24458.9833	-59.28	-28.96	-30.32




**CH Mid**

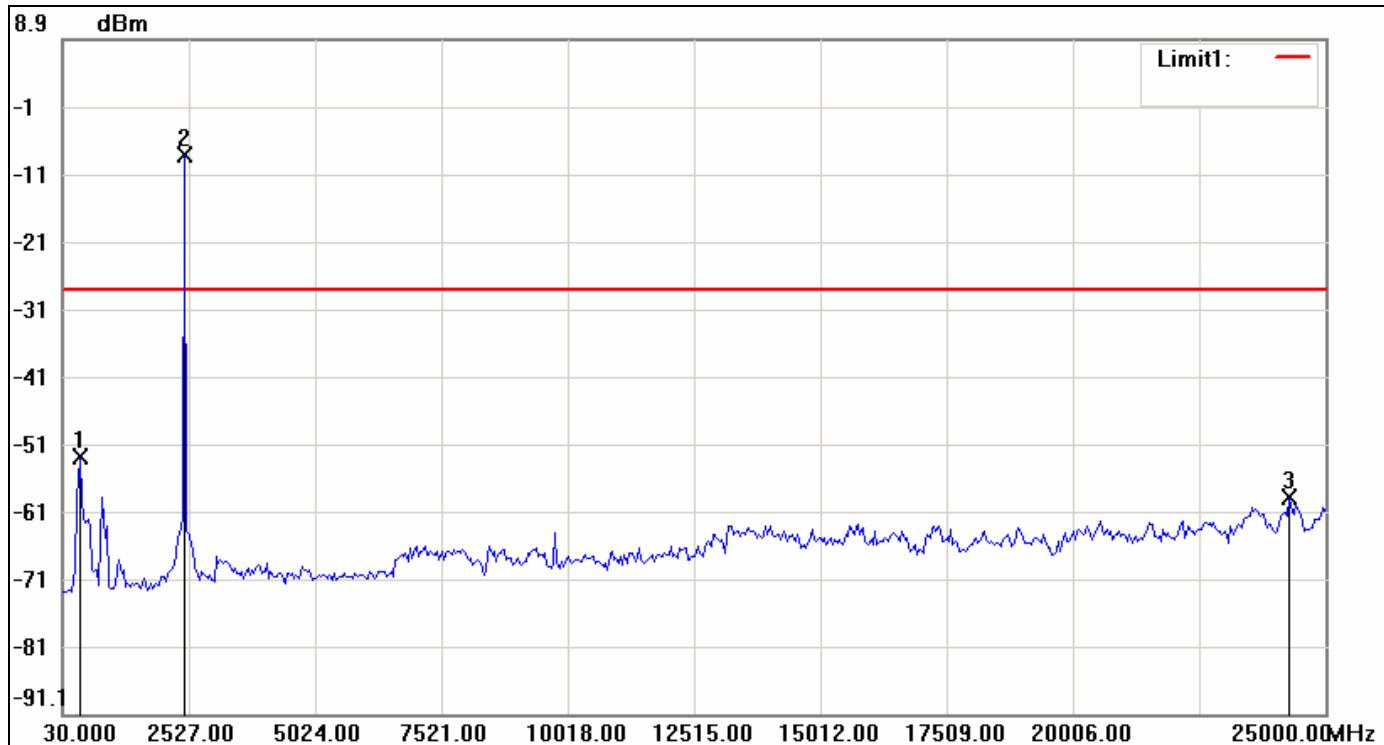

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	362.9333	-53.08	-28.34	-24.74
2	2443.7667	-8.34	-28.34	20.00
3	24292.5167	-59.13	-28.34	-30.79



**CH High**

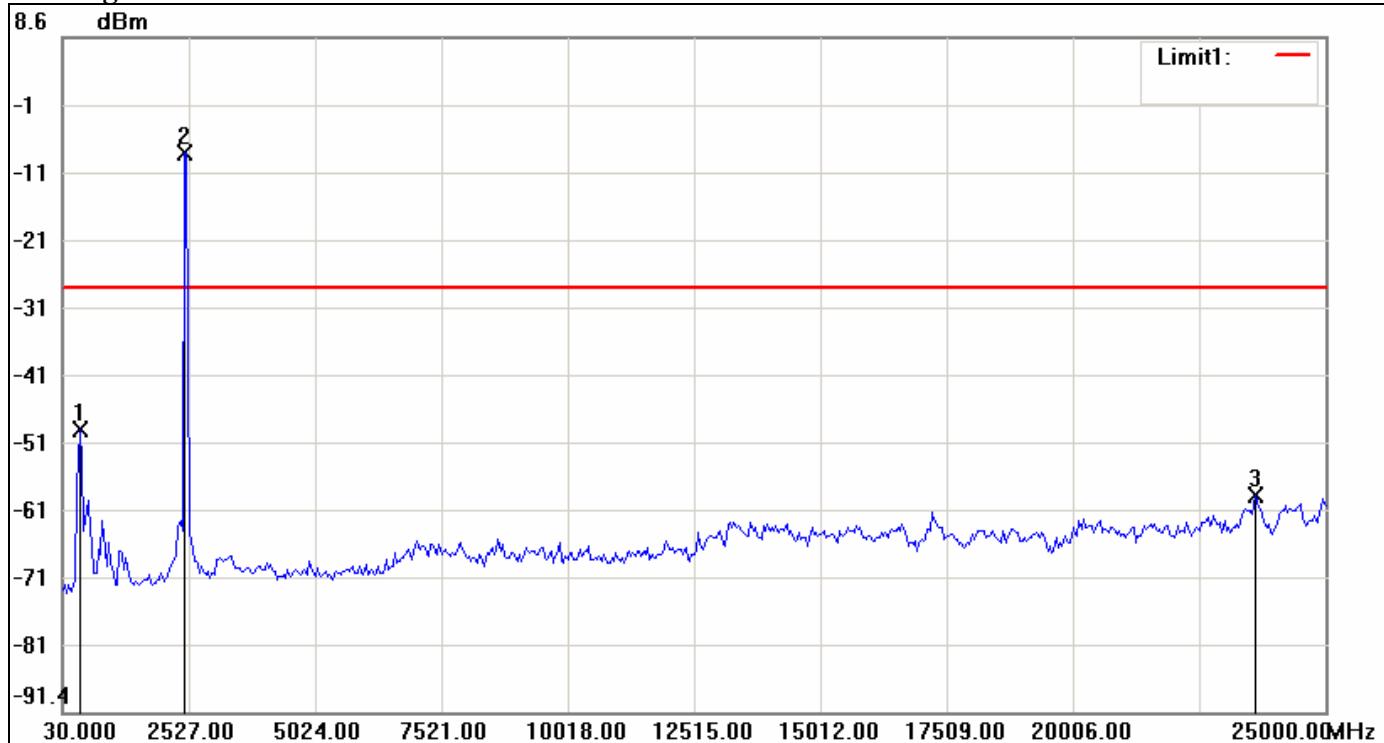

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	362.9333	-49.38	-28.41	-20.97
2	2443.7667	-8.41	-28.41	20.00
3	23626.6500	-59.33	-28.41	-30.92



IEEE 802.11n HT 20 MHz mode


CH Low



No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	362.9333	-48.34	-28.41	-19.93
2	2402.1500	-8.41	-28.41	20.00
3	24334.1333	-60.56	-28.41	-32.15




**CH Mid**

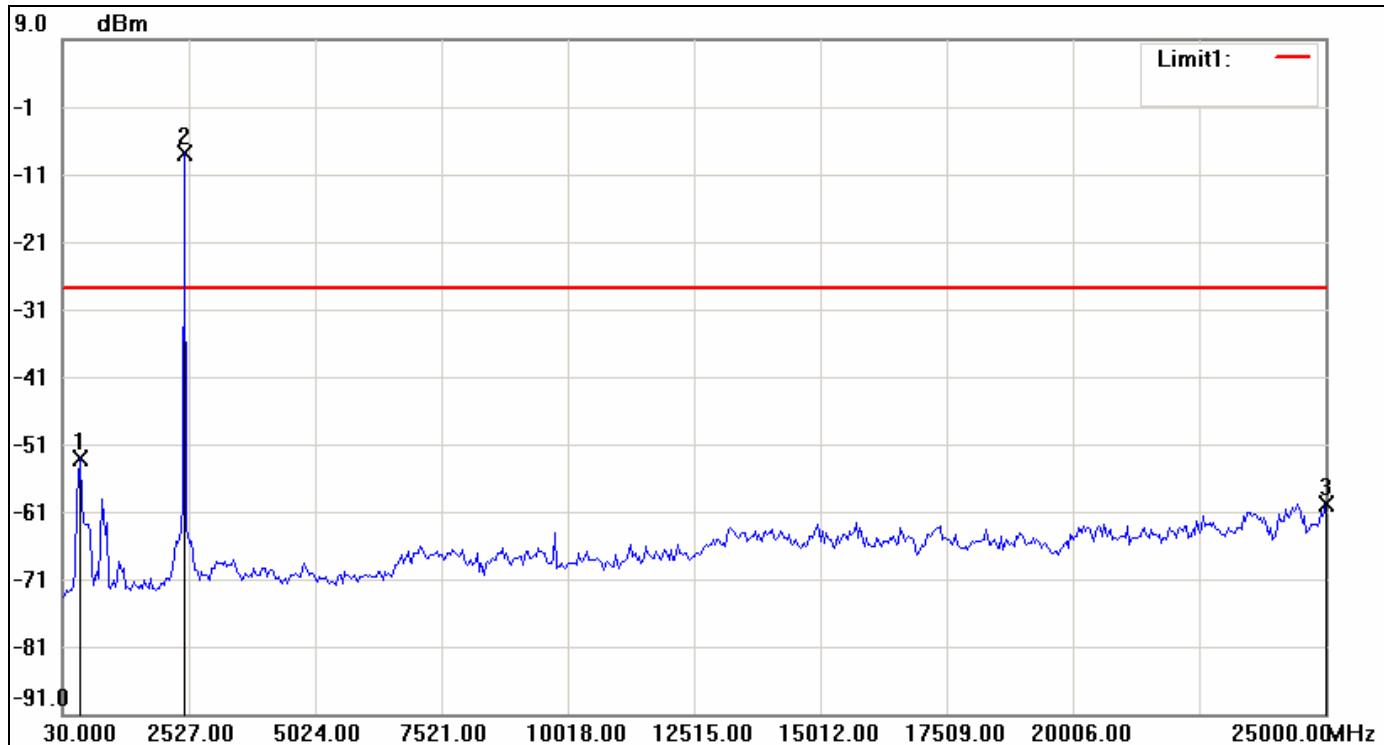

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	362.9333	-53.09	-28.00	-25.09
2	2443.7667	-8.00	-28.00	20.00
3	25000.0000	-59.83	-28.00	-31.83



**CH High**

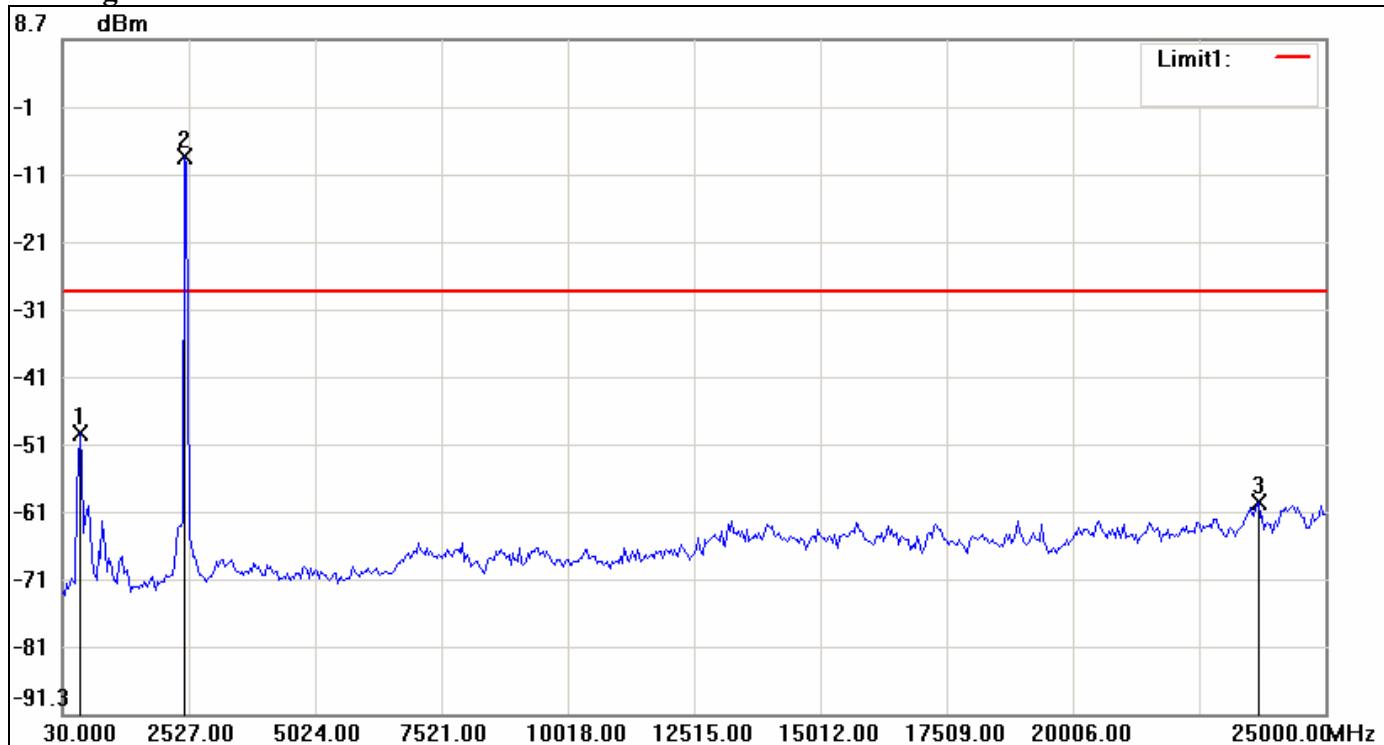

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	362.9333	-49.54	-28.64	-20.90
2	2443.7667	-8.64	-28.64	20.00
3	23668.2667	-59.89	-28.64	-31.25



IEEE 802.11n HT 40 MHz mode


CH Low



No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	362.9333	-49.79	-31.34	-18.45
2	2443.7667	-11.34	-31.34	20.00
3	24417.3667	-59.97	-31.34	-28.63




**CH Mid**

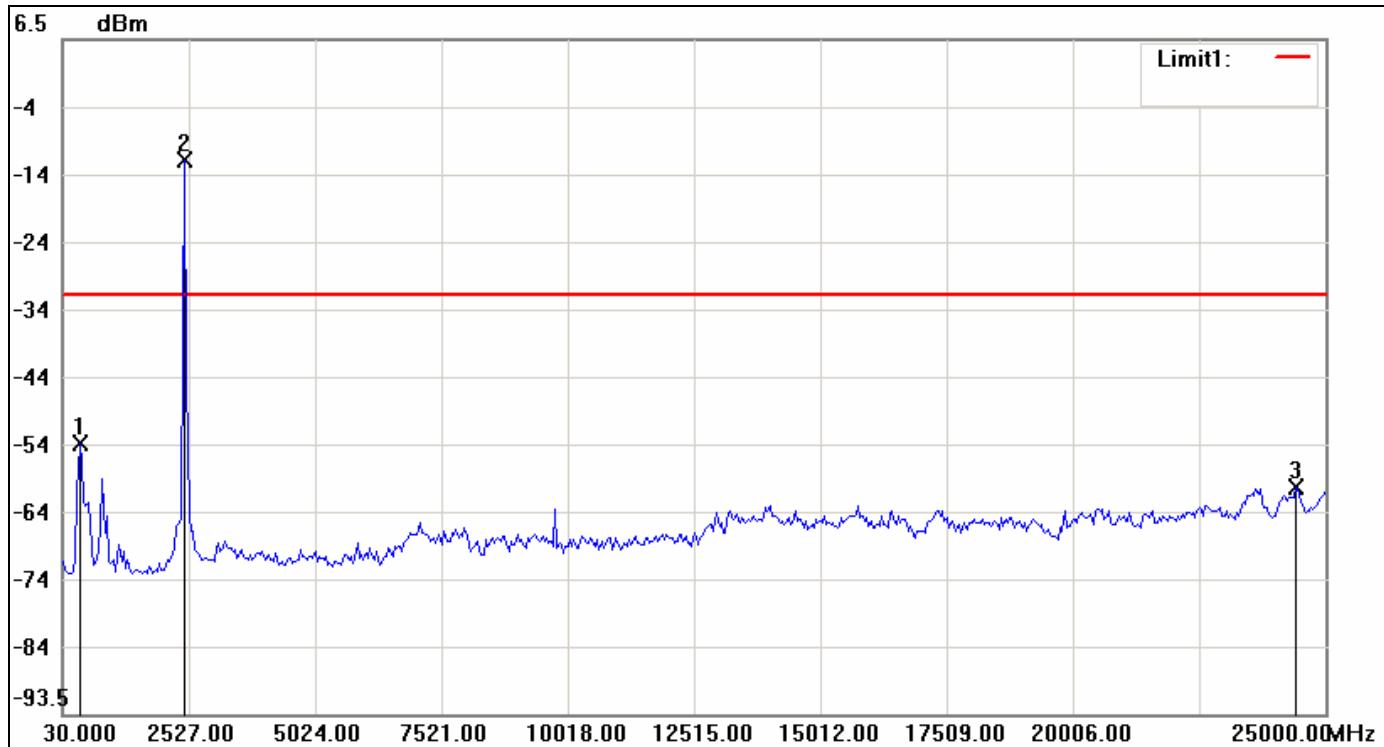

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	362.9333	-53.46	-31.45	-22.01
2	2443.7667	-11.45	-31.45	20.00
3	24417.3667	-60.01	-31.45	-28.56



**CH High**

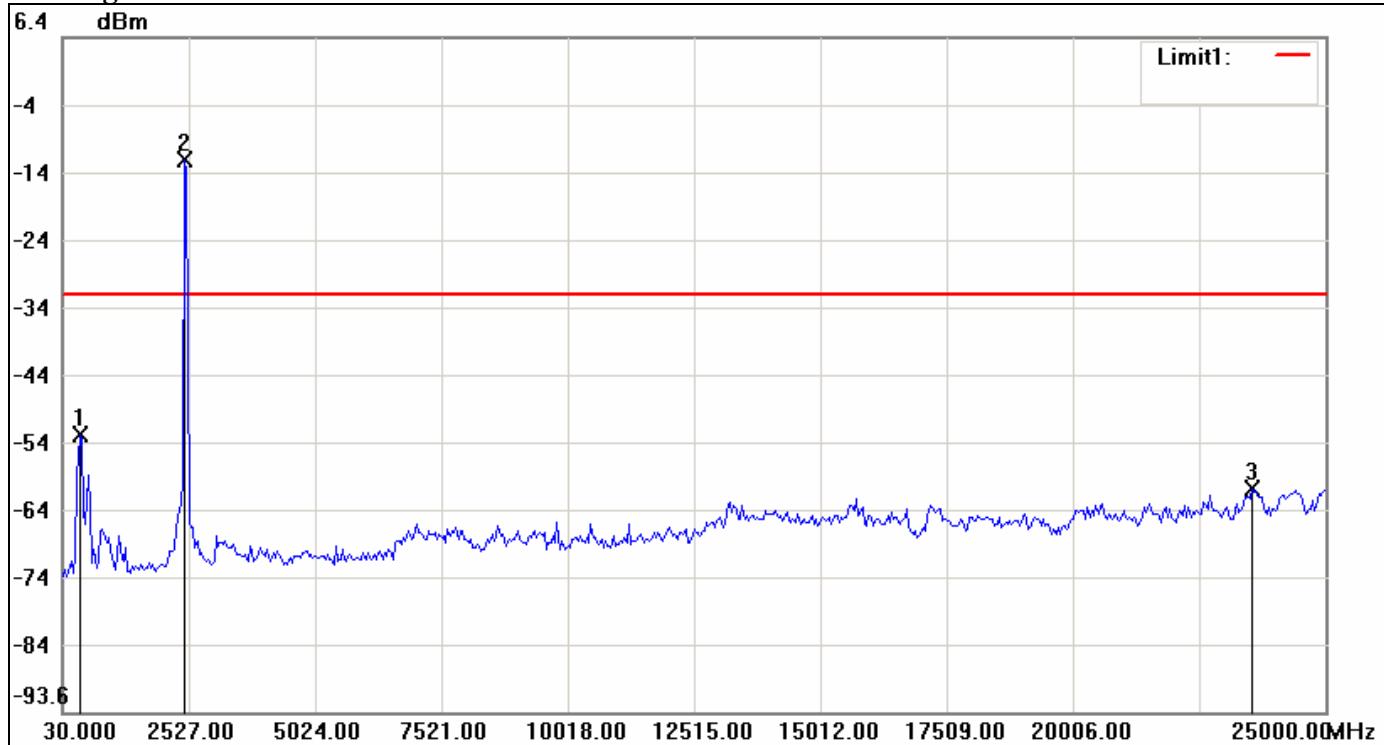

No.	Frequency(MHz)	Level(dBm)	Limit(dBm)	Margin(dBm)
1	362.9333	-52.48	-31.83	-20.65
2	2443.7667	-11.83	-31.83	20.00
3	23543.4167	-60.40	-31.83	-28.57



## 7.7 RADIATED EMISSIONS

### LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Test Configuration

9kHz ~ 30MHz

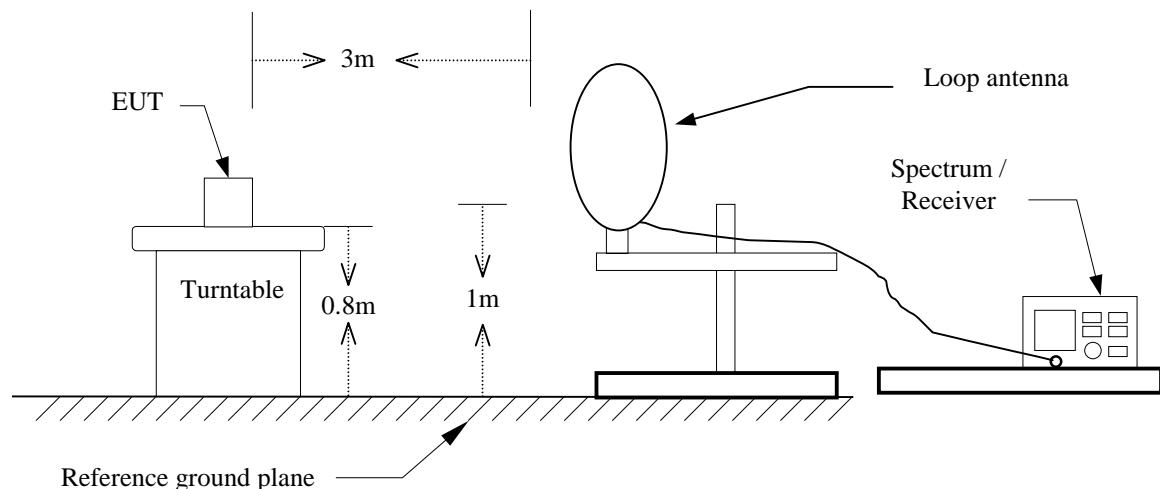


30MHz ~ 1GHz

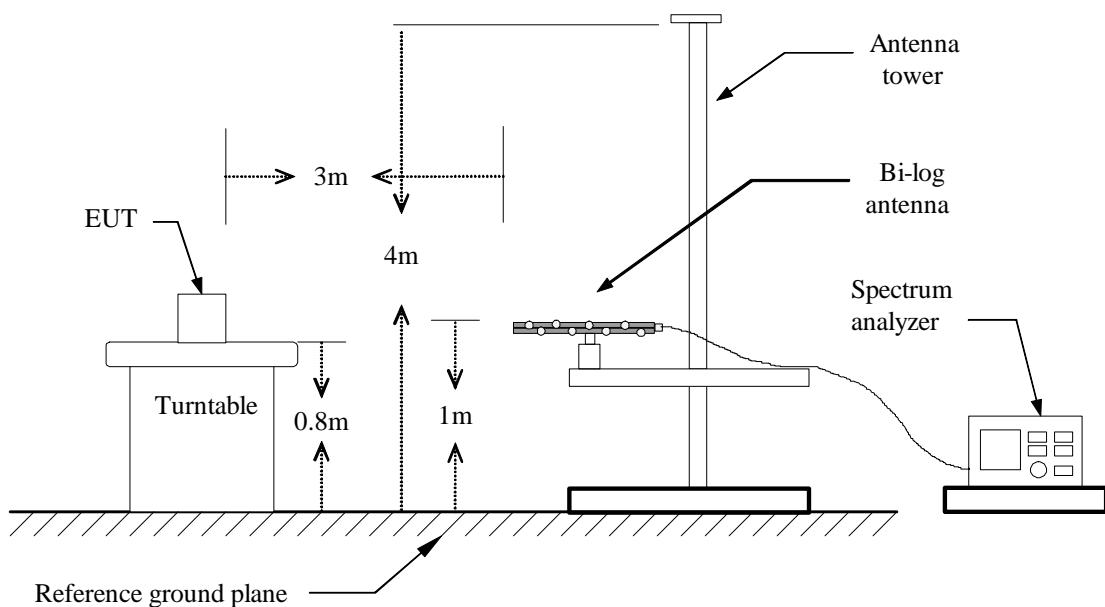



**Above 1 GHz**

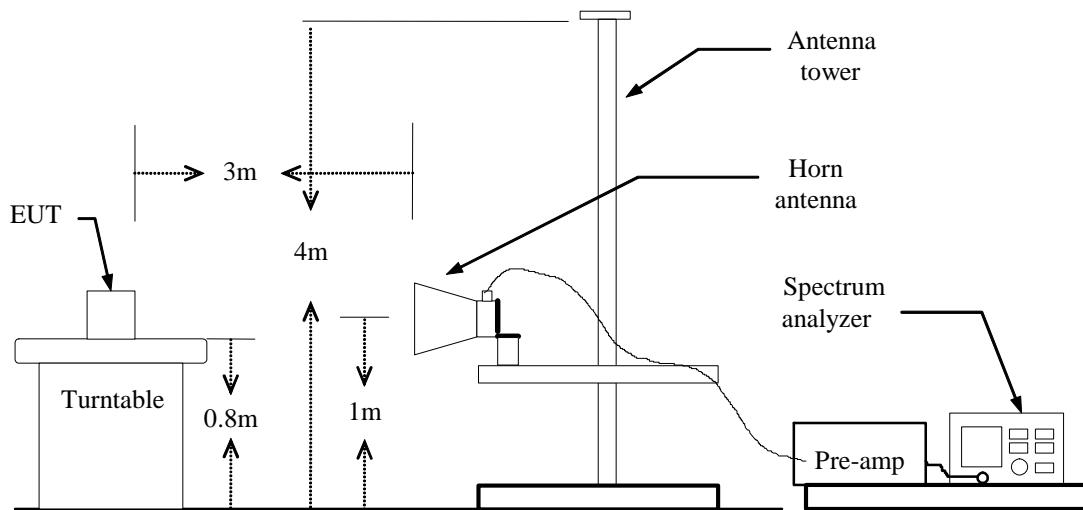



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.



## TEST RESULTS

### Below 1GHz

**Operation Mode:** Normal Link      **Test Date:** September 1, 2012  
**Temperature:** 26°C      **Tested by:** Shawn Wu  
**Humidity:** 60% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
429.3167	49.87	-9.04	40.83	46.00	-5.17	QP	V
500.4500	49.97	-8.13	41.84	46.00	-4.16	QP	V
534.4000	47.63	-7.79	39.84	46.00	-6.16	QP	V
571.5833	43.25	-7.42	35.83	46.00	-10.17	Peak	V
642.7167	41.86	-6.26	35.60	46.00	-10.40	Peak	V
747.8000	39.37	-4.79	34.58	46.00	-11.42	Peak	V
290.2833	44.15	-11.32	32.83	46.00	-13.17	Peak	H
321.0000	48.67	-10.80	37.87	46.00	-8.13	Peak	H
387.2833	43.78	-9.80	33.98	46.00	-12.02	Peak	H
429.3167	52.88	-9.04	43.84	46.00	-2.16	QP	H
752.6500	42.05	-4.73	37.32	46.00	-8.68	Peak	H
890.0667	38.36	-3.26	35.10	46.00	-10.90	Peak	H

### **Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/quasi-Peak detector mode.
3. Quasi-Peak test would be performed if the Peak result were greater than the quasi-Peak limit or as required by the applicant.
4. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).



**Above 1 GHz**

**Operation Mode:** TX / IEEE 802.11b / CH Low

**Test Date:** August 29, 2012

**Temperature:** 26°C

**Tested by:** Shawn Wu

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2006.667	56.40	-7.12	49.28	74.00	-24.72	Peak	V
4825.000	49.27	0.36	49.63	74.00	-24.37	Peak	V
7241.667	40.54	9.30	49.84	54.00	-4.16	AVG	V
N/A							
2296.667	55.91	-6.97	48.94	74.00	-25.06	Peak	H
4825.000	49.41	0.36	49.77	74.00	-24.23	Peak	H
7233.333	38.30	9.28	47.58	54.00	-6.42	AVG	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11b / CH Mid

**Test Date:** August 29, 2012

**Temperature:** 26°C

**Tested by:** Shawn Wu

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2843.333	55.91	-5.83	50.08	74.00	-23.92	Peak	V
4883.333	50.32	0.51	50.83	74.00	-23.17	Peak	V
7325.000	39.67	9.56	49.23	54.00	-4.77	AVG	V
N/A							
2363.333	56.97	-6.76	50.21	74.00	-23.79	Peak	H
4883.333	49.32	0.51	49.83	74.00	-24.17	Peak	H
7325.000	37.56	9.56	47.12	54.00	-6.88	AVG	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11b / CH High

**Test Date:** August 29, 2012

**Temperature:** 26°C

**Tested by:** Shawn Wu

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2253.333	56.70	-6.99	49.71	74.00	-24.29	Peak	V
4925.000	51.24	0.61	51.85	54.00	-2.15	AVG	V
7383.333	35.63	9.74	45.37	54.00	-8.63	AVG	V
N/A							
1996.667	57.04	-7.15	49.89	74.00	-24.11	Peak	H
4925.000	49.25	0.61	49.86	74.00	-24.14	Peak	H
7383.333	36.69	9.74	46.43	54.00	-7.57	AVG	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11g / CH Low

**Test Date:** August 29, 2012

**Temperature:** 26°C

**Tested by:** Shawn Wu

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2366.667	56.20	-6.75	49.45	74.00	-24.55	Peak	V
N/A							
2913.333	55.66	-5.66	50.00	74.00	-24.00	Peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11g / CH Mid

**Test Date:** August 29, 2012

**Temperature:** 26°C

**Tested by:** Shawn Wu

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2360.000	55.85	-6.77	49.08	74.00	-24.92	Peak	V
N/A							
2783.333	56.33	-5.98	50.35	74.00	-23.65	Peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11g / CH High

**Test Date:** August 29, 2012

**Temperature:** 26°C

**Tested by:** Shawn Wu

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2746.667	56.30	-6.07	50.23	74.00	-23.77	Peak	V
N/A							
2090.000	56.29	-7.08	49.21	74.00	-24.79	Peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2853.333	55.85	-5.81	50.04	74.00	-23.96	Peak	V
N/A							
2973.333	56.32	-5.51	50.81	74.00	-23.19	Peak	H
N/A							

**Remark:**

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.*
3. *Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*



**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH Mid    **Test Date:** August 29, 2012

**Temperature:** 26°C

**Tested by:** Shawn Wu

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2796.667	55.79	-5.95	49.84	74.00	-24.16	Peak	V
N/A							
2946.667	56.57	-5.57	51.00	74.00	-23.00	Peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 20 MHz mode / CH High    **Test Date:** August 29, 2012

**Temperature:** 26°C

**Tested by:** Shawn Wu

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2786.667	56.16	-5.97	50.19	74.00	-23.81	Peak	V
N/A							
2930.000	55.85	-5.62	50.23	74.00	-23.77	Peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2863.333	56.77	-5.78	50.99	74.00	-23.01	Peak	V
N/A							
2713.333	55.86	-6.16	49.70	74.00	-24.30	Peak	H
N/A							

**Remark:**

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.*
3. *Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*



**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode / CH Mid    **Test Date:** August 29, 2012

**Temperature:** 26°C

**Tested by:** Shawn Wu

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2240.000	56.23	-7.00	49.23	74.00	-24.77	Peak	V
N/A							
2733.333	56.49	-6.11	50.38	74.00	-23.62	Peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / IEEE 802.11n HT 40 MHz mode / CH High    **Test Date:** August 29, 2012

**Temperature:** 26°C

**Tested by:** Shawn Wu

**Humidity:** 60 % RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2323.333	56.33	-6.89	49.44	74.00	-24.56	Peak	V
N/A							
2826.667	56.38	-5.87	50.51	74.00	-23.49	Peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak/average detector mode.
3. Average test would be performed if the Peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



## 7.8 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

## TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer Peak scan of the measurement range. Significant Peaks are then marked as shown on the following data page, and these signals are then quasi-Peaked.

### Test Data

**Operation Mode:** Normal Link      **Test Date:** August 11, 2011  
**Temperature:** 22°C      **Tested by:** Pipo Hou  
**Humidity:** 55% RH

Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Note
0.1900	41.50	0.09	41.59	64.03	-22.44	QP	L1
0.1924	32.08	0.09	32.17	53.93	-21.76	AVG	L1
0.2850	30.20	0.09	30.29	60.67	-30.38	QP	L1
0.2878	18.95	0.09	19.04	50.59	-31.55	AVG	L1
0.6350	32.70	0.11	32.81	56.00	-23.19	QP	L1
0.6400	29.84	0.11	29.95	46.00	-16.05	AVG	L1
0.9150	30.60	0.13	30.73	56.00	-25.27	QP	L1
0.9150	20.73	0.13	20.86	46.00	-25.14	AVG	L1
1.6200	30.80	0.18	30.98	56.00	-25.02	QP	L1
1.6200	19.57	0.18	19.75	46.00	-26.25	AVG	L1
3.0700	30.40	0.25	30.65	56.00	-25.35	QP	L1
3.1499	17.28	0.25	17.53	46.00	-28.47	AVG	L1
0.1850	42.10	0.08	42.18	64.25	-22.07	QP	L2
0.1883	32.82	0.08	32.90	54.11	-21.21	AVG	L2
0.2949	31.80	0.08	31.88	60.38	-28.50	QP	L2
0.2949	22.50	0.08	22.58	50.38	-27.80	AVG	L2
0.6350	33.50	0.10	33.60	56.00	-22.40	QP	L2
0.6400	30.13	0.10	30.23	46.00	-15.77	AVG	L2
0.8149	23.15	0.12	23.27	46.00	-22.73	AVG	L2
0.8150	30.20	0.12	30.32	56.00	-25.68	QP	L2
1.3237	18.21	0.16	18.37	46.00	-27.63	AVG	L2
1.3500	30.90	0.16	31.06	56.00	-24.94	QP	L2
2.3399	19.39	0.22	19.61	46.00	-26.39	AVG	L2
2.3400	30.70	0.22	30.92	56.00	-25.08	QP	L2


### Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-Peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



## Test Plots

### *Conducted emissions (Line 1)*

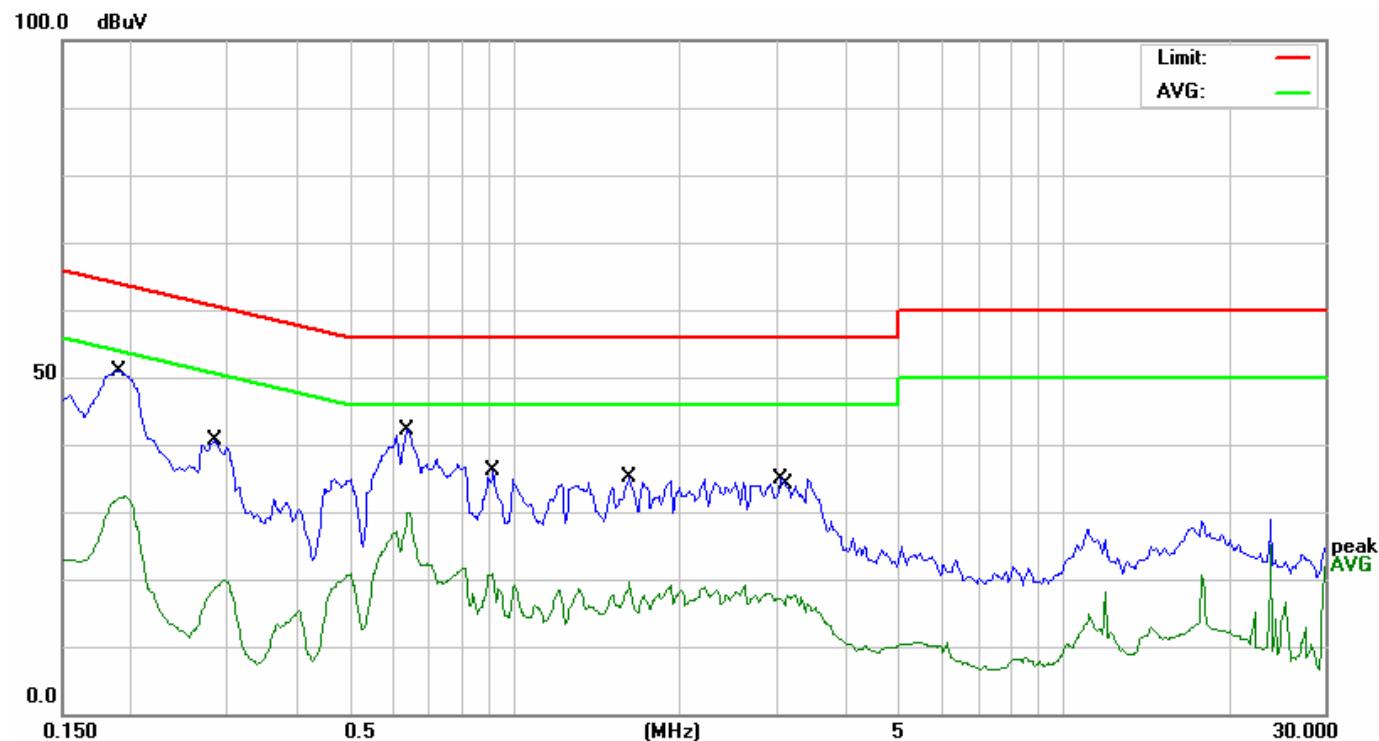

### *Conducted emissions (Line 2)*

