




RU config: Other
26dB Occupied Bandwidth:
Channel 64 - 26/8

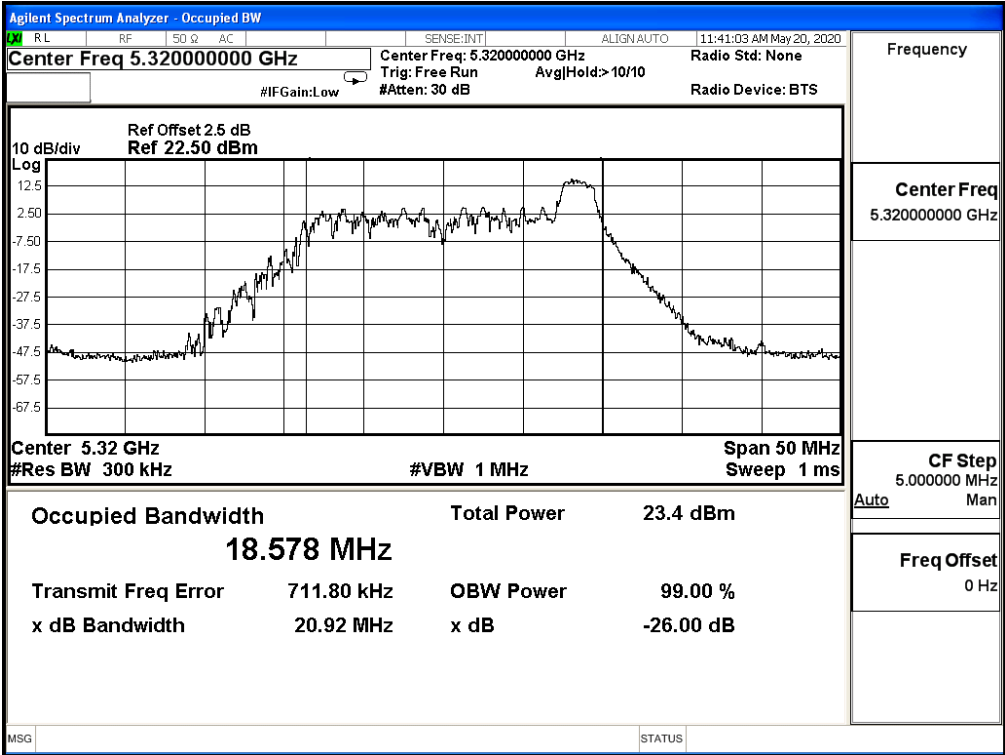


Channel 64 - 52/40

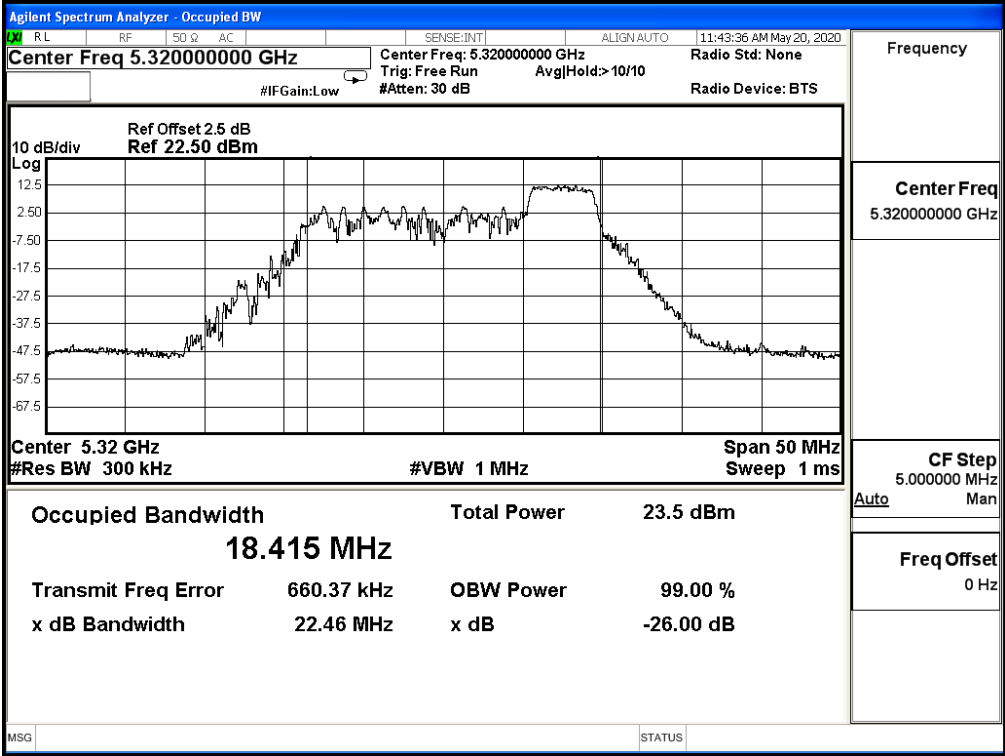


Channel 64 - 106/54

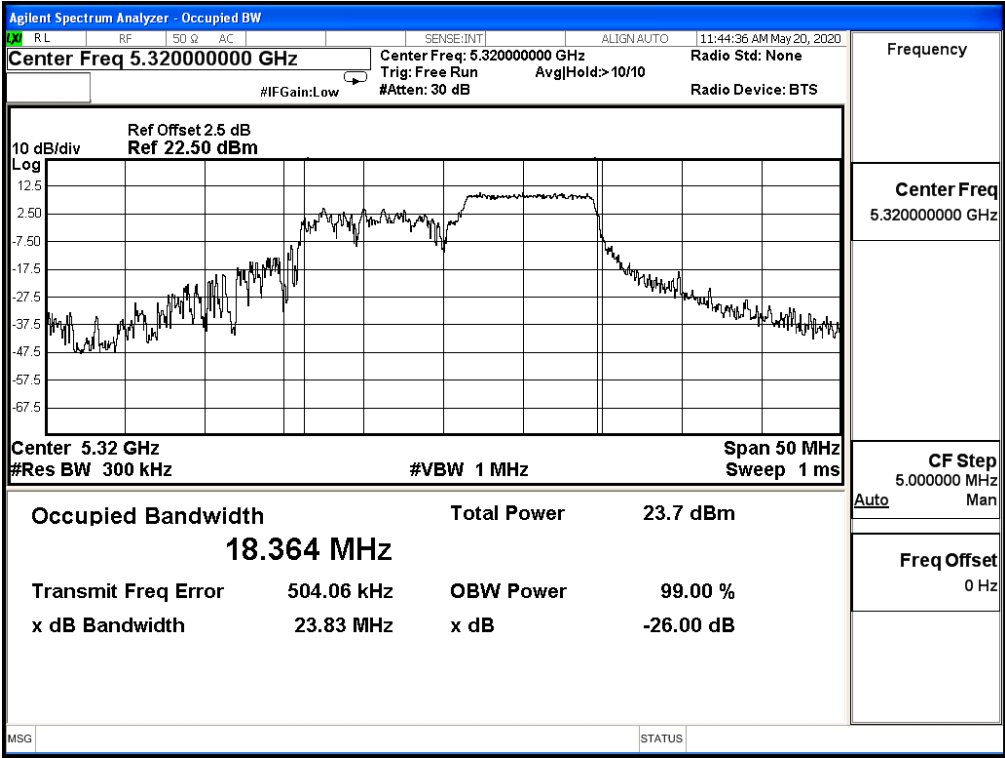


Channel 100 - 26/0

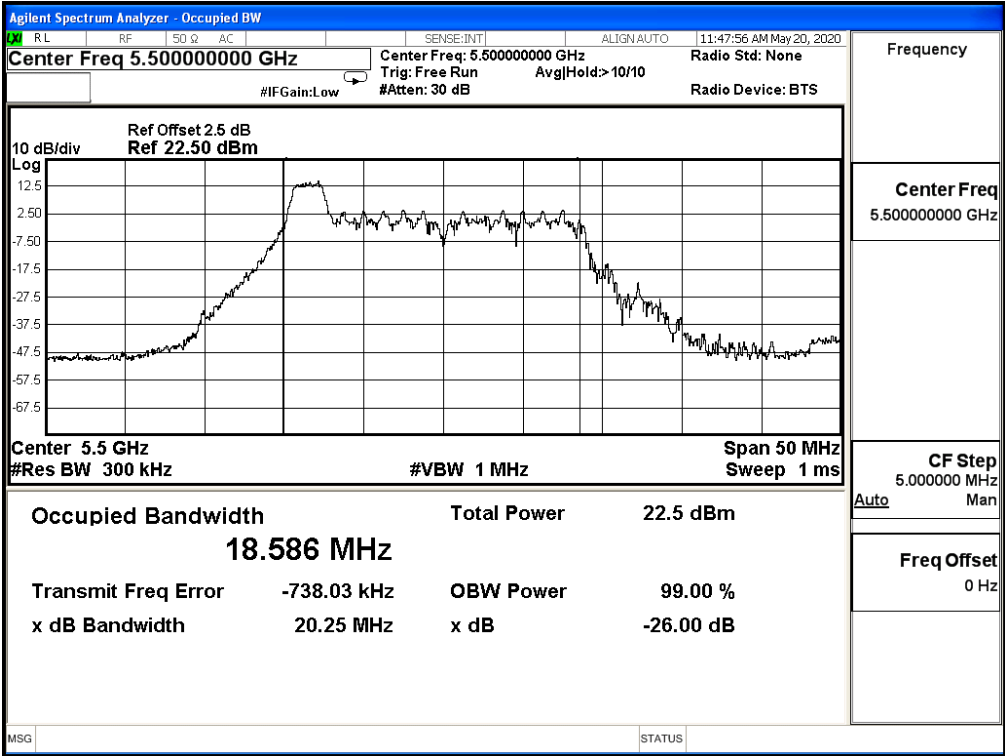


Channel 100 - 52/37

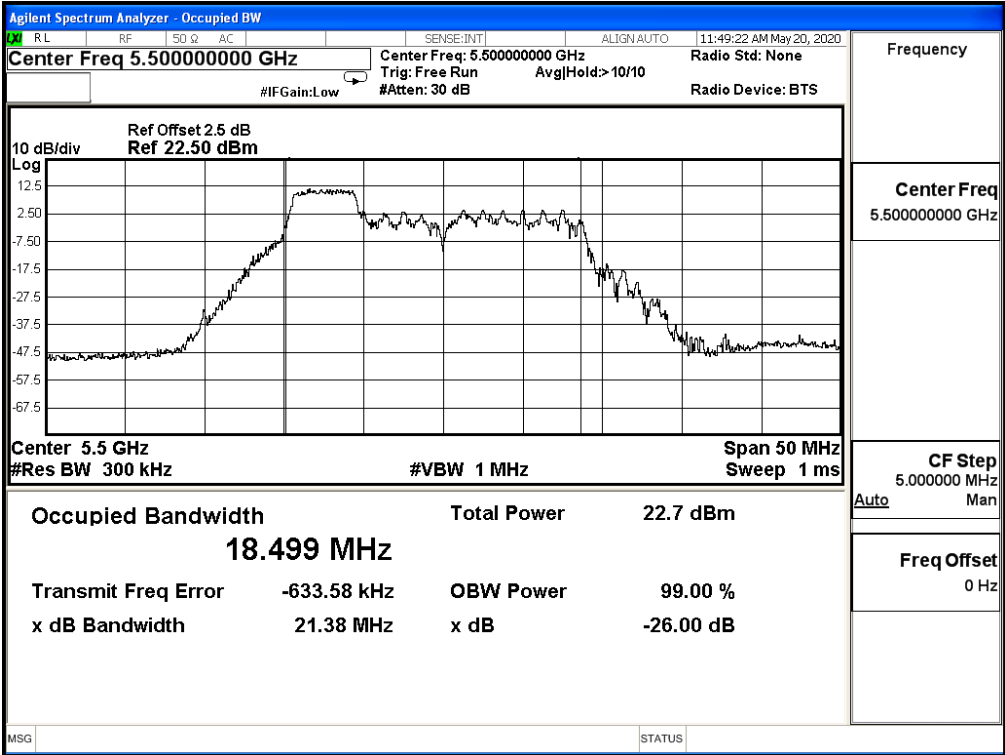


Channel 100 - 106/53

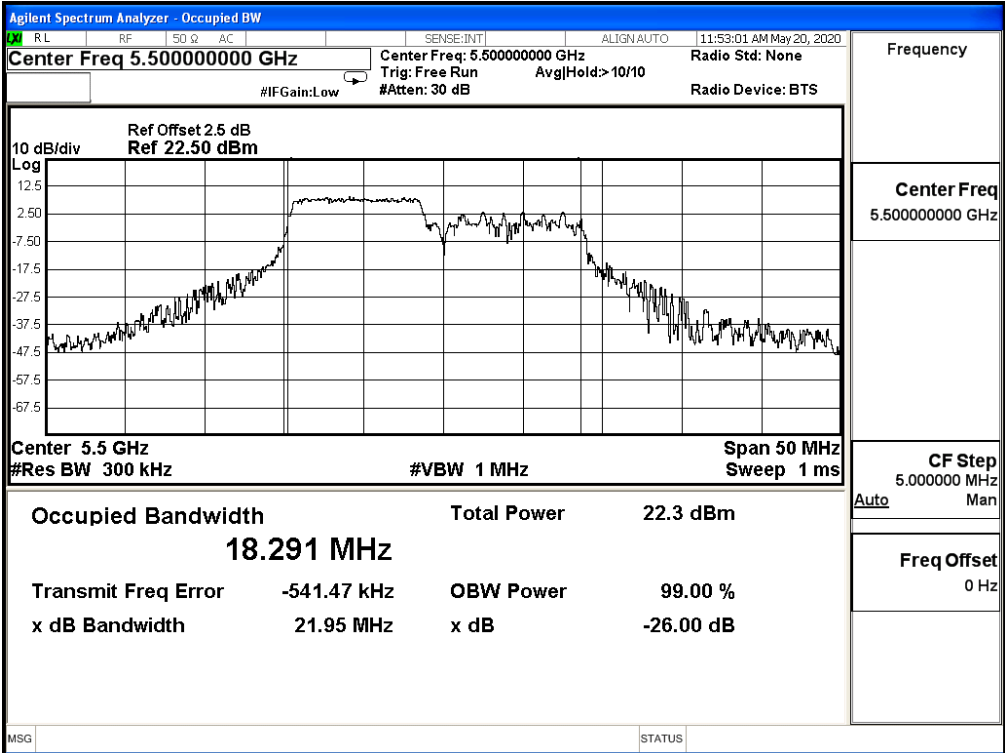


Channel 140 - 26/8

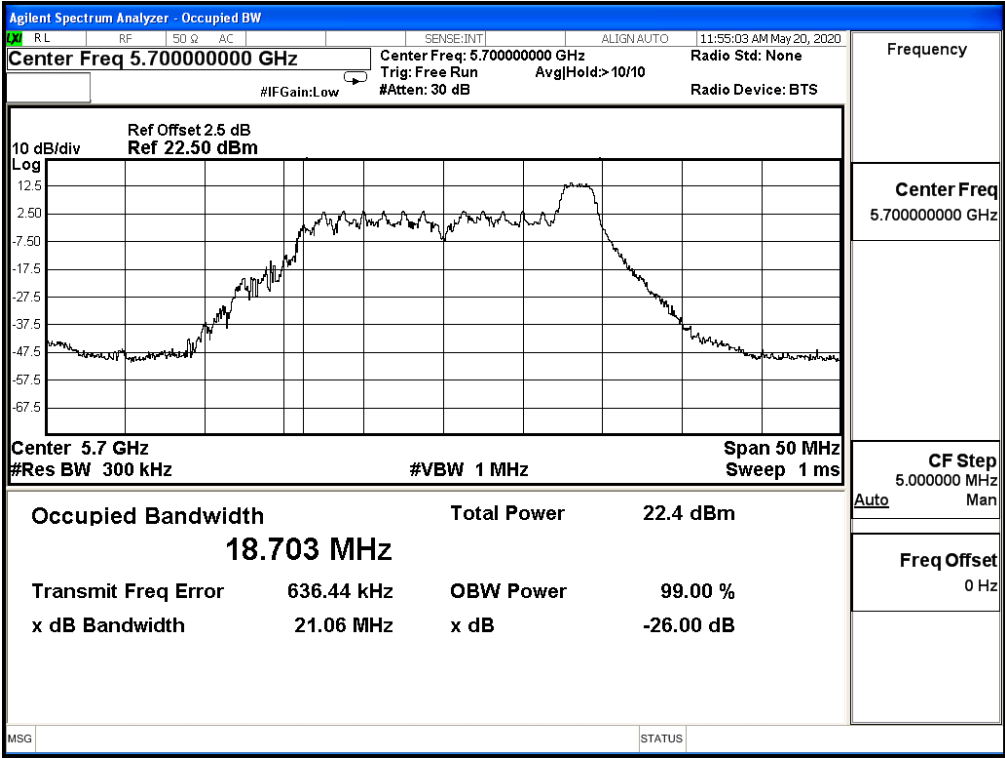

Channel 140 - 52/40

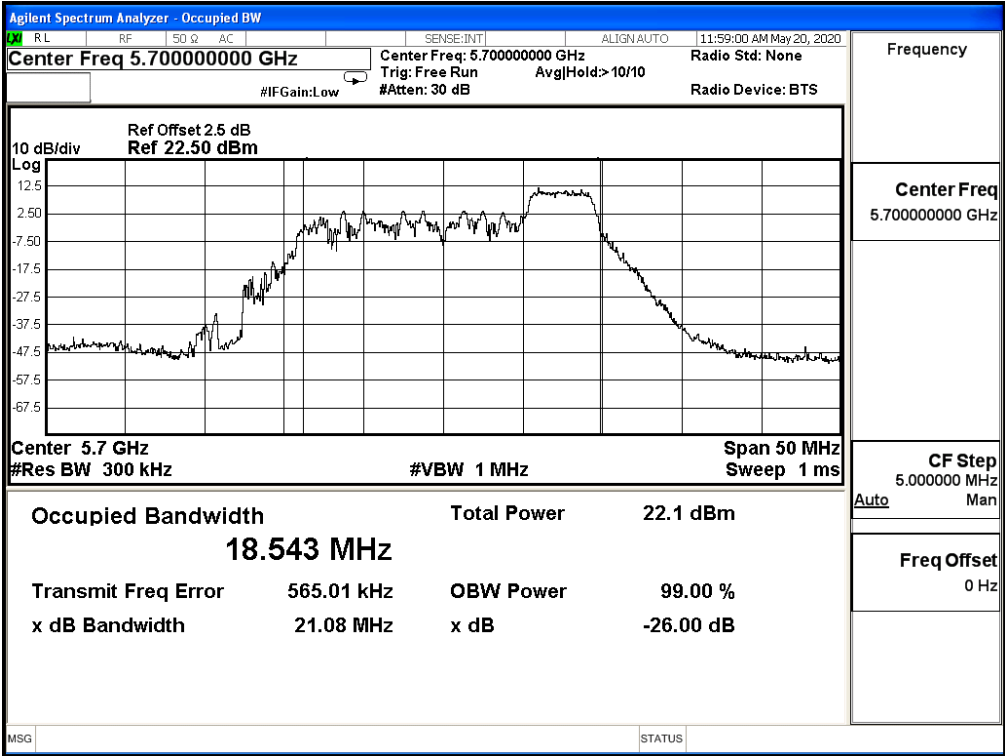

Channel 140 - 106/54

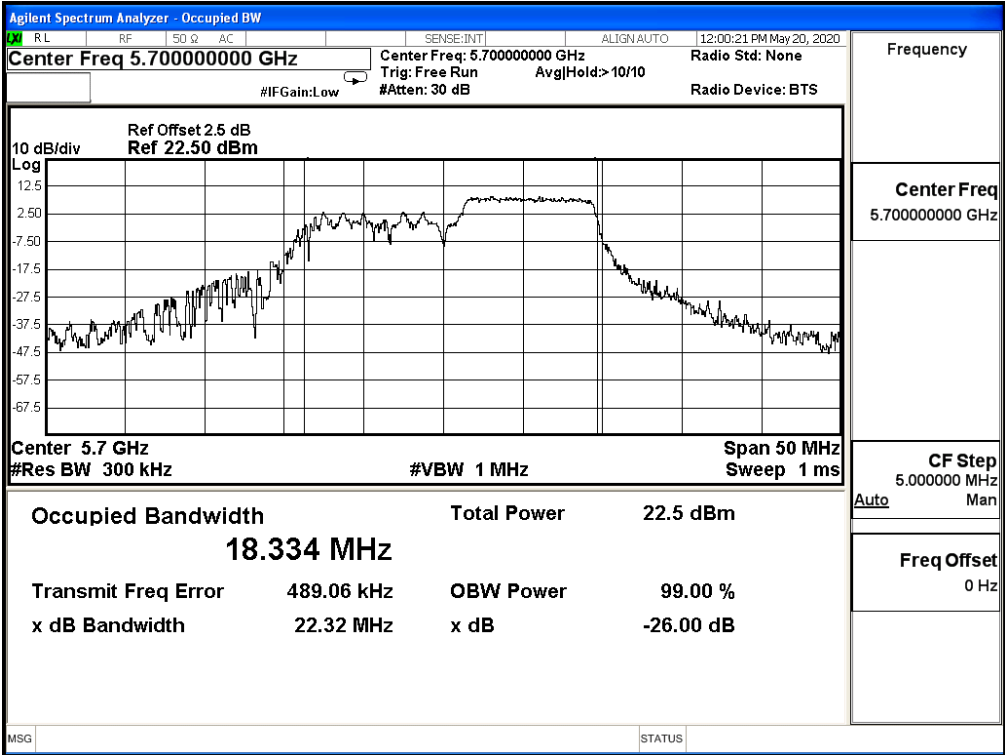

Product : Portable computer
 Test Item : Maximum conducted output power
 Test Date : 2020/05/18
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)

RU config: Full

Cable loss=2.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate (Mbps)											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
		Measurement Level (dBm)											
38	5190	13.47	--	--	--	--	--	--	--	--	--	--	--
46	5230	13.28	13.19	13.14	13.11	13.01	13.00	12.92	12.91	12.89	12.81	12.76	12.68
54	5270	13.41	--	--	--	--	--	--	--	--	--	--	--
62	5310	13.42	13.33	13.3	13.26	13.18	13.15	13.07	13.01	12.92	12.90	12.80	12.73
102	5510	13.43	--	--	--	--	--	--	--	--	--	--	--
110	5550	13.48	13.41	13.35	13.32	13.23	13.22	13.20	13.18	13.10	13.00	12.92	12.89
134	5670	13.46	13.4	13.38	13.35	13.29	13.21	13.17	13.1	13.09	13	12.92	12.91
142F(Band3)	5710	13.04	12.97	12.92	12.83	12.79	12.69	12.62	12.59	12.53	12.48	12.4	12.36
142F(Band4)	5710	0.2	0.16	0.1	0.07	0.04	-0.04	-0.11	-0.2	-0.27	-0.32	-0.35	-0.4
151	5755	13.37	13.28	13.21	13.11	13.07	13.03	12.93	12.87	12.82	12.79	12.76	12.66
159	5795	13.42	13.4	13.35	13.25	13.19	13.12	13.09	13.08	12.98	12.97	12.93	12.90

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
38	5190	--	13.47	24	--	Pass
46	5230	--	13.28	24	--	Pass
54	5270	41.750	13.41	24	27.21	Pass
62	5310	41.490	13.42	24	27.18	Pass
102	5510	41.950	13.43	24	27.23	Pass
110	5550	41.280	13.48	24	27.16	Pass
134	5670	41.840	13.46	24	27.22	Pass
142F(Band3)	5710	35.700	13.04	24	26.53	Pass
142F(Band4)	5710	5.700	0.2	30	18.56	Pass
151	5755	--	13.37	30	--	Pass
159	5795	--	13.42	30	--	Pass


RU config: Other

Channel No / Frequency (MHz)	RU setting	Average Power Output (dBm)												
		Data Rate (Mbps)												Required Limi
		MCS0	--	--	--	--	--	--	--	--	--	--	--	
38 / 5190	242/61	13.42	--	--	--	--	--	--	--	--	--	--	--	<24dBm
62 / 5310	242/62	13.38	--	--	--	--	--	--	--	--	--	--	--	<24dBm
102 / 5510	242/61	13.43	--	--	--	--	--	--	--	--	--	--	--	<24dBm
134 / 5670	242/62	13.49	--	--	--	--	--	--	--	--	--	--	--	<24dBm
151 / 5755	242/61	13.41	--	--	--	--	--	--	--	--	--	--	--	<24dBm


Maximum conducted output power Measurement:

Channel No /Frequency Range (MHz)	RU setting	26dB Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
38 / 5190	242/61	--	13.42	24	--	Pass
62 / 5310	242/62	25.330	13.38	24	25.04	Pass
102 / 5510	242/61	25.540	13.43	24	25.07	Pass
134 / 5670	242/62	23.020	13.49	24	24.62	Pass
151 / 5755	242/61	--	13.41	30	--	Pass


RU config: Full
26dB Occupied Bandwidth:
Channel 54

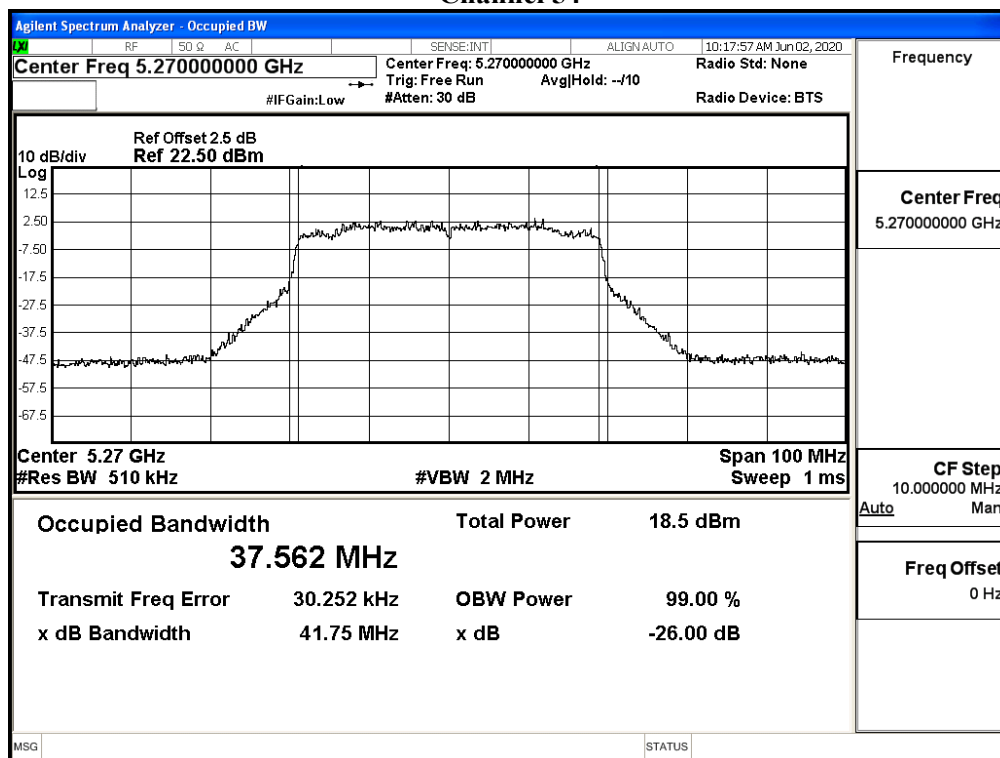


Channel 62

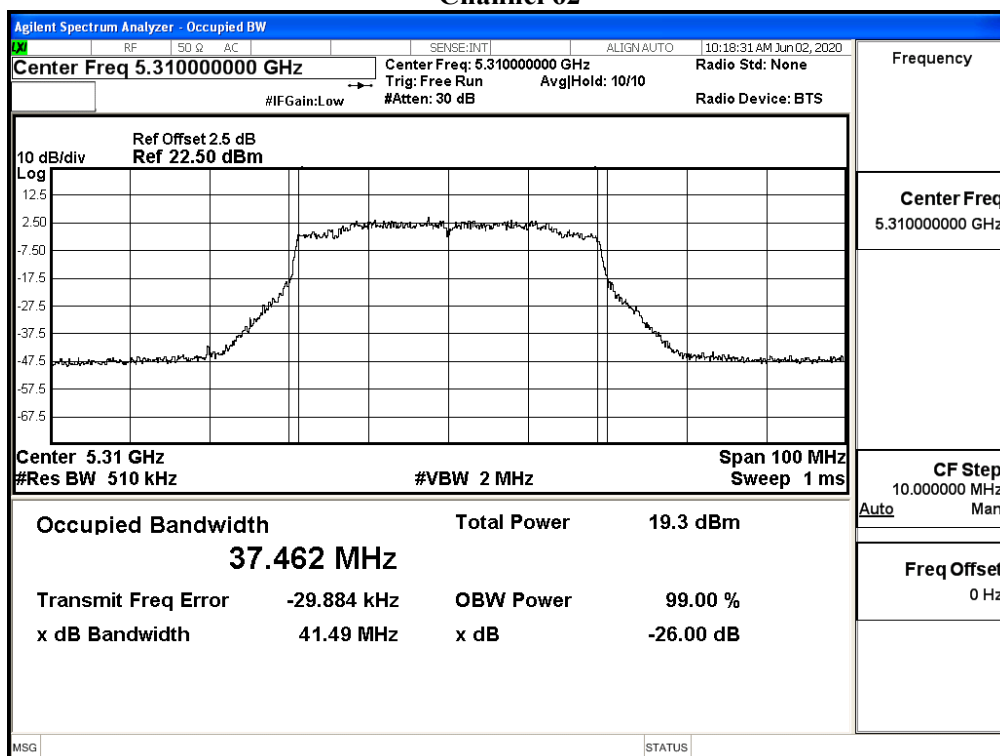


Channel 102

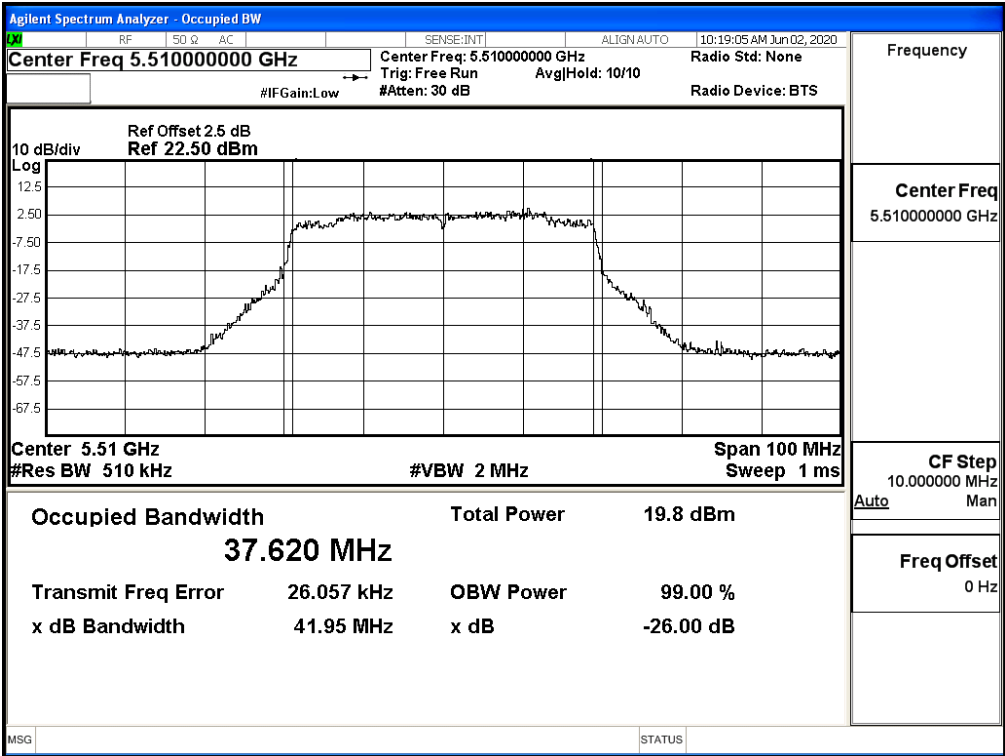


Channel 110

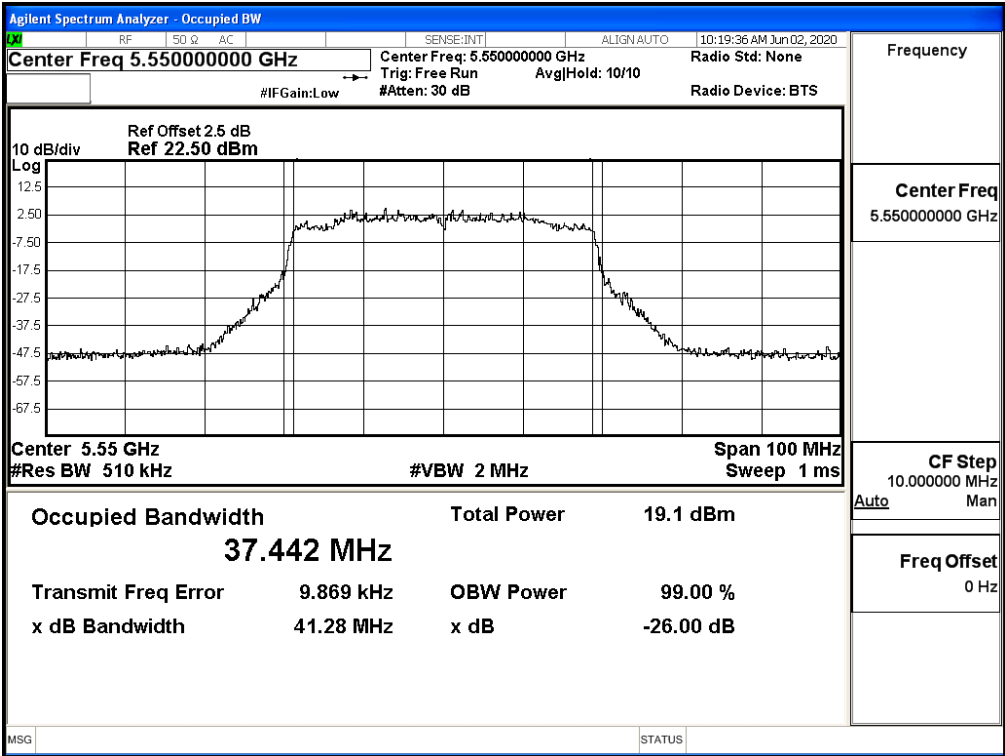


Channel 134

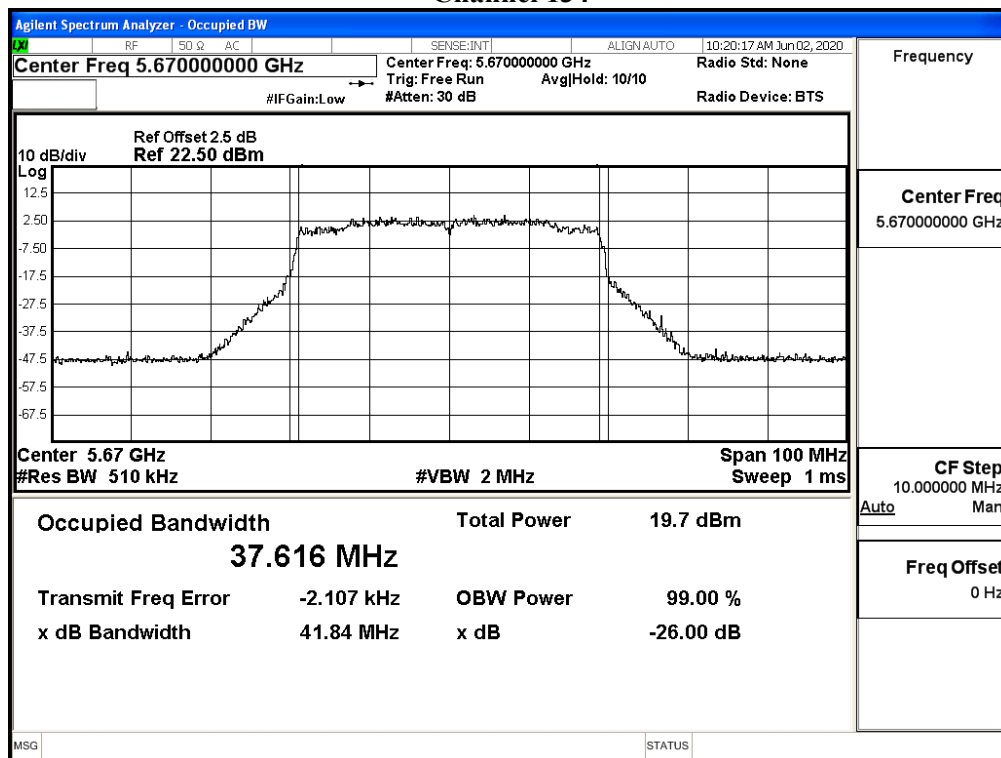


Channel 142

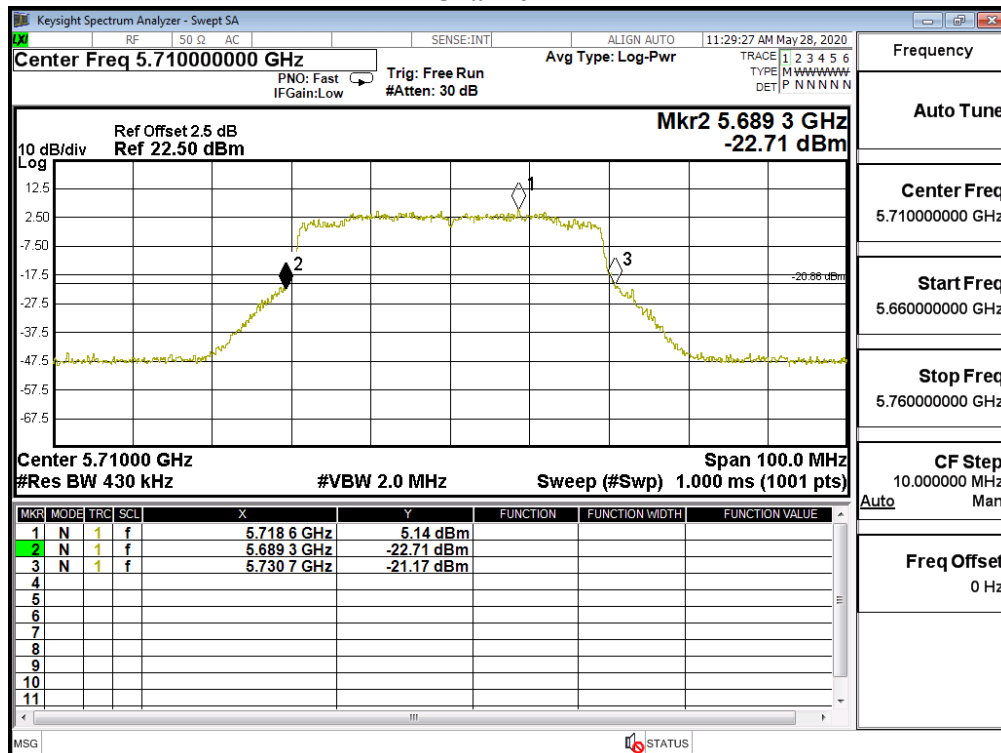


RU config: Full
Maximum conducted output power:
Channel 142 (Band3)

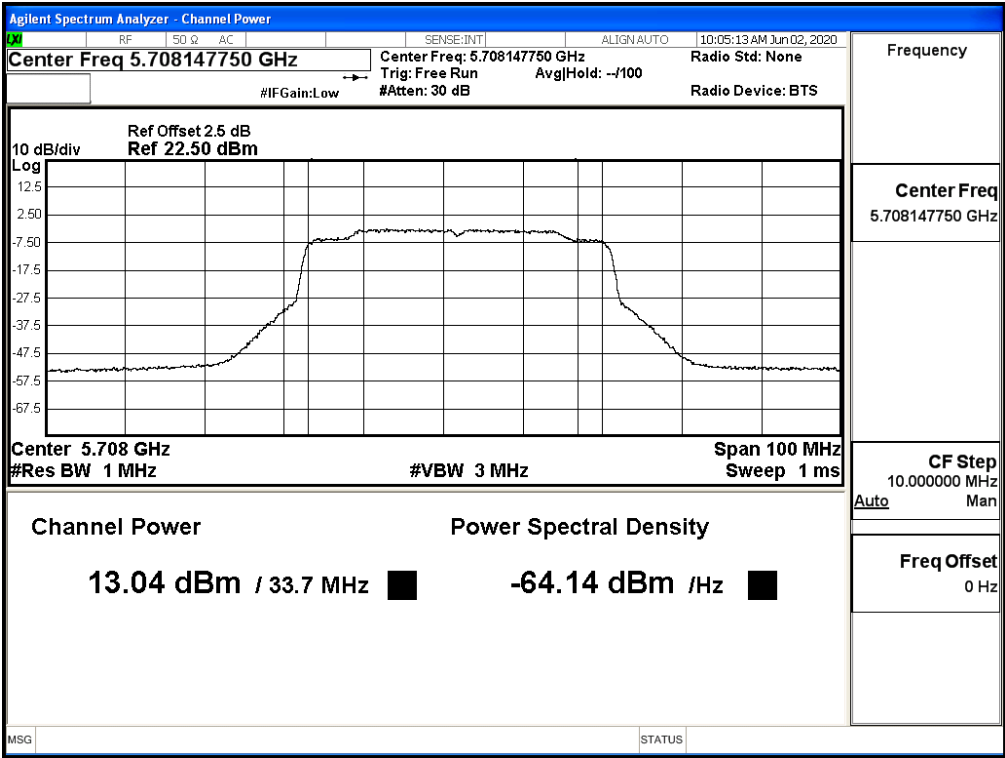


Maximum conducted output power:
Channel 142 (Band4)

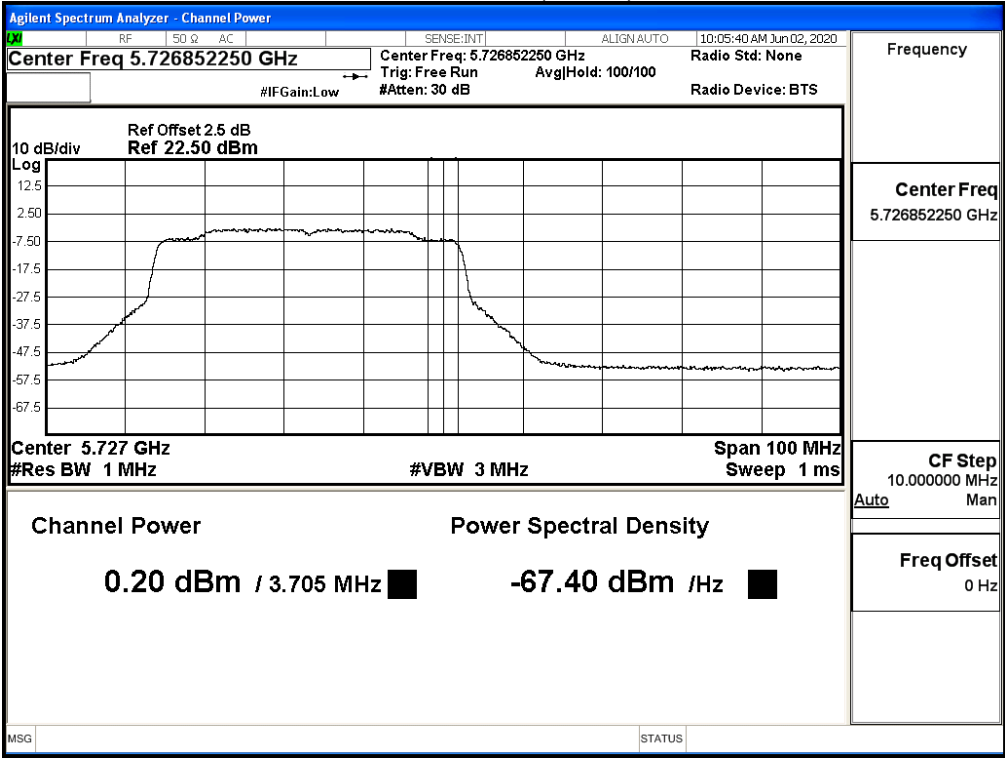


RU config: Other
26dB Occupied Bandwidth:
Channel 62 - 242/62

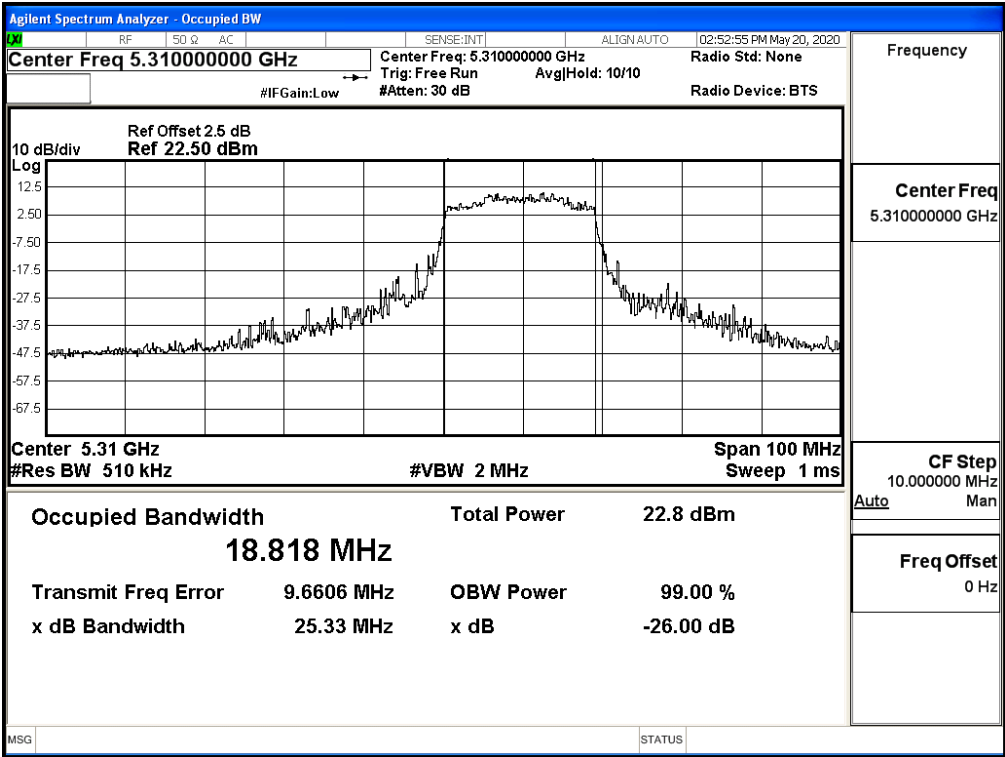

Channel 102 - 242/61

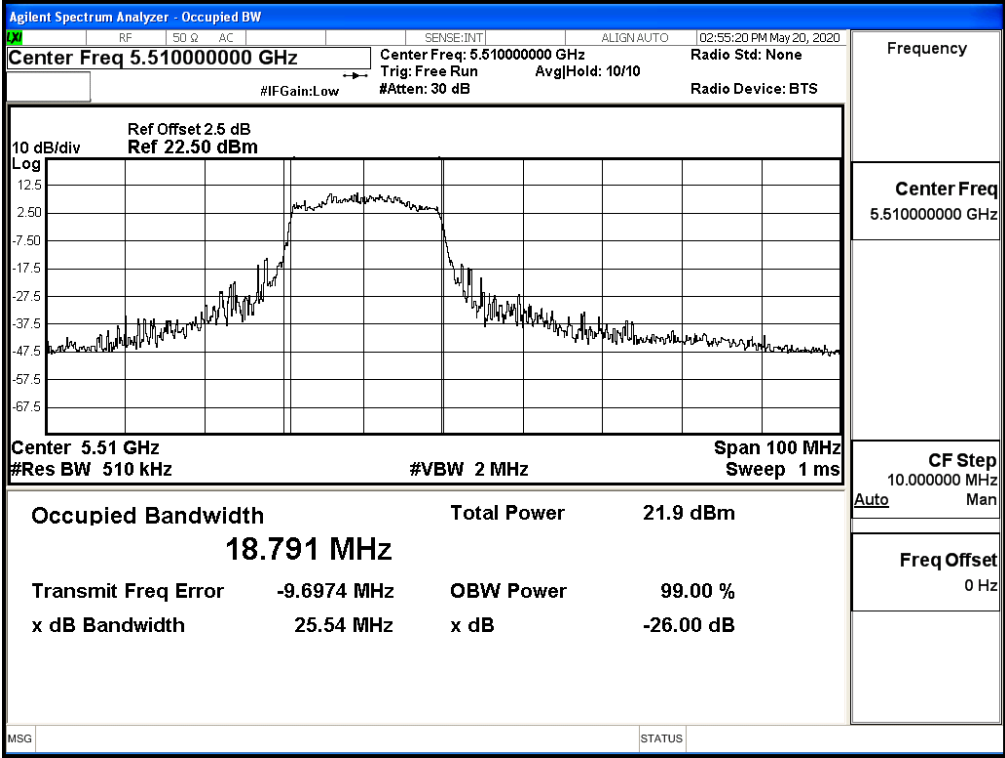

Channel 134 - 242/62

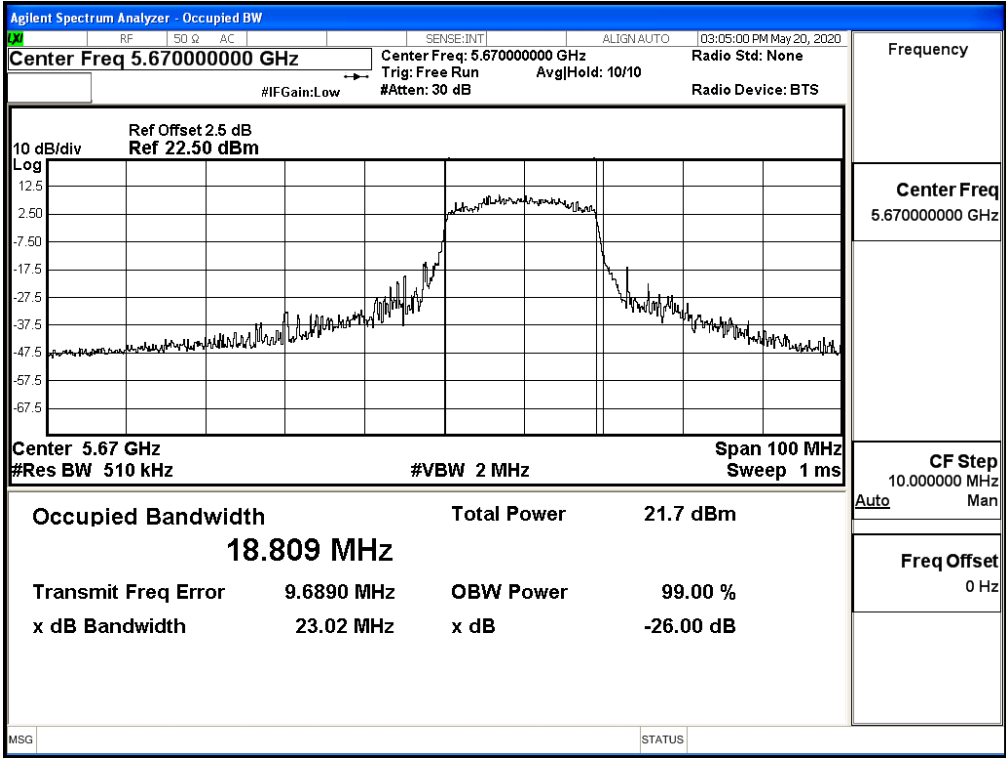

Product : Portable computer
 Test Item : Maximum conducted output power
 Test Date : 2020/05/18
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)

RU config: Full

Cable loss=2.5dB		Maximum conducted output power											
Channel No	Frequency (MHz)	Data Rate (Mbps)											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
42	5210	13.21	13.2	13.17	13.13	13.12	13.06	13	12.98	12.89	12.79	12.77	12.67
58	5290	13.29	13.25	13.16	13.14	13.12	13.09	13.04	13.03	12.98	12.95	12.90	12.80
106ac80	5530	13.33	13.28	13.21	13.2	13.18	13.09	13.02	12.94	12.92	12.85	12.79	12.71
122ac80	5610	13.49	13.47	13.4	13.31	13.28	13.18	13.17	13.07	13.03	13.00	12.98	12.93
138ac80(Band3)	5690	13.34	13.27	13.21	13.15	13.11	13.06	12.96	12.9	12.87	12.83	12.76	12.7
138ac80(Band4)	5690	-3.95	-4.03	-4.07	-4.16	-4.24	-4.31	-4.38	-4.45	-4.53	-4.58	-4.65	-4.74
155ac80	5775	13.29	13.22	13.13	13.03	13	12.91	12.83	12.8	12.7	12.68	12.66	12.58

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
42	5210	--	13.21	24	--	Pass
58	5290	81.960	13.29	24	30.14	Pass
106ac80	5530	82.260	13.33	24	30.15	Pass
122ac80	5610	82.160	13.49	24	30.15	Pass
138ac80(Band3)	5690	76.200	13.34	24	29.82	Pass
138ac80(Band4)	5690	--	-3.95	30	--	Pass
155ac80	5775	--	13.29	30	--	Pass


RU config: Other

Channel No / Frequency Range (MHz)	RU setting	Maximum Conducted Power Output (dBm)												
		Data Rate (Mbps)												Required Limit
		MCS0	--	--	--	--	--	--	--	--	--	--	--	
42/5210	484/65	13.49	--	--	--	--	--	--	--	--	--	--	--	<24dBm
58/5290	484/66	13.41	--	--	--	--	--	--	--	--	--	--	--	<24dBm
106/5530	484/65	13.42	--	--	--	--	--	--	--	--	--	--	--	<24dBm
155/5775	484/65	13.33	--	--	--	--	--	--	--	--	--	--	--	<30dBm


Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
42/5210	484/65	--	13.49	24	--	Pass
58/5290	484/66	42.160	13.41	24	27.25	Pass
106/5530	484/65	49.780	13.42	24	27.97	Pass
155/5775	484/65	--	13.33	30	--	Pass


RU config: Full
26dB Occupied Bandwidth:
Channel 58

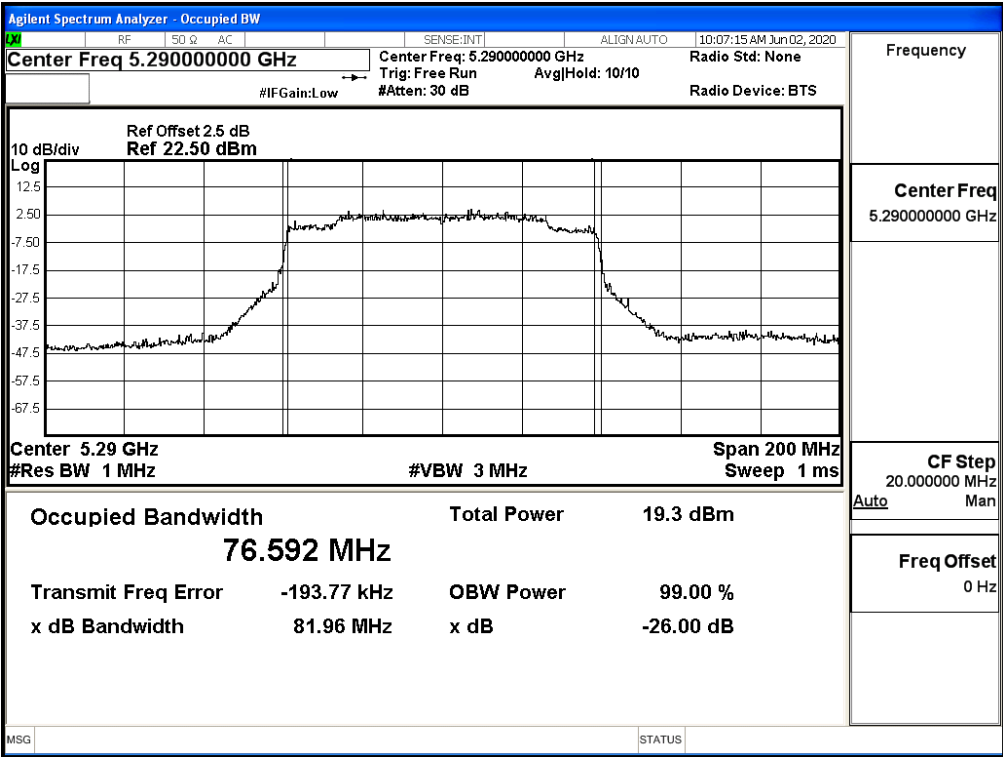


Channel 106

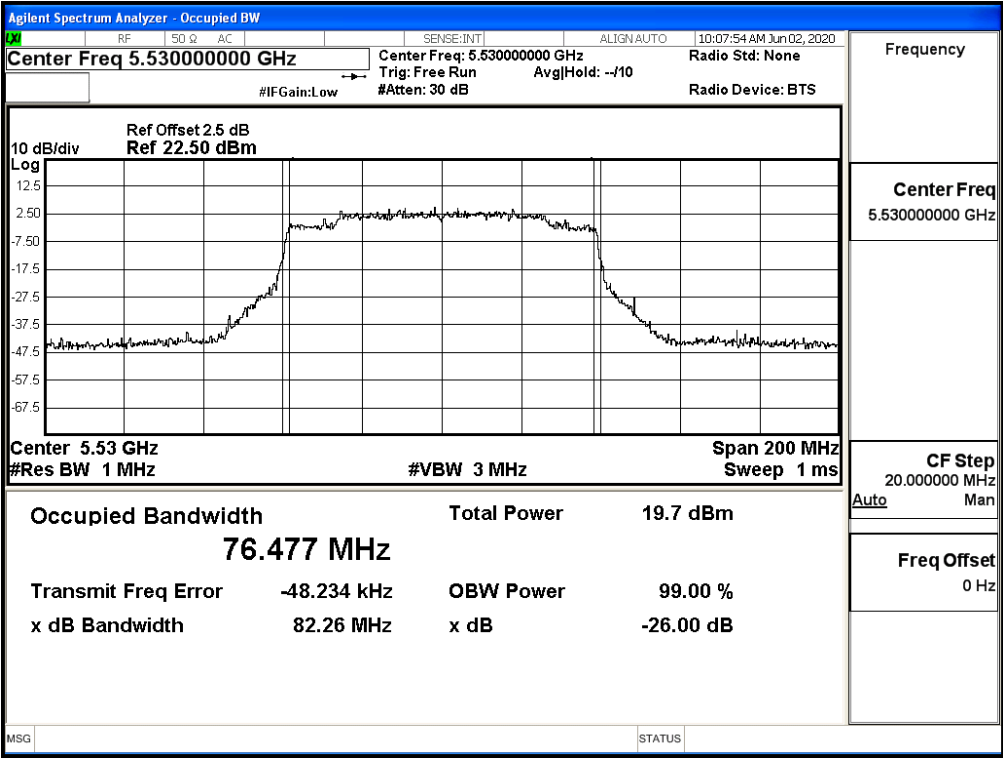

Channel 122

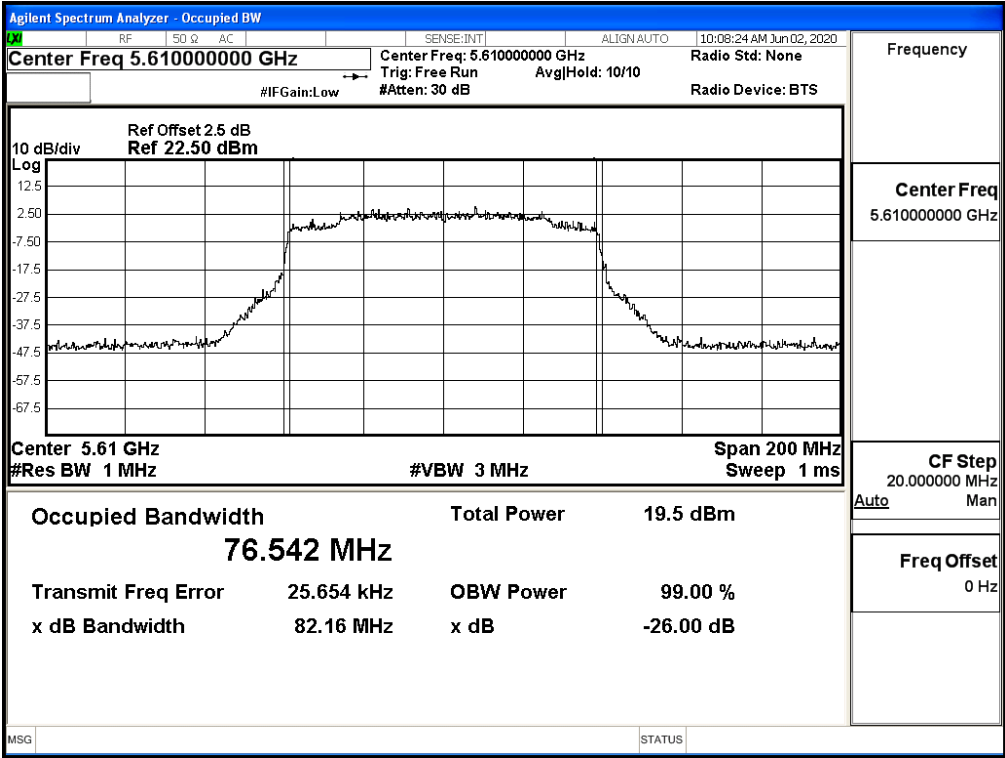


Channel 138

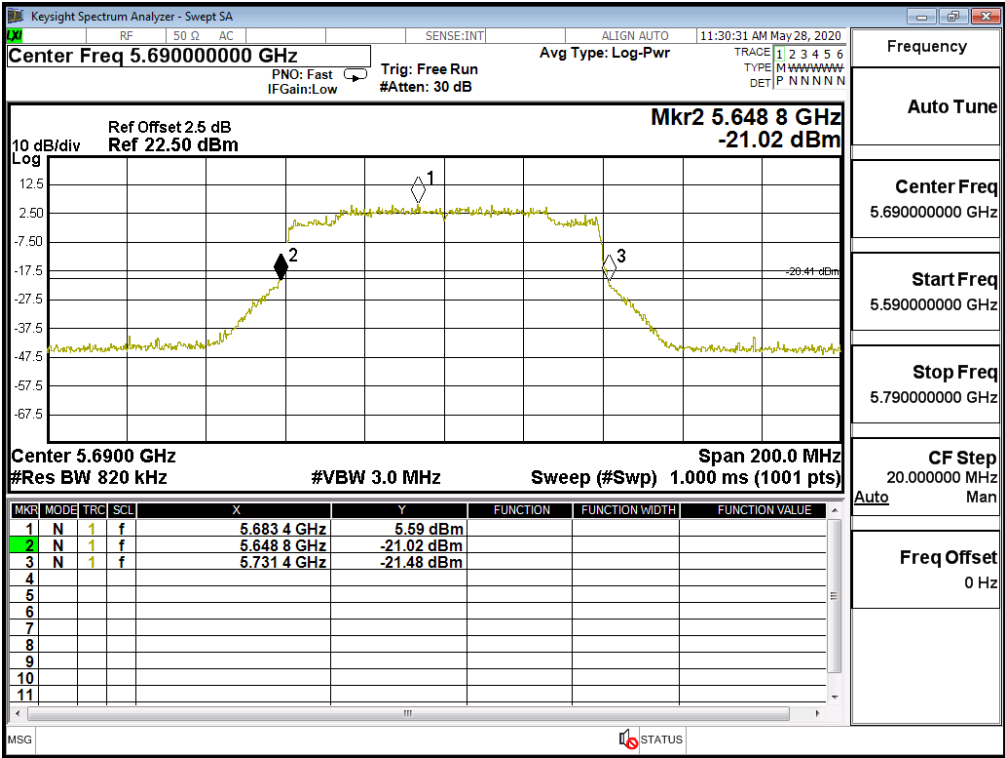

RU config: Full


Maximum conducted output power:

Channel 138 (Band3)

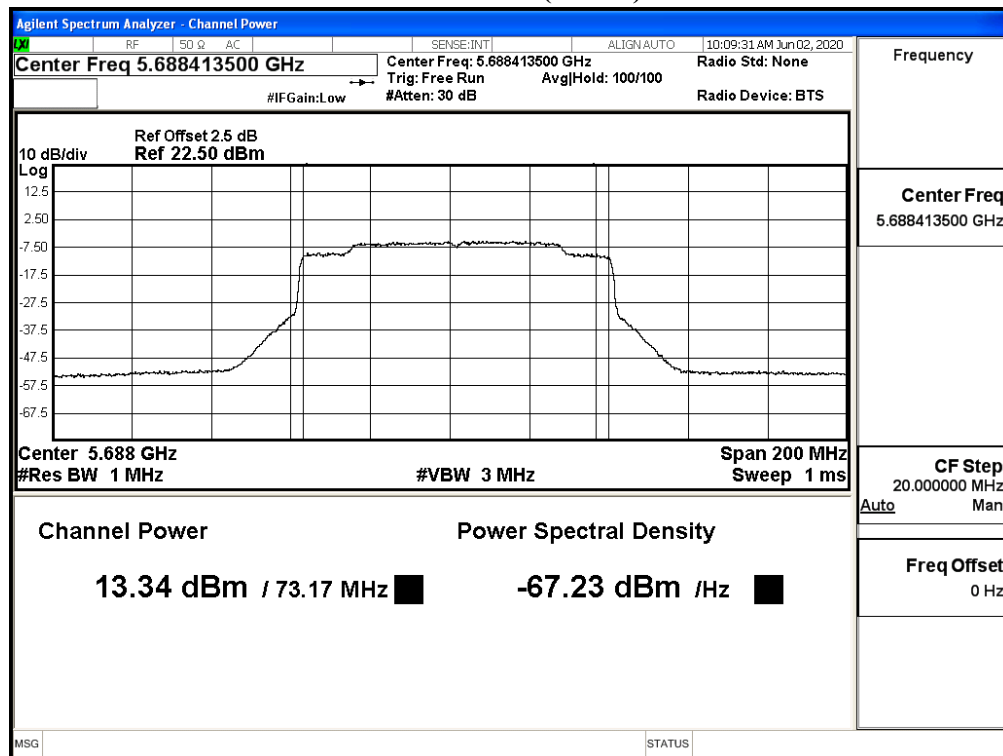


Maximum conducted output power:

Channel 138 (Band4)

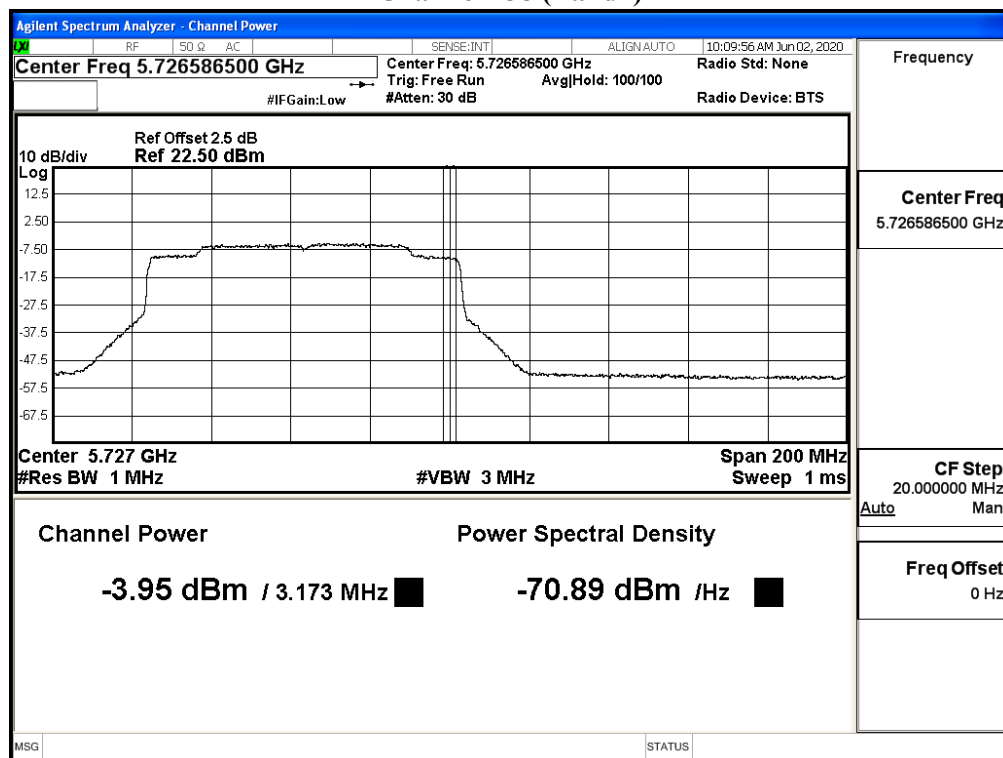


RU config: Other

26dB Occupied Bandwidth:
Channel 58 - 484/66

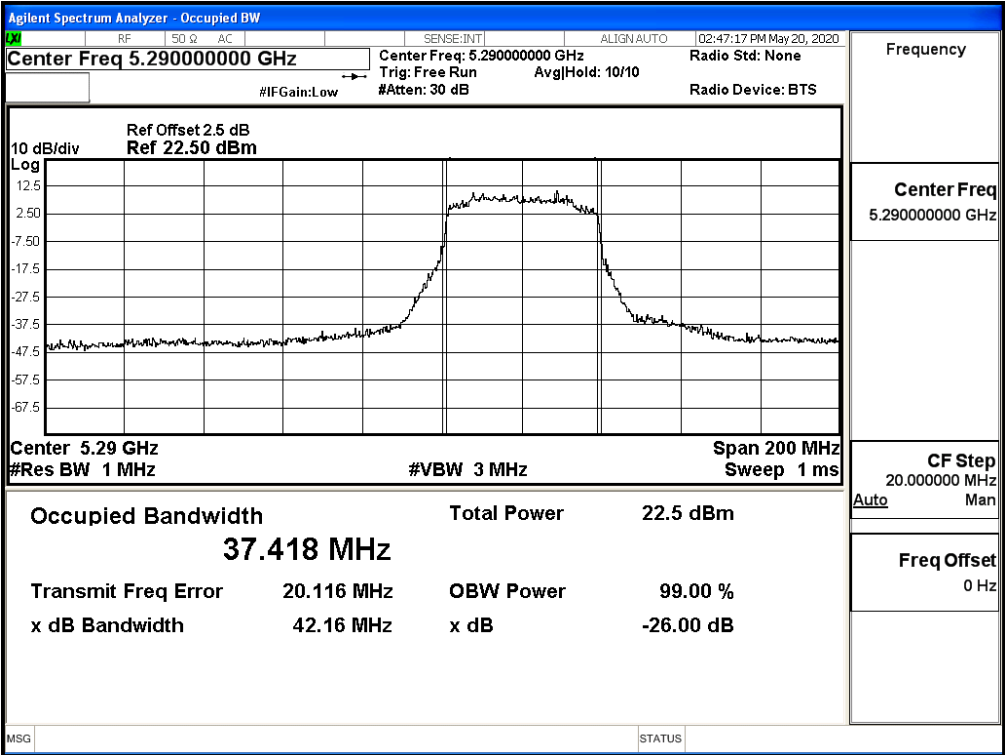

Channel 106 - 484/65

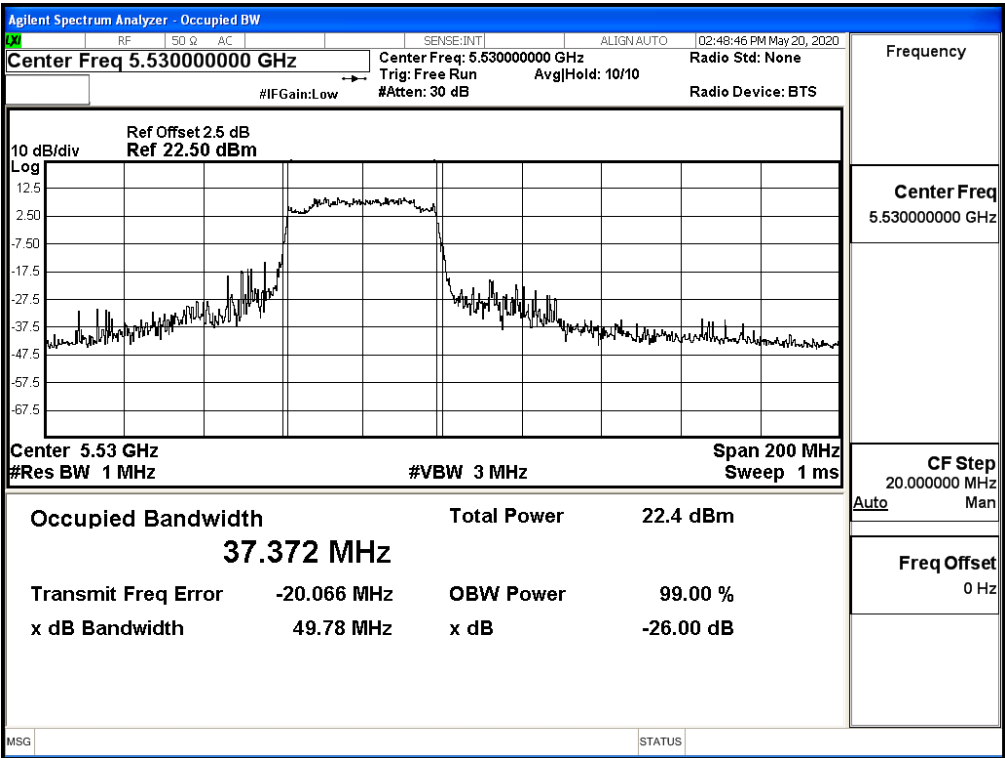

Product : Portable computer
 Test Item : Maximum conducted output power
 Test Date : 2020/05/18
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)

RU config: Full

Cable loss=2.5dB		Maximum conducted output power											
Channel No	Frequency (MHz)	Data Rate (Mbps)											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
50ac160(Band1)	5250	10.5	10.44	10.41	10.35	10.27	10.2	10.1	10.07	10.03	9.99	9.9	9.86
50ac160(Band2)	5250	10.4	10.37	10.31	10.28	10.21	10.11	10.08	10.01	9.92	9.88	9.79	9.72
114ac160	5570	13.46	13.41	13.31	13.3	13.25	13.23	13.22	13.17	13.16	13.09	13.03	12.93

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
50ac160(Band1)	5250	--	10.5	24	--	Pass
50ac160(Band2)	5250	81.550	10.4	24	21.17	Pass
114ac160	5570	163.100	13.46	24	22.29	Pass


RU config: Other

Channel No / Frequency (MHz)	RU setting	Average Power Output (dBm)												
		Data Rate (Mbps)												Required Limit
		MCS0	--	--	--	--	--	--	--	--	--	--	--	
50/5250	996/67	13.47	--	--	--	--	--	--	--	--	--	--	--	<24dBm
	996/S67	13.48	--	--	--	--	--	--	--	--	--	--	--	<24dBm
114/5570	996/67	13.48	--	--	--	--	--	--	--	--	--	--	--	<24dBm
	996/S67	13.48	--	--	--	--	--	--	--	--	--	--	--	<24dBm


Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Output Power (dBm)	Output Power Limit		Result
				(dBm)	dBm+10log(BW)	
50/5250	996/67	--	13.47	24	--	Pass
	996/S67	--	13.48	24	--	Pass
114/5570	996/67	83.650	13.48	24	22.30	Pass
	996/S67	84.070	13.48	24	22.30	Pass

RU config: Full
26dB Occupied Bandwidth:
Channel 50

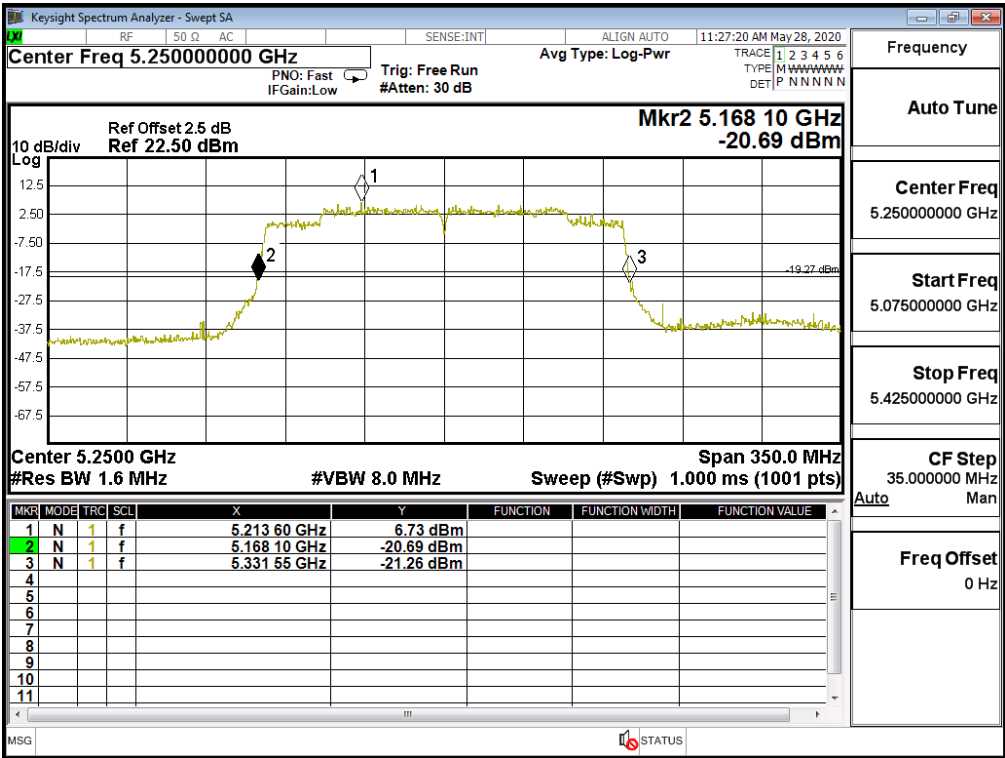


Channel 114

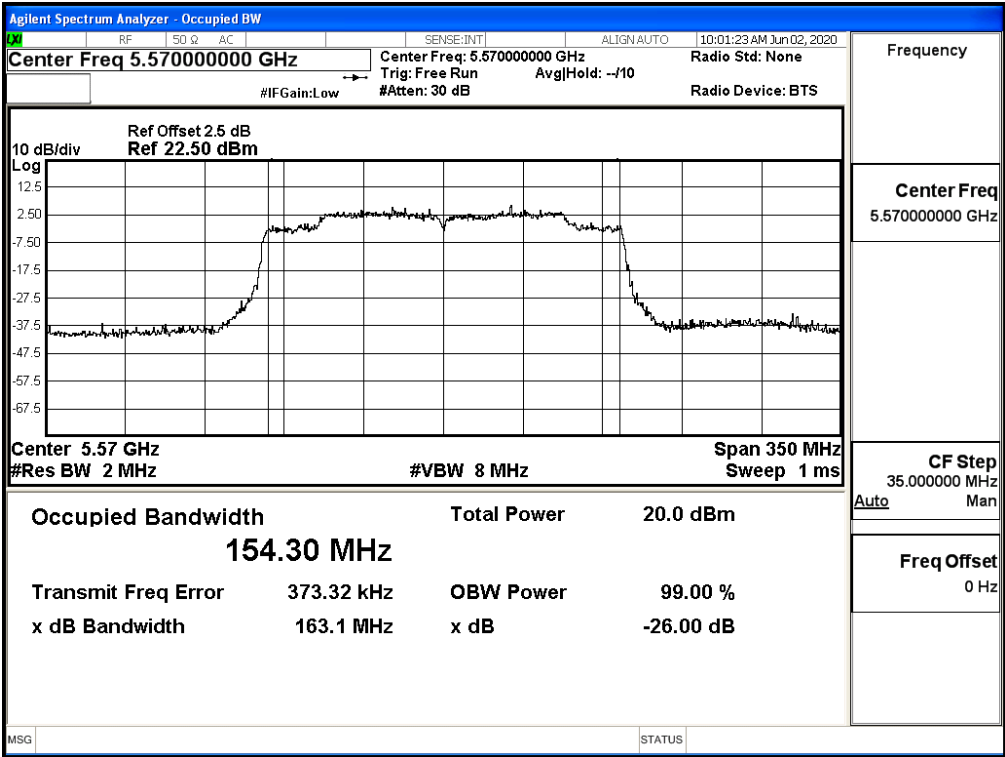

RU config: Full


Maximum conducted output power:

Channel 50 (Band1)

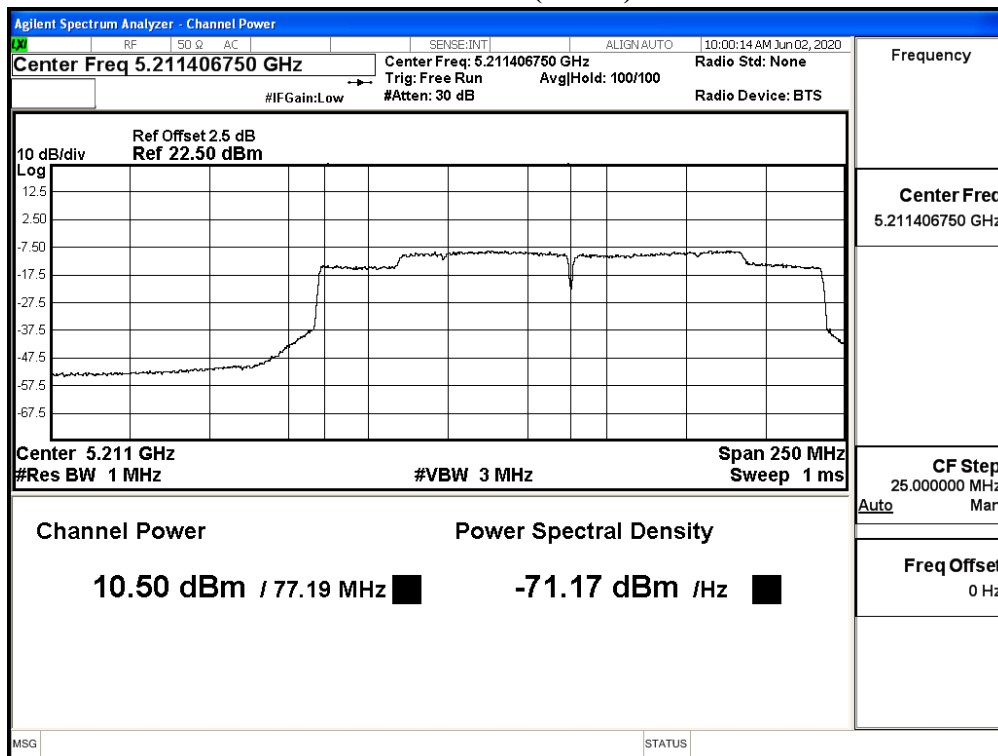


Maximum conducted output power:


Channel 50 (Band2)

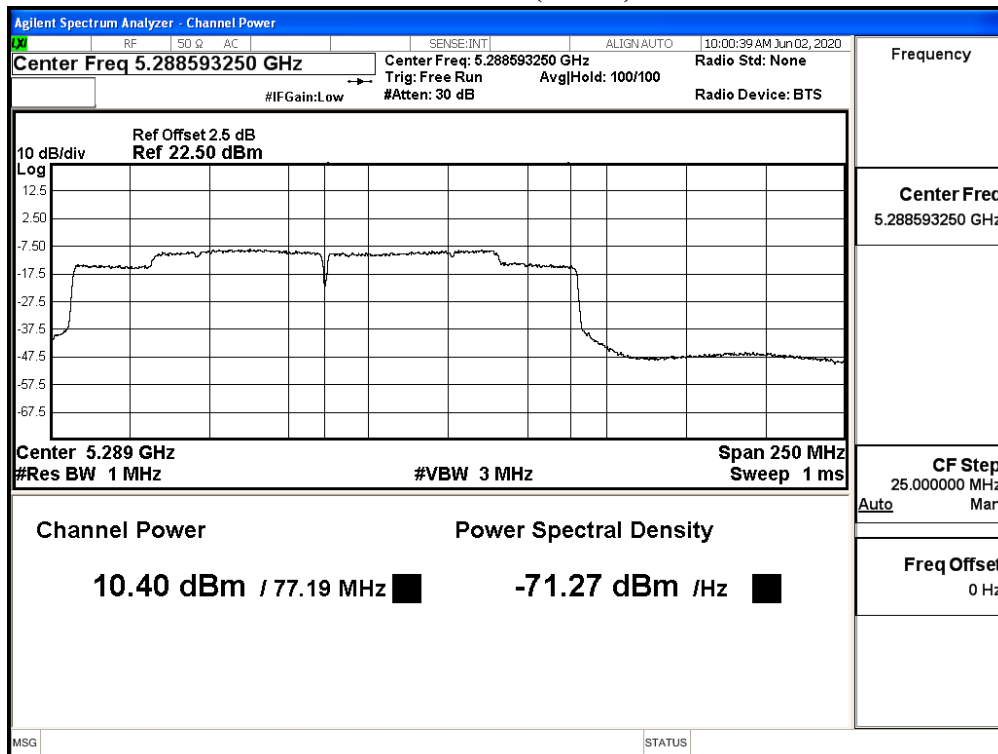

RU config: Other
26dB Occupied Bandwidth:
Channel 114 - 996/67

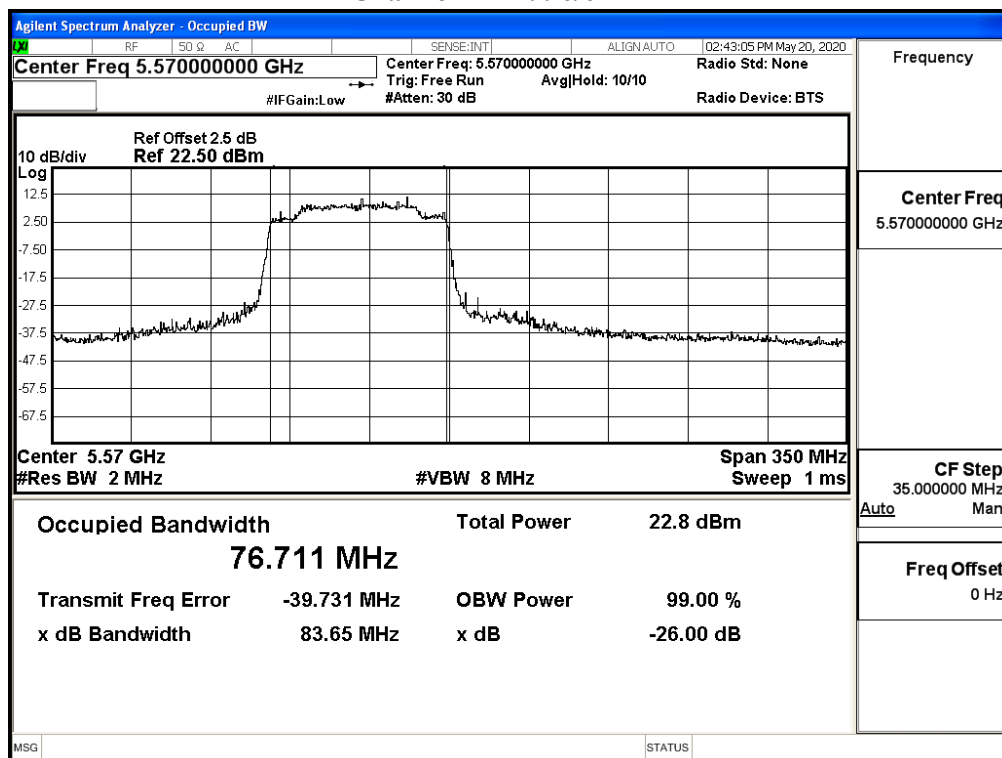

Channel 114 - 996/S67

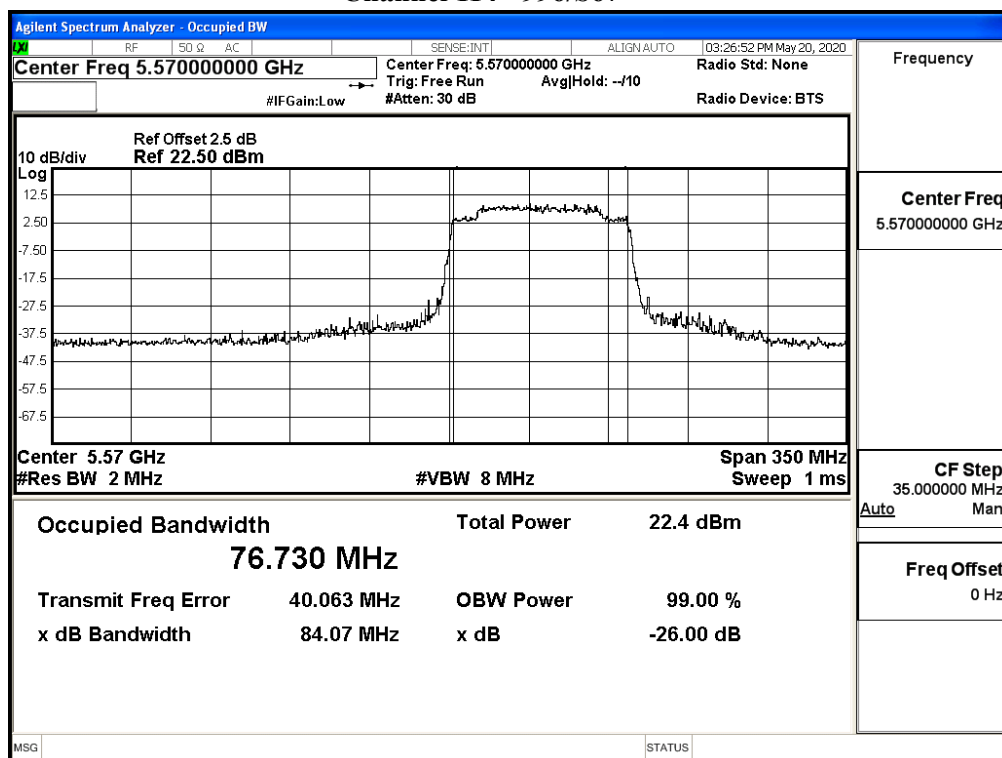

Product : Portable computer
 Test Item : Maximum conducted output power
 Test Date : 2020/05/18
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)

Chain A

Cable loss=2.5dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		HT8	HT9	HT10	HT11	HT12	HT13	HT14	HT15
		Measurement Level (dBm)							
36	5180	10.41	--	--	--	--	--	--	--
44	5220	10.44	10.34	10.25	10.17	10.12	10.09	10.06	10.03
48	5240	10.45	--	--	--	--	--	--	--
52	5260	10.49	--	--	--	--	--	--	--
60	5300	10.42	10.38	10.3	10.26	10.16	10.09	10.03	10.00
64	5320	10.47	--	--	--	--	--	--	--
100	5500	10.49	--	--	--	--	--	--	--
116	5580	10.48	10.4	10.36	10.31	10.26	10.21	10.17	10.11
140	5700	10.41	--	--	--	--	--	--	--
144(Band3)	5720	9.71	9.67	9.6	9.5	9.46	9.36	9.27	9.2
144(Band4)	5720	2.27	2.21	2.12	2.08	1.99	1.89	1.81	1.71
149	5745	10.41	--	--	--	--	--	--	--
157	5785	10.48	10.38	10.3	10.20	10.12	10.06	9.99	9.92
165	5825	10.5	--	--	--	--	--	--	--

Note: Maximum conducted output power Value = Reading value on average power meter + cable loss

Chain B

Cable loss=2.5dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		HT8	HT9	HT10	HT11	HT12	HT13	HT14	HT15
		Measurement Level (dBm)							
36	5180	10.48	--	--	--	--	--	--	--
44	5220	10.47	10.44	10.4	10.36	10.31	10.23	10.14	10.08
48	5240	10.46	--	--	--	--	--	--	--
52	5260	10.46	--	--	--	--	--	--	--
60	5300	10.49	10.42	10.39	10.32	10.28	10.22	10.13	10.08
64	5320	10.44	--	--	--	--	--	--	--
100	5500	10.43	--	--	--	--	--	--	--
116	5580	10.46	10.39	10.35	10.29	10.22	10.12	10.09	10.06
140	5700	10.43	--	--	--	--	--	--	--
144(Band3)	5720	9.83	9.74	9.64	9.58	9.54	9.51	9.46	9.43
144(Band4)	5720	1.8	1.74	1.65	1.56	1.48	1.45	1.37	1.34
149	5745	10.44	--	--	--	--	--	--	--
157	5785	10.42	10.36	10.28	10.22	10.13	10.03	10.00	9.95
165	5825	10.48	--	--	--	--	--	--	--

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss


Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
36	5180	--	10.41	10.48	13.46	24	--	Pass
44	5220	--	10.44	10.47	13.47	24	--	Pass
48	5240	--	10.45	10.46	13.47	24	--	Pass
52	5260	22.900	10.49	10.46	13.49	24	24.60	Pass
60	5300	22.950	10.42	10.49	13.47	24	24.61	Pass
64	5320	22.860	10.47	10.44	13.47	24	24.59	Pass
100	5500	23.120	10.49	10.43	13.47	24	24.64	Pass
116	5580	23.280	10.48	10.46	13.48	24	24.67	Pass
140	5700	22.420	10.41	10.43	13.43	24	24.51	Pass
144(Band3)	5720	16.350	9.71	9.83	12.78	24	23.14	Pass
144(Band4)	5720	--	2.27	1.8	5.052	30	--	Pass
149	5745	--	10.41	10.44	13.44	30	--	Pass
157	5785	--	10.48	10.42	13.46	30	--	Pass
165	5825	--	10.5	10.48	13.5	30	--	Pass


Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.


26dB Occupied Bandwidth:
Channel 52 (Chain A)

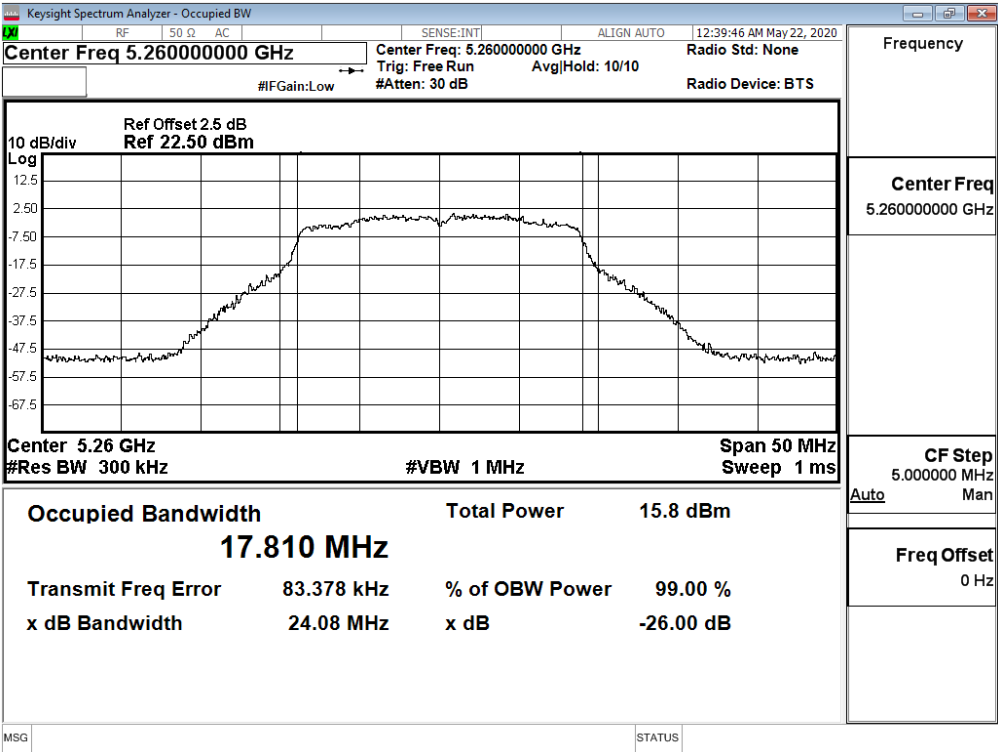


Channel 52 (Chain B)

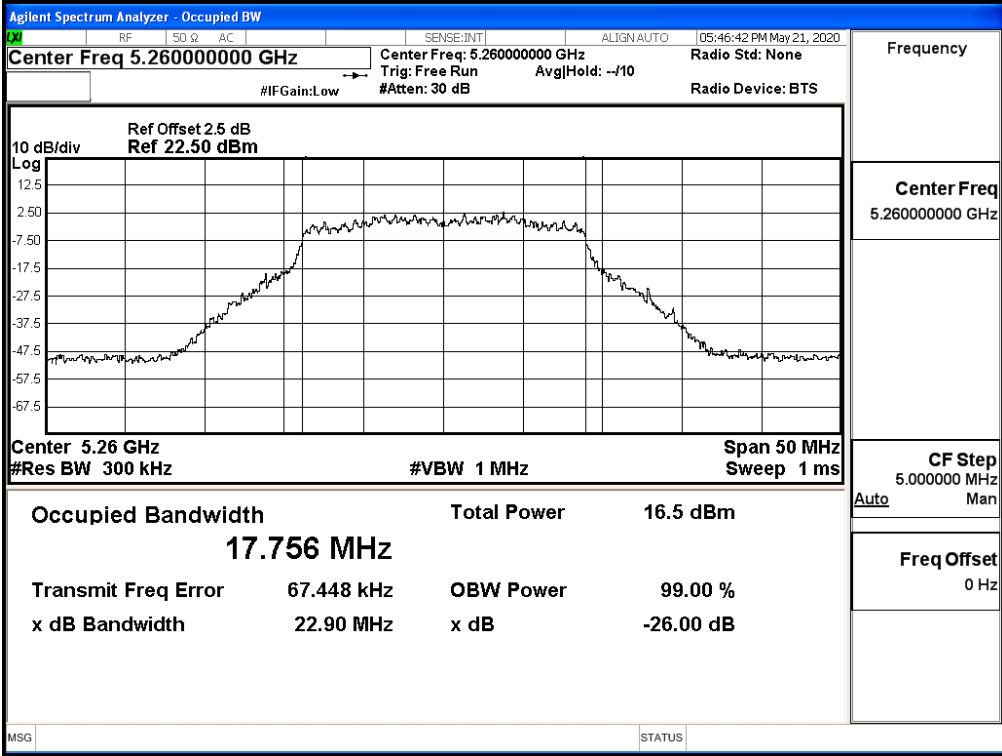


Channel 60 (Chain A)

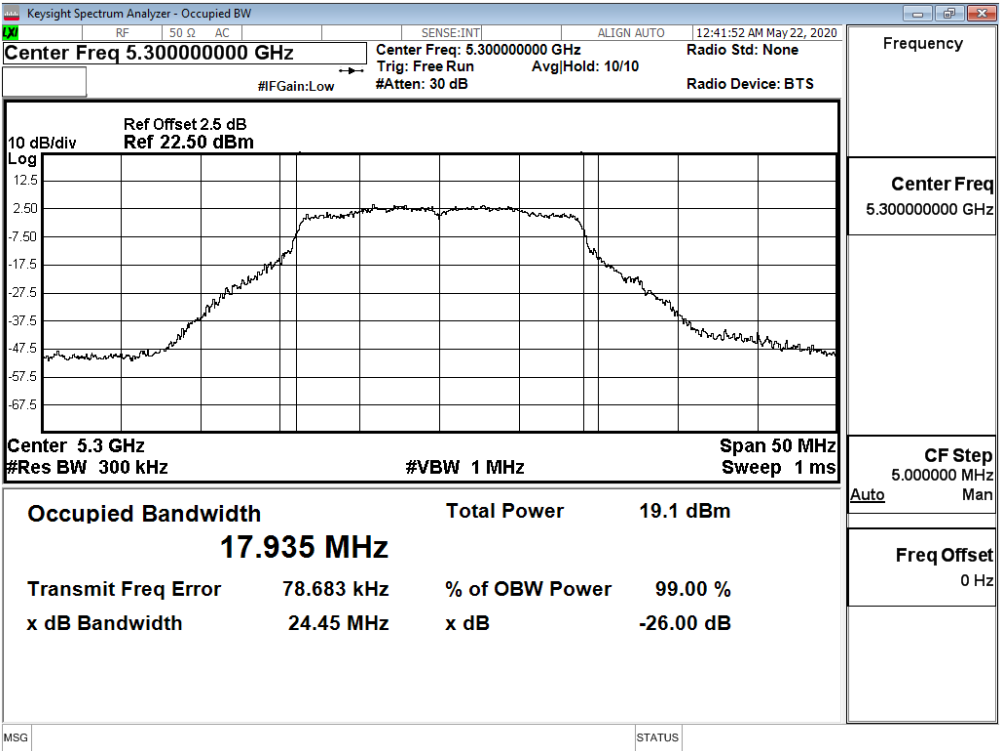


Channel 60 (Chain B)

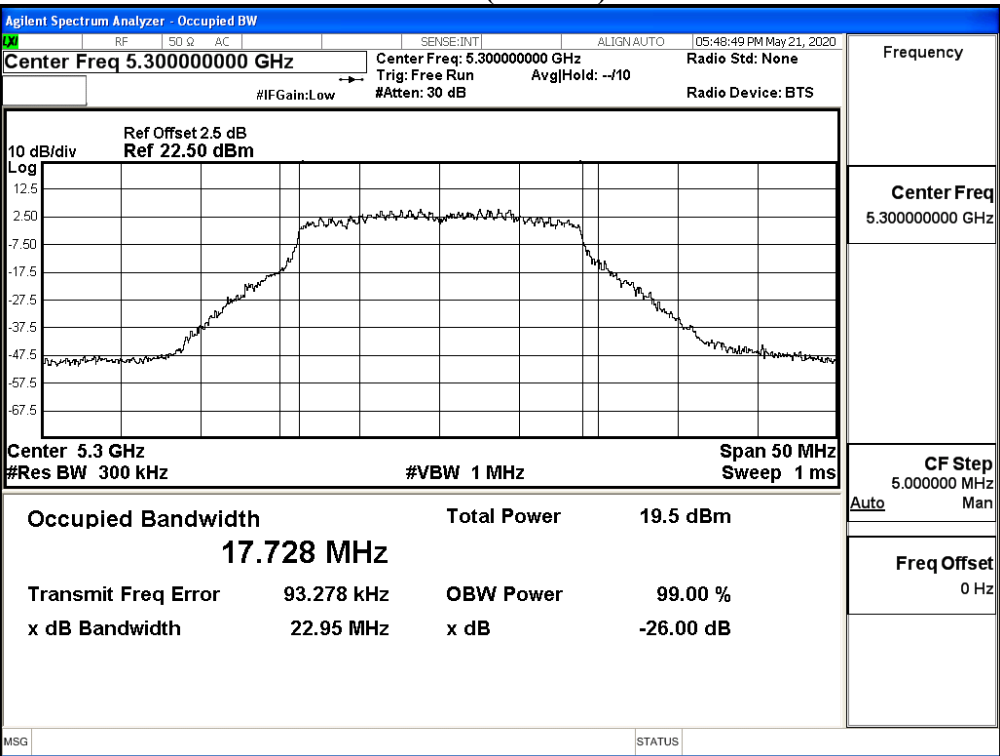


Channel 64 (Chain A)

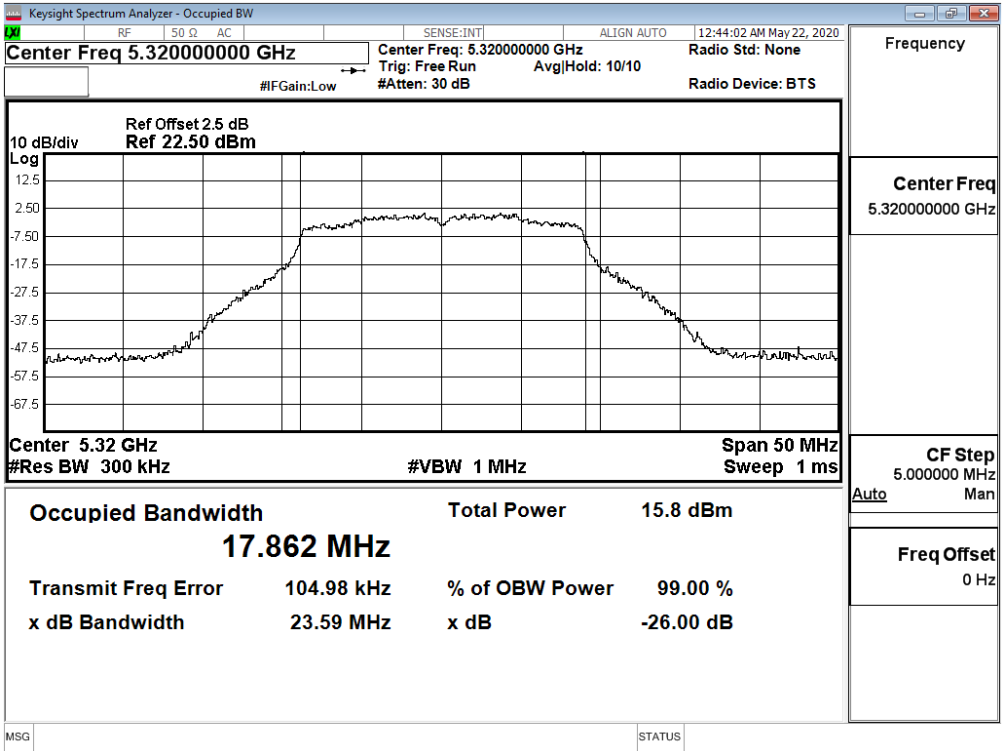


Channel 64 (Chain B)

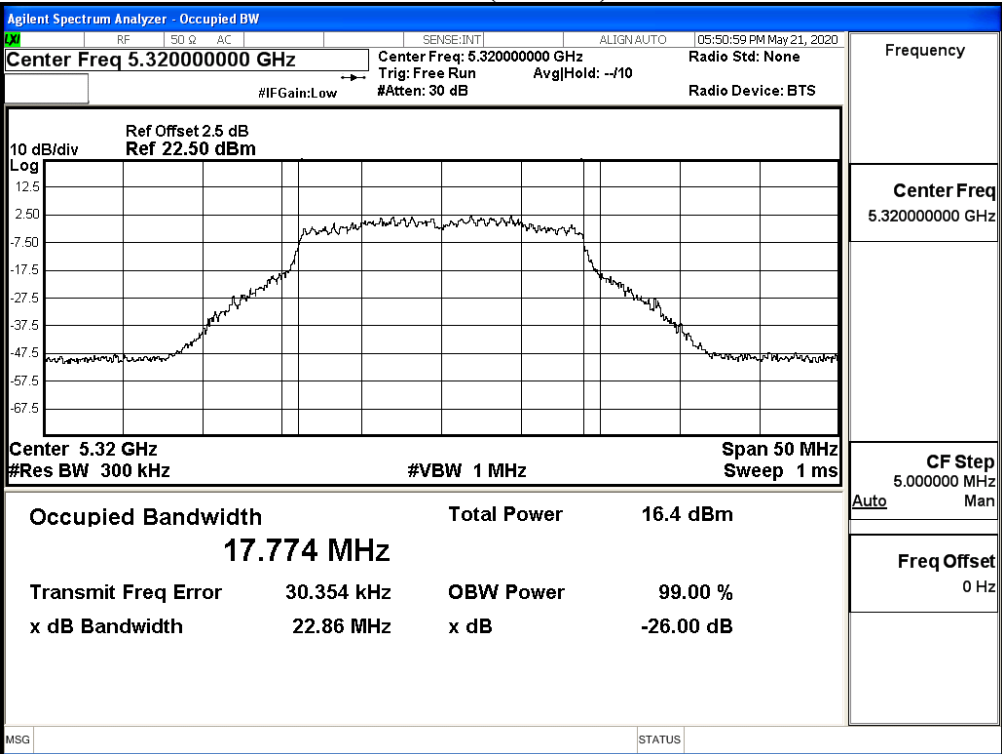


Channel 100 (Chain A)

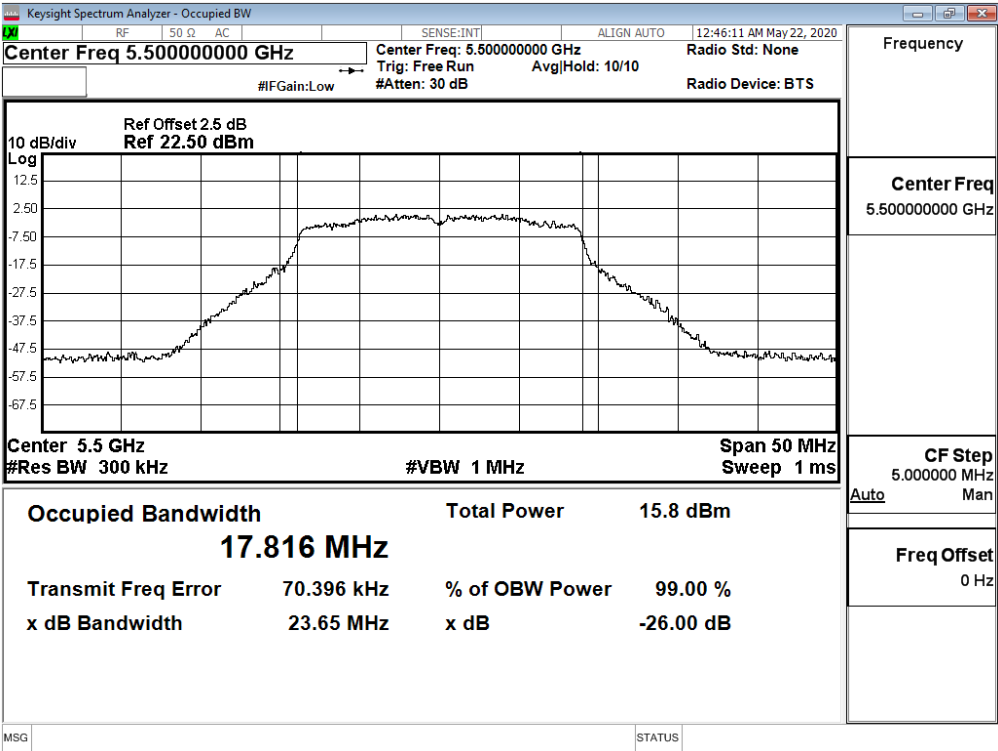


Channel 100 (Chain B)

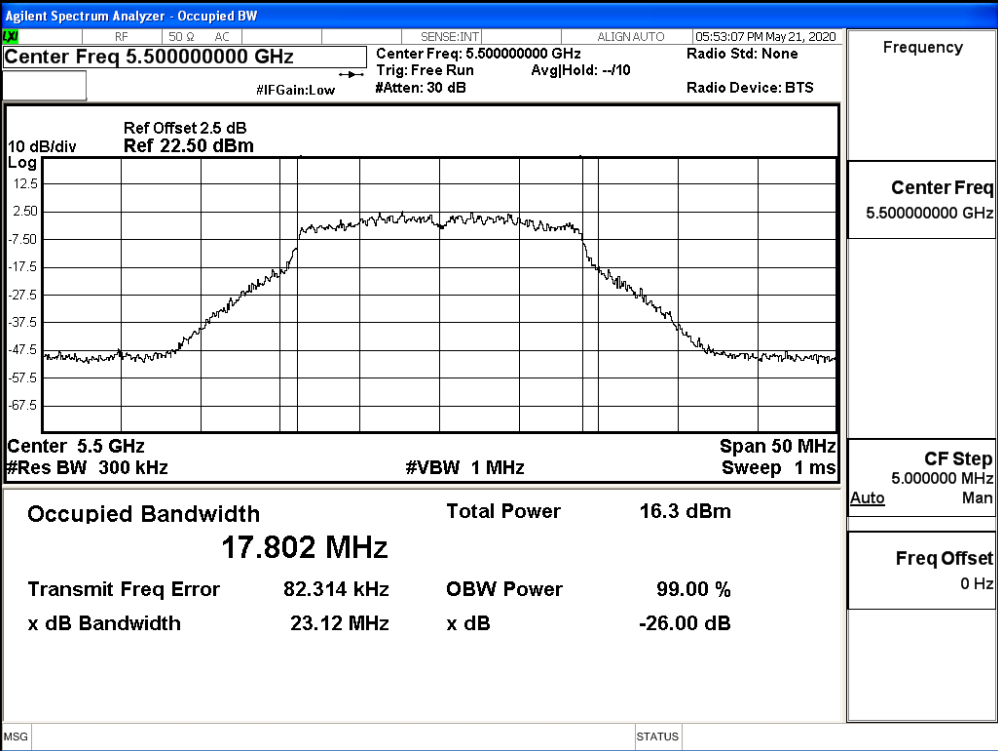


Channel 116 (Chain A)

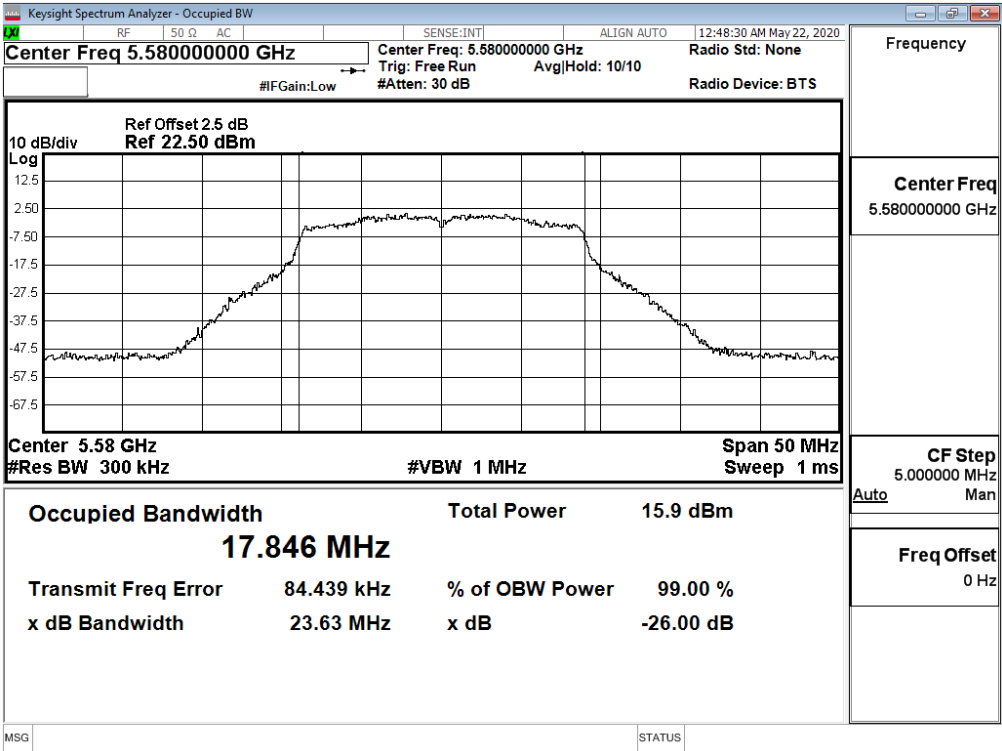


Channel 116 (Chain B)

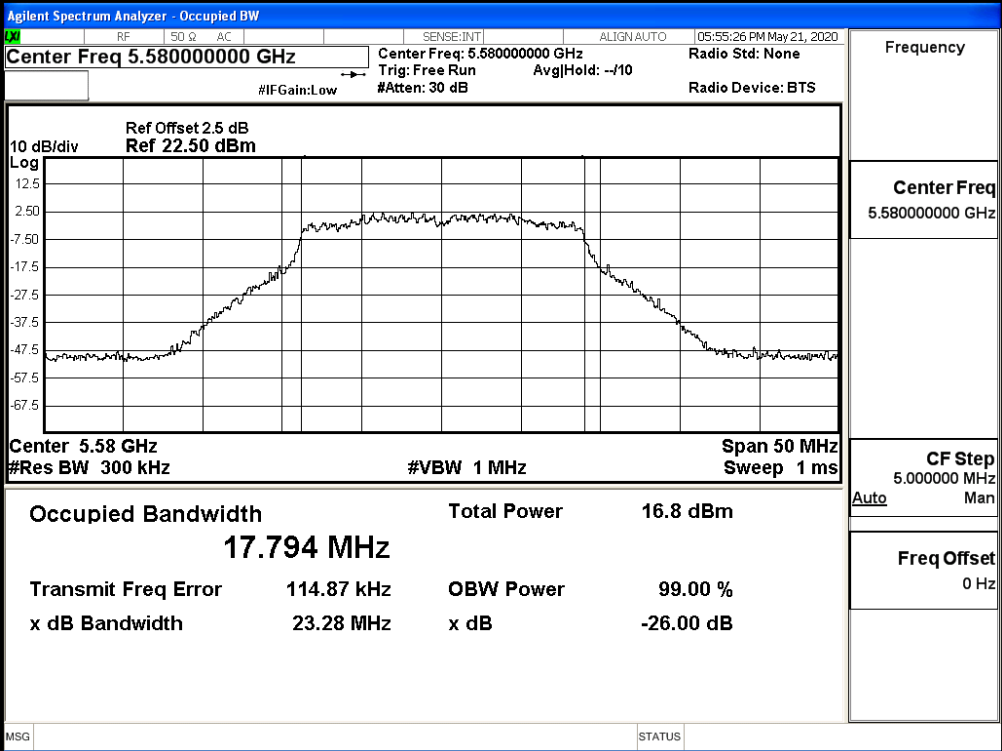


Channel 140 (Chain A)

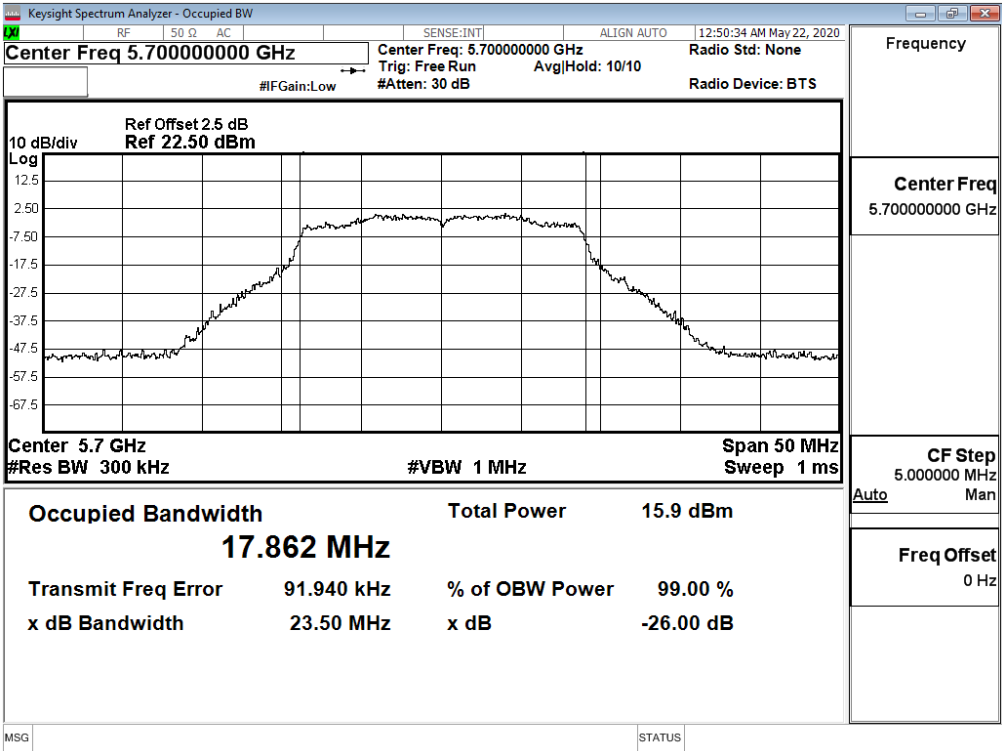


Channel 140 (Chain B)

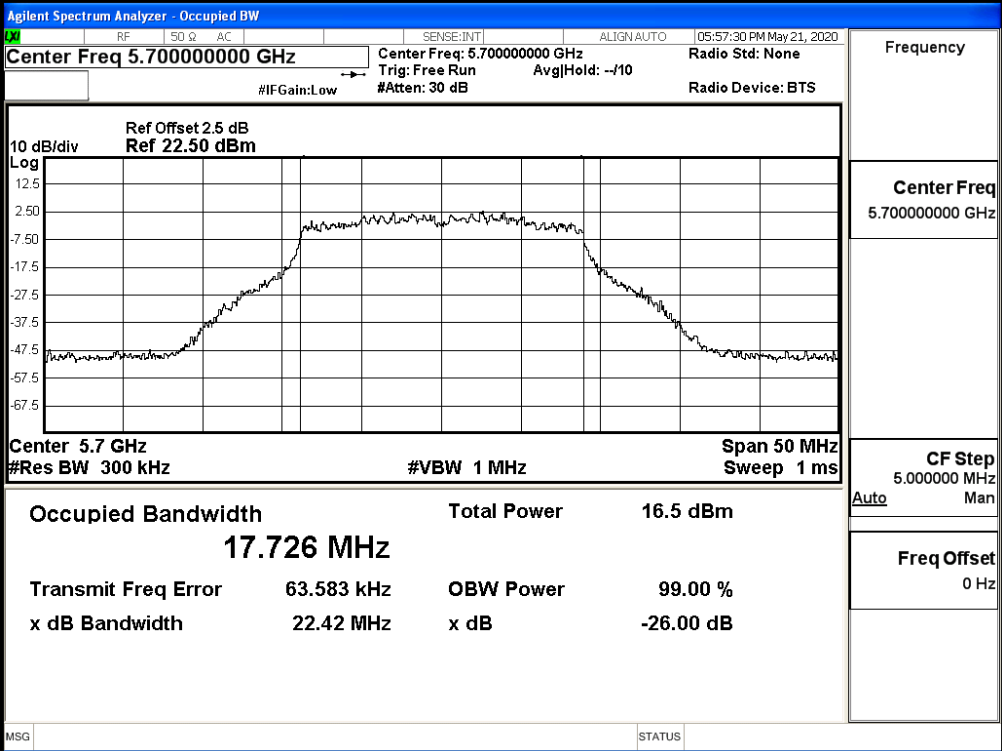


Channel 144 (Chain A)

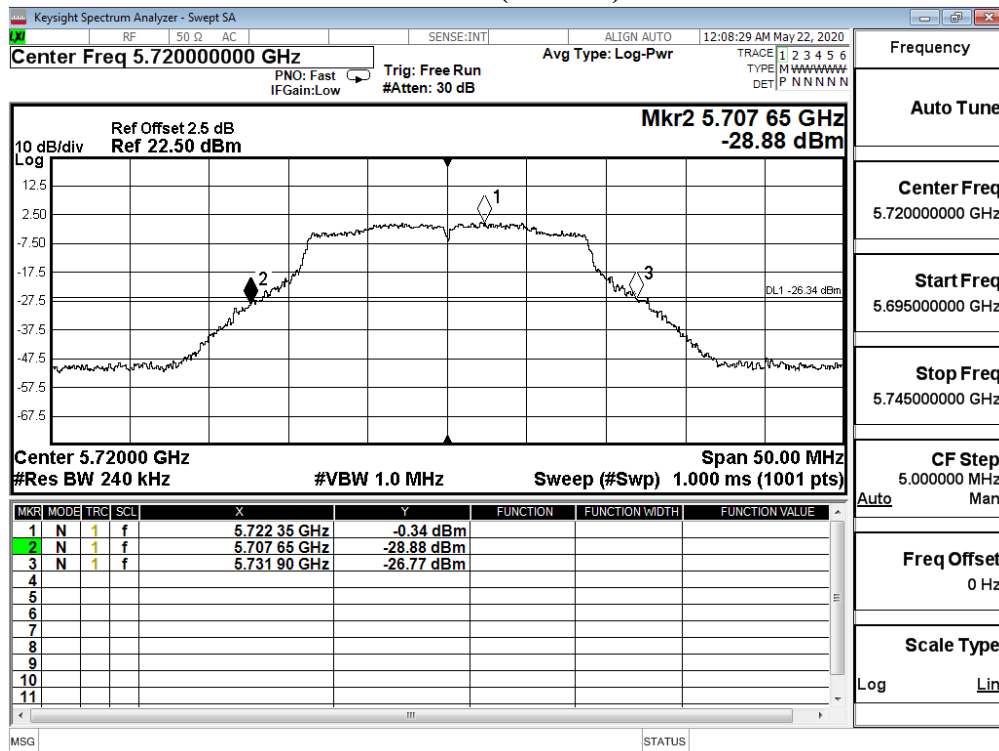


Channel 144 (Chain B)

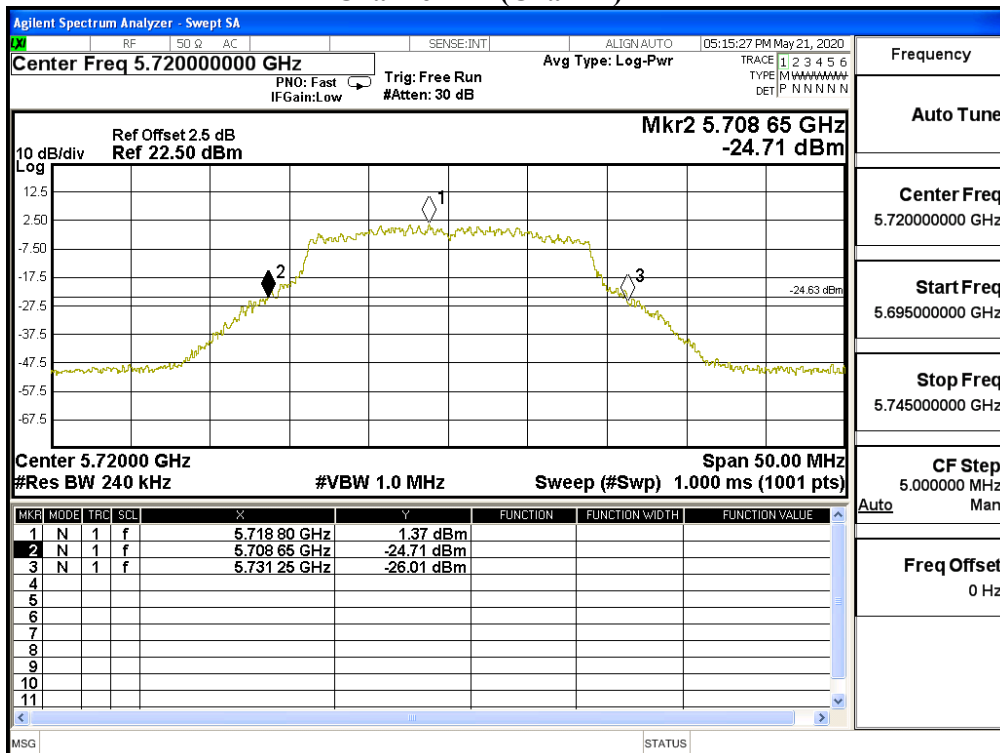


Maximum conducted output power:
Channel 144 (Band3) (Chain A)

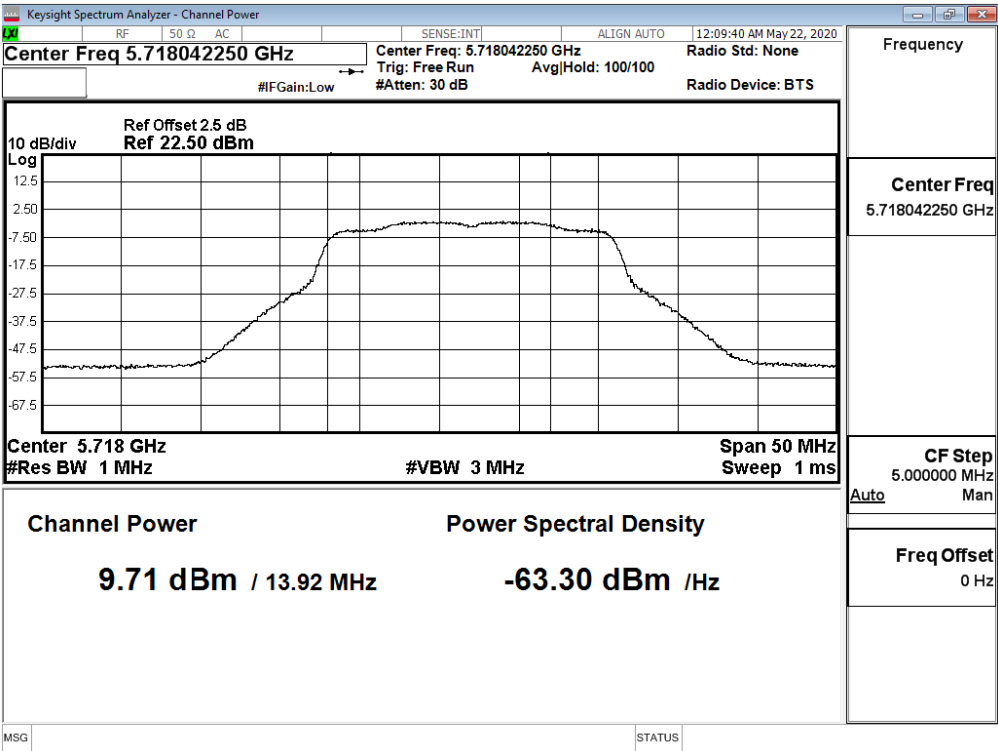


Maximum conducted output power:
Channel 144 (Band4) (Chain A)

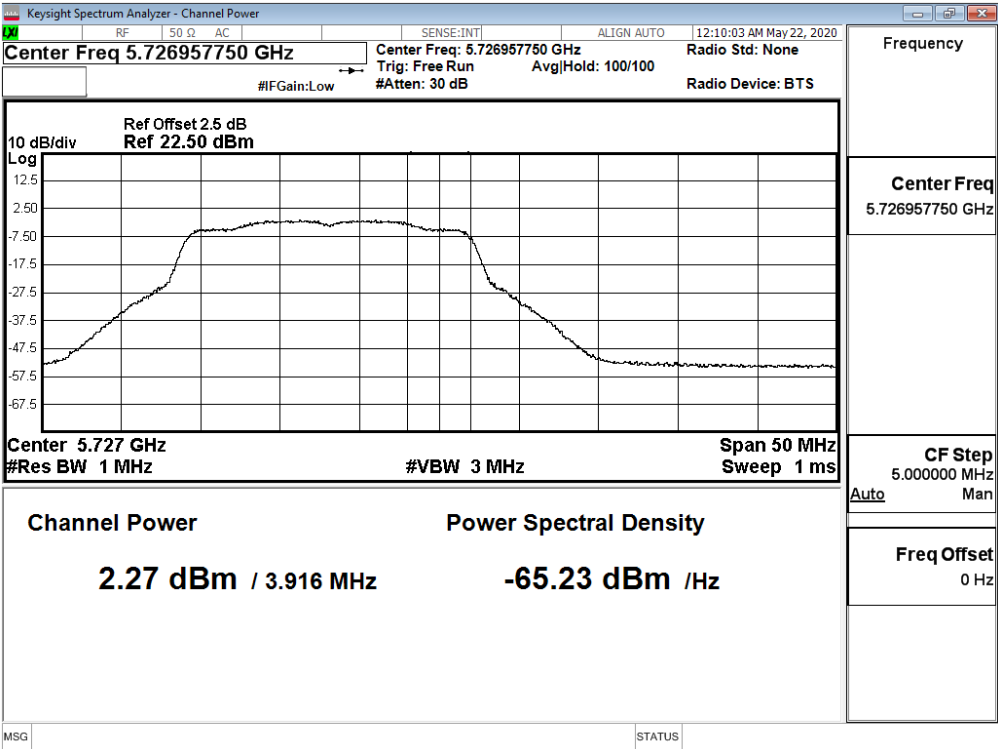

Maximum conducted output power:
Channel 144 (Band3) (Chain B)

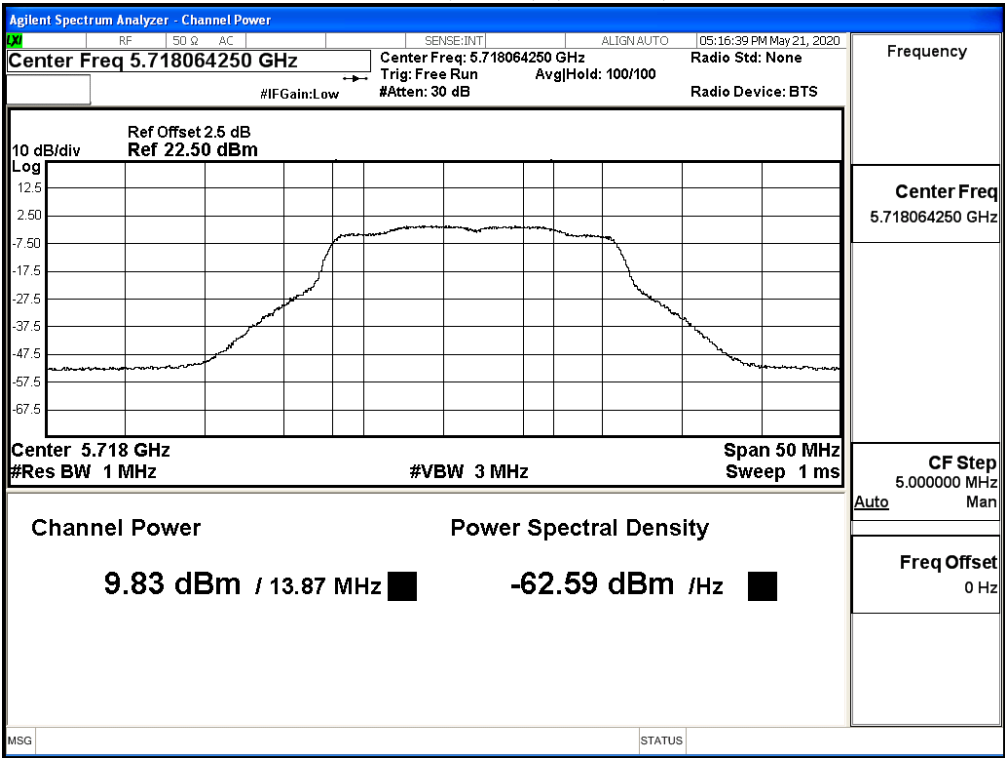

Maximum conducted output power:
Channel 144 (Band4) (Chain B)

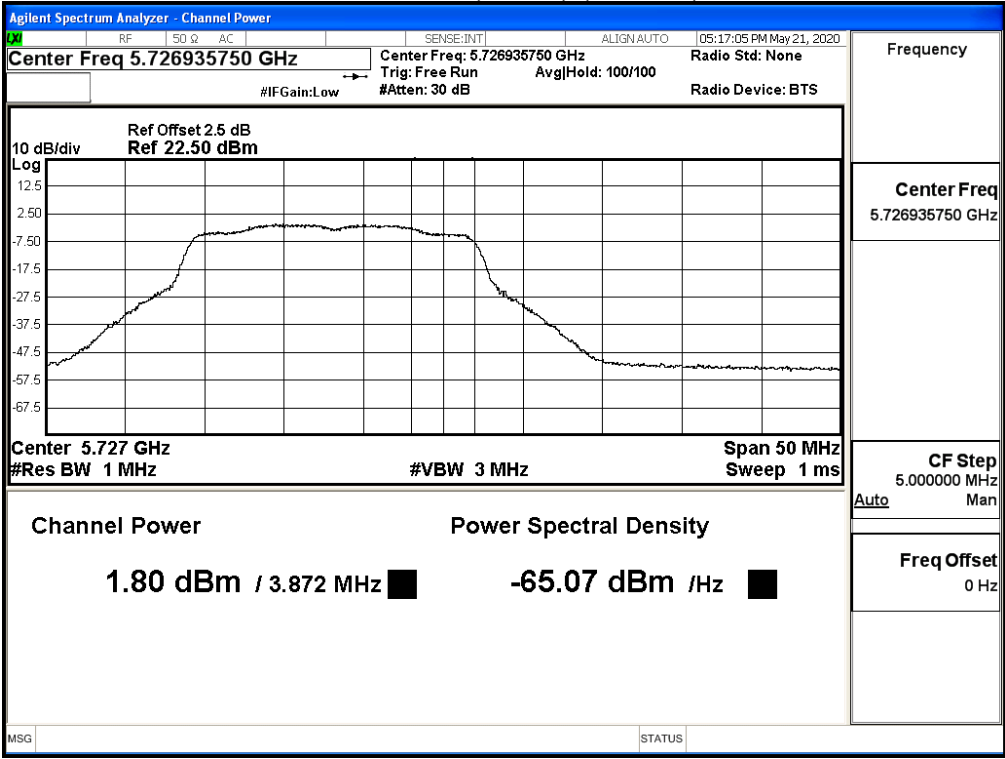

Product : Portable computer
 Test Item : Maximum conducted output power
 Test Date : 2020/05/18
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)

Chain A

Cable loss=2.5dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		HT8	HT9	HT10	HT11	HT12	HT13	HT14	HT15
		Measurement Level (dBm)							
38	5190	10.47	--	--	--	--	--	--	--
46	5230	10.47	10.37	10.31	10.21	10.14	10.08	10.05	10.00
54	5270	10.45	--	--	--	--	--	--	--
62	5310	10.41	10.33	10.3	10.26	10.22	10.18	10.14	10.04
102	5510	10.44	--	--	--	--	--	--	--
110	5550	10.48	10.41	10.32	10.27	10.19	10.11	10.01	9.98
134	5670	10.45	--	--	--	--	--	--	--
142F(Band3)	5710	10.27	10.24	10.14	10.07	9.98	9.89	9.84	9.74
142F(Band4)	5710	-2.68	-2.71	-2.8	-2.87	-2.96	-3.05	-3.11	-3.2
151	5755	10.41	--	--	--	--	--	--	--
159	5795	10.4	10.37	10.34	10.26	10.17	10.08	10.02	9.96

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Chain B

Cable loss=2.5dB		Maximum conducted output power							
Channel No.	Frequency (MHz)	Data Rate (Mbps)							
		HT8	HT9	HT10	HT11	HT12	HT13	HT14	HT15
		Measurement Level (dBm)							
38	5190	10.49	--	--	--	--	--	--	--
46	5230	10.44	10.39	10.34	10.30	10.25	10.16	10.09	9.99
54	5270	10.41	--	--	--	--	--	--	--
62	5310	10.43	10.34	10.27	10.23	10.14	10.11	10.05	9.99
102	5510	10.41	--	--	--	--	--	--	--
110	5550	10.49	10.41	10.31	10.25	10.20	10.11	10.01	9.95
134	5670	10.46	--	--	--	--	--	--	--
142F(Band3)	5710	10.28	10.18	10.13	10.06	9.99	9.92	9.85	9.78
142F(Band4)	5710	-3.09	-3.13	-3.2	-3.25	-3.28	-3.36	-3.43	-3.5
151	5755	10.45	--	--	--	--	--	--	--
159	5795	10.43	10.36	10.28	10.23	10.15	10.12	10.07	10.02

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss


Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
38	5190	--	10.47	10.49	13.49	24	--	Pass
46	5230	--	10.47	10.44	13.47	24	--	Pass
54	5270	41.270	10.45	10.41	13.44	24	27.16	Pass
62	5310	42.030	10.41	10.43	13.43	24	27.24	Pass
102	5510	41.340	10.44	10.41	13.44	24	27.16	Pass
110	5550	41.940	10.48	10.49	13.5	24	27.23	Pass
134	5670	42.160	10.45	10.46	13.47	24	27.25	Pass
142F(Band3)	5710	35.500	10.27	10.28	13.29	24	26.50	Pass
142F(Band4)	5710	5.500	-2.68	-3.09	0.13	30	18.40	Pass
151	5755	--	10.41	10.45	13.44	30	--	Pass
159	5795	--	10.4	10.43	13.43	30	--	Pass


Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.


26dB Occupied Bandwidth:
Channel 54 (Chain A)

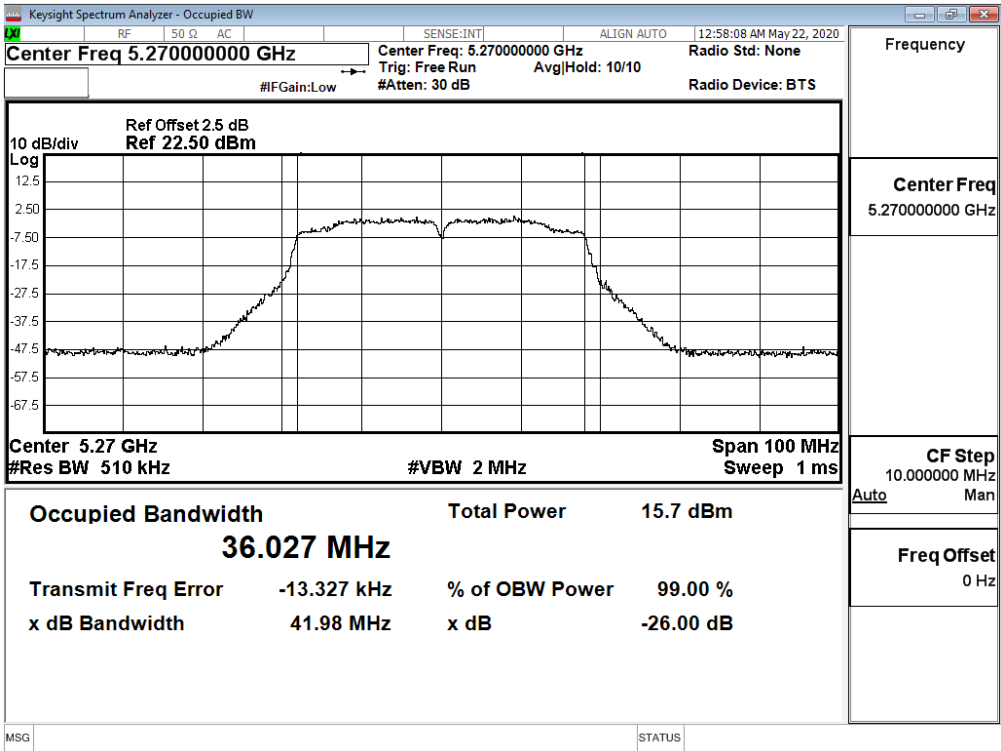


Channel 54 (Chain B)

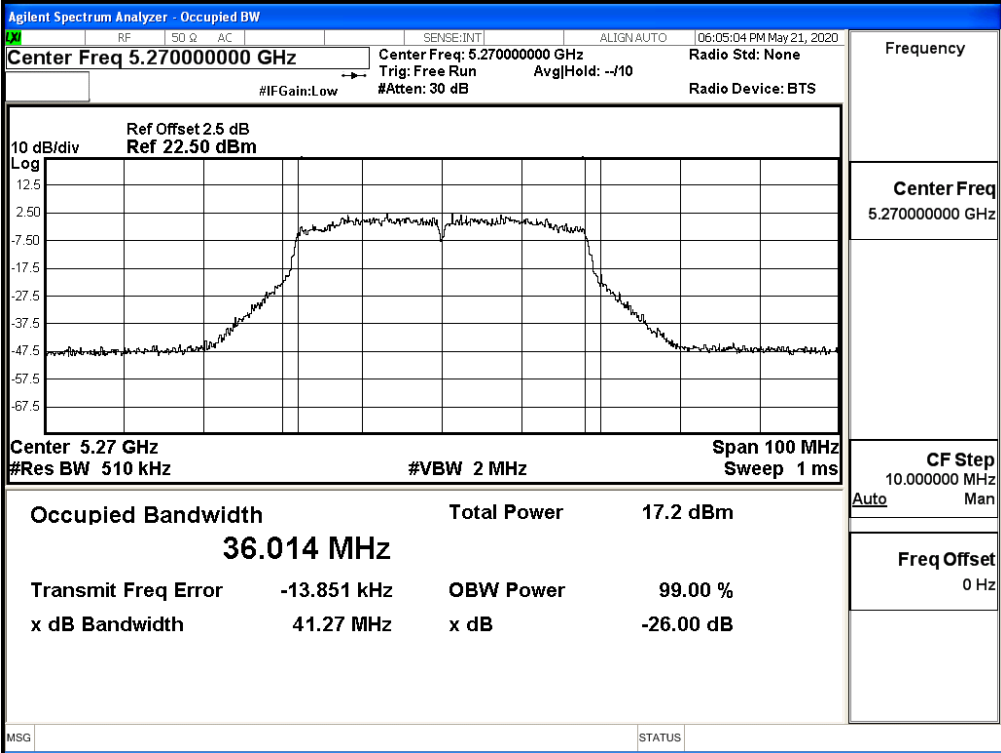


Channel 62 (Chain A)

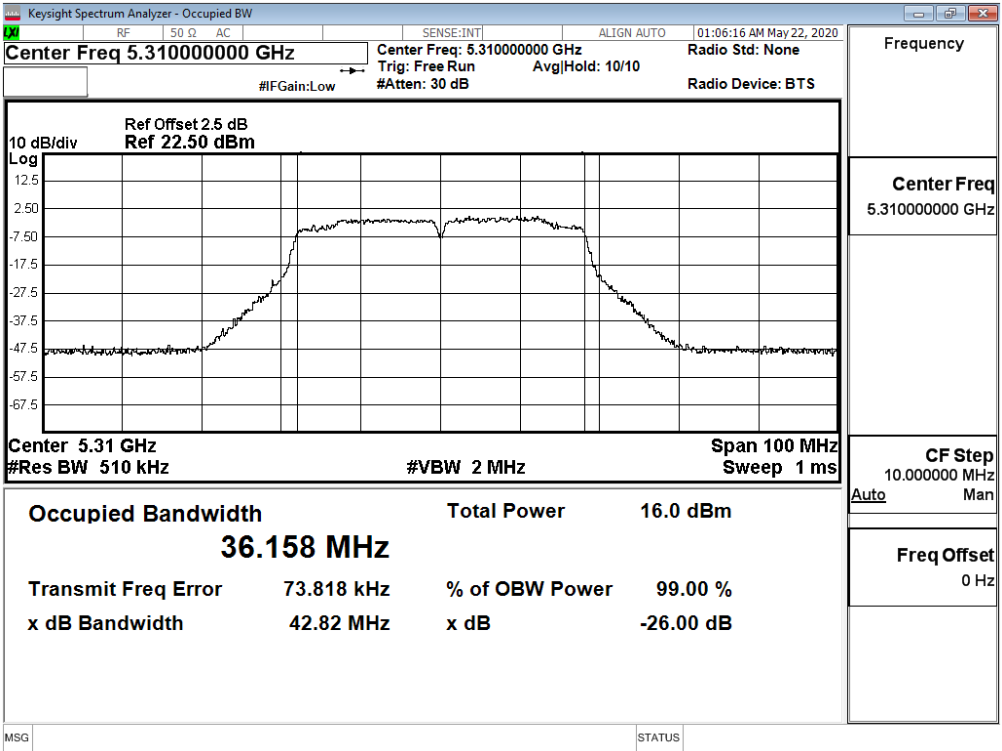


Channel 62 (Chain B)

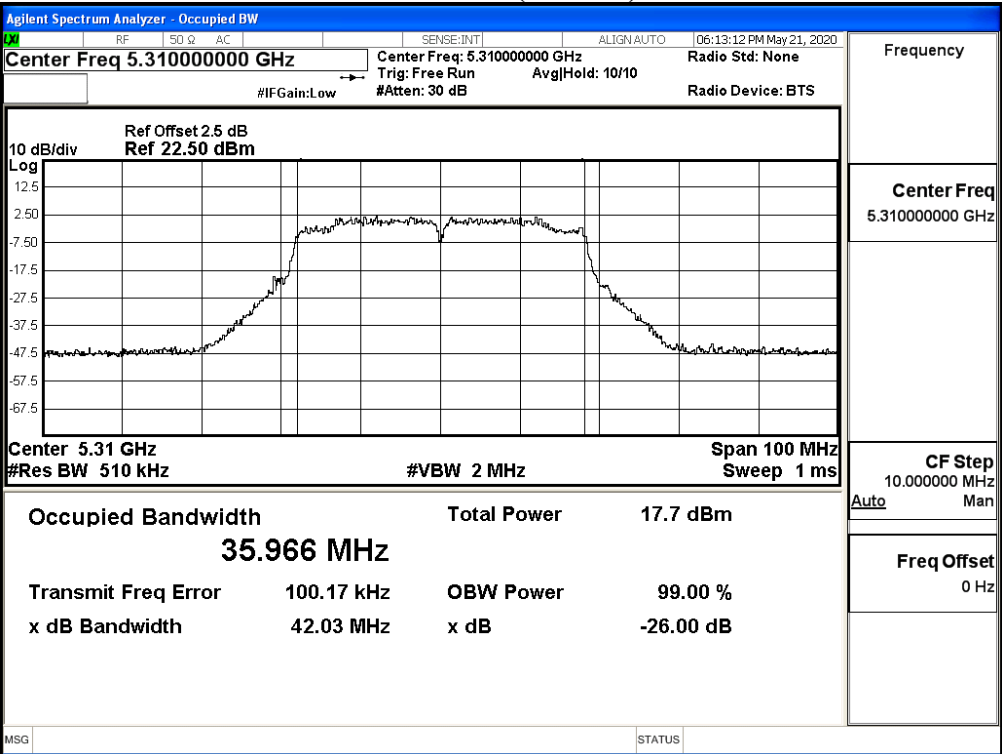


Channel 102 (Chain A)

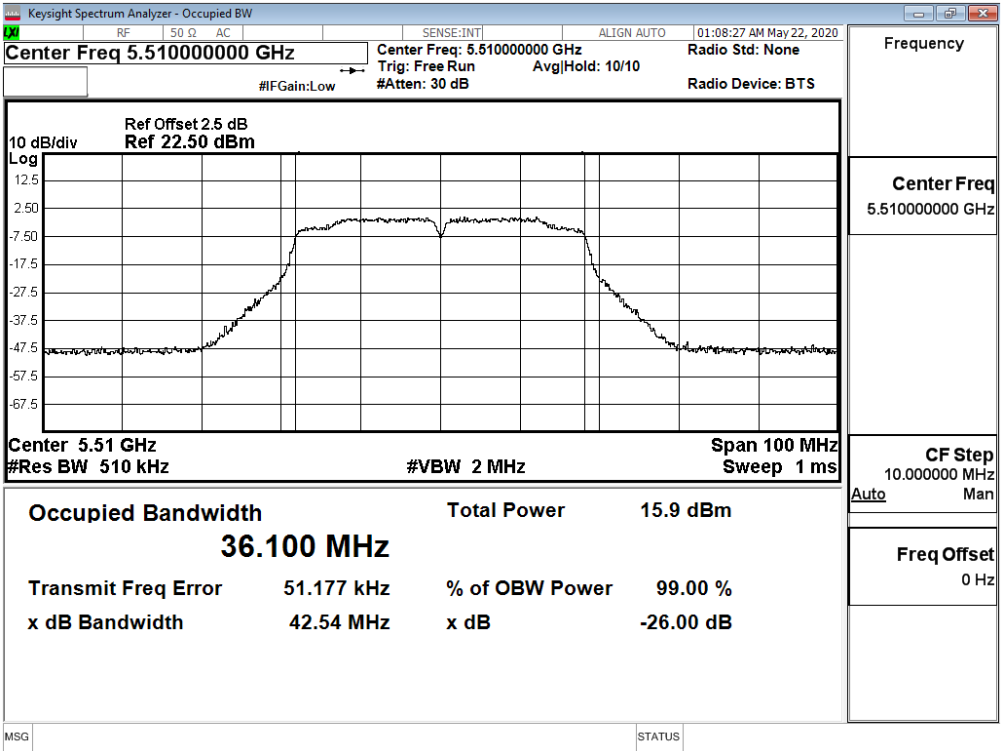


Channel 102 (Chain B)

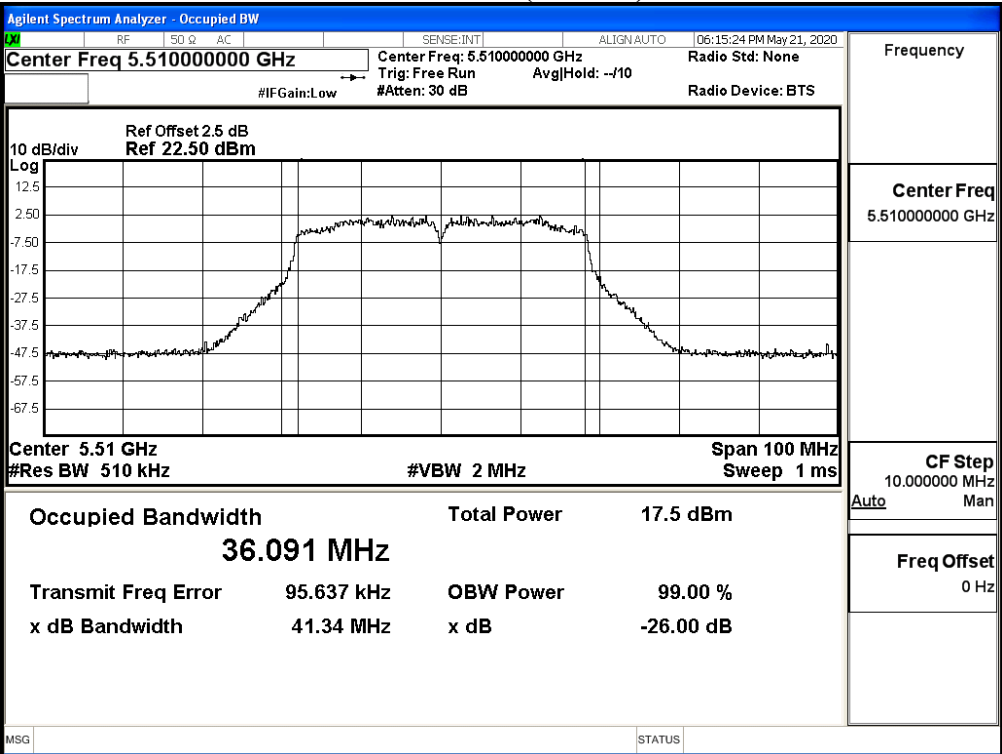


Channel 110 (Chain A)

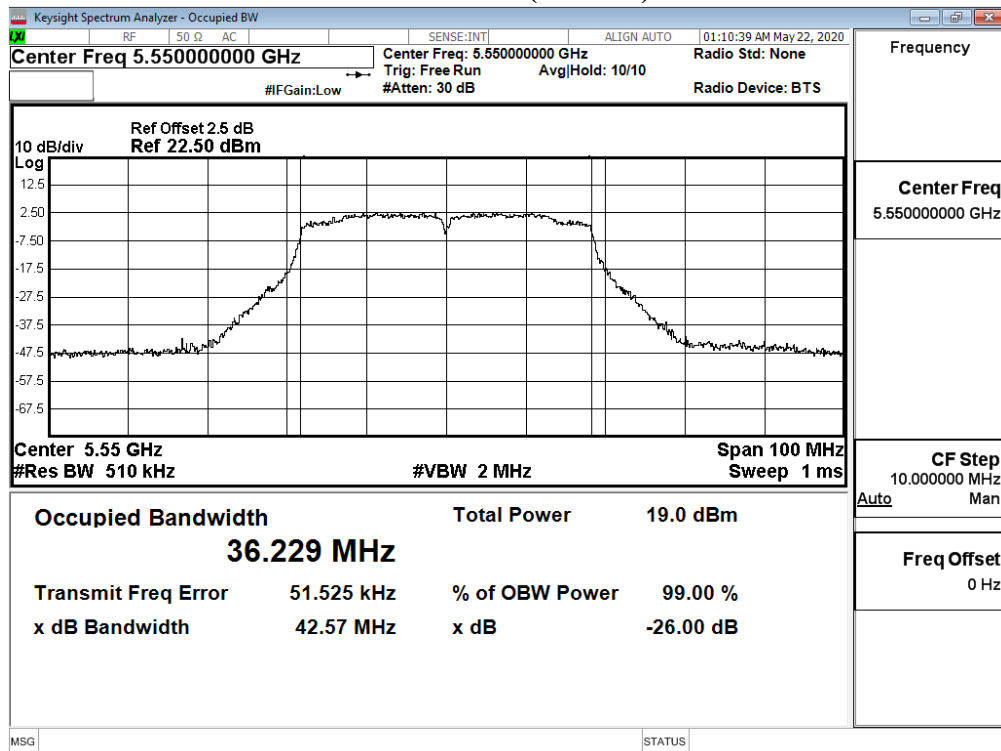


Channel 110 (Chain B)

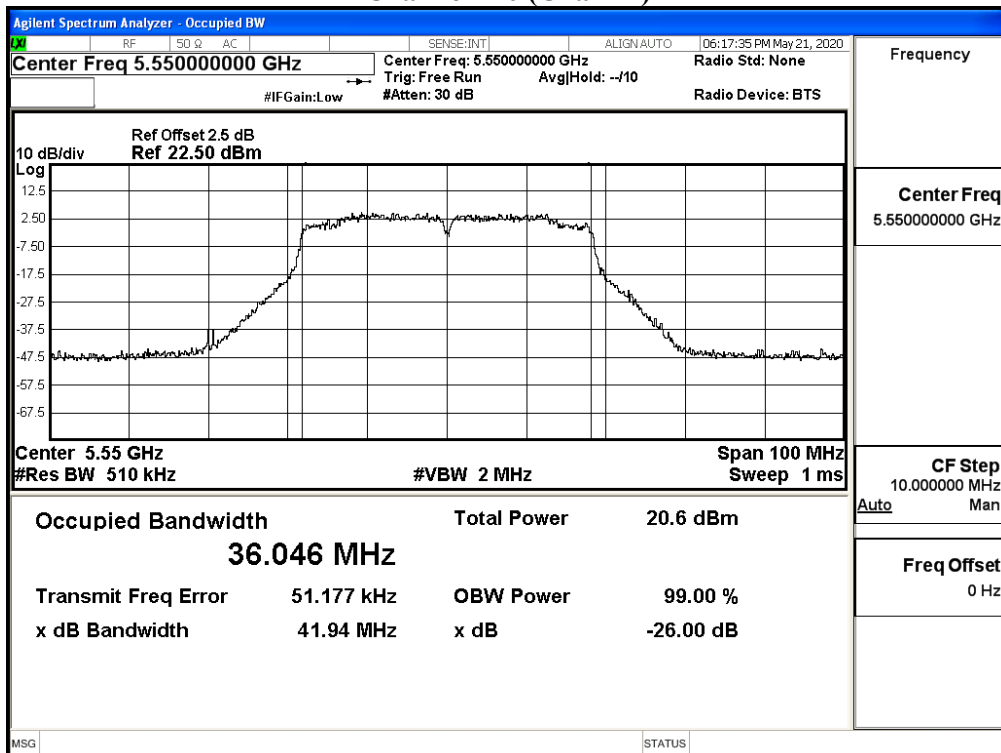


Channel 134 (Chain A)

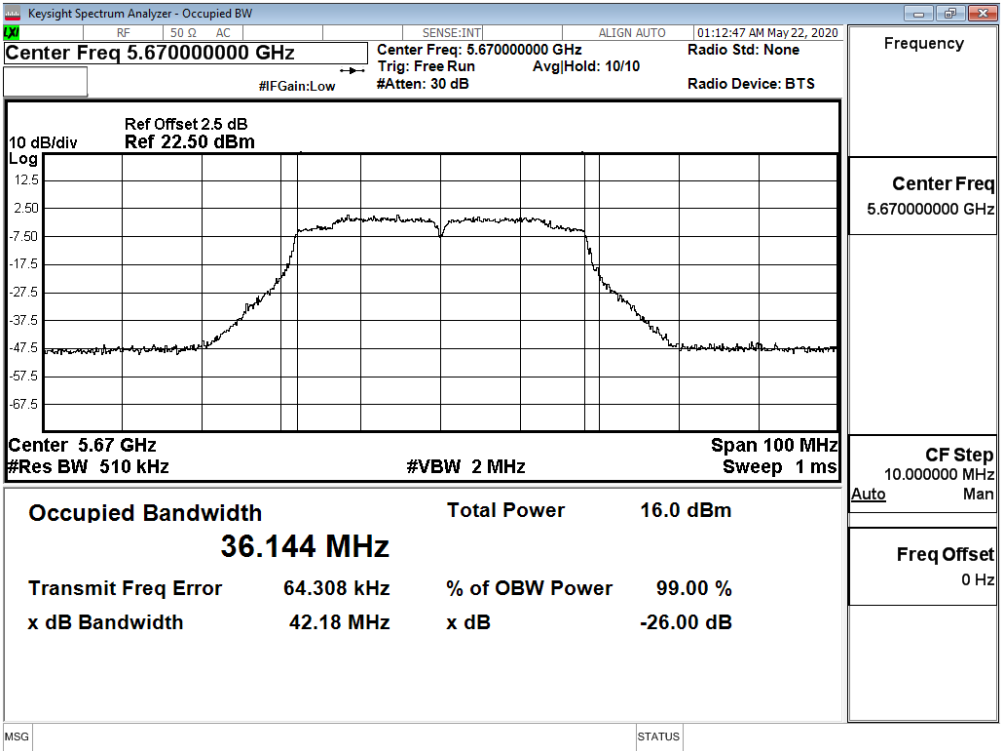


Channel 134 (Chain B)

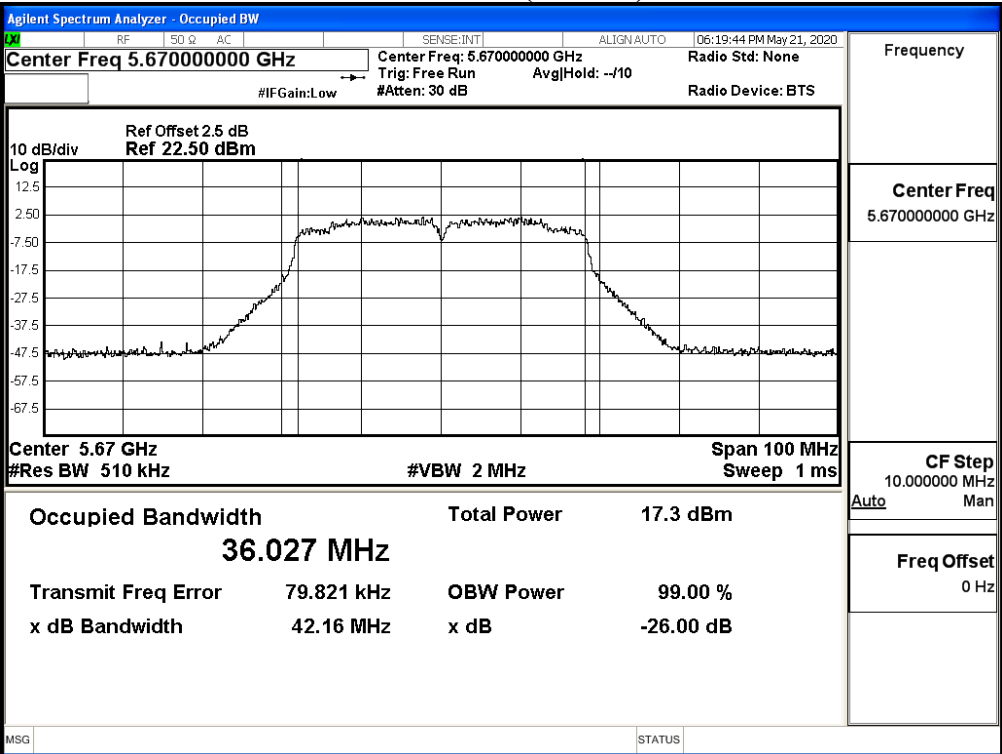


Channel 142 (Chain A)

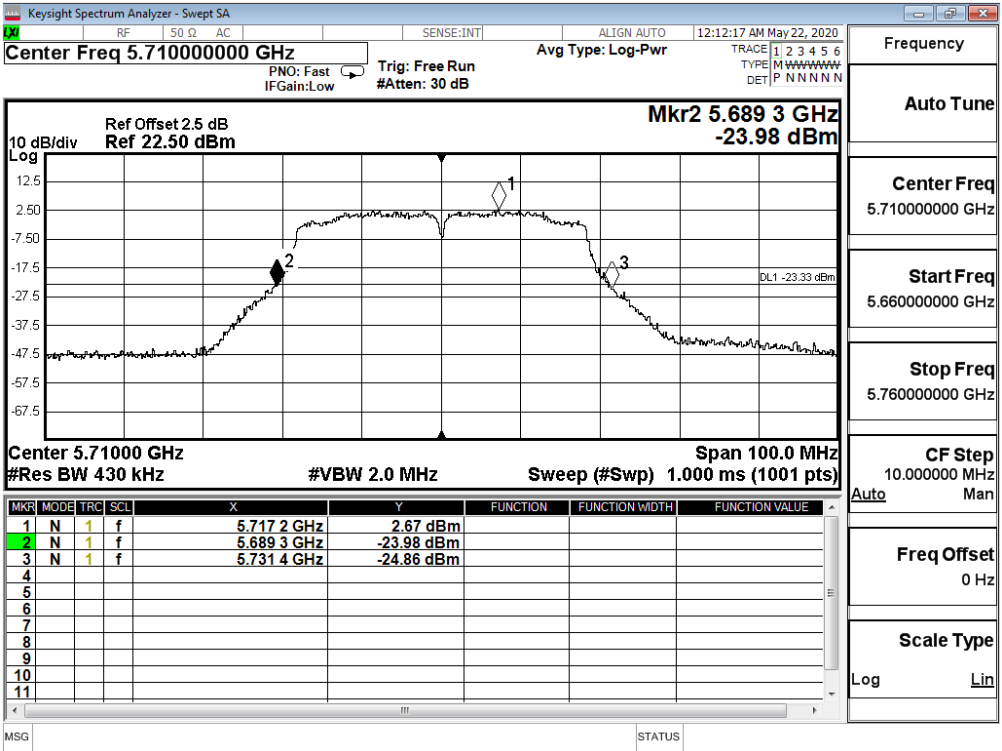


Channel 142 (Chain B)

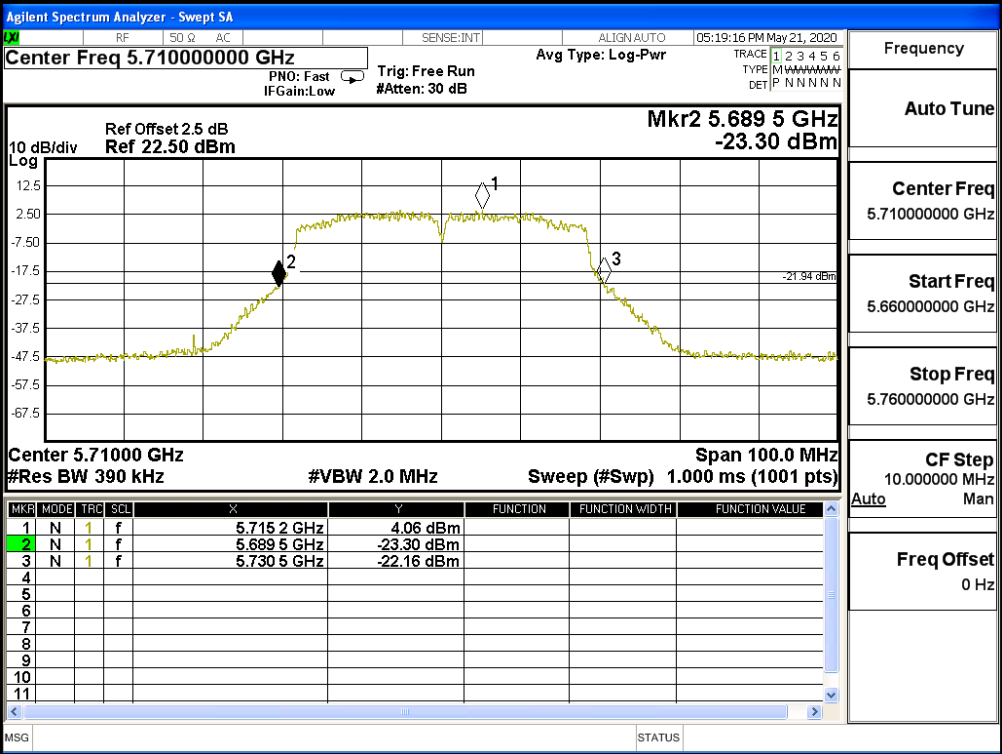


Maximum conducted output power:
Channel 142 (Band3) (Chain A)

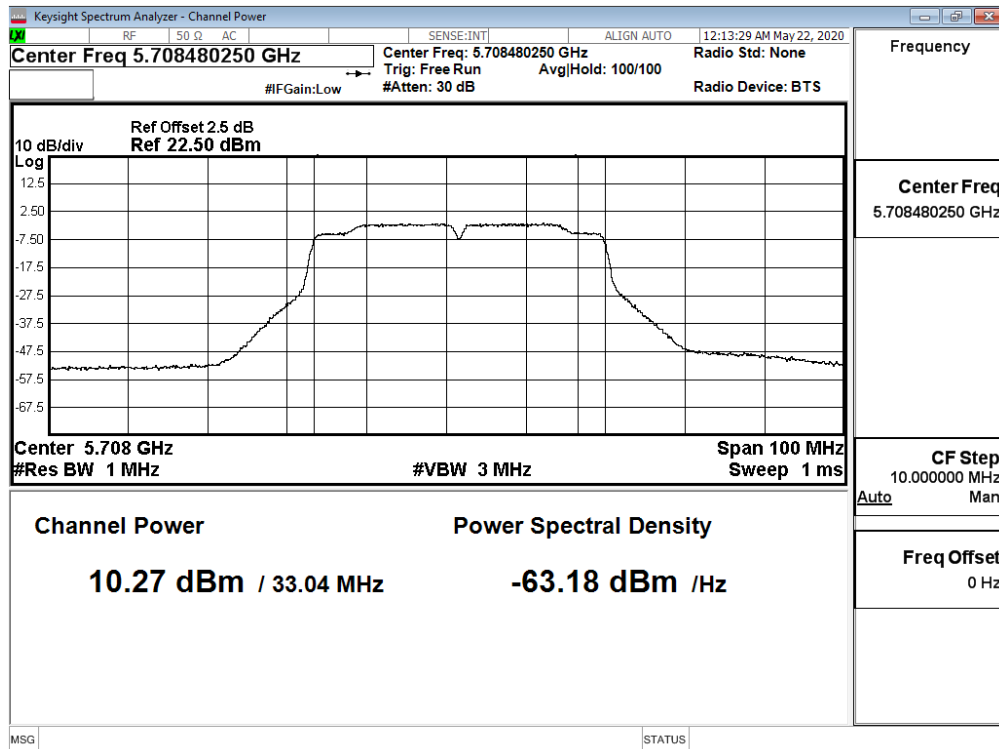


Maximum conducted output power:
Channel 142 (Band4) (Chain A)

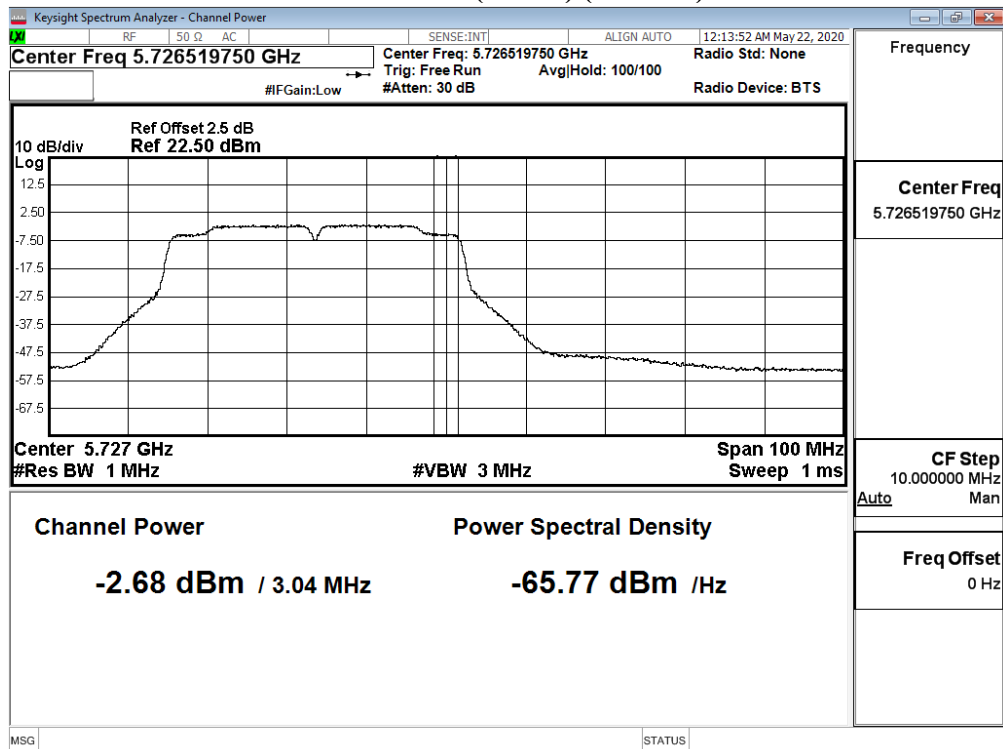

Maximum conducted output power:
Channel 142 (Band3) (Chain B)

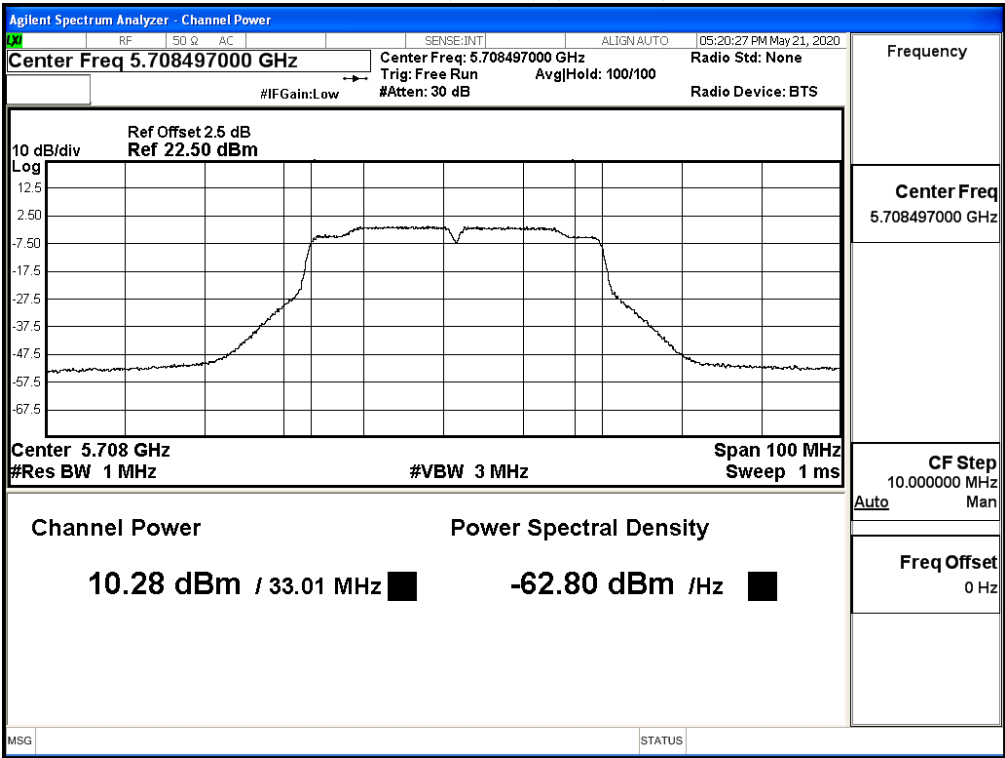

Maximum conducted output power:
Channel 142 (Band4) (Chain B)

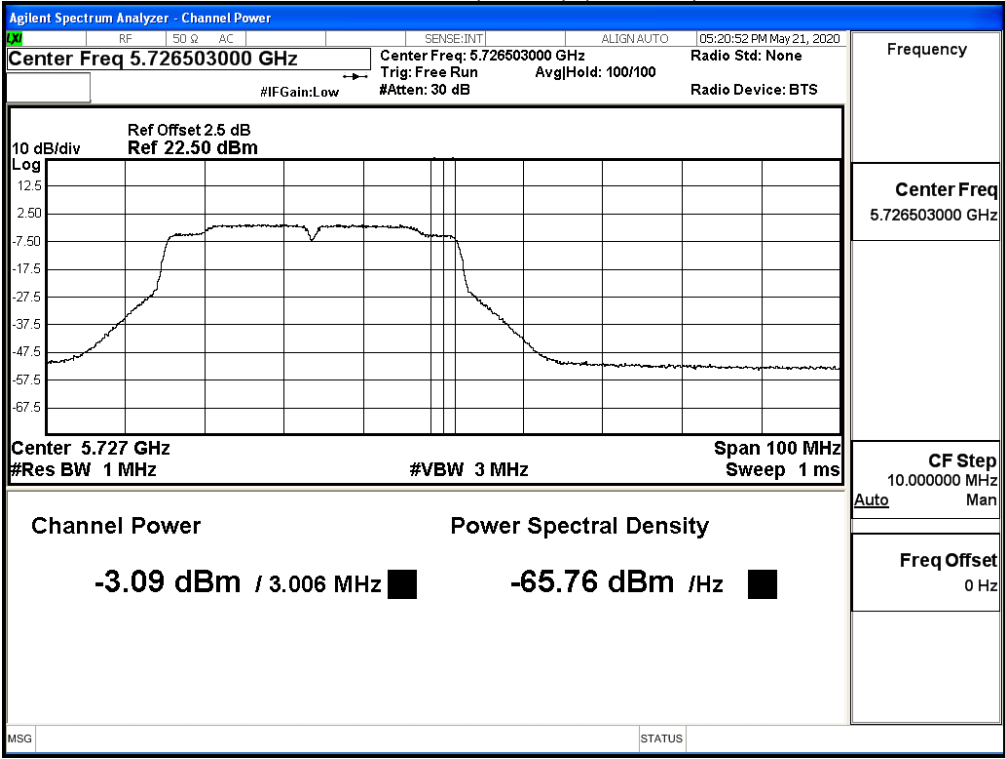

Product : Portable computer
 Test Item : Maximum conducted output power
 Test Date : 2020/05/18
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)

Chain A

Cable loss=2.5dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		VHT0	VHT1	VHT2	VHT3	VHT4	VHT5	VHT6	VHT7	VHT8	VHT9
42	5210	10.45	10.35	10.28	10.23	10.17	10.09	10	9.92	9.86	9.77
58	5290	10.47	10.42	10.38	10.28	10.23	10.20	10.13	10.06	9.97	9.94
106ac80	5530	10.48	--	--	--	--	--	--	--	--	--
122ac80	5610	10.48	10.41	10.36	10.32	10.28	10.19	10.13	10.08	10.04	10.00
138ac80(Band3)	5690	10.34	10.27	10.18	10.09	10	9.91	9.81	9.72	9.65	9.61
138ac80(Band4)	5690	-7.01	-7.05	-7.14	-7.2	-7.29	-7.35	-7.38	-7.44	-7.48	-7.55
155ac80	5775	10.47	10.38	10.32	10.22	10.12	10.04	9.96	9.93	9.86	9.76

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Chain B

Cable loss=2.5dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		VHT0	VHT1	VHT2	VHT3	VHT4	VHT5	VHT6	VHT7	VHT8	VHT9
42	5210	10.49	10.42	10.33	10.3	10.2	10.1	10	9.92	9.86	9.82
58	5290	10.44	10.4	10.34	10.28	10.23	10.13	10.09	10.06	9.96	9.89
106ac80	5530	10.46	--	--	--	--	--	--	--	--	--
122ac80	5610	10.47	10.39	10.31	10.24	10.19	10.11	10.07	10.00	9.94	9.84
138ac80(Band3)	5690	10.37	10.31	10.24	10.18	10.1	10	9.96	9.86	9.77	9.68
138ac80(Band4)	5690	-8.44	-8.52	-8.61	-8.65	-8.72	-8.82	-8.87	-8.91	-8.96	-9.04
155ac80	5775	10.49	10.44	10.34	10.28	10.21	10.13	10.1	10.01	9.93	9.84

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss


Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
42	5210	--	10.45	10.49	13.48	24	--	Pass
58	5290	82.320	10.47	10.44	13.47	24	30.16	Pass
106ac80	5530	84.710	10.48	10.46	13.48	24	30.28	Pass
122ac80	5610	81.030	10.48	10.47	13.49	24	30.09	Pass
138ac80(Band3)	5690	76.600	10.34	10.37	13.37	24	29.84	Pass
138ac80(Band4)	5690	--	-7.01	-8.44	-4.656	30	--	Pass
155ac80	5775	--	10.47	10.49	13.49	30	--	Pass


Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.


26dB Occupied Bandwidth:
Channel 58 (Chain A)

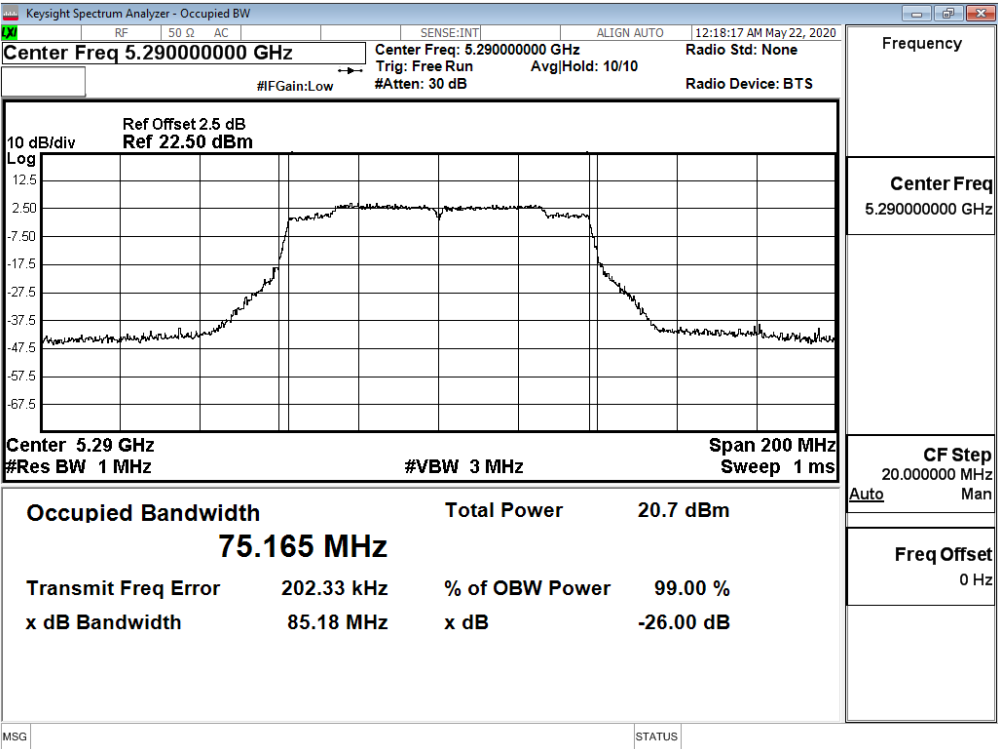


Channel 58 (Chain B)

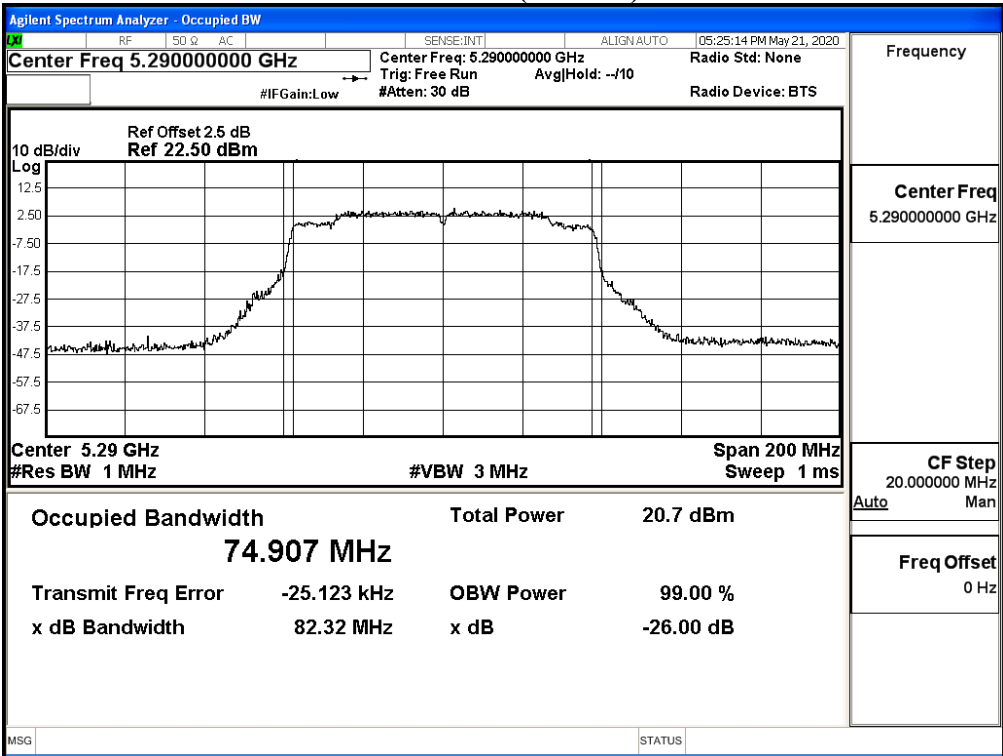


Channel 106 (Chain A)

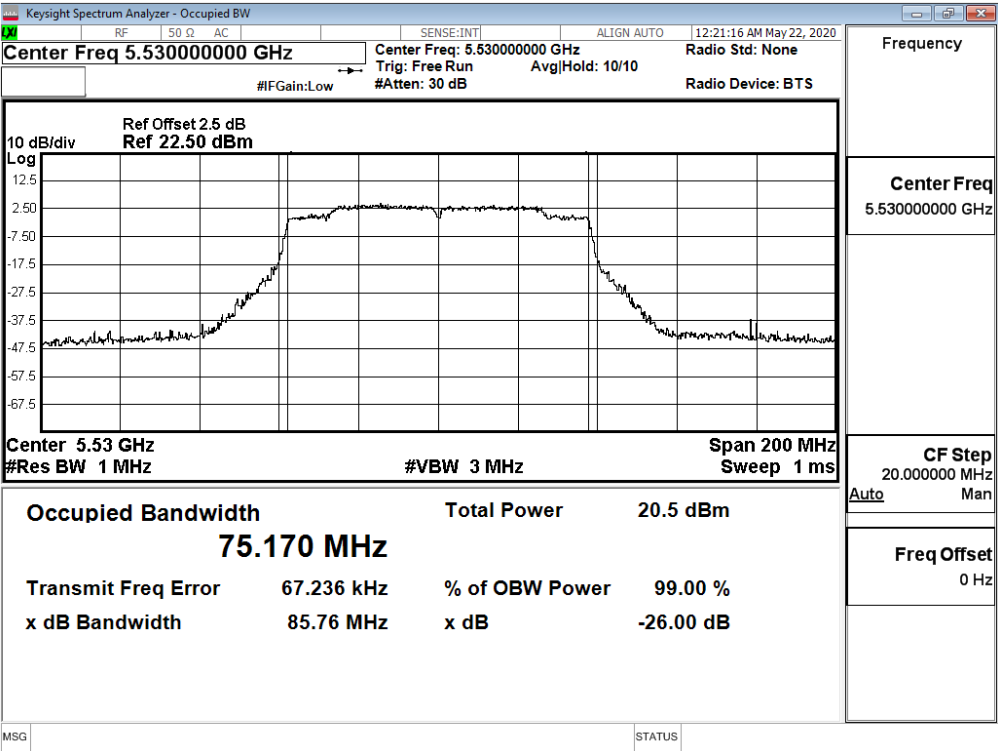


Channel 106 (Chain B)

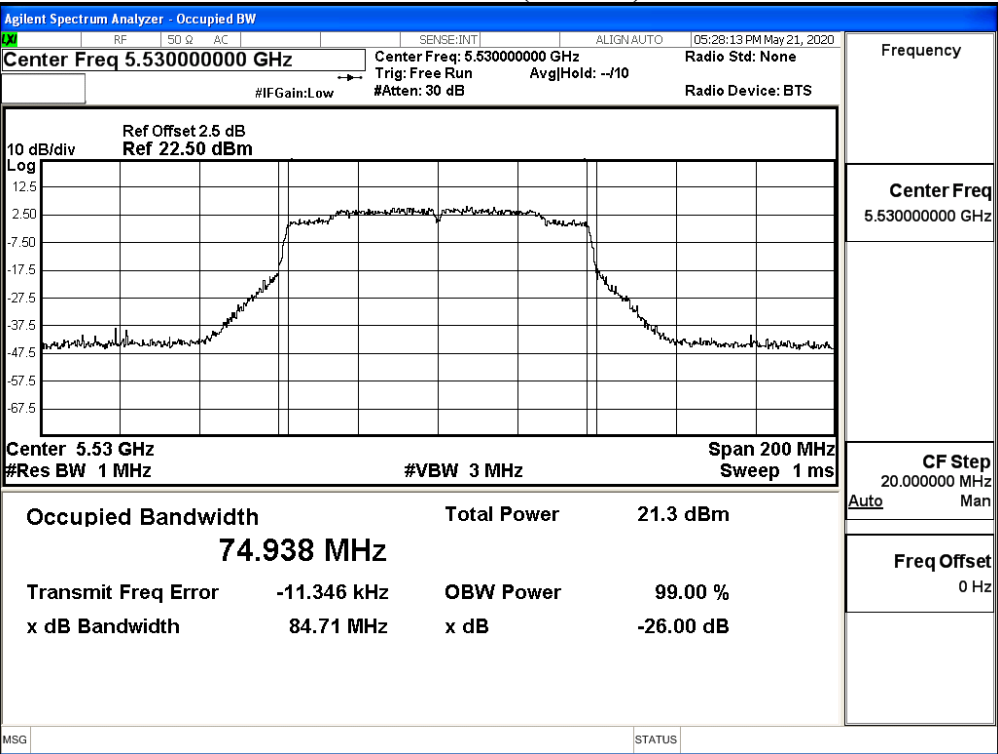


Channel 122 (Chain A)

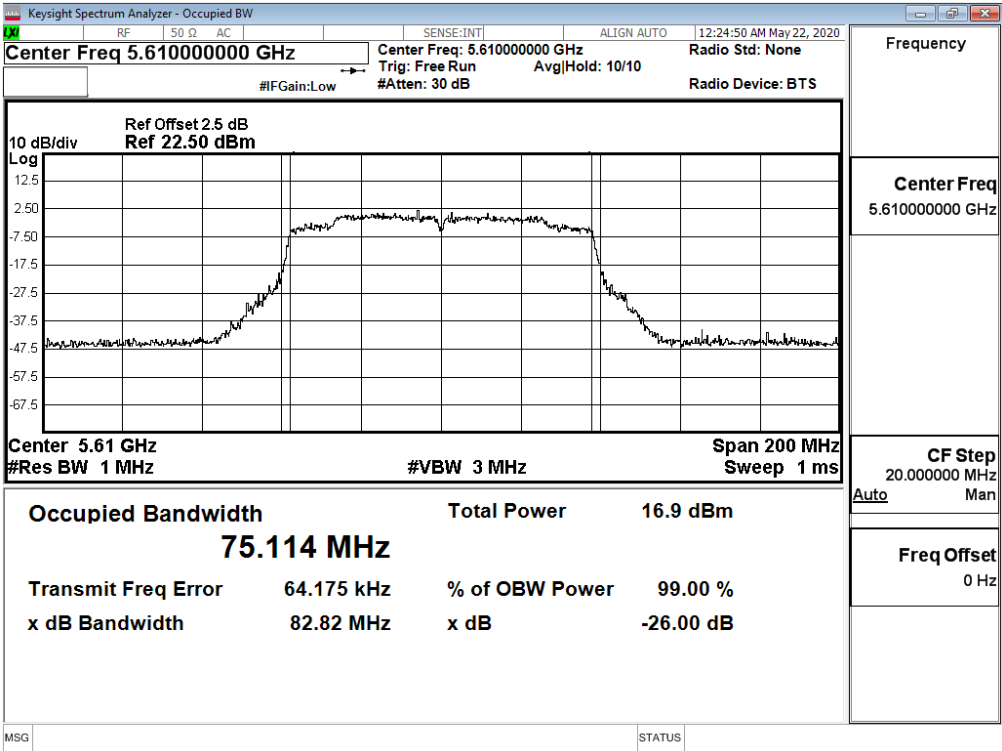


Channel 122 (Chain B)


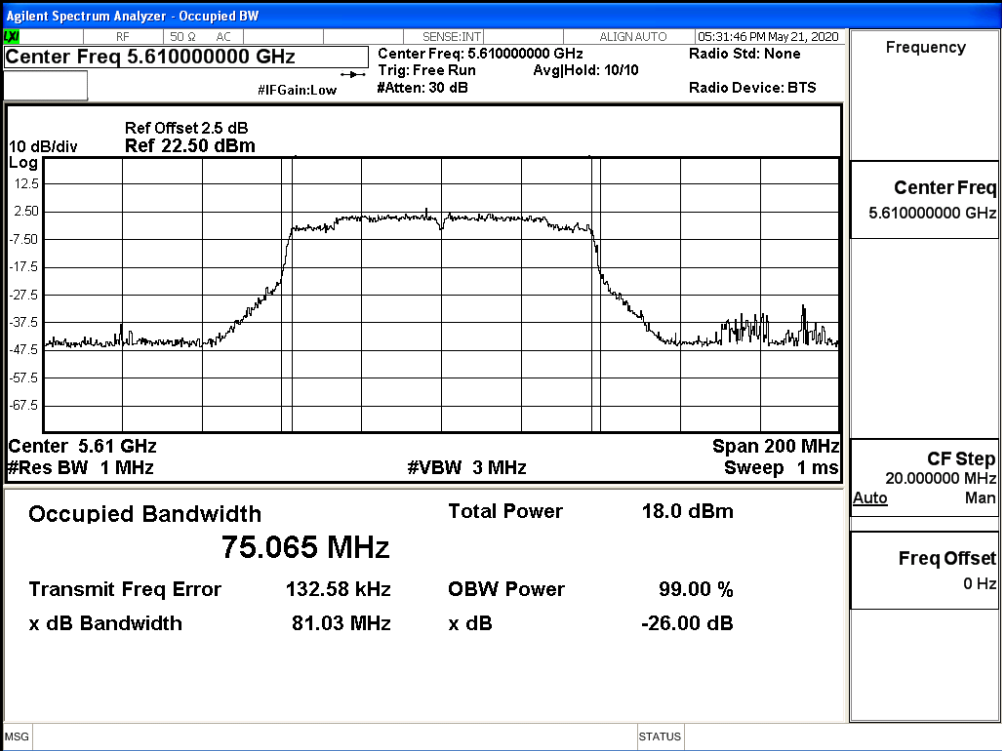


Channel 138 (Chain A)

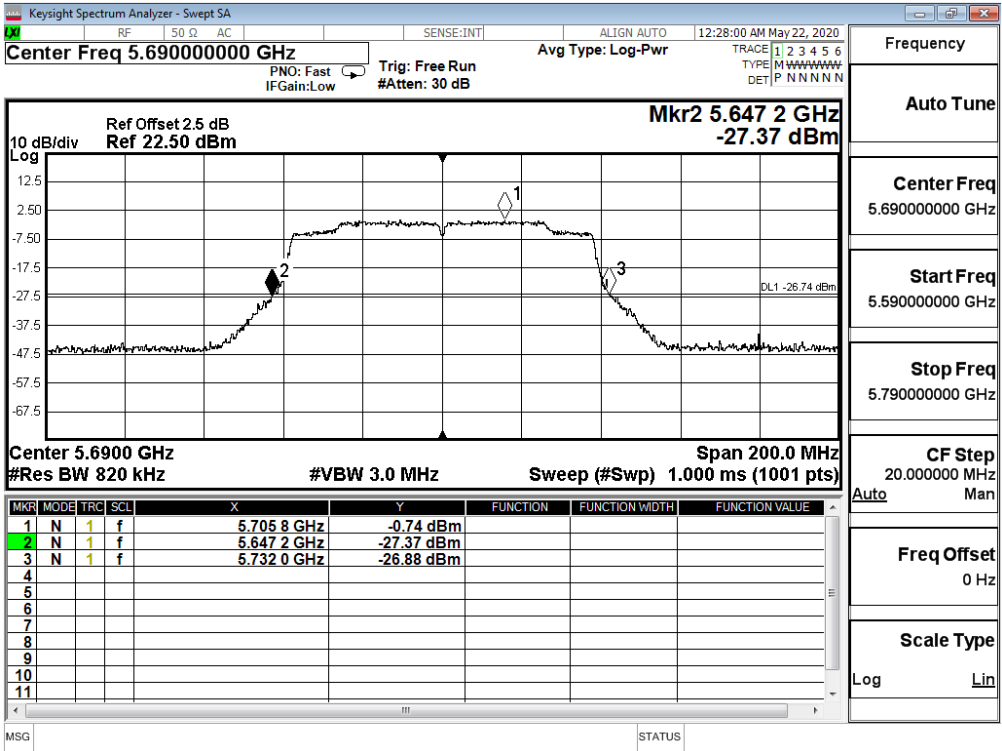


Channel 138 (Chain B)

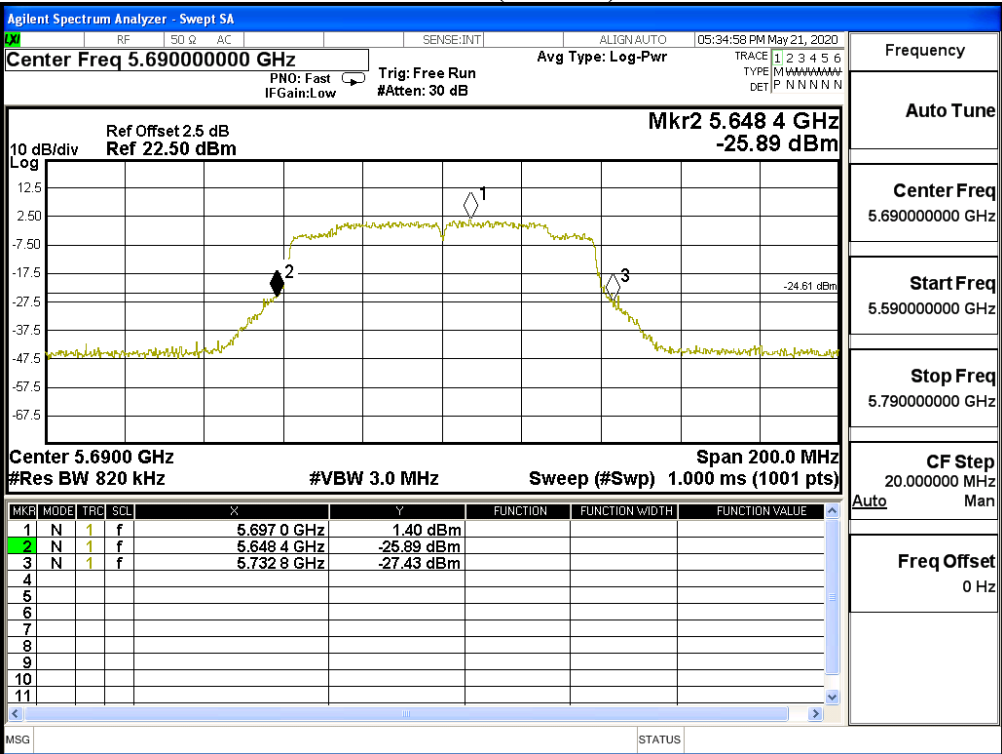


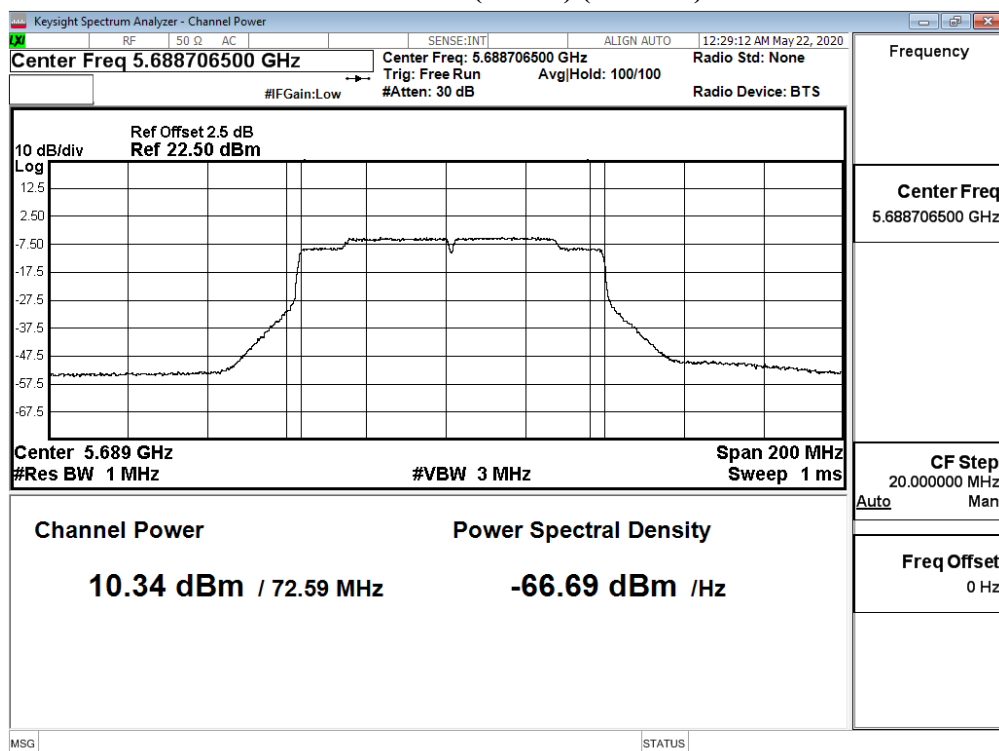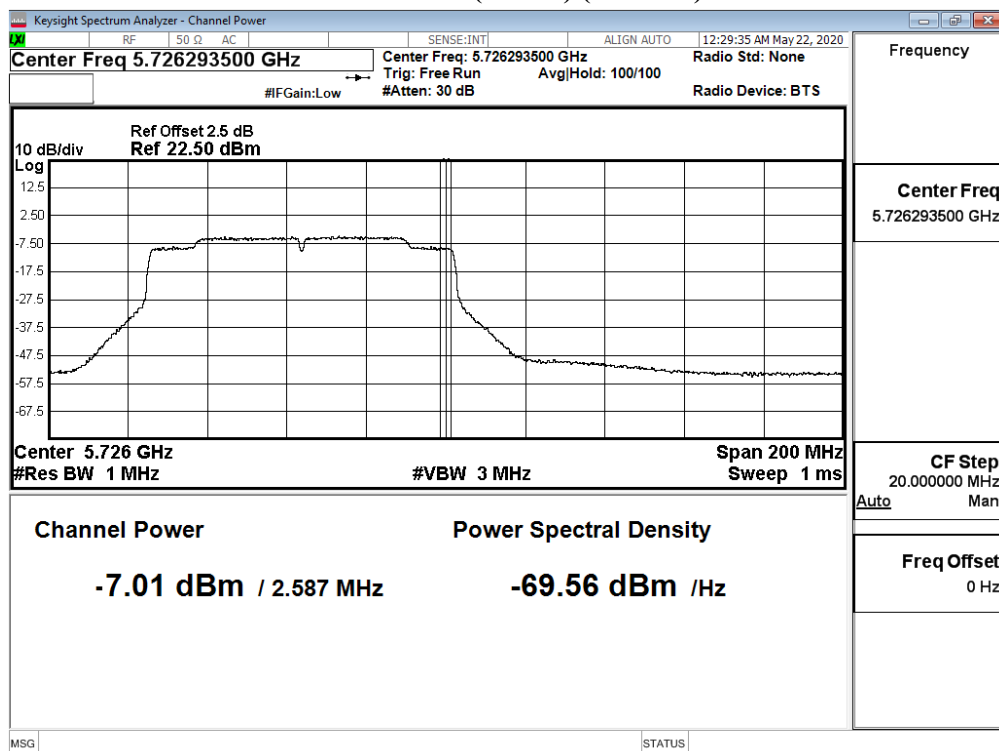Maximum conducted output power:**Channel 138 (Band3) (Chain A)****Maximum conducted output power:****Channel 138 (Band4) (Chain A)**

Maximum conducted output power:
Channel 138 (Band3) (Chain B)

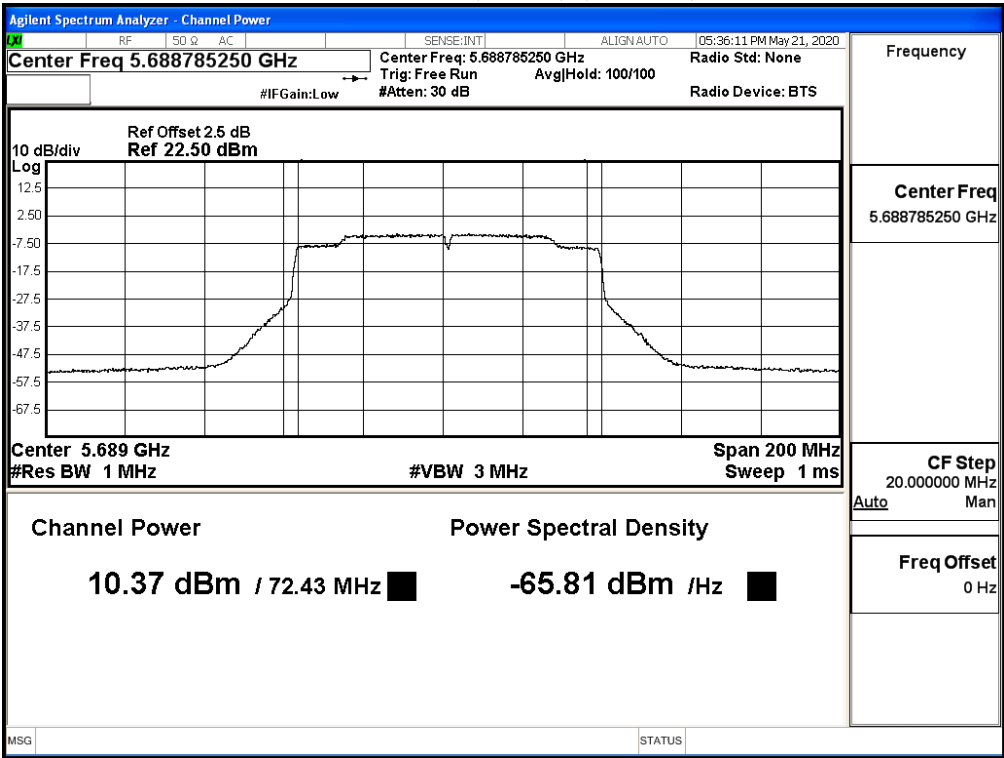

Maximum conducted output power:
Channel 138 (Band4) (Chain B)

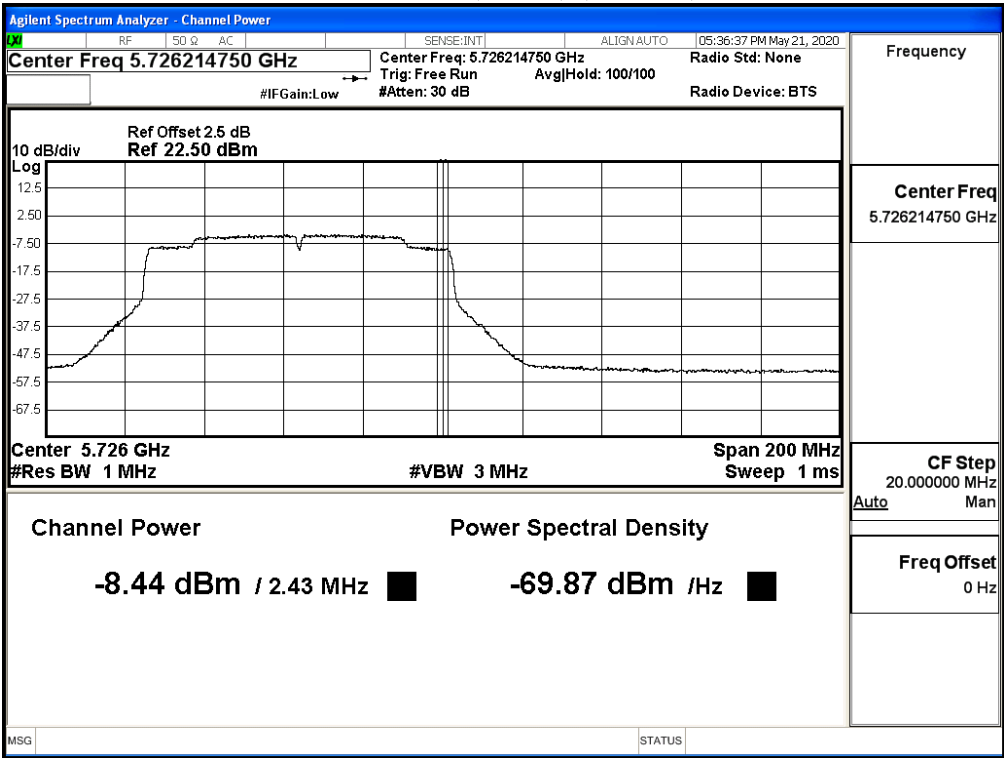

Product : Portable computer
 Test Item : Maximum conducted output power
 Test Date : 2020/05/18
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)

Chain A

Cable loss=2.5dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		VHT0	VHT1	VHT2	VHT3	VHT4	VHT5	VHT6	VHT7	VHT8	VHT9
50ac160(Band1)	5250	7.18	7.11	7.08	7	6.9	6.82	6.72	6.64	6.59	6.51
50ac160(Band2)	5250	7.65	7.6	7.53	7.48	7.45	7.35	7.27	7.19	7.11	7.08
114ac160	5570	10.45	10.4	10.36	10.33	10.28	10.25	10.18	10.11	10.04	9.99

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss

Chain A

Cable loss=2.5dB		Maximum conducted output power									
Channel No	Frequency (MHz)	Data Rate (Mbps)									
		VHT0	VHT1	VHT2	VHT3	VHT4	VHT5	VHT6	VHT7	VHT8	VHT9
50ac160(Band1)	5250	7.58	7.51	7.45	7.4	7.37	7.3	7.26	7.23	7.13	7.05
50ac160(Band2)	5250	7.27	7.19	7.14	7.08	7.04	7.00	6.94	6.86	6.81	6.76
114ac160	5570	10.46	10.36	10.28	10.21	10.11	10.01	9.93	9.83	9.78	9.75

Note: Maximum conducted output power Value =Reading value on Spectrum Analyzer + cable loss


Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
50ac160(Band1)	5250	--	7.18	7.58	10.39	24		Pass
80ac160(Band2)	5250	81.900	7.65	7.27	10.47	24	19.84	Pass
114ac160	5570	163.300	10.45	10.46	13.47	24	21.19	Pass


Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.


26dB Occupied Bandwidth:
Channel 50 (Chain A)

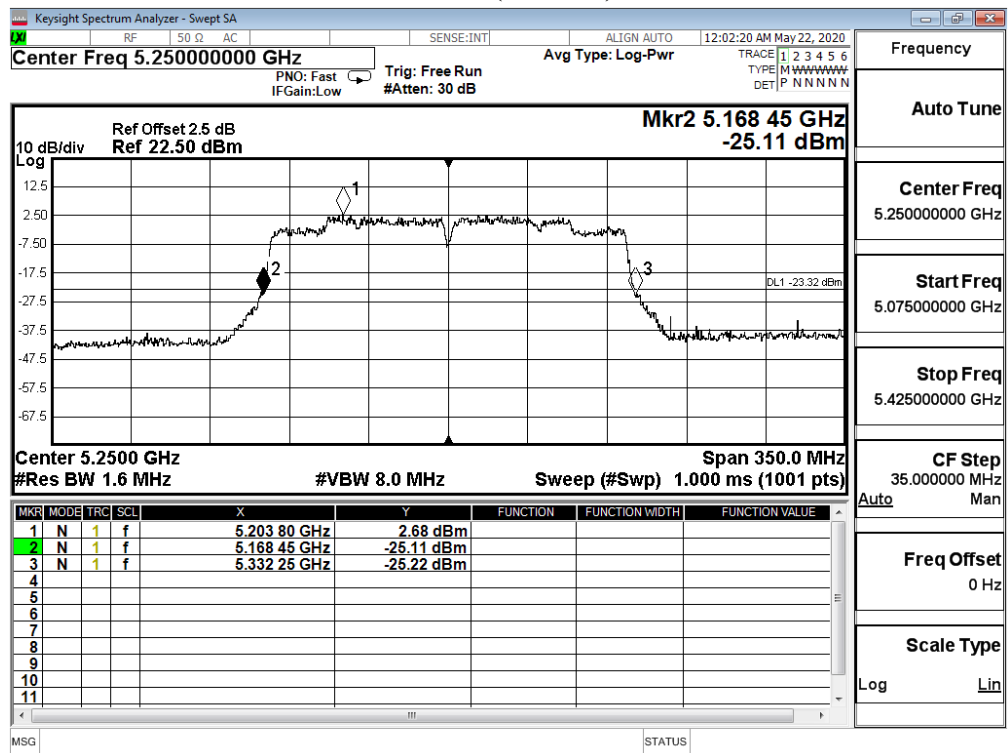


Channel 50 (Chain B)

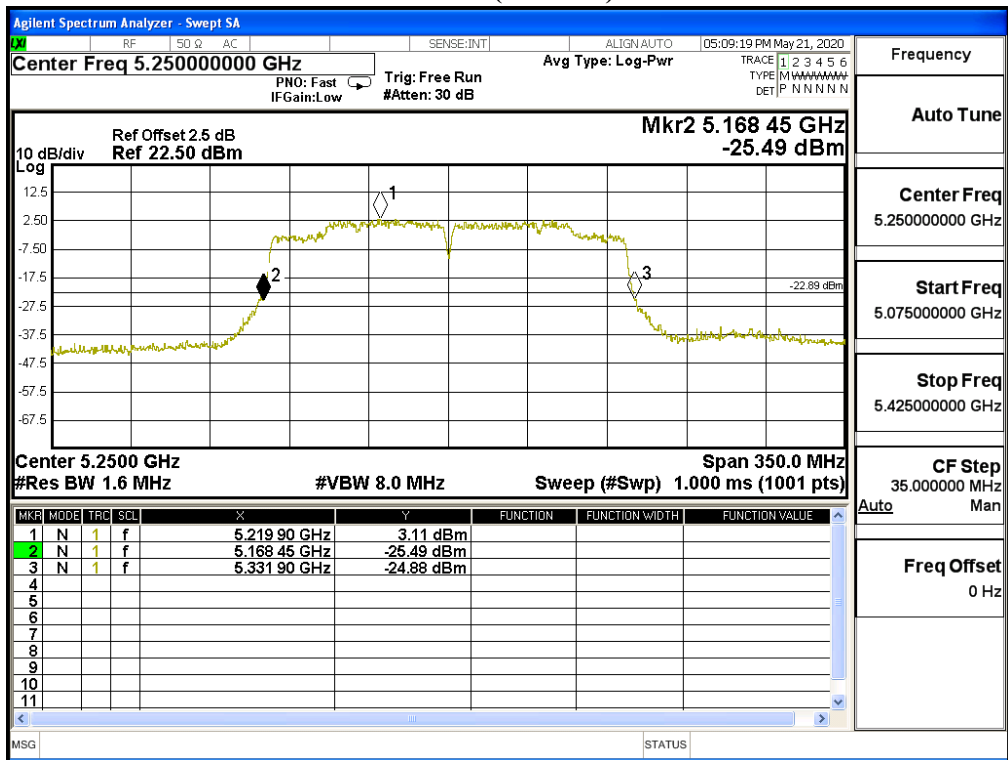


Channel 114 (Chain A)

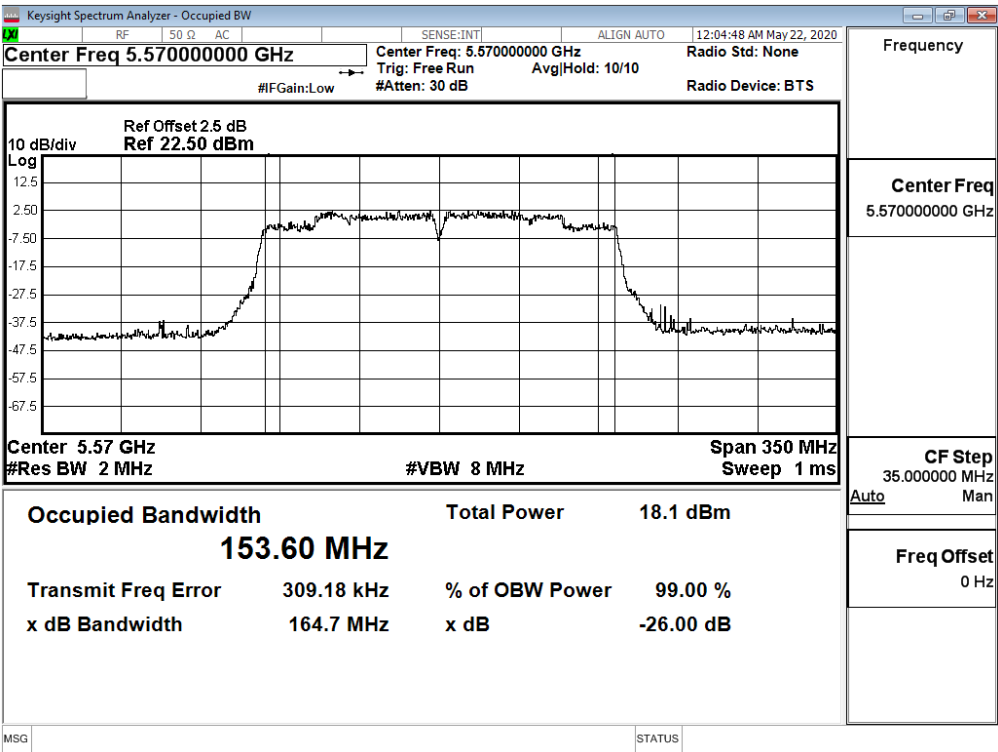


Channel 114 (Chain B)

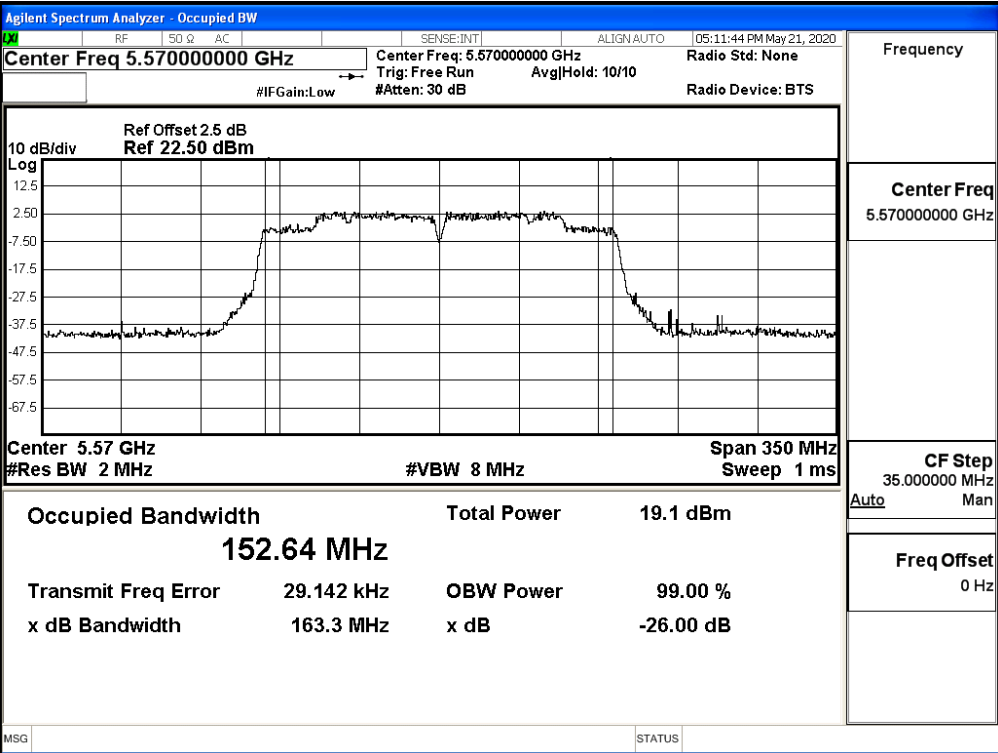


Maximum conducted output power:
Channel 50 (Band1) (Chain A)

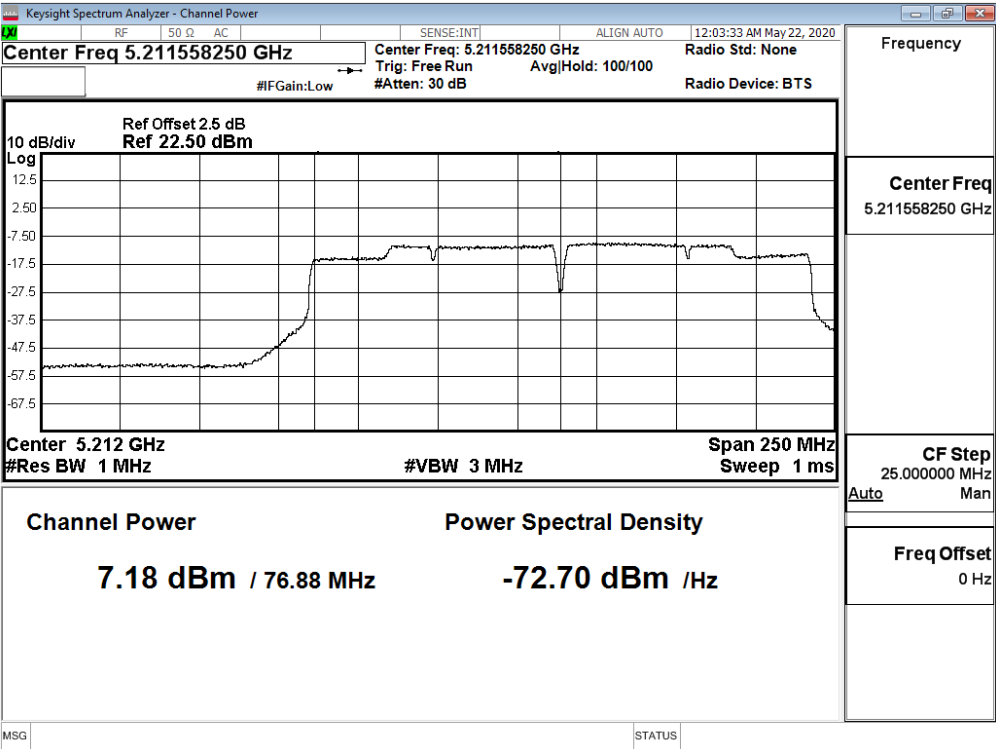


Maximum conducted output power:
Channel 50 (Band2) (Chain A)

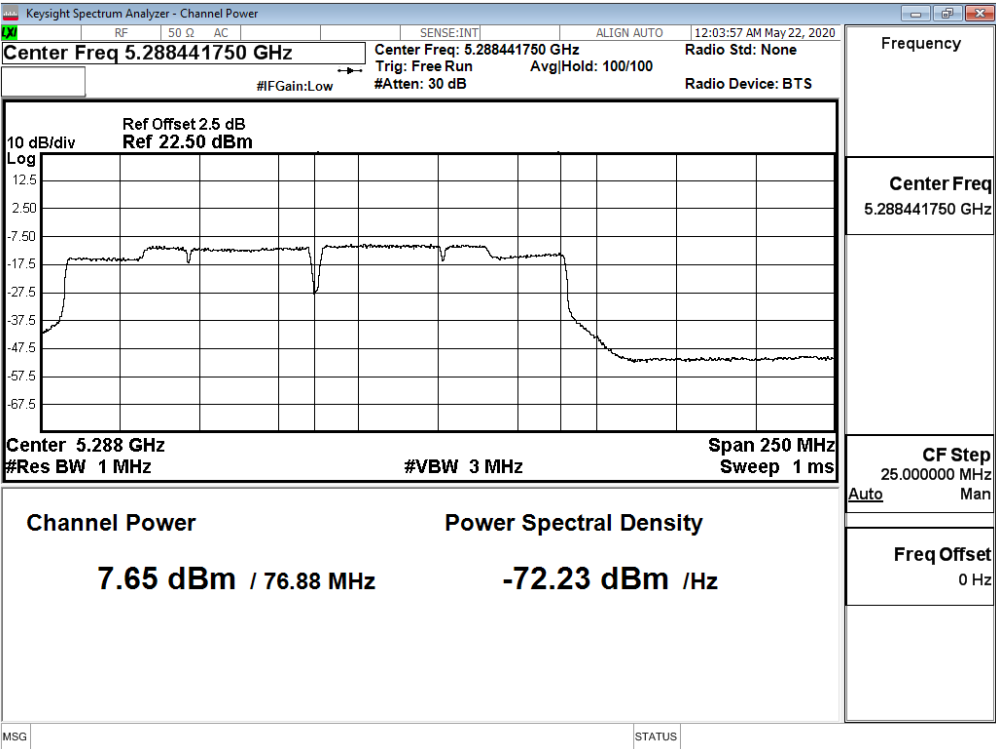

Maximum conducted output power:
Channel 50 (Band1) (Chain B)

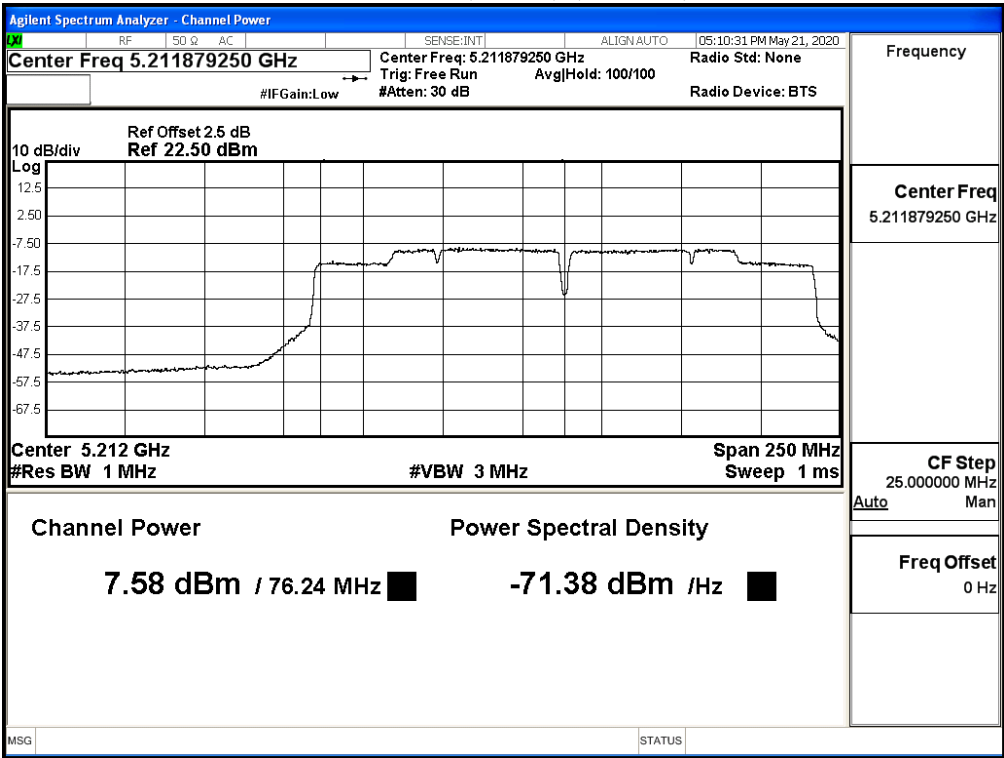

Maximum conducted output power:
Channel 50 (Band2) (Chain B)

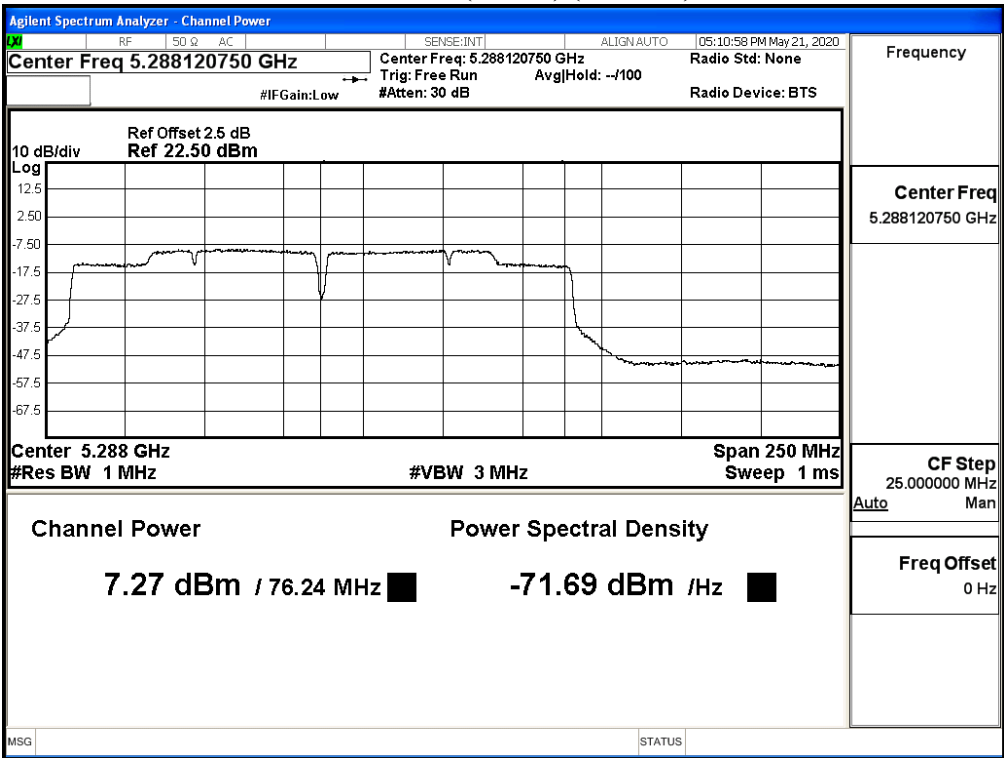

Product : Portable computer
 Test Item : Maximum conducted output power
 Test Date : 2020/05/18
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)

Chain A**RU config: Full**

Cable loss=2.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate (Mbps)											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
		Measurement Level (dBm)											
36	5180	10.48	--	--	--	--	--	--	--	--	--	--	--
44	5220	10.45	10.37	10.29	10.19	10.12	10.02	9.95	9.91	9.86	9.76	9.67	9.57
48	5240	10.43	--	--	--	--	--	--	--	--	--	--	--
52	5260	10.41	--	--	--	--	--	--	--	--	--	--	--
60	5300	10.46	10.42	10.38	10.29	10.19	10.15	10.10	10.00	9.92	9.83	9.76	9.69
64	5320	10.47	--	--	--	--	--	--	--	--	--	--	--
100	5500	10.43	--	--	--	--	--	--	--	--	--	--	--
116	5580	10.46	10.43	10.38	10.28	10.18	10.13	10.05	9.96	9.89	9.83	9.75	9.67
140	5700	10.47	--	--	--	--	--	--	--	--	--	--	--
144(Band3)	5720	9.64	9.55	9.5	9.43	9.39	9.3	9.27	9.21	9.16	9.1	9.02	8.98
144(Band4)	5720	2.63	2.59	2.55	2.47	2.39	2.36	2.32	2.26	2.18	2.14	2.07	2
149	5745	10.4	--	--	--	--	--	--	--	--	--	--	--
157	5785	10.4	10.37	10.32	10.26	10.19	10.16	10.13	10.03	9.93	9.89	9.80	9.74
165	5825	10.44	--	--	--	--	--	--	--	--	--	--	--

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Chain B**RU config: Full**

Cable loss=2.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate (Mbps)											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
		Measurement Level (dBm)											
36	5180	10.46	--	--	--	--	--	--	--	--	--	--	--
44	5220	10.46	10.41	10.38	10.29	10.24	10.17	10.09	10.06	9.98	9.93	9.90	9.87
48	5240	10.47	--	--	--	--	--	--	--	--	--	--	--
52	5260	10.41	--	--	--	--	--	--	--	--	--	--	--
60	5300	10.43	10.38	10.28	10.22	10.17	10.07	9.98	9.88	9.80	9.75	9.71	9.67
64	5320	10.4	--	--	--	--	--	--	--	--	--	--	--
100	5500	10.44	--	--	--	--	--	--	--	--	--	--	--
116	5580	10.49	10.45	10.37	10.30	10.22	10.18	10.14	10.10	10.04	10.01	9.94	9.85
140	5700	10.5	--	--	--	--	--	--	--	--	--	--	--
144(Band3)	5720	9.77	9.71	9.66	9.56	9.53	9.45	9.41	9.32	9.27	9.23	9.14	9.11
144(Band4)	5720	2.22	2.14	2.04	1.94	1.9	1.82	1.74	1.67	1.62	1.58	1.55	1.49
149	5745	10.4	--	--	--	--	--	--	--	--	--	--	--
157	5785	10.43	10.4	10.3	10.24	10.19	10.09	9.99	9.95	9.87	9.79	9.74	9.65
165	5825	10.42	--	--	--	--	--	--	--	--	--	--	--

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
36	5180	--	10.48	10.46	13.48	24	--	Pass
44	5220	--	10.45	10.46	13.47	24	--	Pass
48	5240	--	10.43	10.47	13.46	24	--	Pass
52	5260	22.710	10.41	10.41	13.42	24	24.56	Pass
60	5300	22.840	10.46	10.43	13.46	24	24.59	Pass
64	5320	23.040	10.47	10.4	13.45	24	24.62	Pass
100	5500	22.630	10.43	10.44	13.45	24	24.55	Pass
116	5580	23.030	10.46	10.49	13.49	24	24.62	Pass
140	5700	22.810	10.47	10.5	13.5	24	24.58	Pass
144(Band3)	5720	16.350	9.64	9.77	12.72	24	23.14	Pass
144(Band4)	5720	--	2.63	2.22	5.44	30	--	Pass
149	5745	--	10.4	10.4	13.41	30	--	Pass
157	5785	--	10.4	10.43	13.43	30	--	Pass
165	5825	--	10.44	10.42	13.44	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Chain A**RU config: Other**

Channel No / Frequency (MHz)	RU setting	Average Power Output (dBm)												
		Data Rate (Mbps)												Required Lim
		MCS0	--	--	--	--	--	--	--	--	--	--	--	
36/5180	26/0	10.42	--	--	--	--	--	--	--	--	--	--	--	<24dBm
	52/37	10.48	--	--	--	--	--	--	--	--	--	--	--	<24dBm
	106/53	10.47	--	--	--	--	--	--	--	--	--	--	--	<24dBm
64/5320	26/8	10.48	--	--	--	--	--	--	--	--	--	--	--	<24dBm
	52/40	10.45	--	--	--	--	--	--	--	--	--	--	--	<24dBm
	106/54	10.42	--	--	--	--	--	--	--	--	--	--	--	<24dBm
100/5500	26/0	10.44	--	--	--	--	--	--	--	--	--	--	--	<24dBm
	52/37	10.47	--	--	--	--	--	--	--	--	--	--	--	<24dBm
	106/53	10.44	--	--	--	--	--	--	--	--	--	--	--	<24dBm
140/5700	26/8	10.44	--	--	--	--	--	--	--	--	--	--	--	<24dBm
	52/40	10.43	--	--	--	--	--	--	--	--	--	--	--	<24dBm
	106/54	10.44	--	--	--	--	--	--	--	--	--	--	--	<24dBm
149/5745	26/0	10.43	--	--	--	--	--	--	--	--	--	--	--	<30dBm
	52/37	10.41	--	--	--	--	--	--	--	--	--	--	--	<30dBm
	106/53	10.49	--	--	--	--	--	--	--	--	--	--	--	<30dBm

Chain B**RU config: Other**

Channel No / Frequency (MHz)	RU setting	Average Power Output (dBm)													Required Lim
		Data Rate (Mbps)													
		MCS0	--	--	--	--	--	--	--	--	--	--	--		
36/5180	26/0	10.44	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
	52/37	10.49	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
	106/53	10.4	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
64/5320	26/8	10.47	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
	52/40	10.44	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
	106/54	10.45	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
100/5500	26/0	10.37	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
	52/37	10.43	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
	106/53	10.45	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
140/5700	26/8	10.45	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
	52/40	10.49	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
	106/54	10.48	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
149/5745	26/0	10.39	--	--	--	--	--	--	--	--	--	--	--	<30dBm	
	52/37	10.39	--	--	--	--	--	--	--	--	--	--	--	<30dBm	
	106/53	10.41	--	--	--	--	--	--	--	--	--	--	--	<30dBm	


Maximum conducted output power Measurement:

Channel No / Frequency Range	RU setting	26dB Bandwidth	Chain A Power	Chain B Power	Output Power Limit	Output power limit		Result
		(MHz)	(dBm)	(dBm)	(dBm)	(dBm)	dBm+10log (BW)	
36/5180	26/0	--	10.42	10.44	13.44	24	--	Pass
	52/37	--	10.48	10.49	13.5	24	--	Pass
	106/53	--	10.47	10.4	13.45	24	--	Pass
64/5320	26/8	20.360	10.48	10.47	13.49	24	24.09	Pass
	52/40	20.230	10.45	10.44	13.46	24	24.06	Pass
	106/54	20.430	10.42	10.45	13.45	24	24.10	Pass
100/5500	26/0	20.550	10.44	10.37	13.42	24	24.13	Pass
	52/37	19.810	10.47	10.43	13.46	24	23.97	Pass
	106/53	20.960	10.44	10.45	13.46	24	24.21	Pass
140/5700	26/8	20.360	10.44	10.45	13.46	24	24.09	Pass
	52/40	20.270	10.43	10.49	13.47	24	24.07	Pass
	106/54	20.200	10.44	10.48	13.47	24	24.05	Pass
149/5745	26/0	--	10.43	10.39	13.42	30	--	Pass
	52/37	--	10.41	10.39	13.41	30	--	Pass
	106/53	--	10.49	10.41	13.46	30	--	Pass


Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.


RU config: Full
26dB Occupied Bandwidth:
Channel 52 (Chain A)

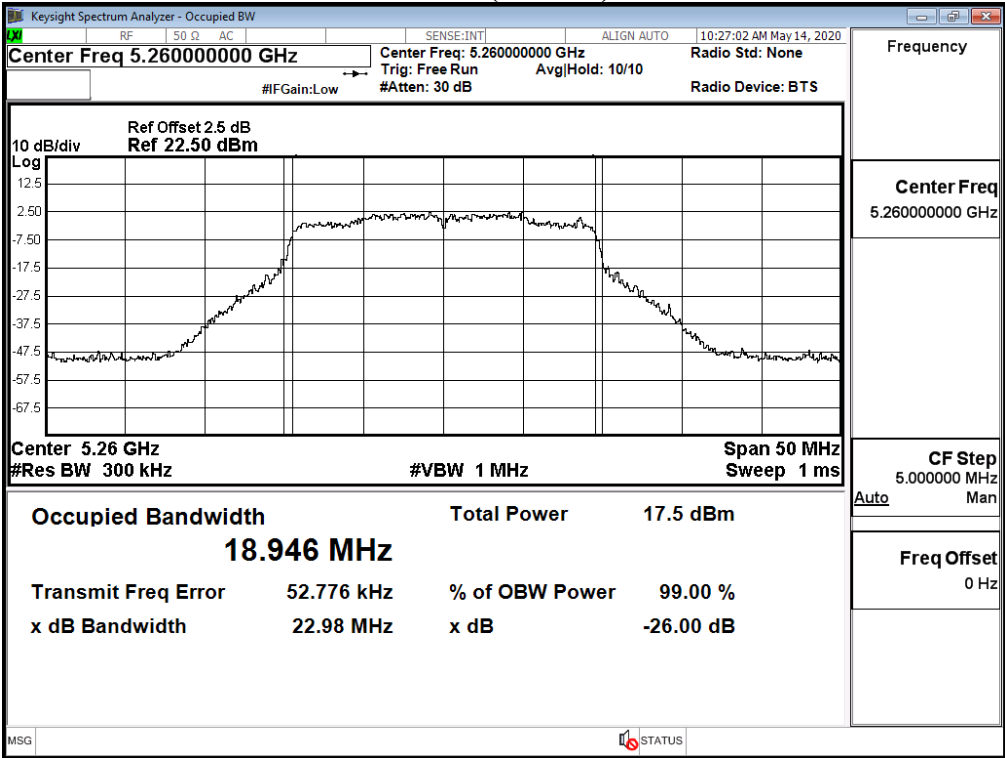


Channel 52 (Chain B)

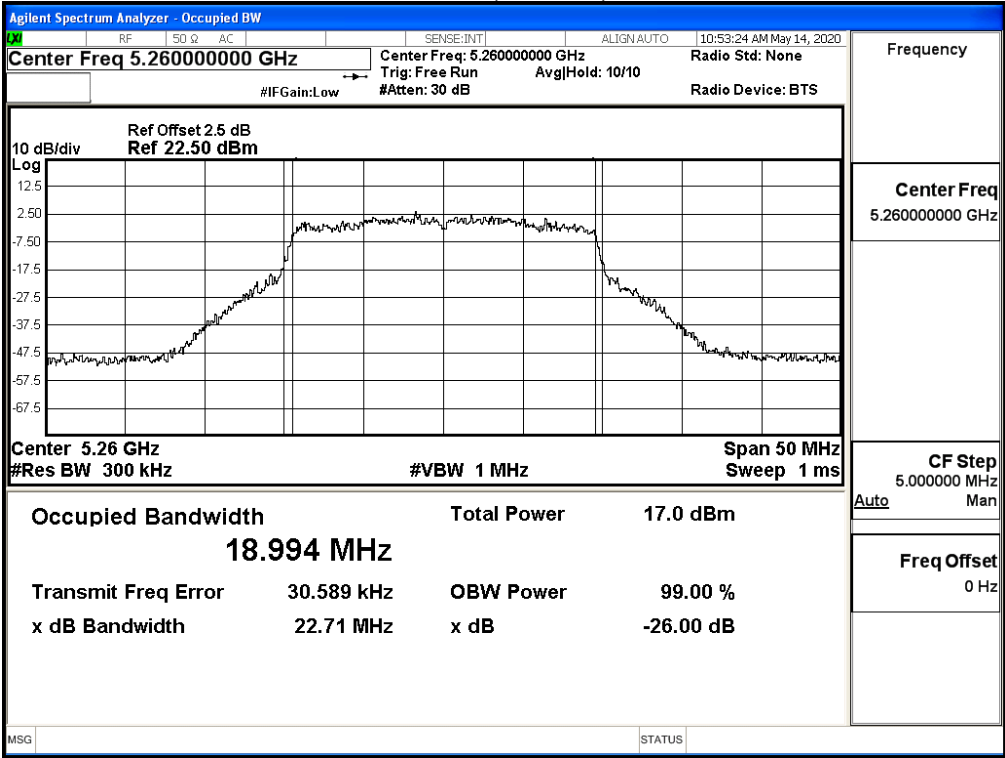


Channel 60 (Chain A)

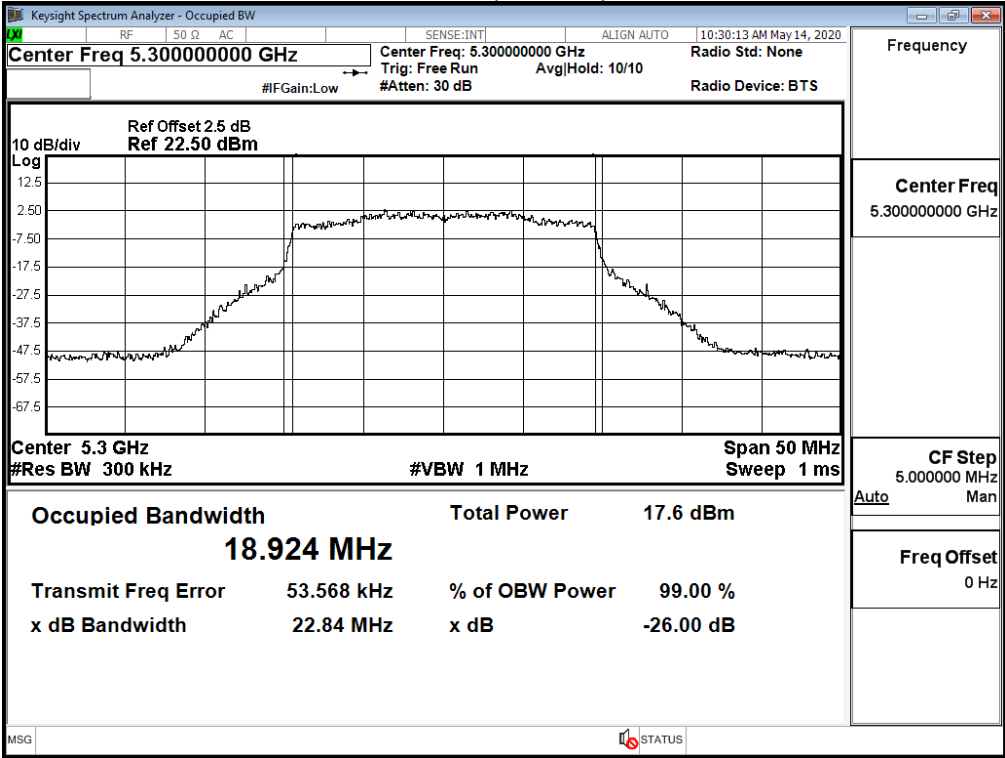


Channel 60 (Chain B)

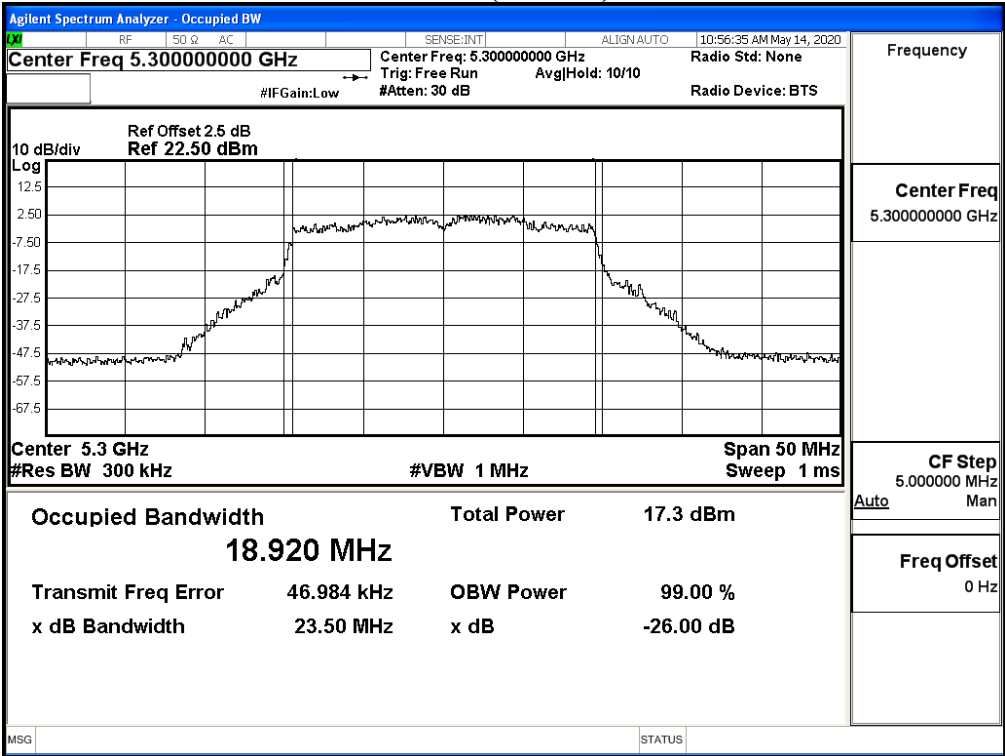


Channel 64 (Chain A)

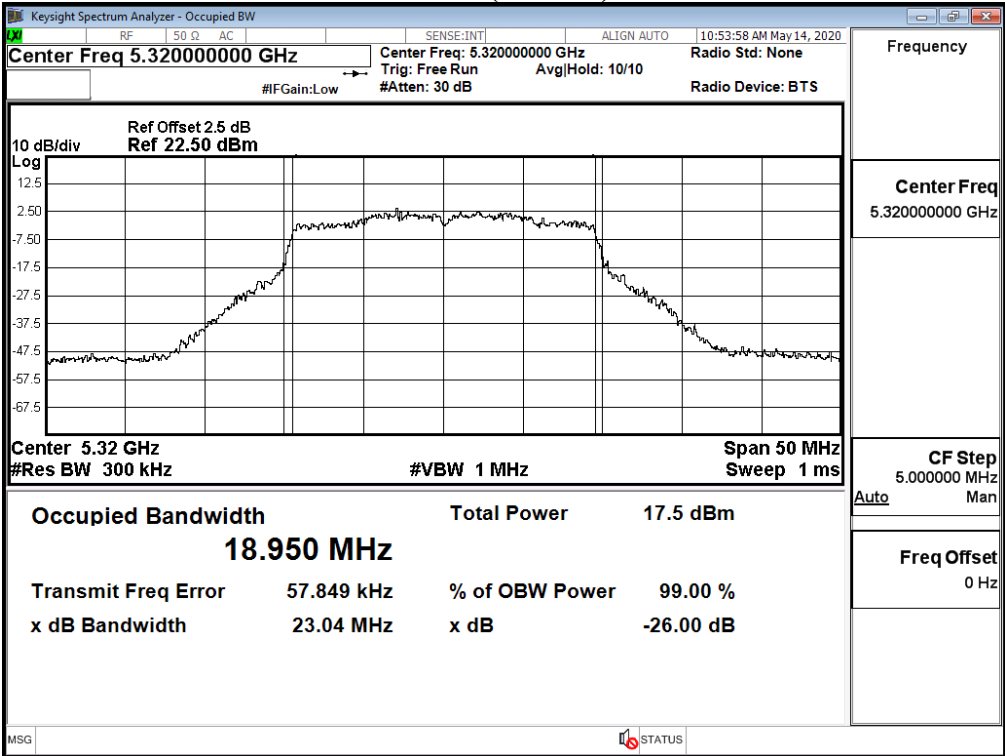


Channel 64 (Chain B)

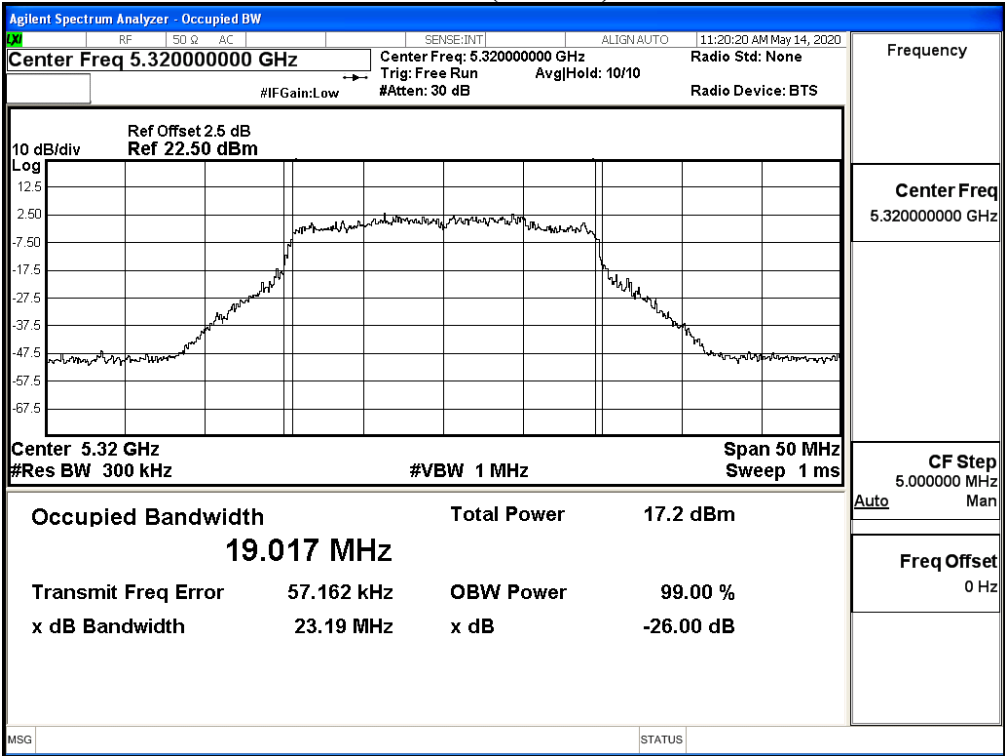


Channel 100 (Chain A)

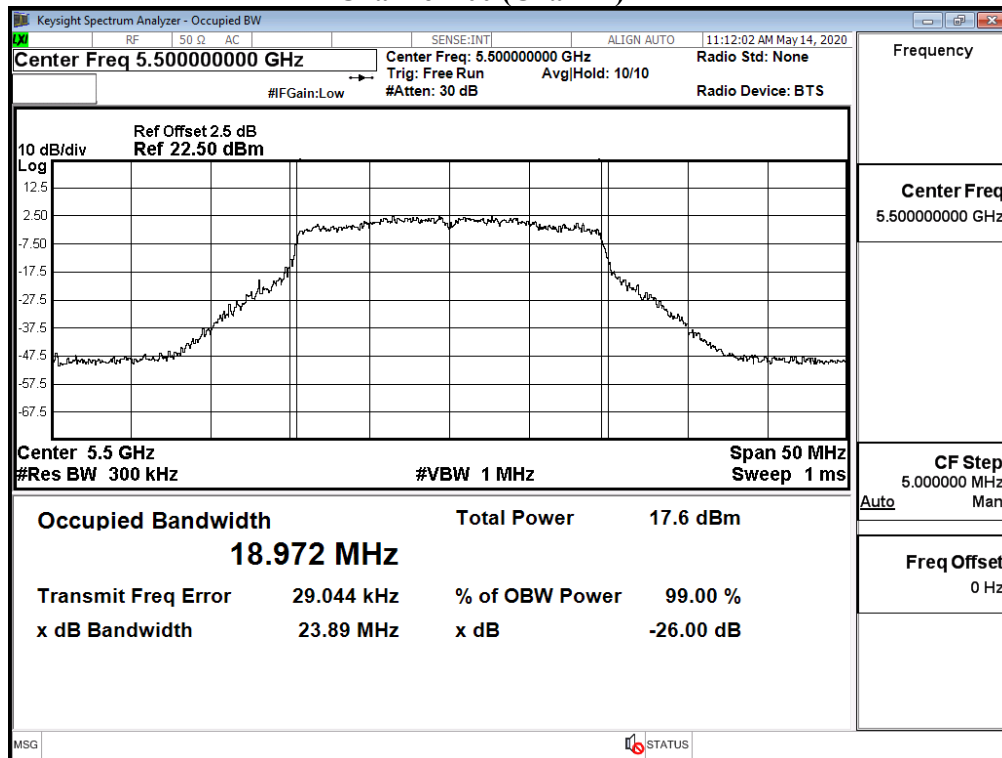


Channel 100 (Chain B)

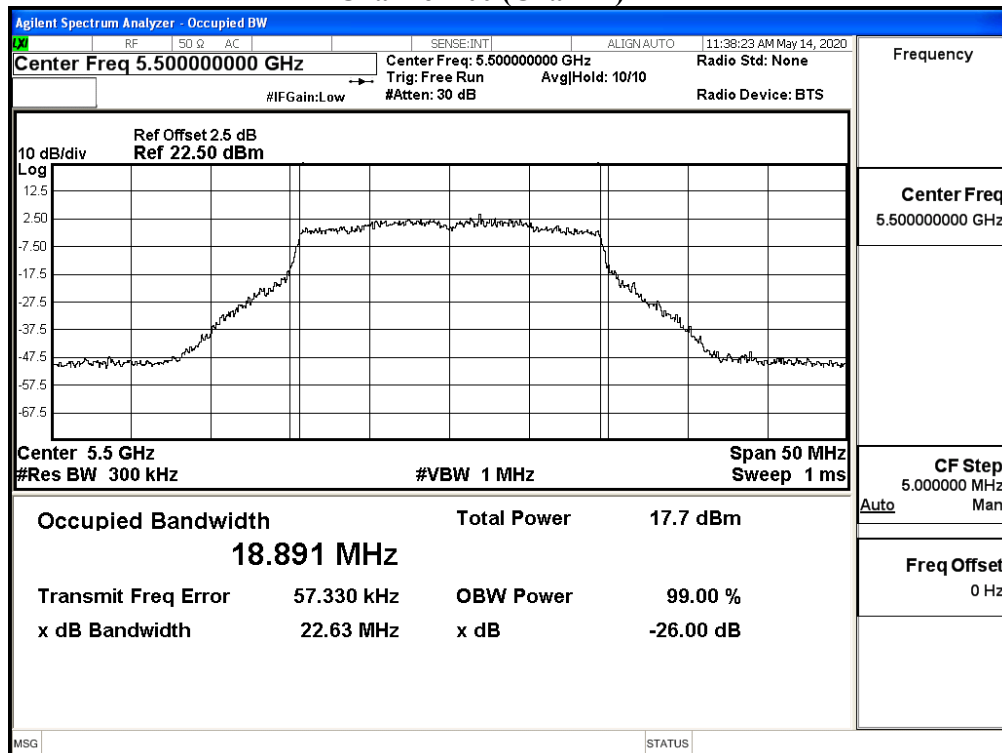


Channel 116 (Chain A)

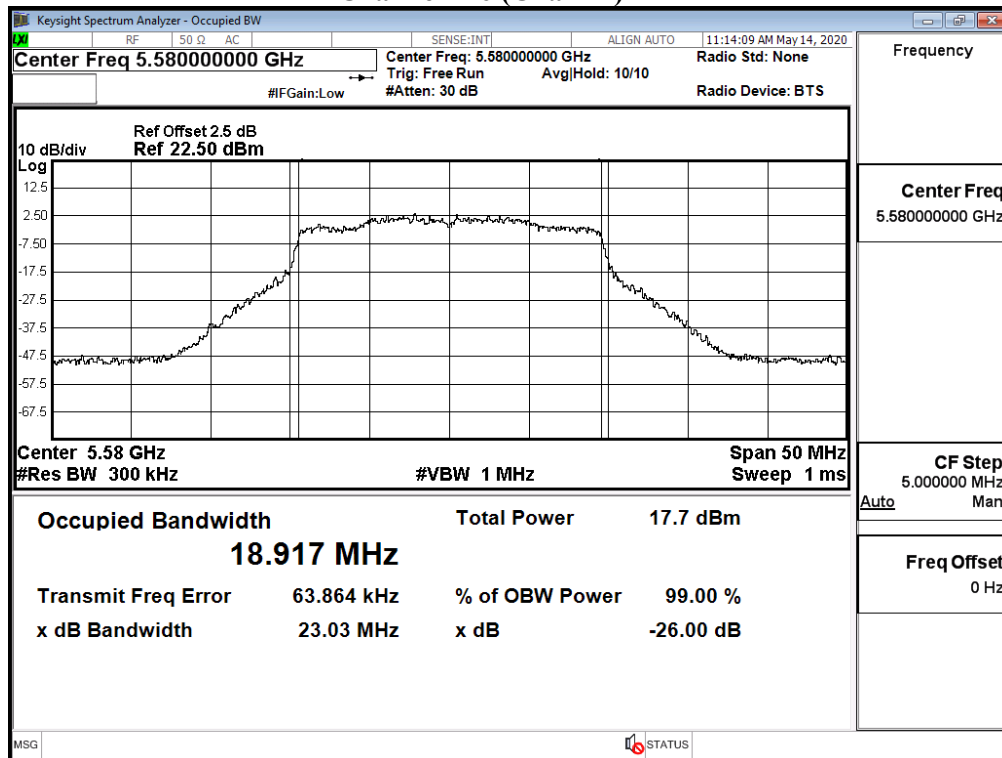


Channel 116 (Chain B)

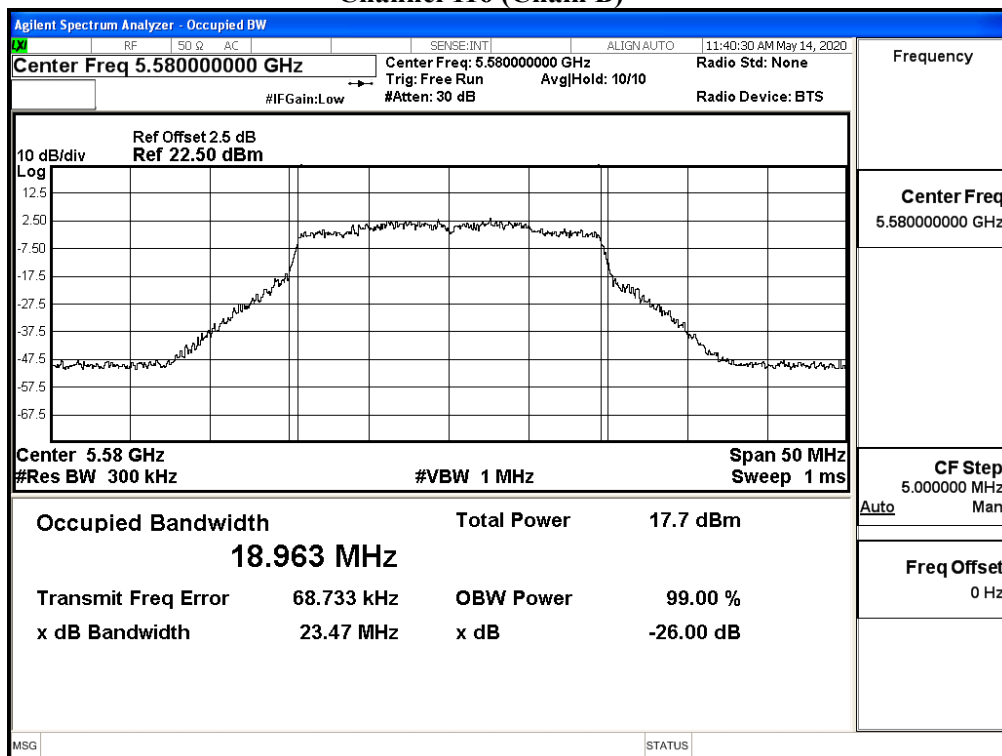


Channel 140 (Chain A)

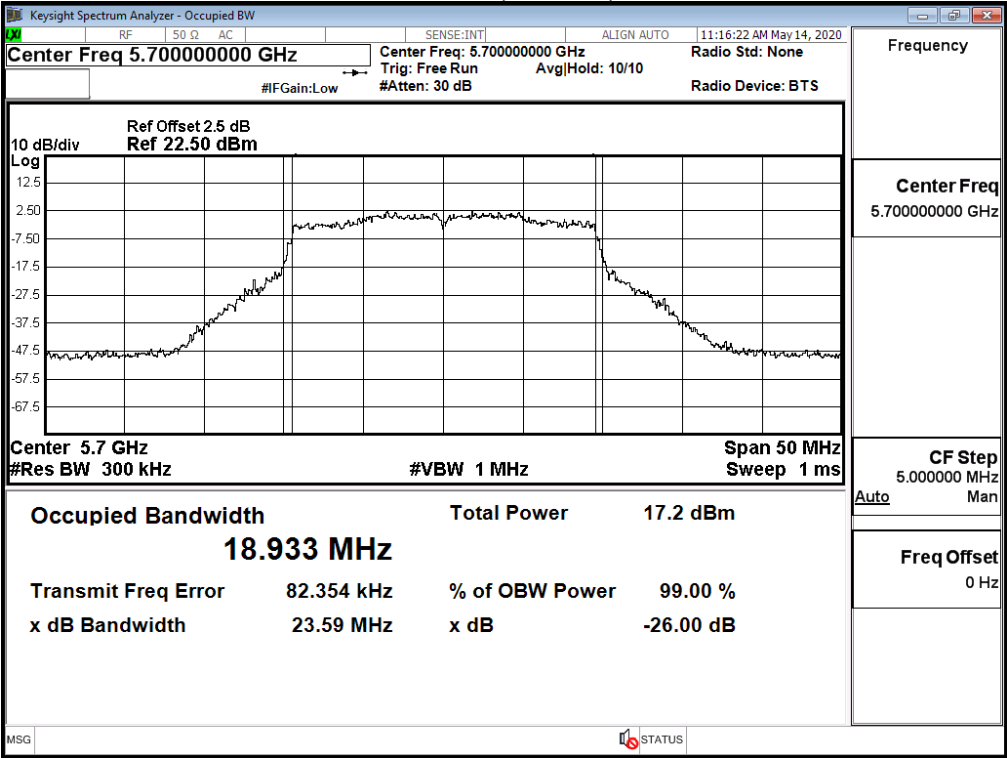


Channel 140 (Chain B)

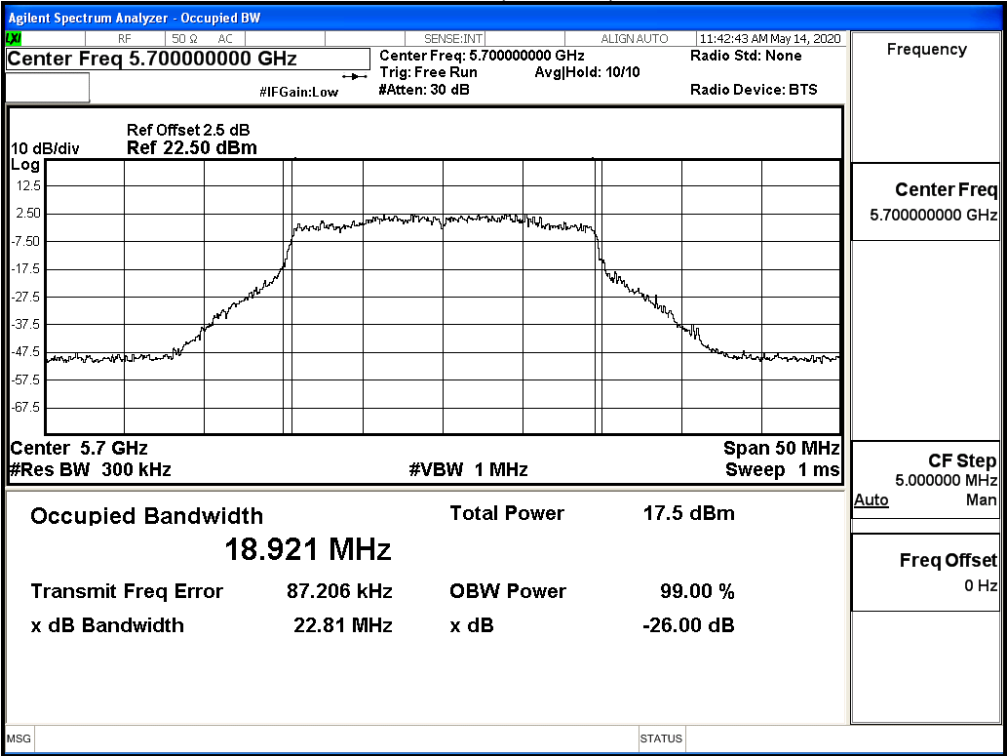


Channel 144 (Chain A)

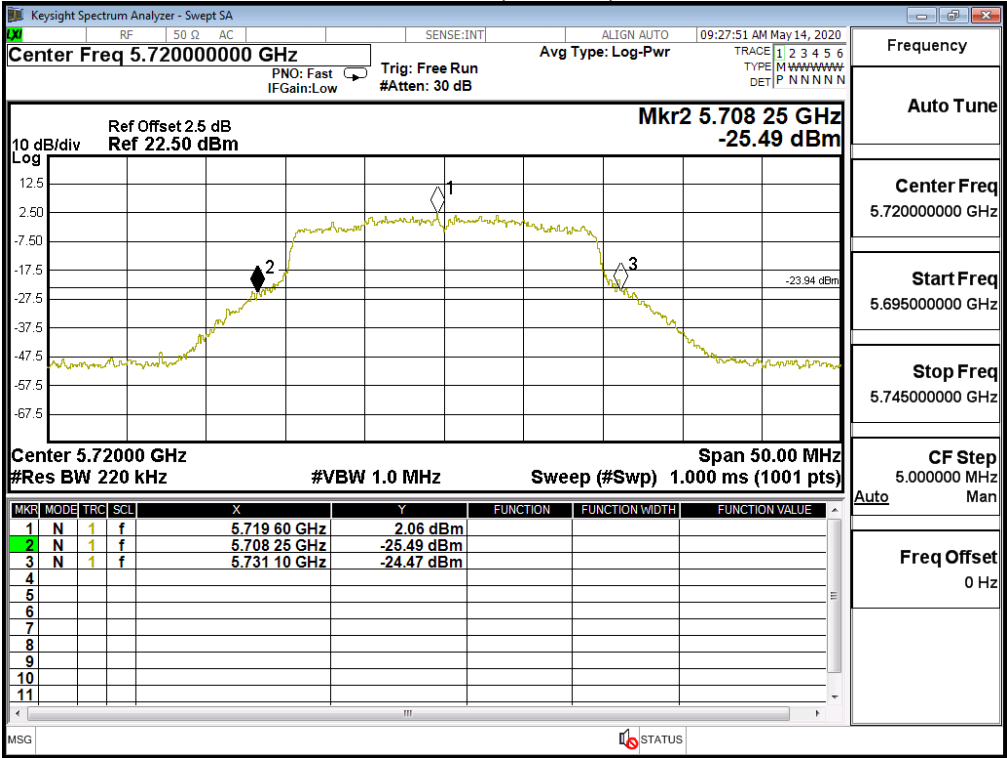


Channel 144 (Chain B)

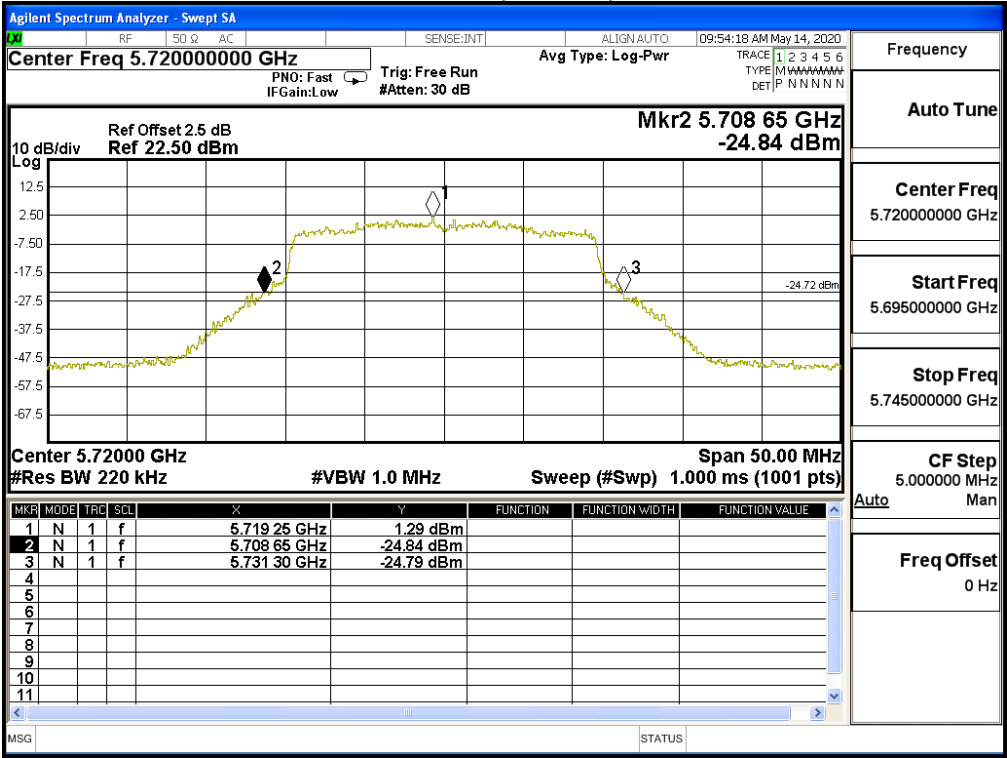


RU config: Full
Maximum conducted output power:
Channel 144 (Band3) (Chain A)

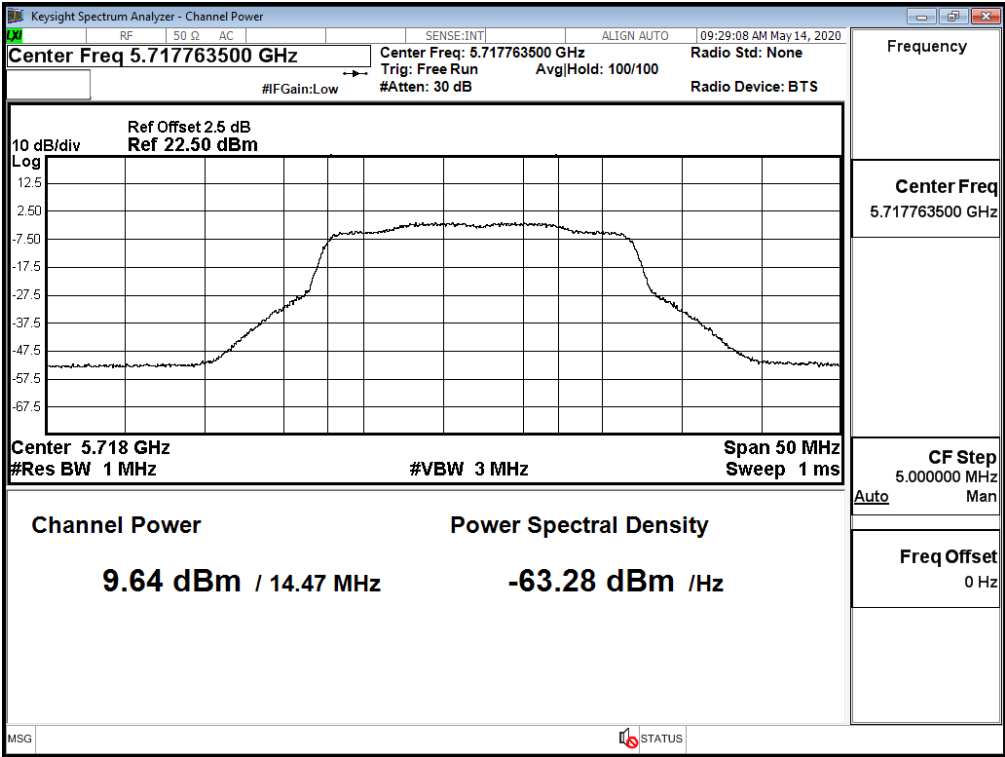


Maximum conducted output power:
Channel 144 (Band4) (Chain A)

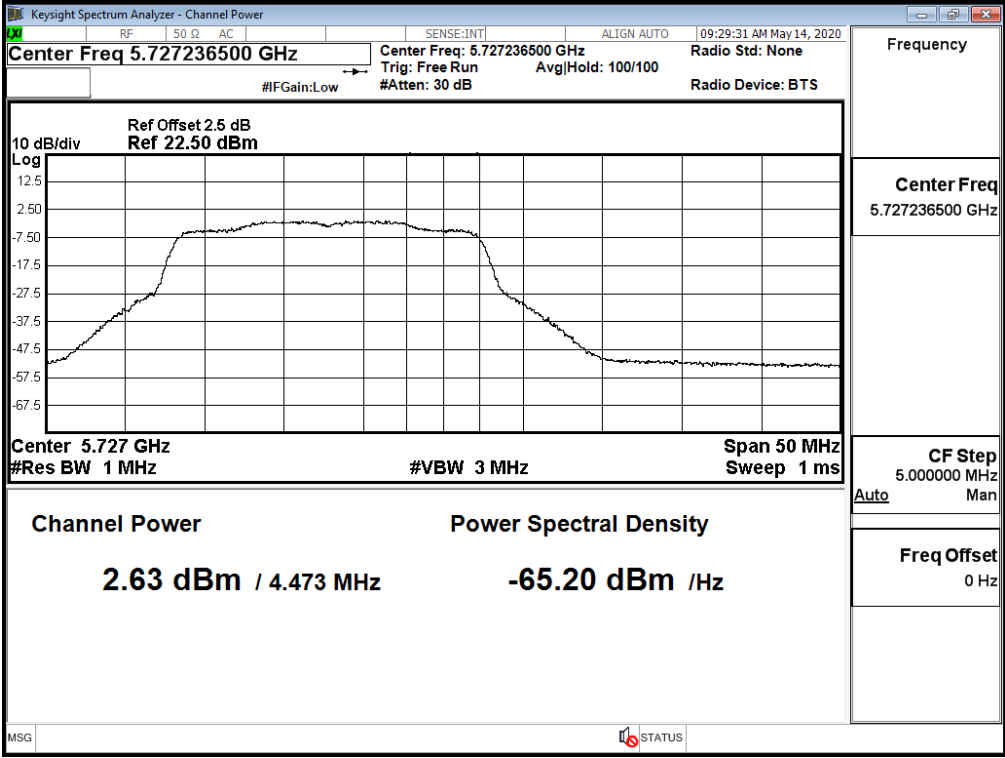

Maximum conducted output power:
Channel 144 (Band3) (Chain B)

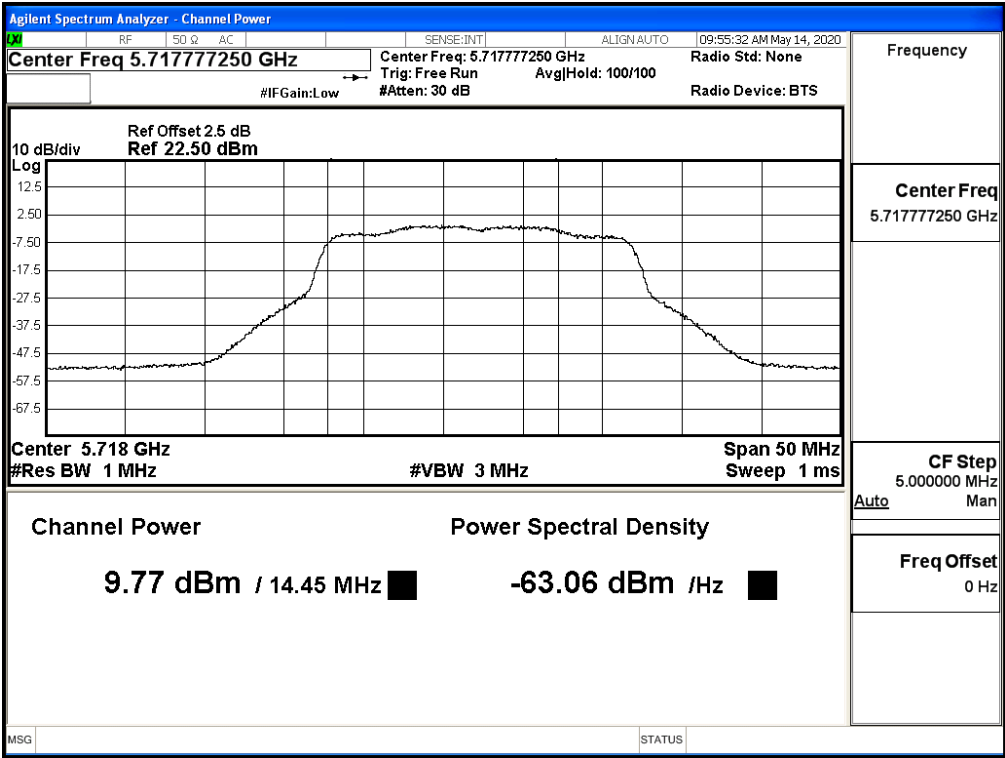


Maximum conducted output power:
Channel 144 (Band4) (Chain B)

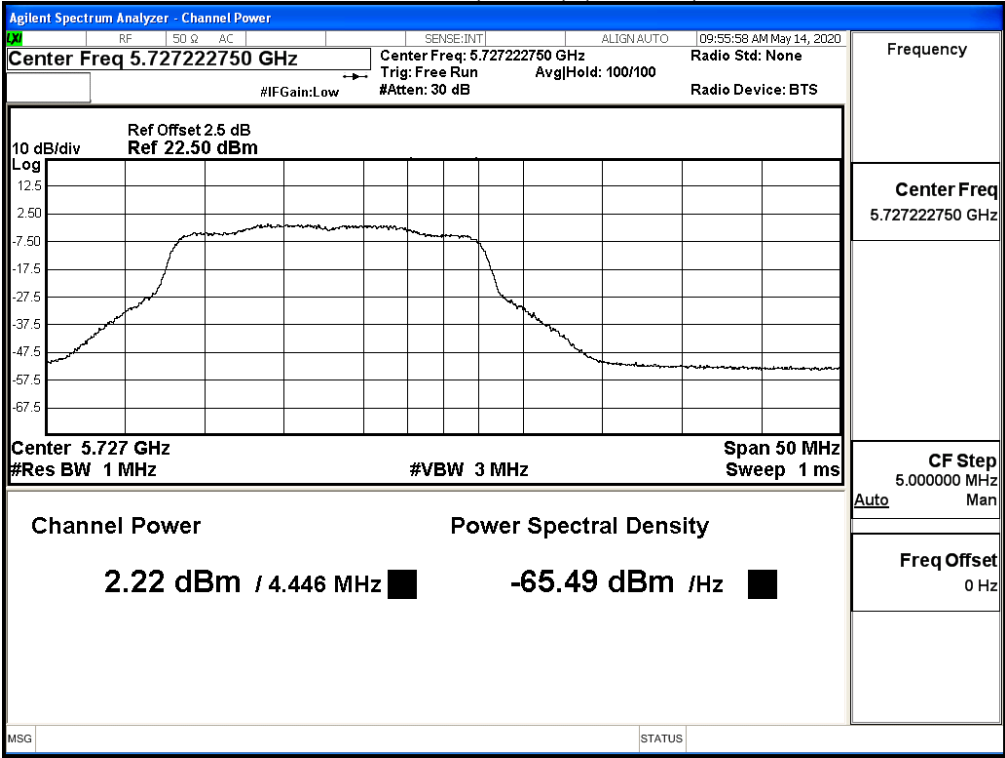


RU config: Other


26dB Occupied Bandwidth:
Channel 64 - 26/8 (Chain A)

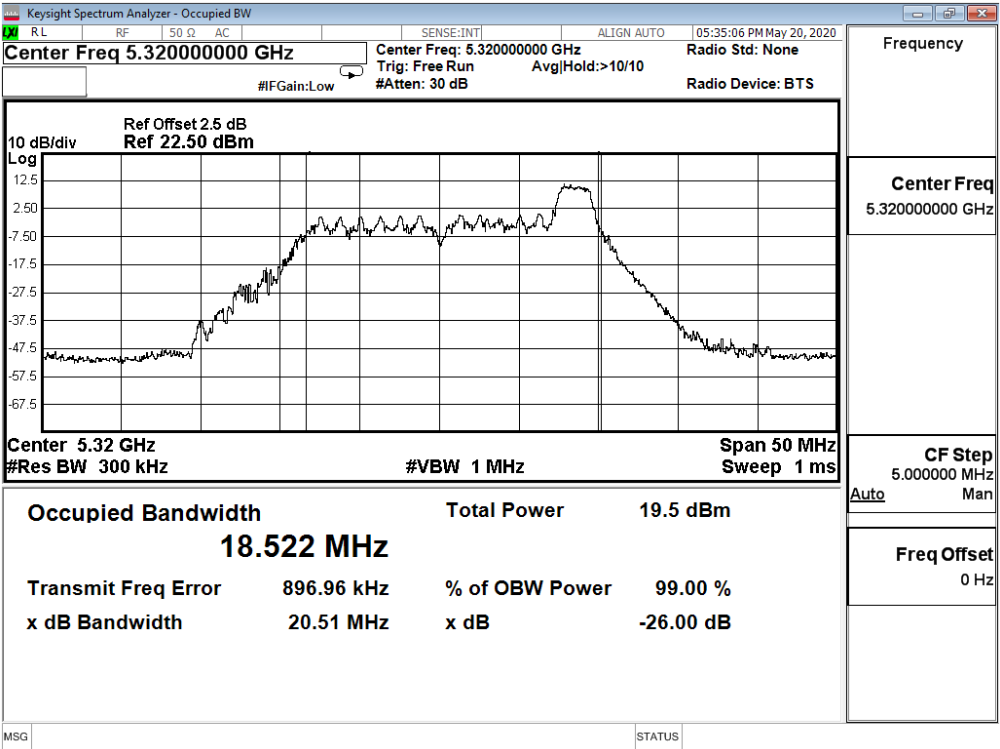


Channel 64 - 26/8 (Chain B)

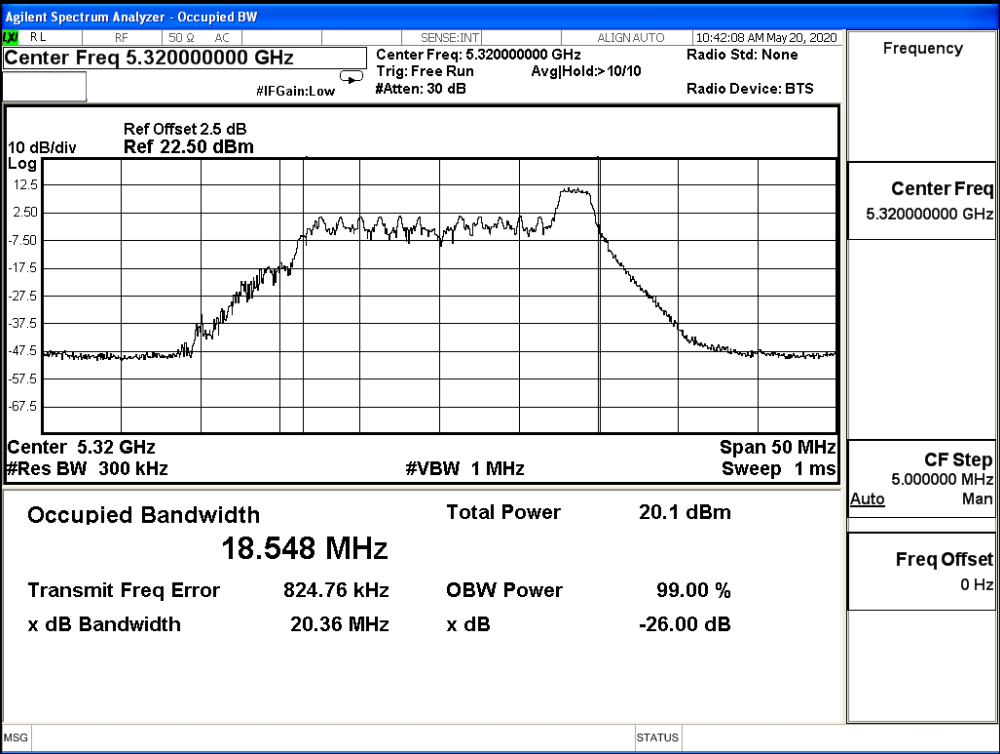


Channel 64 - 52/40 (Chain A)

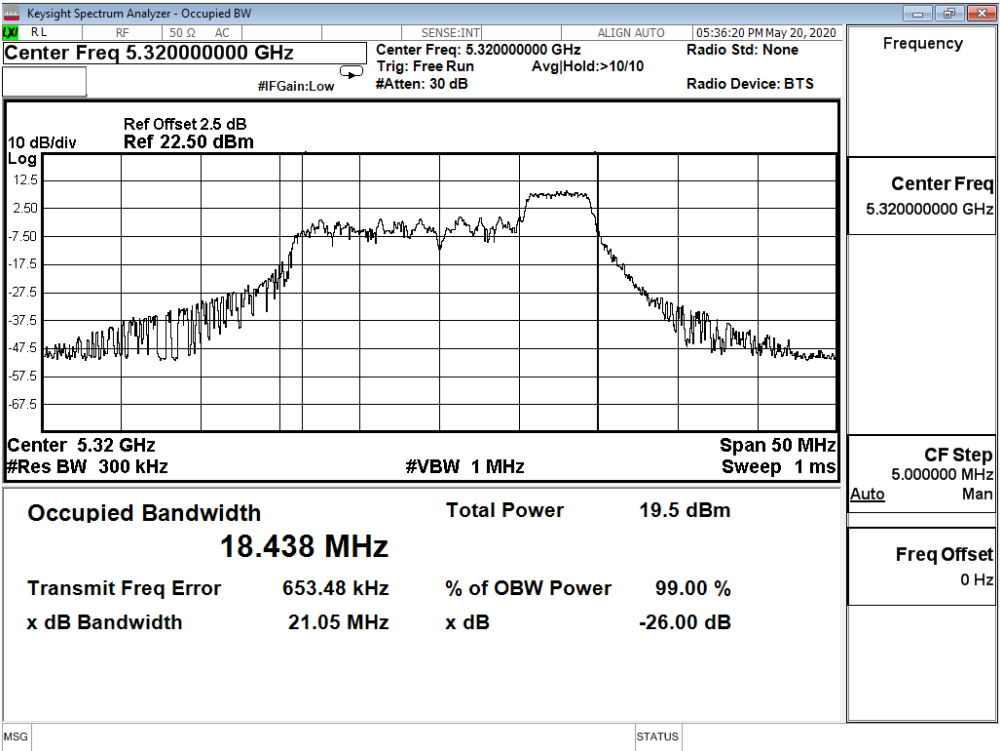


Channel 64 - 52/40 (Chain B)

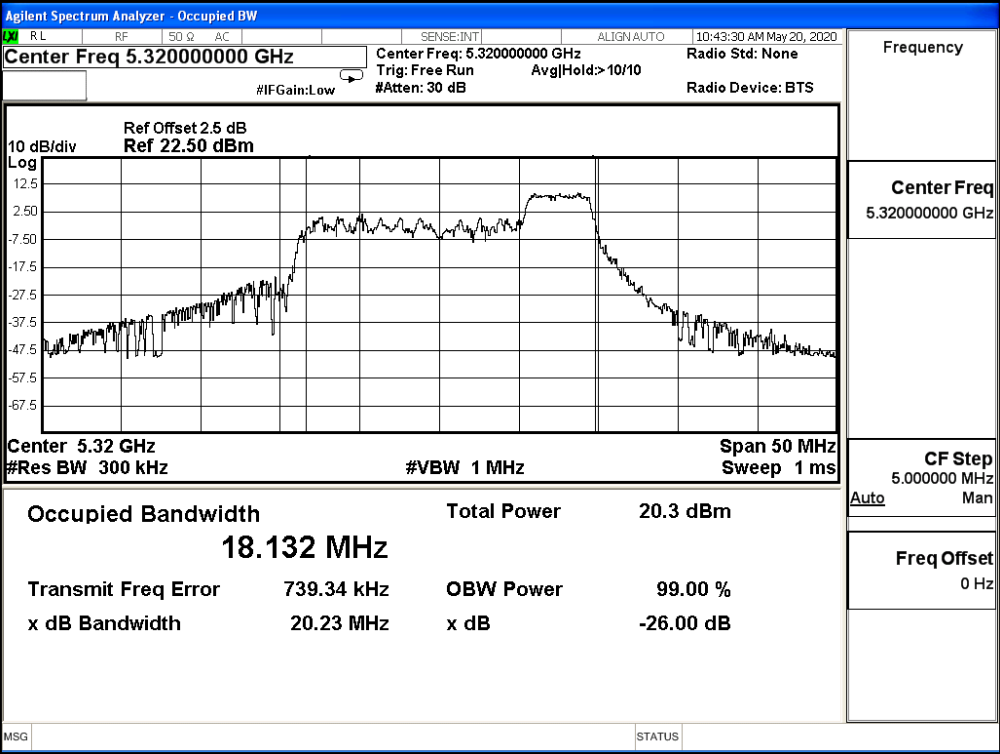


Channel 64 - 106/54 (Chain A)

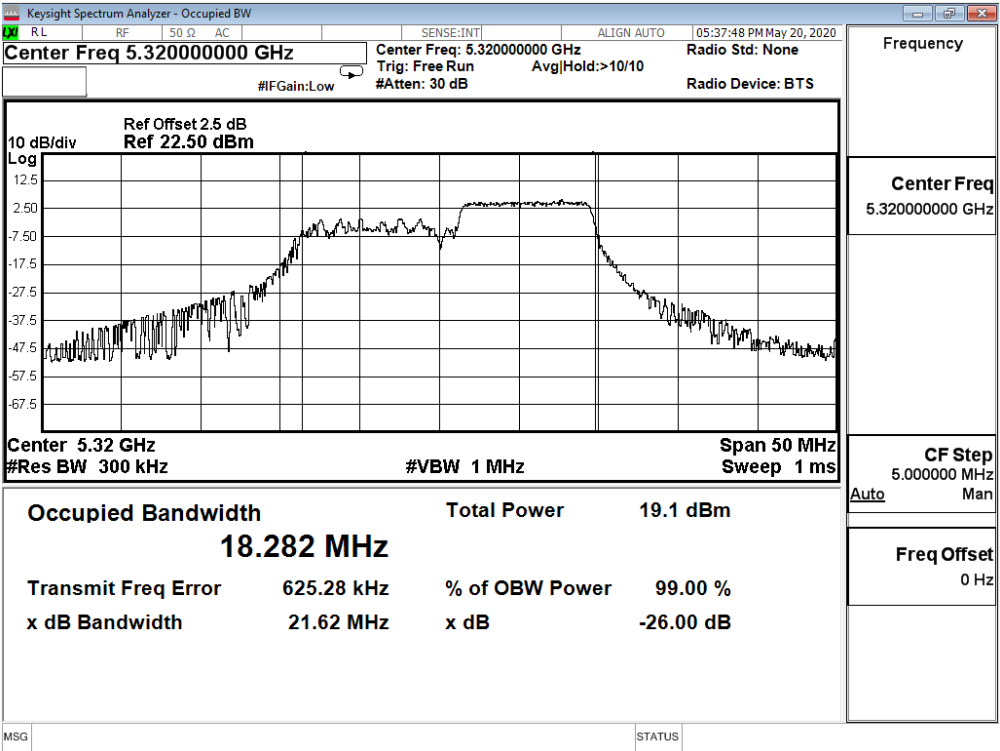


Channel 64 - 106/54 (Chain B)

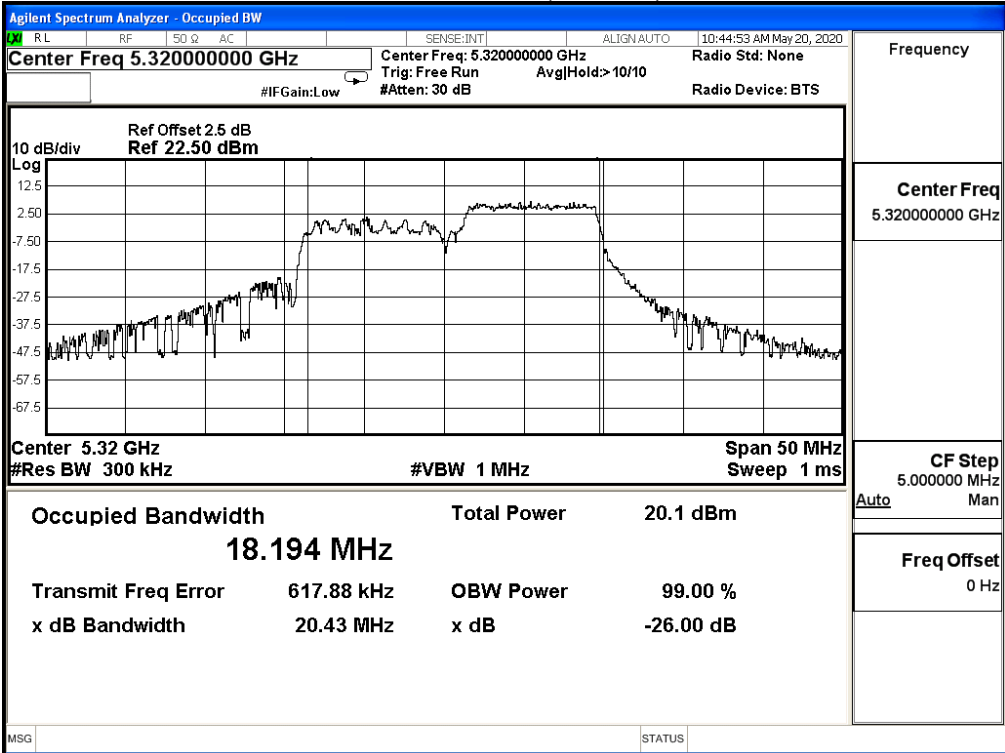


Channel 100 - 26/0 (Chain A)

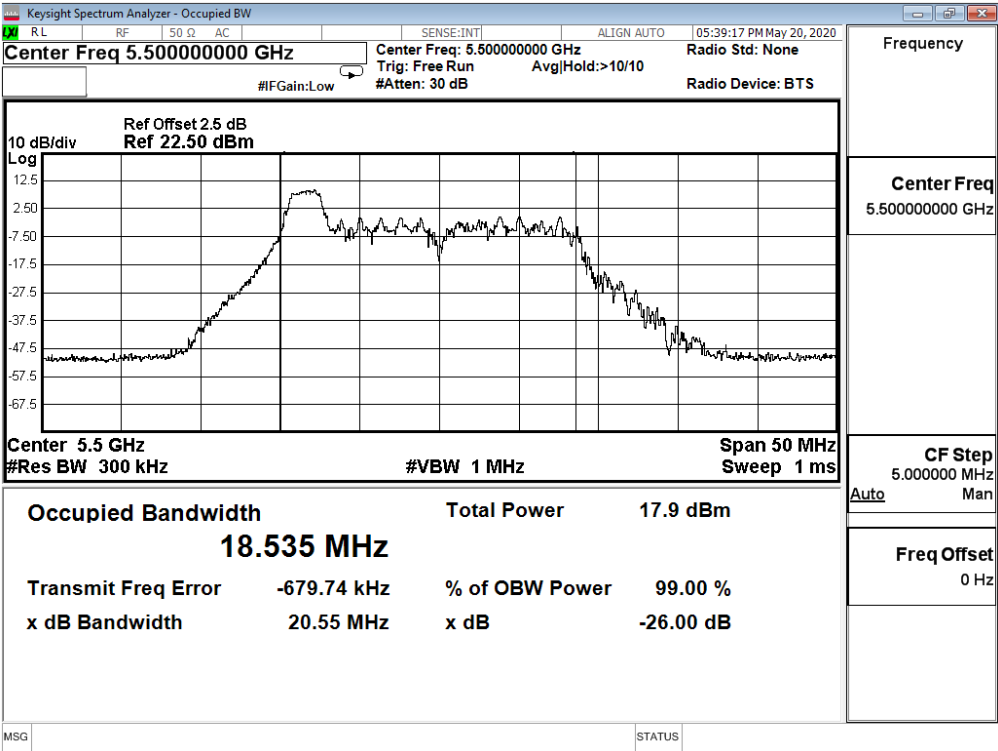


Channel 100 - 26/0 (Chain B)

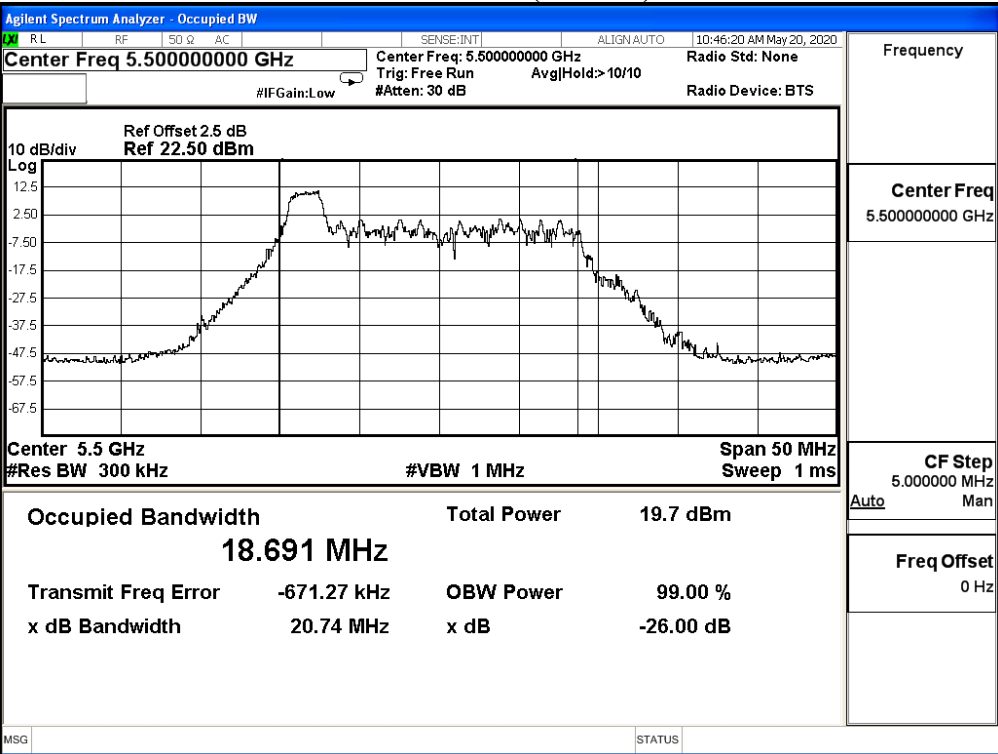


Channel 100 - 52/37 (Chain A)

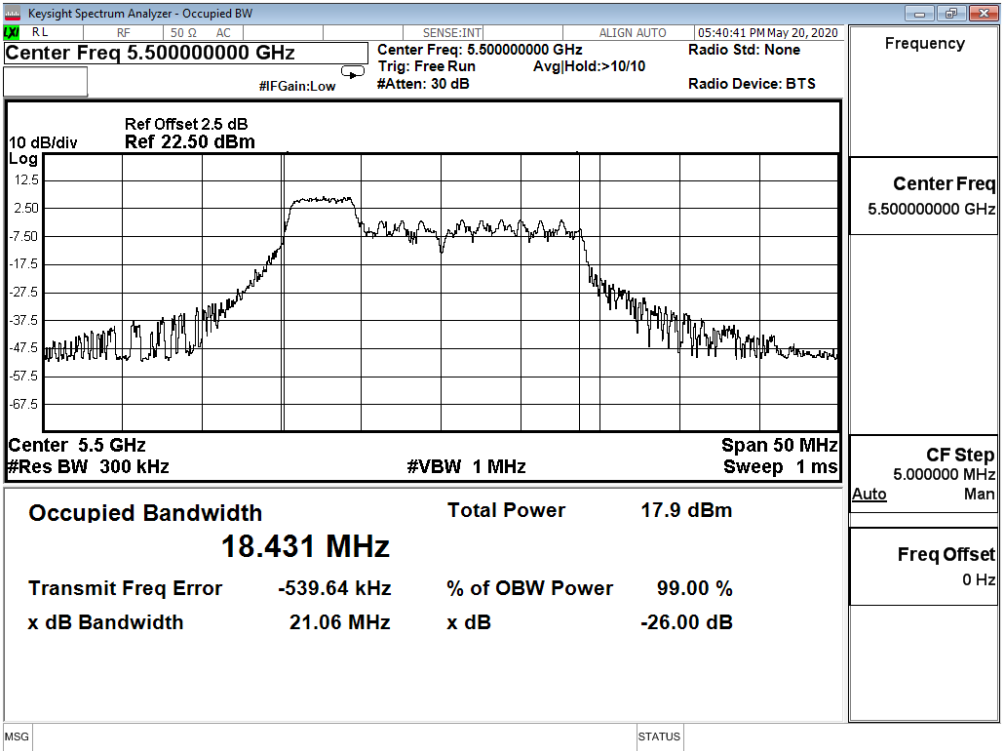


Channel 100 - 52/37 (Chain B)

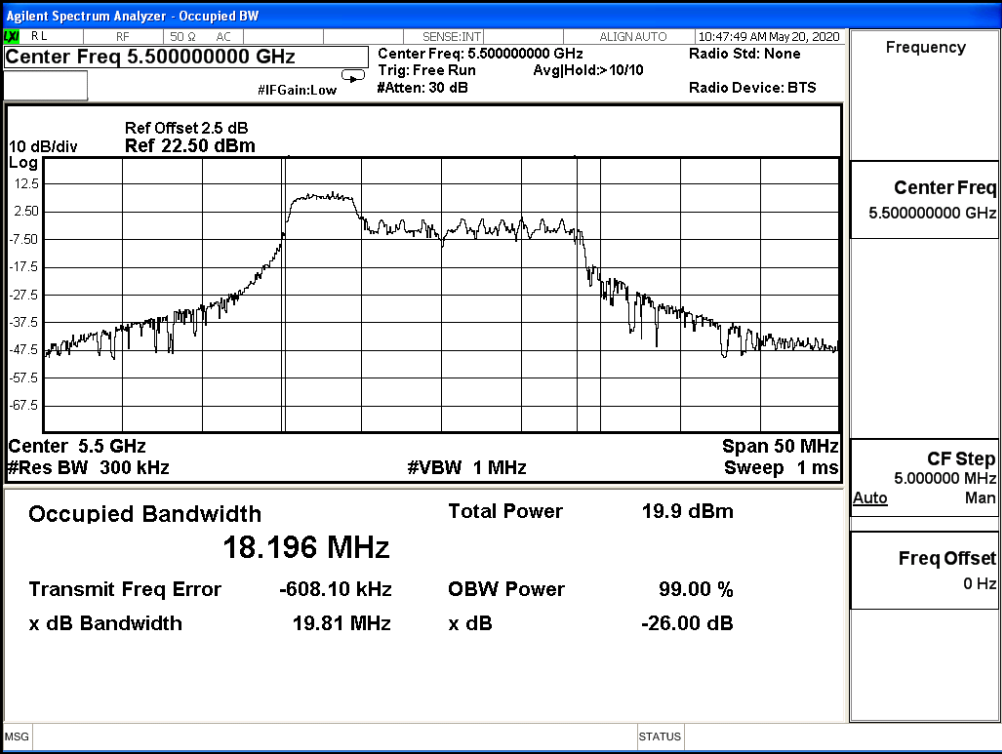


Channel 100 - 106/53 (Chain A)

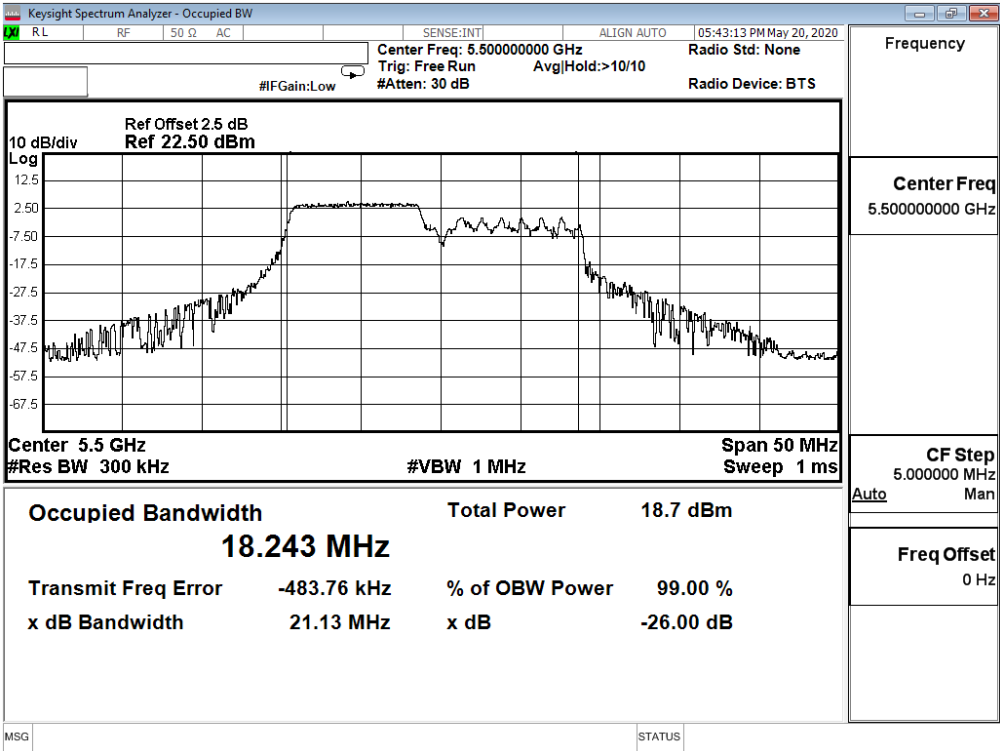


Channel 100 - 106/53 (Chain B)

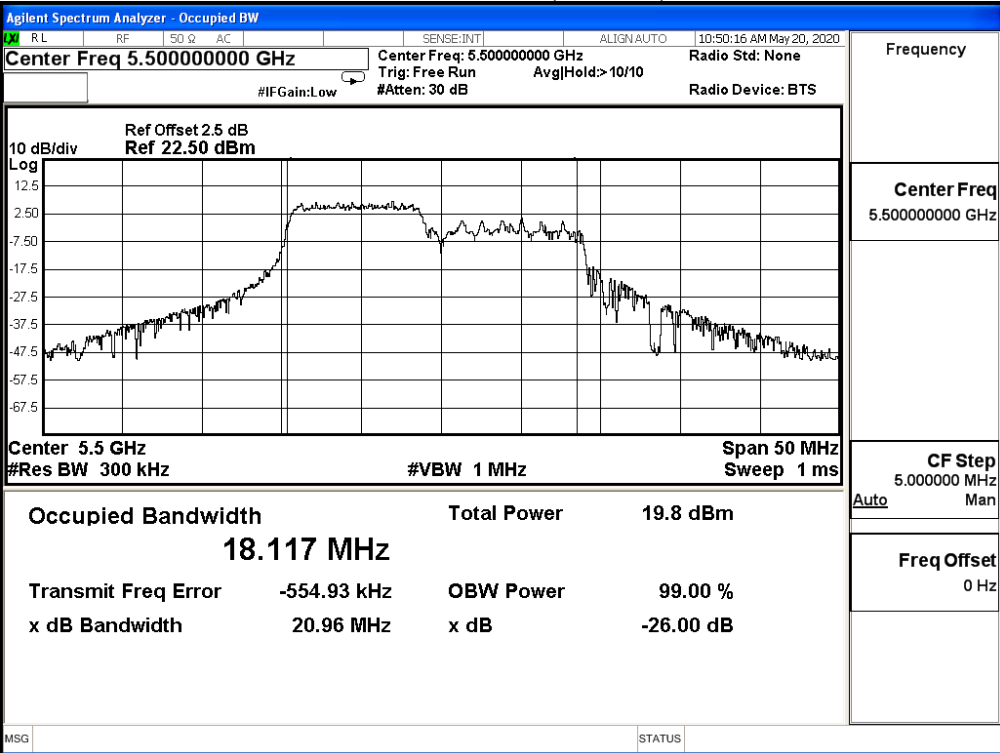


Channel 140 - 26/8 (Chain A)

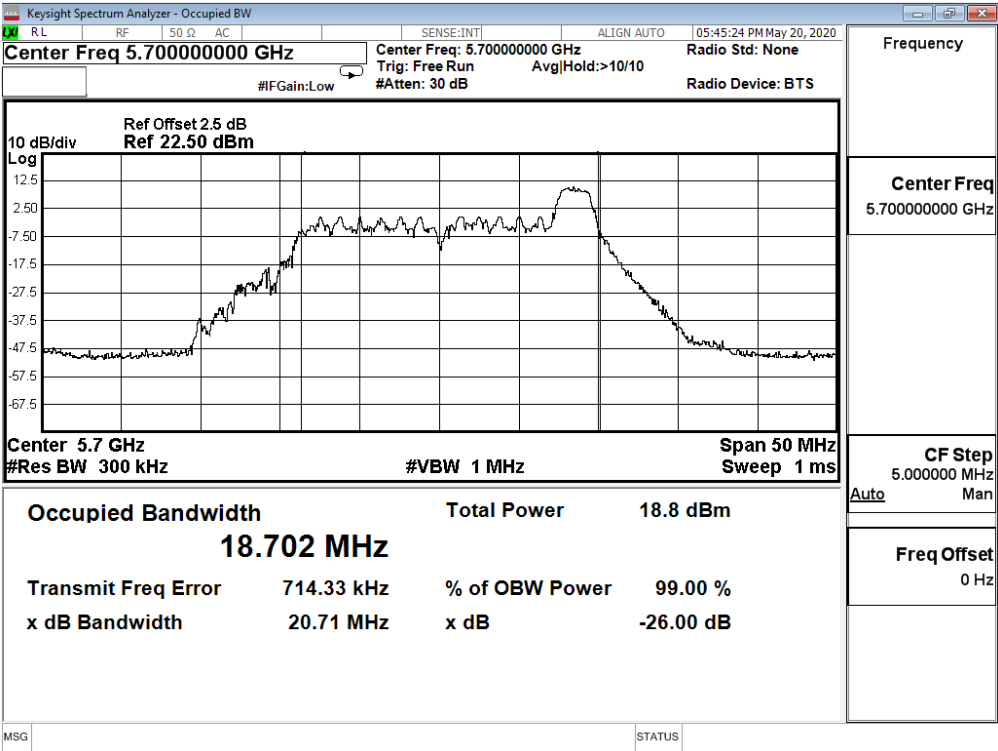


Channel 140 - 26/8 (Chain B)

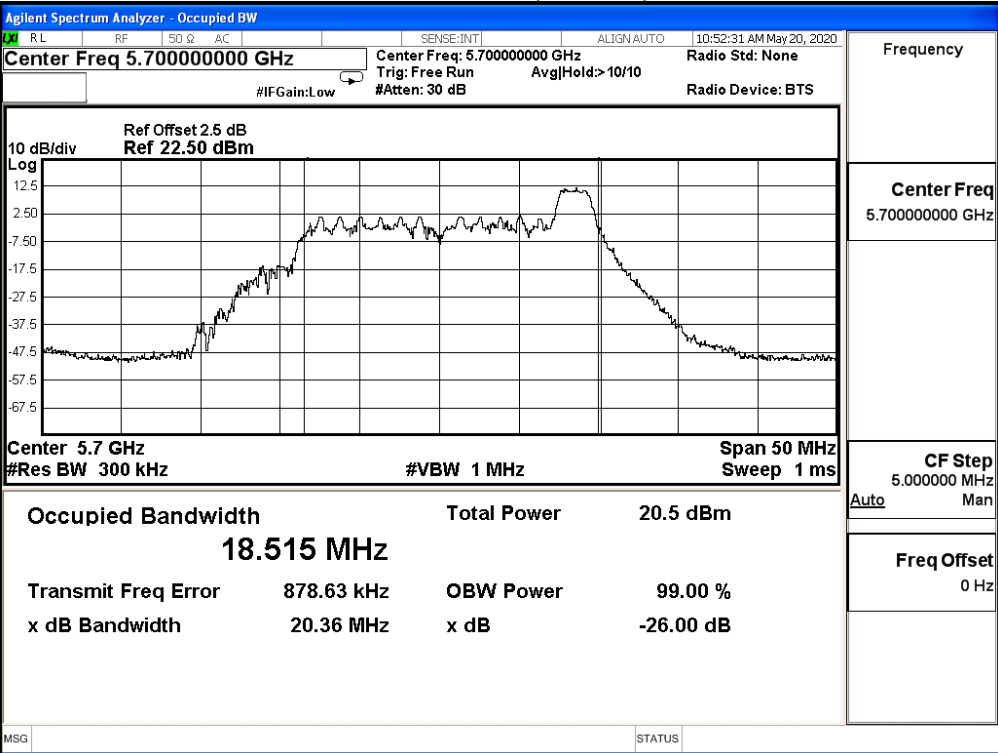


Channel 140 - 52/40 (Chain A)

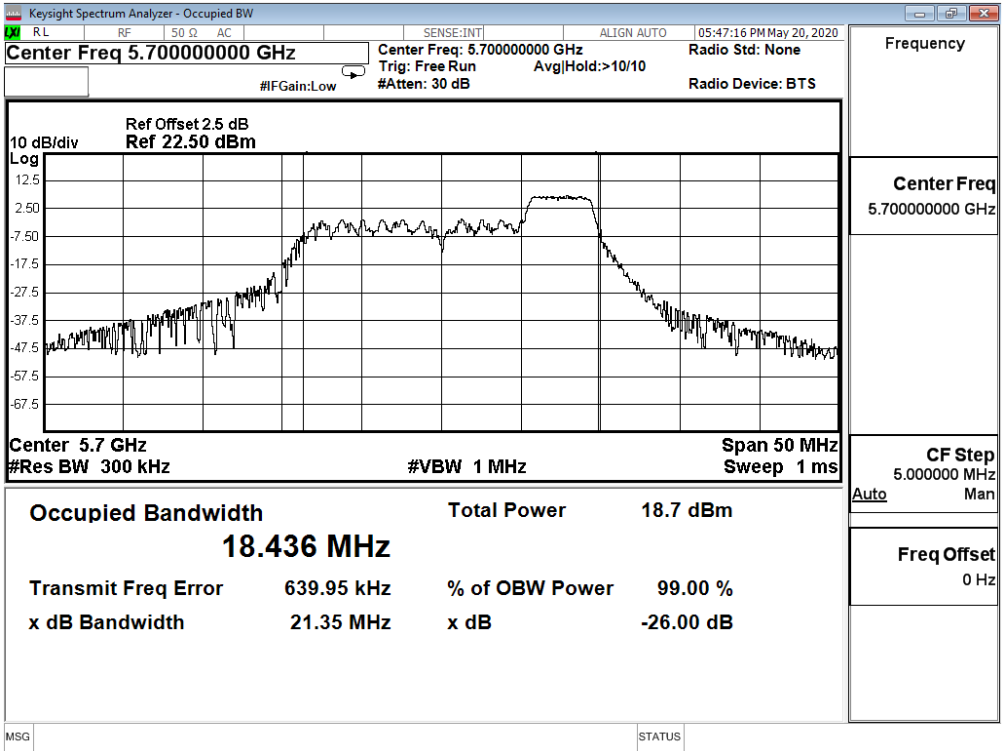


Channel 140 - 52/40 (Chain B)

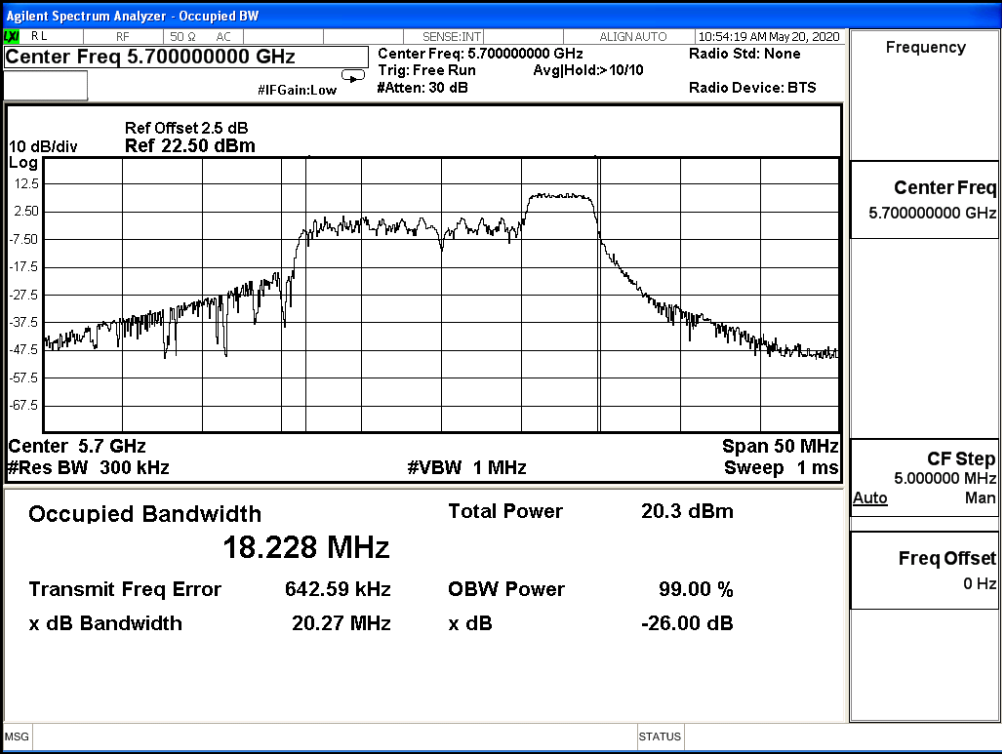

Channel 140 - 106/54 (Chain A)

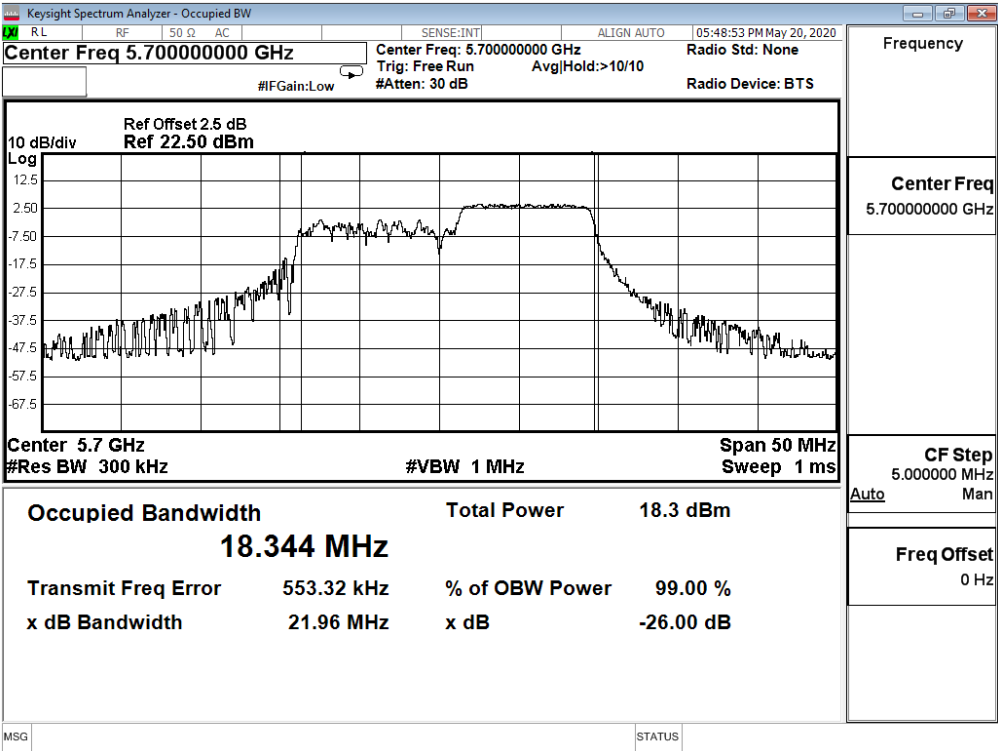

Channel 140 - 106/54 (Chain B)

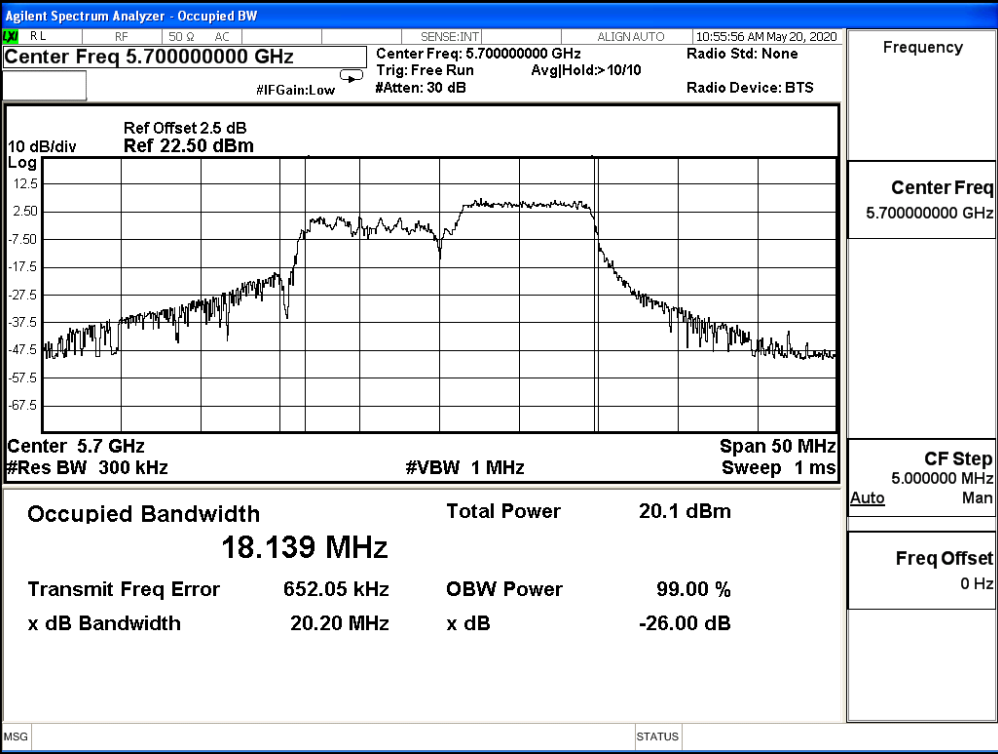

Product : Portable computer
 Test Item : Maximum conducted output power
 Test Date : 2020/05/18
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)

Chain A**RU config: Full**

Cable loss=2.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate (Mbps)											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
		Measurement Level (dBm)											
38	5190	10.41	--	--	--	--	--	--	--	--	--	--	--
46	5230	10.45	10.41	10.33	10.29	10.20	10.15	10.06	10.01	9.91	9.85	9.75	9.68
54	5270	10.46	--	--	--	--	--	--	--	--	--	--	--
62	5310	10.42	10.37	10.3	10.23	10.16	10.07	10.02	9.97	9.93	9.89	9.79	9.73
102	5510	10.4	--	--	--	--	--	--	--	--	--	--	--
110	5550	10.42	10.38	10.31	10.26	10.23	10.17	10.11	10.08	10.00	9.91	9.88	9.85
134	5670	10.49	--	--	--	--	--	--	--	--	--	--	--
142F(Band3)	5710	10.22	10.18	10.08	10	9.95	9.92	9.89	9.81	9.77	9.73	9.66	9.63
142F(Band4)	5710	-1.91	-2.01	-2.09	-2.18	-2.22	-2.26	-2.31	-2.37	-2.44	-2.54	-2.63	-2.7
151	5755	10.42	--	--	--	--	--	--	--	--	--	--	--
159	5795	10.4	10.36	10.31	10.23	10.20	10.11	10.03	9.96	9.89	9.84	9.74	9.70

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Chain B**RU config: Full**

Cable loss=2.5dB		Maximum conducted output power											
Channel No.	Frequency (MHz)	Data Rate (Mbps)											
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	MCS10	MCS11
		Measurement Level (dBm)											
38	5190	10.43	--	--	--	--	--	--	--	--	--	--	--
46	5230	10.44	10.4	10.36	10.26	10.18	10.14	10.11	10.06	10.03	9.94	9.88	9.79
54	5270	10.48	--	--	--	--	--	--	--	--	--	--	--
62	5310	10.43	10.37	10.28	10.22	10.17	10.14	10.04	10.00	9.92	9.88	9.85	9.82
102	5510	10.49	--	--	--	--	--	--	--	--	--	--	--
110	5550	10.44	10.38	10.29	10.24	10.16	10.11	10.01	9.98	9.94	9.86	9.79	9.71
134	5670	10.38	--	--	--	--	--	--	--	--	--	--	--
142F(Band3)	5710	10.17	10.13	10.08	10.03	9.99	9.91	9.83	9.79	9.76	9.69	9.66	9.58
142F(Band4)	5710	-2.5	-2.6	-2.67	-2.7	-2.76	-2.83	-2.86	-2.92	-3	-3.08	-3.18	-3.28
151	5755	10.47	--	--	--	--	--	--	--	--	--	--	--
159	5795	10.46	10.43	10.38	10.32	10.28	10.20	10.13	10.03	9.94	9.87	9.78	9.69

Note: Maximum conducted output power Value =Reading value on average power meter + cable loss

Maximum conducted output power Measurement:

Channel No	Frequency Range (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
38	5190	--	10.41	10.43	13.43	24	--	Pass
46	5230	--	10.45	10.44	13.46	24	--	Pass
54	5270	41.320	10.46	10.48	13.48	24	27.16	Pass
62	5310	41.620	10.42	10.43	13.44	24	27.19	Pass
102	5510	41.740	10.4	10.49	13.46	24	27.21	Pass
110	5550	41.460	10.42	10.44	13.44	24	27.18	Pass
134	5670	42.420	10.49	10.38	13.45	24	27.28	Pass
142F(Band3)	5710	35.600	10.22	10.17	13.21	24	26.51	Pass
142F(Band4)	5710	5.200	-1.91	-2.5	0.815	30	18.16	Pass
151	5755	--	10.42	10.47	13.46	30	--	Pass
159	5795	--	10.4	10.46	13.44	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+ Chain B Power (mW))
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Chain A**RU config: Other**

Channel No / Frequency (MHz)	RU setting	Average Power Output (dBm)													
		Data Rate (Mbps)												Required Limi	
		MCS0	--	--	--	--	--	--	--	--	--	--	--		
38 / 5190	242/61	10.45	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
62 / 5310	242/62	10.41	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
102 / 5510	242/61	10.48	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
134 / 5670	242/62	10.43	--	--	--	--	--	--	--	--	--	--	--	<24dBm	
151 / 5755	242/61	10.36	--	--	--	--	--	--	--	--	--	--	--	<24dBm	


Chain B**RU config: Other**

Channel No / Frequency (MHz)	RU setting	Average Power Output (dBm)												
		Data Rate (Mbps)												Required Limi
		MCS0	--	--	--	--	--	--	--	--	--	--	--	
38 / 5190	242/61	10.41	--	--	--	--	--	--	--	--	--	--	--	<24dBm
62 / 5310	242/62	10.35	--	--	--	--	--	--	--	--	--	--	--	<24dBm
102 / 5510	242/61	10.42	--	--	--	--	--	--	--	--	--	--	--	<24dBm
134 / 5670	242/62	10.46	--	--	--	--	--	--	--	--	--	--	--	<24dBm
151 / 5755	242/61	10.39	--	--	--	--	--	--	--	--	--	--	--	<24dBm


Maximum conducted output power Measurement:

Channel No / Frequency Range	RU setting	26dB Bandwidth	Chain A Power	Chain B Power	Output Power Limit	Output power limit		Result
		(MHz)	(dBm)	(dBm)	(dBm)	(dBm)	dBm+10log (BW)	
38 / 5190	242/61	--	10.45	10.41	13.44	24	--	Pass
62 / 5310	242/62	21.540	10.41	10.35	13.39	24	24.33	Pass
102 / 5510	242/61	21.670	10.48	10.42	13.46	24	24.36	Pass
134 / 5670	242/62	21.660	10.43	10.46	13.46	24	24.36	Pass
151 / 5755	242/61	--	10.36	10.39	13.39	30	--	Pass


RU config: Full
26dB Occupied Bandwidth:
Channel 54 (Chain A)

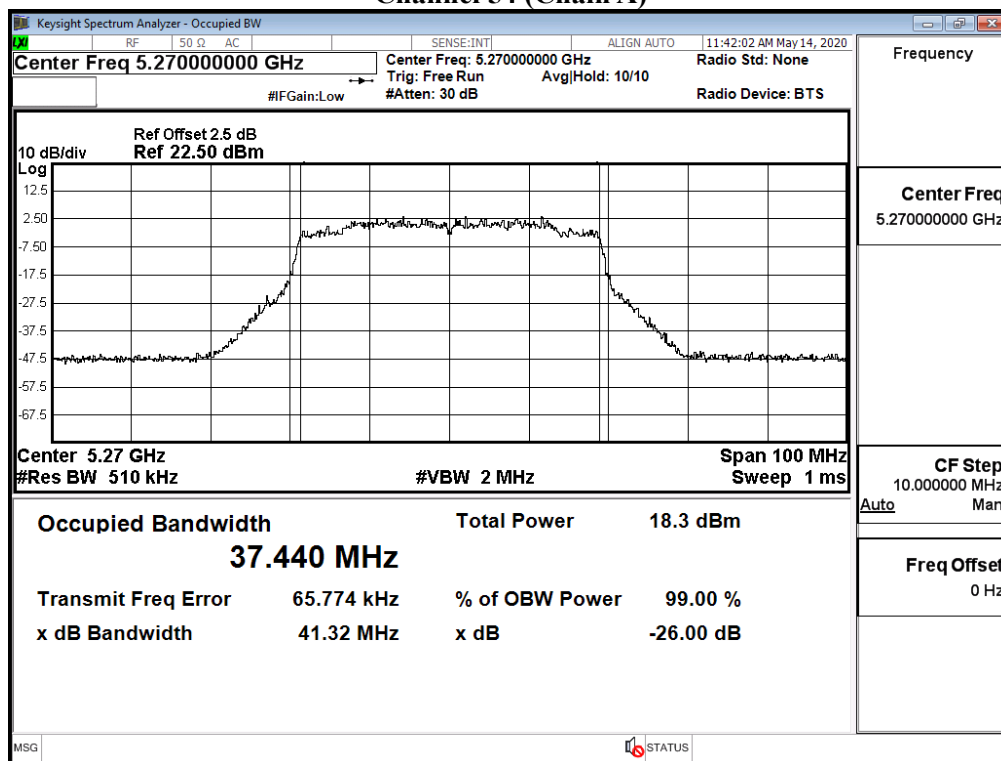


Channel 54 (Chain B)

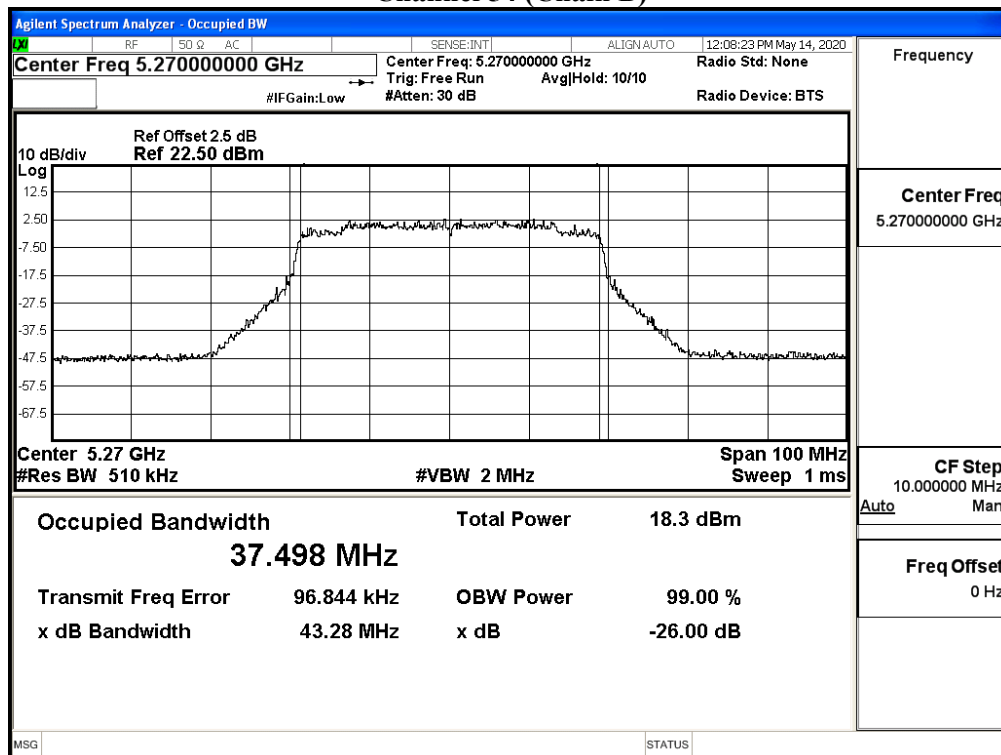


Channel 62 (Chain A)

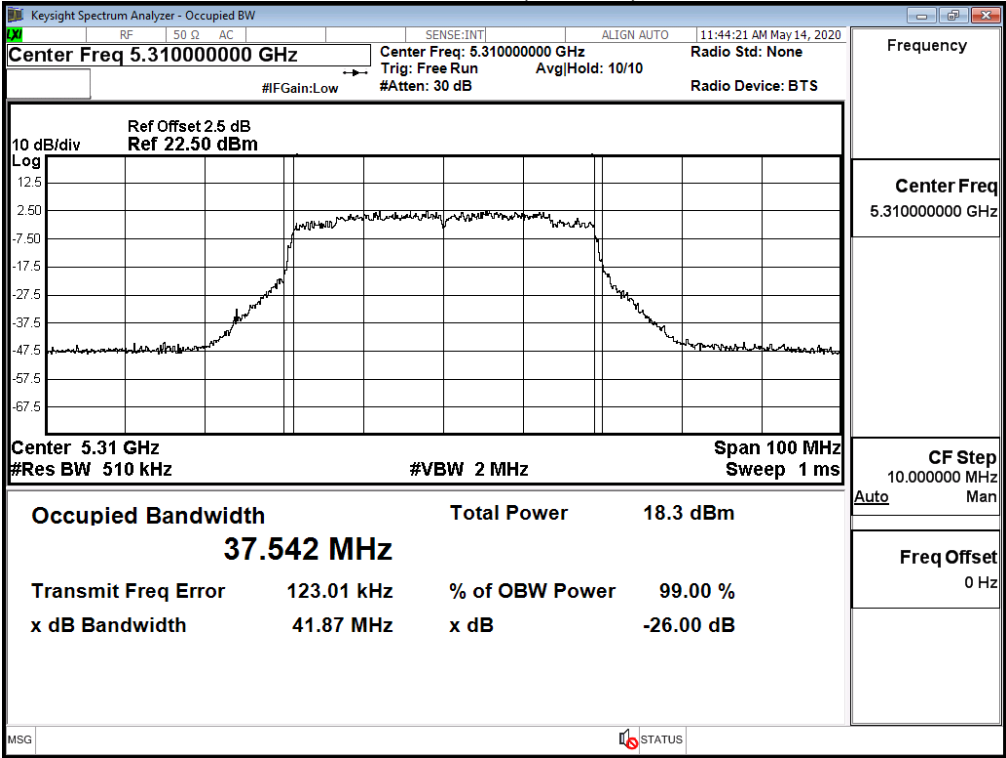


Channel 62 (Chain B)

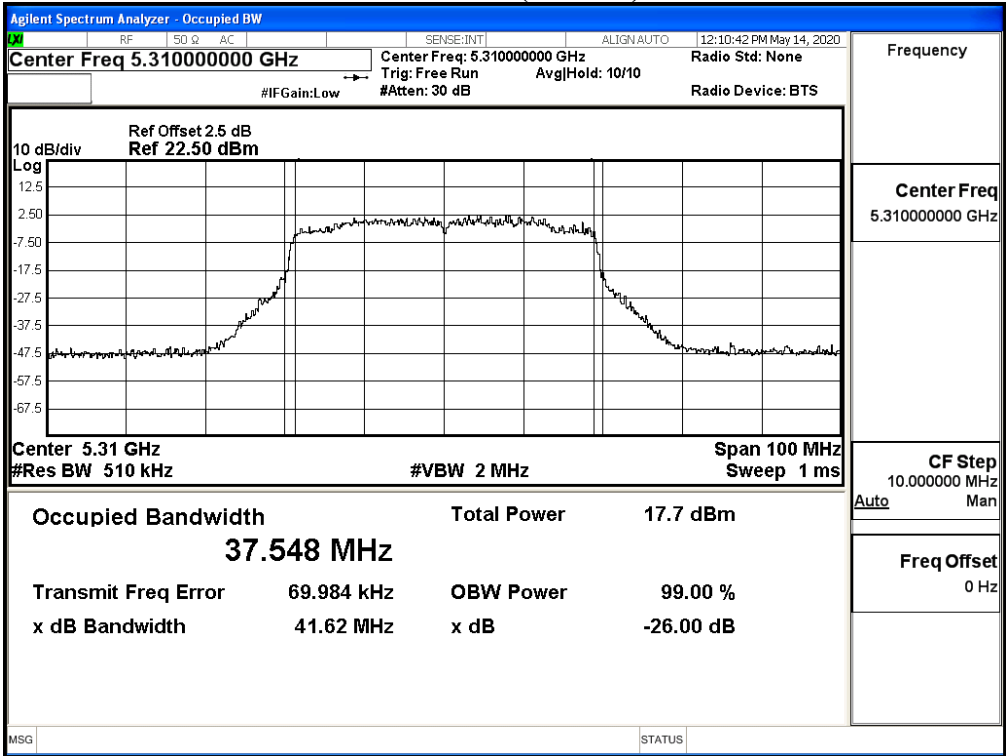


Channel 102 (Chain A)

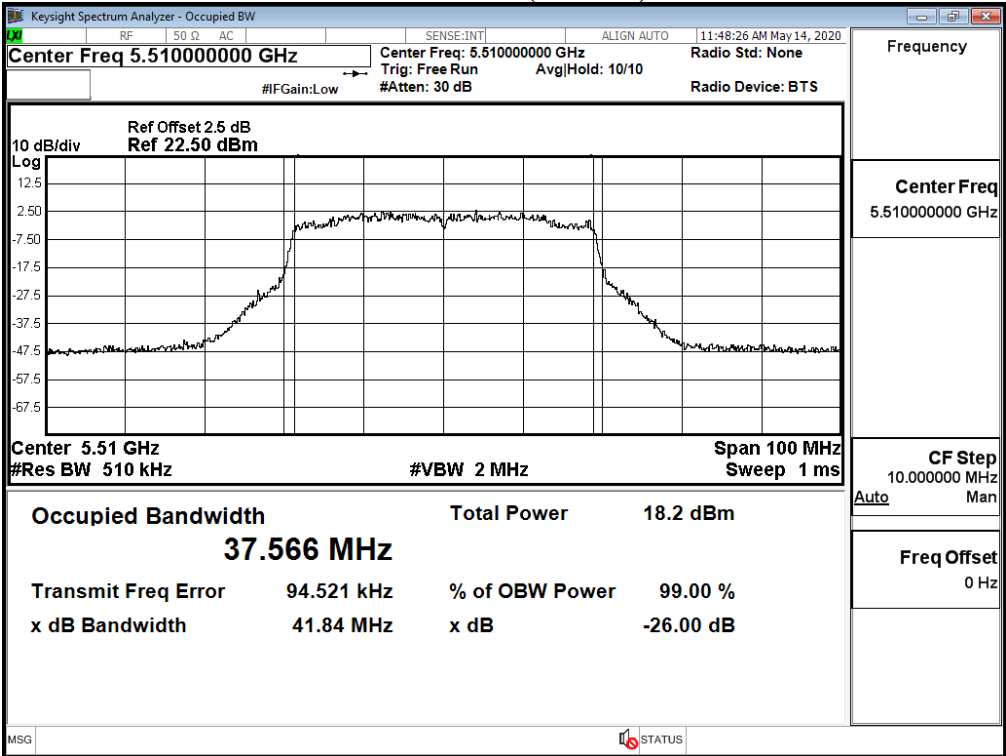


Channel 102 (Chain B)

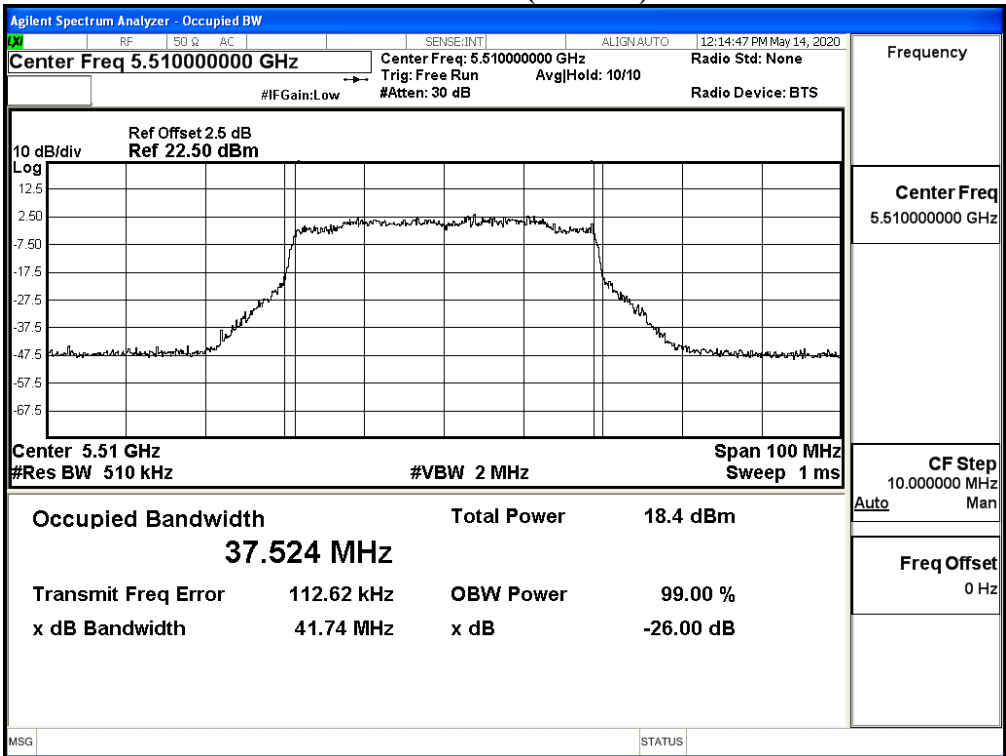


Channel 110 (Chain A)

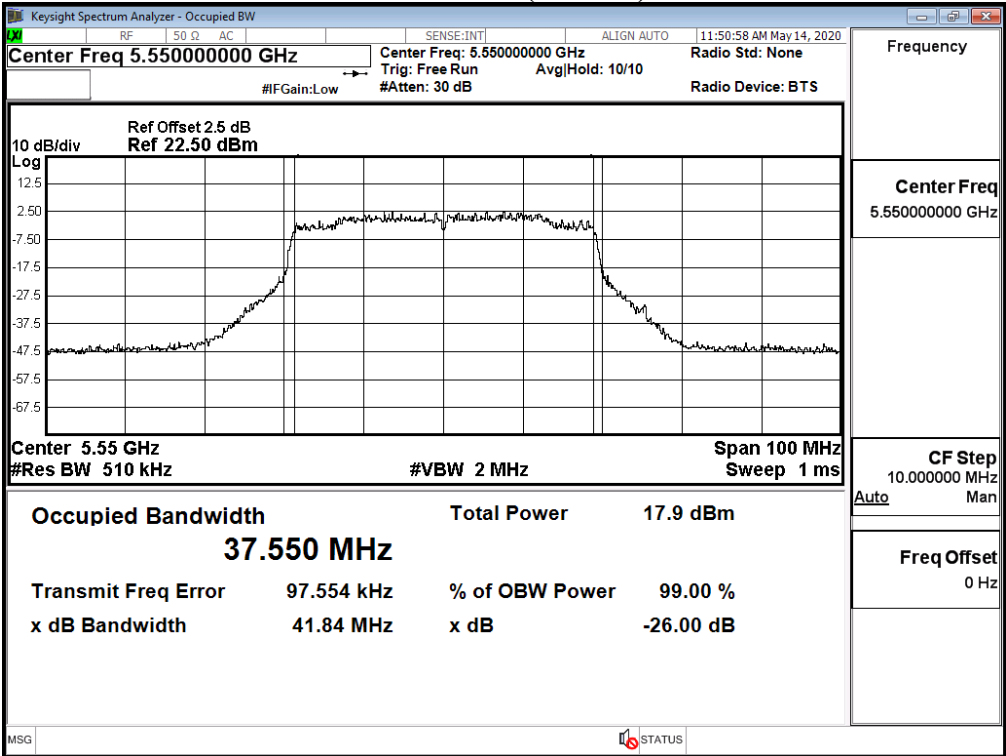


Channel 110 (Chain B)

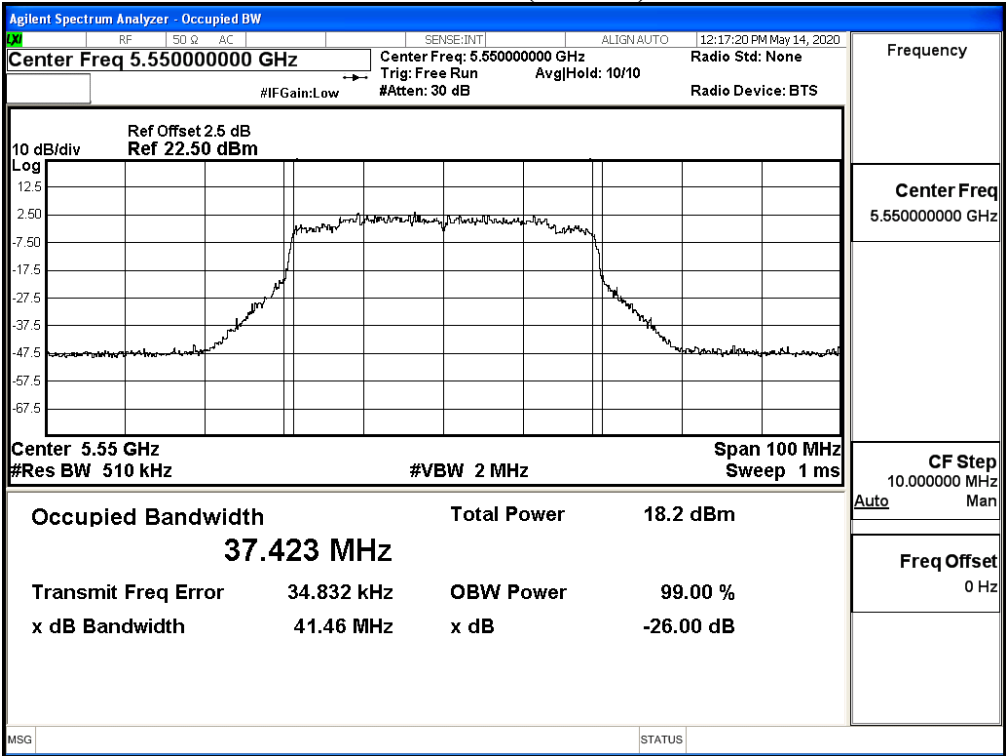


Channel 134 (Chain A)

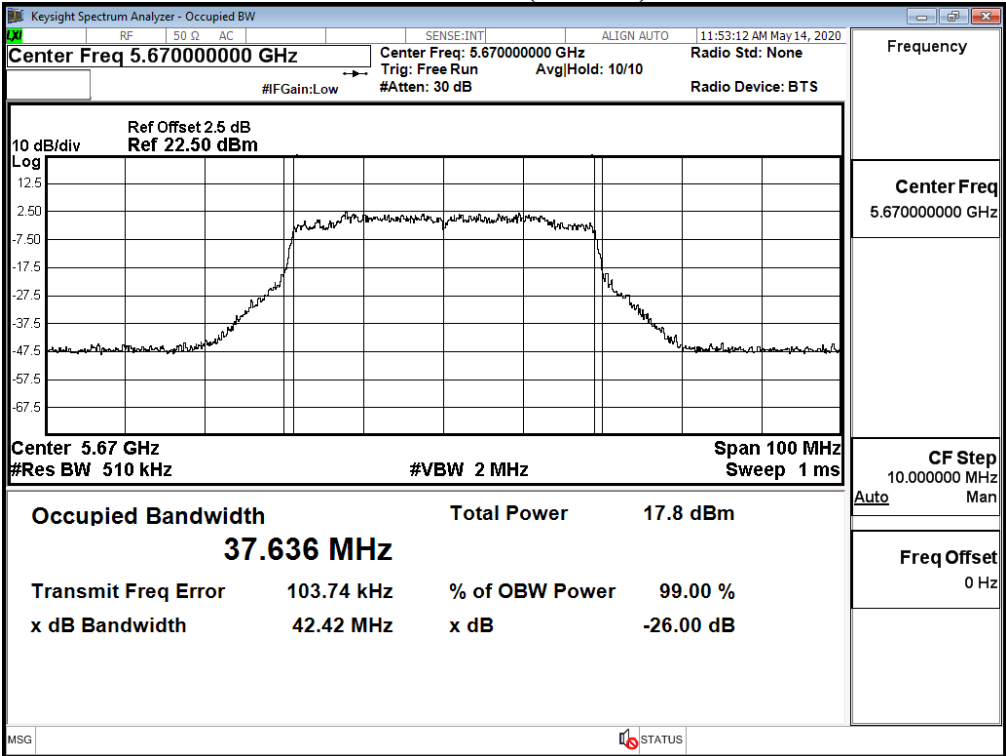

Channel 134 (Chain B)

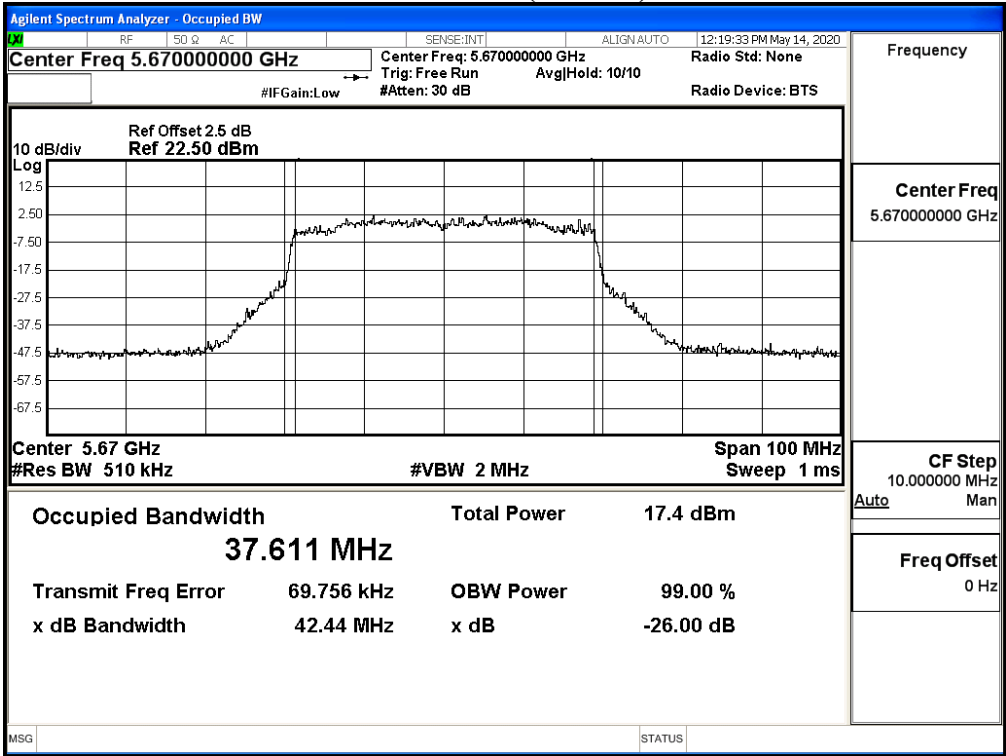

Channel 142 (Chain A)

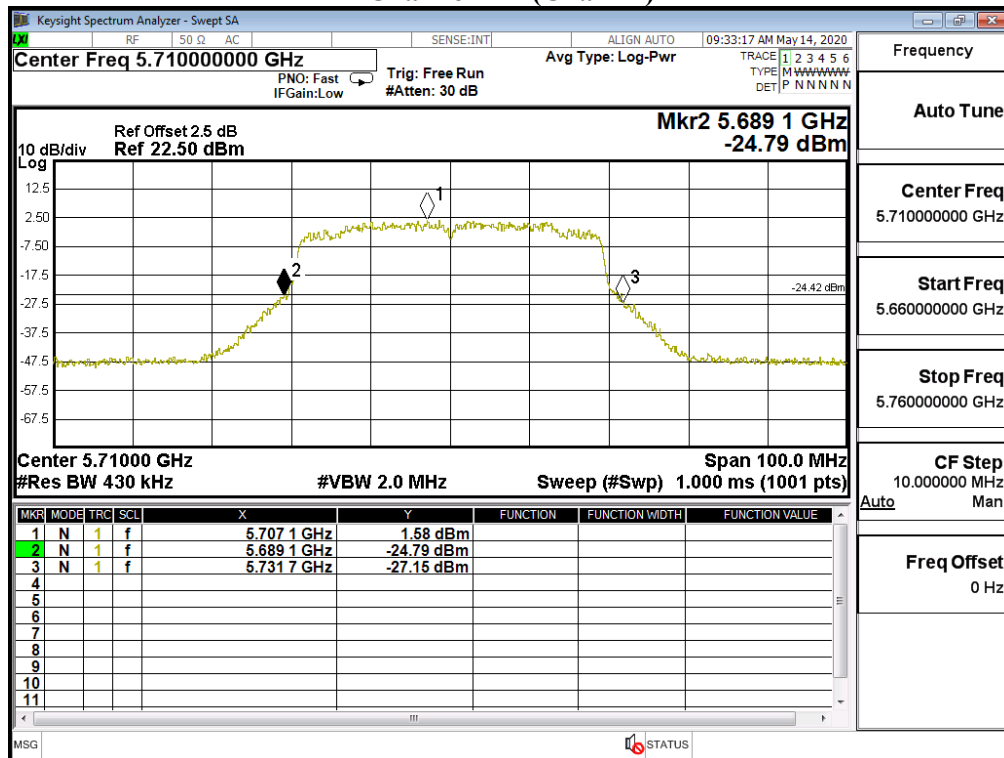

Channel 142 (Chain B)

