

**Class II Permissive Change  
TEST REPORT**

For

**802.11b MiniPCI Type 3A Wireless Module  
Model Number: WM3A2100**

*MEASUREMENTS PERFORMED IN ACCORDANCE WITH THE  
FOLLOWING EMISSIONS STANDARD*

**47 CFR Part 15, Subpart C (Section 15.247)**

Test Method:

ANSI C63.4: 1992 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



CERTIFICATE NUMBER: 1111.01

To view a copy of the Scope of Accreditation visit [www.A2LA2.net](http://www.A2LA2.net)

**PREPARED FOR:**

Dell Computer Corporation  
One Dell Way  
Round Rock, TX 78682

Contact(s): Jason Limoges

**PREPARED BY:**

Aegis Labs, Inc.  
22431 Antonio Parkway B160-417  
Rancho S. Margarita, CA 92688

Agent(s): Mr. Steve Kuiper  
Mr. Rick Candelas

**Test Report #:** **INTEL-030328F**  
**Test Date:** March 28-April 3, 2003

	REPORT BODY	APPENDICES	TOTAL
		<i>I</i>	
PAGES	19	47	<b>66</b>

The contents of this report shall not be reproduced except in full, without the written approval of Aegis Labs, Inc.

**AEGIS LABS, INC 22431 Antonio Parkway B160-417, Rancho Santa Margarita, CA 92688  
949-459-7886 TEL 949-459-7869 FAX [www.aegislabsinc.com](http://www.aegislabsinc.com)**

*Page 1 of 19  
Report Number: INTEL-030328F  
FCC ID: E2K24CLNS*

**TABLE OF CONTENTS**

SECTION	TITLE	PAGE
	<b>COVER SHEET.....</b>	<b>01</b>
	<b>TABLE OF CONTENTS.....</b>	<b>02</b>
<b>1.0</b>	<b>CERTIFICATION OF TEST DATA.....</b>	<b>03</b>
<b>2.0</b>	<b>ADMINISTRATIVE DATA AND TEST DESCRIPTION.....</b>	<b>04</b>
<b>3.0</b>	<b>DESCRIPTION OF EUT CONFIGURATION.....</b>	<b>05</b>
3.1	EUT Description.....	05
3.1.1	Channel Number and Frequencies.....	06
3.2	EUT Configuration.....	07
3.3	EUT and Sub-Assemblies List.....	08
3.4	Accessory / Host Equipment List.....	08
3.5	Cabling Diagram and Description.....	09
<b>4.0</b>	<b>TEST EQUIPMENT SETTINGS AND TEST SETUPS.....</b>	<b>10</b>
4.1	Conducted Emissions At AC Mains Port.....	10
4.1.1	Conducted Emissions At AC Mains Port – Test Setup.....	11
4.2	Spurious Radiated Emissions.....	12
4.2.1	Spurious Radiated Emissions – Test Setup.....	13
4.3	Maximum Peak Output Power Measurement.....	14
4.3.1	Maximum Peak Output Power Measurement– Test Setup.....	14
4.4	Occupied Bandwidth Measurement.....	15
4.4.1	Occupied Bandwidth Measurement– Test Setup.....	15
4.5	Spectral Power Density Measurement.....	16
4.5.1	Spectral Power Density Measurement– Test Setup.....	16
4.6	Spurious Emissions Measurement At The Antenna Terminal.....	17
4.6.1	Spurious Emissions Measurement At The Antenna Terminal– Test Setup.....	17
4.7	Band Edge Measurement At The Antenna Terminal.....	18
4.7.1	Band Edge Measurement At The Antenna Terminal– Test Setup.....	18
<b>5.0</b>	<b>MODIFICATIONS AND RECOMMENDATIOS.....</b>	<b>19</b>
<b>APPENDICES</b>		
<b>I</b>	Data Sheets	

## 1.0 CERTIFICATION OF TEST DATA

Aegis Labs, Inc. operates as both a Nevada and California Corporation with no organizational or financial relationship with any company, institution, or private individual.

Testing and engineering functions provided by Aegis Labs are furnished through the use of part-time, full-time or consulting engineers with the appropriate qualifications to carry out their duties. The intended purpose of this test report is to describe the measurement procedure and to determine whether the equipment under test "EUT" complies with both the conducted and radiated limits. Limits for emissions testing are described under 47 CFR Part 15, Subpart C (Section 15.247).

The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the Equipment Under Test (EUT) under the requirements specified in the emissions standard as described below. The test results contained in this report are only representative of the test sample tested as described in Section 2.0 of this report.

The test results provided within this report, indicate that the information technology equipment has been found to be in **COMPLIANCE** with the test specifications based upon the following RF compliance standards:

Pass/Fail determination is based upon the nominal values of the test data.

EMISSIONS STANDARDS	DESCRIPTION	TEST RESULTS
FCC 47 CFR, Part 15.207	Conducted Emissions At AC Mains Port	PASSED
CISPR22 Class B Limits	Radiated Emissions (30-1000 MHz)	PASSED
FCC 47 CFR, Part 15.247(c), 15.209	Radiated Emissions (1-26.5 GHz)	PASSED
FCC 47 CFR, Part 15.247(a)(2)	Occupied Bandwidth Measurement	PASSED
FCC 47 CFR, Part 15.247(b)	Maximum Peak Output Power Measurement	PASSED
FCC 47 CFR, Part 15.247(d)	Spectral Power Density Measurement	PASSED
FCC 47 CFR, Part 15.247(c)	Spurious Emissions Measurement At The Antenna Terminal	PASSED
FCC 47 CFR, Part 15.247(c)	Band Edge Measurement At The Antenna Terminal	PASSED

Prepared By:



04/10/03

Rick Candelas  
Staff Engineer  
Aegis Labs, Inc.

Date:

Report Approved By:



04/10/03

Steve J. Kuiper  
Q/A Manager  
Aegis Labs, Inc.

Date:

**2.0 ADMINISTRATIVE DATA AND TEST DESCRIPTION**

**DEVICE TESTED:** Trade Name: 802.11b MiniPCI Type 3A Wireless Module  
Model Number: WM3A2100  
Serial Number: 000423468079  
FCC ID: E2K24CLNS

**TEST DATE(S):** March 28-April 3, 2003  
**DATE EUT RECEIVED:** March 28, 2003

**ORIGIN OF TEST**  
**SAMPLE(S):** Production

**RESPONSIBLE PARTY:** Dell Computer Corporation  
One Dell Way  
Round Rock, TX 78682

**CLIENT CONTACT:** Mr. Jason Limoges  
**MANUFACTURER:** Dell Computer Corporation

**TEST LOCATION:** Aegis Labs, Inc.  
32231 Trabuco Creek Road  
Trabuco Canyon, CA 92678  
Conducted Site #2  
Radiated Site #2

**A2LA CERTIFICATE:** 1111.01, Valid until February 28, 2004

**PURPOSE OF TEST:** To demonstrate compliance with the relevant standards described in Section 1.0 of this report.

**TEST(S) PERFORMED:** Refer to Table in Section 1 of this report.

All calibration vendors were responsible for certifying Aegis Labs, Inc. test equipment as per the manufacturer's specifications and that the equipment is calibrated using instruments and standards where the accuracy is traceable to the National Institute of Standards and Technology (NIST). Calibration of all test equipment conforms to ANSI/NCSL Z540-1 and ISO 10012-1 and/or ISO/IEC Guide 17025 compliance (Additionally, other pertinent test equipment will carry MIL-STD-45662A). All calibration documents are on file with Aegis Labs, Inc., with copies provided upon request.

### **3.0 DESCRIPTION OF EUT**

#### **3.1 EUT Description**

<b>Equipment Under Test (EUT)</b>	
<b>Trade Name:</b>	802.11b MiniPCI Type 3A Wireless Module
<b>Model Number:</b>	WM3A2100
<b>Frequency Range:</b>	2.412 – 2.462 GHz
<b>Type of Transmission:</b>	Direct Sequence Spread Spectrum
<b>Transfer Rate:</b>	1/2/5.5/11 Mbps
<b>Number of Channels:</b>	11
<b>Modulation Type:</b>	DBPSK, DQPSK, CCK
<b>Antenna Type:</b>	Wistron NeWeb Corp. Triple-Band PIFA Antenna Type
<b>Antenna Gain (See Note 2):</b>	Main = 2.59dBi (gain) –1.13dB (loss) = 1.46dBi Auxiliary = 0.82dBi (gain) – 1.29dB (loss) = -0.47dBi
<b>Transmit Output Power:</b>	16 dBm (Typical) Please see Appendix I (Data Sheets) for actual output power.
<b>Power Supply:</b>	3.3VDC from computer MPCI slot.
<b>Number of External Test Ports Exercised:</b>	2 Antenna Ports (1 Main & 1 Auxiliary)

The 802.11b MiniPCI Type 3A Wireless Module is an embedded 2.4 GHz Wireless Local Area Network Mini-PCI adapter. The Mini-PCI Type 3A form factor is designed for notebook computer systems where overall thickness must be kept to an absolute minimum. It is capable of a data rate of up to 11 Mbps at 2.4 GHz. Please refer to Section 3.2 of this report for a further description of the configuration tested.

**NOTE 1:** For a more detailed description, please refer to the manufacturer's specifications or User's Manual.

**NOTE 2:** Refer to the antenna specifications for a further description of the antennas.

### 3.1.1 Channel Number and Frequencies

Eleven channels are provided for the EUT.

Channel	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

### 3.2 EUT Configuration

The EUT was set-up according to the ANSI C63.4: 1992 guidelines for emissions testing. For emissions testing the EUT (802.11b MiniPCI Type 3A Wireless Module, Model Number: WM3A2100) had a loaded antenna connected to both its main and auxiliary ports. All the appropriate test ports were exercised during both the pre-qualification and final evaluation scans.

The EUT was tested connected to a set of Winstron NeWeb Corporation PIFA type antennas via its main and auxiliary Hirose U.FL-R-SMT antenna ports installed in the Mini-PCI slot of the Dell Computer Corporation host laptop computer. Data can be found in Appendix I.

The Dell Computer Corporation host laptop computer was connected to a Canon printer and NEC monitor via its parallel and video ports respectively.

The low (channel 1), middle (channel 6), and high (channel 11) were tested. The EUT was transmitting and receiving on a continuous basis.

The final data was taken in this mode of operation. The external cables were bundled and routed as shown in the photographs in Appendix I (Data Sheets).

### 3.3 EUT and Sub-Assemblies List


<b>EUT and Sub-Assemblies List</b>			
<b>Manufacturer</b>	<b>Equipment Name</b>	<b>Model Number</b>	<b>Serial Number</b>
Intel Corporation	802.11b MiniPCI Type 3A Wireless Module	WM3A2100	000423468079
<b>Sub-Assemblies</b>			
Wistron NeWeb Corporation	Main Antenna (Metal PIFA)	CAB-A	None
Wistron NeWeb Corporation	Auxiliary Antenna (Metal PIFA)	CAB-A	None

### 3.4 Accessory / Host Equipment List

<b>Accessory / Host Equipment List</b>			
<b>Manufacturer</b>	<b>Equipment Name</b>	<b>Model Number</b>	<b>Serial Number</b>
Latitude D400 Laptop	Dell	PPT Chassis	8142Y010093232601052M000
AC Adapter	Dell	HP-OQ065B83	CN-05U092-47890-31D-0049
Monitor	NEC	JC-1575VMA	2Y785821
Modem	Hayes	5362US	A02153623145

NOTE: All the power cords of the above support equipment are standard non-shielded, 1.8 meters long.

### 3.5 Cabling Diagram and Description

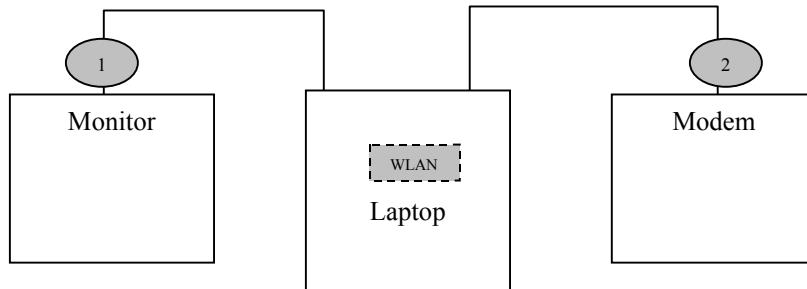

Cable 1: This is a 6-foot braid and foil shielded round cable connecting the host Dell Computer laptop computer with the NEC monitor. It has metallic DB-15 type connector at the computer end and is hardwired to the monitor. The cable is bundled to a length of one meter and the shield of the cable is grounded to the chassis of both devices via the connector shells.

Cable 2: This is a 6-foot braid and foil shielded round cable connecting the Dell Computer host computer to the Hayes modem. It has a metallic DB-9 type connector at the computer end and a metallic DB-25 type connector at the modem end. The cable is bundled to a length of one meter and the shield of the cable is grounded to the chassis of both devices via the connector shells.

## **4.0 TEST EQUIPMENT AND TEST SETUPS**

The test equipment settings and functions are selected using the guidance of ANSI C63.4-1992. All test equipment setups and operations during conducted and radiated emissions testing are in accordance with this reference document.


### **4.1 Conducted Emissions At AC Mains Port**

During conducted emissions measurements, a spectrum analyzer was used as the measuring instrument along with a preselector and quasi-peak detector. A 10 dB attenuation pad was used for the protection of the spectrum analyzer input stage. The conducted emissions from the EUT in the frequency range from 150 kHz to 30 MHz were captured for graphical display through the use of automated LABVIEW EMI measurement software. All graphical readings were measured in the “Peak” mode only to reduce testing time. Upon completion of the graphical scan, the test lab personnel performed the conducted measurement scan manually using the spectrum analyzer front panel keys. All peak measurements coming within 3 dB of the limit line were “Averaged” and/or “Quasi-Peaked” and denoted appropriately in the EXCEL spreadsheet.

The Equipment Under Test (EUT) was configured as a system with peripherals connected, so that at least one interface port of each type is connected to one external peripheral when tested for conducted emissions according to ANSI C63.4: 1992. The EUT was tested in a tabletop configuration.

The six highest emission readings for Line 1 and Line 2 are highlighted on the data sheets in Appendix I. The graphical scans only reflects peak readings while the tabulated data sheets reflect peak, average, and/or quasi-peak readings which ever applies.

4.1.1 Conducted Emissions At AC Mains Port – Test Setup

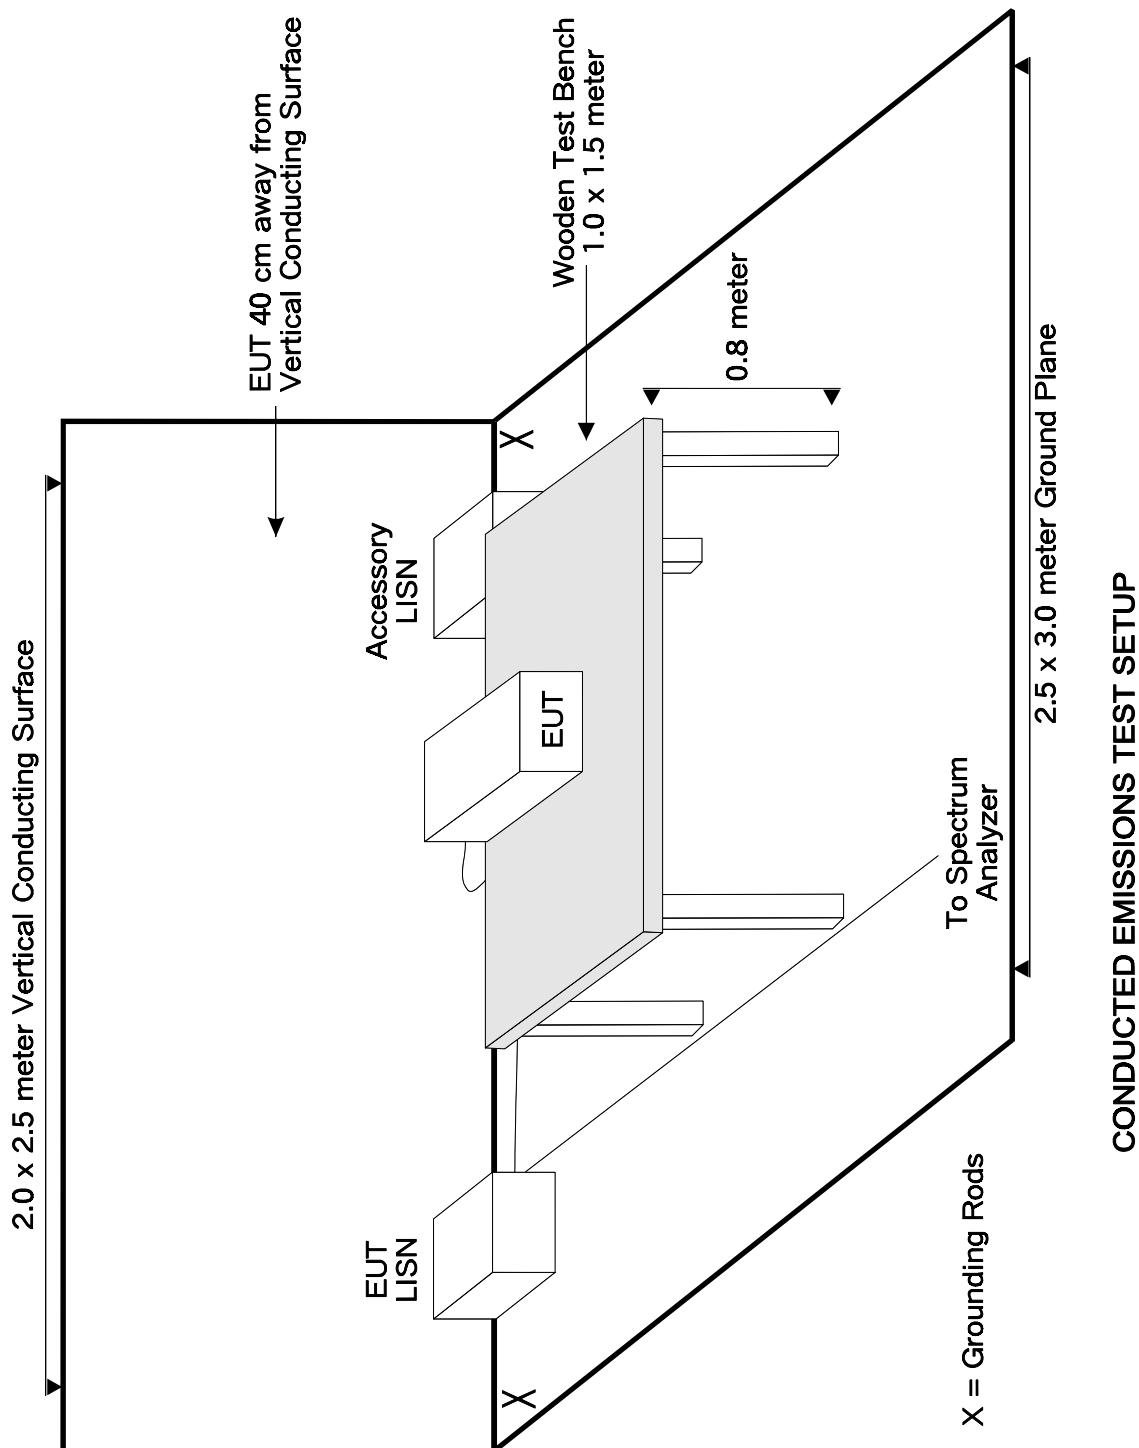


#### 4.2 Spurious Radiated Emissions

A spectrum analyzer was used as the measuring instrumentation along with a preselector and quasi-peak-detector. The pre-amplifiers were used to increase the sensitivity of the instrument. The spectrum analyzer was used in the peak detector mode with the “max-hold” feature activated and in Positive Peak mode. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. The quasi-peak detector was used only for those readings, which are marked accordingly in the data sheet. The effective measurement bandwidth used for the radiated emissions test was 120 kHz for (30 MHz- 1000 MHz). The spectrum analyzer operated such that the modulation of the signal was filtered out to set the analyzer in linear mode. For testing beyond 1000 MHz a spectrum analyzer capable of taking reading above 1000 MHz was connected to the high frequency amplifier, where these measurement readings were taken with the transducer placed at a 3-meter test distance from the EUT.

The Open Area Test Sites (OATS) was used for radiated emission testing. These test sites are designed according to ANSI C63.4: 1992 and ANSI C63.7: 1992 guidelines. The Measurements were conducted in accordance with ANSI C63.4: 1992 and ANSI C63.7: 1992 requirements.

Broadband biconical, log periodic, and horn antennas were used as transducers during the measurement reading phase. The frequency spans were wide (30 MHz-88 MHz, 88 MHz-216 MHz, 216 MHz- 300 MHz, and 300 MHz- 1000 MHz). After 1000 MHz the horn antenna was used to measure emissions. The six highest emission readings in both horizontal and vertical polarities are highlighted on the data sheets in Appendix I.

4.2.1 Spurious Radiated Emissions – Test Setup

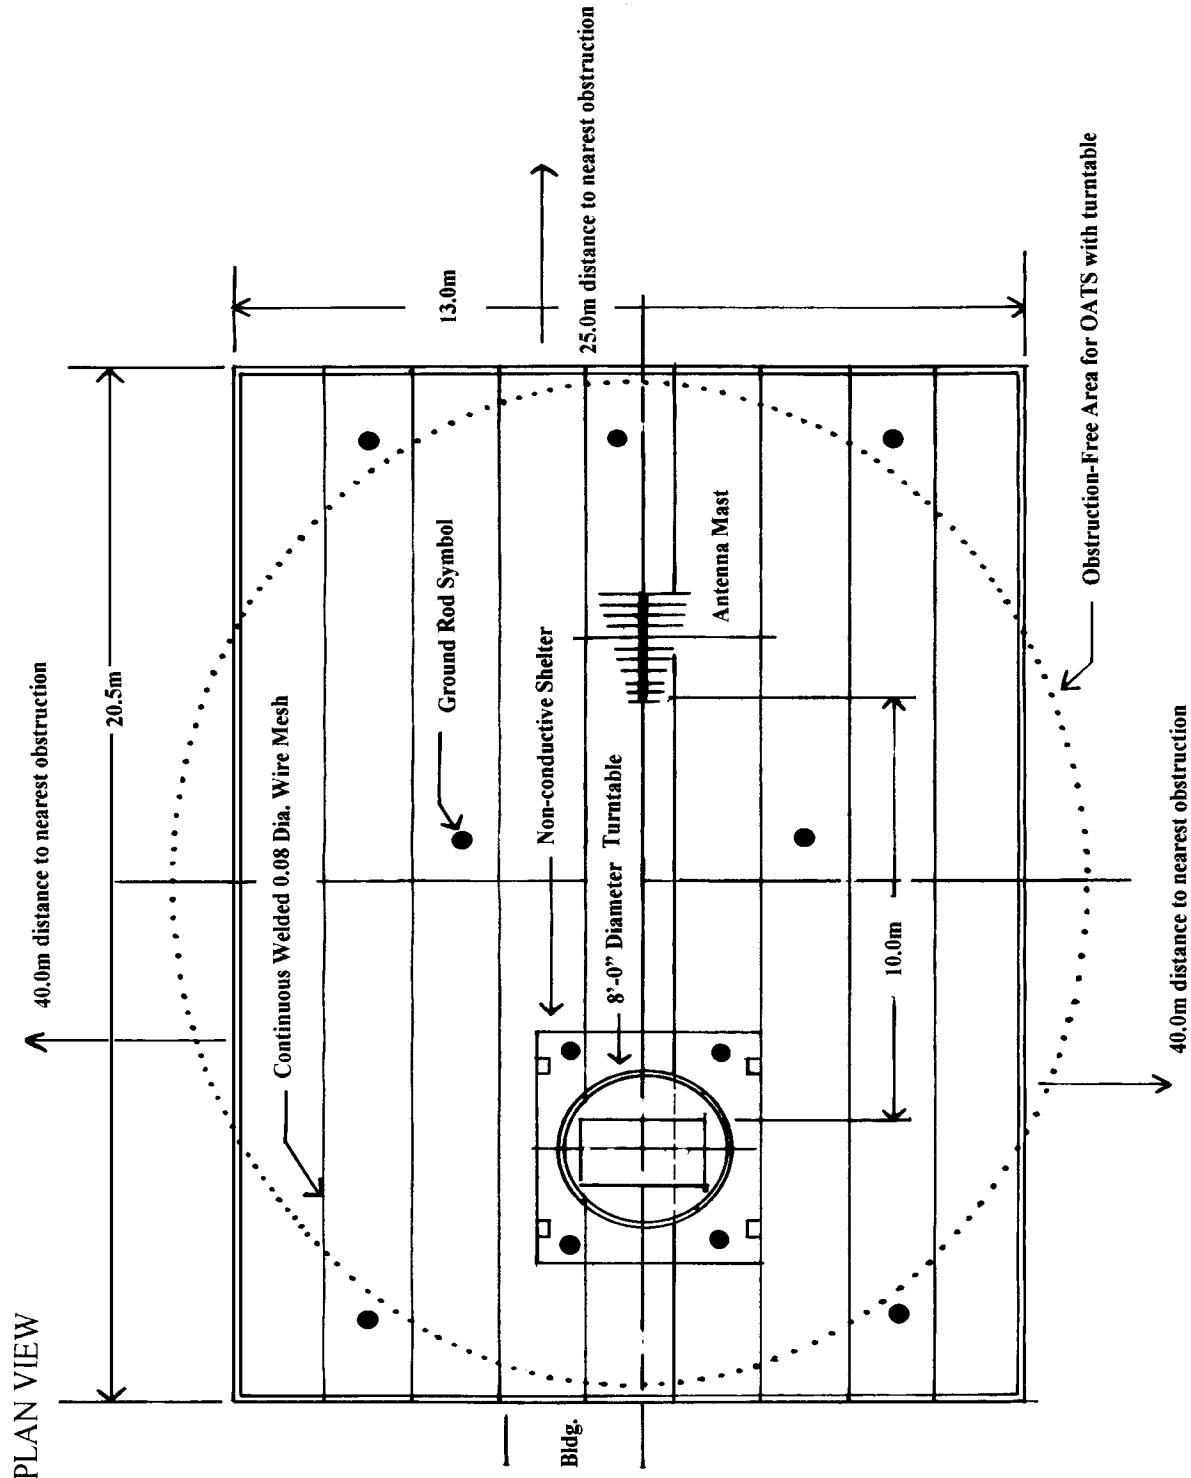


#### 4.3 Maximum Peak Output Power Measurement

A power meter along with a power sensor was used to measure the maximum peak output power. The low (channel 1), middle (channel 6), and high (channel 11) were measured as well as data rates 1, 5.5, and 11 Mbps.

The EUT maximum peak output power is less than 1 Watt. Please refer to Appendix I for the data sheets.

##### 4.3.1 Maximum Peak Output Power Measurement – Test Setup

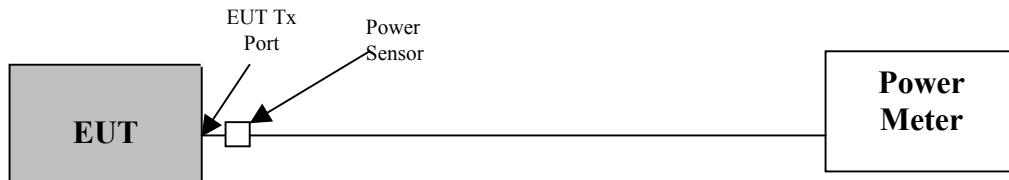


#### 4.4 Occupied Bandwidth Measurement

A spectrum analyzer was used to measure the occupied bandwidth. The bandwidth was measured using a direct connection from the RF output port of the EUT to the spectrum analyzer using a low loss cable and a DC block. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz.

The EUT bandwidth is at least 500 kHz. Please refer to Appendix I for graphical plots.

##### 4.4.1 Occupied Bandwidth Measurement – Test Setup

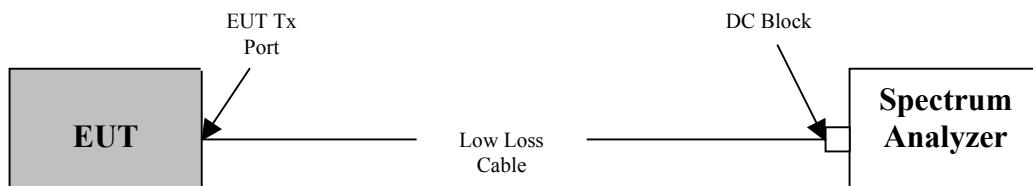


#### 4.5 Spectral Power Density Measurement

A spectrum analyzer was used to measure the spectral power density. It was measured using a direct connection from the RF output port of the EUT to the spectrum analyzer using a low loss cable and a DC block. The resolution bandwidth was 3 kHz and the video bandwidth was 10 kHz. The highest 4.5 MHz of the signal was used as the frequency span with the sweep rate being 1 second for every 3 kHz of span.

The EUT spectral power density does not exceed 8 dBm in any 3 kHz band. Please refer to Appendix I for graphical plots.

##### 4.5.1 Spectral Power Density Measurement – Test Setup

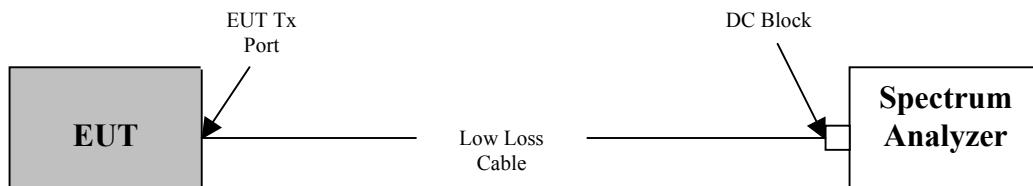


#### 4.6 Spurious Emissions Measurement At The Antenna Terminal

A spectrum analyzer was used to measure the spurious emissions at the antenna terminal. It was measured using a direct connection from the RF output port of the EUT to the spectrum analyzer using a low loss cable and a DC block. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz. The spans were wide enough to include all the harmonics and emissions that were produced by the intentional radiator.

The EUT RF power that is produced in any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Please refer to Appendix I for graphical plots.


##### 4.6.1 Spurious Emissions Measurement At The Antenna Terminal – Test Setup

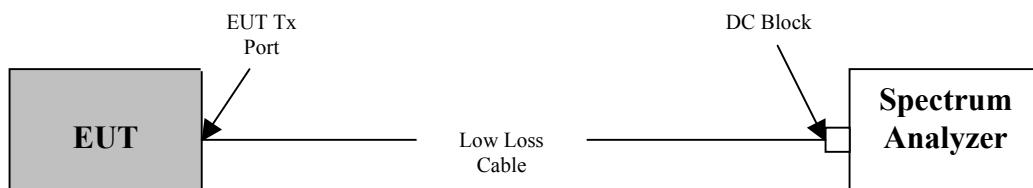

#### 4.7 Band Edge Measurement At The Antenna Terminal

A spectrum analyzer was used to measure the band edge measurements at the antenna terminal with the EUT transmitting at 2412 MHz (channel 1) and 2462 MHz (channel 11). It was measured using a direct connection from the RF output port of the EUT to the spectrum analyzer using a low loss cable and a DC block. The resolution bandwidth was 1 MHz and the video bandwidth was 1 MHz. It was verified that the band edge measurements were not above the limit in the restricted bands below 2390 MHz and above 2483.5 MHz. Please refer to Appendix I for graphical plots.

##### 4.7.1 Band Edge Measurement At The Antenna Terminal – Test Setup

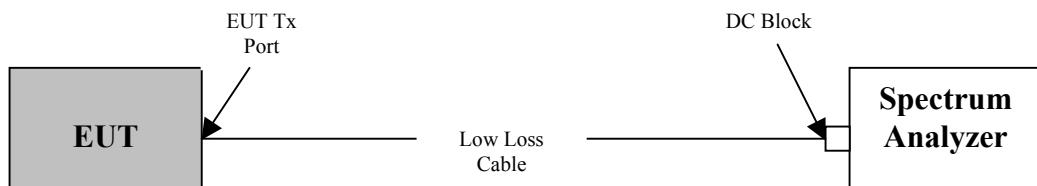

**5.0 MODIFICATIONS AND RECOMMENDATIONS**

There were no modifications done to the EUT.

## APPENDIX I

### ***DATA SHEETS***

**CONDUCTED EMISSIONS AT AC MAINS PORT**

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	04/02/03
<b>EUT:</b>	802.11b MiniPCI Type 3A Wireless Module	<b>PROJECT NUMBER:</b>	INTEL-030328-07
<b>MODEL NUMBER:</b>	WM3A2100	<b>TEST ENGINEER:</b>	Rick Candelas
<b>SERIAL NUMBER:</b>	000423468079	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Installed in Dell Computer Corporation laptop computer (PPT Chassis).	<b>TEMPERATURE:</b>	21 C
		<b>HUMIDITY:</b>	35% RH
		<b>TIME:</b>	3:00 PM

<b>Standard:</b>	FCC CFR 47, Part 15.207
<b>Description:</b>	AC Power Conducted Emissions
<b>Results:</b>	Passes FCC Limits


NOTE: During preliminary scans, there wasn't any difference which channel or data rate was used with the EUT, therefore only Channel 1 at a data rate of 1 Mbps was used for final testing.

**CONDUCTED EMISSIONS AT AC MAINS PORT (Continued)**

<b>FCC CLASS B CONDUCTED EMISSIONS – LINE 1</b>						
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Detector (PK/QP/AV)</i>	<i>Average Limit (dBuV)</i>	<i>Average Delta(dB)</i>	<i>Quasi-Peak Limit (dBuV)</i>	<i>Quasi-Peak Delta(dB)</i>
<b>0.1521</b>	<b>48.40</b>	<b>PK</b>	<b>55.94</b>	<b>-7.54</b>	<b>65.94</b>	<b>-17.54</b>
<b>0.4071</b>	<b>39.40</b>	<b>PK</b>	<b>48.65</b>	<b>-9.25</b>	<b>58.65</b>	<b>-19.25</b>
<b>0.4863</b>	<b>39.80</b>	<b>PK</b>	<b>46.39</b>	<b>-6.59</b>	<b>56.39</b>	<b>-16.59</b>
<b>0.5664</b>	<b>42.10</b>	<b>PK</b>	<b>46.00</b>	<b>-3.90</b>	<b>56.00</b>	<b>-13.90</b>
<b>2.0950</b>	<b>38.40</b>	<b>PK</b>	<b>46.00</b>	<b>-7.60</b>	<b>56.00</b>	<b>-17.60</b>
<b>4.6050</b>	<b>38.00</b>	<b>PK</b>	<b>46.00</b>	<b>-8.00</b>	<b>56.00</b>	<b>-18.00</b>

<b>FCC CLASS B CONDUCTED EMISSIONS – LINE 2</b>						
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Detector (PK/QP/AV)</i>	<i>Average Limit (dBuV)</i>	<i>Average Delta(dB)</i>	<i>Quasi-Peak Limit (dBuV)</i>	<i>Quasi-Peak Delta(dB)</i>
<b>0.1560</b>	<b>50.10</b>	<b>PK</b>	<b>55.83</b>	<b>-5.73</b>	<b>65.83</b>	<b>-15.73</b>
<b>0.4068</b>	<b>40.50</b>	<b>PK</b>	<b>48.66</b>	<b>-8.16</b>	<b>58.66</b>	<b>-18.16</b>
<b>0.4938</b>	<b>41.90</b>	<b>PK</b>	<b>46.17</b>	<b>-4.27</b>	<b>56.17</b>	<b>-14.27</b>
<b>0.5670</b>	<b>42.60</b>	<b>PK</b>	<b>46.00</b>	<b>-3.40</b>	<b>56.00</b>	<b>-13.40</b>
<b>2.0250</b>	<b>39.10</b>	<b>PK</b>	<b>46.00</b>	<b>-6.90</b>	<b>56.00</b>	<b>-16.90</b>
<b>4.1800</b>	<b>39.20</b>	<b>PK</b>	<b>46.00</b>	<b>-6.80</b>	<b>56.00</b>	<b>-16.80</b>

CONDUCTED EMISSIONS AT AC MAINS PORT (Continued)

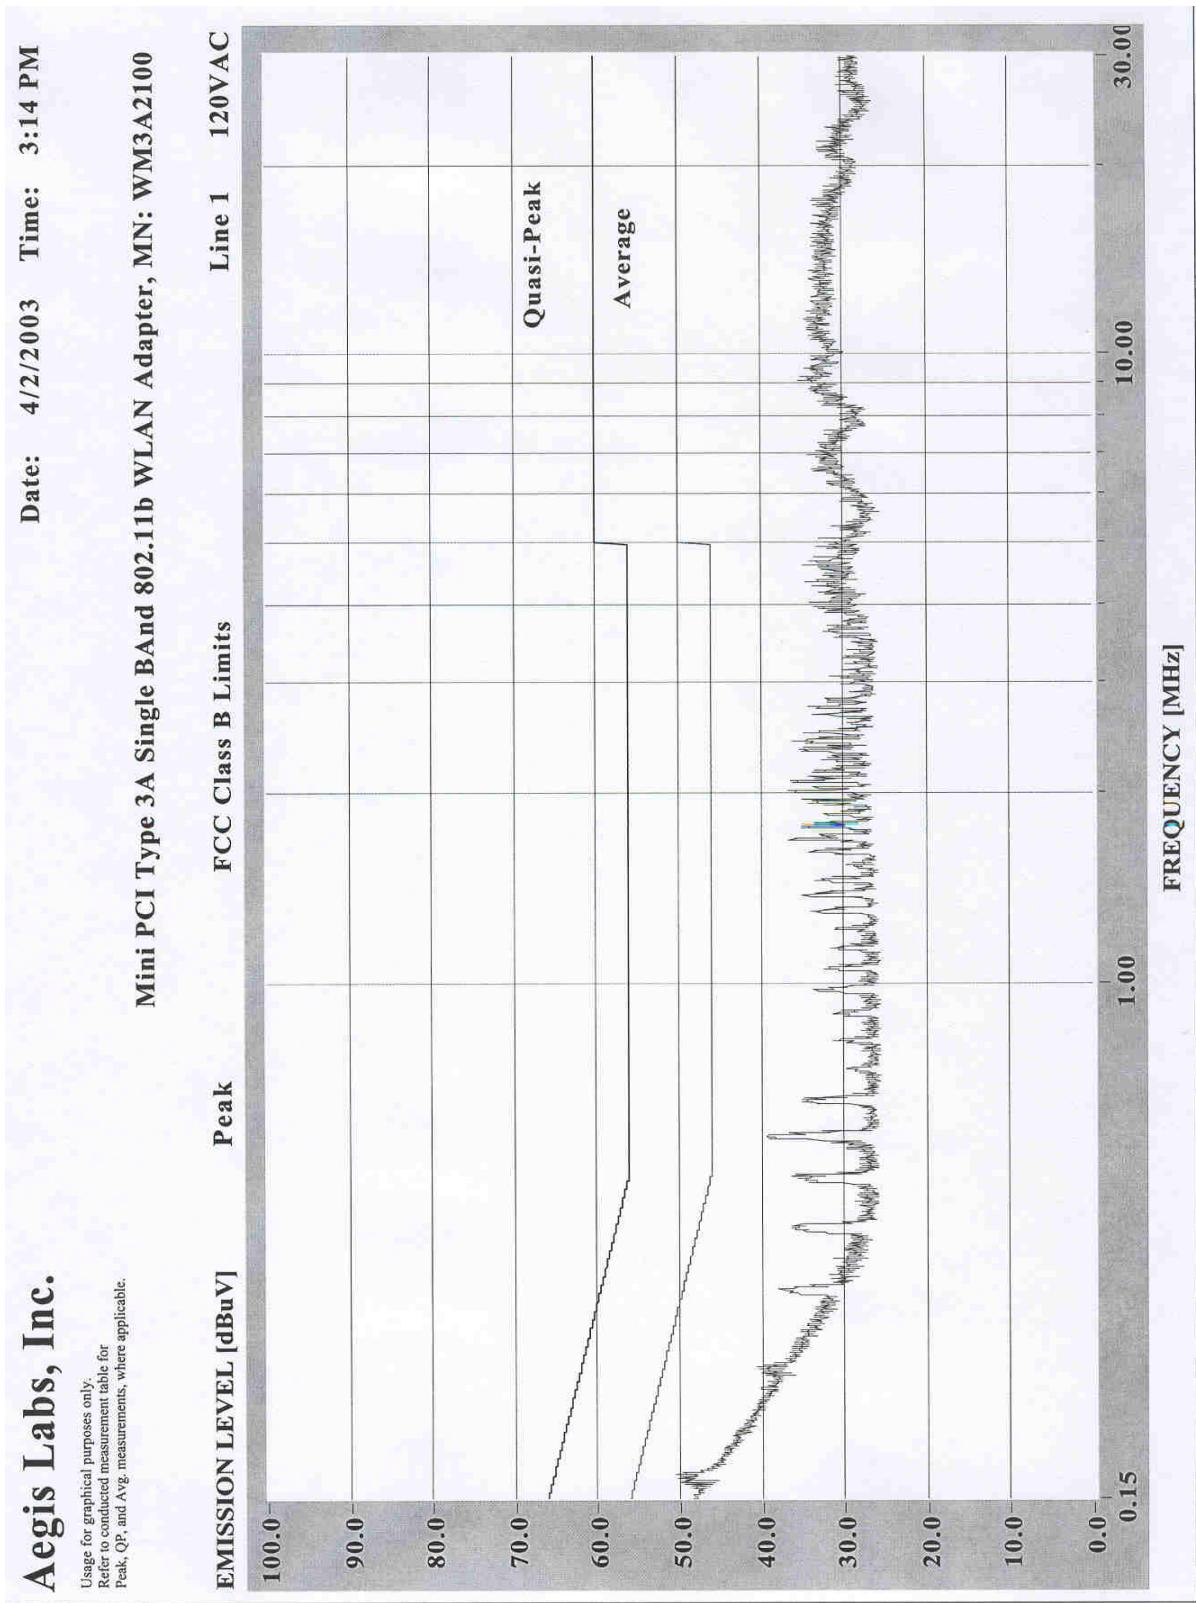

**Aegis Labs, Inc.**


Usage for graphical purposes only.  
Refer to conducted measurement table for  
Peak, QP, and Avg. measurements, where applicable.

**Aegis Labs, Inc.**

Usage for graphical purposes only.  
Refer to conducted measurement table for  
Peak, QP, and Avg. measurements, where applicable.

Date: 4/2/2003 Time: 3:19 PM


Mini PCI Type 3A Single BAnd 802.11b WLAN Adapter, MN: WM3A2100

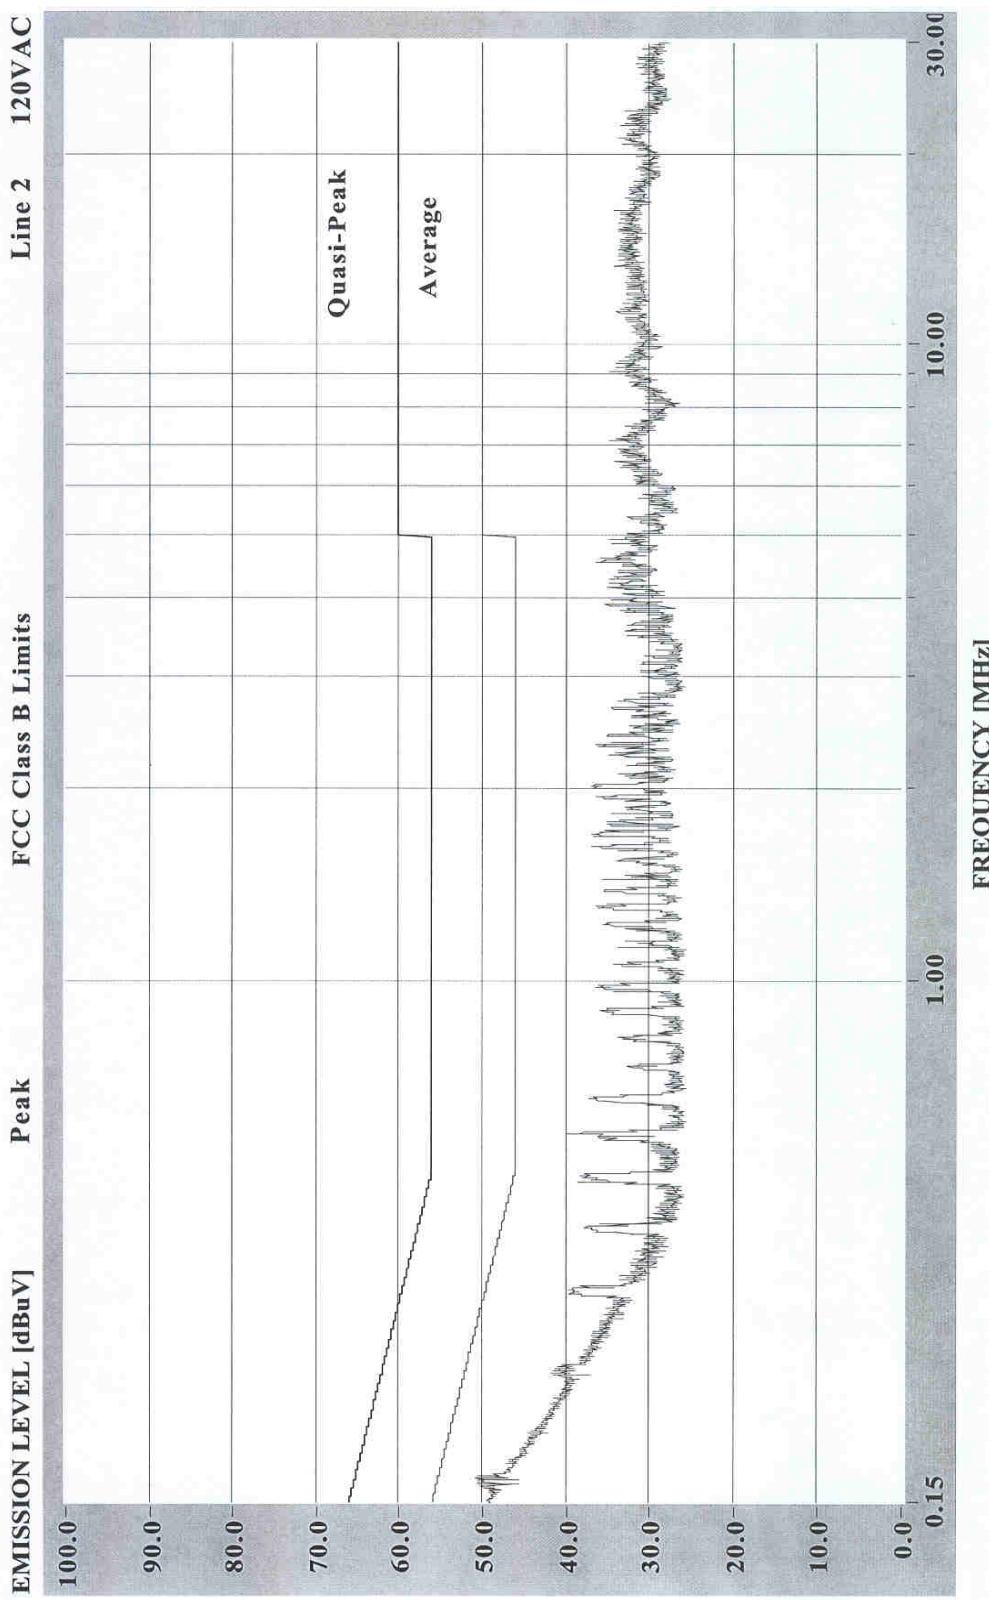

**CONDUCTED EMISSIONS AT AC MAINS PORT (Continued)**

<b>TEST EQUIPMENT USED</b>					
<b>Equipment Name</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Calibration Due Date</b>	<b>Calibration Cycle</b>
Spectrum Analyzer - RF Section	Dell Computer	8568B	2634A03093	11/27/03	1 Year
Spectrum Analyzer - Display Section	Dell Computer	85662A	1833A00389	11/27/03	1 Year
Quasi-Peak Adapter	Dell Computer	85650A	2043A00220	11/28/03	1 Year
RF Preselector	Dell Computer	85685A	2620A000281	05/10/03	1 Year
Attenuator - 5W-10dB	Pasternack	PE7014-10	N/A	11/03/03	1 Year
LISN (EUT)	FCC	FCC-LISN-50-25-2	9931	02/20/04	1 Year
LISN (Access)	Com-Power	LI-200	12019	01/25/04	1 Year
LISN (Access)	Com-Power	LI-200	12018	01/25/04	1 Year
Temperature/Humidity Monitor	Dickson	TH550	7255185	01/18/04	1 Year

<b>ACCESSORIES EQUIPMENT</b>			
<b>Equipment Name</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>
Latitude D400 Laptop	Dell	PPT Chassis	8142Y010093232601052M000
AC Adapter	Dell	HP-OQ065B83	CN-05U092-47890-31D-0049
Monitor	NEC	JC-1575VMA	2Y785821
Modem	Hayes	5362US	A02153623145

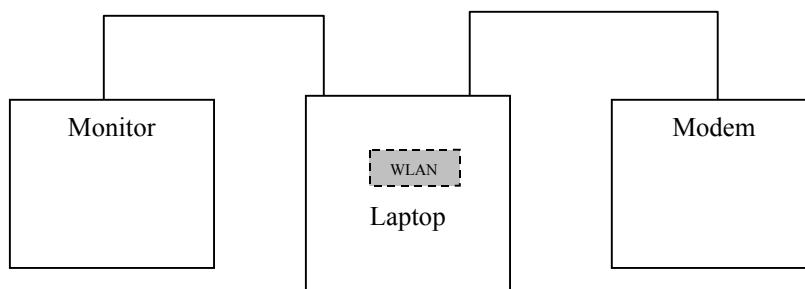**BLOCK DIAGRAM**

**CONDUCTED EMISSIONS AT AC MAINS PORT (Continued)**

**PHOTOGRAPHS**



**SPURIOUS RADIATED EMISSIONS**

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	04/02/03
<b>EUT:</b>	802.11b MiniPCI Type 3A Wireless Module	<b>PROJECT NUMBER:</b>	INTEL-030328-06
<b>MODEL NUMBER:</b>	WM3A2100	<b>TEST ENGINEER:</b>	Rick Candelas
<b>SERIAL NUMBER:</b>	000423468079	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Installed in Dell Computer Corporation laptop computer (PPT Chassis).	<b>TEMPERATURE:</b>	18 C
		<b>HUMIDITY:</b>	40% RH
		<b>TIME:</b>	8:30 AM

<b>Standard:</b>	FCC Class B Limits
<b>Description:</b>	Spurious Emissions Measurements - Radiated
<b>Results:</b>	-9.14 dB (PK) margin @ 208.08 MHz (Vertical Polarity)

NOTE: During preliminary scans, there wasn't any difference which channel or data rate was used with the EUT, therefore only Channel 1 at a data rate of 1 Mbps was used for final testing.

**SPURIOUS RADIATED EMISSIONS (Continued)**

<b>Horizontal Open Field Maximized Data</b>							
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>
125.06	33.90	400	0		15.25	33.04	-17.79
192.09	34.50	400	270		19.30	33.04	-13.75
<b>208.01</b>	<b>35.30</b>	<b>400</b>	<b>270</b>		<b>20.60</b>	<b>33.04</b>	<b>-12.44</b>
<b>240.06</b>	<b>37.40</b>	<b>400</b>	<b>225</b>		<b>23.41</b>	<b>35.54</b>	<b>-12.13</b>
300.08	36.60	300	315		18.86	35.54	-16.68
304.09	36.20	300	90		18.74	35.54	-16.80
<b>320.09</b>	<b>38.60</b>	<b>275</b>	<b>270</b>		<b>22.25</b>	<b>35.54</b>	<b>-13.29</b>
<b>352.07</b>	<b>38.90</b>	<b>275</b>	<b>270</b>		<b>23.31</b>	<b>35.54</b>	<b>-12.23</b>
<b>368.11</b>	<b>39.20</b>	<b>300</b>	<b>270</b>		<b>23.61</b>	<b>35.54</b>	<b>-11.94</b>
<b>384.13</b>	<b>38.40</b>	<b>225</b>	<b>90</b>		<b>22.90</b>	<b>35.54</b>	<b>-12.64</b>
400.12	35.60	200	270		20.28	35.54	-15.26


<b>Vertical Open Field Maximized Data</b>							
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>
125.05	36.90	100	180		16.65	33.04	-16.39
129.66	38.30	100	90		18.45	33.04	-14.59
<b>208.08</b>	<b>38.40</b>	<b>100</b>	<b>0</b>		<b>23.90</b>	<b>33.04</b>	<b>-9.14</b>
<b>240.09</b>	<b>38.90</b>	<b>100</b>	<b>0</b>		<b>25.91</b>	<b>35.54</b>	<b>-9.63</b>
300.10	34.50	100	90		17.16	35.54	-18.38
304.09	34.20	100	45		17.19	35.54	-18.35
320.10	38.00	100	0		22.29	35.54	-13.25
<b>352.11</b>	<b>40.90</b>	<b>100</b>	<b>0</b>		<b>25.51</b>	<b>35.54</b>	<b>-10.03</b>
<b>368.11</b>	<b>40.00</b>	<b>100</b>	<b>0</b>		<b>24.64</b>	<b>35.54</b>	<b>-10.90</b>
<b>384.11</b>	<b>38.10</b>	<b>100</b>	<b>45</b>		<b>23.16</b>	<b>35.54</b>	<b>-12.38</b>
<b>400.09</b>	<b>38.20</b>	<b>100</b>	<b>45</b>		<b>23.98</b>	<b>35.54</b>	<b>-11.56</b>

NOTE: The data was taken at 10 meters and the FCC Class B limits were extrapolated to 10 meters.

**SPURIOUS RADIATED EMISSIONS (Continued)**


<b>TEST EQUIPMENT USED</b>					
<b>Equipment Name</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Calibration Due Date</b>	<b>Calibration Cycle</b>
Spectrum Analyzer - RF Section	Dell Computer	8568B	2634A03093	11/27/03	1 Year
Spectrum Analyzer - Display Section	Dell Computer	85662A	1833A00389	11/27/03	1 Year
Quasi-Peak Adapter	Dell Computer	85650A	2043A00220	11/28/03	1 Year
RF Preselector	Dell Computer	85685A	2620A000281	05/10/03	1 Year
Preamplifier	Com-Power	PA-102	1438	04/29/03	1 Year
Antenna - Biconical	EMCO	3110	9108-1421	02/11/04	1 Year
Antenna - Log Periodic	EMCO	3148	4947	02/11/04	1 Year
Temperature/Humidity Monitor	Dickson	TH550	7255185	01/08/04	1 Year

<b>ACCESSORIES EQUIPMENT</b>			
<b>Equipment Name</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>
Latitude D400 Laptop	Dell	PPT Chassis	8142Y010093232601052M000
AC Adapter	Dell	HP-OQ065B83	CN-05U092-47890-31D-0049
Monitor	NEC	JC-1575VMA	2Y785821
Modem	Hayes	5362US	A02153623145

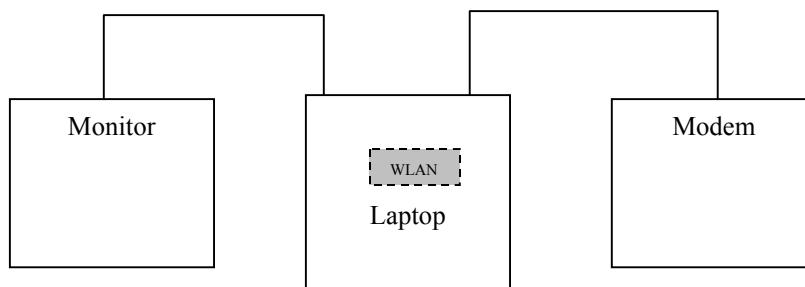**BLOCK DIAGRAM**

SPURIOUS RADIATED EMISSIONS (Continued)

PHOTOGRAPHS

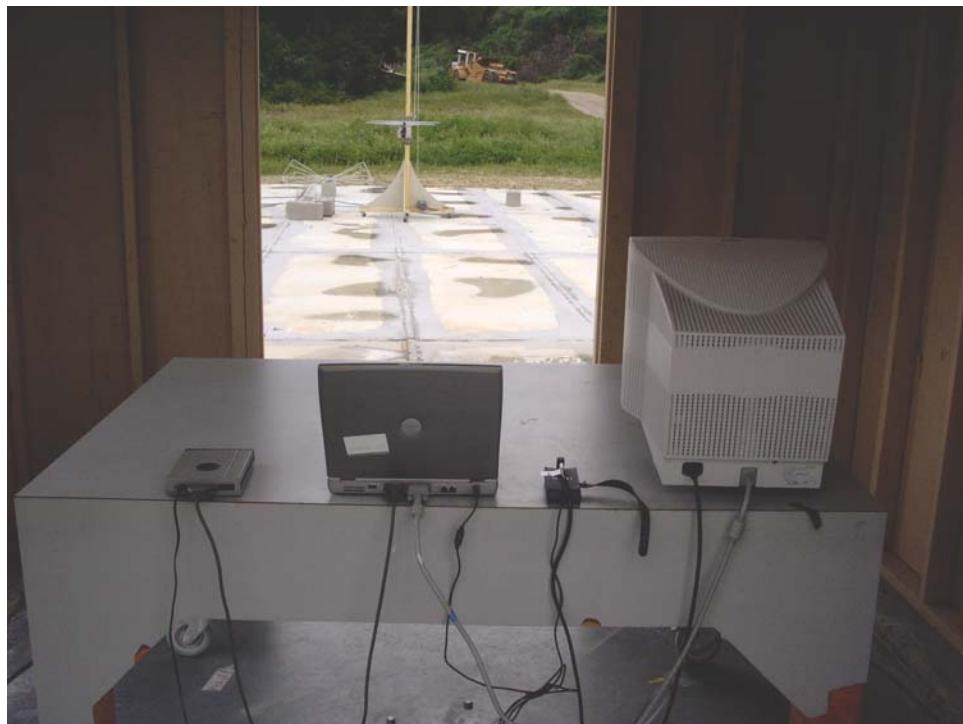

**SPURIOUS RADIATED EMISSIONS (Continued)**

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	04/03/03
<b>EUT:</b>	802.11b MiniPCI Type 3A Wireless Module	<b>PROJECT NUMBER:</b>	INTEL-030328
<b>MODEL NUMBER:</b>	WM3A2100	<b>TEST ENGINEER:</b>	Rick Candelas
<b>SERIAL NUMBER:</b>	000423468079	<b>SITE #:</b>	2
<b>CONFIGUARTION:</b>	Installed in Dell Computer Corporation laptop computer (PPT Chassis).	<b>TEMPERATURE:</b>	16 C
		<b>HUMIDITY:</b>	37% RH
		<b>TIME:</b>	8:30 AM

<b>Standard:</b>	FCC CFR 47, Part 15, 15.247(c), 15.209
<b>Description:</b>	Spurious Emissions Measurements - Radiated
<b>Results:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

**SPURIOUS RADIATED EMISSIONS (Continued)**

*Fundamental and Band Edge Measurements at Channels 1, 6, & 11*  
Aegis Labs, Inc. File #: INTEL-030328-02

<b>Horizontal Open Field Maximized Data</b>								
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>
2410.93	72.67	200	135			104.88		
2389.47	31.00	200	135			63.11	74.00	-10.89
2390.00				17.50	A	49.62	54.00	-4.38
2436.33	71.83	100	135			104.15		
2461.23	72.50	100	135			104.93		
2485.50	32.00	100	135			64.54	74.00	-9.46
2483.50				18.67	A	51.20	54.00	-2.80

<b>Vertical Open Field Maximized Data</b>								
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>
2411.08	72.83	100	225			105.24		
2388.53	30.17	100	225			62.48	74.00	-11.52
2390.00				17.50	A	49.82	54.00	-4.18
2438.17	73.67	100	225			106.20		
2461.33	72.17	100	225			104.80		
2485.90	32.17	100	225			64.91	74.00	-9.09
2483.50				18.50	A	51.23	54.00	-2.77


**SPURIOUS RADIATED EMISSIONS (Continued)**

**Band Edge Measurement Plots at Channels 1 & 11**


<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/03/03	Band Edge Emissions Measurements – Radiated Vertical > -20 dBc @ 2390 MHz	Rick Candelas
<p>*ATTEN 0dB RL 90.0dB<math>\mu</math>V 10dB/ MKR 19.67dB<math>\mu</math>V 2.38880GHz</p>		


<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/03/03	Band Edge Emissions Measurements – Radiated Vertical Peak Measurement @ 2390 MHz	Rick Candelas
<p>*ATTEN 0dB RL 90.0dB<math>\mu</math>V 10dB/ MKR 30.17dB<math>\mu</math>V 2.38853GHz</p>		

SPURIOUS RADIATED EMISSIONS (Continued)

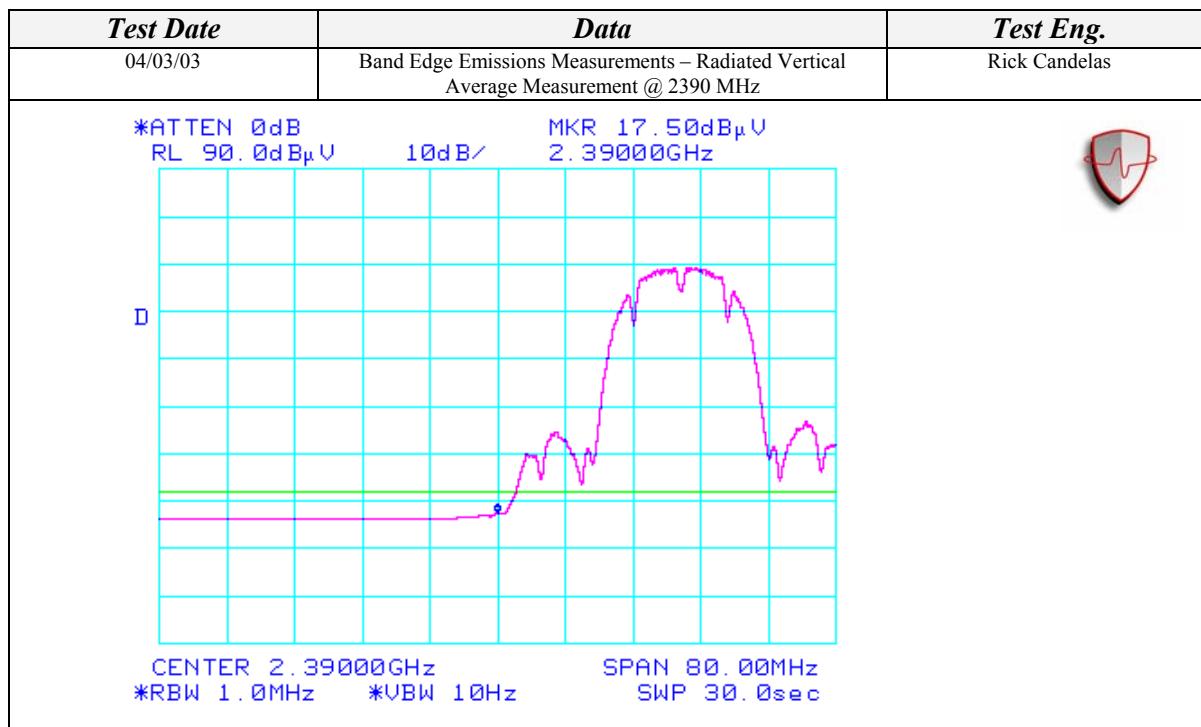


**SPURIOUS RADIATED EMISSIONS (Continued)**
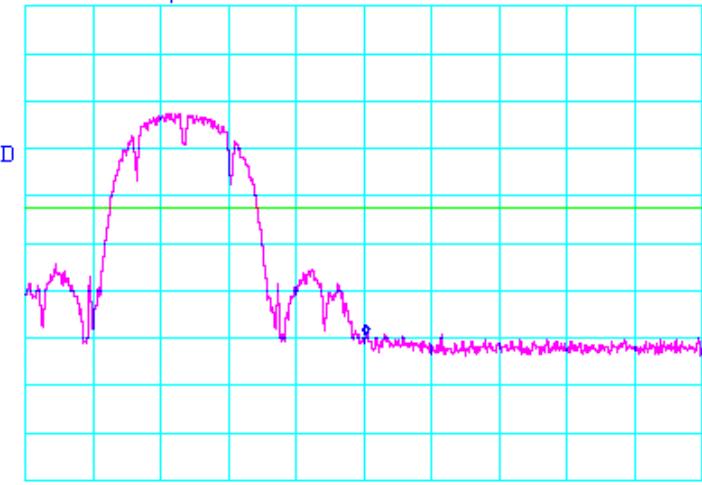
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/03/03	Band Edge Emissions Measurements – Radiated Vertical > -20 dBc @ 2483.5 MHz	Rick Candelas
	<p style="text-align: center;">*ATTEN 0dB RL 90.0dB<math>\mu</math>V 10dB/</p>  <p style="text-align: center;">MKR 20.83dB<math>\mu</math>V 2.48377GHz</p> <p style="text-align: center;">CENTER 2.48350GHz SPAN 80.00MHz *RBW 100kHz *VBW 300kHz SWP 50.0ms</p>	
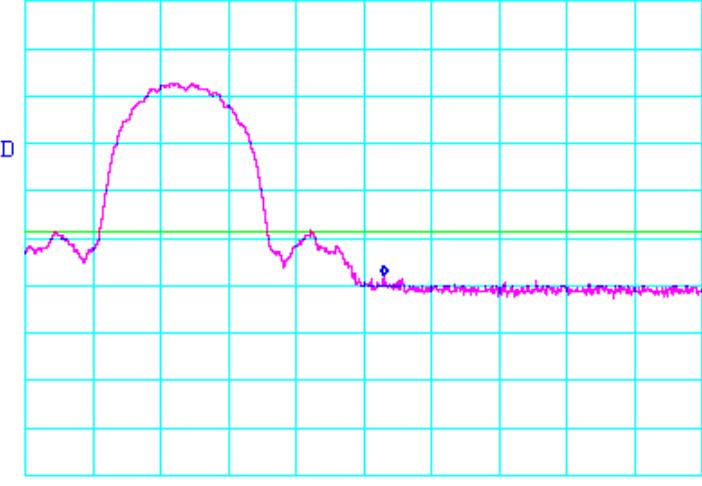
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/03/03	Band Edge Emissions Measurements – Radiated Vertical Peak Measurement @ 2483.5 MHz	Rick Candelas
	<p style="text-align: center;">*ATTEN 0dB RL 90.0dB<math>\mu</math>V 10dB/</p>  <p style="text-align: center;">MKR 32.17dB<math>\mu</math>V 2.48590GHz</p> <p style="text-align: center;">CENTER 2.48350GHz SPAN 80.00MHz *RBW 1.0MHz *VBW 3.0MHz SWP 50.0ms</p>	

SPURIOUS RADIATED EMISSIONS (Continued)

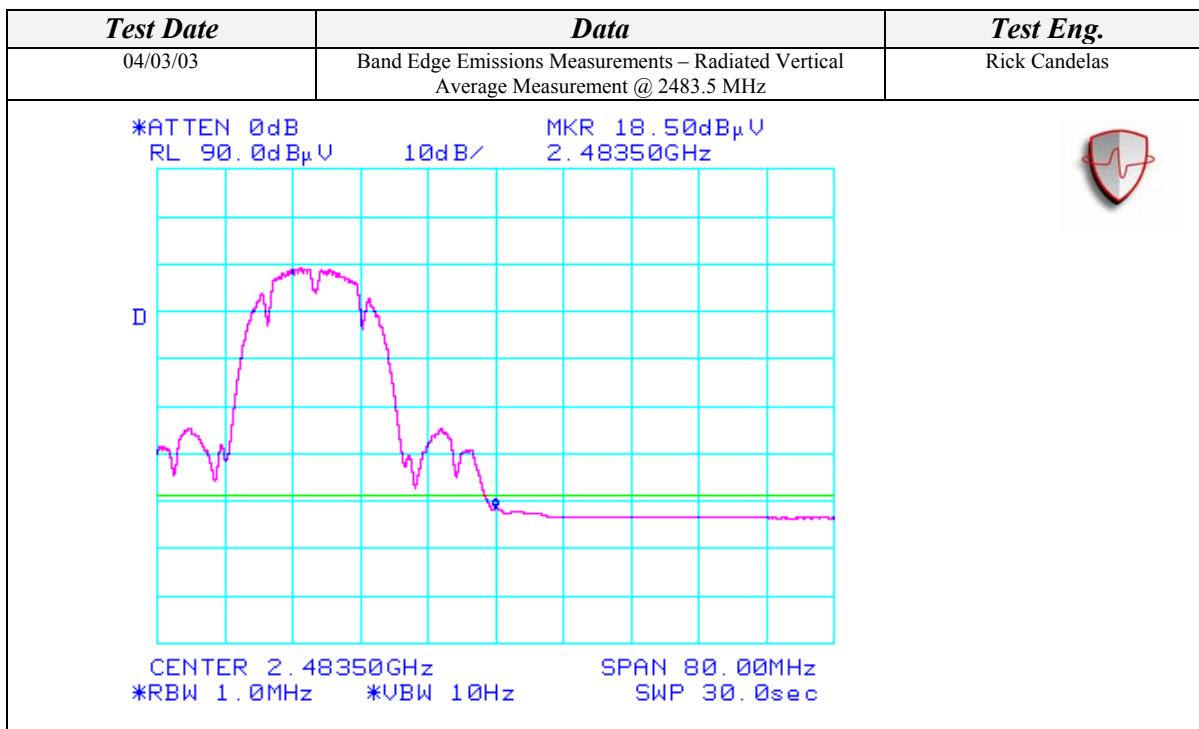


**SPURIOUS RADIATED EMISSIONS (Continued)**


<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/03/03	Band Edge Emissions Measurements – Radiated Horizontal > -20 dBc @ 2390 MHz	Rick Candelas
	<p style="text-align: center;">*ATTEN 0dB RL 90.0dB<math>\mu</math>V 10dB/</p> <p style="text-align: center;">MKR 19.67dB<math>\mu</math>V 2.3880GHz</p> <p style="text-align: center;">CENTER 2.39000GHz SPAN 80.00MHz *RBW 100kHz *VBW 300kHz SWP 50.0ms</p>	


<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/03/03	Band Edge Emissions Measurements – Radiated Horizontal Peak Measurement @ 2390 MHz	Rick Candelas
	<p style="text-align: center;">*ATTEN 0dB RL 90.0dB<math>\mu</math>V 10dB/</p> <p style="text-align: center;">MKR 31.00dB<math>\mu</math>V 2.38947GHz</p> <p style="text-align: center;">CENTER 2.39000GHz SPAN 80.00MHz *RBW 1.0MHz *VBW 3.0MHz SWP 50.0ms</p>	

SPURIOUS RADIATED EMISSIONS (Continued)

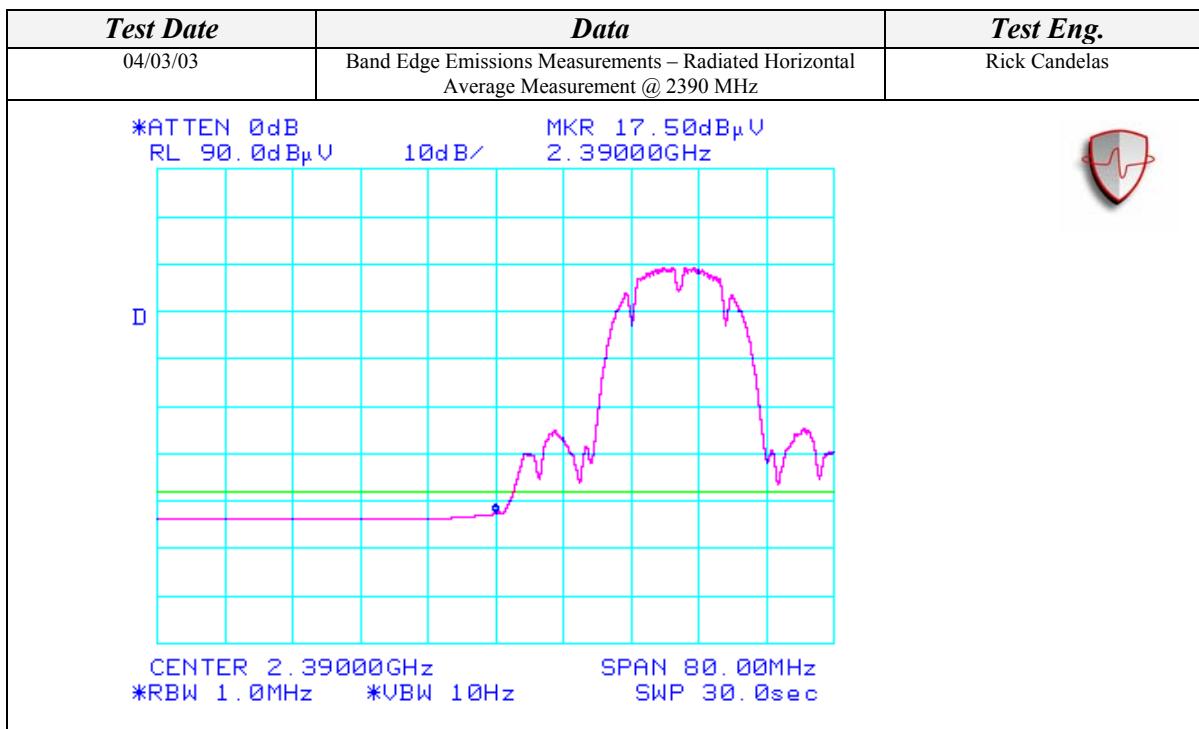


**SPURIOUS RADIATED EMISSIONS (Continued)**
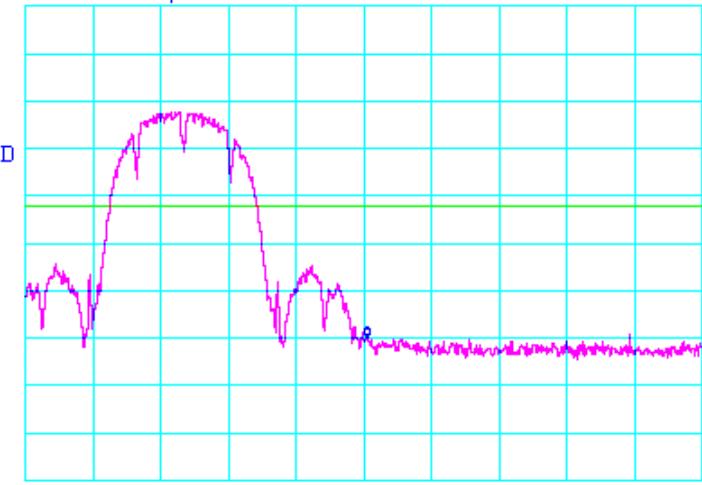
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/03/03	Band Edge Emissions Measurements – Radiated Horizontal > -20 dBc @ 2483.5 MHz	Rick Candelas
	<p style="text-align: center;">*ATTEN 0dB RL 90.0dB<math>\mu</math>V 10dB/</p>  <p style="text-align: center;">MKR 20.33dBm 2.48350GHz</p> <p style="text-align: center;">CENTER 2.48350GHz SPAN 80.00MHz *RBW 100kHz *VBW 300kHz SWP 50.0ms</p>	
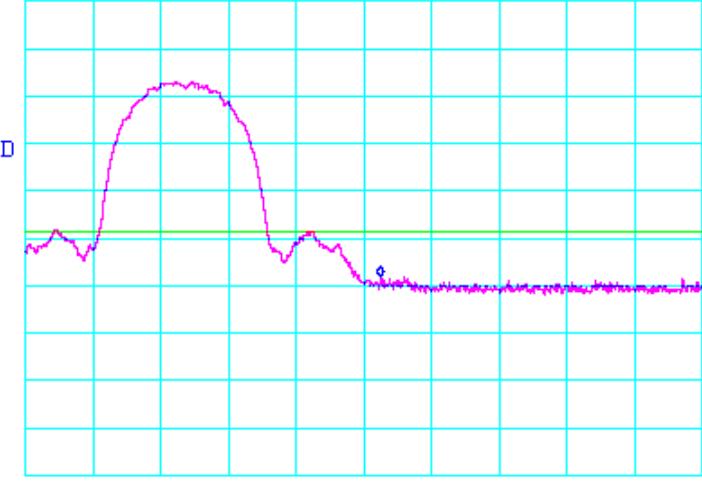
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/03/03	Band Edge Emissions Measurements – Radiated Horizontal Peak Measurement @ 2483.5 MHz	Rick Candelas
	<p style="text-align: center;">*ATTEN 0dB RL 90.0dB<math>\mu</math>V 10dB/</p>  <p style="text-align: center;">MKR 32.00dBm 2.48550GHz</p> <p style="text-align: center;">CENTER 2.48550GHz SPAN 80.00MHz *RBW 1.0MHz *VBW 3.0MHz SWP 50.0ms</p>	

SPURIOUS RADIATED EMISSIONS (Continued)

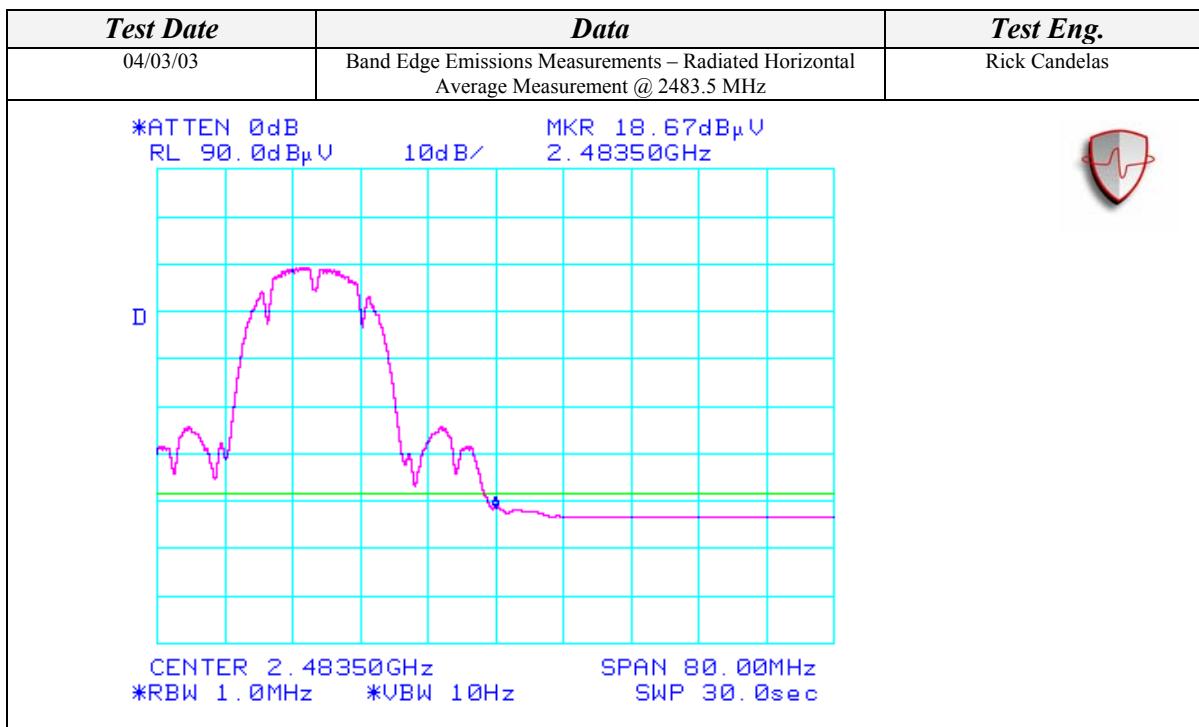

**SPURIOUS RADIATED EMISSIONS (Continued)**

*Harmonic Measurements at Channels 1, 6, & 11@ 1Mbps Data Rate*  
*Aegis Labs, Inc. File #: INTEL-030328-03*

<b>Horizontal Open Field Maximized Data</b>								
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>
4823.95	43.00	100	135			45.00	74.00	-29.00
4823.95				31.62	A	33.62	54.00	-20.38
7236.38	42.33	100	180			47.75	74.00	-26.25
7236.38				31.00	A	36.42	54.00	-17.58
9648.20	44.50	100	180			51.61	83.21	-31.60
4874.08	41.50	100	180			43.67	74.00	-30.33
4874.08				30.47	A	32.64	54.00	-21.36
7311.27	42.67	100	180			47.97	74.00	-26.03
7311.27				29.67	A	34.97	54.00	-19.03
9747.67	45.17	100	135			52.56	82.32	-29.76
4923.94	41.83	100	180			44.17	74.00	-29.83
4923.94				29.57	A	31.91	54.00	-22.09
7389.50	44.17	100	180			49.35	74.00	-24.65
7389.50				30.59	A	35.77	54.00	-18.23
9847.71	45.50	100	180			53.17	81.43	-28.26
<b>Vertical Open Field Maximized Data</b>								
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>
4823.97	44.33	100	135			46.30	74.00	-27.70
4823.97				35.06	A	37.03	54.00	-16.97
7236.92	42.67	100	135			47.99	74.00	-26.01
7236.92				28.00	A	33.32	54.00	-20.68
9626.83	45.00	100	135			52.11	80.75	-28.64
4873.67	43.00	100	180			45.12	74.00	-28.88
4873.67				33.05	A	35.17	54.00	-18.83
7310.52	43.33	100	180			48.56	74.00	-25.44
7310.52				29.77	A	35.00	54.00	-19.00
9748.01	45.50	100	180			52.99	82.19	-29.20
4923.81	42.67	100	135			44.94	74.00	-29.06
4923.81				30.10	A	32.37	54.00	-21.63
7396.92	43.50	100	135			48.62	74.00	-25.38
7396.92				30.03	A	35.15	54.00	-18.85
9848.12	45.17	100	135			52.98	81.30	-28.32

**SPURIOUS RADIATED EMISSIONS (Continued)**

*Spurious Emissions Measurements on Ch. 1 @ 1Mbps Data Rate*  
*Aegis Labs, Inc. File #: INTEL-030328-04*

**EUT in “Continuous Transmit Mode”**

<b>Horizontal Open Field Maximized Data</b>							
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>
1000.00	52.67	100	225		41.88	74.00	-32.12
1000.00				41.18	A	30.39	54.00
1121.79	52.67	100	225		42.88	74.00	-31.12
1121.79				39.00	A	29.21	54.00
1365.18	51.67	100	135		42.91	74.00	-31.09
1365.18				42.50	A	33.74	54.00
							-20.26

**Vertical Open Field Maximized Data**

<b>Vertical Open Field Maximized Data</b>							
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>
1000.00	54.83	200	180		44.14	74.00	-29.86
1000.00				45.59	A	34.90	54.00
1125.00	52.33	100	225		42.64	74.00	-31.37
1125.00				40.59	A	30.90	54.00
1543.90	61.17	100	270		53.43	74.00	-20.57
1543.90				51.81	A	44.07	54.00
							-9.93

**SPURIOUS RADIATED EMISSIONS (Continued)**

*Spurious Emissions Measurements on Ch. 1 @ 1Mbps Data Rate*  
*Aegis Labs, Inc. File #: INTEL-030328-05*

**EUT in “Continuous Receive Mode”**

<b>Horizontal Open Field Maximized Data</b>								
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>
1000.00	50.83	100	180			40.04	74.00	-33.96
1000.00				39.18	A	28.39	54.00	-25.61
1122.55	50.67	100	135			40.88	74.00	-33.12
1122.55				38.00	A	28.21	54.00	-25.79
1365.37	52.83	100	180			44.07	74.00	-29.93
1365.37				41.25	A	32.49	54.00	-21.51


**Vertical Open Field Maximized Data**

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>
1000.00	54.33	100	135			43.64	74.00	-30.36
1000.00				52.13	A	41.44	54.00	-12.56
1032.30	55.17	100	135			44.84	74.00	-29.16
1032.30				43.12	A	32.79	54.00	-21.21
1123.80	55.17	100	270			45.47	74.00	-28.53
1123.80				41.20	A	31.50	54.00	-22.50
1326.80	49.83	100	180			40.89	74.00	-33.11
1326.80				38.50	A	29.56	54.00	-24.44

**SPURIOUS RADIATED EMISSIONS (Continued)**

<b>TEST EQUIPMENT USED</b>					
<b>Equipment Name</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Calibration Due Date</b>	<b>Calibration Cycle</b>
Spectrum Analyzer	Agilent	8564EC	4046A00387	02/28/04	2 Years
Preamplifier	Agilent	8449B	3008A01573	04/29/03	1 Year
Antenna - Horn	EMCO	3115	2230	02/06/04	1 Year
Temperature/Humidity Monitor	Dickson	TH550	7255185	01/08/04	1 Year

<b>ACCESSORIES EQUIPMENT</b>			
<b>Equipment Name</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>
Laptop	Dell	Latitude D400	8142Y010093232601052M000
AC Adapter	Dell	HP-OQ065B83	CN-05U092-47890-31D-0049
Monitor	NEC	JC-1575VMA	2Y785821
Modem	Hayes	5362US	A02153623145

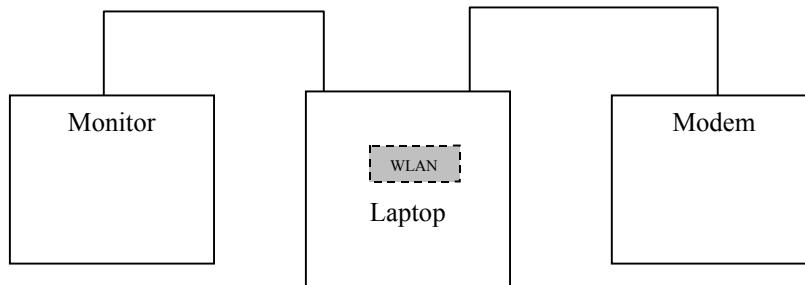**BLOCK DIAGRAM**

RADI SPURIOUS RADIATED EMISSIONS (Continued)

PHOTOGRAPHS



**MAXIMUM PEAK OUTPUT POWER MEASUREMENT**

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	03/28/03
<b>EUT:</b>	802.11b MiniPCI Type 3A Wireless Module	<b>PROJECT NUMBER:</b>	INTEL-030328-01
<b>MODEL NUMBER:</b>	WM3A2100	<b>TEST ENGINEER:</b>	Rick Candelas
<b>SERIAL NUMBER:</b>	000423468079	<b>SITE #:</b>	2
<b>CONFIGUARTION:</b>	Installed in Dell Computer Corporation laptop computer (PPT Chassis).	<b>TEMPERATURE:</b>	21 C
		<b>HUMIDITY:</b>	27% RH
		<b>TIME:</b>	11:00 AM

<b>Standard:</b>	FCC CFR 47, Part 15, 15.247(b)
<b>Description:</b>	Peak Output Power – Conducted
<b>Results:</b>	Maximum Peak Output Power is less than 1 W. 47.32 mW @ Channel 6 at a data rate of 1 Mbps

Frequency (MHz)	Rate (Mbps)	Power (dBm)	Cable Factor (dB)	Power Corrected (dBm)	Power (mW)
2412.00	1	16.44	0.15	16.59	45.60
2412.00	5.5	16.13	0.15	16.28	42.46
2412.00	11	16.08	0.15	16.23	41.98
2437.00	1	16.60	0.15	16.75	47.32
2437.00	5.5	16.30	0.15	16.45	44.16
2437.00	11	16.25	0.15	16.40	43.65
2462.00	1	16.45	0.15	16.60	45.71
2462.00	5.5	16.14	0.15	16.29	42.56
2462.00	11	16.08	0.15	16.23	41.98

**NOTE:** Using CRTU Ver. 1.1.0.3000 software provided by Intel Corporation to set power limits.


**OCCUPIED BANDWIDTH MEASUREMENT**

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	03/28/03
<b>EUT:</b>	802.11b MiniPCI Type 3A Wireless Module	<b>PROJECT NUMBER:</b>	INTEL-030328-08
<b>MODEL NUMBER:</b>	WM3A2100	<b>TEST ENGINEER:</b>	Rick Candelas
<b>SERIAL NUMBER:</b>	000423468079	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Installed in Dell Computer Corporation laptop computer (PPT Chassis).	<b>TEMPERATURE:</b>	21 C
		<b>HUMIDITY:</b>	27% RH
		<b>TIME:</b>	12:00 PM


<b>Standard:</b>	FCC CFR 47, Part 15, 15.247(a)(2)
<b>Description:</b>	Occupied Bandwidth Measurement
<b>Results:</b>	6dB bandwidth is at least 500 kHz.

<b>TEST RESULTS SUMMARY</b>	
<b>Data</b>	<b>Result</b>
Channel 1 Occupied Bandwidth	12.83 MHz 6 dB Bandwidth
Channel 6 Occupied Bandwidth	12.75 MHz 6 dB Bandwidth
Channel 11 Occupied Bandwidth	12.925 MHz 6dB Bandwidth


OCCUPIED BANDWIDTH MEASUREMENT (Continued)

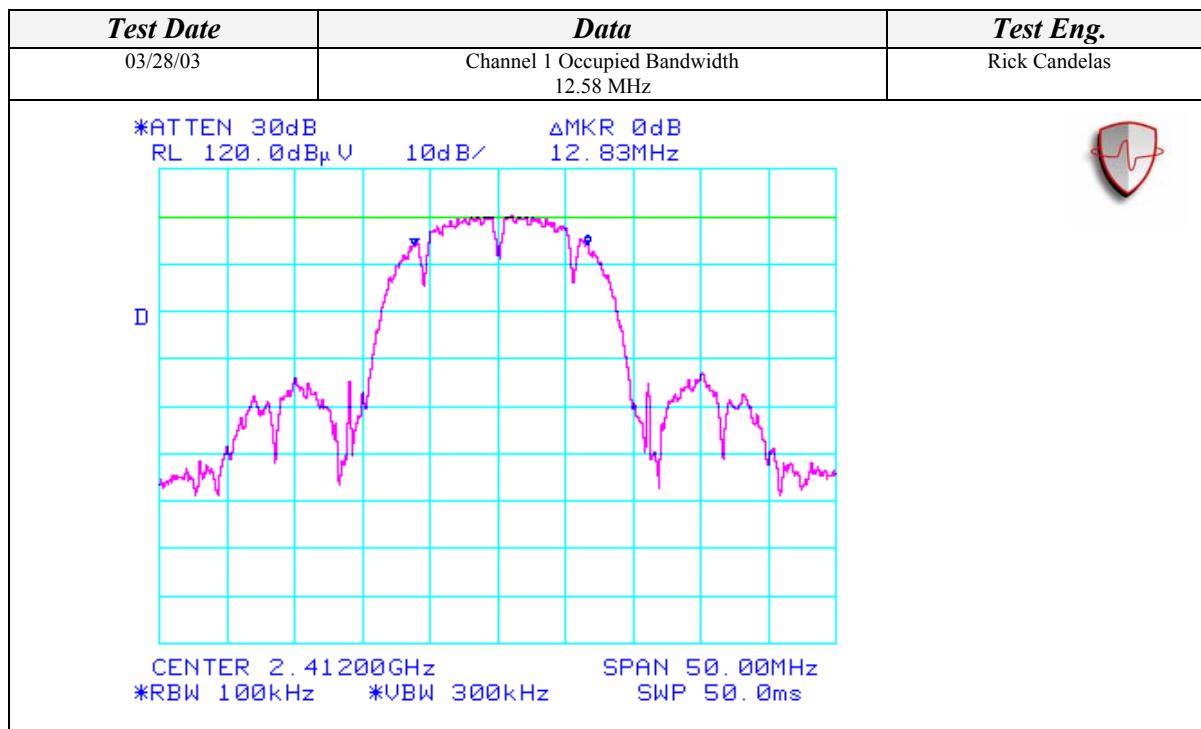

OCCUPIED BANDWIDTH MEASUREMENT (Continued)

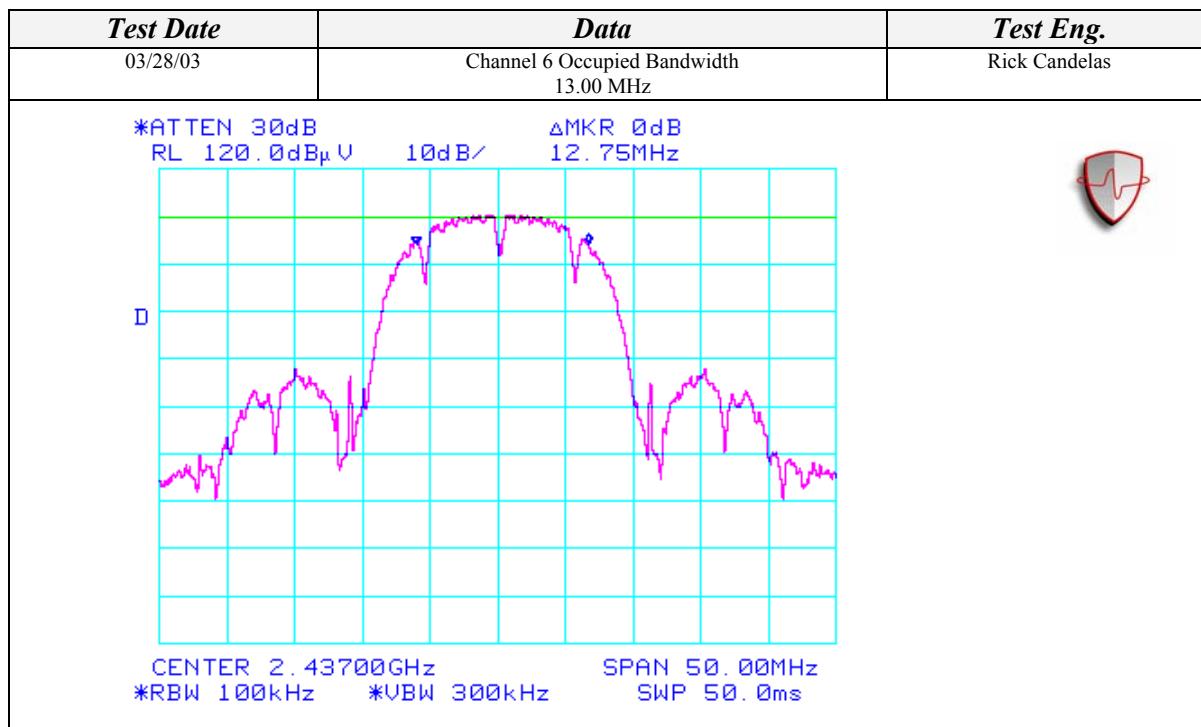

OCCUPIED BANDWIDTH MEASUREMENT (Continued)

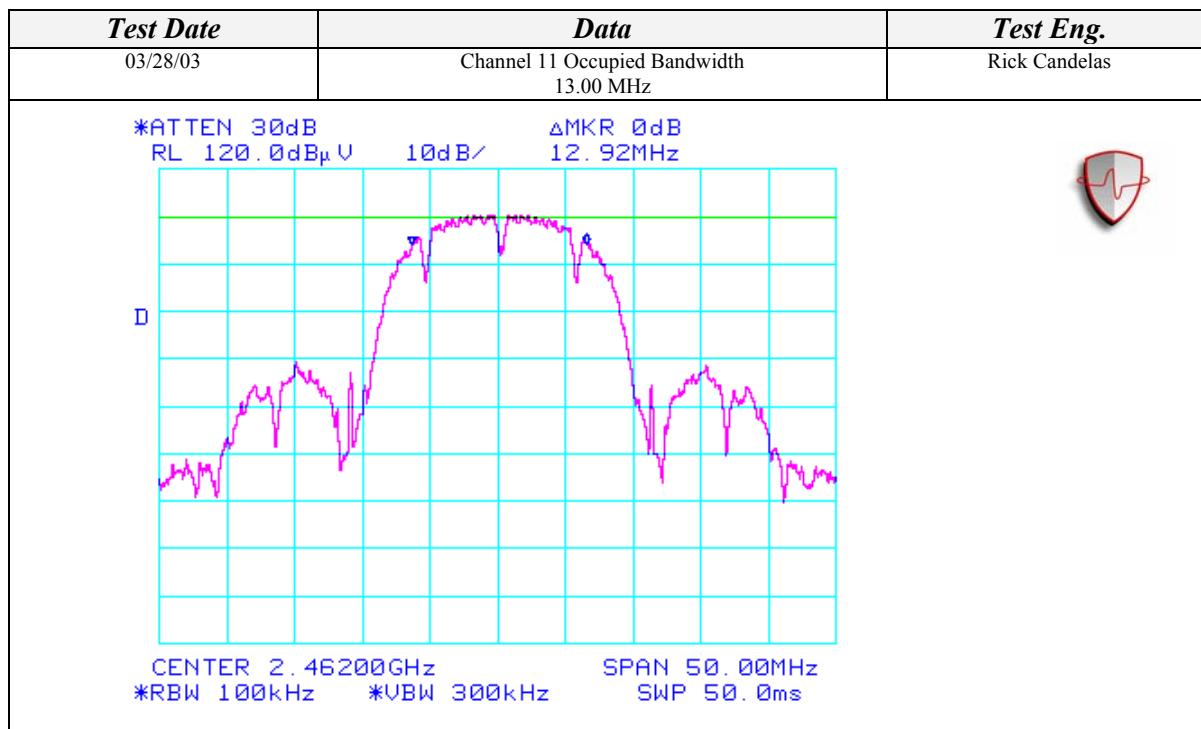


**SPECTRAL POWER DENSITY MEASUREMENT**

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	03/28/03
<b>EUT:</b>	802.11b MiniPCI Type 3A Wireless Module	<b>PROJECT NUMBER:</b>	INTEL-030328-08
<b>MODEL NUMBER:</b>	WM3A2100	<b>TEST ENGINEER:</b>	Rick Candelas
<b>SERIAL NUMBER:</b>	000423468079	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Installed in Dell Computer Corporation laptop computer (PPT Chassis).	<b>TEMPERATURE:</b>	21 C
		<b>HUMIDITY:</b>	27% RH
		<b>TIME:</b>	12:30 PM


<b>Standard:</b>	FCC CFR 47, Part 15, 15.247(D)
<b>Description:</b>	Power Spectral Density Measurement
<b>Results:</b>	Transmitted power density averaged over any 1 second interval is not greater than 8 dBm in any 3 kHz bandwidth within these bands

<b>TEST RESULTS SUMMARY</b>	
<b>Data</b>	<b>Result</b>
Channel 1 Power Spectral Density	-7.33 dBm – Pass
Channel 6 Power Spectral Density	-7.83 dBm – Pass
Channel 11 Power Spectral Density	-8.00 dBm - Pass


SPECTRAL POWER DENSITY MEASUREMENT (Continued)

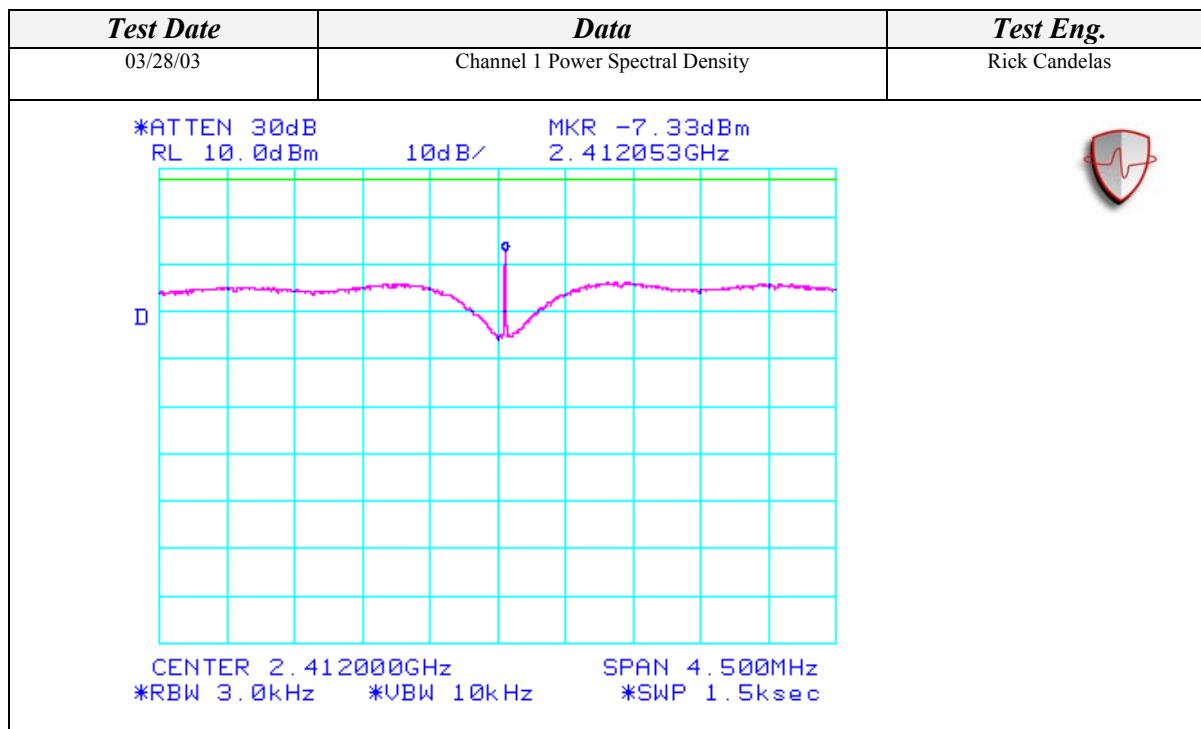

SPECTRAL POWER DENSITY MEASUREMENT (Continued)

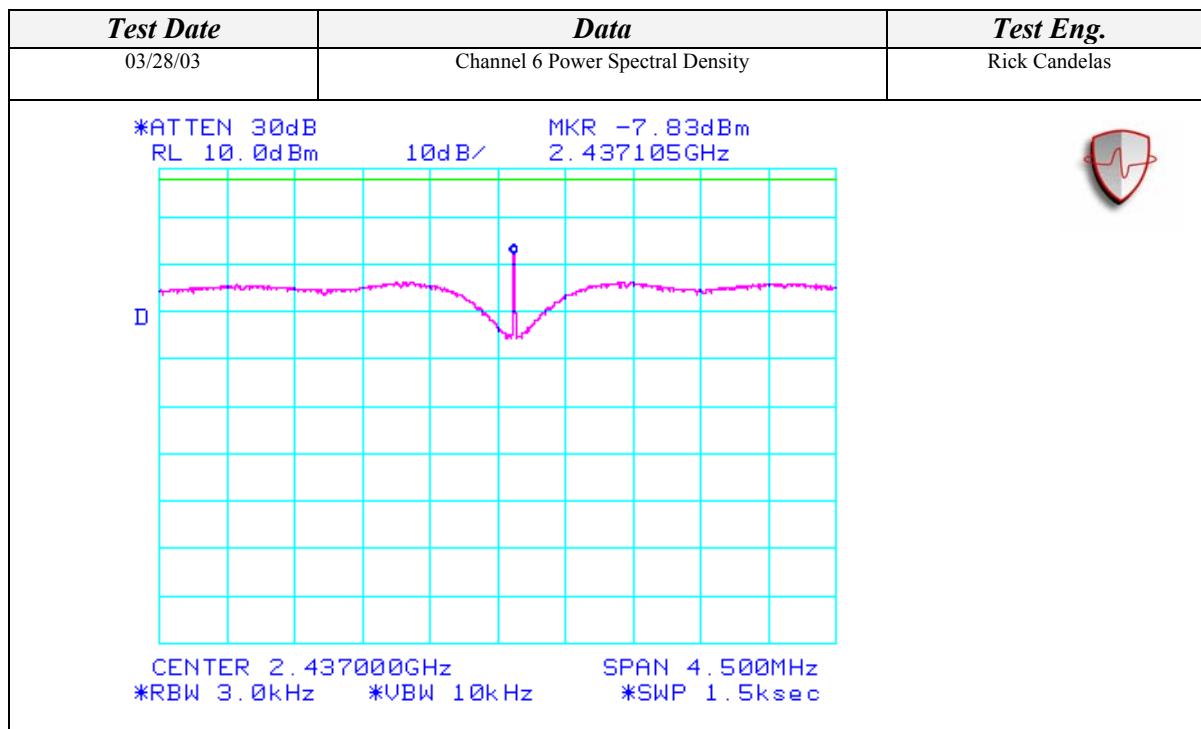

SPECTRAL POWER DENSITY MEASUREMENT (Continued)

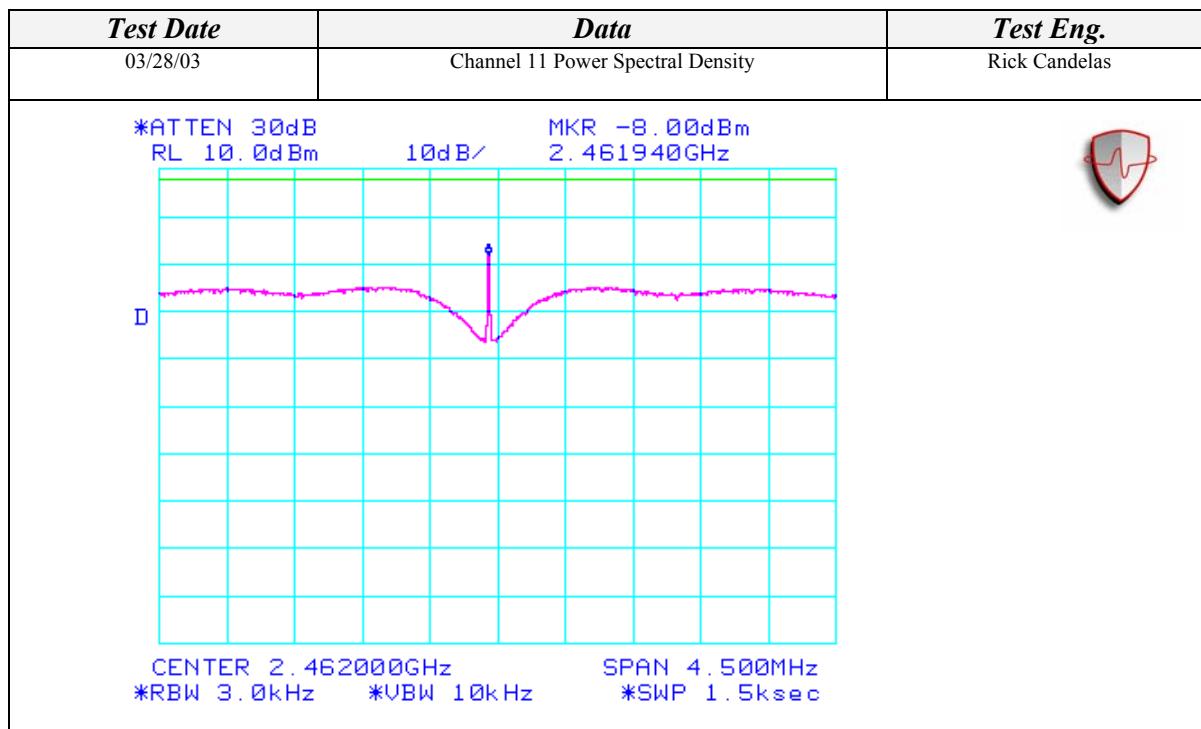

**SPURIOUS EMISSIONS MEASUREMENT AT THE ANTENNA TERMINAL**

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	03/28/03
<b>EUT:</b>	802.11b MiniPCI Type 3A Wireless Module	<b>PROJECT NUMBER:</b>	INTEL-030328-08
<b>MODEL NUMBER:</b>	WM3A2100	<b>TEST ENGINEER:</b>	Rick Candelas
<b>SERIAL NUMBER:</b>	000423468079	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Installed in Dell Computer Corporation laptop computer (PPT Chassis).	<b>TEMPERATURE:</b>	21 C
		<b>HUMIDITY:</b>	27% RH
		<b>TIME:</b>	1:00 PM

<b>Standard:</b>	FCC CFR 47, Part 15, 15.247(c)
<b>Description:</b>	Conducted Spurious Emissions
<b>Results:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

<b>TEST RESULTS SUMMARY</b>	
<b>Data</b>	<b>Result</b>
Channel 1 Spurious Emissions – Antenna Terminal - 30MHz – 2GHz	Max Spur Signal @ -57.50 dBm – Pass
Channel 1 Spurious Emissions – Antenna Terminal - 2GHz – 10GHz	Max Spur Signal @ -53.00 dBm – Pass
Channel 1 Spurious Emissions – Antenna Terminal - 10GHz – 20GHz	Max Spur Signal @ -50.17 dBm – Pass
Channel 1 Spurious Emissions – Antenna Terminal - 20GHz – 26.5GHz	Max Spur Signal @ -47.00 dBm – Pass
Channel 6 Spurious Emissions – Antenna Terminal - 30MHz – 2GHz	Max Spur Signal @ -56.67 dBm – Pass
Channel 6 Spurious Emissions – Antenna Terminal - 2GHz – 10GHz	Max Spur Signal @ -51.00 dBm – Pass
Channel 6 Spurious Emissions – Antenna Terminal - 10GHz – 20GHz	Max Spur Signal @ -50.83 dBm – Pass
Channel 6 Spurious Emissions – Antenna Terminal - 20GHz – 26.5GHz	Max Spur Signal @ -46.17 dBm – Pass
Channel 11 Spurious Emissions – Antenna Terminal - 30MHz – 2GHz	Max Spur Signal @ -57.67 dBm – Pass
Channel 11 Spurious Emissions – Antenna Terminal - 2GHz – 10GHz	Max Spur Signal @ -53.00 dBm – Pass
Channel 11 Spurious Emissions – Antenna Terminal - 10GHz – 20GHz	Max Spur Signal @ -50.67 dBm – Pass
Channel 11 Spurious Emissions – Antenna Terminal - 20GHz – 26.5GHz	Max Spur Signal @ -46.67 dBm – Pass

**SPURIOUS EMISSIONS MEASUREMENT AT THE ANTENNA TERMINAL  
(Continued)**

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 1 Spurious Emissions – Antenna Terminal 30 MHz – 2 GHz	Rick Candelas
	<p style="text-align: center;">*ATTEN 30dB RL 10.0dBm 10dB/</p> <p style="text-align: center;">MKR -57.50dBm 506MHz</p> <p style="text-align: center;">START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>	


<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 1 Spurious Emissions – Antenna Terminal 2 GHz – 10 GHz	Rick Candelas
	<p style="text-align: center;">*ATTEN 30dB RL 10.0dBm 10dB/</p> <p style="text-align: center;">MKR 3.00dBm 2.400GHz</p> <p style="text-align: center;">START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>	


**SPURIOUS EMISSIONS MEASUREMENT AT THE ANTENNA TERMINAL  
(Continued)**

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 1 Spurious Emissions – Antenna Terminal 10 GHz - 20 GHz	Rick Candelas
	<p>*ATTEN 30dB RL 10.0dBm 10dB/</p> <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>	

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 1 Spurious Emissions – Antenna Terminal 20 GHz - 26.5 GHz	Rick Candelas
	<p>*ATTEN 30dB RL 10.0dBm 10dB/</p> <p>START 20.000GHz STOP 26.500GHz *RBW 100kHz *VBW 300kHz SWP 3.60sec</p>	

**SPURIOUS EMISSIONS MEASUREMENT AT THE ANTENNA TERMINAL  
(Continued)**
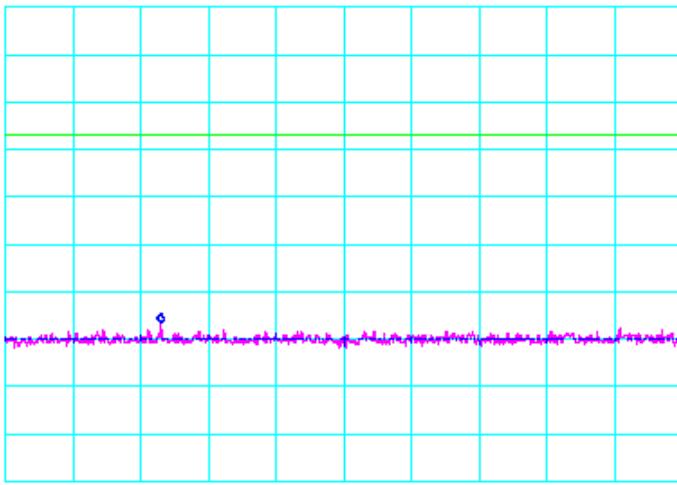
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 6 Spurious Emissions – Antenna Terminal 30 MHz – 2 GHz	Rick Candelas
<p>*ATTEN 30dB RL 10.0dBm 10dB/</p>  <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>		

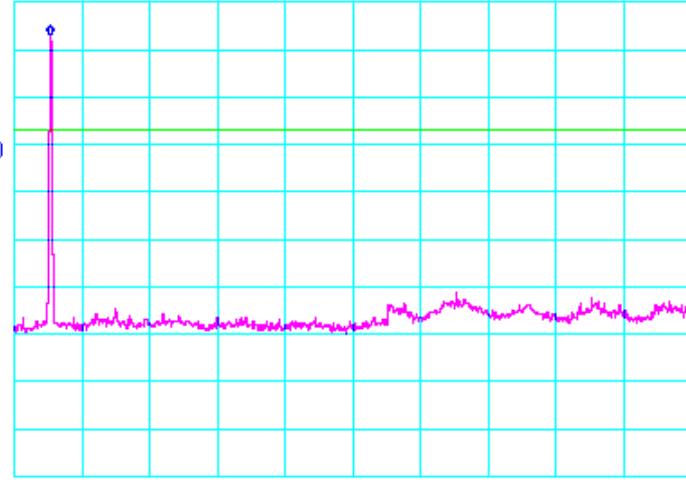
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 6 Spurious Emissions – Antenna Terminal 2 GHz – 10 GHz	Rick Candelas
<p>*ATTEN 30dB RL 10.0dBm 10dB/</p>  <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>		


**SPURIOUS EMISSIONS MEASUREMENT AT THE ANTENNA TERMINAL  
(Continued)**

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 6 Spurious Emissions – Antenna Terminal 10 GHz - 20 GHz	Rick Candelas
	<p>*ATTEN 30dB RL 10.0dBm 10dB/</p> <p>MKR -50.83dBm 13.25GHz</p> <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>	

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 6 Spurious Emissions – Antenna Terminal 20 GHz - 26.5 GHz	Rick Candelas
	<p>*ATTEN 30dB RL 10.0dBm 10dB/</p> <p>MKR -46.17dBm 24.583GHz</p> <p>START 20.000GHz STOP 26.500GHz *RBW 100kHz *VBW 300kHz SWP 3.60sec</p>	

**SPURIOUS EMISSIONS MEASUREMENT AT THE ANTENNA TERMINAL  
(Continued)**
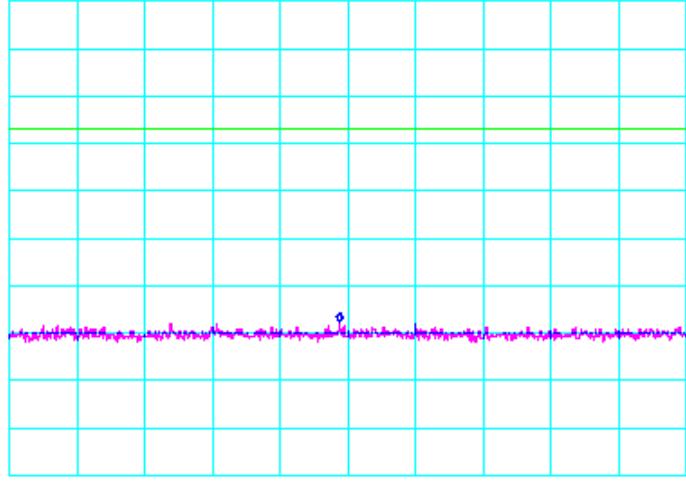
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 11 Spurious Emissions – Antenna Terminal 30 MHz – 2 GHz	Rick Candelas
	<p>*ATTEN 30dB RL 10.0dBm 10dB/</p>  <p>MKR -57.67 dBm 992MHz</p> <p>D</p> <p>START 30MHz STOP 2.000GHz *RBW 100kHz *VBW 300kHz SWP 1.10sec</p>	
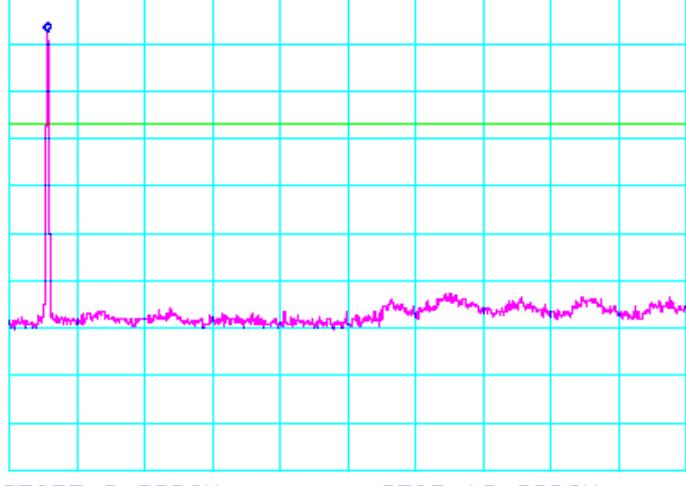
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 11 Spurious Emissions – Antenna Terminal 2 GHz – 10 GHz	Rick Candelas
	<p>*ATTEN 30dB RL 10.0dBm 10dB/</p>  <p>MKR 2.50dBm 2.453GHz</p> <p>D</p> <p>START 2.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 4.40sec</p>	

**SPURIOUS EMISSIONS MEASUREMENT AT THE ANTENNA TERMINAL  
(Continued)**

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 11 Spurious Emissions – Antenna Terminal 10 GHz - 20 GHz	Rick Candelas
	<p>*ATTEN 30dB RL 10.0dBm 10dB/</p> <p>MKR -50.67dBm 14.17GHz</p> <p>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>	

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 11 Spurious Emissions – Antenna Terminal 20 GHz - 26.5 GHz	Rick Candelas
	<p>*ATTEN 30dB RL 10.0dBm 10dB/</p> <p>MKR -46.67dBm 25.406GHz</p> <p>START 20.000GHz STOP 26.500GHz *RBW 100kHz *VBW 300kHz SWP 3.60sec</p>	


**BAND EDGE EMISSIONS MEASUREMENT AT THE ANTENNA TERMINAL**


<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	03/28/03
<b>EUT:</b>	802.11b MiniPCI Type 3A Wireless Module	<b>PROJECT NUMBER:</b>	INTEL-030328-08
<b>MODEL NUMBER:</b>	WM3A2100	<b>TEST ENGINEER:</b>	Rick Candelas
<b>SERIAL NUMBER:</b>	000423468079	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Installed in Dell Computer Corporation laptop computer (PPT Chassis).	<b>TEMPERATURE:</b>	21 C
		<b>HUMIDITY:</b>	27% RH
		<b>TIME:</b>	1:30 PM

<b>Standard:</b>	FCC CFR 47, Part 15, 15.247(c)
<b>Description:</b>	Conducted Band Edge Emissions
<b>Results:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


<b>TEST RESULTS SUMMARY</b>	
<b>Data</b>	<b>Result</b>
Channel 1 Band Edge Measurement Peak Measurement @ 2390 MHz	>20 dBc – Pass
Channel 1 Band Edge Measurement Average Measurement @ 2390 MHz	55.04 dBuV - Pass
Channel 11 Band Edge Measurement Peak Measurement @ 2483.5 MHz	>20 dBc – Pass
Channel 11 Band Edge Measurement Average Measurement @ 2483.5 MHz	56.78 dBuV - Pass


**CONDUCTED BAND EDGE EMISSIONS MEASUREMENT (Continued)**
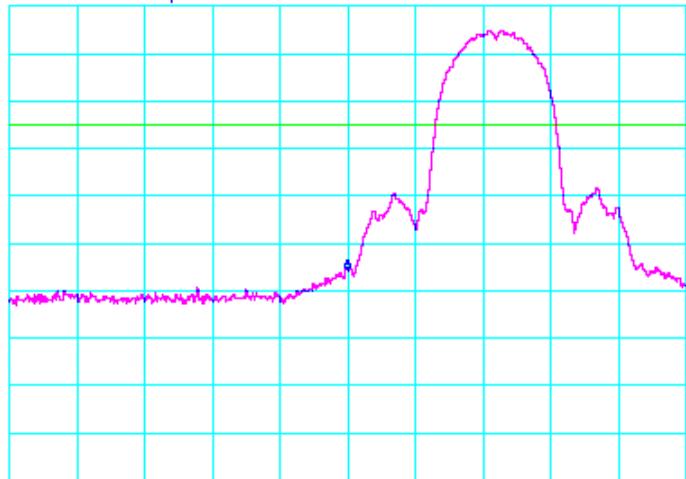
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 1 Band Edge Measurement Peak Measurement @ 2390 MHz	Rick Candelas
	<p style="text-align: center;">*ATTEN 30dB RL 120.0dB<math>\mu</math>V 10dB/</p>  <p style="text-align: center;">MKR 64.33dB<math>\mu</math>V 2.3900GHz</p> <p style="text-align: center;">D</p> <p style="text-align: center;">CENTER 2.3900GHz SPAN 100.0MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>	
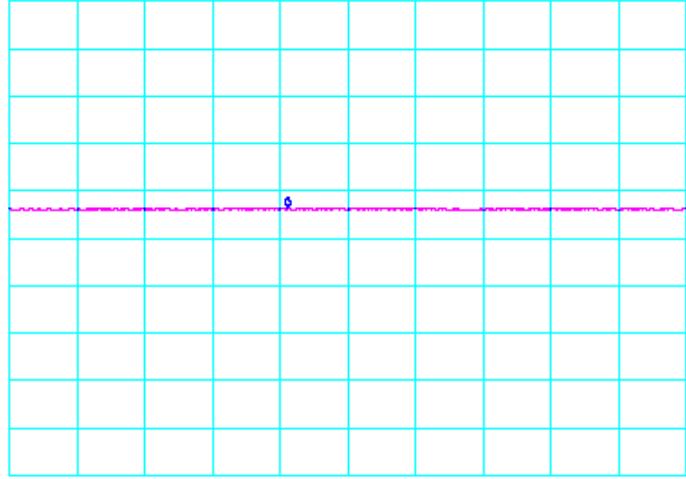
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 1 Band Edge Measurement Average Measurement @ 2390 MHz	Rick Candelas
	<p style="text-align: center;">*ATTEN 30dB RL 60.0dB<math>\mu</math>V LIN</p>  <p style="text-align: center;">MKR 55.04dB<math>\mu</math>V 8.233sec</p> <p style="text-align: center;">D</p> <p style="text-align: center;">CENTER 2.390000000GHz SPAN 0Hz *RBW 1.0MHz *VBW 10Hz *SWP 20.0sec</p>	

**CONDUCTED BAND EDGE EMISSIONS MEASUREMENT (Continued)**

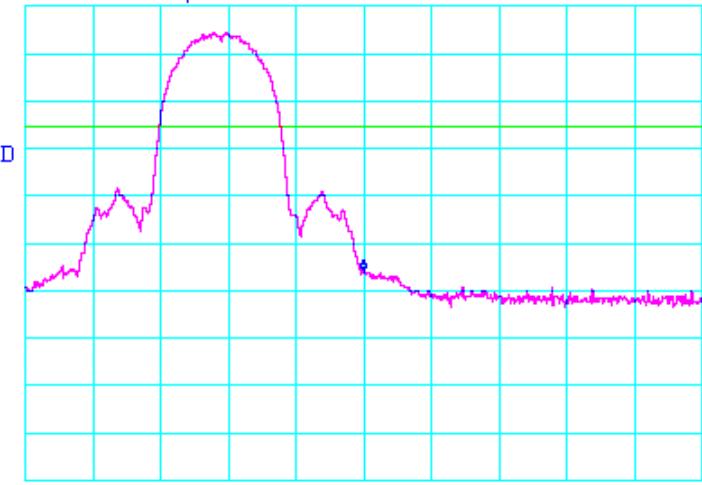
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 11 Band Edge Measurement Peak Measurement @ 2483.5 MHz	Rick Candelas
<p style="text-align: center;">         *ATTEN 30dB          RL 120.0dB<math>\mu</math>V 10dB/   </p>  <p style="text-align: center;">         CENTER 2.4835GHz SPAN 100.0MHz          *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms       </p>		
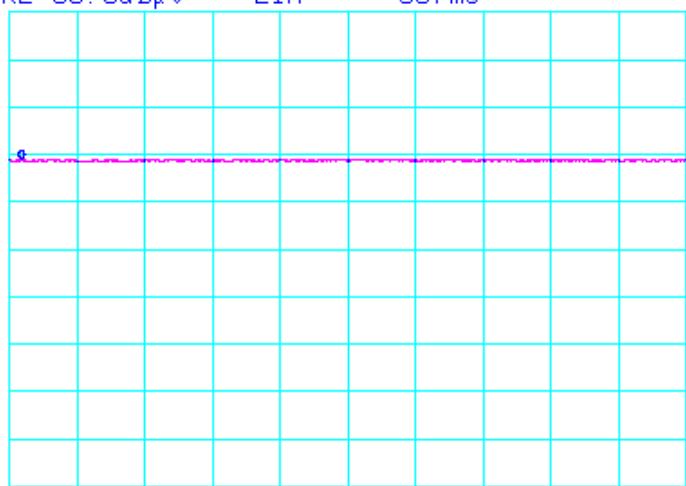
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
03/28/03	Channel 11 Band Edge Measurement Average Measurement @ 2483.5 MHz	Rick Candelas
<p style="text-align: center;">         *ATTEN 30dB          RL 60.0dB<math>\mu</math>V LIN 367ms   </p>  <p style="text-align: center;">         CENTER 2.483500000GHz SPAN 0Hz          *RBW 1.0MHz *VBW 10Hz *SWP 20.0sec       </p>		

**ALL CONDUCTED MEASUREMENTS SETUP**

<b>TEST EQUIPMENT USED</b>					
<b>Equipment Name</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Calibration Due Date</b>	<b>Calibration Cycle</b>
Spectrum Analyzer	Agilent	8564EC	4046A00387	02/28/04	2 Years
DC Block	Inmet	8039	N/A	N/A	N/A
Power Meter	Rohde & Schwarz	NRVS	DE30863	11/24/03	1 Year
Power Sensor	Leistungsmesskoph	NRV-Z5	844855/012	11/24/03	1 Year
Temperature / Humidity Monitor	Dickson	TH550	7255185	01/08/04	1 Year

<b>ACCESSORIES EQUIPMENT</b>			
<b>Equipment Name</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>
Latitude D400 Laptop	Dell	PPT Chassis	8142Y010093232601052M000
AC Adapter	Dell	HP-OQ065B83	CN-05U092-47890-31D-0049
Monitor	NEC	JC-1575VMA	2Y785821
Modem	Hayes	5362US	A02153623145

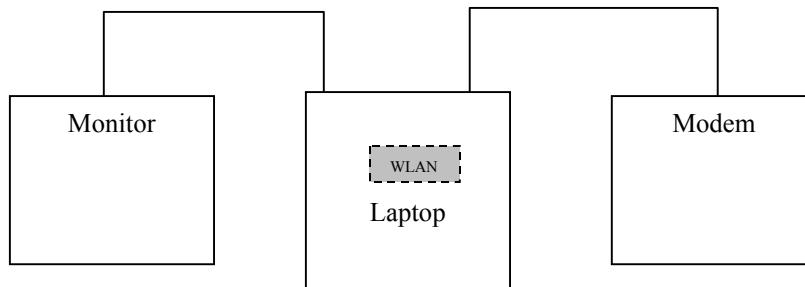**BLOCK DIAGRAM**

ALL CONDUCTED MEASUREMENTS SETUP (Continued)

PHOTOGRAPHS

