

Class II Permissive Change  
 Test Report  
 And Application for Grant of Equipment Authorization

*TEST REPORT PERTAINING TO:*

Equipment Under Test	Model Number(s)
Intel WiFi Link 5300	533AN_HMW

**CONFIGURATION**

IEEE 802.11a / 802.11b / 802.11g / 802.11n with a set of  
 Tyco Stamped PIFA Antennas

*MEASUREMENTS PERFORMED IN ACCORDANCE WITH THE FOLLOWING STANDARD (S)*

Regulatory Standard(s)
47 CFR Part 15, Subpart E Section 15.407 (UNII Devices)

Test Method:  
 ANSI C63.4: 2003 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



Certificate Number: 1111.01

**PREPARED FOR:**

Dell Computer Corporation  
 One Dell Way  
 Round Rock, TX 78682  
 Contact(s): Mr. Jason Limoges



**PREPARED BY:**

Aegis Labs, Inc.  
 8 Rancho Circle  
 Lake Forest, CA 92630  
 Agent(s): Mr. Rick Candelas  
 Mr. Johnny Candelas  
 Mr. Kevin Navares

Test Report #: INTEL-080324F

Test Report Revision: A1

	REPORT BODY	APPENDICES		TOTAL PAGES
		A	B	
PAGES	34	86	1	121

The contents of this report shall not be reproduced except in full, without the written approval of Aegis Labs, Inc.  
 The Dell logo is used for identification purposes only and is a registered trademark of Dell Computer Corporation



## TABLE OF CONTENTS

SECTION	TITLE	PAGE
	<b>COVER SHEET</b> .....	<b>01</b>
	<b>TABLE OF CONTENTS</b> .....	<b>02</b>
<b>1.0</b>	<b>REGULATORY COMPLIANCE GUIDELINES</b> .....	<b>03</b>
1.1	Guidelines For Testing To Emissions Standards.....	03
<b>2.0</b>	<b>SUMMARY OF REGULATORY LIMITS</b> .....	<b>04</b>
<b>3.0</b>	<b>ADMINISTRATIVE DATA AND TEST DESCRIPTION</b> .....	<b>28</b>
<b>4.0</b>	<b>DESCRIPTION OF EUT CONFIGURATION</b> .....	<b>29</b>
4.1	EUT Description .....	29
4.2	EUT Configuration.....	30
4.3	List of EUT Sub-Assemblies and Host Equipment .....	30
4.4	I/O Cabling Diagram and Description .....	31
4.5	EMC Test Hardware and Software Measurement Equipment.....	32
<b>5.0</b>	<b>CONDITIONS DURING EMISSIONS MEASUREMENTS</b> .....	<b>33</b>
5.1	General.....	33
5.2	Conducted Emissions Test Setup.....	33
5.3	Radiated Emissions Test Setup.....	34

## APPENDICES

<b>A</b>	Test Data
<b>B</b>	Modifications And Recommendations

## 1.0 REGULATORY COMPLIANCE GUIDELINES

Aegis Labs, Inc. operates as both a Nevada and California Corporation with no organizational or financial relationship with any company, institution, or private individual. Testing and engineering functions provided by Aegis Labs were furnished by RF technicians and engineers with accredited qualifications and training credentials to carry out their duties.

The object of this report was to publish verifiable test results of an EUT subjected to the tests outlined in the standard listed on the cover page of this report.

### 1.1 Guidelines For Testing To Emissions Standards

This standard for EMC emission requirements apply to electrical equipment for Information Technology Equipment (ITE). Compliance to these standards and in combination with the other standards listed in this test report can be used to demonstrate presumption of compliance with the protection requirements of the appropriate agency standard.

The purpose of this standard is to specify minimum requirements for emissions regarding electromagnetic compatibility (EMC) and protect the radio frequency spectrum 9 kHz. – 400 GHz. from unwanted interference generated from electrical/digital systems that intentionally or unintentionally generated RF energy. The emissions standards, normative documents and/or publications were used to conduct all tests performed on the equipment herein referred to as “Equipment Under Test”.

## 2.0 SUMMARY OF TEST RESULTS

### 802.11a Mode (5150-5350 MHz) Chain A EMISSIONS STANDARD

FCC Part 15 Section	Description	Results	Comments
<b>Operation in the 5.15-5.25 GHz Band</b>			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.18 GHz = 21.58 MHz 5.20 GHz = 22.33 MHz 5.24 GHz = 21.67 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or $4\text{dBm}+10\log B$ (where B = 26dB emissions bandwidth).	PASSED	5.18 GHz = 16.04dBm (40.21mW) 5.20 GHz = 16.29dBm (42.60mW) 5.24 GHz = 16.24dBm (42.11mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.18 GHz = 1.64dBm 5.20 GHz = 1.34dBm 5.24 GHz = 1.47dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets

## 2.0 Summary Of Test Results (Continued)

<b>EMISSIONS STANDARD</b>			
<b>FCC Part 15 Section</b>	<b>Description</b>	<b>Results</b>	<b>Comments</b>
<b>Operation in the 5.25-5.35 GHz Band</b>			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.26 GHz = 22.42 MHz 5.28 GHz = 22.50 MHz 5.32 GHz = 21.58 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.26 GHz = 16.34dBm (43.09mW) 5.28 GHz = 16.34dBm (43.09mW) 5.32 GHz = 16.44dBm (44.09mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.26 GHz = 2.38dBm 5.28 GHz = 2.06dBm 5.32 GHz = 1.89dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.18 GHz = 5.84 dB 5.20 GHz = 5.50 dB 5.24 GHz = 6.00 dB 5.26 GHz = 6.50 dB 5.28 GHz = 6.00 dB 5.32 GHz = 5.67 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>



## 2.0    Summary Of Test Results (Continued)

### **802.11a Mode (5150-5350 MHz) Chain B EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
<b>Operation in the 5.15-5.25 GHz Band</b>			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.18 GHz = 22.17 MHz 5.20 GHz = 21.50 MHz 5.24 GHz = 20.67 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or $4\text{dBm}+10\log B$ (where B = 26dB emissions bandwidth).	PASSED	5.18 GHz = 16.34dBm (43.09mW) 5.20 GHz = 16.19dBm (41.63mW) 5.24 GHz = 16.44dBm (44.09mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.18 GHz = -4.57dBm 5.20 GHz = 1.20dBm 5.24 GHz = 1.50dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets

## 2.0 Summary Of Test Results (Continued)

<b>EMISSIONS STANDARD</b>			
<b>FCC Part 15 Section</b>	<b>Description</b>	<b>Results</b>	<b>Comments</b>
<b>Operation in the 5.25-5.35 GHz Band</b>			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.26 GHz = 21.25 MHz 5.28 GHz = 21.08 MHz 5.32 GHz = 21.25 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.26 GHz = 16.29dBm (42.60mW) 5.28 GHz = 16.24dBm (42.11mW) 5.32 GHz = 16.54dBm (45.12mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.26 GHz = 1.75dBm 5.28 GHz = 1.58dBm 5.32 GHz = 1.99dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.18 GHz = 5.66 dB 5.20 GHz = 5.67 dB 5.24 GHz = 6.17 dB 5.26 GHz = 6.50 dB 5.28 GHz = 5.16 dB 5.32 GHz = 5.83 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>



## 2.0    Summary Of Test Results (Continued)

### **802.11a Mode (5150-5350 MHz) Chain C EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
<b>Operation in the 5.15-5.25 GHz Band</b>			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.18 GHz = 22.33 MHz 5.20 GHz = 22.25 MHz 5.24 GHz = 22.17 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or $4\text{dBm}+10\log B$ (where B = 26dB emissions bandwidth).	PASSED	5.18 GHz = 16.54dBm (45.12mW) 5.20 GHz = 16.49dBm (44.60mW) 5.24 GHz = 16.64dBm (46.17mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.18 GHz = 0.61dBm 5.20 GHz = 2.48dBm 5.24 GHz = 2.63dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets

## 2.0 Summary Of Test Results (Continued)

<b>EMISSIONS STANDARD</b>			
<b>FCC Part 15 Section</b>	<b>Description</b>	<b>Results</b>	<b>Comments</b>
<b>Operation in the 5.25-5.35 GHz Band</b>			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.26 GHz = 21.92 MHz 5.28 GHz = 21.58 MHz 5.32 GHz = 21.75 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.26 GHz = 16.64dBm (46.17mW) 5.28 GHz = 16.64dBm (46.17mW) 5.32 GHz = 16.54dBm (45.12mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.26 GHz = 2.23dBm 5.28 GHz = 2.20dBm 5.32 GHz = 2.13dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.18 GHz = 5.50 dB 5.20 GHz = 6.17 dB 5.24 GHz = 5.50 dB 5.26 GHz = 5.84 dB 5.28 GHz = 5.67 dB 5.32 GHz = 6.17 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>



## 2.0    Summary Of Test Results (Continued)

### **802.11n Mode 20MHz Wide (5150-5350 MHz) Chain A EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
<b>Operation in the 5.15-5.25 GHz Band</b>			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.18 GHz = 22.08 MHz 5.20 GHz = 21.92 MHz 5.24 GHz = 22.08 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or $4\text{dBm}+10\log B$ (where B = 26dB emissions bandwidth).	PASSED	5.18 GHz = 16.04dBm (40.21mW) 5.20 GHz = 16.24dBm (42.11mW) 5.24 GHz = 16.19dBm (41.63mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.18 GHz = 0.98dBm 5.20 GHz = 1.27dBm 5.24 GHz = 1.30dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets

## 2.0 Summary Of Test Results (Continued)

<b>EMISSIONS STANDARD</b>			
<b>FCC Part 15 Section</b>	<b>Description</b>	<b>Results</b>	<b>Comments</b>
<b>Operation in the 5.25-5.35 GHz Band</b>			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.26 GHz = 22.17 MHz 5.28 GHz = 22.50 MHz 5.32 GHz = 21.83 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.26 GHz = 16.29dBm (42.60mW) 5.28 GHz = 16.24dBm (42.11mW) 5.32 GHz = 16.04dBm (40.21mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.26 GHz = 2.01dBm 5.28 GHz = 2.00dBm 5.32 GHz = 1.31dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.18 GHz = 5.33 dB 5.20 GHz = 6.67 dB 5.24 GHz = 5.83 dB 5.26 GHz = 5.83 dB 5.28 GHz = 5.67 dB 5.32 GHz = 6.00 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0    Summary Of Test Results (Continued)

**802.11n Mode 20MHz Wide (5150-5350 MHz) Chain B**  
**EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
<b>Operation in the 5.15-5.25 GHz Band</b>			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.18 GHz = 22.25 MHz 5.20 GHz = 22.25 MHz 5.24 GHz = 22.00 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or $4\text{dBm}+10\log B$ (where B = 26dB emissions bandwidth).	PASSED	5.18 GHz = 16.04dBm (40.21mW) 5.20 GHz = 16.44dBm (44.09mW) 5.24 GHz = 16.14dBm (41.15mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.18 GHz = 0.98dBm 5.20 GHz = 2.04dBm 5.24 GHz = 1.12dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets

## 2.0 Summary Of Test Results (Continued)

<b>EMISSIONS STANDARD</b>			
<b>FCC Part 15 Section</b>	<b>Description</b>	<b>Results</b>	<b>Comments</b>
<b>Operation in the 5.25-5.35 GHz Band</b>			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.26 GHz = 21.75 MHz 5.28 GHz = 22.08 MHz 5.32 GHz = 21.75 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.26 GHz = 16.54dBm (45.12mW) 5.28 GHz = 16.44dBm (44.09mW) 5.32 GHz = 16.34dBm (43.09mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.26 GHz = 2.54dBm 5.28 GHz = 1.93dBm 5.32 GHz = 1.53dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.18 GHz = 5.84 dB 5.20 GHz = 5.67 dB 5.24 GHz = 5.83 dB 5.26 GHz = 5.83 dB 5.28 GHz = 6.00 dB 5.32 GHz = 6.00 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>



## 2.0 Summary Of Test Results (Continued)

### **802.11n Mode 20MHz Wide (5150-5350 MHz) Chain C EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
<b>Operation in the 5.15-5.25 GHz Band</b>			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.18 GHz = 22.58 MHz 5.20 GHz = 21.83 MHz 5.24 GHz = 21.83 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or 4dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.18 GHz = 16.44dBm (44.09mW) 5.20 GHz = 16.34dBm (43.09mW) 5.24 GHz = 16.54dBm (45.12mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.18 GHz = 2.02dBm 5.20 GHz = 1.65dBm 5.24 GHz = 2.19dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets

## 2.0 Summary Of Test Results (Continued)

<b>EMISSIONS STANDARD</b>			
<b>FCC Part 15 Section</b>	<b>Description</b>	<b>Results</b>	<b>Comments</b>
<b>Operation in the 5.25-5.35 GHz Band</b>			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.26 GHz = 22.00 MHz 5.28 GHz = 22.58 MHz 5.32 GHz = 21.67 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.26 GHz = 16.54dBm (45.12mW) 5.28 GHz = 16.54dBm (45.12mW) 5.32 GHz = 16.44dBm (44.09mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.26 GHz = 2.13dBm 5.28 GHz = 2.21dBm 5.32 GHz = 1.75dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.18 GHz = 6.00 dB 5.20 GHz = 6.00 dB 5.24 GHz = 5.83 dB 5.26 GHz = 5.66 dB 5.28 GHz = 5.66 dB 5.32 GHz = 5.84 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0 Summary Of Test Results (Continued)

**802.11n Mode 40MHz Wide (5150-5350 MHz) Chain A**

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
<b>Operation in the 5.15-5.25 GHz Band</b>			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.19 GHz = 39.92 MHz 5.23 GHz = 39.50 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or 4dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.19 GHz = 16.60dBm (45.69mW) 5.23 GHz = 16.64dBm (46.11mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.19 GHz = -2.81dBm 5.23 GHz = -2.43dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
<b>Operation in the 5.25-5.35 GHz Band</b>			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.27 GHz = 39.50 MHz 5.31 GHz = 39.67 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.27 GHz = 16.65dBm (46.21mW) 5.31 GHz = 16.38dBm (43.43mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.27 GHz = -2.05dBm 5.31 GHz = -2.43dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.19 GHz = 5.83 dB 5.23 GHz = 6.50 dB 5.27 GHz = 6.33 dB 5.31 GHz = 6.34 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0 Summary Of Test Results (Continued)

**802.11n Mode 40MHz Wide (5150-5350 MHz) Chain B**

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
<b>Operation in the 5.15-5.25 GHz Band</b>			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.19 GHz = 39.67 MHz 5.23 GHz = 39.75 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or 4dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.19 GHz = 16.64dBm (46.11mW) 5.23 GHz = 16.47dBm (44.34mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.19 GHz = -1.75dBm 5.23 GHz = -1.75dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
<b>Operation in the 5.25-5.35 GHz Band</b>			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.27 GHz = 39.75 MHz 5.31 GHz = 39.75 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.27 GHz = 16.32dBm (42.83mW) 5.31 GHz = 16.62dBm (45.90mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.27 GHz = -2.64dBm 5.31 GHz = -1.70dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.19 GHz = 5.84 dB 5.23 GHz = 6.16 dB 5.27 GHz = 5.67 dB 5.31 GHz = 6.66 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0 Summary Of Test Results (Continued)

## 802.11n Mode 40MHz Wide (5150-5350 MHz) Chain C

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
<b>Operation in the 5.15-5.25 GHz Band</b>			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.19 GHz = 39.50 MHz 5.23 GHz = 39.58 MHz <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or 4dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.19 GHz = 16.42dBm (43.83mW) 5.23 GHz = 16.54dBm (45.06mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.19 GHz = -1.56dBm 5.23 GHz = -1.62dBm <i>Per Original Filing</i>
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
<b>Operation in the 5.25-5.35 GHz Band</b>			
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.27 GHz = 39.67 MHz 5.31 GHz = 39.67 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.27 GHz = 16.41dBm (43.73mW) 5.31 GHz = 16.33dBm (42.93mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.27 GHz = -1.95dBm 5.31 GHz = -2.74dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(2)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz. Must meet all applicable technical requirements for operating in the 5.15-5.25 GHz band.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.19 GHz = 6.00 dB 5.23 GHz = 6.16 dB 5.27 GHz = 5.66 dB 5.31 GHz = 6.17 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0    Summary Of Test Results (Continued)

**802.11a Mode (5470-5725 MHz) Chain A**  
**EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.50 GHz = 21.50 MHz 5.60 GHz = 21.67 MHz 5.70 GHz = 21.67 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.50 GHz = 16.04dBm (40.21mW) 5.60 GHz = 16.34dBm (43.09mW) 5.70 GHz = 16.04dBm (40.21mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.50 GHz = 2.12dBm 5.60 GHz = 2.16dBm 5.70 GHz = 2.50dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.50 GHz = 5.50 dB 5.60 GHz = 5.50 dB 5.70 GHz = 6.16 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0 Summary Of Test Results (Continued)

**802.11a Mode (5470-5725 MHz) Chain B**  
**EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.50 GHz = 21.17 MHz 5.60 GHz = 21.17 MHz 5.70 GHz = 20.92 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.50 GHz = 16.34dBm (43.09mW) 5.60 GHz = 16.44dBm (44.09mW) 5.70 GHz = 16.34dBm (43.09mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.50 GHz = 1.55dBm 5.60 GHz = 1.78dBm 5.70 GHz = 2.36dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.50 GHz = 5.67 dB 5.60 GHz = 5.66 dB 5.70 GHz = 5.66 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0 Summary Of Test Results (Continued)

 802.11a Mode (5470-5725 MHz) Chain C  
 EMISSIONS STANDARD

FCC Part 15 Section	Description	Results	Comments
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.50 GHz = 21.17 MHz 5.60 GHz = 21.33 MHz 5.70 GHz = 21.25 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.50 GHz = 16.14dBm (41.15mW) 5.60 GHz = 16.64dBm (46.17mW) 5.70 GHz = 16.14dBm (41.15mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.50 GHz = 2.00dBm 5.60 GHz = 2.53dBm 5.70 GHz = 2.70dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.50 GHz = 5.83 dB 5.60 GHz = 5.83 dB 5.70 GHz = 5.84 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0 Summary Of Test Results (Continued)

**802.11n Mode 20MHz Wide (5470-5725 MHz) Chain A  
EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.50 GHz = 21.67 MHz 5.60 GHz = 21.75 MHz 5.70 GHz = 21.92 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.50 GHz = 16.04dBm (40.21mW) 5.60 GHz = 16.19dBm (41.63mW) 5.70 GHz = 16.39dBm (43.59mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.50 GHz = 1.03dBm 5.60 GHz = 2.20dBm 5.70 GHz = 3.03dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.50 GHz = 5.83 dB 5.60 GHz = 7.00 dB 5.70 GHz = 6.34 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0 Summary Of Test Results (Continued)

 802.11n Mode 20MHz Wide (5470-5725 MHz) Chain B  
 EMISSIONS STANDARD

FCC Part 15 Section	Description	Results	Comments
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.50 GHz = 21.67 MHz 5.60 GHz = 21.67 MHz 5.70 GHz = 21.92 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.50 GHz = 16.04dBm (40.21mW) 5.60 GHz = 16.24dBm (42.11mW) 5.70 GHz = 16.14dBm (41.15mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.50 GHz = 1.45dBm 5.60 GHz = 2.09dBm 5.70 GHz = 1.63dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.50 GHz = 5.67 dB 5.60 GHz = 6.00 dB 5.70 GHz = 5.83 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0 Summary Of Test Results (Continued)

**802.11n Mode 20MHz Wide (5470-5725 MHz) Chain C**  
**EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.50 GHz = 22.58 MHz 5.60 GHz = 21.67 MHz 5.70 GHz = 21.58 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.50 GHz = 16.54dBm (45.12mW) 5.60 GHz = 16.54dBm (45.12mW) 5.70 GHz = 16.44dBm (44.09mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.50 GHz = 2.42dBm 5.60 GHz = 2.11dBm 5.70 GHz = 2.18dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.50 GHz = 6.66 dB 5.60 GHz = 5.67 dB 5.70 GHz = 5.84 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0 Summary Of Test Results (Continued)

 802.11n Mode 40MHz Wide (5470-5725 MHz) Chain A  
 EMISSIONS STANDARD

FCC Part 15 Section	Description	Results	Comments
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.51 GHz = 39.25 MHz 5.59 GHz = 39.42 MHz 5.67 GHz = 39.17 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.51 GHz = 16.62dBm (45.90mW) 5.59 GHz = 16.57dBm (45.37mW) 5.67 GHz = 16.32dBm (42.83mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.51 GHz = -2.16dBm 5.59 GHz = -2.25dBm 5.67 GHz = -2.62dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.51 GHz = 5.84 dB 5.59 GHz = 7.66 dB 5.67 GHz = 5.67 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0 Summary Of Test Results (Continued)

**802.11n Mode 40MHz Wide (5470-5725 MHz) Chain B**  
**EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.51 GHz = 39.58 MHz 5.59 GHz = 39.58 MHz 5.67 GHz = 39.25 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.51 GHz = 16.29dBm (42.54mW) 5.59 GHz = 16.63dBm (46.00mW) 5.67 GHz = 16.50dBm (44.65mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.51 GHz = -2.76dBm 5.59 GHz = -1.39dBm 5.67 GHz = -2.09dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.51 GHz = 6.66 dB 5.59 GHz = 7.67 dB 5.67 GHz = 5.50 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

## 2.0 Summary Of Test Results (Continued)

**802.11n Mode 40MHz Wide (5470-5725 MHz) Chain C  
EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.407(a)(2)	26dB emissions bandwidth in MHz.	N/A	5.51 GHz = 39.75 MHz 5.59 GHz = 39.92 MHz 5.67 GHz = 39.25 MHz <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power shall not exceed the lesser of 250mW or 11dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.51 GHz = 16.22dBm (41.86mW) 5.59 GHz = 16.51dBm (44.75mW) 5.67 GHz = 16.47dBm (44.34mW)
15.407(a)(2)	The peak power spectral density shall not exceed 11dBm in any 1MHz band.	PASSED	5.51 GHz = -2.55dBm 5.59 GHz = -2.77dBm 5.67 GHz = -1.66dBm <i>Per Original Filing</i>
15.407(a)(2)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	<i>See Original Filing</i>
15.407(b)(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
<b>General Requirements For All Bands</b>			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.51 GHz = 6.33 dB 5.59 GHz = 5.67 dB 5.67 GHz = 5.83 dB <i>Per Original Filing</i>
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to MPE Calculations
15.407(b)(6) 15.207	UNII devices using AC power line are required to comply with the conducted limits set forth in Section 15.207.	PASSED	<i>See Original Filing</i>

**ANALYSIS AND CONCLUSIONS**

Based upon the measurement results we find that this equipment is within the limits of the global standards listed on the cover page of this test report. All results are based on a test of one sample. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.

## Approval Signatories


**Test and Report Completed By:**

  
Johnny Candelas  
 Test Technician  
 Aegis Labs, Inc.

07/14/08

Date:

**Report Approved By:**

  
Rick Candelas  
 Date:  
 Quality Assurance & EMC Lab Manager  
 Aegis Labs, Inc.

### 3.0 ADMINISTRATIVE DATA AND TEST DESCRIPTION

<b>DEVICE TESTED:</b>	ITE Type: Intel WiFi Link 5300 Model Number(s): 533AN_HMW Serial Number: 0016EA038A16 FCC ID: E2K533ANH
<b>DATE EUT RECEIVED:</b>	June 24 <sup>th</sup> , 2008
<b>TEST DATE(S):</b>	June 25 <sup>th</sup> – July 7 <sup>th</sup> , 2008
<b>ORIGIN OF TEST SAMPLE(S):</b>	Production
<b>EQUIPMENT CLASS:</b>	EUT tested as CLASS B device
<b>RESPONSIBLE PARTY:</b>	Dell Computer Corporation One Dell Way Round Rock, TX 78682
<b>CLIENT CONTACT:</b>	Mr. Jason Limoges
<b>MANUFACTURER:</b>	Dell Computer Corporation
<b>TEST LOCATION:</b>	Aegis Labs, Inc. 32231 Trabuco Creek Road Trabuco Canyon, CA 92678 Open Area Test Site #1 & #2
<b>ACCREDITATION CERTIFICATE(s):</b>	A2LA Certificate Number: 1111.01, Valid through February 10, 2010
<b>PURPOSE OF TEST:</b>	To demonstrate compliance with the standards as described in Sections 1.0 & 2.0 of this report.
<b>UNCERTAINTY BUDGET:</b>	Proficiency Testing and Uncertainty Calculations for all tests indicated in this report have been conducted in accordance with ISO 17025: 2005 requirements Section 5.4.6, and 5.9. Uncertainty Budgets and Proficiency Test results available upon request.
<b>STATEMENT OF CALIBRATION:</b>	All accredited equipment calibrations were performed by Liberty Labs, Inc. and World Cal. with typical calibration uncertainty estimates derived from ISO Guide to the determination of uncertainties with a Coverage Factor of k=2 for 95% level of confidence.

## 4.0 DESCRIPTION OF EUT CONFIGURATION

### 4.1 EUT Description

<b>Equipment Under Test (EUT)</b>	
<b>Trade Name:</b>	Intel WiFi Link 5300
<b>Model Number:</b>	533AN_HMW
<b>Frequency Range:</b>	802.11a = 5.15-5.35 GHz 802.11n = 5.15-5.35 GHz
<b>Enclosure:</b>	The EUT contains its own shield made of aluminum approximately 2.5cm wide by 2cm deep by 2mm high.
<b>Transfer Rate:</b>	6/36/54 Mbps for 802.11a mode Up to 450 Mbps for 802.11n mode
<b>Modulation Type:</b>	DBPSK, DQPSK, CCK, OFDM
<b>Antenna Type:</b>	<u>Tyco Stamped PIFA Antennas:</u> Stamped Metal PIFA
<b>Antenna Gain (See Note 2):</b>	5.00dBi @ 5 GHz
<b>Transmit Output Power:</b>	Please see Appendix A (Data Sheets) for actual output power.
<b>Power Supply:</b>	3.3VDC from internal source
<b>Number of External Test Ports Exercised:</b>	3 Antenna Ports (Chain A, B, & C)

The Intel WiFi Link 5300 is an embedded IEEE 802.11a/b/g/n wireless network adapter that operates in the 2.4 GHz and 5.0 GHz spectrum. The adapter is capable of delivering up to 450 Mbps Tx/Rx.

**NOTE 1:** For a more detailed description, please refer to the manufacturer's specifications or User's Manual.

**NOTE 2:** The EUT was tested with a set of Tyco Stamped PIFA Antennas. (Refer to the antenna information exhibits).

## 4.2 EUT Configuration

The EUT was tested installed in the Mini PCI-E slot of an extender board which is then connected to the host computer. The EUT was then connected to a set of antennas via its Chain A, B, & C antenna ports. Data for a set of Tyco Stamped PIFA Antennas can be found in Appendix A (Data Sheets)

The low, middle, and high channels were tested in 802.11a, b, g, & n modes. Also, the EUT was tested once transmitting from each chain individually (Chain A, B, then C) and then tested with all chains transmitting simultaneously (Chain ABC). The EUT was placed in continuous transmit mode by a program provided by the manufacturer (*CRTU Version 5.0.51.0000*).

## 4.3 List of EUT, Sub-Assemblies and Host Equipment

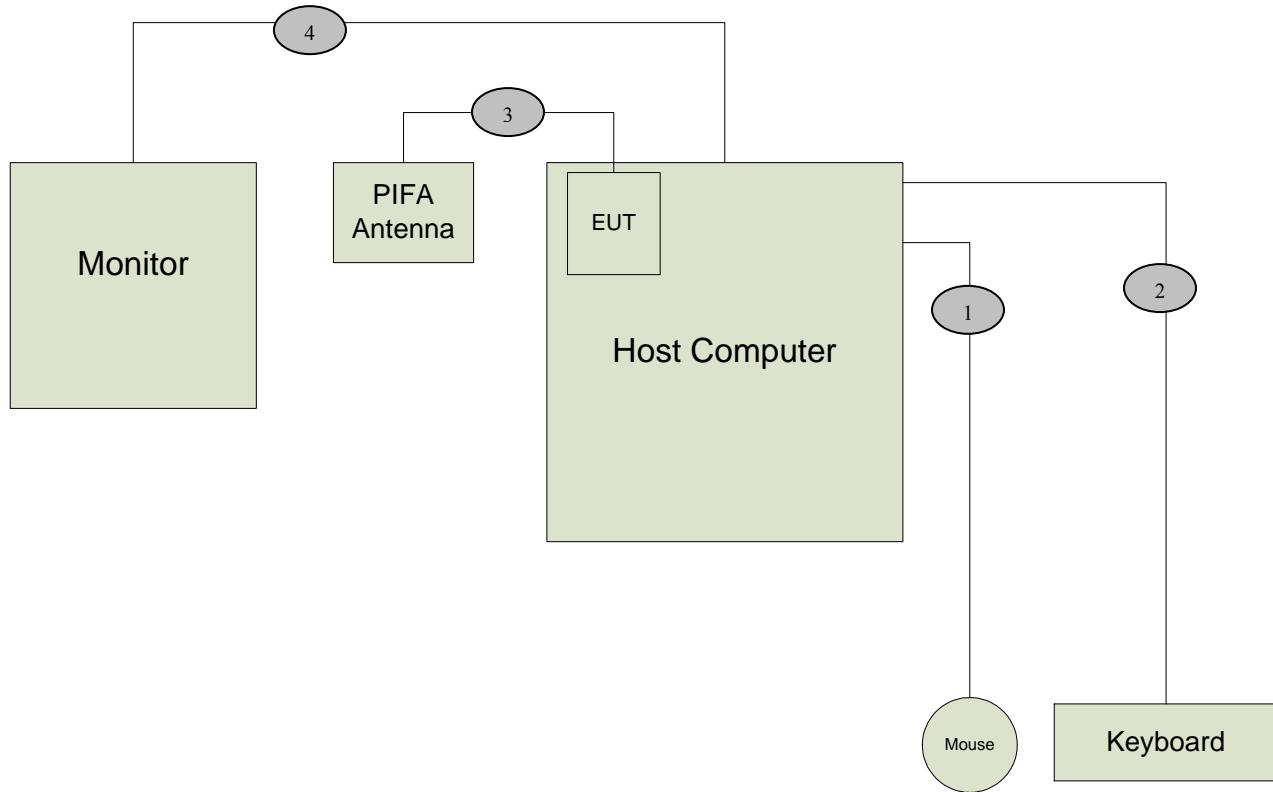
Equipment Under Test			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Intel Corporation	Intel WiFi Link 5300	533AN_HMW	0016EA038A16

EUT Sub Assemblies			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Tyco Stamped PIFA	Chain A Antenna	1513926-1	N/A
	Chain B Antenna	1513926-1	N/A
	Chain C Antenna	1513926-1	N/A

HOST EQUIPMENT LIST			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Dell	Host Desktop	DCCY	XP378A01
Dell	Monitor	E171FP	BN6800246F01
Logitech	Keyboard	Y-BF37	MCT25200581
Logitech	Mouse	M-BJ58	PMA32715049

NOTE: All the power cords of the above support equipment are standard and non-shielded.

## 4.4 I/O Cabling Diagram and Description



## Signal Line Cable Description

Cable	Length	Construction	Source Connector	Destination Connector	Bundled Length	Ferrite Attached	Note
1	1.5m	Round, Braid & Foil Shielded	Host Computer: USB Port	Keyboard: Hardwired	N/A	N/A	N/A
2	1.5m	Round, Braid & Foil Shielded	Host Computer: USB Port	Mouse: Hardwired	N/A	N/A	N/A
3	1.2m	Flat, Braid & Foil Shielded	Host Computer: 3 port QSL connector	PIFA Antenna: Hardwired	N/A	N/A	N/A
4	1.5m	Round, Braid & Foil Shielded	Host Computer: Metalic DB-15	Monitor: Hardwired	N/A	N/A	N/A

#### 4.5 EMC Test Hardware and Software Measurement Equipment

TEST EQUIPMENT LIST - Emissions					
Equipment Name	Manufacturer	Model Number	Serial Number	Calibration Due Date	Maintenance Calibration Cycle
Spectrum Analyzer	Agilent	8565EC	3946A00245	07/24/08	1 Year
PSA Spectrum Analyzer	Agilent	E4440A	MY44303400	10/24/08	1 Year
Antenna – Horn	ETS	3117	00057423	03/28/09	1 Year
Preamp	Miteq	JS42-01001800-25-10P	815980	09/21/08	1 Year
28 Foot Coax	Semflex	S1L29BFS1348	608	07/26/08	1 Year
5.15-5.35 GHz Notch Filter	Microwave Circuits	N0452502	3173-01	NCR	NCR
Antenna - 18-26.5 GHz Pre-amplified Horn	Aegis Labs, Inc.	H042	SLK-35-3W	02/08/09	1 Year
Antenna - 26.5-40 GHz Pre-amplified Horn	Aegis Labs, Inc.	H028	GM1260-10	02/08/09	1 Year
Power Meter	Anritsu	ML2487A	6K00001785	05/29/09	1 Year
Wide Bandwidth Sensor	Anritsu	MA2491A	31193	05/29/09	1 Year
12dB Attenuator	Narda	4779-12	203	06/09/08	1 Year
Temperature/Humidity Monitor	Dickson	TH550	7255185	04/13/09	1 Year

NCR – No Calibration Required.

## 5.0 CONDITIONS DURING EMISSIONS MEASUREMENTS

### 5.1 General

All measurements were made according to the procedures defined in or referred to by the standard listed on the cover page of this report. The measurements were made in the operating mode producing the largest emissions consistent with normal operation and connected to the minimum configuration of auxiliary devices.

### 5.2 Conducted Emissions Test Setup

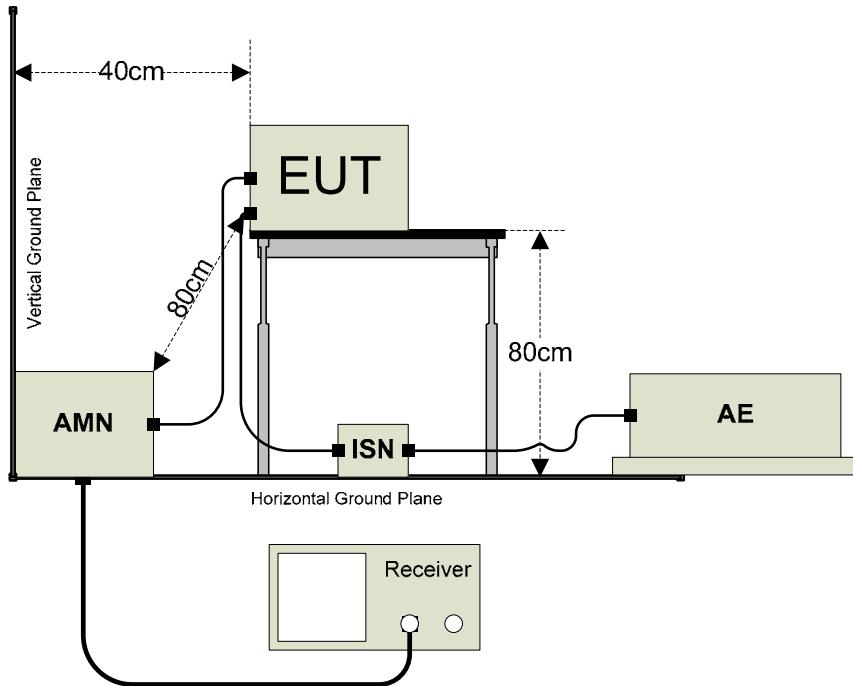
The following was the test configuration.

EUT signal cables that hung closer than 40 cm to the horizontal metal ground plane were folded back and forth forming a bundle 30 cm to 40 cm long. The power cord of the EUT was also bundled in the center and plugged into one of the artificial mains network (AMN). All peripheral equipment was powered from a second AMN via a multiple outlet strip placed at a distance on 10cm from each other. The AMN and ISN were positioned 80cm from the EUT. Signal cables that were not connected to an AE were terminated using the correct termination. If applicable, the current probe was placed at 0.1 m from the ISN.

Peak, quasi-peak and/or average detectors were used for testing performed between 150 kHz and 30 MHz. A swept frequency scan was performed for both Line 1 and Line 2. The six highest readings were compared against the limit and recorded in the data sheet along with a snapshot image of the sweep scan. The graphical scans in Appendix A only reflect peak readings while the tabulated data sheets reflect peak, average, and/or quasi-peak measurements.

#### Climatic Conditions:

The EUT was tested within its intended operating and climatic conditions.



AMN = Artificial mains network  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network

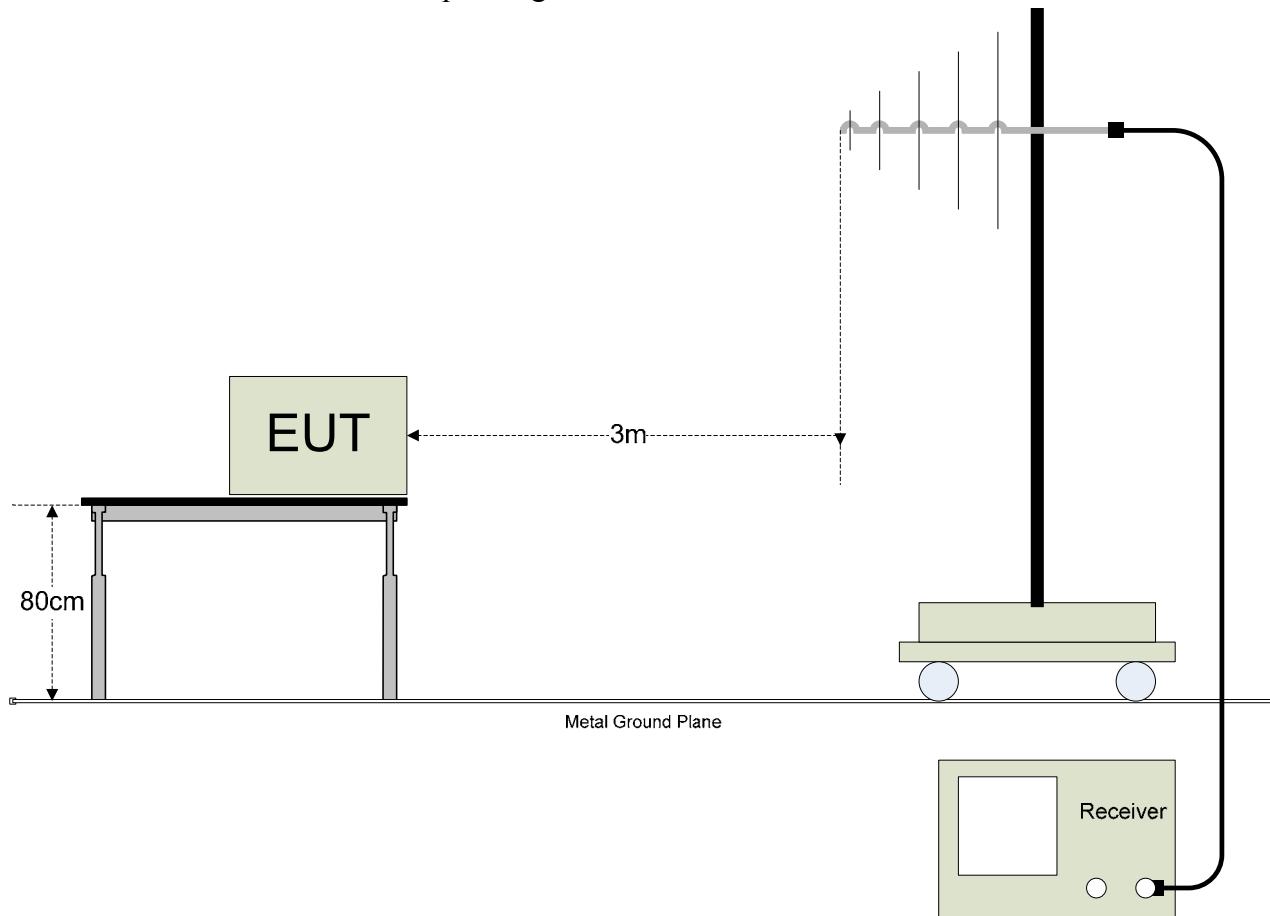
### 5.3 Radiated Emissions Test Setup

The Open Area Test Site (OATS) was used for radiated emission testing. The receiving (Rx) antenna(s) was placed 10m from the nearest side of the EUT facing the Rx antenna. The EUT (if floor-standing) was placed directly on the flush-mounted 360 degree rotating turntable. The EUT (if table-top) was placed directly on an 80cm high non-metallic table, and the table was placed on the rotating turntable. During the initial EMI scan, all the suspect frequencies, i.e.; harmonics, broadband signals were checked with the Rx broadband antennas in both vertical and horizontal polarities. The biconical Rx, log periodic Rx, and horn Rx antennas were used from 30MHz – 299.99MHz, 300MHz – 1000MHz, and 1GHz – 18GHz respectively.

Upon completion of all harmonic and broadband measurements, the balance of any remaining frequencies was checked between 30MHz – 18GHz. Any signals appearing within 20 dB of the classification limit was measured. Each signal was maximized by first rotating the turntable at least 360 degrees and recording the azimuth in the data sheet. Lastly, the Rx antenna was raised and/or lowered to maximize the signal elevation. If the measured signal was obtained using the peak detector and that signal appeared within 3 dB of the regulatory limit line, then the same signal was re-measured using the quasi-peak detector on the EMI receiver. Both meter readings if necessary were recorded on the data sheet.

#### Climatic Conditions:

The EUT was tested within its intended operating and climatic conditions.





8 RANCHO CIRCLE, LAKE FOREST, CA 92630    T (949)454-8295    AegisLabsInc.com  
F (949)829-6903

## APPENDIX A

### ***TEST DATA***

## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	06/25/08
<b>EUT:</b>	Intel WiFi Link 5300	<b>PROJECT NUMBER:</b>	INTEL-080317
<b>MODEL NUMBER:</b>	533AN_HMW	<b>TEST ENGINEER:</b>	KN
<b>SERIAL NUMBER:</b>	0016EA038A16	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in a host computer's mini PCI slot in <b>802.11a (5150-5350 MHz) mode.</b>	<b>TEMPERATURE:</b>	19° C
		<b>HUMIDITY:</b>	57% RH
		<b>TIME:</b>	8:00 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F +C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11a mode (5150-5350 MHz)

Channels 36, 40, 48, 52, 56, &amp; 64

 Continuous TX at Chain A Antenna port with Tyco Stamped PIFA Antennas  
 Aegis Labs, Inc. File #: INTEL-080317-98

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5180.00	58.50	100	225		3.77	34.32	96.59			Ch. 36
5180.00				55.00 A	3.77	34.32	93.09			
5200.00	58.67	100	225		3.78	34.34	96.79			Ch. 40
5200.00				49.17 A	3.78	34.34	87.29			
5240.00	60.00	100	225		3.80	34.39	98.18			Ch. 48
5240.00				50.17 A	3.80	34.39	88.35			
5260.00	58.83	100	225		3.80	34.41	97.05			Ch. 52
5260.00				49.50 A	3.80	34.41	87.72			
5280.00	58.67	100	225		3.81	34.44	96.92			Ch. 56
5280.00				48.83 A	3.81	34.44	87.08			
5320.00	59.83	100	135		3.83	34.48	98.14			Ch. 64
5320.00				50.33 A	3.83	34.48	88.64			

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5180.00	58.50	100	225		3.77	34.31	96.58			Ch. 36
5180.00				48.50 A	3.77	34.31	86.58			
5200.00	58.33	100	135		3.78	34.32	96.43			Ch. 40
5200.00				49.00 A	3.78	34.32	87.10			
5240.00	59.67	100	135		3.80	34.34	97.81			Ch. 48
5240.00				49.17 A	3.80	34.34	87.31			
5260.00	58.83	100	135		3.80	34.36	96.99			Ch. 52
5260.00				49.17 A	3.80	34.36	87.33			
5280.00	58.30	100	135		3.81	34.37	96.48			Ch. 56
5280.00				48.63 A	3.81	34.37	86.81			
5320.00	58.50	100	135		3.83	34.39	96.72			Ch. 64
5320.00				48.17 A	3.83	34.39	86.39			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5150-5350 MHz)*

*Channels 36 & 64*

**Continuous TX at Chain A Antenna port with Tyco Stamped PIFA Antennas**

Aegis Labs, Inc. File #: INTEL-080317-98

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							52.09	74.00	-21.91	<b>Ch. 36</b>
5150.00					A		40.09	54.00	-13.91	
5350.00							52.97	74.00	-21.03	<b>Ch. 64</b>
5350.00					A		36.48	54.00	-17.52	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							52.08	74.00	-21.92	<b>Ch. 36</b>
5150.00					A		33.58	54.00	-20.42	
5350.00							51.55	74.00	-22.45	<b>Ch. 64</b>
5350.00					A		34.23	54.00	-19.77	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

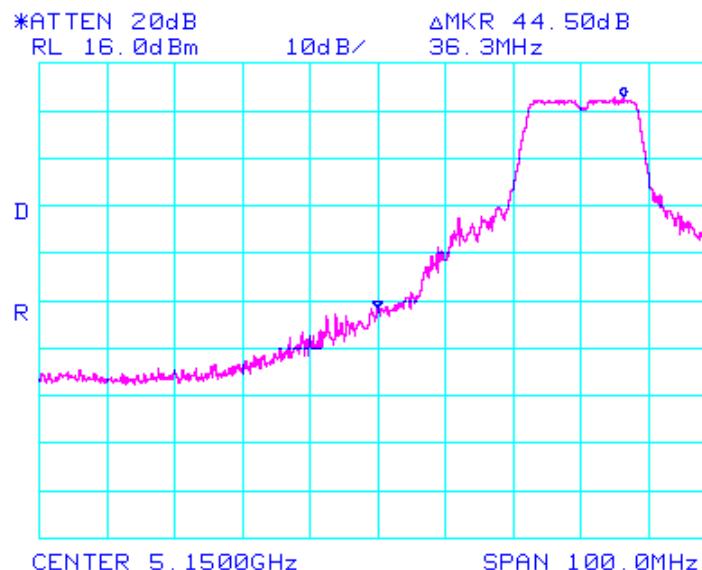
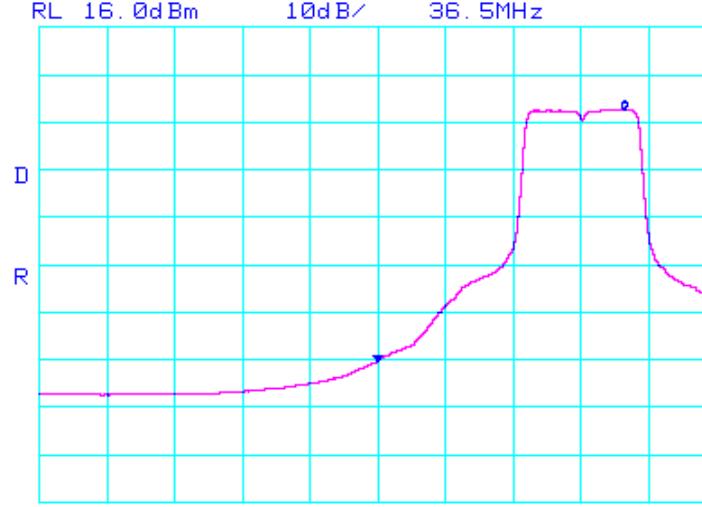
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

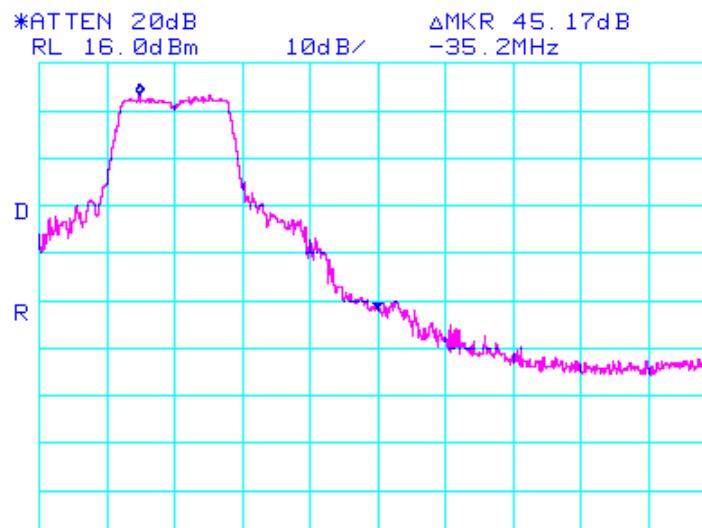
## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.18 GHz band edge PEAK	RC
		
		
Test Date	Data	Test Eng.
04/05/08	5.18 GHz band edge AVERAGE	RC

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.32 GHz band edge PEAK	RC
 <p> <b>*ATTEN</b> 20dB      <b>ΔMKR</b> 45.17dB  <b>RL</b> 16.0 dBm      <b>-35.2MHz</b>  <b>10dB/</b> 1MHz  <b>CENTER</b> 5.3500GHz      <b>SPAN</b> 100.0MHz  <b>*RBW</b> 1.0MHz      <b>*VBW</b> 1.0MHz      <b>SWP</b> 50.0ms     </p>		
 <p> <b>*ATTEN</b> 20dB      <b>ΔMKR</b> 52.16dB  <b>RL</b> 16.0 dBm      <b>-26.2MHz</b>  <b>10dB/</b> 1MHz  <b>CENTER</b> 5.3500GHz      <b>SPAN</b> 100.0MHz  <b>*RBW</b> 1.0MHz      <b>*VBW</b> 10Hz      <b>SWP</b> 37.0sec     </p>		
Test Date	Data	Test Eng.
04/05/08	5.32 GHz band edge AVERAGE	RC

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11a mode (5150-5350 MHz)

Channels 36, 40, 48, 52, &amp; 64

 Continuous TX at Chain B Antenna port with Tyco Stamped PIFA Antennas  
 Aegis Labs, Inc. File #: INTEL-080317-99

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	56.00	100	225		3.77	34.32	94.09			Ch. 36
5180.00				44.83 A	3.77	34.32	82.92			
5200.00	55.83	100	225		3.78	34.34	93.95			Ch. 40
5200.00				45.50 A	3.78	34.34	83.62			
5240.00	56.00	100	225		3.80	34.39	94.18			Ch. 48
5240.00				46.67 A	3.80	34.39	84.85			
5260.00	57.17	100	225		3.80	34.41	95.39			Ch. 52
5260.00				47.50 A	3.80	34.41	85.72			
5280.00	57.00	100	225		3.81	34.44	95.25			Ch. 56
5280.00				47.33 A	3.81	34.44	85.58			
5320.00	56.17	100	225		3.83	34.48	94.48			Ch. 64
5320.00				47.17 A	3.83	34.48	85.48			

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	63.00	100	180		3.77	34.31	101.08			Ch. 36
5180.00				53.00 A	3.77	34.31	91.08			
5200.00	62.83	100	180		3.78	34.32	100.93			Ch. 40
5200.00				52.67 A	3.78	34.32	90.77			
5240.00	61.67	100	180		3.80	34.34	99.81			Ch. 48
5240.00				52.50 A	3.80	34.34	90.64			
5260.00	61.00	100	180		3.80	34.36	99.16			Ch. 52
5260.00				52.17 A	3.80	34.36	90.33			
5280.00	59.50	100	180		3.81	34.37	97.68			Ch. 56
5280.00				50.33 A	3.81	34.37	88.51			
5320.00	59.50	100	180		3.83	34.39	97.72			Ch. 64
5320.00				49.83 A	3.83	34.39	88.05			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5150-5350 MHz)*

*Channels 36 & 64*

**Continuous TX at Chain B Antenna port with Tyco Stamped PIFA Antennas**

Aegis Labs, Inc. File #: INTEL-080317-99

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							51.26	74.00	-22.74	<b>Ch. 36</b>
5150.00					A		28.42	54.00	-25.58	
5350.00							51.48	74.00	-22.52	<b>Ch. 64</b>
5350.00					A		35.48	54.00	-18.52	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							58.25	74.00	-15.75	<b>Ch. 36</b>
5150.00					A		36.58	54.00	-17.42	
5350.00							54.72	74.00	-19.28	<b>Ch. 64</b>
5350.00					A		38.05	54.00	-15.95	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

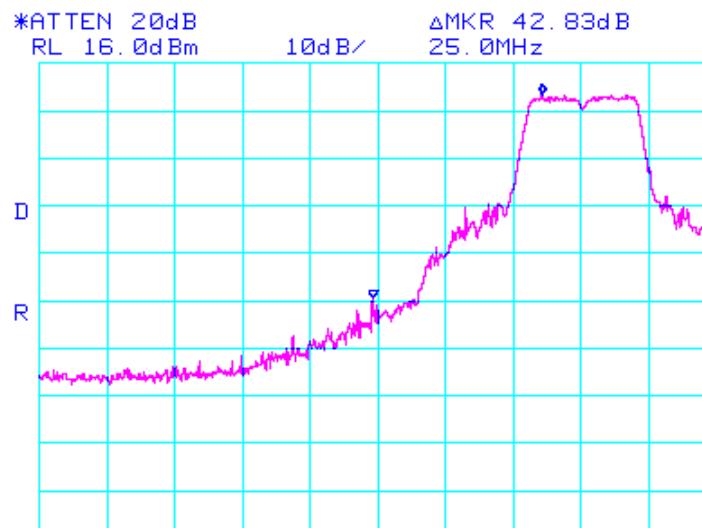
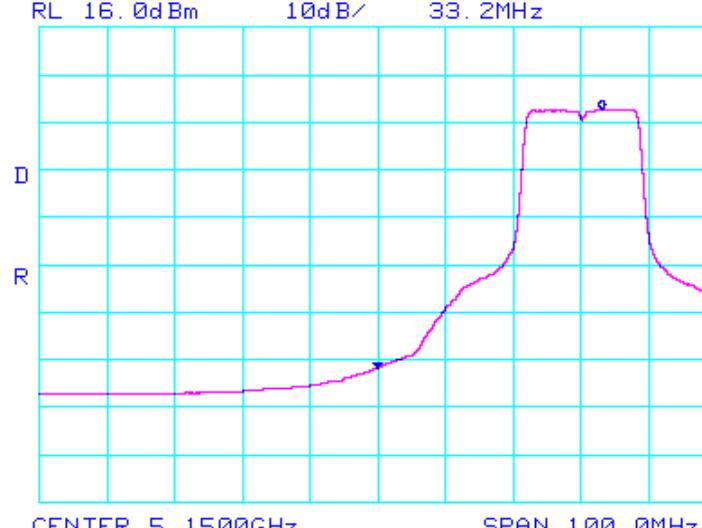
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.18 GHz band edge PEAK	RC
 <p> <b>*ATTEN</b> 20dB      <b>ΔMKR</b> 42.83dB  <b>RL</b> 16.0dBm      <b>25.0MHz</b>  <b>10dB/</b>      <b>10dB/</b>  <b>D</b>  <b>R</b> </p> <p> <b>CENTER</b> 5.1500GHz      <b>SPAN</b> 100.0MHz  <b>*RBW</b> 1.0MHz      <b>*VBW</b> 1.0MHz      <b>SWP</b> 50.0ms     </p>		
 <p> <b>*ATTEN</b> 20dB      <b>ΔMKR</b> 54.50dB  <b>RL</b> 16.0dBm      <b>33.2MHz</b>  <b>10dB/</b>      <b>10dB/</b>  <b>D</b>  <b>R</b> </p> <p> <b>CENTER</b> 5.1500GHz      <b>SPAN</b> 100.0MHz  <b>*RBW</b> 1.0MHz      <b>*VBW</b> 10Hz      <b>SWP</b> 37.0sec     </p>		
Test Date	Data	Test Eng.
04/05/08	5.18 GHz band edge AVERAGE	RC

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.32 GHz band edge PEAK	RC
 <p> <b>*ATTEN</b> 20dB      <b>ΔMKR</b> 43.00 dB  <b>RL</b> 16.00 dBm      <b>-24.3MHz</b>  <b>10dB/</b>      <b>CENTER</b> 5.3500GHz  <b>*RBW</b> 1.0MHz      <b>SPAN</b> 100.0MHz  <b>*VBW</b> 1.0MHz      <b>SWP</b> 50.0ms     </p>		
 <p> <b>*ATTEN</b> 20dB      <b>ΔMKR</b> 50.00 dB  <b>RL</b> 16.00 dBm      <b>-23.0MHz</b>  <b>10dB/</b>      <b>CENTER</b> 5.3500GHz  <b>*RBW</b> 1.0MHz      <b>SPAN</b> 100.0MHz  <b>*VBW</b> 10Hz      <b>SWP</b> 37.0sec     </p>		
Test Date	Data	Test Eng.
04/05/08	5.32 GHz band edge AVERAGE	RC

## Radiated Emissions Test Results (Continued)

**Fundamental Measurements in 802.11a mode (5150-5350 MHz)****Channels 36, 40, 48, 52, & 64****Continuous TX at Chain C Antenna port with Tyco Stamped PIFA Antennas****Aegis Labs, Inc. File #: INTEL-080317-100**

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5180.00	54.50	100	180			3.77	34.32	92.59			<b>Ch. 36</b>
5180.00				44.50	A	3.77	34.32	82.59			
5200.00	54.50	100	180			3.78	34.34	92.62			<b>Ch. 40</b>
5200.00				44.50	A	3.78	34.34	82.62			
5240.00	54.50	100	180			3.80	34.39	92.68			<b>Ch. 48</b>
5240.00				44.33	A	3.80	34.39	82.51			
5260.00	55.17	100	180			3.80	34.41	93.39			<b>Ch. 52</b>
5260.00				45.17	A	3.80	34.41	83.39			
5280.00	55.33	100	180			3.81	34.44	93.58			<b>Ch. 56</b>
5280.00				45.17	A	3.81	34.44	83.42			
5320.00	54.17	100	180			3.83	34.48	92.48			<b>Ch. 64</b>
5320.00				44.67	A	3.83	34.48	82.98			

<b>RADIATED EMISSIONS - Vertical Antenna Polarization</b>											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5180.00	55.83	100	225			3.77	34.31	93.91			<b>Ch. 36</b>
5180.00				45.33	A	3.77	34.31	83.41			
5200.00	55.67	100	225			3.78	34.32	93.77			<b>Ch. 40</b>
5200.00				45.67	A	3.78	34.32	83.77			
5240.00	55.33	100	270			3.80	34.34	93.47			<b>Ch. 48</b>
5240.00				46.00	A	3.80	34.34	84.14			
5260.00	55.83	100	225			3.80	34.36	93.99			<b>Ch. 52</b>
5260.00				45.83	A	3.80	34.36	83.99			
5280.00	56.00	100	225			3.81	34.37	94.18			<b>Ch. 56</b>
5280.00				46.00	A	3.81	34.37	84.18			
5320.00	55.67	100	225			3.83	34.39	93.89			<b>Ch. 64</b>
5320.00				45.67	A	3.83	34.39	83.89			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5150-5350 MHz)*

*Channels 36 & 64*

**Continuous TX at Chain C Antenna port with Tyco Stamped PIFA Antennas**

*Aegis Labs, Inc. File #: INTEL-080317-100*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							48.59	74.00	-25.41	<b>Ch. 36</b>
5150.00					A		29.59	54.00	-24.41	
5350.00							50.31	74.00	-23.69	<b>Ch. 64</b>
5350.00					A		31.15	54.00	-22.85	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							49.91	74.00	-24.09	<b>Ch. 36</b>
5150.00					A		30.41	54.00	-23.59	
5350.00							51.72	74.00	-22.28	<b>Ch. 64</b>
5350.00					A		32.06	54.00	-21.94	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

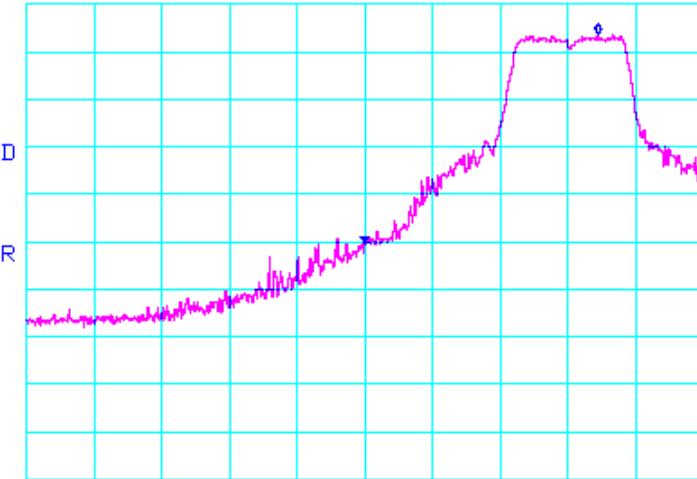
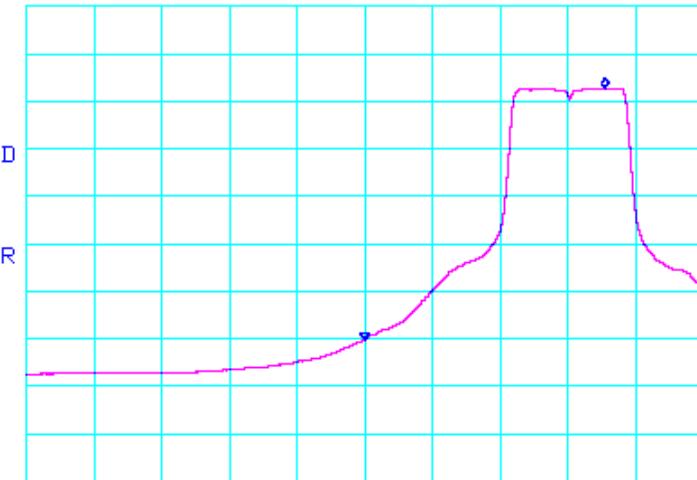
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

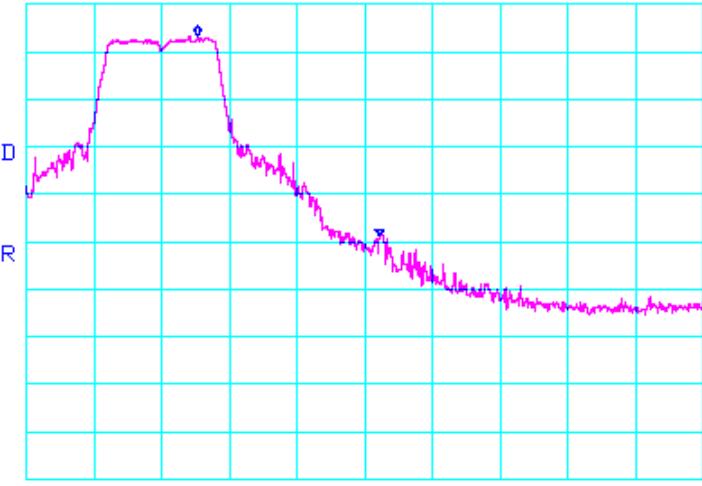
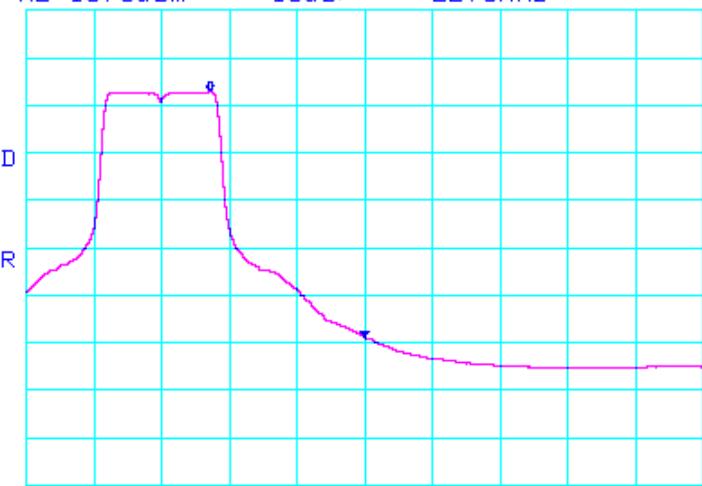
## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.18 GHz band edge PEAK	RC
 <p> <b>*ATTEN 20dB</b>  <b>RL 16.00 dBm</b>      <b>10dB/</b>      <b>ΔMKR 44.00dB</b>  <b>34.5MHz</b> </p> <p> <b>CENTER 5.1500GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>SPAN 100.0MHz</b>  <b>SWP 50.0ms</b> </p>		
 <p> <b>*ATTEN 20dB</b>  <b>RL 16.00 dBm</b>      <b>10dB/</b>      <b>ΔMKR 53.00dB</b>  <b>35.5MHz</b> </p> <p> <b>CENTER 5.1500GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SPAN 100.0MHz</b>  <b>SWP 37.0sec</b> </p>		
Test Date	Data	Test Eng.
04/05/08	5.18 GHz band edge AVERAGE	RC

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.32 GHz band edge PEAK	RC
 <p> <b>*ATTEN 20dB</b>  <b>RL 16.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 42.17dB</b>  <b>R</b>      <b>-26.8MHz</b>  <b>D</b> </p> <p> <b>CENTER 5.3500GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>SPAN 100.0MHz</b>  <b>SWP 50.0ms</b> </p>		
 <p> <b>*ATTEN 20dB</b>  <b>RL 16.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 51.83dB</b>  <b>R</b>      <b>-22.8MHz</b>  <b>D</b> </p> <p> <b>CENTER 5.3500GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SPAN 100.0MHz</b>  <b>SWP 37.0sec</b> </p>		

## Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)

Channels 36, 40, &amp; 48

Continuous TX at Chain A, B, &amp; C Antenna ports with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-101

## RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3466.66	52.17	100	180		46.62	3.06	32.79	41.40	68.00	-26.60	Ch. 40 / A
6933.33	54.17	100	225		45.05	4.40	35.69	49.21	68.00	-18.79	
3466.66	51.83	100	225		46.62	3.06	32.79	41.06	68.00	-26.94	Ch. 40 / B
6933.33	52.83	100	180		45.05	4.40	35.69	47.87	68.00	-20.13	
3466.66	52.33	100	180		46.62	3.06	32.79	41.56	68.00	-26.44	Ch. 40 / C
6933.33	53.00	100	180		45.05	4.40	35.69	48.04	68.00	-19.96	
6906.66	56.17	100	180		45.01	4.39	35.68	51.23	68.00	-16.77	Ch. 36 / A
6986.66	50.33	100	180		45.12	4.42	35.70	45.34	68.00	-22.66	Ch. 48 / A

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3466.66	55.00	100	225		46.62	3.06	32.88	44.32	68.00	-23.68	Ch. 40 / A
6933.33	52.17	100	225		45.05	4.40	35.60	47.12	68.00	-20.88	
3466.66	52.67	100	225		46.62	3.06	32.88	41.99	68.00	-26.01	Ch. 40 / B
6933.33	53.83	100	225		45.05	4.40	35.60	48.78	68.00	-19.22	
3466.66	52.17	100	270		46.62	3.06	32.88	41.49	68.00	-26.51	Ch. 40 / C
6933.33	52.00	100	270		45.05	4.40	35.60	46.95	68.00	-21.05	
6906.66	54.17	100	225		45.01	4.39	35.60	49.15	68.00	-18.85	Ch. 36 / B
3493.33	52.33	100	225		46.61	3.06	32.90	41.67	68.00	-26.33	Ch. 48 / B
6986.66	53.00	100	180		45.12	4.42	35.60	47.91	68.00	-20.09	

## Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11a mode (5150-5350 MHz)

Channels 52, 56, &amp; 64

 Continuous TX at **Chain A, B, & C** Antenna ports with **Tyco Stamped PIFA Antennas**  
 Aegis Labs, Inc. File #: INTEL-080317-101

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested	
7040.00	53.33	100	180		45.12	4.44	35.72	48.37	68.00	-19.63	<b>Ch. 56 / A</b>	
7040.00	52.83	100	135		45.12	4.44	35.72	47.87	68.00	-20.13	<b>Ch. 56 / B</b>	
7040.00	53.00	100	135		45.12	4.44	35.72	48.04	68.00	-19.96	<b>Ch. 56 / C</b>	
7013.32	52.83	100	180		45.13	4.43	35.71	47.84	68.00	-20.16	<b>Ch. 52 / A</b>	
7093.32	52.33	100	225		45.11	4.46	35.76	47.44	68.00	-20.56	<b>Ch. 64 / A</b>	

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3520.00	52.33	100	225		46.61	3.08	32.92	41.72	68.00	-26.28	<b>Ch. 56 / A</b>
7040.00	52.17	100	225		45.12	4.44	35.64	47.13	68.00	-20.87	
3520.00	52.17	100	180		46.61	3.08	32.92	41.56	68.00	-26.44	<b>Ch. 56 / B</b>
7040.00	53.00	100	180		45.12	4.44	35.64	47.96	68.00	-20.04	
3520.00	52.83	100	180		46.61	3.08	32.92	42.22	68.00	-25.78	<b>Ch. 56 / C</b>
7040.00	53.67	100	225		45.12	4.44	35.64	48.63	68.00	-19.37	
3506.66	52.00	100	225		46.61	3.07	32.91	41.36	68.00	-26.64	<b>Ch. 52 / C</b>
7013.32	52.67	100	225		45.13	4.43	35.61	47.59	68.00	-20.41	
3546.66	52.17	100	180		46.61	3.12	32.95	41.63	68.00	-26.37	<b>Ch. 64 / C</b>
7093.32	53.00	100	225		45.11	4.46	35.69	48.04	68.00	-19.96	

## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	06/25/08
<b>EUT:</b>	Intel WiFi Link 5300	<b>PROJECT NUMBER:</b>	INTEL-080317
<b>MODEL NUMBER:</b>	533AN_HMW	<b>TEST ENGINEER:</b>	KN
<b>SERIAL NUMBER:</b>	0016EA038A16	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in a host computer's mini PCI slot in <b>802.11n (5150-5350 MHz) mode 20MHz Wide.</b>	<b>TEMPERATURE:</b>	19° C
		<b>HUMIDITY:</b>	57% RH
		<b>TIME:</b>	8:00 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F +C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

**Fundamental Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)****Channels 36, 40, 48, 52, & 64****Continuous TX at Chain A Antenna port with Tyco Stamped PIFA Antennas****Aegis Labs, Inc. File #: INTEL-080317-98**

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5180.00	58.17	100	135			3.77	34.32	96.26			<b>Ch. 36</b>
5180.00				48.00	A	3.77	34.32	86.09			
5200.00	60.17	100	135			3.78	34.34	98.29			<b>Ch. 40</b>
5200.00				49.67	A	3.78	34.34	87.79			
5240.00	60.17	100	135			3.80	34.39	98.35			<b>Ch. 48</b>
5240.00				49.67	A	3.80	34.39	87.85			
5260.00	60.33	100	135			3.80	34.41	98.55			<b>Ch. 52</b>
5260.00				49.83	A	3.80	34.41	88.05			
5280.00	58.67	100	135			3.81	34.44	96.92			<b>Ch. 56</b>
5280.00				48.83	A	3.81	34.44	87.08			
5320.00	59.17	100	135			3.83	34.48	97.48			<b>Ch. 64</b>
5320.00				49.00	A	3.83	34.48	87.31			

<b>RADIATED EMISSIONS - Vertical Antenna Polarization</b>											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5180.00	57.17	100	225			3.77	34.31	95.25			<b>Ch. 36</b>
5180.00				47.33	A	3.77	34.31	85.41			
5200.00	57.67	100	225			3.78	34.32	95.77			<b>Ch. 40</b>
5200.00				47.17	A	3.78	34.32	85.27			
5240.00	59.83	100	135			3.80	34.34	97.97			<b>Ch. 48</b>
5240.00				49.83	A	3.80	34.34	87.97			
5260.00	57.50	100	135			3.80	34.36	95.66			<b>Ch. 52</b>
5260.00				47.50	A	3.80	34.36	85.66			
5280.00	59.83	100	45			3.81	34.37	98.01			<b>Ch. 56</b>
5280.00				50.00	A	3.81	34.37	88.18			
5320.00	58.00	100	135			3.83	34.39	96.22			<b>Ch. 64</b>
5320.00				47.83	A	3.83	34.39	86.05			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

## Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)

Channels 36 &amp; 64

Continuous TX at Chain A Antenna port with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-98

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							51.59	74.00	-22.41	<b>Ch. 36</b>
5150.00				A			33.59	54.00	-20.41	
5350.00							53.64	74.00	-20.36	<b>Ch. 64</b>
5350.00				A			34.65	54.00	-19.35	

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							50.58	74.00	-23.42	<b>Ch. 36</b>
5150.00				A			32.91	54.00	-21.09	
5350.00							52.38	74.00	-21.62	<b>Ch. 64</b>
5350.00				A			33.39	54.00	-20.61	

NOTE: The "Band Edge Field Strength" was calculated using the "Fundamental" and "Conducted Band Edge" measurements per the "Marker-Delta Method" with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

 $\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

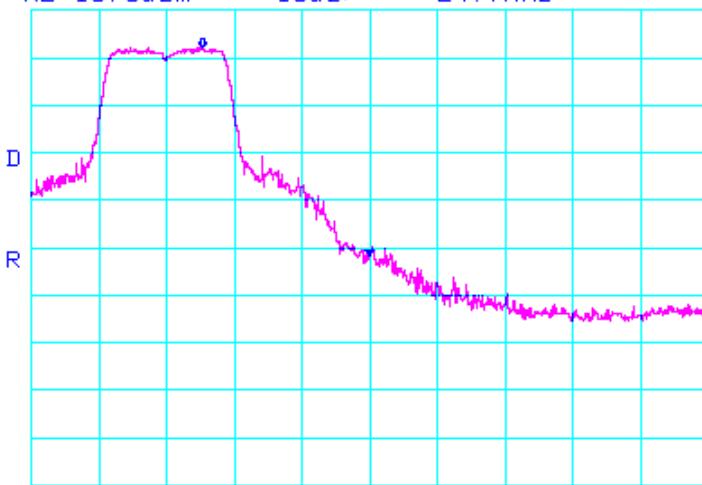
## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/05/08	5.18 GHz band edge <b>PEAK</b>	RC
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/05/08	5.18 GHz band edge <b>AVERAGE</b>	RC

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.32 GHz band edge PEAK	RC
 <p> <b>*ATTEN 20dB</b>  <b>RL 16.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 43.84dB</b>  <b>R</b>      <b>-24.7MHz</b>  <b>D</b> </p> <p> <b>CENTER 5.3500GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>SPAN 100.0MHz</b>  <b>SWP 50.0ms</b> </p>		
 <p> <b>*ATTEN 20dB</b>  <b>RL 16.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 52.66dB</b>  <b>R</b>      <b>-27.0MHz</b>  <b>D</b> </p> <p> <b>CENTER 5.3500GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SPAN 100.0MHz</b>  <b>SWP 37.0sec</b> </p>		

## Radiated Emissions Test Results (Continued)

**Fundamental Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)****Channels 36, 40, 48, 52, & 64****Continuous TX at Chain B Antenna port with Tyco Stamped PIFA Antennas**

Aegis Labs, Inc. File #: INTEL-080317-99

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5180.00	57.33	100	225			3.77	34.32	95.42			<b>Ch. 36</b>
5180.00				46.83	A	3.77	34.32	84.92			
5200.00	59.33	100	225			3.78	34.34	97.45			<b>Ch. 40</b>
5200.00				48.00	A	3.78	34.34	86.12			
5240.00	57.67	100	225			3.80	34.39	95.85			<b>Ch. 48</b>
5240.00				47.33	A	3.80	34.39	85.51			
5260.00	59.00	100	225			3.80	34.41	97.22			<b>Ch. 52</b>
5260.00				48.00	A	3.80	34.41	86.22			
5280.00	57.17	100	225			3.81	34.44	95.42			<b>Ch. 56</b>
5280.00				46.67	A	3.81	34.44	84.92			
5320.00	56.67	100	225			3.83	34.48	94.98			<b>Ch. 64</b>
5320.00				46.00	A	3.83	34.48	84.31			

<b>RADIATED EMISSIONS - Vertical Antenna Polarization</b>											
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5180.00	61.00	100	180			3.77	34.31	99.08			<b>Ch. 36</b>
5180.00				50.17	A	3.77	34.31	88.25			
5200.00	61.17	100	180			3.78	34.32	99.27			<b>Ch. 40</b>
5200.00				50.50	A	3.78	34.32	88.60			
5240.00	60.83	100	180			3.80	34.34	98.97			<b>Ch. 48</b>
5240.00				50.00	A	3.80	34.34	88.14			
5260.00	60.83	100	180			3.80	34.36	98.99			<b>Ch. 52</b>
5260.00				49.67	A	3.80	34.36	87.83			
5280.00	59.67	100	180			3.81	34.37	97.85			<b>Ch. 56</b>
5280.00				49.17	A	3.81	34.37	87.35			
5320.00	58.83	100	180			3.83	34.39	97.05			<b>Ch. 64</b>
5320.00				48.50	A	3.83	34.39	86.72			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)**

Channels 36 &amp; 64

**Continuous TX at Chain B Antenna port with Tyco Stamped PIFA Antennas**

Aegis Labs, Inc. File #: INTEL-080317-99

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							50.59	74.00	-23.41	<b>Ch. 36</b>
5150.00					A		32.42	54.00	-21.58	
5350.00							52.64	74.00	-21.36	<b>Ch. 64</b>
5350.00					A		31.31	54.00	-22.69	

**RADIATED EMISSIONS - Vertical Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							54.25	74.00	-19.75	<b>Ch. 36</b>
5150.00					A		35.75	54.00	-18.25	
5350.00							54.71	74.00	-19.29	<b>Ch. 64</b>
5350.00					A		33.72	54.00	-20.28	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

 $\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

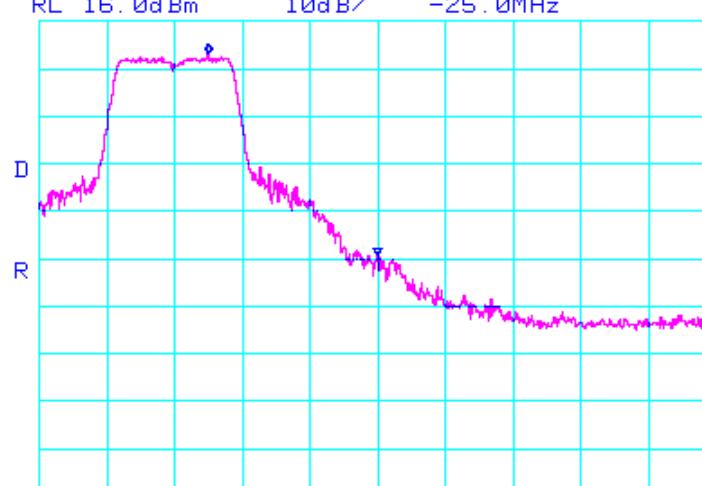
## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/05/08	5.18 GHz band edge <b>PEAK</b>	RC
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/05/08	5.18 GHz band edge <b>AVERAGE</b>	RC

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.32 GHz band edge PEAK	RC
 <p> <b>*ATTEN 20dB</b>  <b>RL 16.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 42.34dB</b>  <b>R</b>  <b>D</b>  <b>CENTER 5.3500GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>SPAN 100.0MHz</b>  <b>SWP 50.0ms</b> </p>		
 <p> <b>*ATTEN 20dB</b>  <b>RL 16.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 53.00dB</b>  <b>R</b>  <b>D</b>  <b>CENTER 5.3500GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SPAN 100.0MHz</b>  <b>SWP 37.0sec</b> </p>		

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)

Channels 36, 40, 48, 52, &amp; 64

Continuous TX at Chain C Antenna port with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-100

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5180.00	54.67	100	180		3.77	34.32	92.76			Ch. 36
5180.00				44.00 A	3.77	34.32	82.09			
5200.00	55.67	100	225		3.78	34.34	93.79			Ch. 40
5200.00				44.67 A	3.78	34.34	82.79			
5240.00	56.50	100	180		3.80	34.39	94.68			Ch. 48
5240.00				45.67 A	3.80	34.39	83.85			
5260.00	55.67	100	180		3.80	34.41	93.89			Ch. 52
5260.00				45.33 A	3.80	34.41	83.55			
5280.00	55.17	100	180		3.81	34.44	93.42			Ch. 56
5280.00				44.83 A	3.81	34.44	83.08			
5320.00	54.67	100	180		3.83	34.48	92.98			Ch. 64
5320.00				43.67 A	3.83	34.48	81.98			

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5180.00	57.17	100	315		3.77	34.31	95.25			Ch. 36
5180.00				46.33 A	3.77	34.31	84.41			
5200.00	56.33	100	315		3.78	34.32	94.43			Ch. 40
5200.00				45.83 A	3.78	34.32	83.93			
5240.00	56.67	100	315		3.80	34.34	94.81			Ch. 48
5240.00				46.17 A	3.80	34.34	84.31			
5260.00	57.00	100	315		3.80	34.36	95.16			Ch. 52
5260.00				46.17 A	3.80	34.36	84.33			
5280.00	56.33	100	315		3.81	34.37	94.51			Ch. 56
5280.00				45.50 A	3.81	34.37	83.68			
5320.00	56.00	100	315		3.83	34.39	94.22			Ch. 64
5320.00				45.33 A	3.83	34.39	83.55			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

## Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)

Channels 36 &amp; 64

Continuous TX at Chain C Antenna port with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-100

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							53.43	74.00	-20.57	<b>Ch. 36</b>
5150.00				A			30.92	54.00	-23.08	
5350.00							51.65	74.00	-22.35	<b>Ch. 64</b>
5350.00				A			30.82	54.00	-23.18	

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							55.92	74.00	-18.08	<b>Ch. 36</b>
5150.00				A			33.24	54.00	-20.76	
5350.00							52.89	74.00	-21.11	<b>Ch. 64</b>
5350.00				A			32.39	54.00	-21.61	

NOTE: The "Band Edge Field Strength" was calculated using the "Fundamental" and "Conducted Band Edge" measurements per the "Marker-Delta Method" with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

 $\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

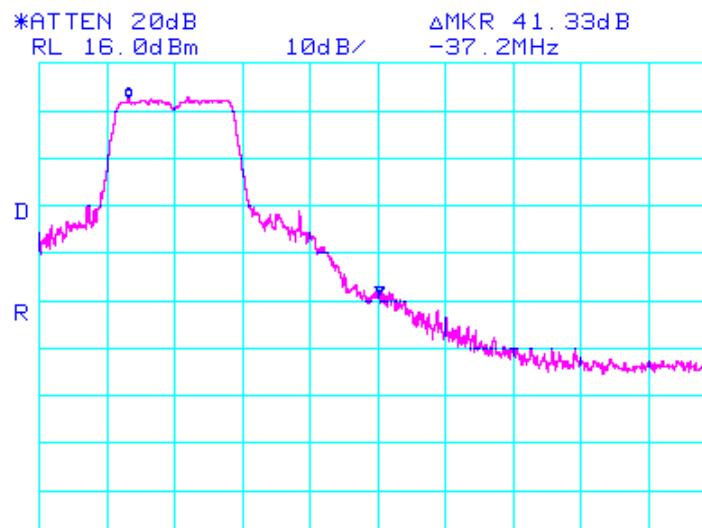
## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/05/08	5.18 GHz band edge <b>PEAK</b>	RC
<p style="text-align: center;"> <b>*ATTEN 20dB</b>  <b>RL 16.0dBm</b>    <b>10dB/</b>    <b>ΔMKR 39.33dB</b>  <b>36.5MHz</b> </p> <p style="text-align: center;"> <b>CENTER 5.1500GHz</b>  <b>*RBW 1.0MHz</b>    <b>*VBW 1.0MHz</b>    <b>SPAN 100.0MHz</b>  <b>SWP 50.0ms</b> </p>		
<p style="text-align: center;"> <b>*ATTEN 20dB</b>  <b>RL 16.0dBm</b>    <b>10dB/</b>    <b>ΔMKR 51.17dB</b>  <b>35.3MHz</b> </p> <p style="text-align: center;"> <b>CENTER 5.1500GHz</b>  <b>*RBW 1.0MHz</b>    <b>*VBW 10Hz</b>    <b>SPAN 100.0MHz</b>  <b>SWP 37.0sec</b> </p>		
<b>Test Date</b>	<b>Data</b>	<b>Test Eng.</b>
04/05/08	5.18 GHz band edge <b>AVERAGE</b>	RC

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.32 GHz band edge PEAK	RC
		
		
Test Date	Data	Test Eng.
04/05/08	5.32 GHz band edge AVERAGE	RC

## Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)*

*Channels 36, 40, & 48*

**Continuous TX at Chain A, B, & C Antenna ports with Tyco Stamped PIFA Antennas**

*Aegis Labs, Inc. File #: INTEL-080317-102*

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
6933.33	52.50	100	180		50.48	4.40	35.69	42.11	68.00	-25.89	Ch. 40 / A
6933.33	52.00	100	180		50.48	4.40	35.69	41.61	68.00	-26.39	Ch. 40 / B
6933.33	52.17	100	180		50.48	4.40	35.69	41.78	68.00	-26.22	Ch. 40 / C
6906.66	53.00	100	180		50.50	4.39	35.68	42.57	68.00	-25.43	Ch. 36 / A
6986.66	53.17	100	225		50.44	4.42	35.70	42.85	68.00	-25.15	Ch. 48 / A

**RADIATED EMISSIONS - Vertical Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
3466.66	52.33	100	225		50.72	3.06	32.88	37.55	68.00	-30.45	Ch. 40 / A
6933.33	52.50	100	225		50.48	4.40	35.60	42.02	68.00	-25.98	
3466.66	52.17	100	180		50.72	3.06	32.88	37.39	68.00	-30.61	Ch. 40 / B
6933.33	53.50	100	225		50.48	4.40	35.60	43.02	68.00	-24.98	
3466.66	51.50	100	225		50.72	3.06	32.88	36.72	68.00	-31.28	Ch. 40 / C
6933.33	52.50	100	45		50.48	4.40	35.60	42.02	68.00	-25.98	
6906.66	54.67	100	225		50.50	4.39	35.60	44.16	68.00	-23.84	Ch. 36 / B
6986.66	53.17	100	225		50.44	4.42	35.60	42.75	68.00	-25.25	Ch. 48 / B

## Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)*

*Channels 52, 56, & 64*

**Continuous TX at Chain A, B, & C Antenna ports with Tyco Stamped PIFA Antennas**  
*Aegis Labs, Inc. File #: INTEL-080317-46*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested	
7040.00	53.67	100	225		50.41	4.44	35.72	43.43	68.00	-24.57	<b>Ch. 56 / A</b>	
7040.00	52.50	100	135		50.41	4.44	35.72	42.26	68.00	-25.74	<b>Ch. 56 / B</b>	
7040.00	53.17	100	135		50.41	4.44	35.72	42.93	68.00	-25.07	<b>Ch. 56 / C</b>	
7013.32	53.00	100	135		50.42	4.43	35.71	42.72	68.00	-25.28	<b>Ch. 52 / A</b>	
7093.32	52.00	100	135		50.38	4.46	35.76	41.84	68.00	-26.16	<b>Ch. 64 / A</b>	

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
7040.00	52.83	100	135		50.41	4.44	35.64	42.50	68.00	-25.50	<b>Ch. 56 / A</b>
7040.00	52.33	100	225		50.41	4.44	35.64	42.00	68.00	-26.00	<b>Ch. 56 / B</b>
7040.00	52.33	100	135		50.41	4.44	35.64	42.00	68.00	-26.00	<b>Ch. 56 / C</b>
7013.32	52.67	100	135		50.42	4.43	35.61	42.29	68.00	-25.71	<b>Ch. 52 / A</b>
7093.32	51.33	100	90		50.38	4.46	35.69	41.10	68.00	-26.90	<b>Ch. 64 / A</b>



## Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)*

*Channels 36, 40, & 48*

**Continuous TX at Triple Chain ABC Antenna ports with Tyco Stamped PIFA Antennas**  
Aegis Labs, Inc. File #: INTEL-080317-102

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +FAIL</i>	<i>Channel/Chain Tested</i>
6933.33	53.17	100	225			50.48	4.40	35.69	42.78	68.00	-25.22	Ch. 40 / ABC
6906.66	54.00	100	225			50.50	4.39	35.68	43.57	68.00	-24.43	Ch. 36 / ABC
6986.66	53.17	100	180			50.44	4.42	35.70	42.85	68.00	-25.15	Ch. 48 / ABC

### RADIATED EMISSIONS - Vertical Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +FAIL</i>	<i>Comments</i>
6933.33	52.67	100	225			50.48	4.40	35.60	42.19	68.00	-25.81	Ch. 40 / ABC
10399.99	50.33	100	45			50.40	5.53	37.44	42.90	68.00	-25.10	Ch. 36 / ABC
6906.66	53.83	100	135			50.50	4.39	35.60	43.32	68.00	-24.68	Ch. 48 / ABC
6986.66	52.50	100	45			50.44	4.42	35.60	42.08	68.00	-25.92	Ch. 48 / ABC



## Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5150-5350 MHz)*

*Channels 52, 56, & 64*

**Continuous TX at Triple Chain ABC Antenna ports with Tyco Stamped PIFA Antennas**  
Aegis Labs, Inc. File #: INTEL-080317-102

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>												
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +FAIL</i>	<i>Channel/Chain Tested</i>
7040.00	53.33	100	225			50.41	4.44	35.72	43.09	68.00	-24.91	Ch. 56 / ABC
7013.32	53.83	100	225			50.42	4.43	35.71	43.55	68.00	-24.45	Ch. 52 / ABC
7093.32	53.33	100	225			50.38	4.46	35.76	43.17	68.00	-24.83	Ch. 64 / ABC

### RADIATED EMISSIONS - Vertical Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>		<i>Preamp Factor (dB)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +FAIL</i>	<i>Comments</i>
7040.00	53.00	100	225			50.41	4.44	35.64	42.67	68.00	-25.33	Ch. 56 / ABC
7013.32	53.17	100	225			50.42	4.43	35.61	42.79	68.00	-25.21	Ch. 52 / ABC
10520.00	51.67	100	180			50.43	5.56	37.52	44.32	68.00	-23.68	
7093.32	51.50	100	0			50.38	4.46	35.69	41.27	68.00	-26.73	Ch. 64 / ABC

## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	06/25/08
<b>EUT:</b>	Intel WiFi Link 5300	<b>PROJECT NUMBER:</b>	INTEL-080317
<b>MODEL NUMBER:</b>	533AN_HMW	<b>TEST ENGINEER:</b>	KN
<b>SERIAL NUMBER:</b>	0016EA038A16	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in a host computer's mini PCI slot in <b>802.11n (5150-5350 MHz) mode 40MHz Wide.</b>	<b>TEMPERATURE:</b>	19° C
		<b>HUMIDITY:</b>	57% RH
		<b>TIME:</b>	8:00 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F +C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

**Fundamental Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)**

Channels 38, 46, 54, &amp; 62

**Continuous TX at Chain A Antenna port with Tyco Stamped PIFA Antennas**

Aegis Labs, Inc. File #: INTEL-080317-98

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	56.00	100	225		3.78	34.33	94.11			<b>Ch. 38</b>
5190.00				45.33	A	3.78	34.33	83.44		
5230.00	56.50	100	135		3.79	34.38	94.67			<b>Ch. 46</b>
5230.00				46.00	A	3.79	34.38	84.17		
5270.00	55.67	100	135		3.81	34.42	93.90			<b>Ch. 54</b>
5270.00				45.50	A	3.81	34.42	83.73		
5310.00	56.17	100	135		3.82	34.47	94.46			<b>Ch. 62</b>
5310.00				45.67	A	3.82	34.47	83.96		

**RADIATED EMISSIONS - Vertical Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	55.50	100	135		3.78	34.31	93.59			<b>Ch. 38</b>
5190.00				44.50	A	3.78	34.31	82.59		
5230.00	56.17	100	135		3.79	34.34	94.30			<b>Ch. 46</b>
5230.00				45.83	A	3.79	34.34	83.96		
5270.00	55.17	100	135		3.81	34.36	93.34			<b>Ch. 54</b>
5270.00				44.83	A	3.81	34.36	83.00		
5310.00	56.33	100	135		3.82	34.39	94.54			<b>Ch. 62</b>
5310.00				45.83	A	3.82	34.39	84.04		

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

***Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)***

***Channels 38 & 62***

***Continuous TX at Chain A Antenna port with Tyco Stamped PIFA Antennas***

***Aegis Labs, Inc. File #: INTEL-080317-98***

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5150.00							63.11	74.00	-10.89	<b>Ch. 38</b>
5150.00					A		45.27	54.00	-8.73	
5350.00							63.96	74.00	-10.04	<b>Ch. 62</b>
5350.00					A		42.96	54.00	-11.04	

### **RADIATED EMISSIONS - Vertical Antenna Polarization**

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5150.00							62.59	74.00	-11.41	<b>Ch. 38</b>
5150.00					A		44.42	54.00	-9.58	
5350.00							64.04	74.00	-9.96	<b>Ch. 62</b>
5350.00					A		43.04	54.00	-10.96	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

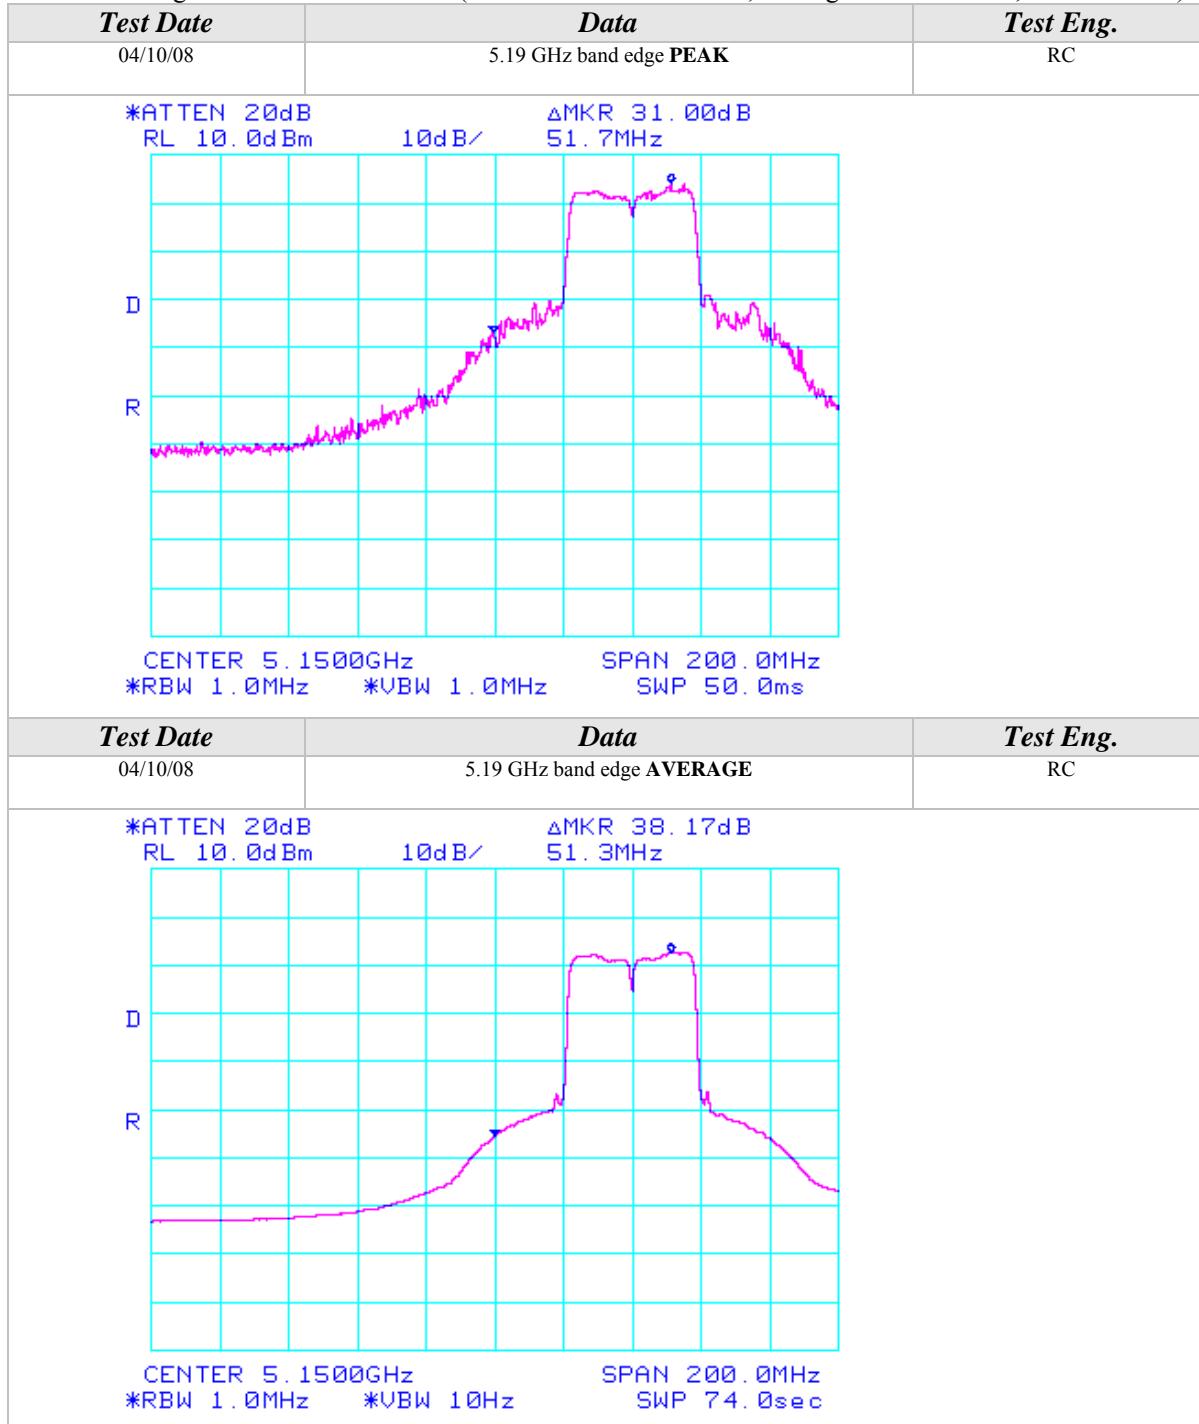
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

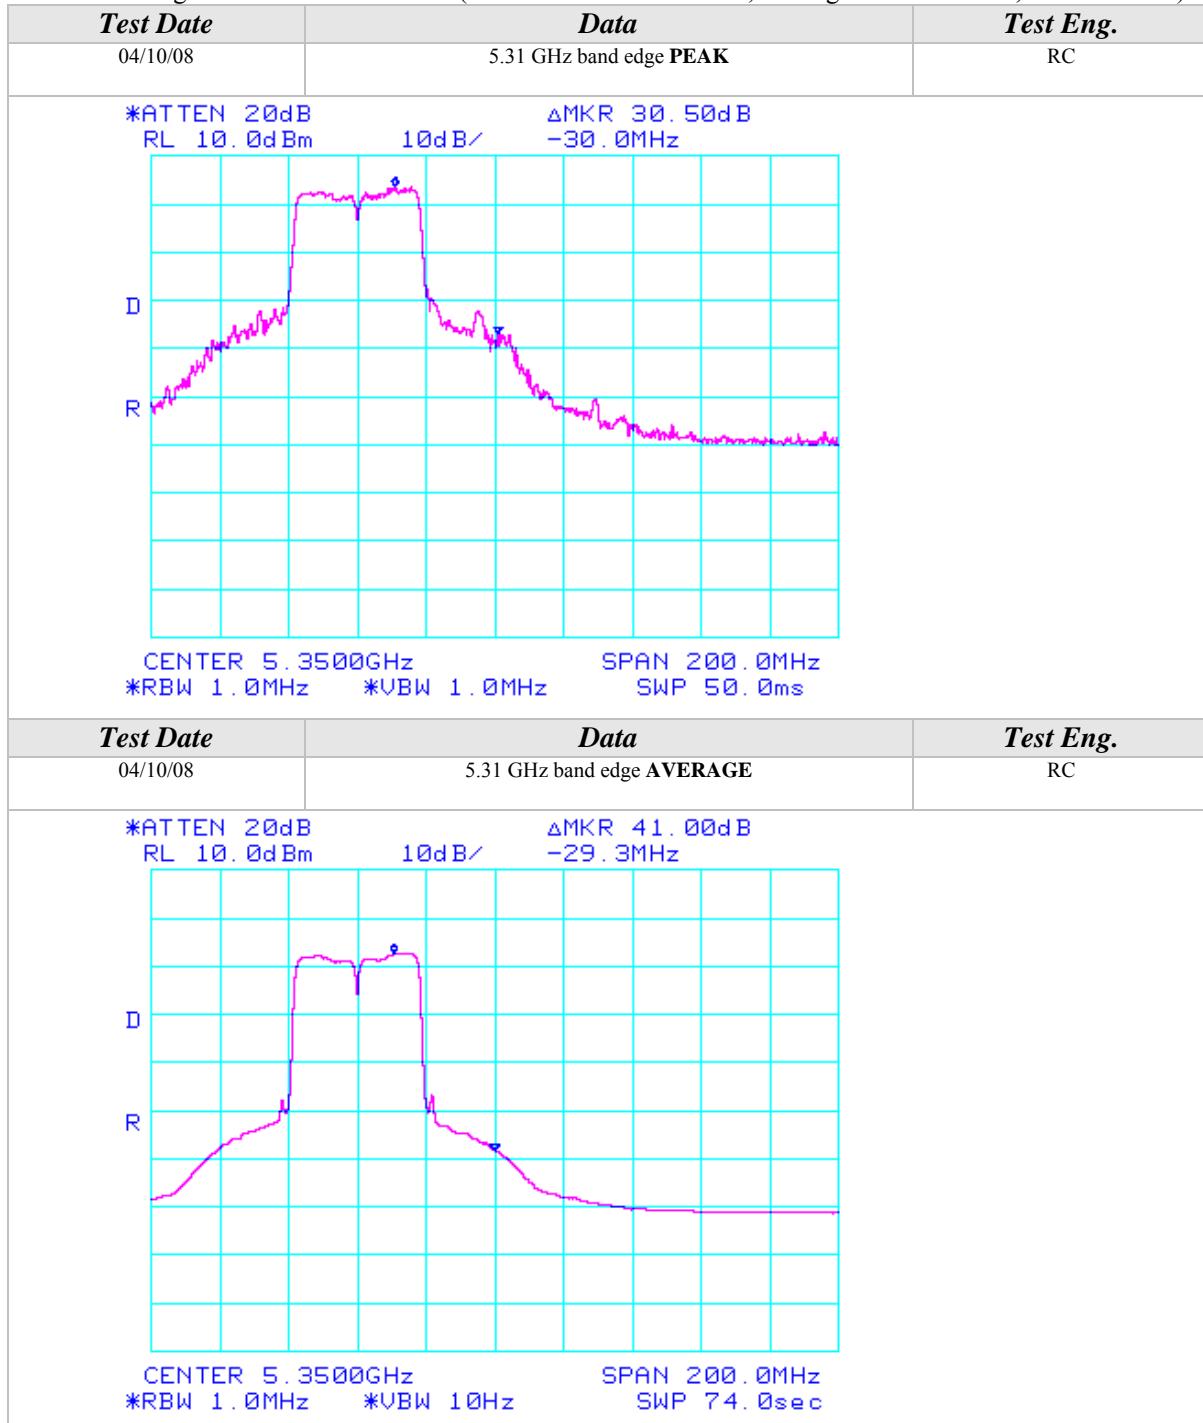
## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz, Average RBW = 1MHz, VBW = 10Hz)



## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)



## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)

Channels 38, 46, 54, &amp; 62

Continuous TX at Chain B Antenna port with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-99

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	55.50	100	225		3.78	34.33	93.61			Ch. 38
5190.00				45.17	A	3.78	34.33	83.28		
5230.00	55.00	100	225		3.79	34.38	93.17			Ch. 46
5230.00				44.17	A	3.79	34.38	82.34		
5270.00	54.67	100	225		3.81	34.42	92.90			Ch. 54
5270.00				44.00	A	3.81	34.42	82.23		
5310.00	53.50	100	180		3.82	34.47	91.79			Ch. 62
5310.00				43.17	A	3.82	34.47	81.46		

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	58.50	100	180		3.78	34.31	96.59			Ch. 38
5190.00				47.17	A	3.78	34.31	85.26		
5230.00	57.17	100	180		3.79	34.34	95.30			Ch. 46
5230.00				46.67	A	3.79	34.34	84.80		
5270.00	57.17	100	180		3.81	34.36	95.34			Ch. 54
5270.00				46.50	A	3.81	34.36	84.67		
5310.00	55.67	100	180		3.82	34.39	93.88			Ch. 62
5310.00				45.17	A	3.82	34.39	83.38		

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)**

Channels 38 &amp; 62

**Continuous TX at Chain B Antenna port with Tyco Stamped PIFA Antennas**

Aegis Labs, Inc. File #: INTEL-080317-99

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							62.28	74.00	-11.72	<b>Ch. 38</b>
5150.00					A		44.45	54.00	-9.55	
5350.00							60.62	74.00	-13.38	<b>Ch. 62</b>
5350.00					A		39.96	54.00	-14.04	

**RADIATED EMISSIONS - Vertical Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							65.26	74.00	-8.74	<b>Ch. 38</b>
5150.00					A		46.43	54.00	-7.57	
5350.00							62.71	74.00	-11.29	<b>Ch. 62</b>
5350.00					A		41.88	54.00	-12.12	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

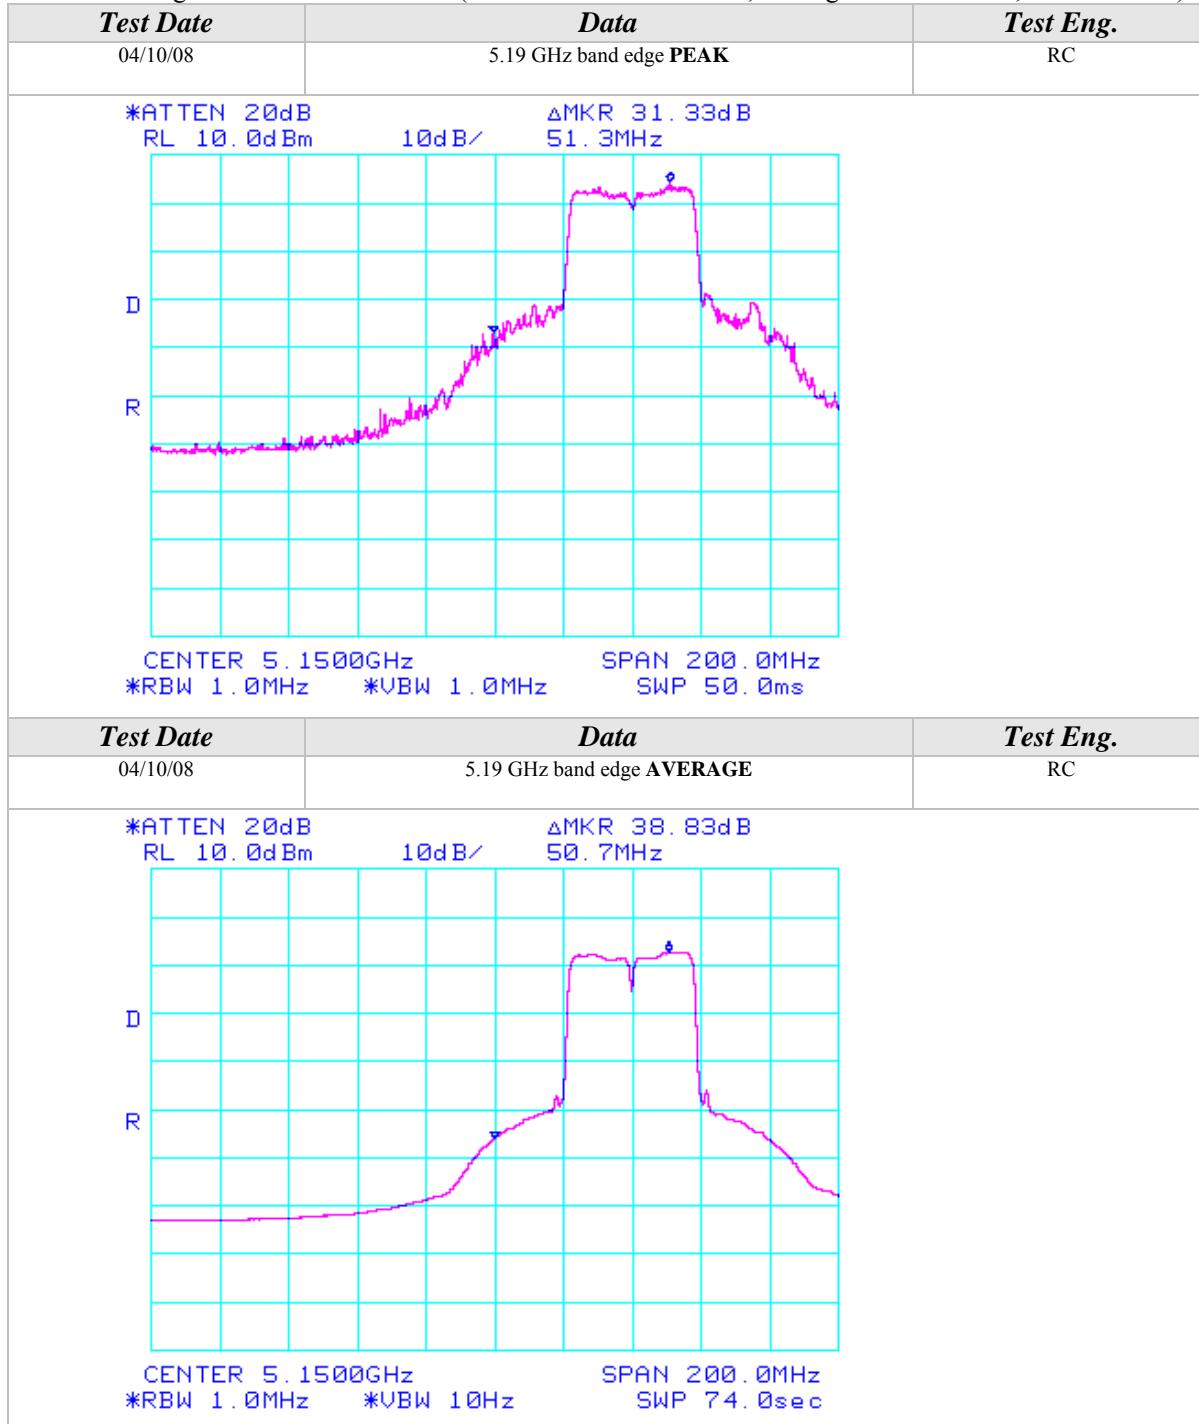
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

 $\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

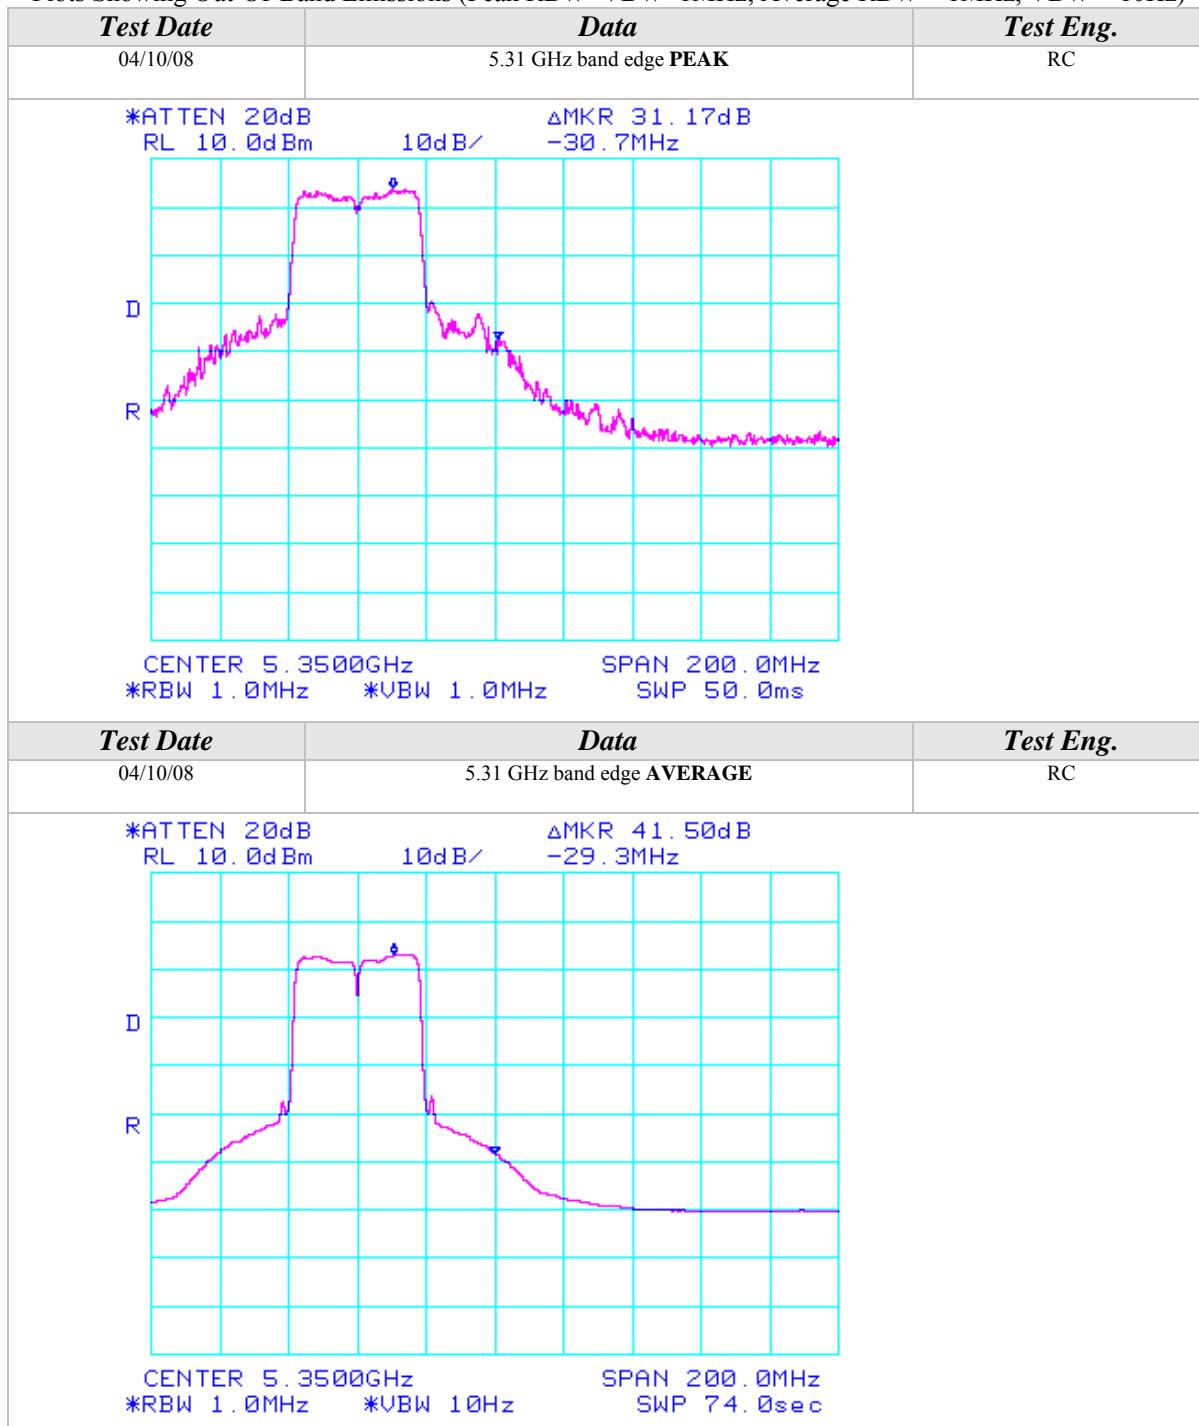
## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz, Average RBW = 1MHz, VBW = 10Hz)



## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)



## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)

Channels 38, 46, 54, &amp; 62

Continuous TX at Chain C Antenna port with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-100

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	52.00	100	135		3.78	34.33	90.11			Ch. 38
5190.00				41.67	A	3.78	34.33	79.78		
5230.00	51.50	100	180		3.79	34.38	89.67			Ch. 46
5230.00				41.17	A	3.79	34.38	79.34		
5270.00	52.17	100	180		3.81	34.42	90.40			Ch. 54
5270.00				41.33	A	3.81	34.42	79.56		
5310.00	50.83	100	180		3.82	34.47	89.12			Ch. 62
5310.00				40.67	A	3.82	34.47	78.96		

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5190.00	53.83	100	315		3.78	34.31	91.92			Ch. 38
5190.00				43.17	A	3.78	34.31	81.26		
5230.00	52.83	100	315		3.79	34.34	90.96			Ch. 46
5230.00				42.83	A	3.79	34.34	80.96		
5270.00	53.00	100	315		3.81	34.36	91.17			Ch. 54
5270.00				42.33	A	3.81	34.36	80.50		
5310.00	51.17	100	315		3.82	34.39	89.38			Ch. 62
5310.00				40.83	A	3.82	34.39	79.04		

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".



## Radiated Emissions Test Results (Continued)

### **Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5150-5350 MHz)**

**Channels 38 & 62**

**Continuous TX at Chain C Antenna port with Tyco Stamped PIFA Antennas**

**Aegis Labs, Inc. File #: INTEL-080317-100**

#### **RADIATED EMISSIONS - Horizontal Antenna Polarization**

<b>Freq. (MHz)</b>	<b>Meter Reading (dBuV)</b>	<b>Antenna Height (cm)</b>	<b>Azimuth (degrees)</b>	<b>Quasi pk or AVG (dBuV)</b>	<b>Cable Factor (dB)</b>	<b>Ant. Factor (dB)</b>	<b>Corrected Reading (dBuV)</b>	<b>Limits (dBuV)</b>	<b>Diff (dB) +=FAIL</b>	<b>Comments</b>
5150.00							60.28	74.00	-13.72	<b>Ch. 38</b>
5150.00					A		39.45	54.00	-14.55	
5350.00							57.29	74.00	-16.71	<b>Ch. 62</b>
5350.00					A		35.46	54.00	-18.54	

#### **RADIATED EMISSIONS - Vertical Antenna Polarization**

<b>Freq. (MHz)</b>	<b>Meter Reading (dBuV)</b>	<b>Antenna Height (cm)</b>	<b>Azimuth (degrees)</b>	<b>Quasi pk or AVG (dBuV)</b>	<b>Cable Factor (dB)</b>	<b>Ant. Factor (dB)</b>	<b>Corrected Reading (dBuV)</b>	<b>Limits (dBuV)</b>	<b>Diff (dB) +=FAIL</b>	<b>Comments</b>
5150.00							62.09	74.00	-11.91	<b>Ch. 38</b>
5150.00					A		40.93	54.00	-13.07	
5350.00							57.55	74.00	-16.45	<b>Ch. 62</b>
5350.00					A		35.54	54.00	-18.46	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

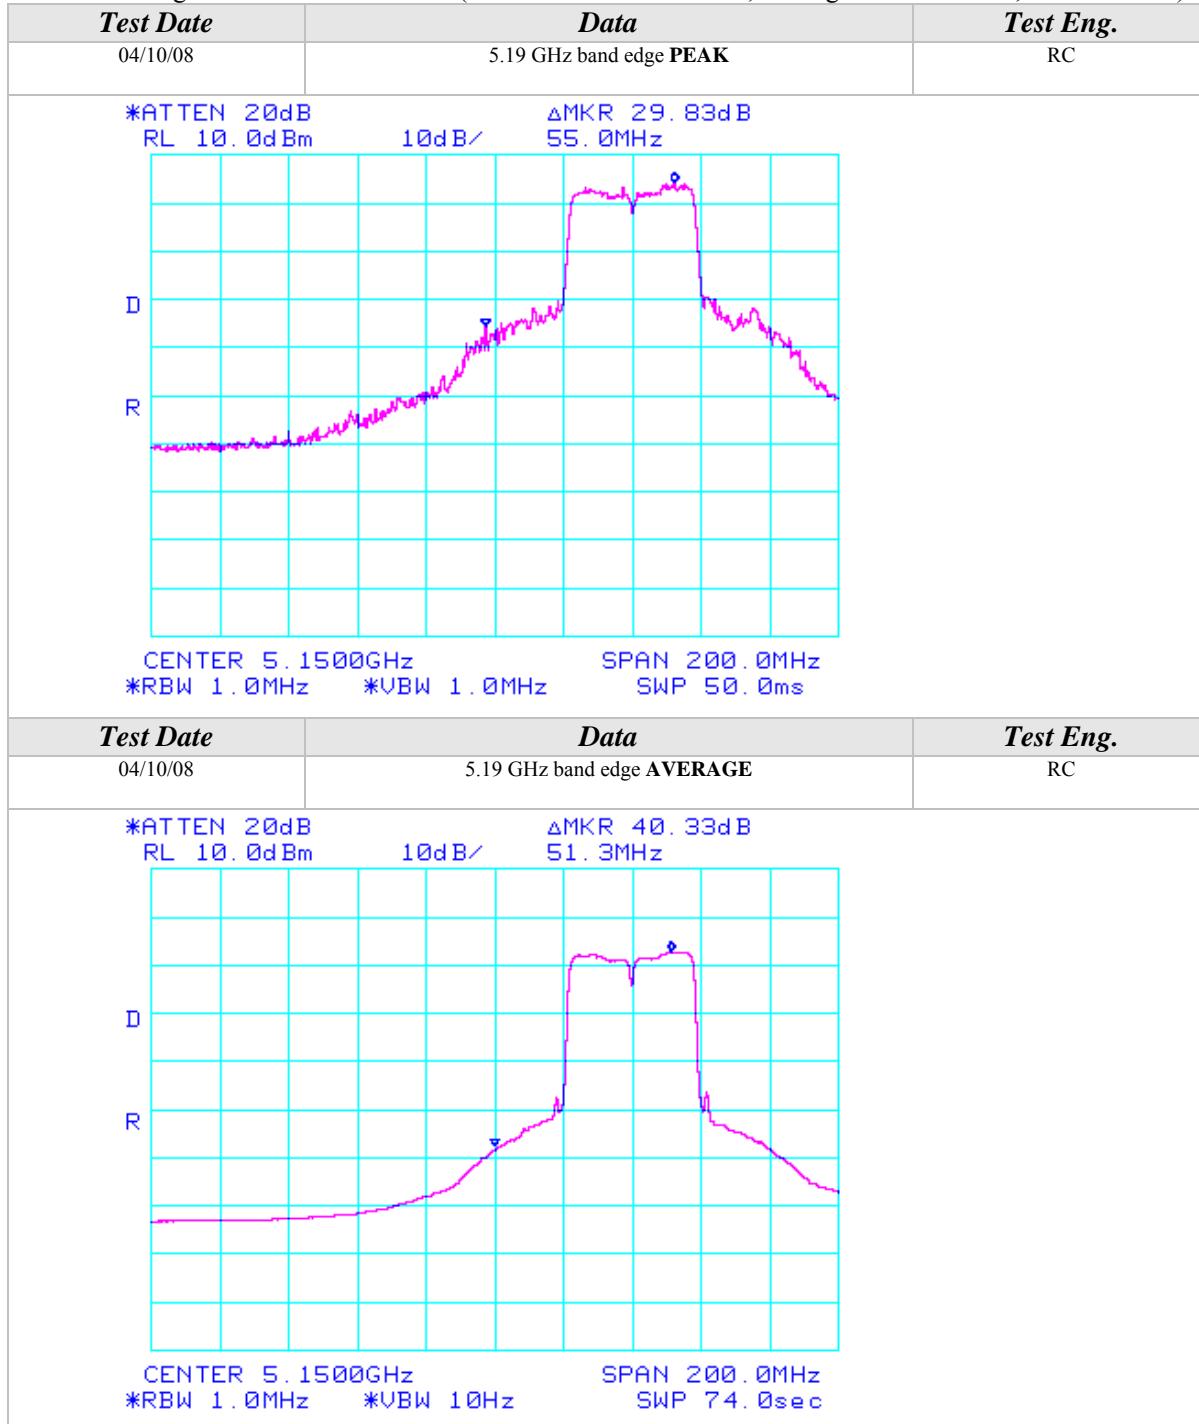
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

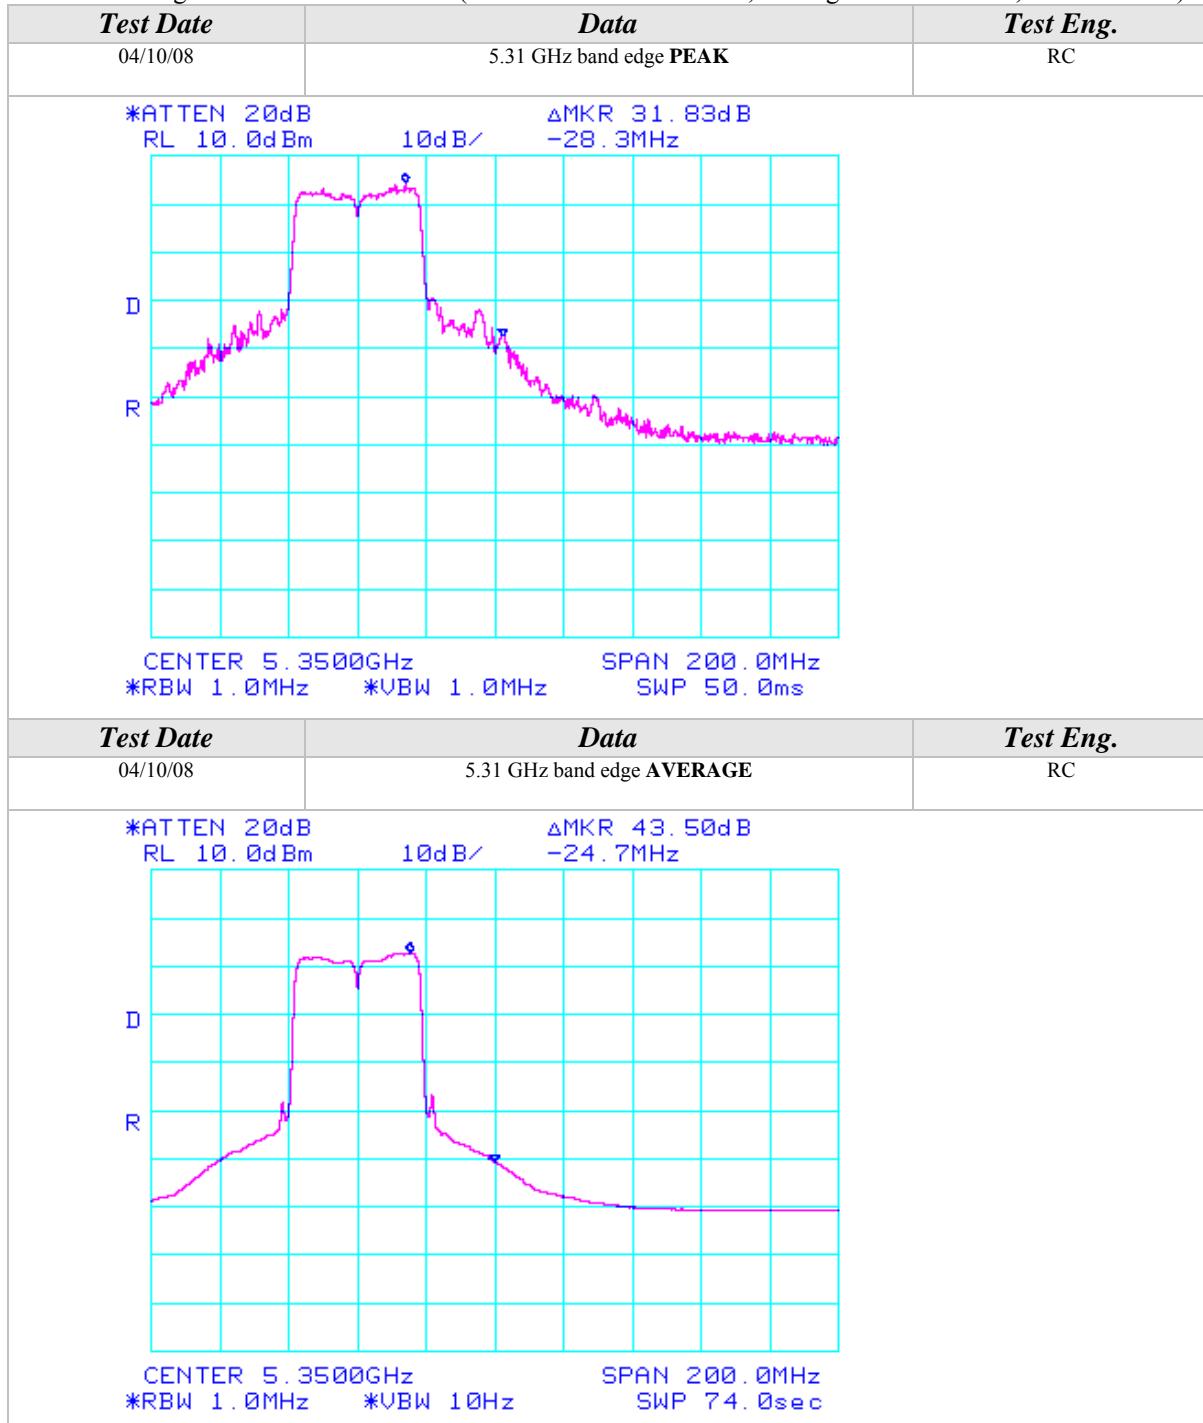
## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz, Average RBW = 1MHz, VBW = 10Hz)



## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)



## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	06/25/08
<b>EUT:</b>	Intel WiFi Link 5300	<b>PROJECT NUMBER:</b>	INTEL-080317
<b>MODEL NUMBER:</b>	533AN_HMW	<b>TEST ENGINEER:</b>	KN
<b>SERIAL NUMBER:</b>	0016EA038A16	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in a host computer's mini PCI slot in <b>802.11a (5470-5725 MHz) mode.</b>	<b>TEMPERATURE:</b>	19° C
		<b>HUMIDITY:</b>	57% RH
		<b>TIME:</b>	8:00 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F +C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11a mode (5470-5725 MHz)

Channels 100, 120, &amp; 140

 Continuous TX at Chain A Antenna port with Tyco Stamped PIFA Antennas  
 Aegis Labs, Inc. File #: INTEL-080317-98

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5500.00	56.33	100	135		3.89	34.70	94.92			Ch. 100
5500.00				46.33 A	3.89	34.70	84.92			
5600.00	56.17	100	135		3.93	34.86	94.96			Ch. 120
5600.00				46.50 A	3.93	34.86	85.29			
5700.00	58.33	100	135		3.97	35.02	97.32			Ch. 140
5700.00				48.33 A	3.97	35.02	87.32			

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5500.00	58.67	100	135		3.89	34.50	97.06			Ch. 100
5500.00				47.83 A	3.89	34.50	86.22			
5600.00	57.33	100	135		3.93	34.68	95.94			Ch. 120
5600.00				48.00 A	3.93	34.68	86.61			
5700.00	56.50	100	135		3.97	34.86	95.33			Ch. 140
5700.00				47.00 A	3.97	34.86	85.83			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5470-5725 MHz)*

*Channels 100 & 140*

**Continuous TX at Chain A Antenna port with Tyco Stamped PIFA Antennas**

Aegis Labs, Inc. File #: INTEL-080317-51

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5460.00							43.59	74.00	-30.41	<b>Ch. 100</b>
5460.00					A		26.75	54.00	-27.25	
5725.00	32.00	100	135		3.98	35.06	71.04	77.32	-6.28	<b>Ch. 140</b>

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5460.00							45.73	74.00	-28.27	<b>Ch. 100</b>
5460.00					A		28.05	54.00	-25.95	
5725.00	32.00	100	135		3.98	34.91	70.88	75.33	-4.45	<b>Ch. 140</b>

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

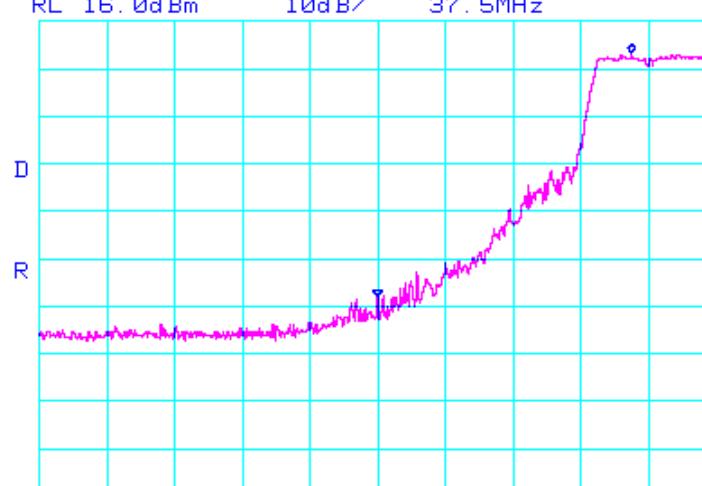
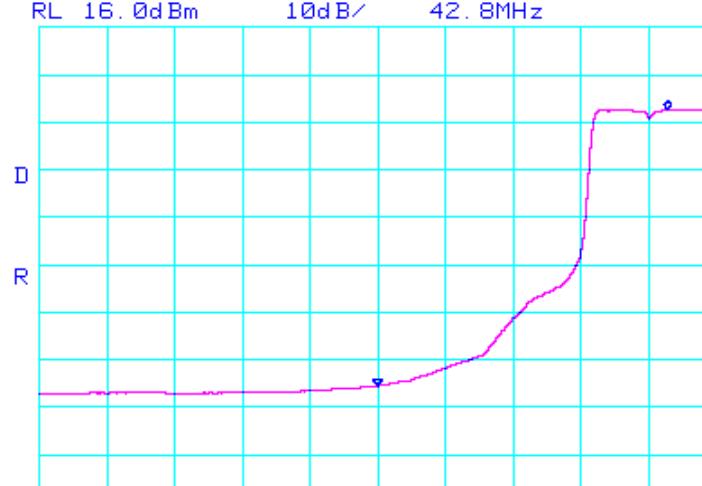
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.50 GHz band edge PEAK	RC
 *ATTEN 20dB      ΔMKR 51. 33dB RL 16. 0dBm      37. 5MHz 10dB/ 1MHz CENTER 5.4600GHz      SPAN 100.0MHz *RBW 1.0MHz      *VBW 1.0MHz SWP 50.0ms		
 *ATTEN 20dB      ΔMKR 58. 17dB RL 16. 0dBm      42. 8MHz 10dB/ 1MHz CENTER 5.4600GHz      SPAN 100.0MHz *RBW 1.0MHz      *VBW 10Hz SWP 37.0sec		
Test Date	Data	Test Eng.
04/05/08	5.50 GHz band edge AVERAGE	RC

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11a mode (5470-5725 MHz)

Channels 100, 120, &amp; 140

Continuous TX at Chain B Antenna port with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-99

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5500.00	54.67	100	225		3.89	34.70	93.26			Ch. 100
5500.00				45.33 A	3.89	34.70	83.92			
5600.00	54.00	100	225		3.93	34.86	92.79			Ch. 120
5600.00				43.67 A	3.93	34.86	82.46			
5700.00	53.83	100	225		3.97	35.02	92.82			Ch. 140
5700.00				43.17 A	3.97	35.02	82.16			

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5500.00	60.50	100	180		3.89	34.50	98.89			Ch. 100
5500.00				51.33 A	3.89	34.50	89.72			
5600.00	61.67	100	180		3.93	34.68	100.28			Ch. 120
5600.00				51.67 A	3.93	34.68	90.28			
5700.00	60.00	100	180		3.97	34.86	98.83			Ch. 140
5700.00				50.33 A	3.97	34.86	89.16			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5470-5725 MHz)*

*Channels 100 & 140*

**Continuous TX at Chain B Antenna port with Tyco Stamped PIFA Antennas**

Aegis Labs, Inc. File #: INTEL-080317-52

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5460.00							38.43	74.00	-35.57	<b>Ch. 100</b>
5460.00					A		26.92	54.00	-27.08	
5725.00	31.33	100	225		3.98	35.06	70.37	72.82	-2.45	<b>Ch. 140</b>

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5460.00							44.06	74.00	-29.94	<b>Ch. 100</b>
5460.00					A		32.72	54.00	-21.28	
5725.00	31.17	100	180		3.98	34.91	70.05	78.83	-8.78	<b>Ch. 140</b>

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

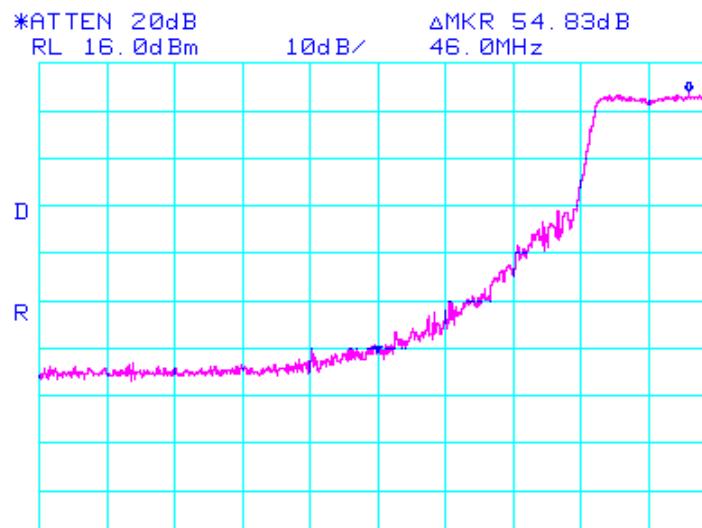
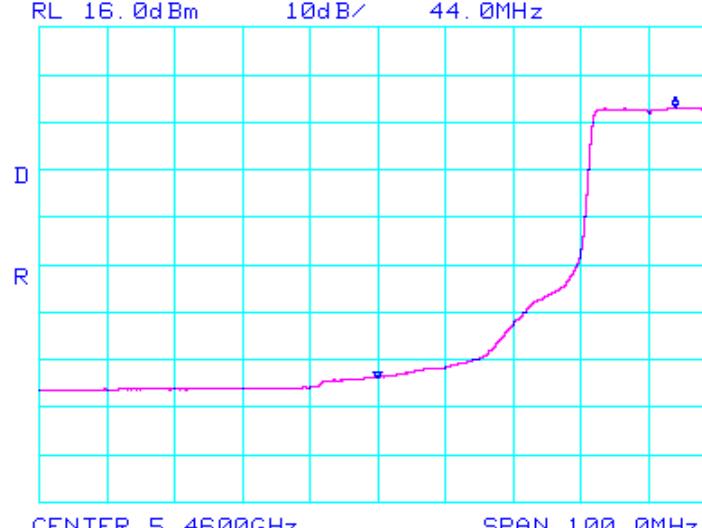
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.50 GHz band edge PEAK	RC
 <p> <b>*ATTEN 20dB</b>  <b>RL 16.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 54.83dB</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>46.0MHz</b>  <b>CENTER 5.4600GHz</b>      <b>SPAN 100.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>SWP 50.0ms</b> </p>		
 <p> <b>*ATTEN 20dB</b>  <b>RL 16.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 57.00dB</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>44.0MHz</b>  <b>CENTER 5.4600GHz</b>      <b>SPAN 100.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SWP 37.0sec</b> </p>		

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11a mode (5470-5725 MHz)

Channels 100, 120, &amp; 140

Continuous TX at Chain C Antenna port with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-100

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5500.00	51.17	100	135		3.89	34.70	89.76			Ch. 100
5500.00				41.50 A	3.89	34.70	80.09			
5600.00	53.50	100	135		3.93	34.86	92.29			Ch. 120
5600.00				43.33 A	3.93	34.86	82.12			
5700.00	55.50	100	135		3.97	35.02	94.49			Ch. 140
5700.00				44.67 A	3.97	35.02	83.66			

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5500.00	51.83	100	225		3.89	34.50	90.22			Ch. 100
5500.00				42.33 A	3.89	34.50	80.72			
5600.00	55.33	100	270		3.93	34.68	93.94			Ch. 120
5600.00				44.50 A	3.93	34.68	83.11			
5700.00	57.33	100	225		3.97	34.86	96.16			Ch. 140
5700.00				46.50 A	3.97	34.86	85.33			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5470-5725 MHz)*

*Channels 100 & 140*

**Continuous TX at Chain C Antenna port with Tyco Stamped PIFA Antennas**

*Aegis Labs, Inc. File #: INTEL-080317-100*

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) + = FAIL</i>	<i>Comments</i>
5460.00							38.59	74.00	-35.41	<b>Ch. 100</b>
5460.00					A		22.26	54.00	-31.74	
5725.00	31.50	100	135		3.98	35.06	70.54	74.49	-3.95	<b>Ch. 140</b>

### RADIATED EMISSIONS - Vertical Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) + = FAIL</i>	<i>Comments</i>
5460.00							39.05	74.00	-34.95	<b>Ch. 100</b>
5460.00					A		22.89	54.00	-31.11	
5725.00	31.00	100	225		3.98	34.91	69.88	76.16	-6.28	<b>Ch. 140</b>

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

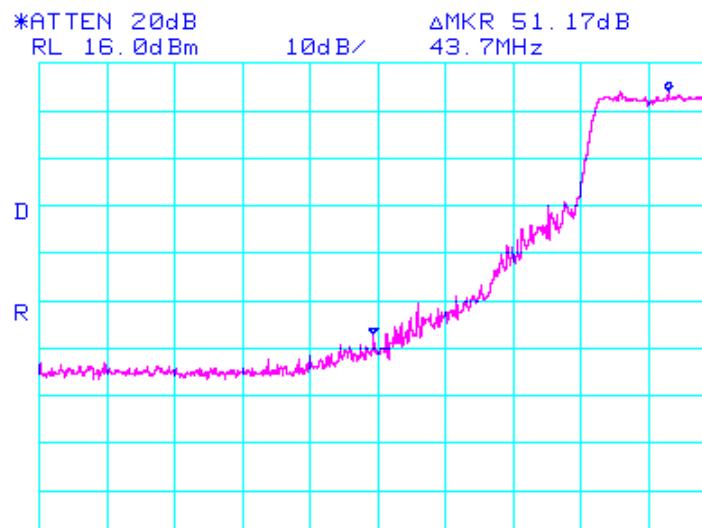
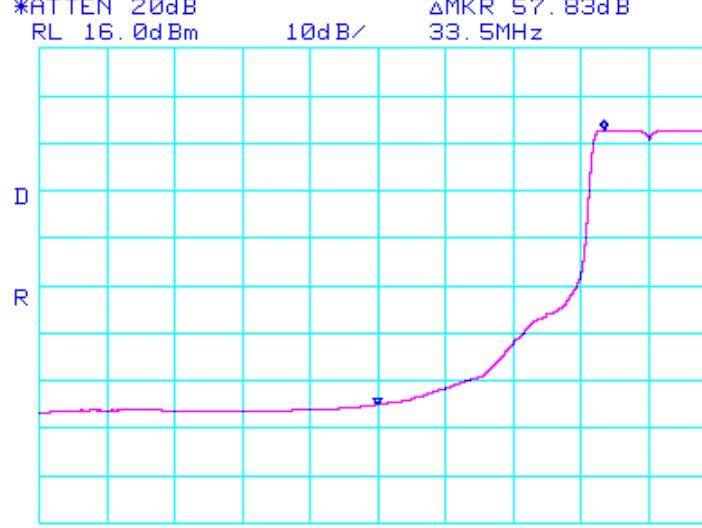
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.50 GHz band edge PEAK	RC
 CENTER 5.4600GHz      SPAN 100.0MHz *RBW 1.0MHz      *VBW 1.0MHz      SWP 50.0ms *ATTEN 20dB      ΔMKR 51.17dB RL 16.0dBm      43.7MHz 10dB/10dB		
 CENTER 5.4600GHz      SPAN 100.0MHz *RBW 1.0MHz      *VBW 10Hz      SWP 37.0sec *ATTEN 20dB      ΔMKR 57.83dB RL 16.0dBm      33.5MHz 10dB/10dB		
Test Date	Data	Test Eng.
04/05/08	5.50 GHz band edge AVERAGE	RC

## Radiated Emissions Test Results (Continued)

**Spurious Emissions Measurements in 802.11a mode (5470-5725 MHz)****Channels 100, 120, & 140****Continuous TX at Chain A, B, & C Antenna ports with Tyco Stamped PIFA Antennas****Aegis Labs, Inc. File #: INTEL-080317-101****RADIATED EMISSIONS - Horizontal Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +FAIL	Channel/Chain Tested	
7466.66	50.83	100	180		45.03	4.60	35.98	46.38	74.00	-27.62	<b>Ch. 120 /</b>	
7466.66				37.67	A	45.03	4.60	35.98	33.22	54.00	-20.78	<b>A</b>
7466.66	51.83	100	180		45.03	4.60	35.98	47.38	74.00	-26.62	<b>Ch. 120 /</b>	
7466.66				38.00	A	45.03	4.60	35.98	33.55	54.00	-20.45	<b>B</b>
11199.99	53.50	100	180		44.96	5.75	38.22	52.52	74.00	-21.48		
11199.99				39.17	A	44.96	5.75	38.22	38.19	54.00	-15.81	
7466.66	51.50	100	225		45.03	4.60	35.98	47.05	74.00	-26.95	<b>Ch. 120 /</b>	
7466.66				38.33	A	45.03	4.60	35.98	33.88	54.00	-20.12	<b>C</b>
11199.99	52.67	100	135		44.96	5.75	38.22	51.69	74.00	-22.31		
11199.99				38.83	A	44.96	5.75	38.22	37.85	54.00	-16.15	
7333.32	51.33	100	180		45.06	4.55	35.90	46.72	74.00	-27.28	<b>Ch. 100 /</b>	
7333.32				40.17	A	45.06	4.55	35.90	35.56	54.00	-18.44	<b>B</b>
7600.00	49.17	100	180		44.91	4.64	36.02	44.91	74.00	-29.09	<b>Ch. 140 /</b>	
7600.00				35.67	A	44.91	4.64	36.02	31.41	54.00	-22.59	<b>B</b>
11400.00	55.17	100	180		44.72	5.86	38.54	54.85	74.00	-19.15		
11400.00				40.33	A	44.72	5.86	38.54	40.01	54.00	-13.99	

**RADIATED EMISSIONS - Vertical Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +FAIL	Comments	
7466.66	52.33	100	225		45.03	4.60	36.07	47.97	74.00	-26.03	<b>Ch. 120 /</b>	
7466.66				38.67	A	45.03	4.60	36.07	34.31	54.00	-19.69	<b>A</b>
7466.66	52.50	100	270		45.03	4.60	36.07	48.14	74.00	-25.86	<b>Ch. 120 /</b>	
7466.66				39.33	A	45.03	4.60	36.07	34.97	54.00	-19.03	<b>B</b>
7466.66	52.00	100	135		45.03	4.60	36.07	47.64	74.00	-26.36	<b>Ch. 120 /</b>	
7466.66				39.17	A	45.03	4.60	36.07	34.81	54.00	-19.19	<b>C</b>
7333.32	52.17	100	225		45.06	4.55	35.93	47.59	74.00	-26.41	<b>Ch. 100 /</b>	
7333.32				41.00	A	45.06	4.55	35.93	36.42	54.00	-17.58	<b>B</b>
7600.00	50.67	100	225		44.91	4.64	36.12	46.51	74.00	-27.49	<b>Ch. 140 /</b>	
7600.00				37.17	A	44.91	4.64	36.12	33.01	54.00	-20.99	<b>B</b>

## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	06/25/08
<b>EUT:</b>	Intel WiFi Link 5300	<b>PROJECT NUMBER:</b>	INTEL-080317
<b>MODEL NUMBER:</b>	533AN_HMW	<b>TEST ENGINEER:</b>	KN
<b>SERIAL NUMBER:</b>	0016EA038A16	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in a host computer's mini PCI slot in 802.11n (5740-5745 MHz) mode 20MHz Wide.	<b>TEMPERATURE:</b>	19° C
		<b>HUMIDITY:</b>	57% RH
		<b>TIME:</b>	8:00 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F +C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11n mode 20MHz Wide (5470-5725 MHz)

Channels 100, 120, &amp; 140

Continuous TX at Chain A Antenna port with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-98

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5500.00	56.50	100	225		3.89	34.70	95.09			Ch. 100
5500.00				45.83	A	3.89	34.70	84.42		
5600.00	56.50	100	225		3.93	34.86	95.29			Ch. 120
5600.00				45.67	A	3.93	34.86	84.46		
5700.00	57.17	100	225		3.97	35.02	96.16			Ch. 140
5700.00				46.50	A	3.97	35.02	85.49		

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5500.00	57.67	100	135		3.89	34.50	96.06			Ch. 100
5500.00				47.17	A	3.89	34.50	85.56		
5600.00	57.83	100	135		3.93	34.68	96.44			Ch. 120
5600.00				47.17	A	3.93	34.68	85.78		
5700.00	57.83	100	135		3.97	34.86	96.66			Ch. 140
5700.00				47.33	A	3.97	34.86	86.16		

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5470-5725 MHz)**

Channels 100 &amp; 140

**Continuous TX at Chain A Antenna port with Tyco Stamped PIFA Antennas**

Aegis Labs, Inc. File #: INTEL-080317-98

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5460.00							43.43	74.00	-30.57	<b>Ch. 100</b>
5460.00					A		26.92	54.00	-27.08	
5725.00	31.50	100	225		3.98	35.06	70.54	76.16	-5.62	<b>Ch. 140</b>

**RADIATED EMISSIONS - Vertical Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5460.00							44.40	74.00	-29.60	<b>Ch. 100</b>
5460.00					A		28.06	54.00	-25.94	
5725.00	31.83	100	135		3.98	34.91	70.71	76.66	-5.95	<b>Ch. 140</b>

NOTE: The "Band Edge Field Strength" was calculated using the "Fundamental" and "Conducted Band Edge" measurements per the "Marker-Delta Method" with the following formula:

$$BE = Fm - \Delta m$$

Where

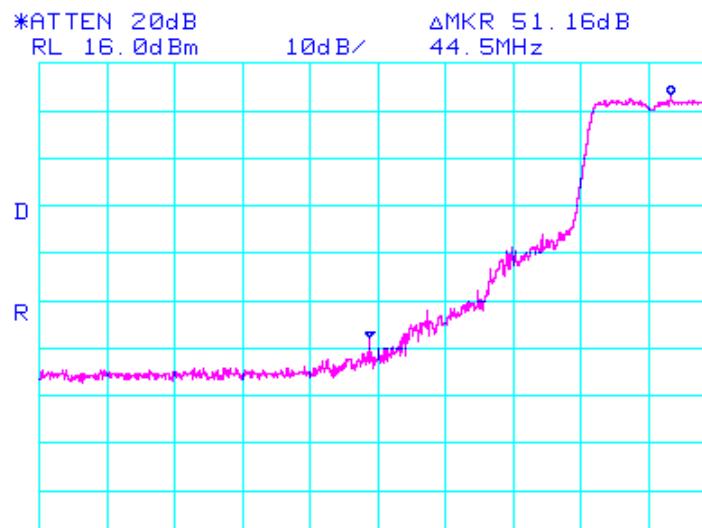
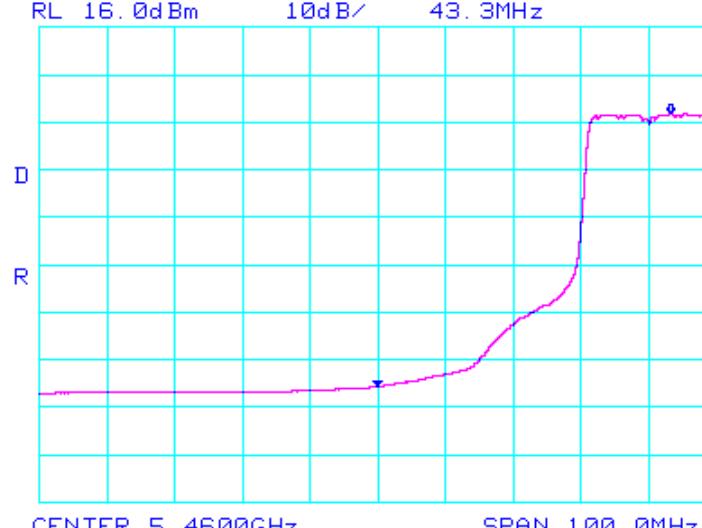
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

 $\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.50 GHz band edge PEAK	RC
 <p> <b>*ATTEN</b> 20dB      <b>ΔMKR</b> 51.16dB  <b>RL</b> 16.0 dBm      <b>44.5MHz</b>  <b>10dB/</b>  <b>D</b>  <b>R</b> </p> <p> <b>CENTER</b> 5.4600GHz      <b>SPAN</b> 100.0MHz  <b>*RBW</b> 1.0MHz      <b>*VBW</b> 1.0MHz      <b>SWP</b> 50.0ms     </p>		
 <p> <b>*ATTEN</b> 20dB      <b>ΔMKR</b> 57.50dB  <b>RL</b> 16.0 dBm      <b>43.3MHz</b>  <b>10dB/</b>  <b>D</b>  <b>R</b> </p> <p> <b>CENTER</b> 5.4600GHz      <b>SPAN</b> 100.0MHz  <b>*RBW</b> 1.0MHz      <b>*VBW</b> 10Hz      <b>SWP</b> 37.0sec     </p>		
Test Date	Data	Test Eng.
04/05/08	5.50 GHz band edge AVERAGE	RC

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11n mode 20MHz Wide (5470-5725 MHz)

Channels 100, 120, &amp; 140

Continuous TX at Chain B Antenna port with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-99

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5500.00	56.17	100	225		3.89	34.70	94.76			Ch. 100
5500.00				44.83	A	3.89	34.70	83.42		
5600.00	54.50	100	225		3.93	34.86	93.29			Ch. 120
5600.00				43.33	A	3.93	34.86	82.12		
5700.00	56.00	100	225		3.97	35.02	94.99			Ch. 140
5700.00				44.83	A	3.97	35.02	83.82		

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5500.00	60.33	100	180		3.89	34.50	98.72			Ch. 100
5500.00				49.67	A	3.89	34.50	88.06		
5600.00	60.00	100	180		3.93	34.68	98.61			Ch. 120
5600.00				48.33	A	3.93	34.68	86.94		
5700.00	57.00	100	180		3.97	34.86	95.83			Ch. 140
5700.00				45.83	A	3.97	34.86	84.66		

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5470-5725 MHz)**

**Channels 100 & 140**

**Continuous TX at Chain B Antenna port with Tyco Stamped PIFA Antennas**

**Aegis Labs, Inc. File #: INTEL-080317-52**

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5460.00							43.10	74.00	-30.90	<b>Ch. 100</b>
5460.00					A		27.08	54.00	-26.92	
5725.00	31.33	100	225		3.98	35.06	70.37	74.99	-4.62	<b>Ch. 140</b>

**RADIATED EMISSIONS - Vertical Antenna Polarization**

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5460.00							47.06	74.00	-26.94	<b>Ch. 100</b>
5460.00					A		31.72	54.00	-22.28	
5725.00	31.00	100	180		3.98	34.91	69.88	75.83	-5.95	<b>Ch. 140</b>

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.50 GHz band edge PEAK	RC
Test Date	Data	Test Eng.
04/05/08	5.50 GHz band edge AVERAGE	RC

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11n mode 20MHz Wide (5470-5725 MHz)

Channels 100, 120, &amp; 140

Continuous TX at Chain C Antenna port with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-100

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5500.00	51.83	100	225		3.89	34.70	90.42			Ch. 100
5500.00				41.00 A	3.89	34.70	79.59			
5600.00	54.17	100	135		3.93	34.86	92.96			Ch. 120
5600.00				42.67 A	3.93	34.86	81.46			
5700.00	55.50	100	135		3.97	35.02	94.49			Ch. 140
5700.00				44.67 A	3.97	35.02	83.66			

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5500.00	51.83	100	225		3.89	34.50	90.22			Ch. 100
5500.00				42.33 A	3.89	34.50	80.72			
5600.00	55.33	100	270		3.93	34.68	93.94			Ch. 120
5600.00				44.50 A	3.93	34.68	83.11			
5700.00	57.33	100	225		3.97	34.86	96.16			Ch. 140
5700.00				46.50 A	3.97	34.86	85.33			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5470-5725 MHz)**

**Channels 100 & 140**

**Continuous TX at Chain C Antenna port with Tyco Stamped PIFA Antennas**

**Aegis Labs, Inc. File #: INTEL-080317-100**

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5460.00							41.26	74.00	-32.74	<b>Ch. 100</b>
5460.00					A		23.59	54.00	-30.41	
5725.00	33.50	100	135		3.98	35.06	72.54	74.49	-1.95	<b>Ch. 140</b>

**RADIATED EMISSIONS - Vertical Antenna Polarization**

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5460.00							42.73	74.00	-31.27	<b>Ch. 100</b>
5460.00					A		24.89	54.00	-29.11	
5725.00	31.67	100	225		3.98	34.91	70.55	76.50	-5.95	<b>Ch. 140</b>

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

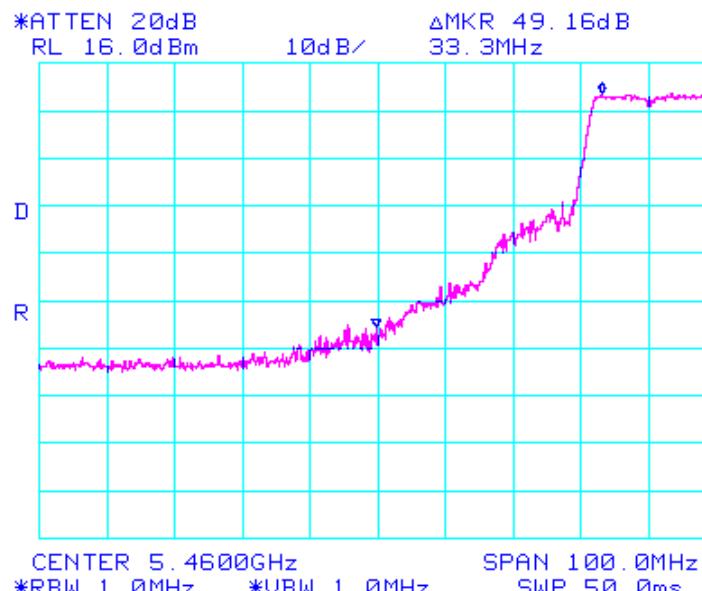
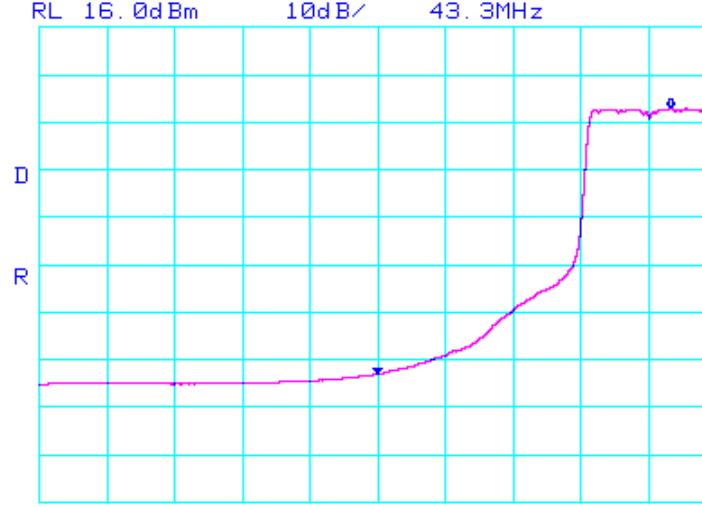
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)

Test Date	Data	Test Eng.
04/05/08	5.50 GHz band edge PEAK	RC
		
		
Test Date	Data	Test Eng.
04/05/08	5.50 GHz band edge AVERAGE	RC

## Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5470-5725 MHz)

Channels 100, 120, &amp; 140

Continuous TX at Chain A, B, &amp; C Antenna ports with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-102

## RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested	
7466.66	52.17	100	180		50.20	4.60	35.98	42.55	74.00	-31.45	Ch. 120 /	
7466.66				38.83	A	50.20	4.60	35.98	29.21	54.00	-24.79	A
7466.66	52.17	100	225		50.20	4.60	35.98	42.55	74.00	-31.45	Ch. 120 /	
7466.66				39.00	A	50.20	4.60	35.98	29.38	54.00	-24.62	B
7466.66	52.33	100	225		50.20	4.60	35.98	42.71	74.00	-31.29	Ch. 120 /	
7466.66				39.17	A	50.20	4.60	35.98	29.55	54.00	-24.45	C
3666.66	52.33	100	225		50.75	3.17	33.00	37.75	74.00	-36.25	Ch. 100 /	
3666.66				38.00	A	50.75	3.17	33.00	23.42	54.00	-30.58	C
7333.33	51.83	100	225		50.26	4.55	35.90	42.02	74.00	-31.98		
7333.33				39.17	A	50.26	4.55	35.90	29.36	54.00	-24.64	
7600.00	52.33	100	225		50.16	4.64	36.02	42.82	74.00	-31.18	Ch. 140 /	
7600.00				39.50	A	50.16	4.64	36.02	29.99	54.00	-24.01	C
11400.00	58.00	100	180		50.51	5.86	38.54	51.88	74.00	-22.12		
11400.00				43.67	A	50.51	5.86	38.54	37.55	54.00	-16.45	

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments	
7466.66	51.83	100	0		50.20	4.60	36.07	42.30	74.00	-31.70	Ch. 120 /	
7466.66				38.17	A	50.20	4.60	36.07	28.64	54.00	-25.36	A
7466.66	51.33	100	0		50.20	4.60	36.07	41.80	74.00	-32.20	Ch. 120 /	
7466.66				38.67	A	50.20	4.60	36.07	29.14	54.00	-24.86	B
11200.00	52.50	100	45		50.48	5.75	38.10	45.87	74.00	-28.13		
11200.00				37.83	A	50.48	5.75	38.10	31.20	54.00	-22.80	
7466.66	50.50	100	135		50.20	4.60	36.07	40.97	74.00	-33.03	Ch. 120 /	
7466.66				38.17	A	50.20	4.60	36.07	28.64	54.00	-25.36	C
11200.00	53.17	100	135		50.48	5.75	38.10	46.54	74.00	-27.46		
11200.00				39.17	A	50.48	5.75	38.10	32.54	54.00	-21.46	
7333.33	51.17	100	225		50.26	4.55	35.93	41.39	74.00	-32.61	Ch. 100 /	
7333.33				39.33	A	50.26	4.55	35.93	29.55	54.00	-24.45	C
7600.00	50.00	100	225		50.16	4.64	36.12	40.59	74.00	-33.41	Ch. 140 /	
7600.00				36.83	A	50.16	4.64	36.12	27.42	54.00	-26.58	C
11400.00	55.33	100	225		50.51	5.86	38.30	48.97	74.00	-25.03		
11400.00				41.17	A	50.51	5.86	38.30	34.81	54.00	-19.19	

## Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5470-5725 MHz)  
Channels 100, 120, & 140*

**Continuous TX at Triple Chain ABC Antenna ports with Tyco Stamped PIFA Antennas**  
Aegis Labs, Inc. File #: INTEL-080317-46

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
7466.66	52.00	100	225		50.20	4.60	35.98	42.38	74.00	-31.62	<b>Ch. 120 / ABC</b>
7466.66				39.17	A	50.20	4.60	35.98	29.55	54.00	-24.45
7333.33	52.33	100	225		50.26	4.55	35.90	42.52	74.00	-31.48	<b>Ch. 100 / ABC</b>
7333.33				41.33	A	50.26	4.55	35.90	31.52	54.00	-22.48
10999.98	53.17	100	90		50.45	5.65	37.90	46.27	74.00	-27.73	
10999.98				38.83	A	50.45	5.65	37.90	31.93	54.00	-22.07
7600.00	52.50	100	180		50.16	4.64	36.02	42.99	74.00	-31.01	<b>Ch. 140 / ABC</b>
7600.00				40.33	A	50.16	4.64	36.02	30.82	54.00	-23.18
114000.00	55.50	100	180		334.84	47.88	262.20	30.74	74.00	-43.26	
114000.00				42.00	A	334.84	47.88	262.20	17.24	54.00	-36.76

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
7466.66	51.83	100	225		50.20	4.60	36.07	42.30	74.00	-31.70	<b>Ch. 120 / ABC</b>
7466.66				39.00	A	50.20	4.60	36.07	29.47	54.00	-24.53
11200.00	51.67	100	225		50.48	5.75	38.10	45.04	74.00	-28.96	
11200.00				37.67	A	50.48	5.75	38.10	31.04	54.00	-22.96
7333.33	51.17	100	225		50.26	4.55	35.93	41.39	74.00	-32.61	<b>Ch. 100 / ABC</b>
7333.33				39.67	A	50.26	4.55	35.93	29.89	54.00	-24.11
7600.00	50.83	100	225		50.16	4.64	36.12	41.42	74.00	-32.58	<b>Ch. 140 / ABC</b>
7600.00				36.50	A	50.16	4.64	36.12	27.09	54.00	-26.91
11400.00	53.83	100	180		50.51	5.86	38.30	47.47	74.00	-26.53	
11400.00				39.33	A	50.51	5.86	38.30	32.97	54.00	-21.03

## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	06/25/08
<b>EUT:</b>	Intel WiFi Link 5300	<b>PROJECT NUMBER:</b>	INTEL-080317
<b>MODEL NUMBER:</b>	533AN_HMW	<b>TEST ENGINEER:</b>	KN
<b>SERIAL NUMBER:</b>	0016EA038A16	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in a host computer's mini PCI slot in <b>802.11n (5740-5745 MHz) mode 40MHz Wide.</b>	<b>TEMPERATURE:</b>	19° C
		<b>HUMIDITY:</b>	57% RH
		<b>TIME:</b>	8:00 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F +C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (5470-5725 MHz)*  
*Channels 102, 118, & 134*

**Continuous TX at Chain A Antenna port with Tyco Stamped PIFA Antennas**  
 Aegis Labs, Inc. File #: INTEL-080317-98

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5510.00	53.67	100	225		3.89	34.72	92.28			<b>Ch. 102</b>
5510.00				43.17	A	3.89	34.72	81.78		
5590.00	53.83	100	135		3.92	34.84	92.60			<b>Ch. 118</b>
5590.00				43.33	A	3.92	34.84	82.10		
5670.00	54.83	100	135		3.95	34.97	93.76			<b>Ch. 134</b>
5670.00				44.17	A	3.95	34.97	83.10		

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5510.00	54.83	100	45		3.89	34.52	93.24			<b>Ch. 102</b>
5510.00				44.67	A	3.89	34.52	83.08		
5590.00	53.83	100	135		3.92	34.66	92.42			<b>Ch. 118</b>
5590.00				43.50	A	3.92	34.66	82.09		
5670.00	54.50	100	135		3.95	34.81	93.26			<b>Ch. 134</b>
5670.00				44.33	A	3.95	34.81	83.09		

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.

## Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5470-5725 MHz)**

**Channels 102 & 134**

**Continuous TX at Chain A Antenna port with Tyco Stamped PIFA Antennas**

**Aegis Labs, Inc. File #: INTEL-080317-98**

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5460.00							51.45	74.00	-22.55	<b>Ch. 102</b>
5460.00					A		33.62	54.00	-20.38	
5725.00	30.67	100	135		3.98	35.06	69.71	73.76	-4.05	<b>Ch. 134</b>

**RADIATED EMISSIONS - Vertical Antenna Polarization**

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5460.00							52.41	74.00	-21.59	<b>Ch. 102</b>
5460.00					A		34.92	54.00	-19.08	
5725.00	31.50	100	135		3.98	34.91	70.38	73.26	-2.88	<b>Ch. 134</b>

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

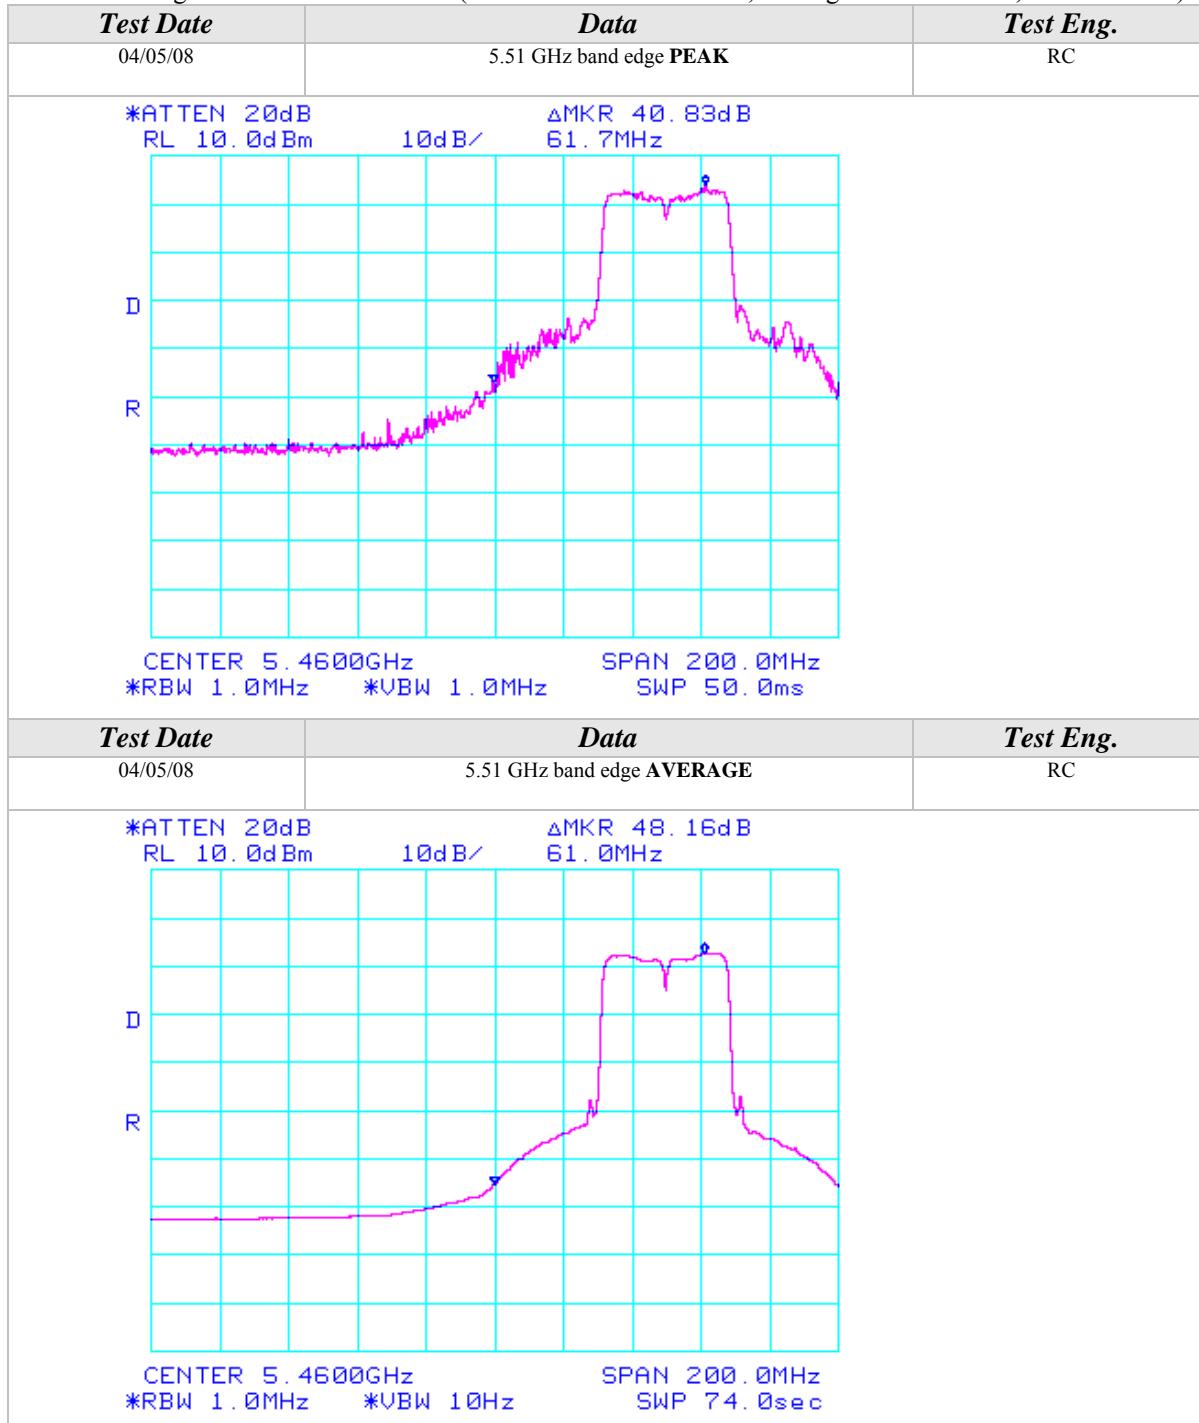
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)



## Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 40MHz Wide (5470-5725 MHz)*  
*Channels 102, 118, & 134*

**Continuous TX at Chain B Antenna port with Tyco Stamped PIFA Antennas**  
 Aegis Labs, Inc. File #: INTEL-080317-99

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5510.00	52.00	100	225		3.89	34.72	90.61			<b>Ch. 102</b>
5510.00				41.50 A	3.89	34.72	80.11			
5590.00	52.00	100	225		3.92	34.84	90.77			<b>Ch. 118</b>
5590.00				41.17 A	3.92	34.84	79.94			
5670.00	50.33	100	225		3.95	34.97	89.26			<b>Ch. 134</b>
5670.00				39.50 A	3.95	34.97	78.43			

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5510.00	57.83	100	180		3.89	34.52	96.24			<b>Ch. 102</b>
5510.00				47.00 A	3.89	34.52	85.41			
5590.00	58.00	100	180		3.92	34.66	96.59			<b>Ch. 118</b>
5590.00				47.17 A	3.92	34.66	85.76			
5670.00	56.33	100	180		3.95	34.81	95.09			<b>Ch. 134</b>
5670.00				44.33 A	3.95	34.81	83.09			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.

## Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5470-5725 MHz)**

**Channels 102 & 134**

**Continuous TX at Chain B Antenna port with Tyco Stamped PIFA Antennas**

**Aegis Labs, Inc. File #: INTEL-080317-99**

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5460.00							48.95	74.00	-25.05	<b>Ch. 102</b>
5460.00					A		30.44	54.00	-23.56	
5725.00	28.17	100	225		3.98	35.06	67.21	69.26	-2.05	<b>Ch. 134</b>

**RADIATED EMISSIONS - Vertical Antenna Polarization**

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5460.00							54.58	74.00	-19.42	<b>Ch. 102</b>
5460.00					A		35.74	54.00	-18.26	
5725.00	31.50	100	180		3.98	34.91	70.38	75.09	-4.71	<b>Ch. 134</b>

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

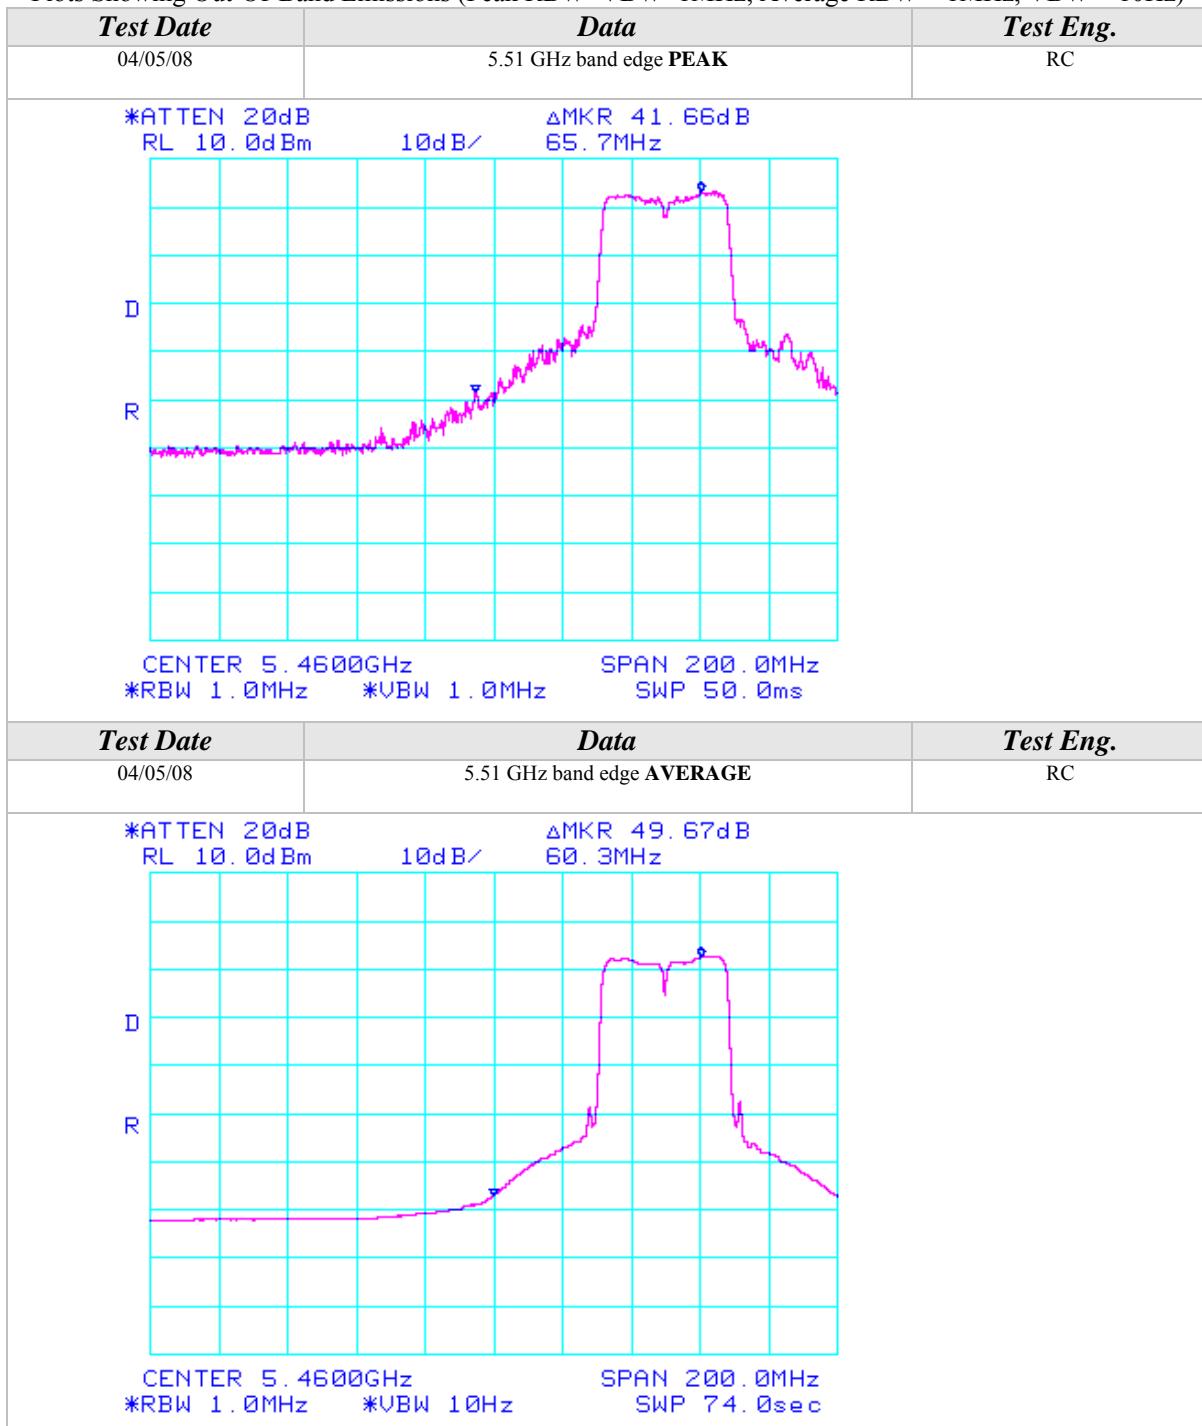
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)



## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11n mode 40MHz Wide (5470-5725 MHz)

Channels 102, 118, &amp; 134

Continuous TX at Chain C Antenna port with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-100

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5510.00	50.17	100	225		3.89	34.72	88.78			Ch. 102
5510.00				39.33 A	3.89	34.72	77.94			
5590.00	49.83	100	180		3.92	34.84	88.60			Ch. 118
5590.00				39.33 A	3.92	34.84	78.10			
5670.00	53.17	100	135		3.95	34.97	92.10			Ch. 134
5670.00				42.33 A	3.95	34.97	81.26			

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5510.00	49.50	100	225		3.89	34.52	87.91			Ch. 102
5510.00				39.00 A	3.89	34.52	77.41			
5590.00	51.17	100	270		3.92	34.66	89.76			Ch. 118
5590.00				40.33 A	3.92	34.66	78.92			
5670.00	54.17	100	225		3.95	34.81	92.93			Ch. 134
5670.00				43.33 A	3.95	34.81	82.09			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5470-5725 MHz)**

**Channels 102 & 134**

**Continuous TX at Chain C Antenna port with Tyco Stamped PIFA Antennas**

**Aegis Labs, Inc. File #: INTEL-080317-100**

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5460.00							48.11	74.00	-25.89	<b>Ch. 102</b>
5460.00					A		28.94	54.00	-25.06	
5725.00	30.67	100	135		3.98	35.06	69.71	72.10	-2.39	<b>Ch. 134</b>

**RADIATED EMISSIONS - Vertical Antenna Polarization**

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5460.00							47.24	74.00	-26.76	<b>Ch. 102</b>
5460.00					A		28.41	54.00	-25.59	
5725.00	30.17	100	225		3.98	34.91	69.05	72.93	-3.88	<b>Ch. 134</b>

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

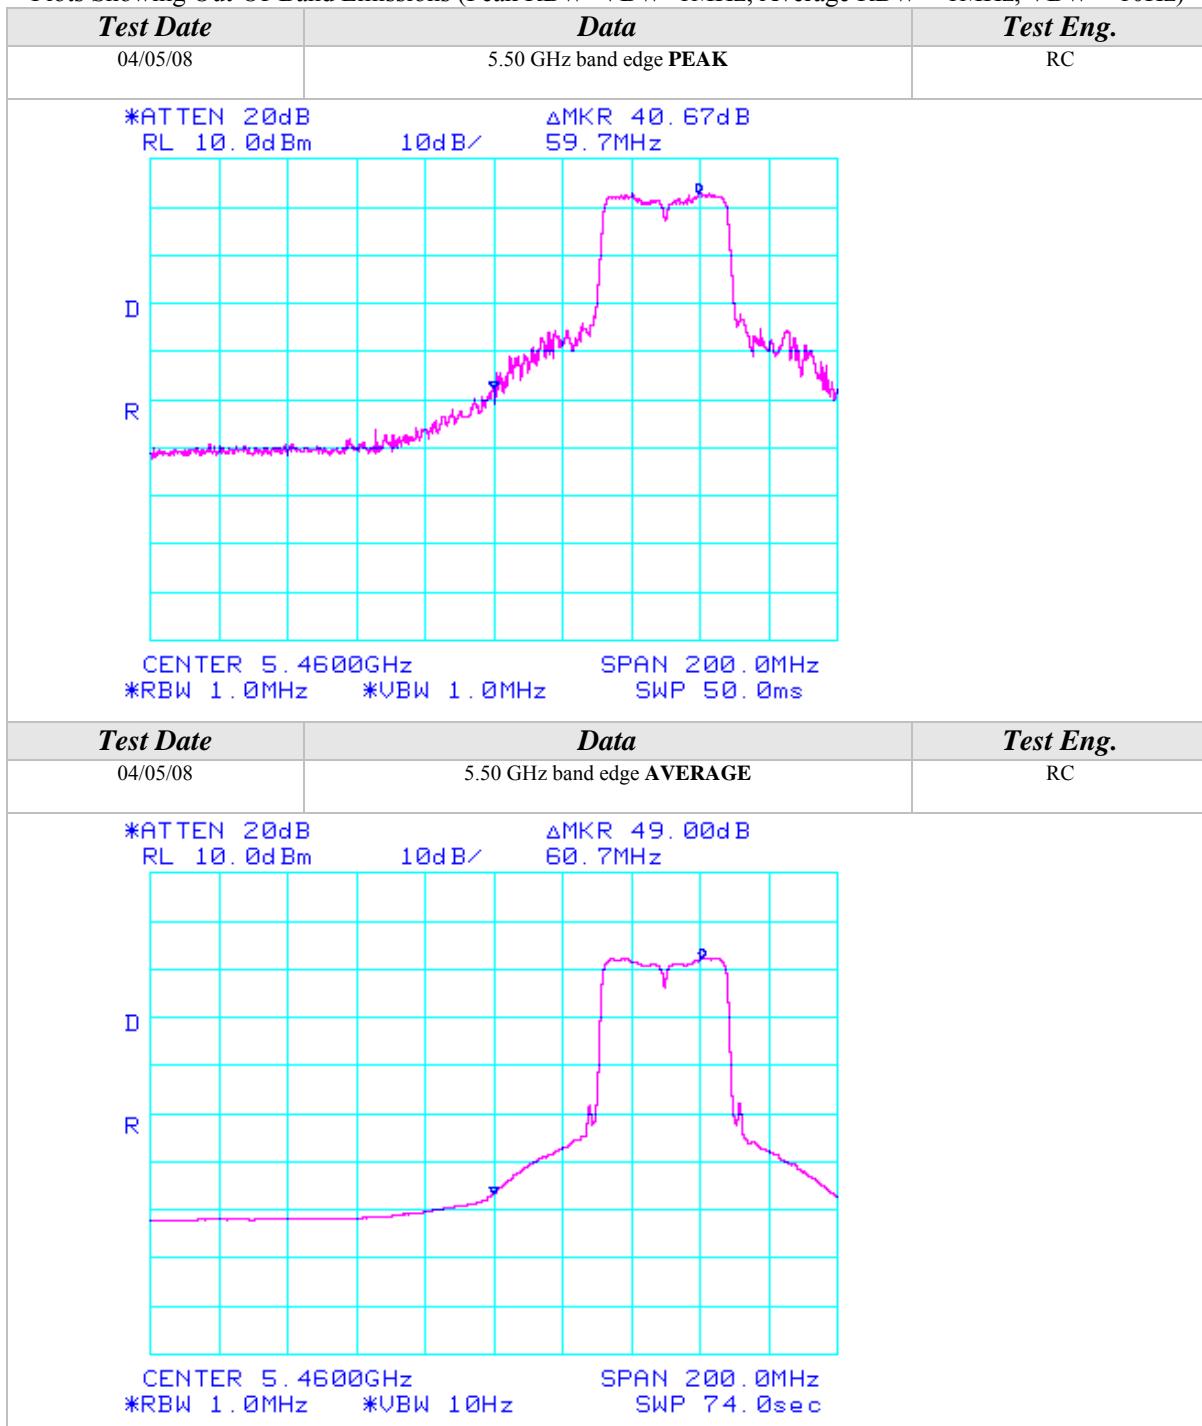
BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

Plots Showing Out-Of-Band Emissions (Peak RBW=VBW=1MHz; Average RBW = 1MHz, VBW = 10Hz)



## Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5470-5725 MHz)*  
*Channels 102, 118, & 134*

**Continuous TX at Chain A, B, & C Antenna ports with Tyco Stamped PIFA Antennas**  
*Aegis Labs, Inc. File #: INTEL-080317-102*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested	
3733.33	52.83	100	225		46.55	2.53	32.91	41.72	74.00	-32.28	<b>Ch. 118/</b>	
3733.33				42.17	A	46.55	2.53	32.91	31.06	54.00	-22.94	<b>A</b>
7466.66	52.83	100	225		44.88	3.63	37.21	48.80	74.00	-25.20		
7466.66				42.82	A	44.88	3.63	37.21	38.79	54.00	-15.21	
3733.33	54.83	100	180		46.55	2.53	32.91	43.72	74.00	-30.28	<b>Ch. 118/</b>	
3733.33				46.87	A	46.55	2.53	32.91	35.76	54.00	-18.24	<b>B</b>
7466.66	54.67	100	225		44.88	3.63	37.21	50.64	74.00	-23.36		
7466.66				42.46	A	44.88	3.63	37.21	38.43	54.00	-15.57	
3733.33	52.83	100	225		46.55	2.53	32.91	41.72	74.00	-32.28	<b>Ch. 118/</b>	
3733.33				41.26	A	46.55	2.53	32.91	30.15	54.00	-23.85	<b>C</b>
7466.66	53.00	100	225		44.88	3.63	37.21	48.97	74.00	-25.03		
7466.66				42.54	A	44.88	3.63	37.21	38.51	54.00	-15.49	
3666.66	54.83	100	225		46.56	2.50	32.77	43.53	74.00	-30.47	<b>Ch. 102/</b>	
3666.66				42.24	A	46.56	2.50	32.77	30.94	54.00	-23.06	<b>A</b>
7333.33	53.00	100	225		44.92	3.60	36.87	48.54	74.00	-25.46		
7333.33				42.19	A	44.92	3.60	36.87	37.73	54.00	-16.27	
3800.00	54.00	100	225		46.54	2.55	33.06	43.08	74.00	-30.92	<b>Ch. 134/</b>	
3800.00				43.55	A	46.54	2.55	33.06	32.63	54.00	-21.37	<b>A</b>
7600.00	52.00	100	225		44.86	3.67	37.36	48.17	74.00	-25.83		
7600.00				40.89	A	44.86	3.67	37.36	37.06	54.00	-16.94	

## Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments	
3733.33	53.83	100	270		46.55	2.53	32.51	42.31	74.00	-31.69	Ch. 118/	
3733.33				42.63	A	46.55	2.53	32.51	31.11	54.00	-22.89	A
7466.66	52.50	100	225		44.88	3.63	37.11	48.37	74.00	-25.63		
7466.66				41.32	A	44.88	3.63	37.11	37.19	54.00	-16.81	
3733.33	56.33	100	225		46.55	2.53	32.51	44.81	74.00	-29.19	Ch. 118/	
3733.33				49.15	A	46.55	2.53	32.51	37.63	54.00	-16.37	B
7466.66	55.00	100	180		44.88	3.63	37.11	50.87	74.00	-23.13		
7466.66				48.44	A	44.88	3.63	37.11	44.31	54.00	-9.69	
11200.00	49.17	100	135		45.09	4.55	38.96	47.60	74.00	-26.40		
11200.00				39.08	A	45.09	4.55	38.96	37.51	54.00	-16.49	
3733.33	54.17	100	180		46.55	2.53	32.51	42.65	74.00	-31.35	Ch. 118/	
3733.33				44.46	A	46.55	2.53	32.51	32.94	54.00	-21.06	C
7466.66	53.00	100	180		44.88	3.63	37.11	48.87	74.00	-25.13		
7466.66				46.73	A	44.88	3.63	37.11	42.60	54.00	-11.40	
3666.66	57.33	100	180		46.56	2.50	32.33	45.60	74.00	-28.40	Ch. 102/	
3666.66				48.75	A	46.56	2.50	32.33	37.02	54.00	-16.98	B
7333.33	51.50	100	225		44.92	3.60	36.77	46.94	74.00	-27.06		
7333.33				42.78	A	44.92	3.60	36.77	38.22	54.00	-15.78	
3800.00	54.50	100	180		46.54	2.55	32.68	43.20	74.00	-30.80	Ch. 134/	
3800.00				46.59	A	46.54	2.55	32.68	35.29	54.00	-18.71	B
7600.00	55.00	100	180		44.86	3.67	37.24	51.05	74.00	-22.95		
7600.00				48.17	A	44.86	3.67	37.24	44.22	54.00	-9.78	
11400.00	50.83	100	135	53.67		45.04	4.61	39.12	52.36	74.00	-21.64	
11400.00				40.10	A	45.04	4.61	39.12	38.79	54.00	-15.21	

## Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5470-5725 MHz)

Channels 102, 118, &amp; 134

Continuous TX at Triple Chain ABC Antenna ports with Tyco Stamped PIFA Antennas

Aegis Labs, Inc. File #: INTEL-080317-46

## RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested	
3666.66	54.17	100	180		46.56	2.50	32.77	42.87	74.00	-31.13	Ch. 102/	
3666.66				46.35	A	46.56	2.50	32.77	35.05	54.00	-18.95	ABC
7333.33	50.67	100	225		44.92	3.60	36.87	46.21	74.00	-27.79		
7333.33				41.75	A	44.92	3.60	36.87	37.29	54.00	-16.71	
3733.33	56.67	100	180		46.55	2.53	32.91	45.56	74.00	-28.44	Ch. 118/	
3733.33				50.62	A	46.55	2.53	32.91	39.51	54.00	-14.49	ABC
7466.66	43.00	100	135		44.88	3.63	37.21	38.97	74.00	-35.03		
7466.66				31.91	A	44.88	3.63	37.21	27.88	54.00	-26.12	
3800.00	53.17	100	225		46.54	2.55	33.06	42.25	74.00	-31.75	Ch. 134/	
3800.00				43.01	A	46.54	2.55	33.06	32.09	54.00	-21.91	ABC
7600.00	52.33	100	135		44.86	3.67	37.36	48.50	74.00	-25.50		
7600.00				42.37	A	44.86	3.67	37.36	38.54	54.00	-15.46	
11400.00	50.33	100	225		45.04	4.61	39.14	49.04	74.00	-24.96		
11400.00				39.53	A	45.04	4.61	39.14	38.24	54.00	-15.76	

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments	
3666.66	55.50	100	225		46.56	2.50	32.33	43.77	74.00	-30.23	Ch. 102/	
3666.66				47.76	A	46.56	2.50	32.33	36.03	54.00	-17.97	ABC
7333.33	50.83	100	135		44.92	3.60	36.77	46.27	74.00	-27.73		
7333.33				41.78	A	44.92	3.60	36.77	37.22	54.00	-16.78	
3733.33	54.17	100	180		46.55	2.53	32.51	42.65	74.00	-31.35	Ch. 118/	
3733.33				45.94	A	46.55	2.53	32.51	34.42	54.00	-19.58	ABC
7466.66	51.00	100	225		44.88	3.63	37.11	46.87	74.00	-27.13		
7466.66				41.57	A	44.88	3.63	37.11	37.44	54.00	-16.56	
3800.00	53.83	100	180		46.54	2.55	32.68	42.53	74.00	-31.47	Ch. 134/	
3800.00				45.38	A	46.54	2.55	32.68	34.08	54.00	-19.92	ABC
7600.00	53.17	100	135		44.86	3.67	37.24	49.22	74.00	-24.78		
7600.00				43.58	A	44.86	3.67	37.24	39.63	54.00	-14.37	
11400.00	51.93	100	225	53.67		45.04	4.61	39.12	52.36	74.00	-21.64	
11400.00				41.21	A	45.04	4.61	39.12	39.90	54.00	-14.10	

## PEAK TRANSMIT POWER

<b>CLIENT:</b>	Dell Computer Corporation	<b>DATE:</b>	04/07/08
<b>EUT:</b>	Intel WiFi Link 5300	<b>PROJECT NUMBER:</b>	INTEL-080317
<b>MODEL NUMBER:</b>	533AN_HMW	<b>TEST ENGINEER:</b>	RC/KN
<b>SERIAL NUMBER:</b>	0016EA038A16	<b>SITE #:</b>	1
<b>CONFIGURATION:</b>	Tested installed in a host computer's mini PCI slot	<b>TEMPERATURE:</b>	25 deg. C
		<b>HUMIDITY:</b>	29% RH
		<b>TIME:</b>	9:00 AM

<b>Description:</b>	For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10\log B$ , where B is the 26-dB emission bandwidth in MHz.  For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10\log B$ , where B is the 26-dB emission bandwidth in MHz.
<b>Results:</b>	Passed (See Data Sheet)
<b>Note:</b>	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"><li>• 120VAC / 60 Hz.</li></ul>

## Peak Transmit Power (Continued)

Mode	Channel	Frequency (MHz)	Chain	Data Rate (Mbps)	Total Power (dBm)	Total Power (mW)
<b>802.11a</b>	36	5180	A	6	16.04	<b>40.21</b>
<b>802.11a</b>	40	5200	A	6	16.29	<b>42.60</b>
<b>802.11a</b>	48	5240	A	6	16.24	<b>42.11</b>
<b>802.11a</b>	52	5260	A	6	16.34	<b>43.09</b>
<b>802.11a</b>	56	5280	A	6	16.34	<b>43.09</b>
<b>802.11a</b>	64	5320	A	6	16.44	<b>44.09</b>
<b>802.11a</b>	36	5180	B	6	16.34	<b>43.09</b>
<b>802.11a</b>	40	5200	B	6	16.19	<b>41.63</b>
<b>802.11a</b>	48	5240	B	6	16.44	<b>44.09</b>
<b>802.11a</b>	52	5260	B	6	16.29	<b>42.60</b>
<b>802.11a</b>	56	5280	B	6	16.24	<b>42.11</b>
<b>802.11a</b>	64	5320	B	6	16.54	<b>45.12</b>
<b>802.11a</b>	36	5180	C	6	16.54	<b>45.12</b>
<b>802.11a</b>	40	5200	C	6	16.49	<b>44.60</b>
<b>802.11a</b>	48	5240	C	6	16.64	<b>46.17</b>
<b>802.11a</b>	52	5260	C	6	16.64	<b>46.17</b>
<b>802.11a</b>	56	5280	C	6	16.64	<b>46.17</b>
<b>802.11a</b>	64	5320	C	6	16.54	<b>45.12</b>
<hr/>						
<b>802.11n</b>	36	5180	A	HT0	16.04	<b>40.21</b>
<b>802.11n</b>	40	5200	A	HT0	16.24	<b>42.11</b>
<b>802.11n</b>	48	5240	A	HT0	16.19	<b>41.63</b>
<b>802.11n</b>	52	5260	A	HT0	16.29	<b>42.60</b>
<b>802.11n</b>	56	5280	A	HT0	16.24	<b>42.11</b>
<b>802.11n</b>	64	5320	A	HT0	16.04	<b>40.21</b>
<b>802.11n</b>	36	5180	B	HT0	16.04	<b>40.21</b>
<b>802.11n</b>	40	5200	B	HT0	16.44	<b>44.09</b>
<b>802.11n</b>	48	5240	B	HT0	16.14	<b>41.15</b>
<b>802.11n</b>	52	5260	B	HT0	16.54	<b>45.12</b>
<b>802.11n</b>	56	5280	B	HT0	16.44	<b>44.09</b>
<b>802.11n</b>	64	5320	B	HT0	16.34	<b>43.09</b>
<b>802.11n</b>	36	5180	C	HT0	16.44	<b>44.09</b>
<b>802.11n</b>	40	5200	C	HT0	16.34	<b>43.09</b>
<b>802.11n</b>	48	5240	C	HT0	16.54	<b>45.12</b>
<b>802.11n</b>	52	5260	C	HT0	16.54	<b>45.12</b>
<b>802.11n</b>	56	5280	C	HT0	16.54	<b>45.12</b>
<b>802.11n</b>	64	5320	C	HT0	16.44	<b>44.09</b>

NOTE: The output power measurement is conducted.

## Peak Transmit Power (Continued)

Mode	Channel	Frequency (MHz)	Chain	Data Rate (Mbps)	Total Power (dBm)	Total Power (mW)
<b>802.11a</b>	100	5500	A	6	16.04	<b>40.21</b>
<b>802.11a</b>	120	5600	A	6	16.34	<b>43.09</b>
<b>802.11a</b>	140	5700	A	6	16.04	<b>40.21</b>
<b>802.11a</b>	100	5500	B	6	16.34	<b>43.09</b>
<b>802.11a</b>	120	5600	B	6	16.44	<b>44.09</b>
<b>802.11a</b>	140	5700	B	6	16.34	<b>43.09</b>
<b>802.11a</b>	100	5500	C	6	16.14	<b>41.15</b>
<b>802.11a</b>	120	5600	C	6	16.64	<b>46.17</b>
<b>802.11a</b>	140	5700	C	6	16.14	<b>41.15</b>
<b>802.11n</b>	100	5500	A	HT0	16.04	<b>40.21</b>
<b>802.11n</b>	120	5600	A	HT0	16.19	<b>41.63</b>
<b>802.11n</b>	140	5700	A	HT0	16.39	<b>43.59</b>
<b>802.11n</b>	100	5500	B	HT0	16.04	<b>40.21</b>
<b>802.11n</b>	120	5600	B	HT0	16.24	<b>42.11</b>
<b>802.11n</b>	140	5700	B	HT0	16.14	<b>41.15</b>
<b>802.11n</b>	100	5500	C	HT0	16.54	<b>45.12</b>
<b>802.11n</b>	120	5600	C	HT0	16.54	<b>45.12</b>
<b>802.11n</b>	140	5700	C	HT0	16.44	<b>44.09</b>
<b>802.11n (40MHz)</b>	38(F)	5190	A	HT0	16.60	<b>45.69</b>
<b>802.11n (40MHz)</b>	46(F)	5230	A	HT0	16.64	<b>46.11</b>
<b>802.11n (40MHz)</b>	54(F)	5270	A	HT0	16.65	<b>46.21</b>
<b>802.11n (40MHz)</b>	62(F)	5310	A	HT0	16.38	<b>43.43</b>
<b>802.11n (40MHz)</b>	38(F)	5190	B	HT0	16.64	<b>46.11</b>
<b>802.11n (40MHz)</b>	46(F)	5230	B	HT0	16.47	<b>44.34</b>
<b>802.11n (40MHz)</b>	54(F)	5270	B	HT0	16.32	<b>42.83</b>
<b>802.11n (40MHz)</b>	62(F)	5310	B	HT0	16.62	<b>45.90</b>
<b>802.11n (40MHz)</b>	38(F)	5190	C	HT0	16.42	<b>43.83</b>
<b>802.11n (40MHz)</b>	46(F)	5230	C	HT0	16.54	<b>45.06</b>
<b>802.11n (40MHz)</b>	54(F)	5270	C	HT0	16.41	<b>43.73</b>
<b>802.11n (40MHz)</b>	62(F)	5310	C	HT0	16.33	<b>42.93</b>
<b>802.11n (40MHz)</b>	102(F)	5510	A	HT0	16.62	<b>45.90</b>
<b>802.11n (40MHz)</b>	118(F)	5590	A	HT0	16.57	<b>45.37</b>
<b>802.11n (40MHz)</b>	134(F)	5670	A	HT0	16.32	<b>42.83</b>
<b>802.11n (40MHz)</b>	102(F)	5510	B	HT0	16.29	<b>42.54</b>
<b>802.11n (40MHz)</b>	118(F)	5590	B	HT0	16.63	<b>46.00</b>
<b>802.11n (40MHz)</b>	134(F)	5670	B	HT0	16.50	<b>44.65</b>
<b>802.11n (40MHz)</b>	102(F)	5510	C	HT0	16.22	<b>41.86</b>
<b>802.11n (40MHz)</b>	118(F)	5590	C	HT0	16.51	<b>44.75</b>
<b>802.11n (40MHz)</b>	134(F)	5670	C	HT0	16.47	<b>44.34</b>

NOTE: The output power measurement is conducted.

## Peak Transmit Power (Continued)

Triple Chain ABC Aggregate Power

Mode	Channel	Frequency (MHz)	Chain	Data Rate (Mbps)	Total Output Power (dBm)	Total Output Power (mW)
<b>802.11n (20MHz)</b>	36	5180	ABC	HT16	16.44	<b>44.01</b>
<b>802.11n (20MHz)</b>	40	5200	ABC	HT16	16.46	<b>44.29</b>
<b>802.11n (20MHz)</b>	48	5240	ABC	HT16	16.45	<b>44.16</b>
<b>802.11n (20MHz)</b>	52	5260	ABC	HT16	16.53	<b>44.94</b>
<b>802.11n (20MHz)</b>	56	5280	ABC	HT16	16.33	<b>42.90</b>
<b>802.11n (20MHz)</b>	64	5320	ABC	HT16	16.54	<b>45.03</b>
<b>802.11n (40MHz)</b>	38(F)	5190	ABC	HT16	16.52	<b>44.86</b>
<b>802.11n (40MHz)</b>	46(F)	5230	ABC	HT16	16.44	<b>44.09</b>
<b>802.11n (40MHz)</b>	54(F)	5270	ABC	HT16	16.57	<b>45.35</b>
<b>802.11n (40MHz)</b>	62(F)	5310	ABC	HT16	16.52	<b>44.83</b>
<b>802.11n (20MHz)</b>	100	5500	ABC	HT16	16.45	<b>44.13</b>
<b>802.11n (20MHz)</b>	120	5600	ABC	HT16	16.38	<b>43.40</b>
<b>802.11n (20MHz)</b>	140	5700	ABC	HT16	16.50	<b>44.62</b>
<b>802.11n (40MHz)</b>	102(F)	5510	ABC	HT16	16.57	<b>45.36</b>
<b>802.11n (40MHz)</b>	118(F)	5590	ABC	HT16	16.47	<b>44.40</b>
<b>802.11n (40MHz)</b>	134(F)	5670	ABC	HT16	16.44	<b>44.01</b>

(F) = Fat Channel



## APPENDIX B

### ***MODIFICATIONS AND RECOMMENDATIONS***

<b>1.0</b>	NONE