



**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION  
TEST REPORT**

**FOR**

**802.11abg CARDBUS ADAPTER**

**MODEL NUMBER: WLI-CB-AG108HP**

**FCC ID: FDI-09102021-0**

**REPORT NUMBER: 06J10304-1**

**ISSUE DATE: JUNE 02, 2006**

*Prepared for*  
**BUFFALO INC.**

**15, SHIBATA HONDORI 4-CHOME, MINAMI-KU  
NAGOYA 457-8520, JAPAN**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

**NVLAP**<sup>®</sup>  
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	6/2/2006	Initial Issue	A. Ilarina

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY.....</b>	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	5
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	5
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>6</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	6
5.2. <i>MAXIMUM OUTPUT POWER .....</i>	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	6
5.4. <i>SOFTWARE AND FIRMWARE .....</i>	6
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	6
5.6. <i>DESCRIPTION OF TEST SETUP .....</i>	7
5.7. <i>TEST AND MEASUREMENT EQUIPMENT.....</i>	9
<b>6. LIMITS AND RESULTS .....</b>	<b>10</b>
6.1. <i>CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND .....</i>	10
6.1.1. 6 dB BANDWIDTH .....	10
6.1.2. 99% BANDWIDTH.....	18
6.1.3. PEAK OUTPUT POWER .....	26
6.1.4. MAXIMUM PERMISSIBLE EXPOSURE .....	35
6.1.5. AVERAGE POWER.....	38
6.1.6. PEAK POWER SPECTRAL DENSITY .....	39
6.1.7. CONDUCTED SPURIOUS EMISSIONS.....	47
6.2. <i>RADIATED EMISSIONS.....</i>	62
6.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS .....	62
6.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND .....	65
6.3. <i>POWERLINE CONDUCTED EMISSIONS .....</i>	84
<b>7. SETUP PHOTOS .....</b>	<b>88</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** BUFFALO INC.  
15, SHIBATA HONDORI 4-CHOME  
MONAMI-KU, NAGOYA 457-8520, JAPAN

**EUT DESCRIPTION:** 802.11abg CARDBUS ADAPTER

**MODEL:** WLI-CB-AG108HP

**SERIAL NUMBER:** 01743

**DATE TESTED:** MAY 18-21, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



---

ALVIN ILARINA  
EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



---

CHIN PANG  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an 802.11abg transceiver cardbus adapter

The radio module is manufactured by BUFFALO INC..

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	19.69	93.11
2412 - 2462	802.11g	23.44	220.80
2412 - 2462	802.11g Turbo	24.75	298.54

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a permanently attached integral antenna for 2.4GHz and 5GHz bands, with a maximum gain of 1.7dBi. and 0.6dBi respectively.

### 5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was Atheros ART 5.3

The test utility software used during testing was Art\_v53\_build5\_all, rev. 5.3 Build #22

### 5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2462MHz.

The worst-case data rate for this channel is determined to be 1Mb/s for b mode and 6Mb/s for g mode based on previous experience with 2.4GHz WLAN product design architectures.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Toshiba	Satellite	91617937PU	DoC
AC Adapter	Toshiba	PA3083U-1A2A	0109AQ043423G	DoC


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	3	US 115V	Un-shielded	2m	NA
2	DC	1	DC	Un-shielded	2m	NA

### TEST SETUP

The EUT is installed in a host laptop during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

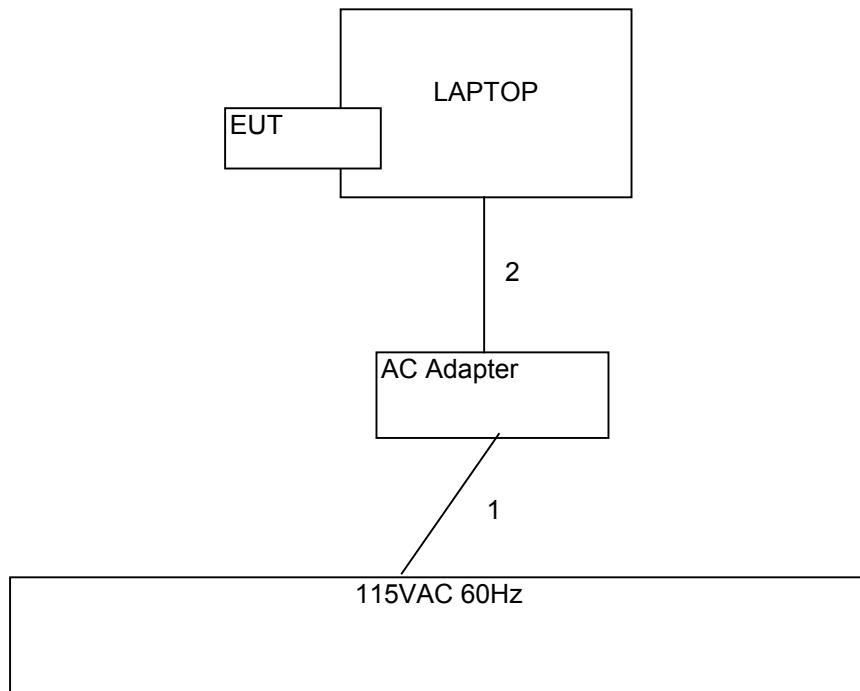

## 5.7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Test Receiver	R & S	ESHS 20	827129/006	6/3/2006
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2006
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A121003	9/3/2006
EMI Receiver, 9 kHz ~ 2.9 GHz	Agilent / HP	8542E	3942A00286	2/4/2007
RF Filter Section	Agilent / HP	85420E	3705A00256	2/4/2007
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	US42510266	10/19/2006
Peak Power Meter	Agilent / HP	E4416A	GB41291160	12/2/2007
Peak / Average Power Sensor	Agilent	E9327A	US40440755	12/2/2007
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	4/22/2007
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00369	8/17/2006
Antenna, Horn 18 ~ 26 GHz	ARA	MWH-1826/B	1049	9/12/2006
Preamplifier, 26 ~ 40 GHz	Miteq	NSP4000-SP2	924343	8/18/2006

## 6. LIMITS AND RESULTS

### 6.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

#### 6.1.1. 6 dB BANDWIDTH

##### LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

##### RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	12000	500	11500
Middle	2437	12000	500	11500
High	2462	12000	500	11500


802.11g Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16470	500	15970
Middle	2437	16400	500	15900
High	2462	16400	500	15900


802.11g Turbo Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Middle	2437	32500	500	32000


**6 DB BANDWIDTH (802.11b MODE)**

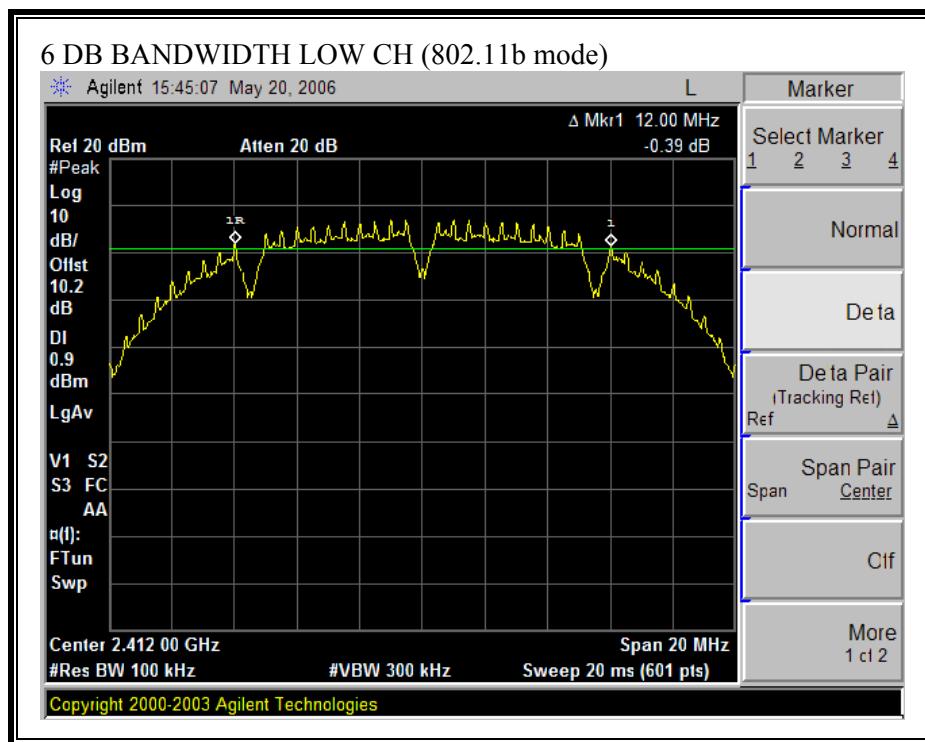


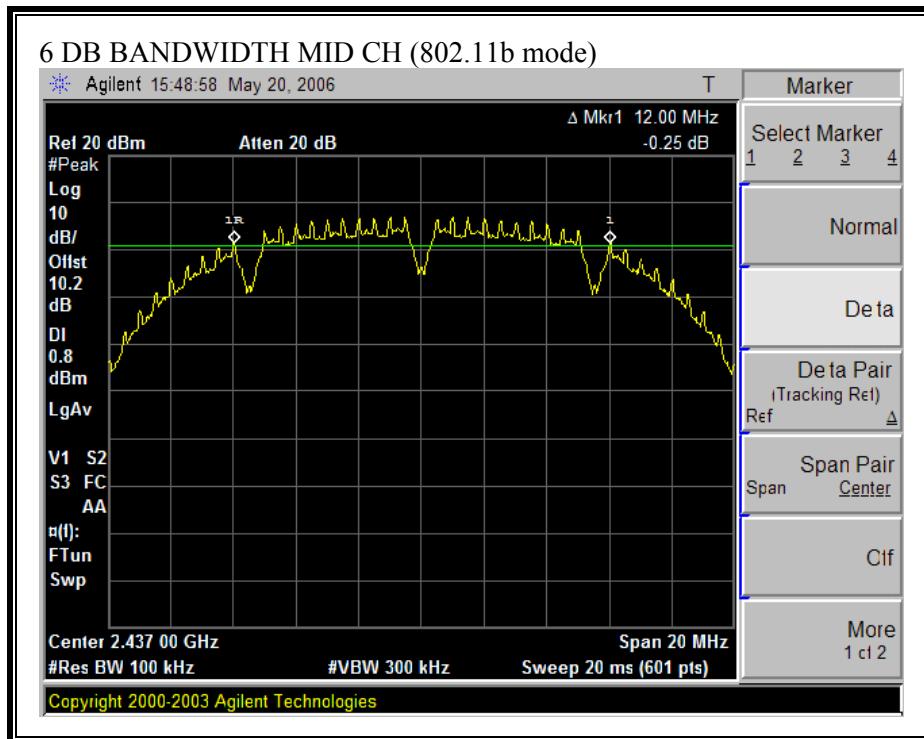


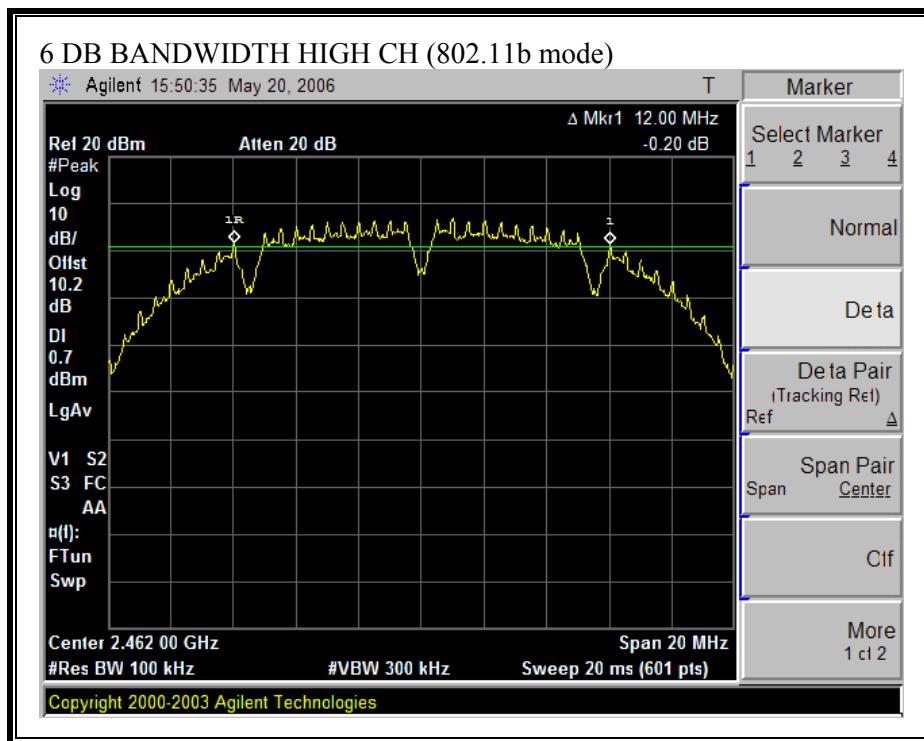


**6 DB BANDWIDTH (802.11g MODE)**

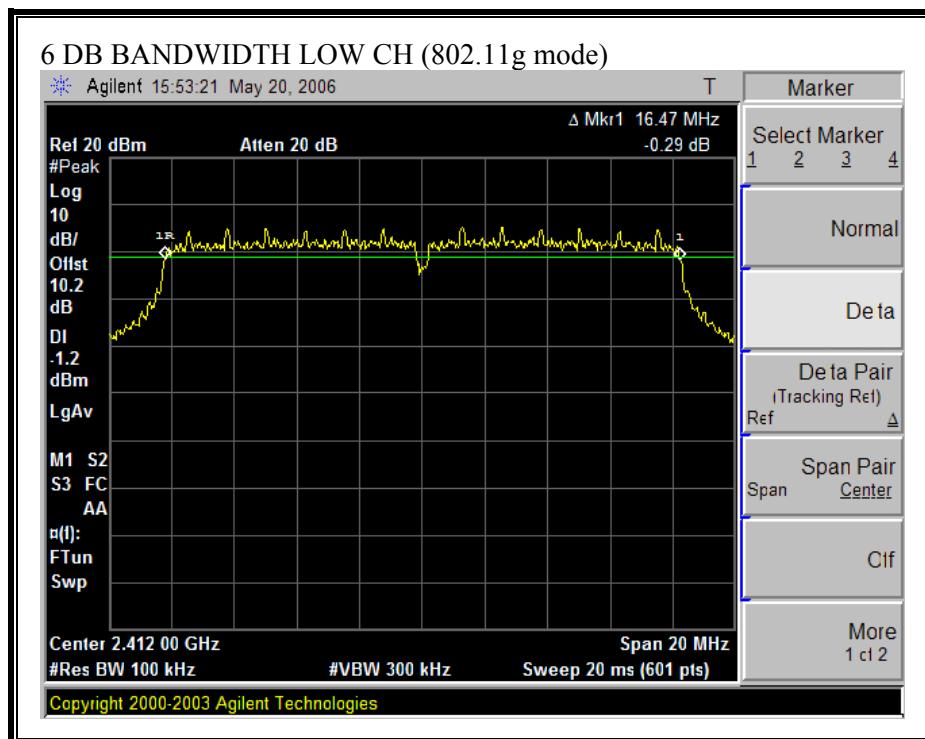

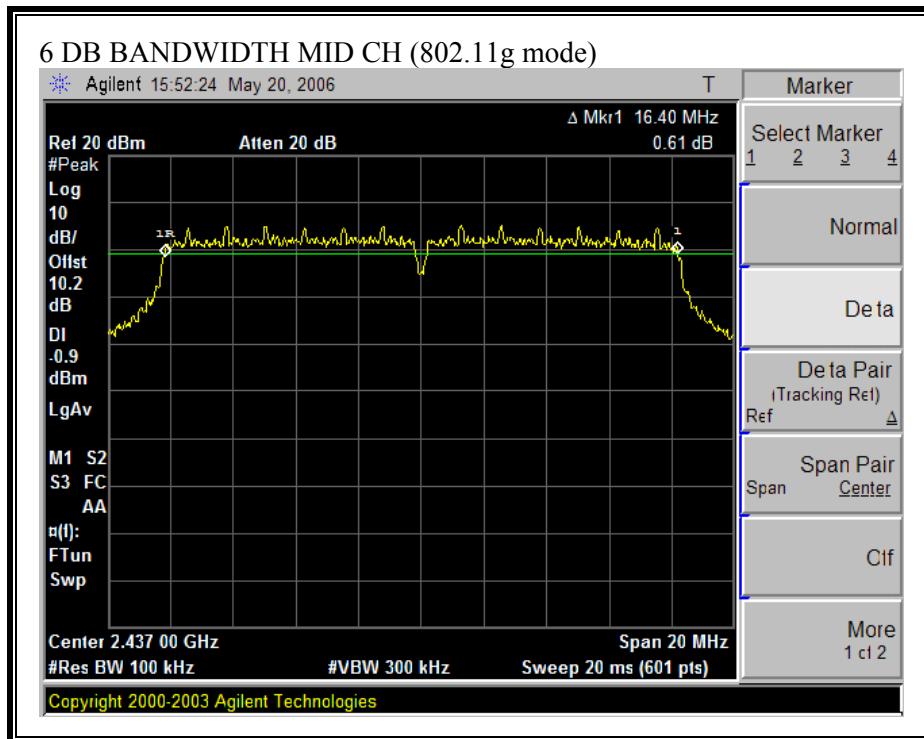

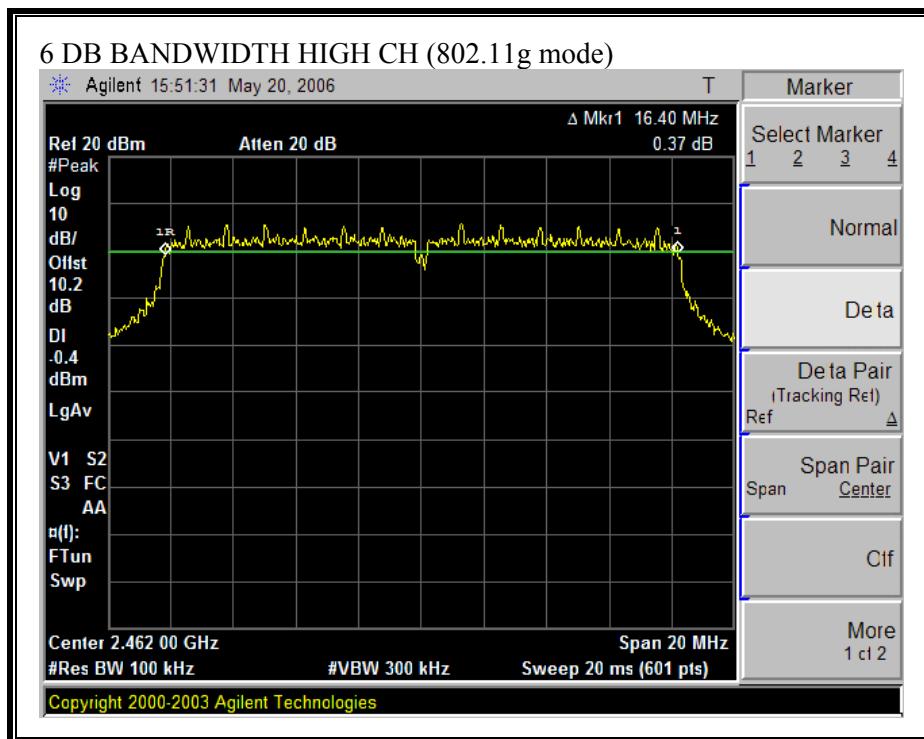

**6 DB BANDWIDTH (802.11g TURBO MODE)**

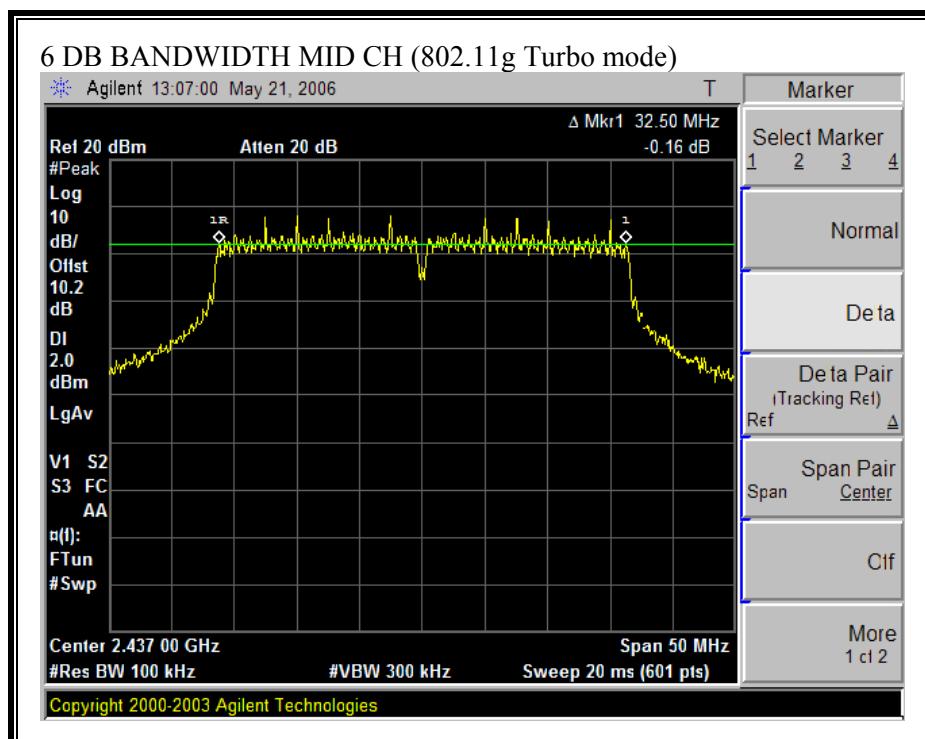

### 6.1.2. 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.5152
Middle	2437	15.5225
High	2462	15.5224


802.11g Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.5022
Middle	2437	16.5297
High	2462	16.5238


802.11g Turbo Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Middle	2437	32.8588


**99% BANDWIDTH (802.11b MODE)**

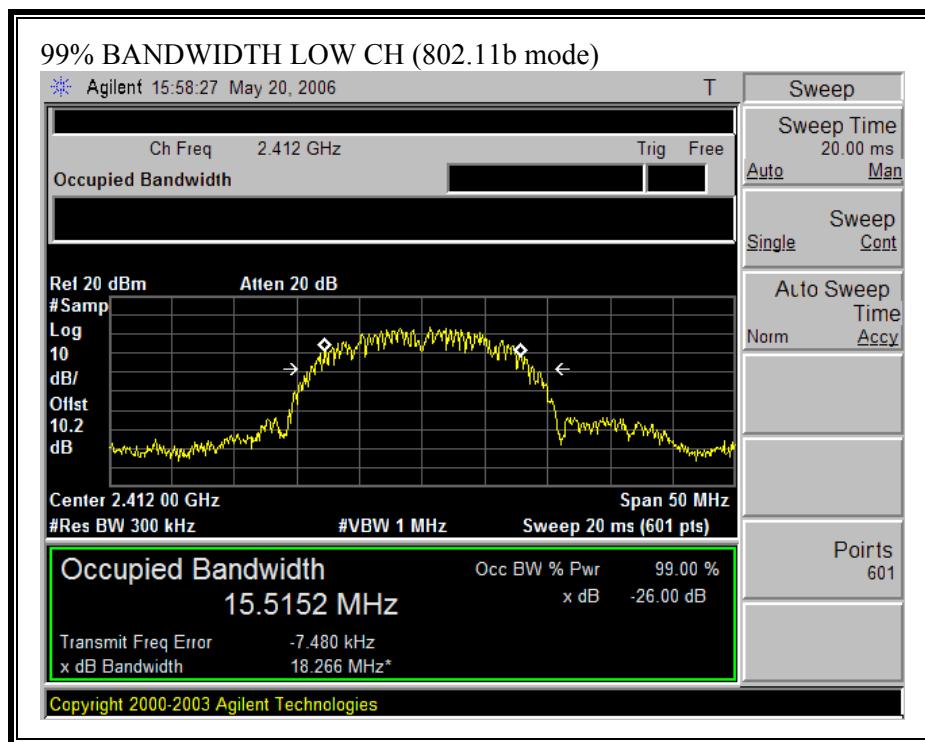


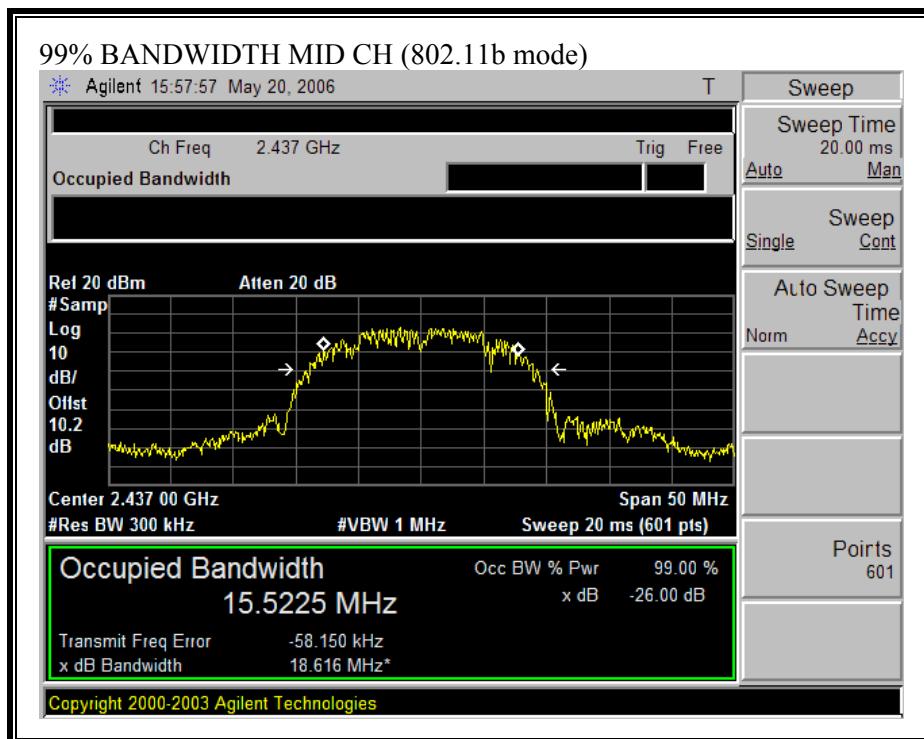


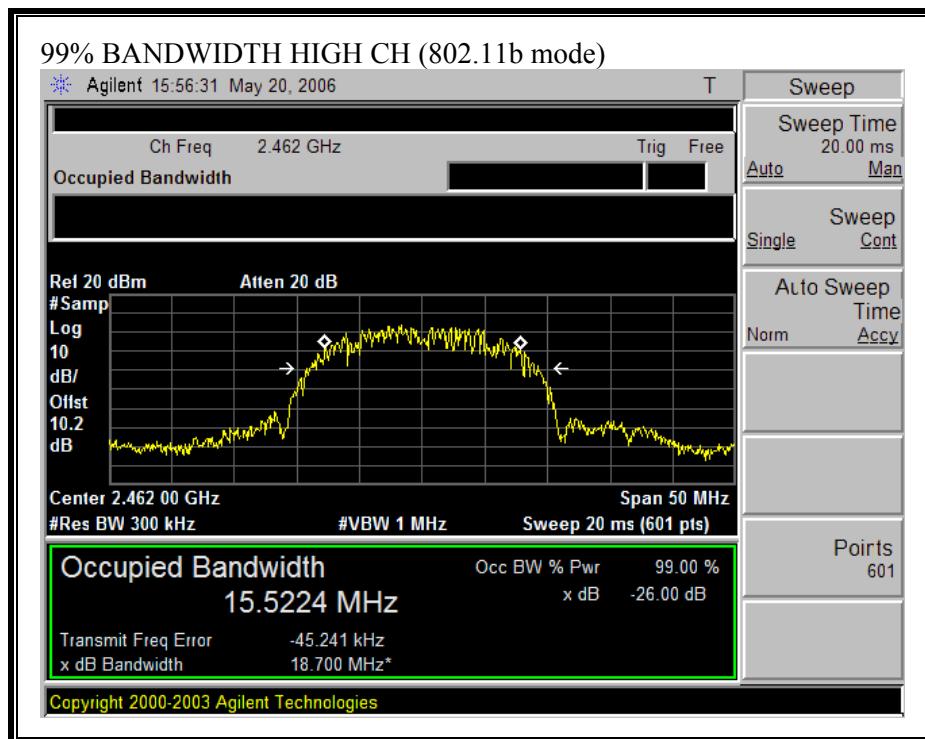


**99% BANDWIDTH (802.11g MODE)**

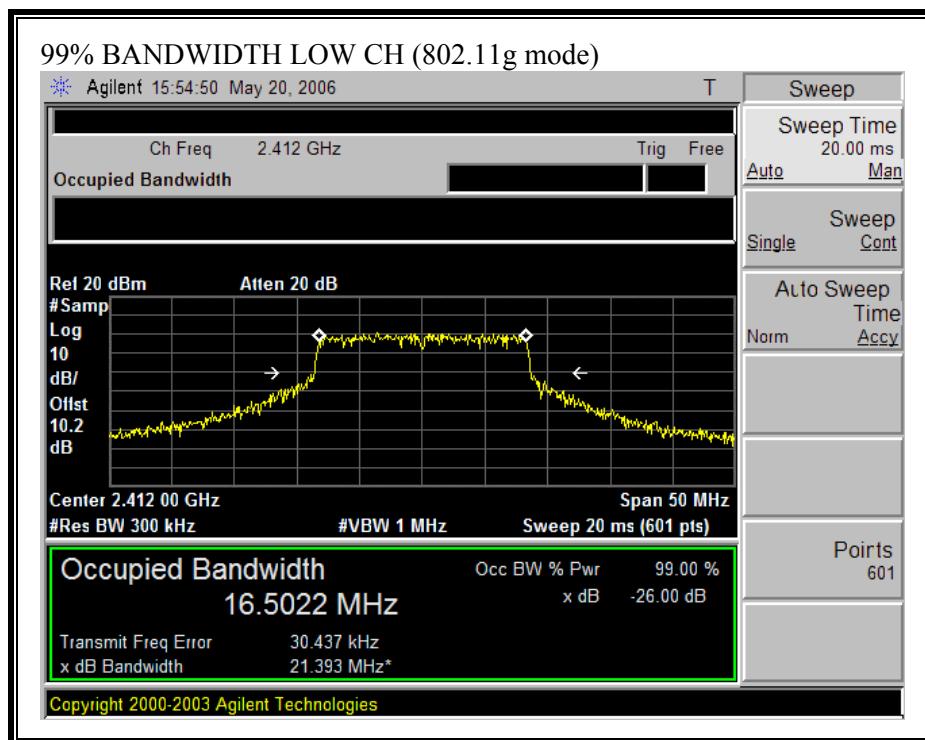

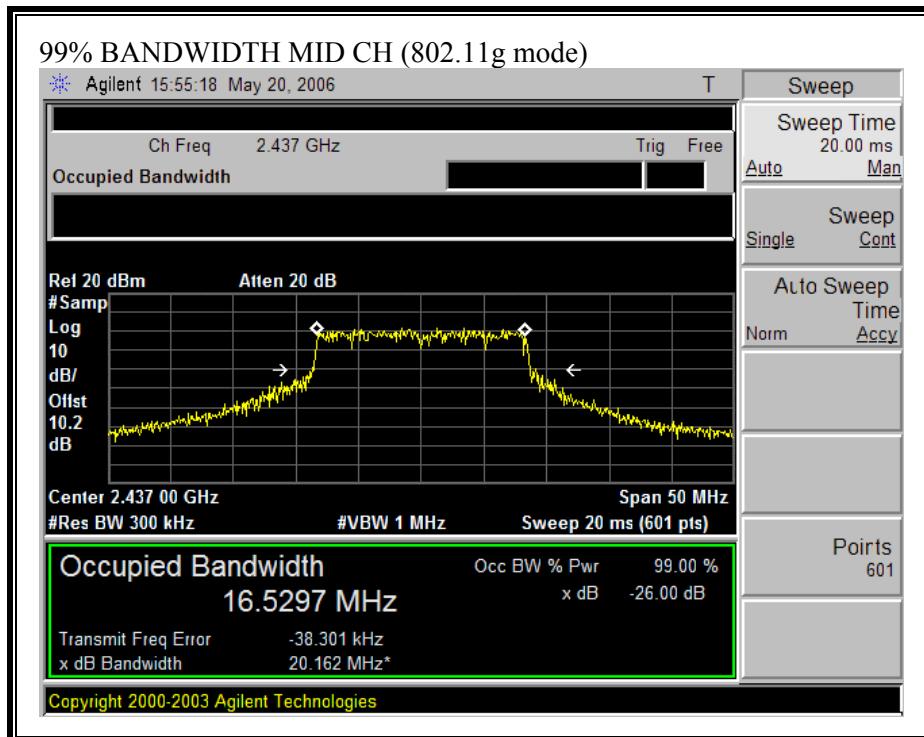

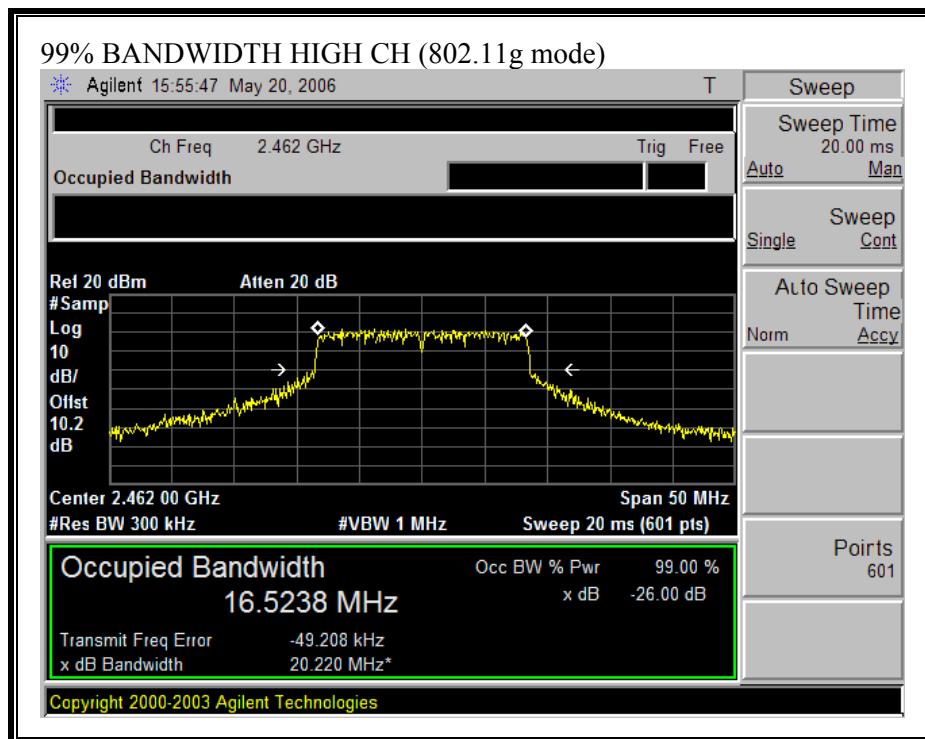

**99% BANDWIDTH (802.11g TURBO MODE)**

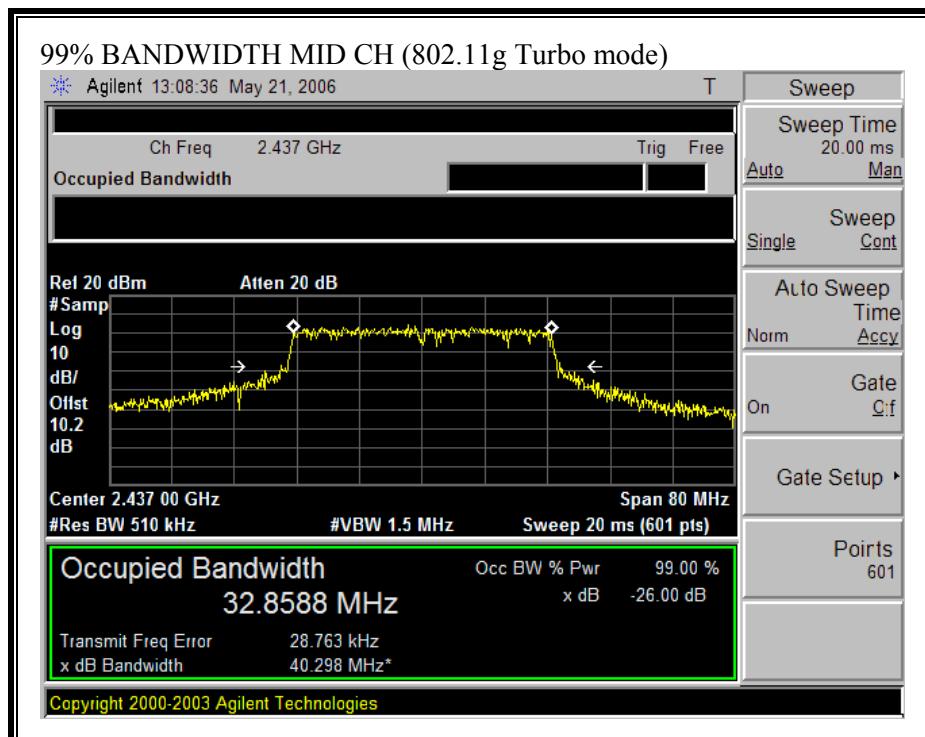

### 6.1.3. PEAK OUTPUT POWER

#### PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

## **RESULTS**

The maximum antenna gain is 1.7dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.

No non-compliance noted:

### 802.11b Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	19.36	30	-10.64
Middle	2437	19.33	30	-10.67
High	2462	19.69	30	-10.31


### 802.11g Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	23.21	30	-6.79
Middle	2437	23.11	30	-6.89
High	2462	23.44	30	-6.56


### 802.11g Turbo Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Middle	2437	24.75	30	-5.25


**OUTPUT POWER (802.11b MODE)**

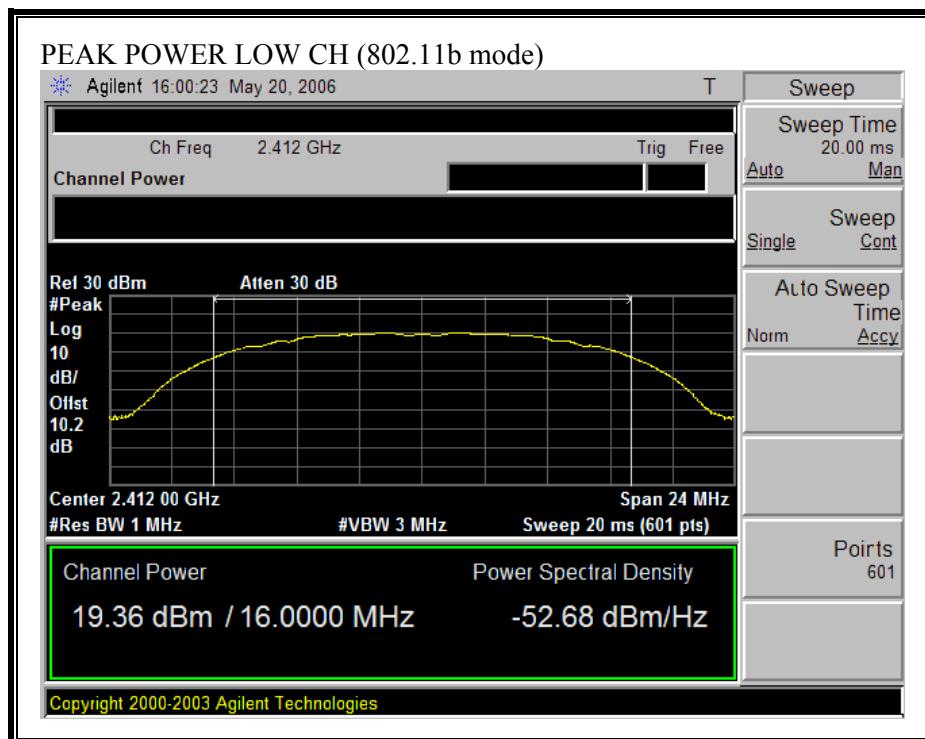


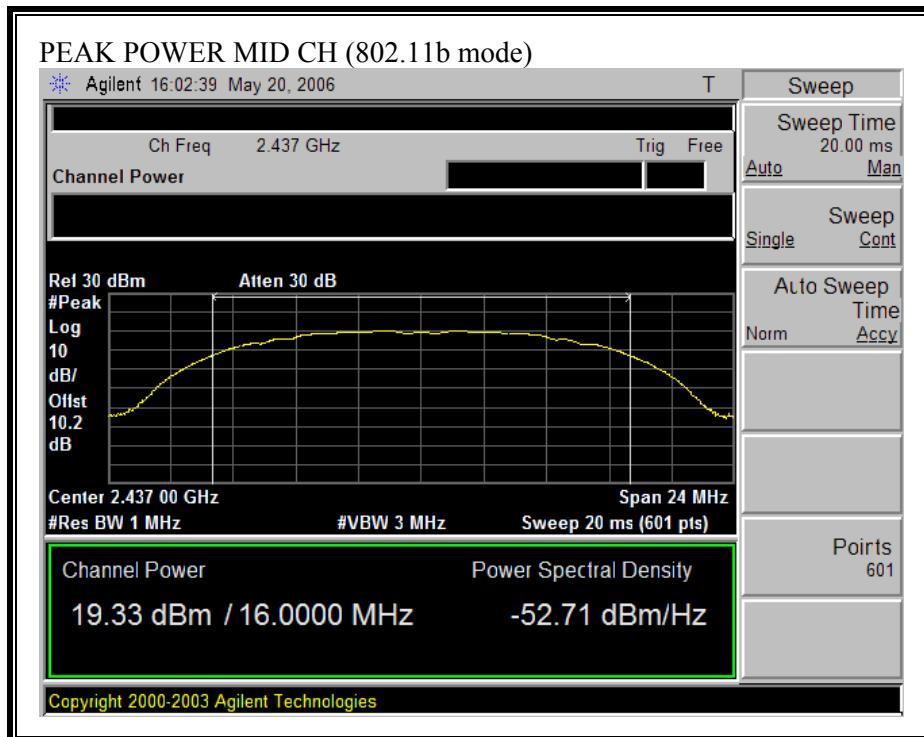


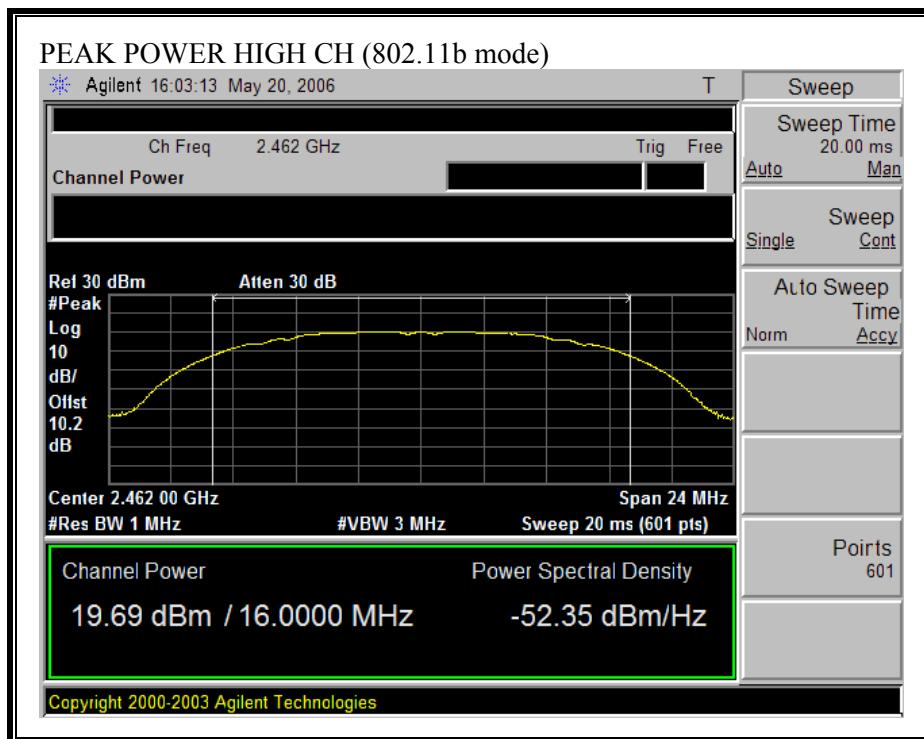


**OUTPUT POWER (802.11g MODE)**

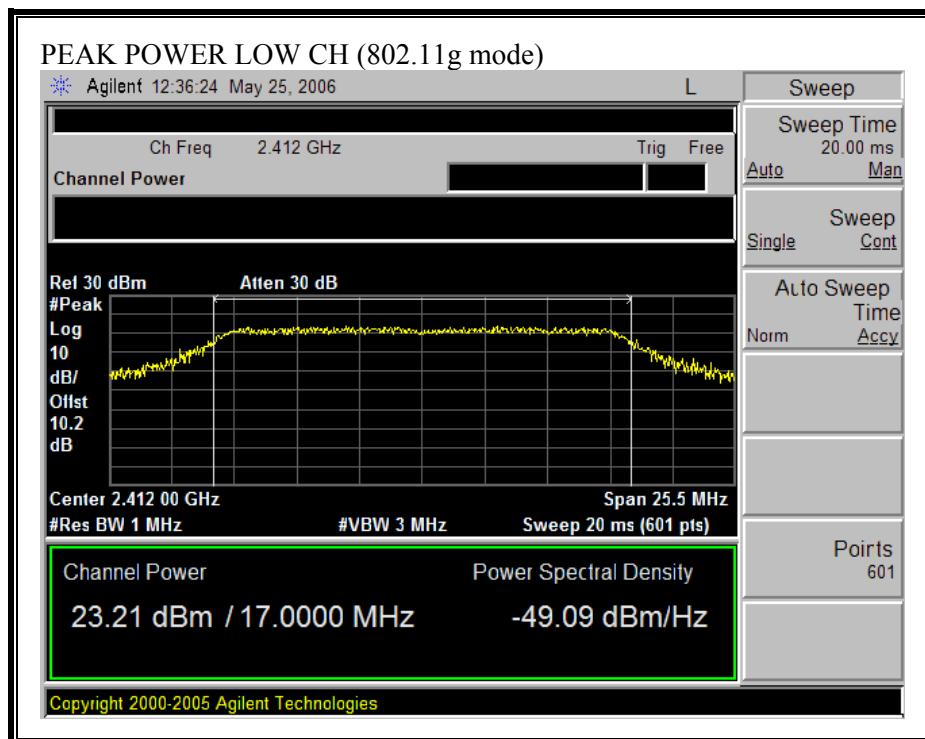

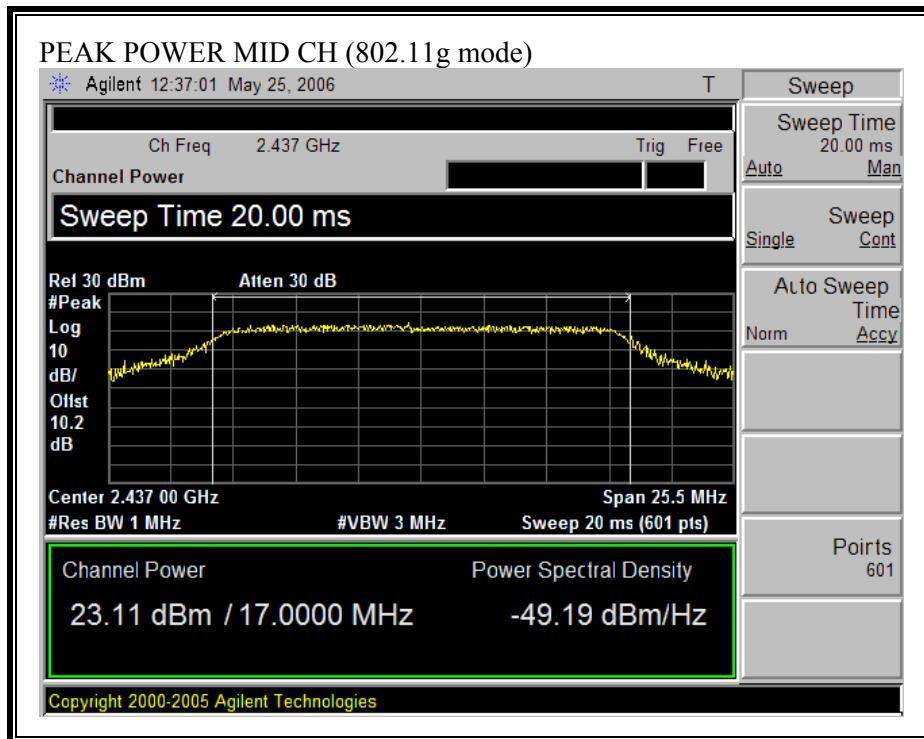

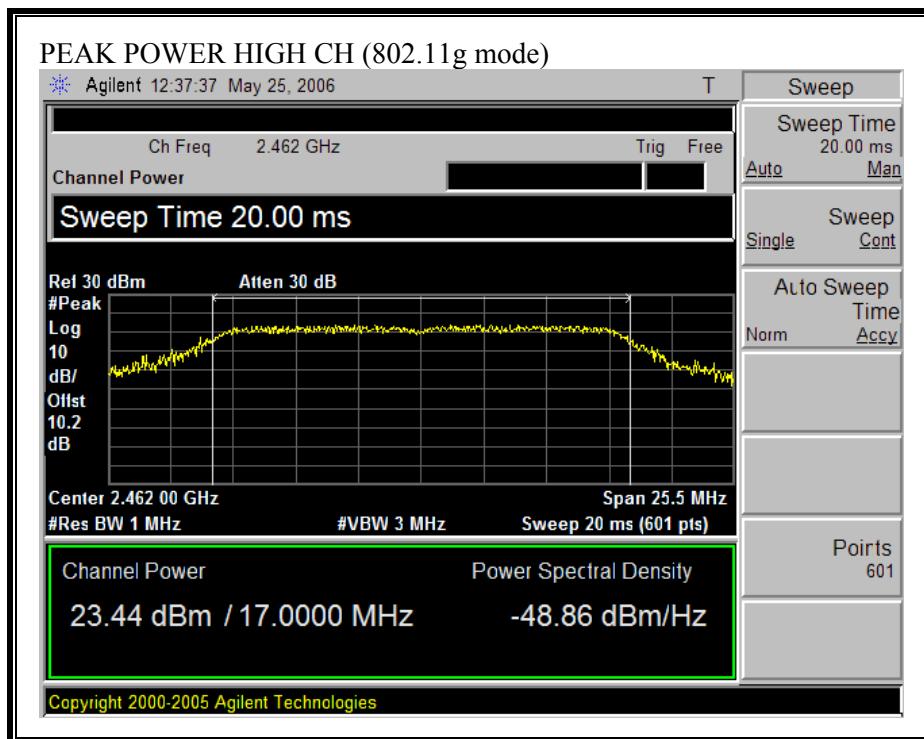

## **OUTPUT POWER (802.11g TURBO MODE)**

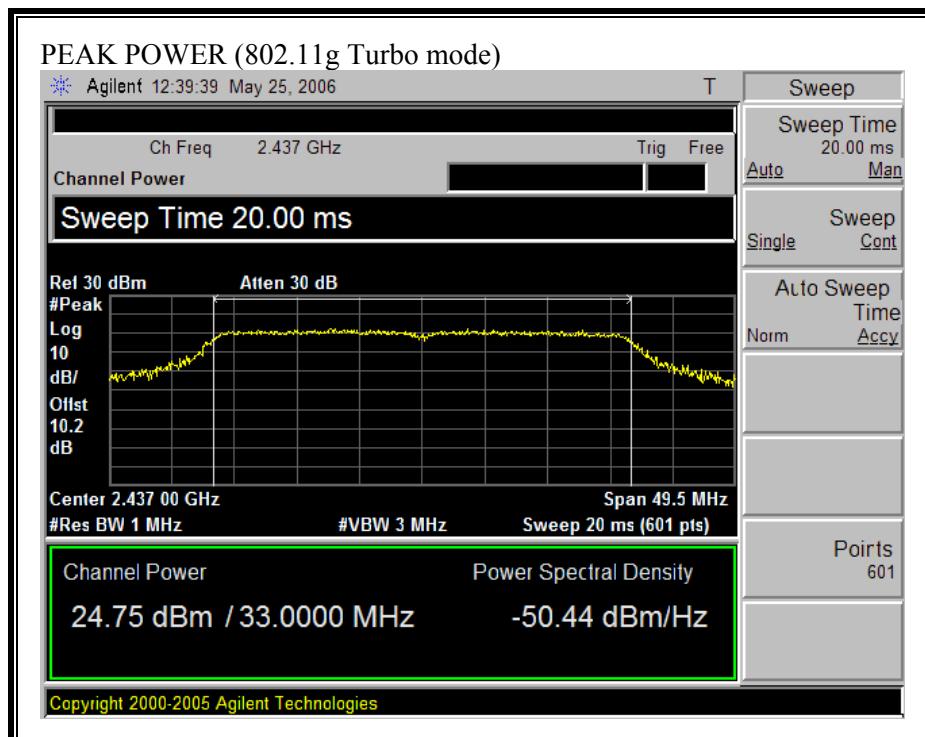

### 6.1.4. MAXIMUM PERMISSIBLE EXPOSURE

#### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P (\text{mW}) = P (\text{W}) / 1000 \text{ and}$$

$$d (\text{cm}) = 100 * d (\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P (\text{mW}) = 10^{(P (\text{dBm}) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

**LIMITS**

From §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm<sup>2</sup>

**RESULTS**

No non-compliance noted: (MPE distance equals 20 cm)

Mode	Power Density Limit (mW/cm <sup>2</sup> )	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	19.69	1.70	3.31
802.11g	1.0	23.44	1.70	5.10
802.11g Turbo	1.0	24.75	1.70	5.93

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

### 6.1.5. AVERAGE POWER

#### AVERAGE POWER LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.2 dB (including 9.6 dB pad and 0.6dB cable) was entered as an offset in the power meter to allow for direct reading of power.

##### 802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	15.90
Middle	2437	15.90
High	2462	16.02

##### 802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	17.20
Middle	2437	17.22
High	2462	17.55

##### 802.11g Turbo Mode

Channel	Frequency (MHz)	Power (dBm)
Middle	2437	19.12

### 6.1.6. PEAK POWER SPECTRAL DENSITY

#### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

#### RESULTS

No non-compliance noted:

##### 802.11b Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.34	8	-14.34
Middle	2437	-6.26	8	-14.26
High	2462	-6.44	8	-14.44


##### 802.11g Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-8.24	8	-16.24
Middle	2437	-8.38	8	-16.38
High	2462	-7.66	8	-15.66


##### 802.11g Turbo Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Middle	2437	-8.47	8	-16.47


**PEAK POWER SPECTRAL DENSITY (802.11b MODE)**

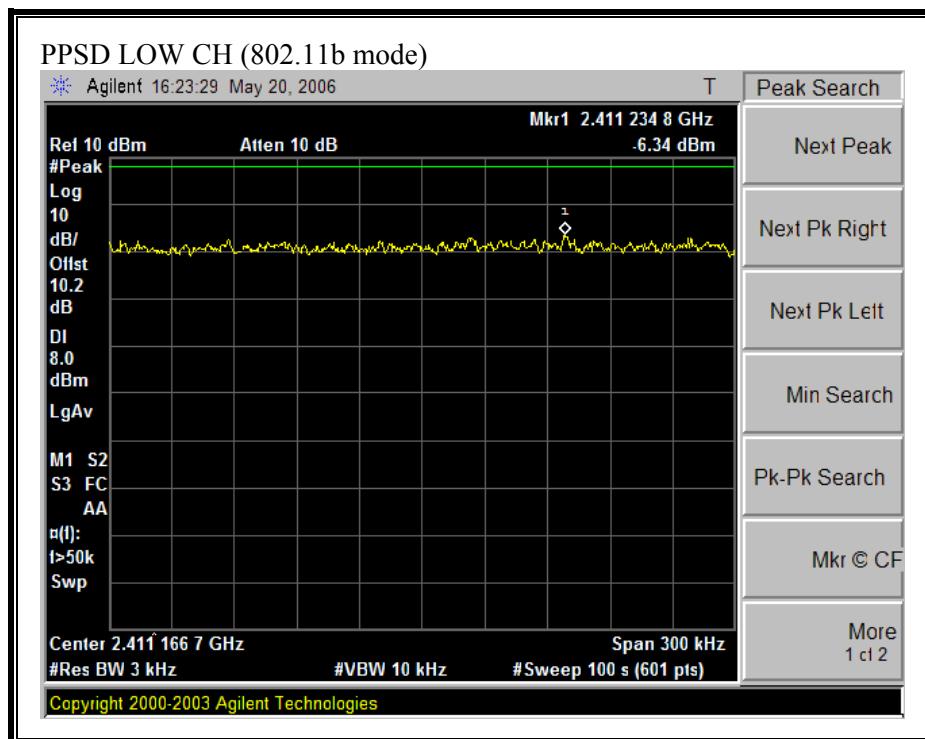


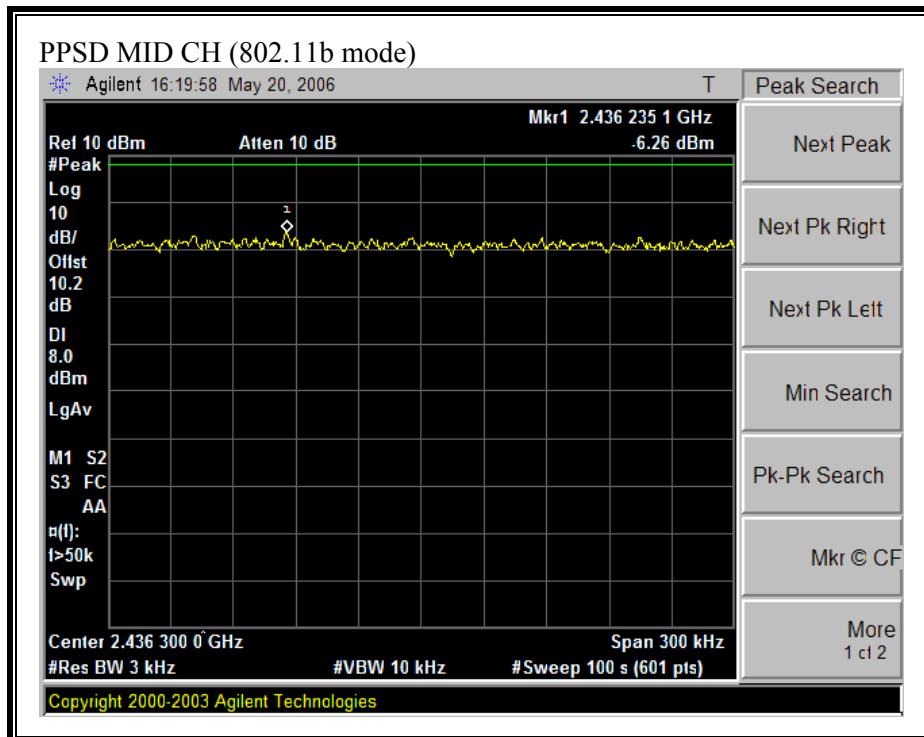


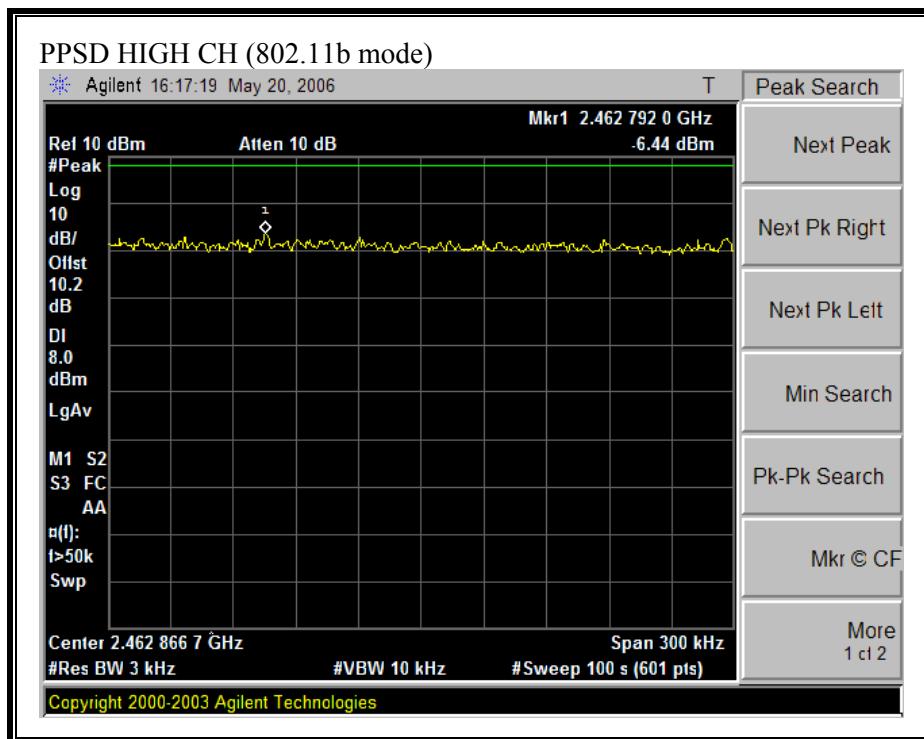


**PEAK POWER SPECTRAL DENSITY (802.11g MODE)**

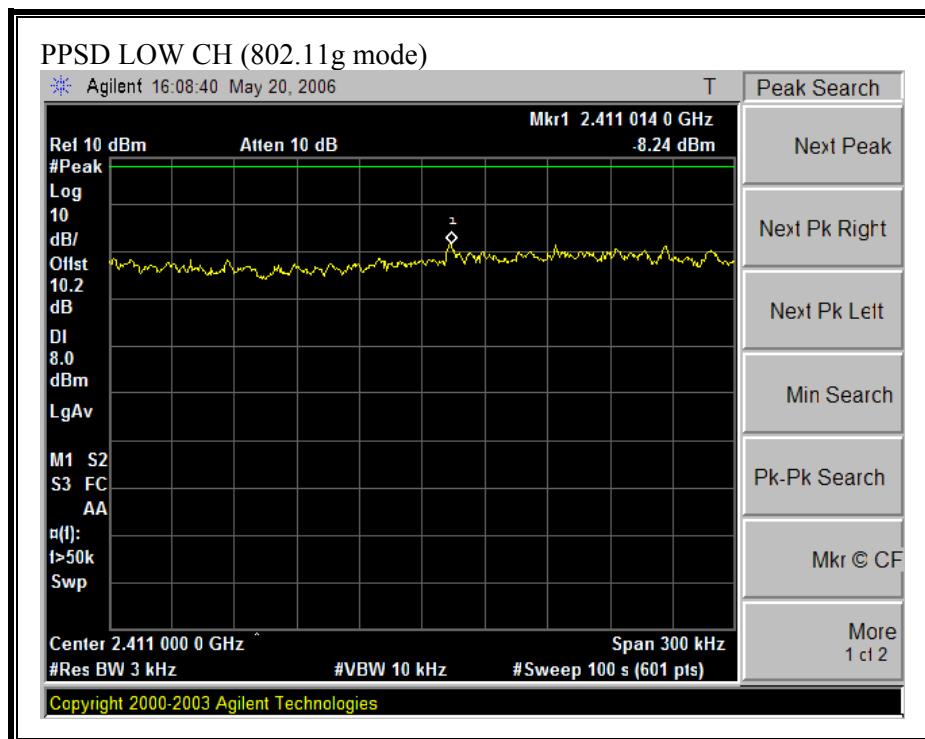

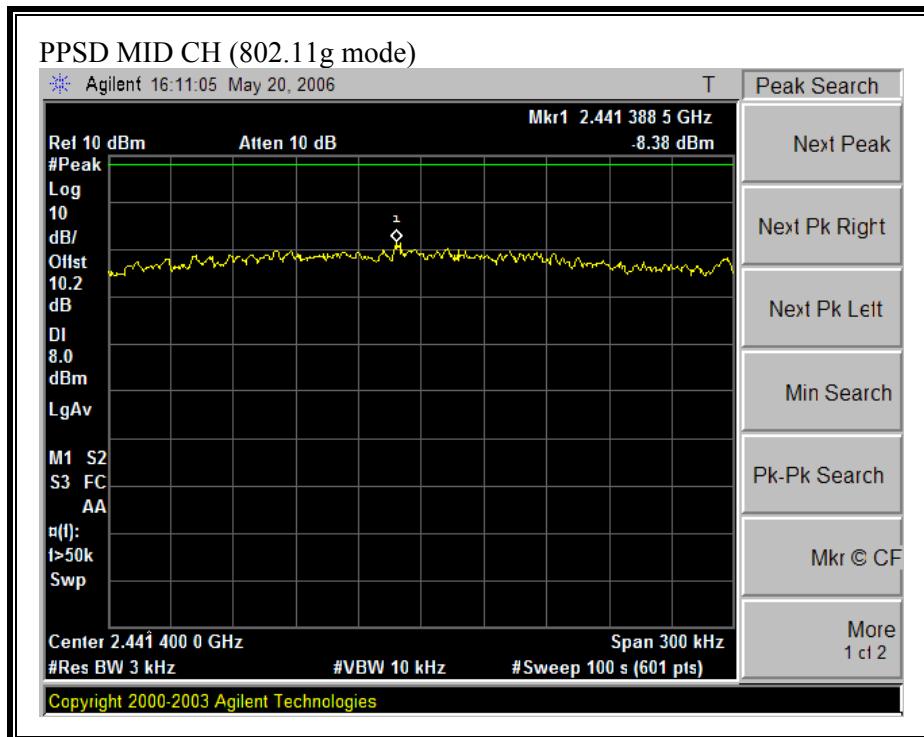

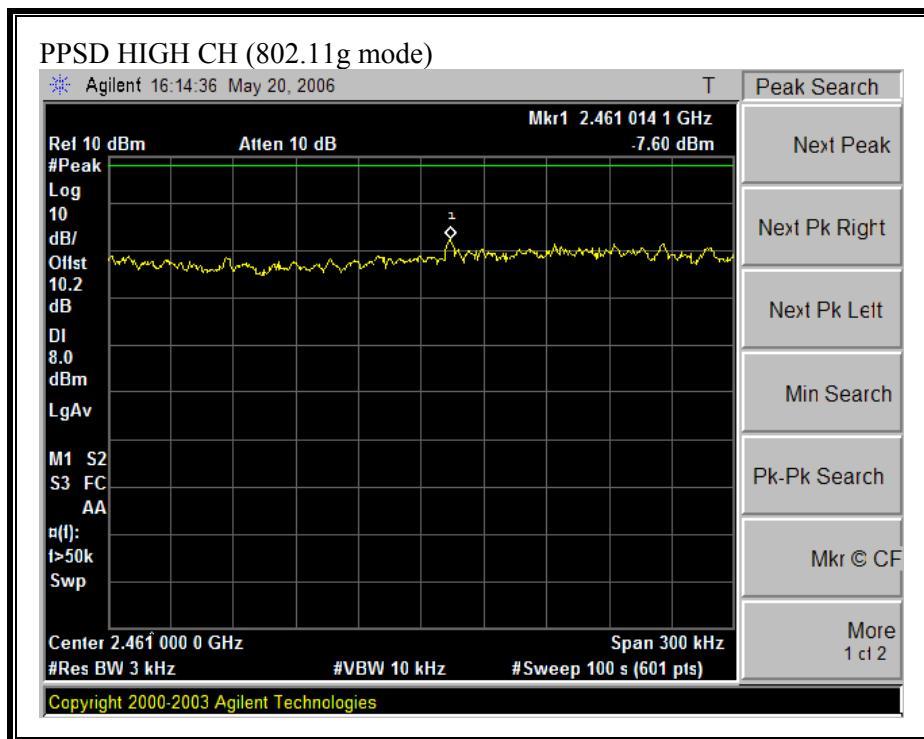

**PEAK POWER SPECTRAL DENSITY (802.11g TURBO MODE)**

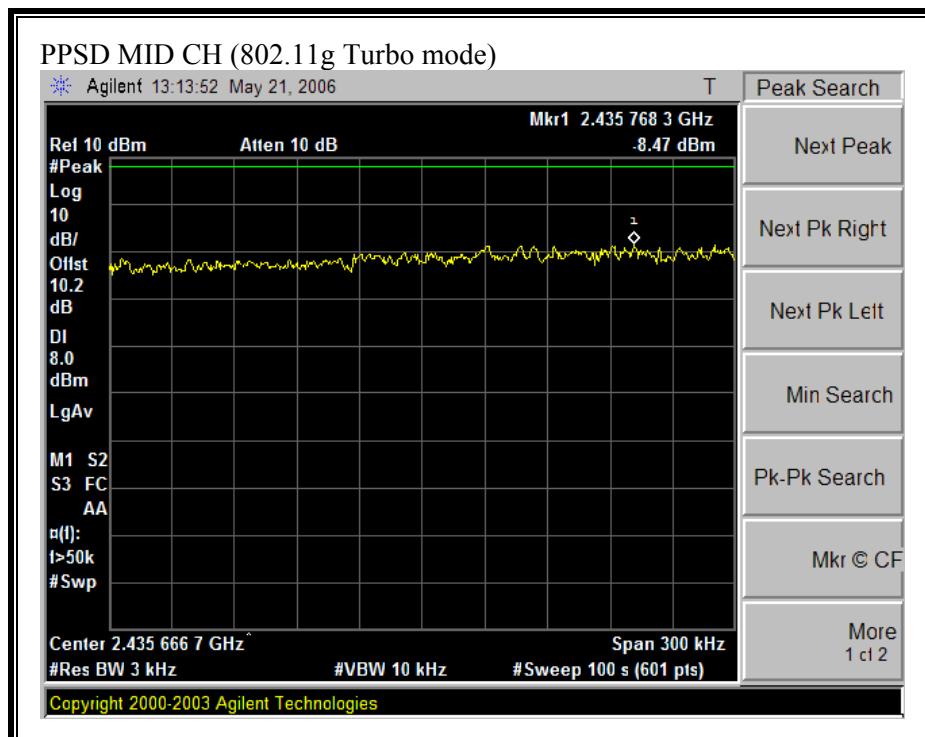

### 6.1.7. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Conducted power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

#### RESULTS


No non-compliance noted:


**SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)**

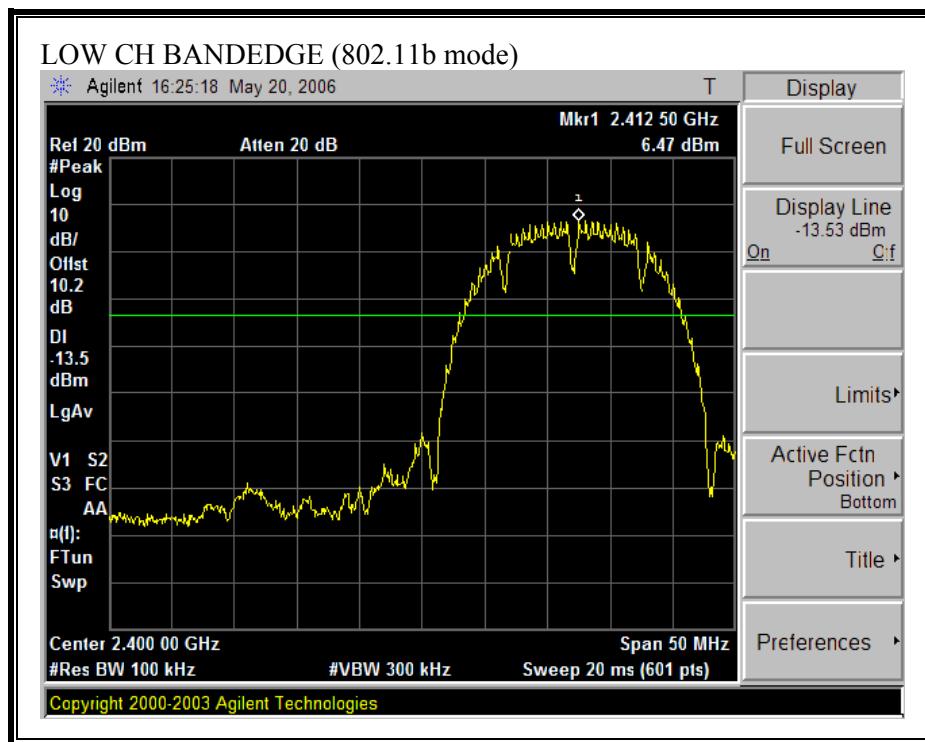

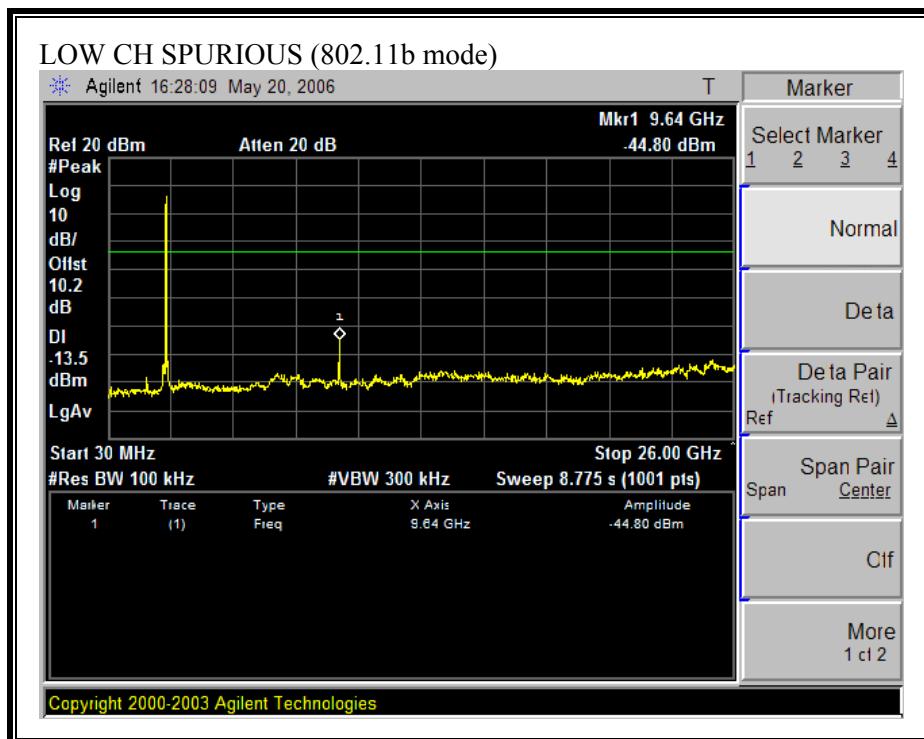



**SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)**

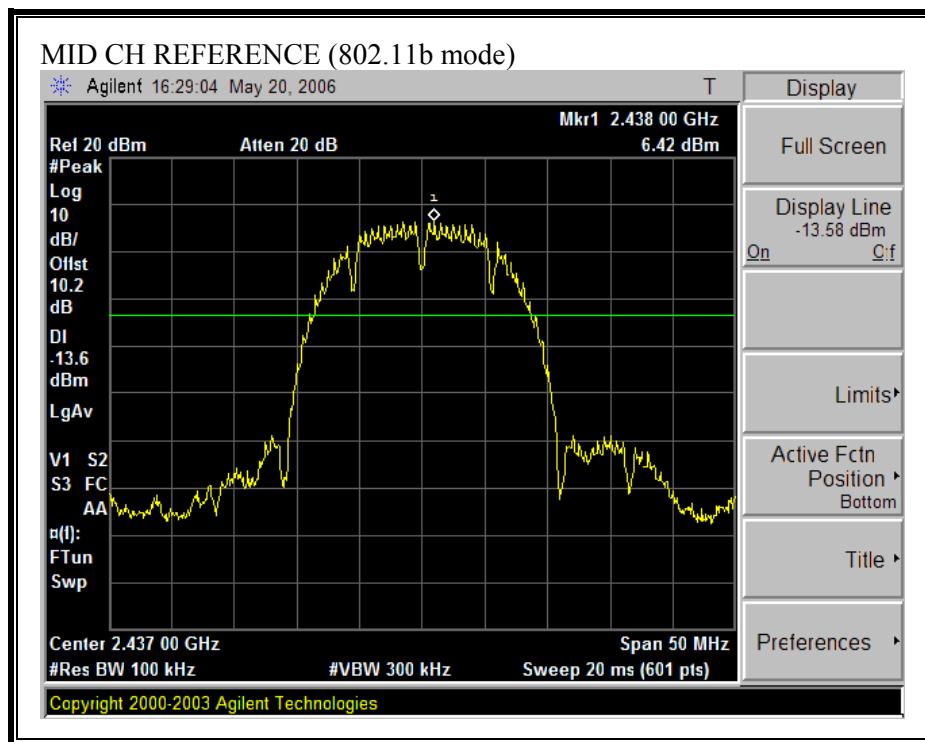

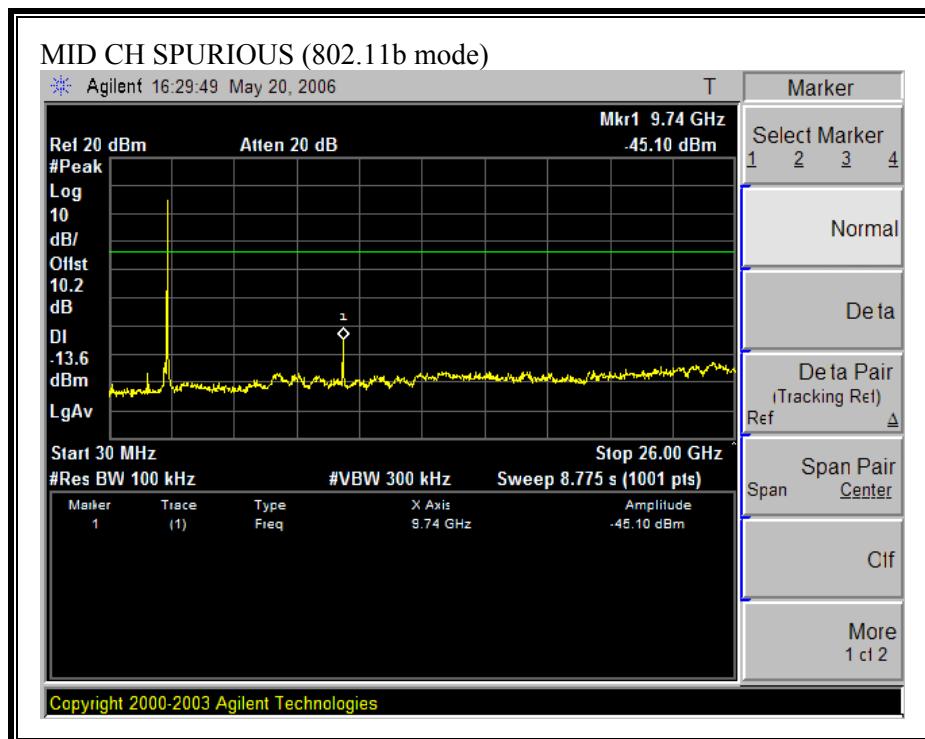



**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)**

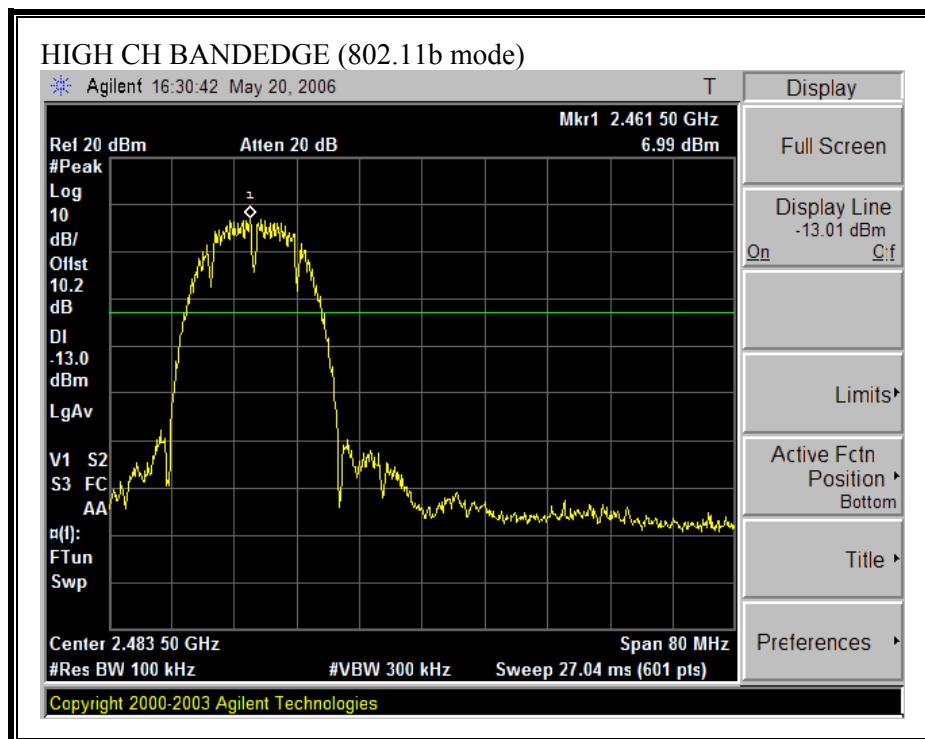

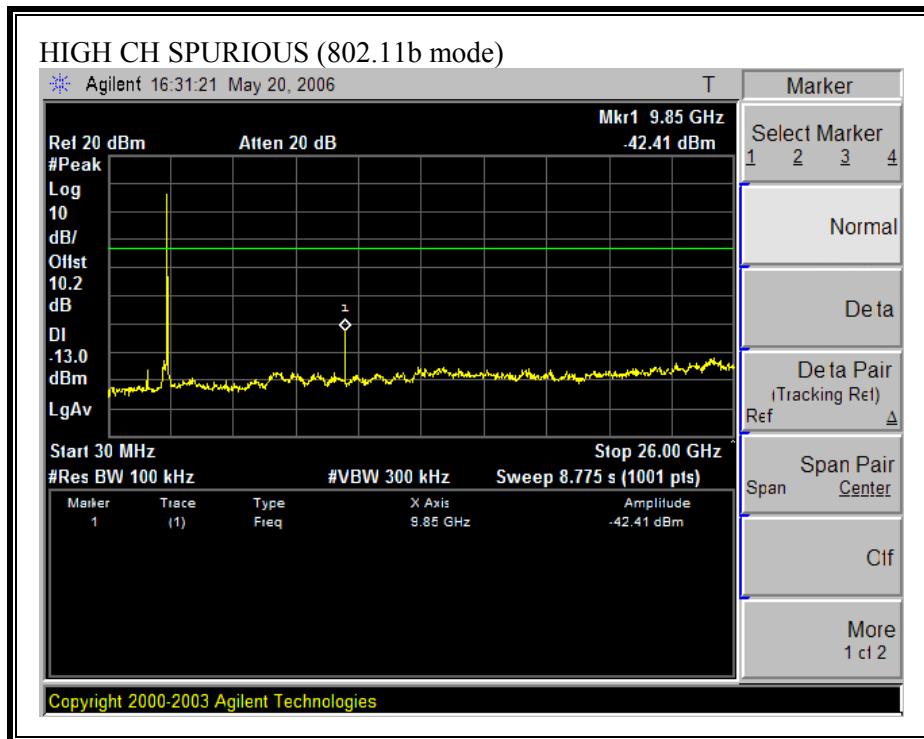



**SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)**

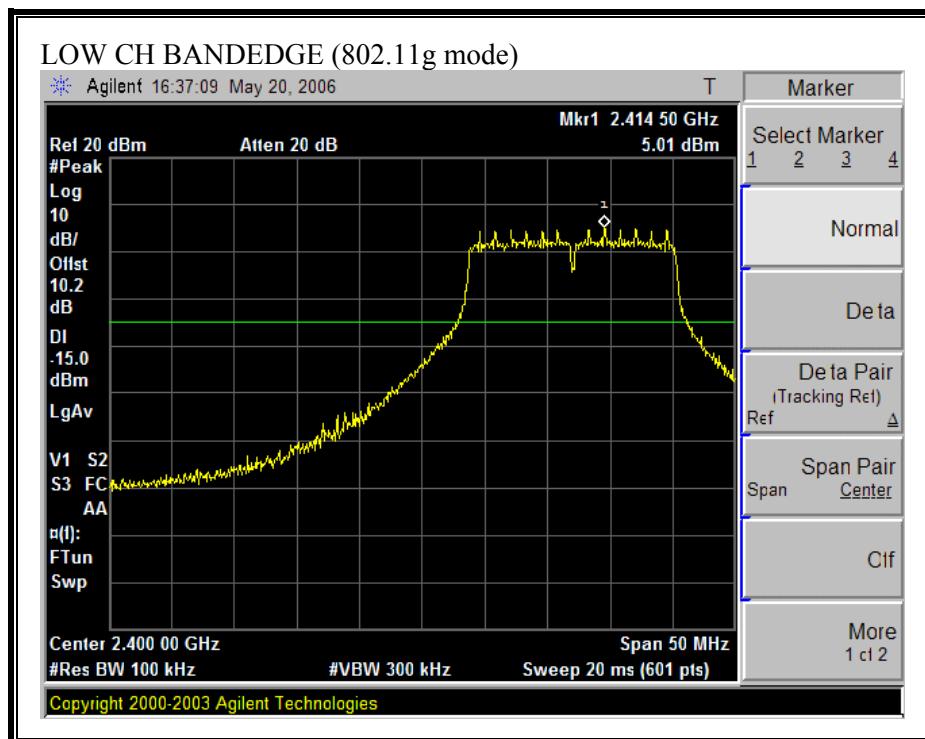

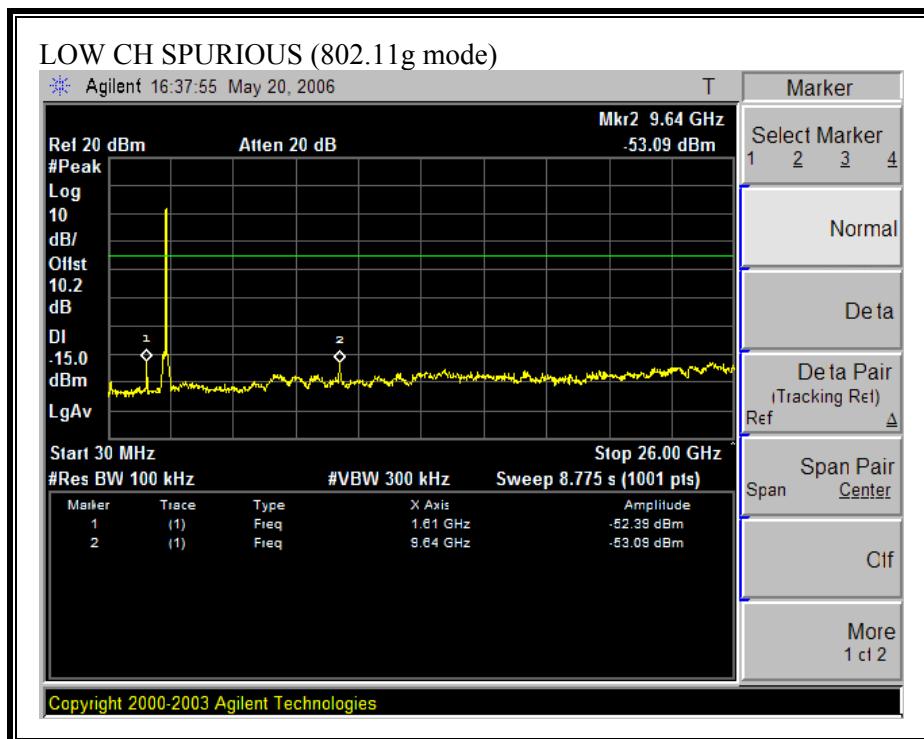



**SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)**

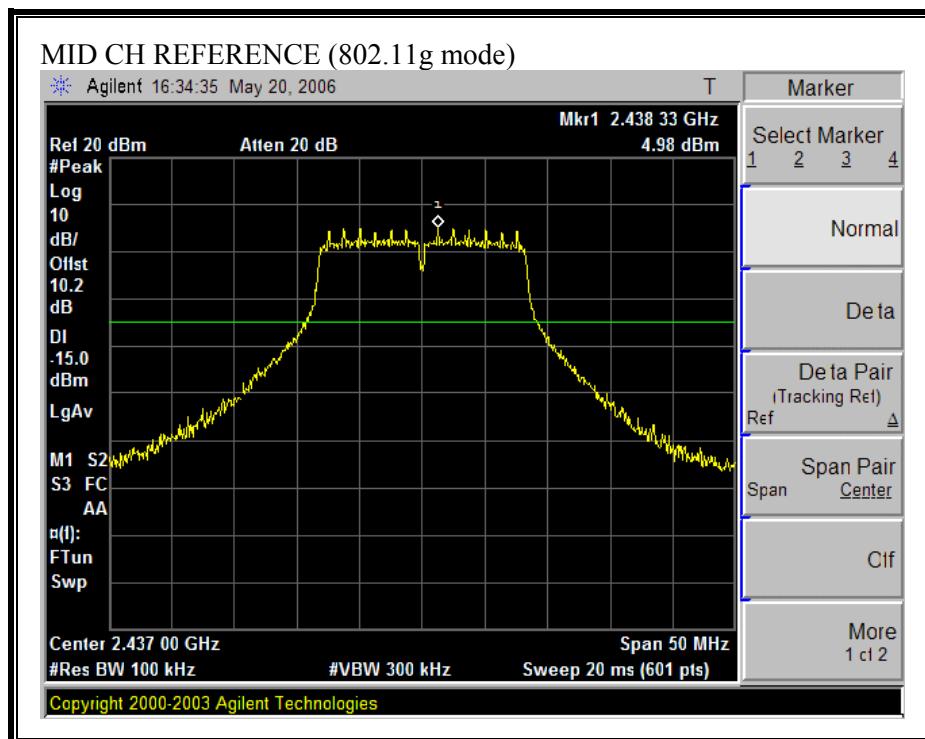

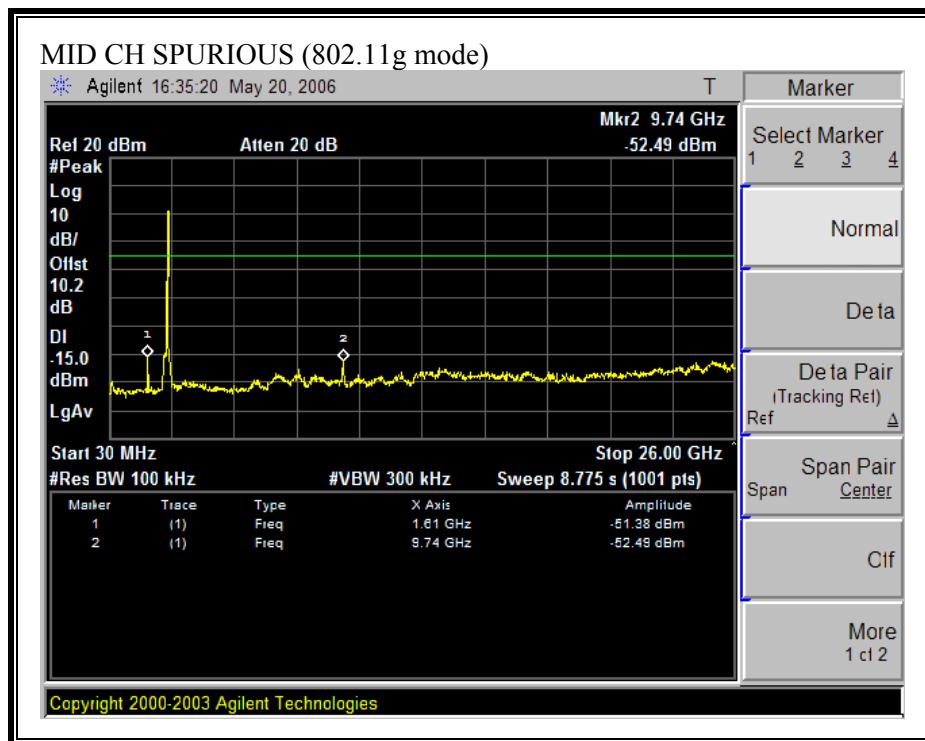



**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)**

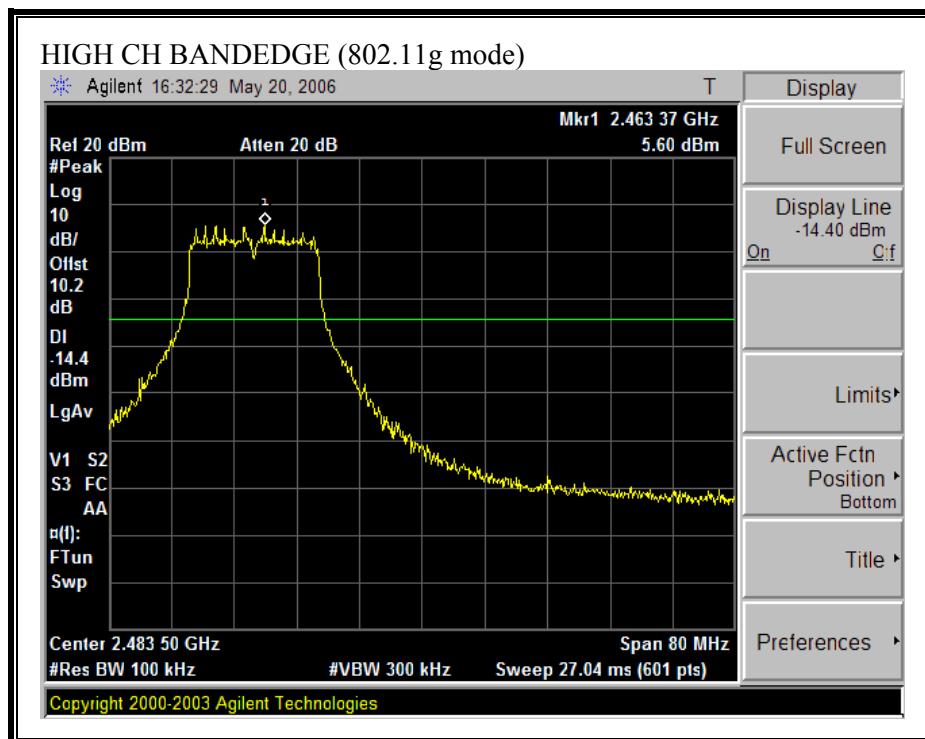

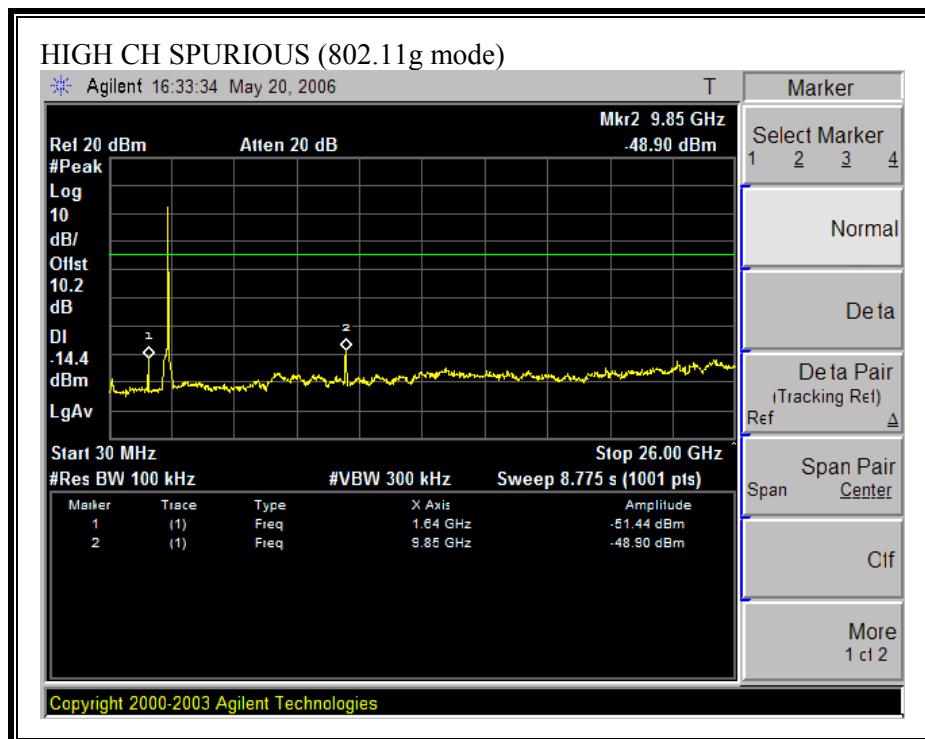

**SPURIOUS EMISSIONS, MID CHANNEL (802.11g TURBO MODE)**

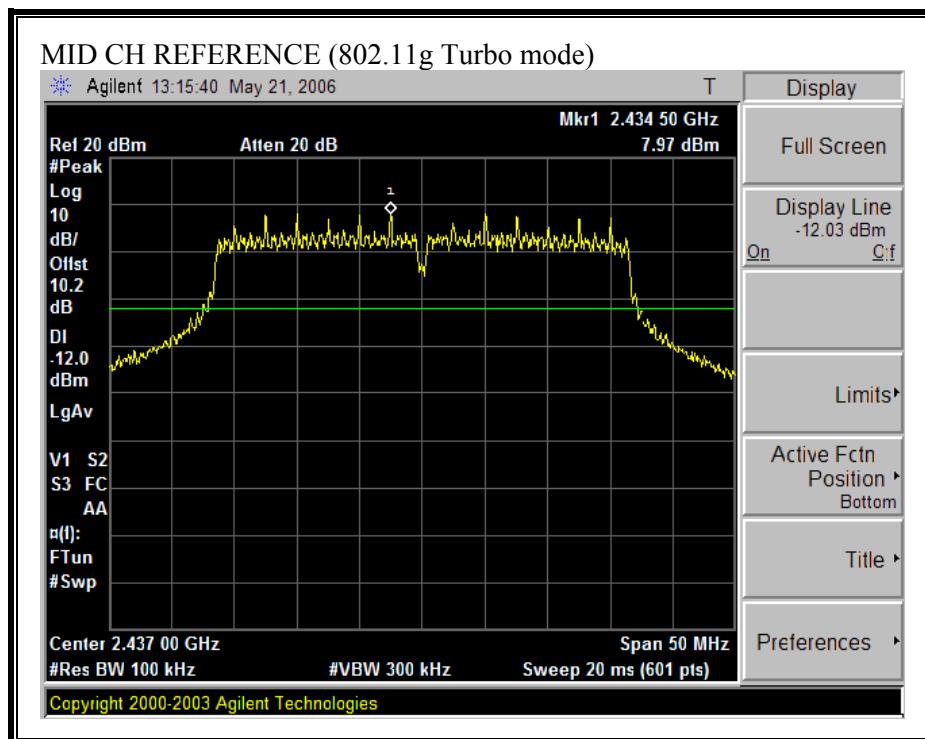

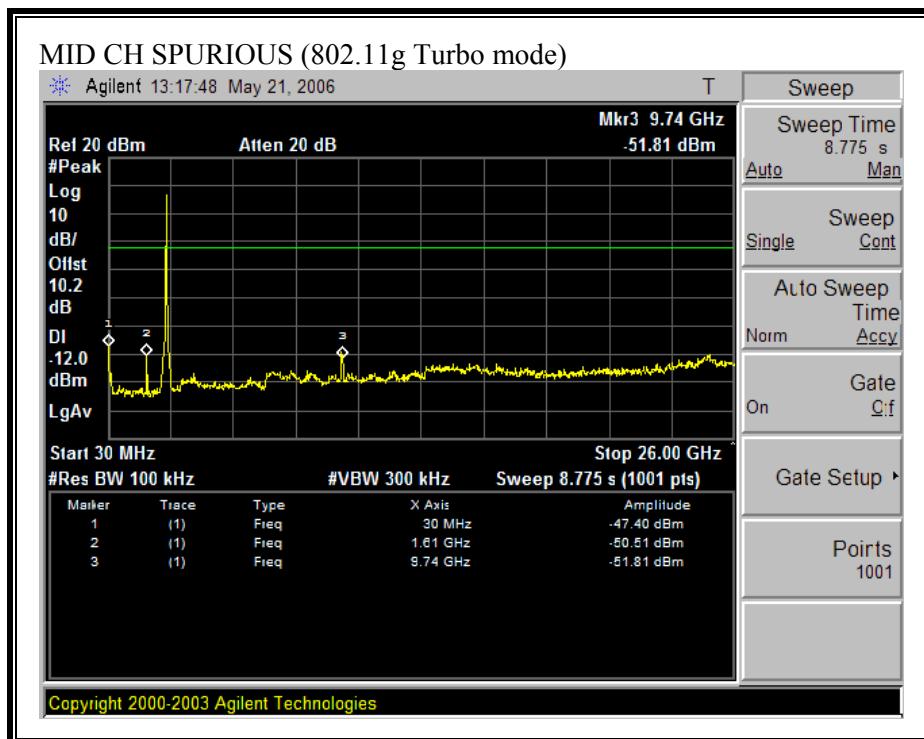

## 6.2. RADIATED EMISSIONS

### 6.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

### **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


## 6.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND


### RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

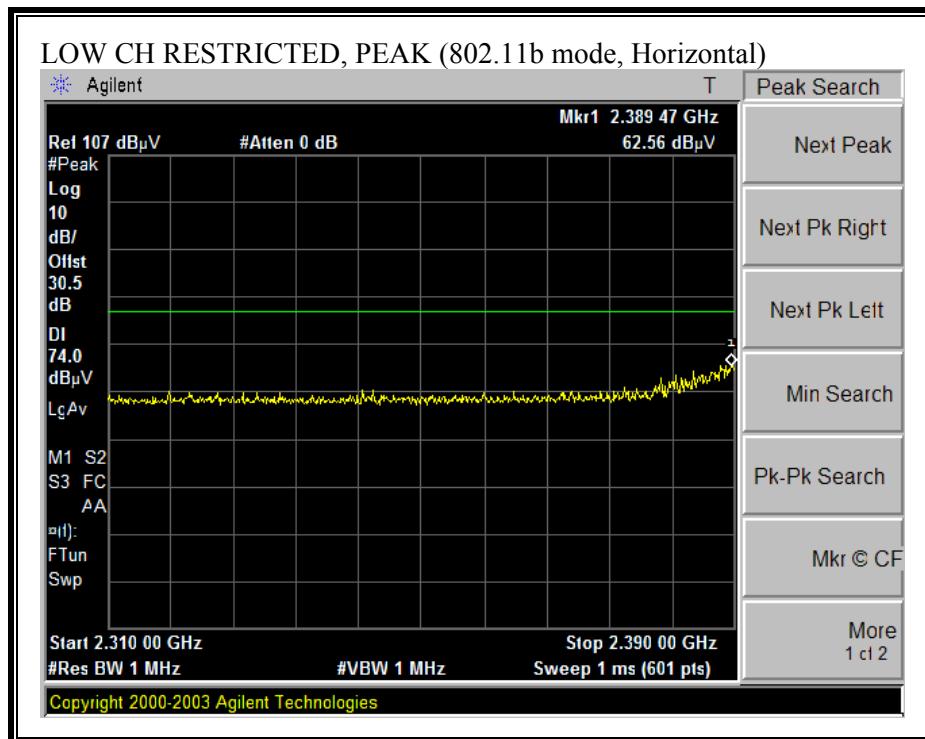

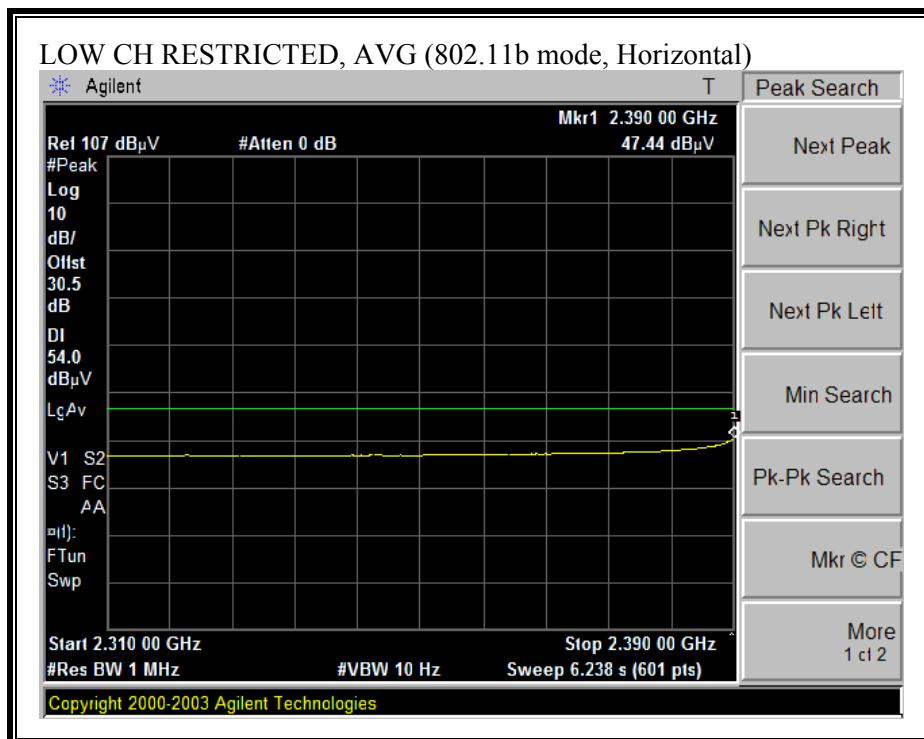



**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

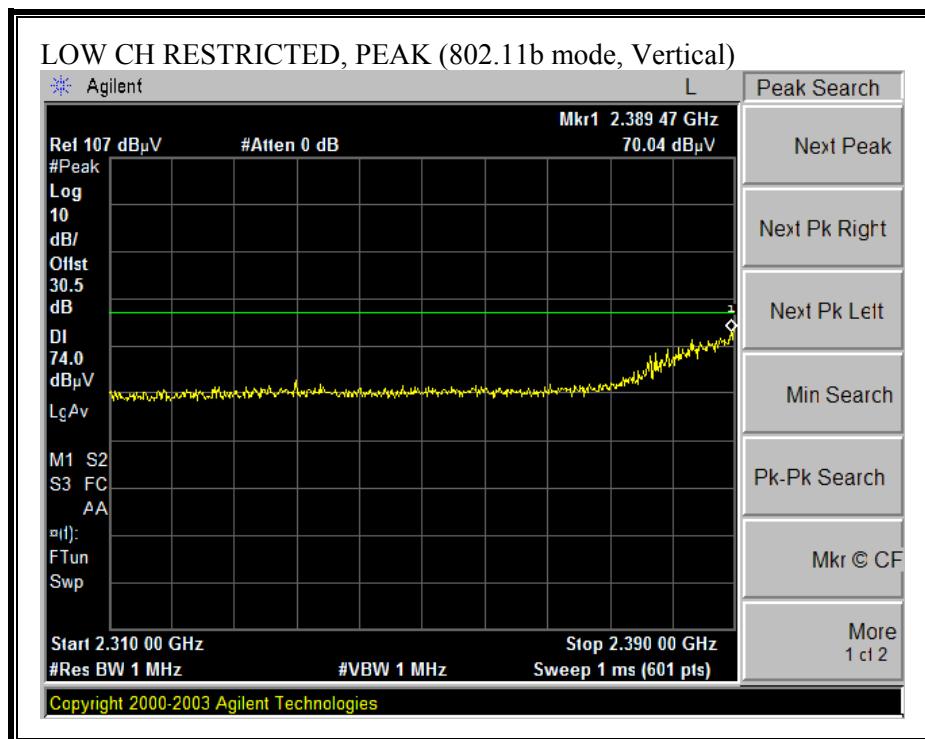

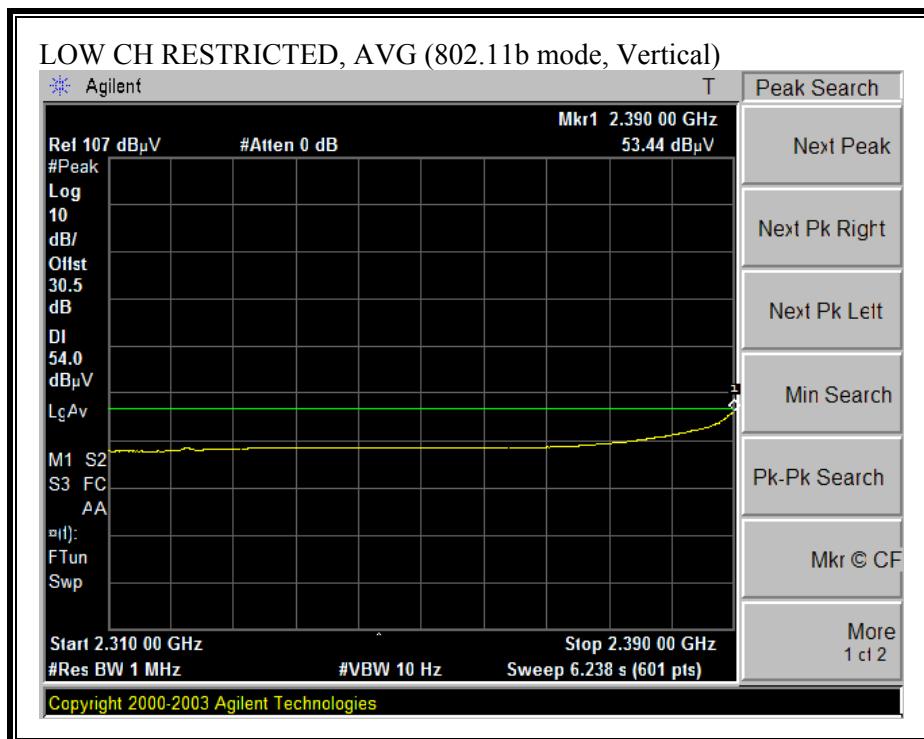



**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

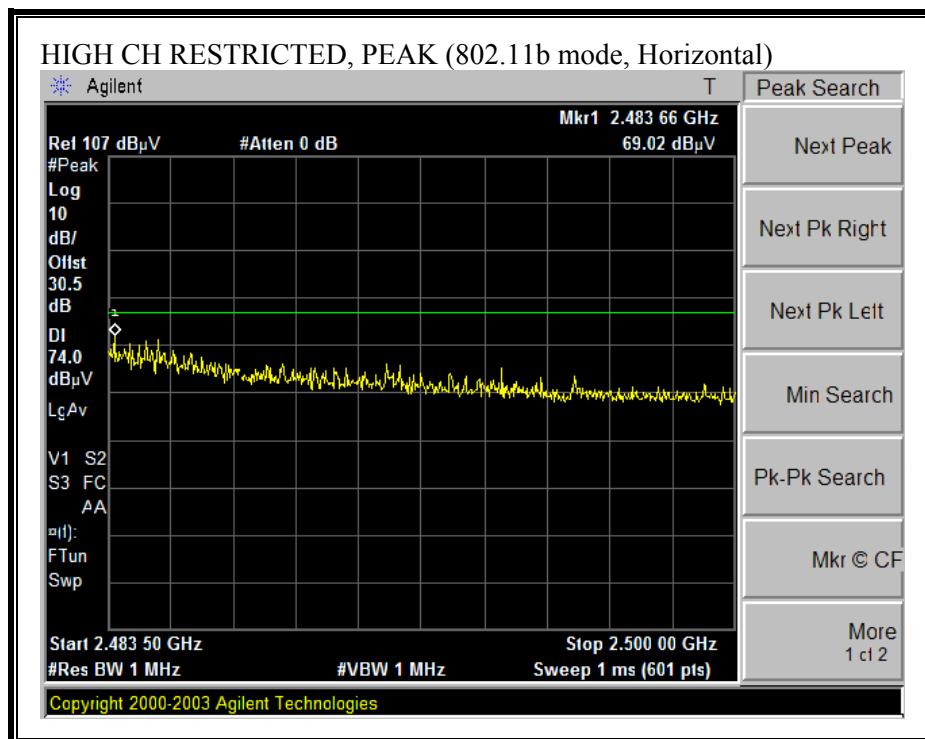

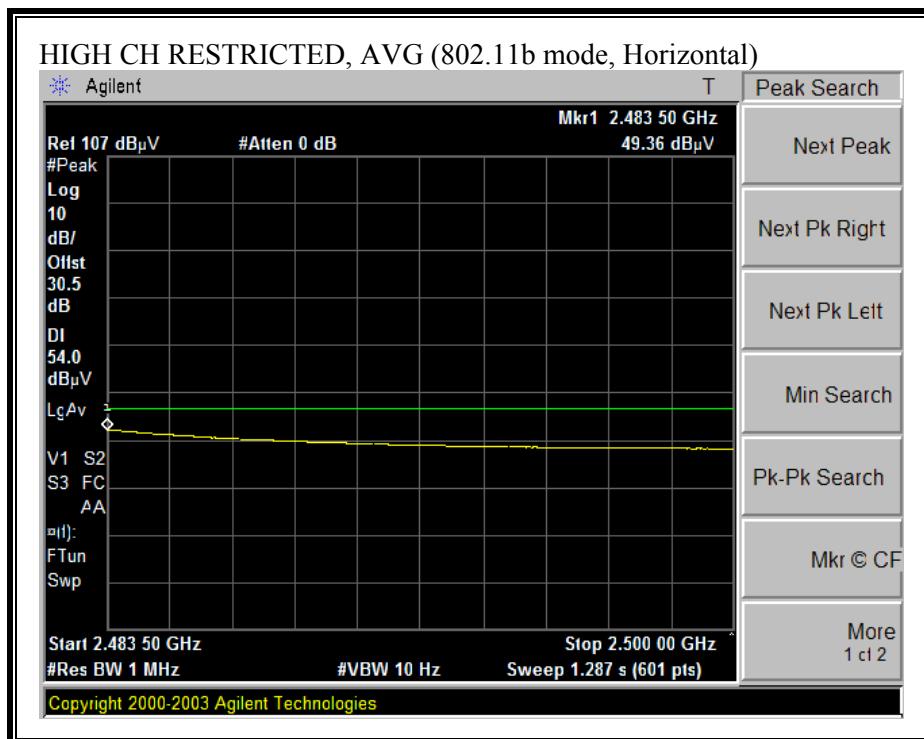

**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

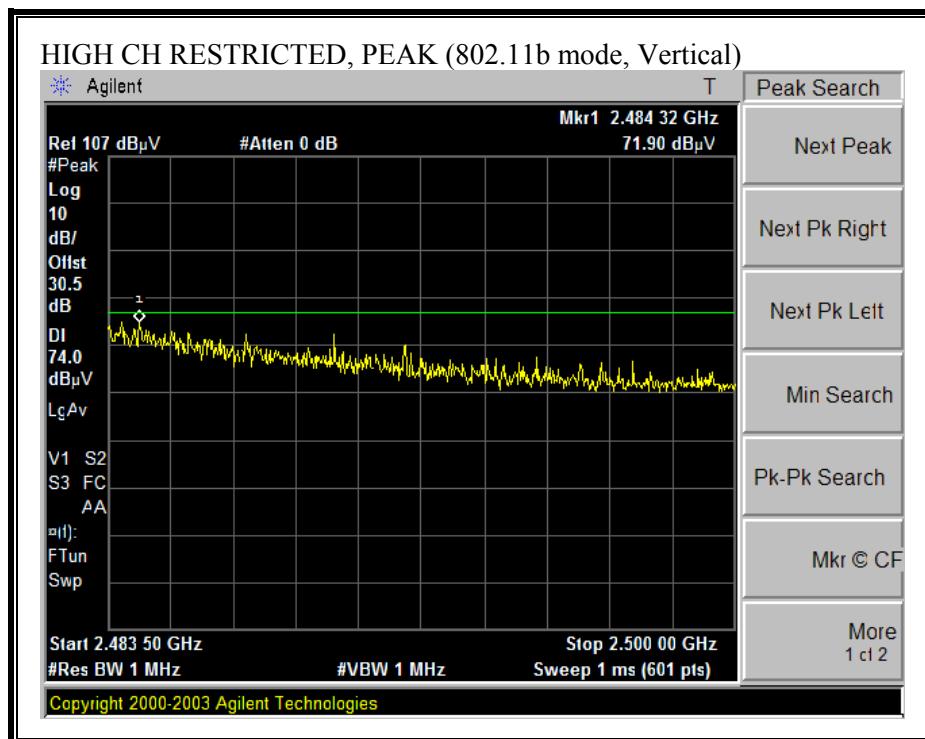


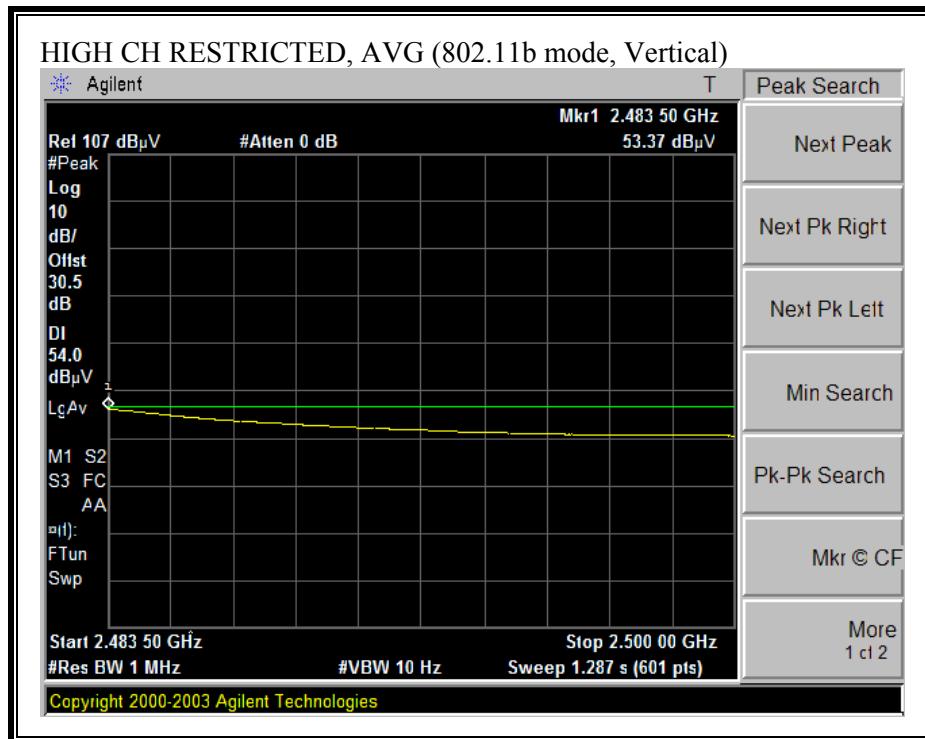


**HARMONICS AND SPURIOUS EMISSIONS (b MODE)**


High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Company: Buffalo Inc. Project #: 06J10304 Date: MAY 19, 2006 Test Engineer: Chin Pang Configuration: EUT Only Mode: TX, b Mode															
<u>Test Equipment:</u>															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T60; S/N: 2238 @3m		T34 HP 8449B						FCC 15.205							
Hi Frequency Cables															
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		<u>Peak Measurements</u> RBW=VBW=1MHz <u>Average Measurements</u> RBW=1MHz ; VBW=10Hz					
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<u>Low Ch, 2412MHz</u>															
4.824	3.0	52.7	50.3	33.0	3.2	-34.8	0.0	0.0	54.1	51.7	74	54	-19.9	-2.3	V
4.824	3.0	53.5	51.6	33.0	3.2	-34.8	0.0	0.0	54.8	53.0	74	54	-19.2	-1.0	H
<u>Mid Ch, 2437</u>															
4.874	3.0	53.0	51.5	33.1	3.2	-34.8	0.0	0.0	54.5	53.0	74	54	-19.5	-1.0	V
7.311	3.0	44.8	35.0	35.5	3.6	-34.1	0.0	0.0	49.8	40.0	74	54	-24.2	-14.0	V
4.874	3.0	53.0	50.5	33.1	3.2	-34.8	0.0	0.0	54.5	52.0	74	54	-19.5	-2.0	H
7.311	3.0	44.5	34.4	35.5	3.6	-34.1	0.0	0.0	49.5	39.4	74	54	-24.5	-14.6	H
<u>High Ch, 2462MHz</u>															
4.924	3.0	54.2	51.7	33.1	3.2	-34.8	0.0	0.0	55.7	53.2	74	54	-18.3	-0.8	V
7.386	3.0	45.0	35.2	35.6	3.6	-34.1	0.0	0.0	50.1	40.3	74	54	-23.9	-13.7	V
4.924	3.0	54.6	52.0	33.1	3.2	-34.8	0.0	0.0	56.1	53.5	74	54	-17.9	-0.5	H
7.386	3.0	44.6	34.5	35.6	3.6	-34.1	0.0	0.0	49.7	39.6	74	54	-24.3	-14.4	H
Rev. 5.1.6 Note: No other emissions were detected above the system noise floor.															
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss					Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter					Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit					


**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

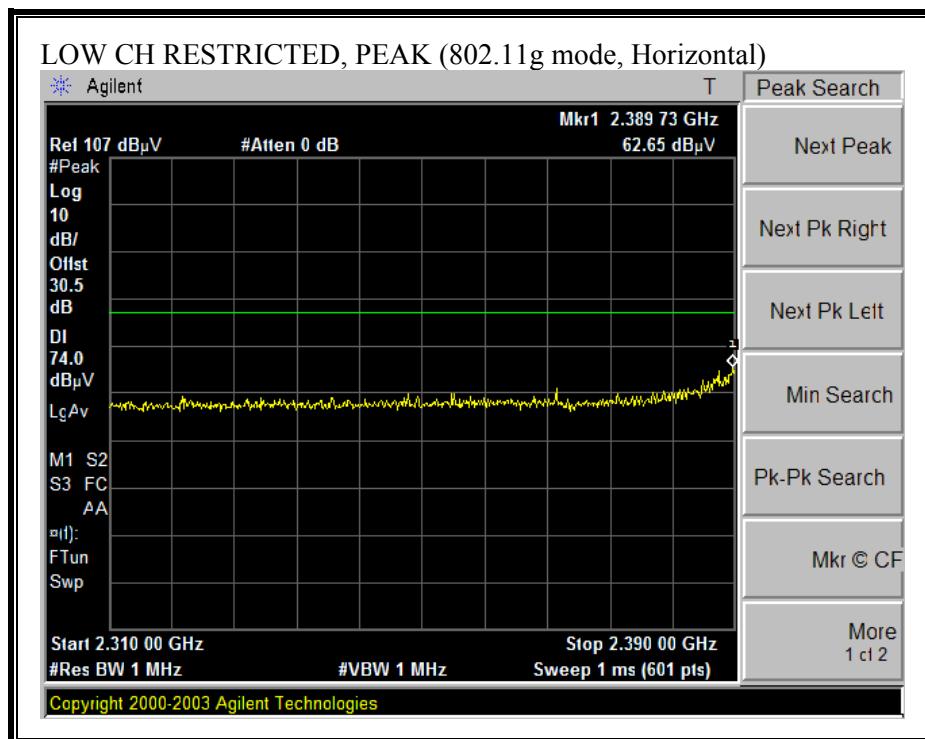

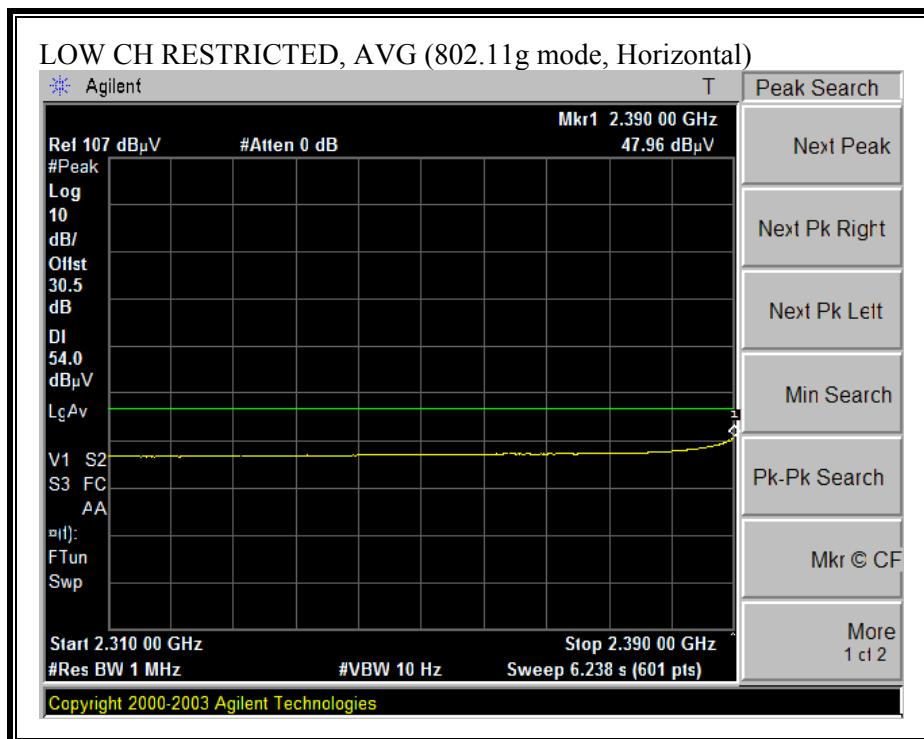



**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)**

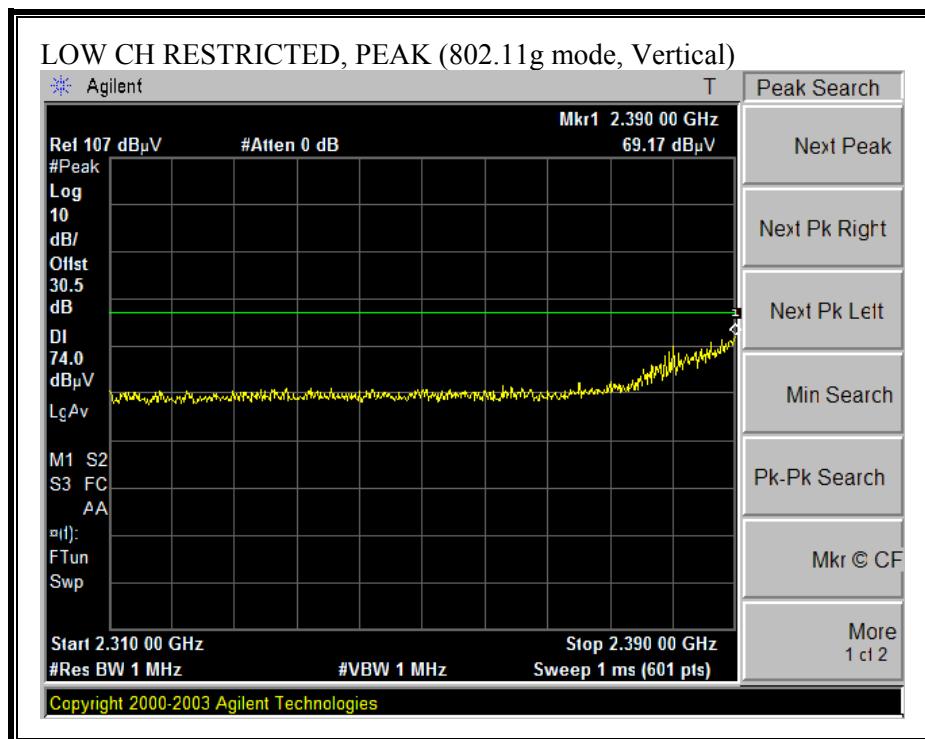

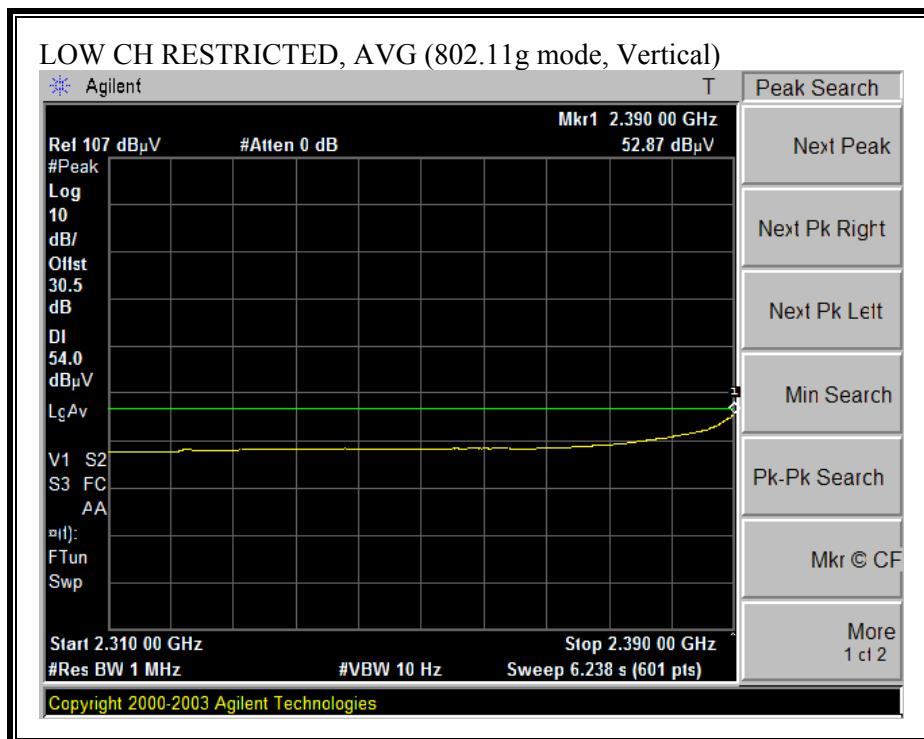



**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

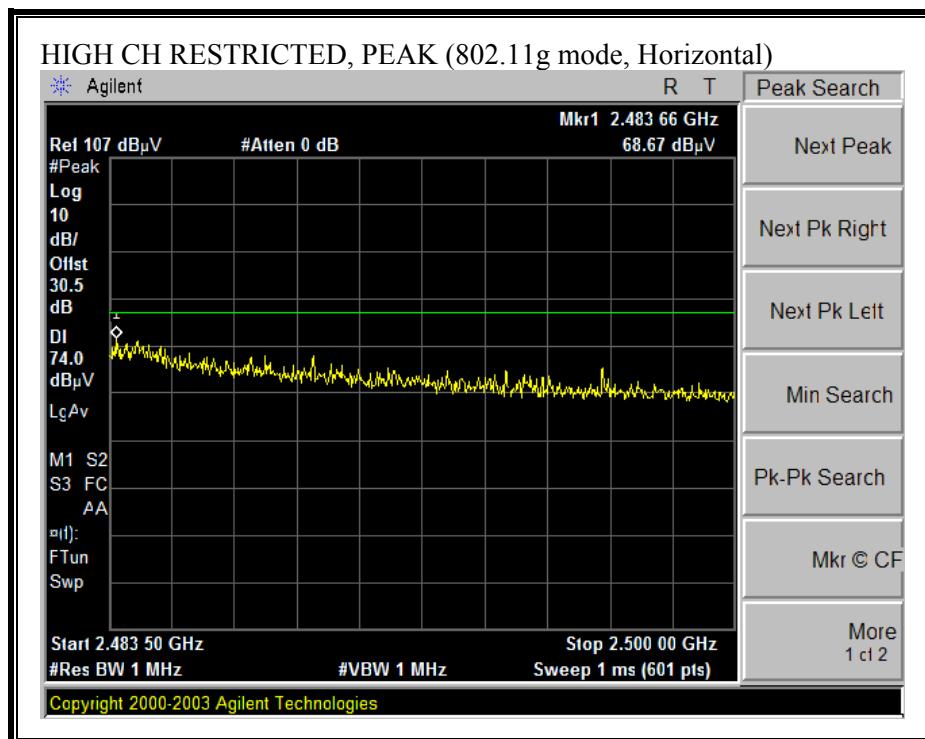

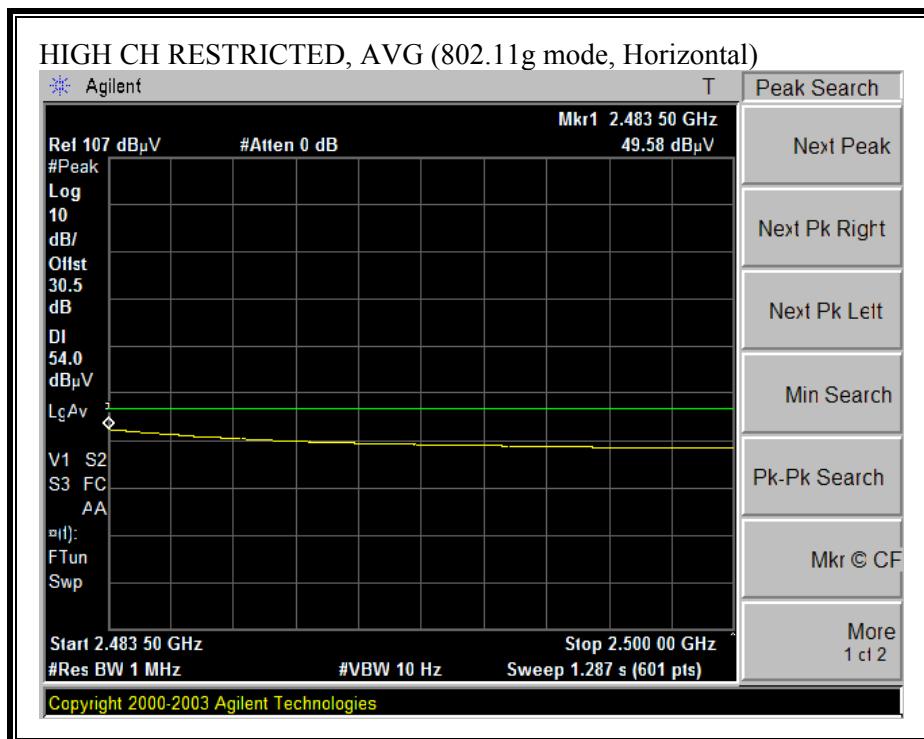

**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

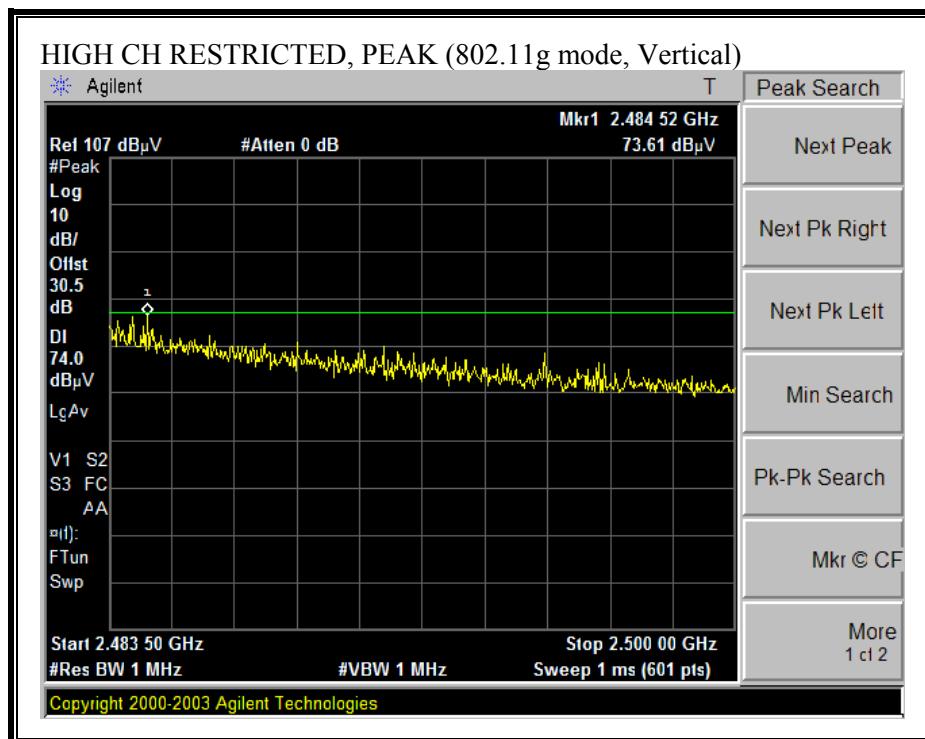

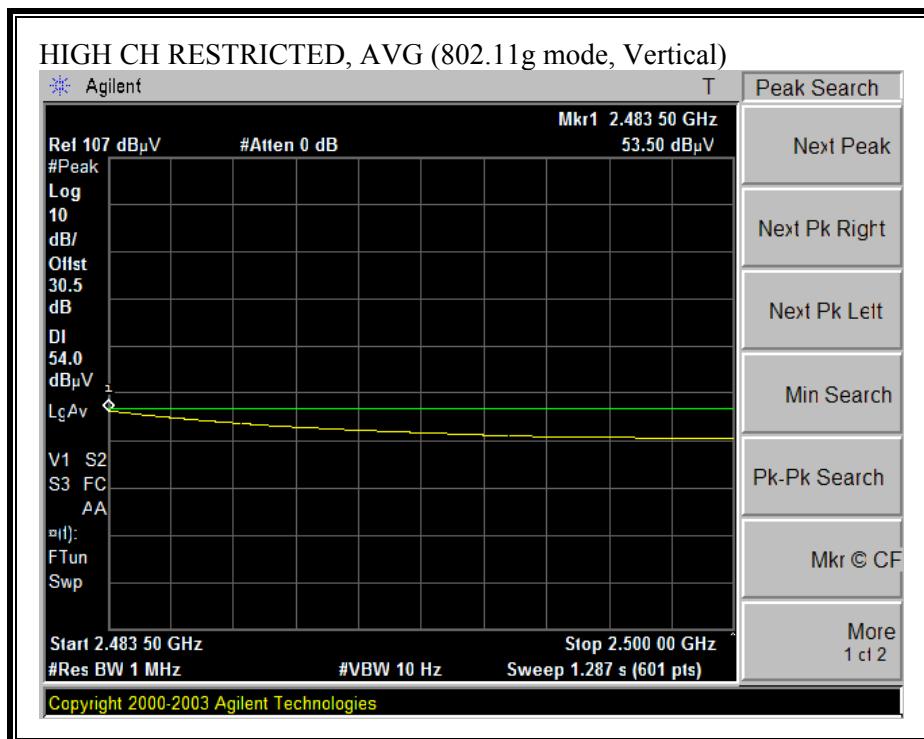

**HARMONICS AND SPURIOUS EMISSIONS (g MODE)**

High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																																																																																																																																																																																																																																																																																																								
<p>Company: Buffalo Inc.          Project #: 06J10304          Date: MAY 19, 2006          Test Engineer: Chin Pang          Configuration: EUT Only          Mode: TX, g mode</p> <p><b>Test Equipment:</b></p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn &gt; 18GHz</td> <td>Limit</td> </tr> <tr> <td>T60; S/N: 2238 @3m</td> <td>T34 HP 8449B</td> <td></td> <td colspan="4"></td> <td>FCC 15.205</td> </tr> <tr> <td colspan="15">Hi Frequency Cables</td> </tr> <tr> <td colspan="2">2 foot cable</td> <td>3 foot cable</td> <td>12 foot cable</td> <td>HPF</td> <td>Reject Filter</td> <td colspan="9"> <b>Peak Measurements</b>                      RBW=VBW=1MHz  <b>Average Measurements</b>                      RBW=1MHz ; VBW=10Hz                 </td> </tr> <tr> <td>Chin 197538001</td> <td>Chin 200354001</td> <td></td> <td></td> <td></td> <td>R_001</td> <td colspan="9"></td> </tr> </table> <table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr> <td colspan="15">Low Ch, 2412MHz</td> </tr> <tr> <td>4.824</td> <td>3.0</td> <td>50.3</td> <td>37.2</td> <td>33.0</td> <td>3.2</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>51.7</td> <td>38.6</td> <td>74</td> <td>54</td> <td>-22.3</td> <td>-15.4</td> <td>V</td> </tr> <tr> <td>4.824</td> <td>3.0</td> <td>48.0</td> <td>37.0</td> <td>33.0</td> <td>3.2</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>49.4</td> <td>38.4</td> <td>74</td> <td>54</td> <td>-24.6</td> <td>-15.6</td> <td>H</td> </tr> <tr> <td colspan="15">Mid Ch, 2437</td> </tr> <tr> <td>4.874</td> <td>3.0</td> <td>50.0</td> <td>37.4</td> <td>33.1</td> <td>3.2</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>51.5</td> <td>38.9</td> <td>74</td> <td>54</td> <td>-22.5</td> <td>-15.1</td> <td>V</td> </tr> <tr> <td>7.311</td> <td>3.0</td> <td>44.2</td> <td>33.0</td> <td>35.5</td> <td>3.6</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>49.2</td> <td>38.0</td> <td>74</td> <td>54</td> <td>-24.8</td> <td>-16.0</td> <td>V</td> </tr> <tr> <td>4.874</td> <td>3.0</td> <td>51.0</td> <td>38.0</td> <td>33.1</td> <td>3.2</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>52.5</td> <td>39.5</td> <td>74</td> <td>54</td> <td>-21.5</td> <td>-14.5</td> <td>H</td> </tr> <tr> <td>7.311</td> <td>3.0</td> <td>43.7</td> <td>31.0</td> <td>35.5</td> <td>3.6</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.7</td> <td>36.0</td> <td>74</td> <td>54</td> <td>-25.3</td> <td>-18.0</td> <td>H</td> </tr> <tr> <td colspan="15">High Ch, 2462MHz</td> </tr> <tr> <td>4.924</td> <td>3.0</td> <td>53.0</td> <td>39.0</td> <td>33.1</td> <td>3.2</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>54.5</td> <td>40.5</td> <td>74</td> <td>54</td> <td>-19.5</td> <td>-13.5</td> <td>V</td> </tr> <tr> <td>7.386</td> <td>3.0</td> <td>44.5</td> <td>33.4</td> <td>35.6</td> <td>3.6</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>49.6</td> <td>38.5</td> <td>74</td> <td>54</td> <td>-24.4</td> <td>-15.5</td> <td>V</td> </tr> <tr> <td>4.924</td> <td>3.0</td> <td>51.6</td> <td>38.5</td> <td>33.1</td> <td>3.2</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>53.1</td> <td>40.0</td> <td>74</td> <td>54</td> <td>-20.9</td> <td>-14.0</td> <td>H</td> </tr> <tr> <td>7.386</td> <td>3.0</td> <td>43.0</td> <td>31.3</td> <td>35.6</td> <td>3.6</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>48.1</td> <td>36.4</td> <td>74</td> <td>54</td> <td>-25.9</td> <td>-17.6</td> <td>H</td> </tr> </tbody> </table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.205	Hi Frequency Cables															2 foot cable		3 foot cable	12 foot cable	HPF	Reject Filter	<b>Peak Measurements</b> RBW=VBW=1MHz <b>Average Measurements</b> RBW=1MHz ; VBW=10Hz									Chin 197538001	Chin 200354001				R_001										f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	Low Ch, 2412MHz															4.824	3.0	50.3	37.2	33.0	3.2	-34.8	0.0	0.0	51.7	38.6	74	54	-22.3	-15.4	V	4.824	3.0	48.0	37.0	33.0	3.2	-34.8	0.0	0.0	49.4	38.4	74	54	-24.6	-15.6	H	Mid Ch, 2437															4.874	3.0	50.0	37.4	33.1	3.2	-34.8	0.0	0.0	51.5	38.9	74	54	-22.5	-15.1	V	7.311	3.0	44.2	33.0	35.5	3.6	-34.1	0.0	0.0	49.2	38.0	74	54	-24.8	-16.0	V	4.874	3.0	51.0	38.0	33.1	3.2	-34.8	0.0	0.0	52.5	39.5	74	54	-21.5	-14.5	H	7.311	3.0	43.7	31.0	35.5	3.6	-34.1	0.0	0.0	48.7	36.0	74	54	-25.3	-18.0	H	High Ch, 2462MHz															4.924	3.0	53.0	39.0	33.1	3.2	-34.8	0.0	0.0	54.5	40.5	74	54	-19.5	-13.5	V	7.386	3.0	44.5	33.4	35.6	3.6	-34.1	0.0	0.0	49.6	38.5	74	54	-24.4	-15.5	V	4.924	3.0	51.6	38.5	33.1	3.2	-34.8	0.0	0.0	53.1	40.0	74	54	-20.9	-14.0	H	7.386	3.0	43.0	31.3	35.6	3.6	-34.1	0.0	0.0	48.1	36.4	74	54	-25.9	-17.6	H
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																																																																	
T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.205																																																																																																																																																																																																																																																																																																	
Hi Frequency Cables																																																																																																																																																																																																																																																																																																								
2 foot cable		3 foot cable	12 foot cable	HPF	Reject Filter	<b>Peak Measurements</b> RBW=VBW=1MHz <b>Average Measurements</b> RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																																																																																		
Chin 197538001	Chin 200354001				R_001																																																																																																																																																																																																																																																																																																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																																									
Low Ch, 2412MHz																																																																																																																																																																																																																																																																																																								
4.824	3.0	50.3	37.2	33.0	3.2	-34.8	0.0	0.0	51.7	38.6	74	54	-22.3	-15.4	V																																																																																																																																																																																																																																																																																									
4.824	3.0	48.0	37.0	33.0	3.2	-34.8	0.0	0.0	49.4	38.4	74	54	-24.6	-15.6	H																																																																																																																																																																																																																																																																																									
Mid Ch, 2437																																																																																																																																																																																																																																																																																																								
4.874	3.0	50.0	37.4	33.1	3.2	-34.8	0.0	0.0	51.5	38.9	74	54	-22.5	-15.1	V																																																																																																																																																																																																																																																																																									
7.311	3.0	44.2	33.0	35.5	3.6	-34.1	0.0	0.0	49.2	38.0	74	54	-24.8	-16.0	V																																																																																																																																																																																																																																																																																									
4.874	3.0	51.0	38.0	33.1	3.2	-34.8	0.0	0.0	52.5	39.5	74	54	-21.5	-14.5	H																																																																																																																																																																																																																																																																																									
7.311	3.0	43.7	31.0	35.5	3.6	-34.1	0.0	0.0	48.7	36.0	74	54	-25.3	-18.0	H																																																																																																																																																																																																																																																																																									
High Ch, 2462MHz																																																																																																																																																																																																																																																																																																								
4.924	3.0	53.0	39.0	33.1	3.2	-34.8	0.0	0.0	54.5	40.5	74	54	-19.5	-13.5	V																																																																																																																																																																																																																																																																																									
7.386	3.0	44.5	33.4	35.6	3.6	-34.1	0.0	0.0	49.6	38.5	74	54	-24.4	-15.5	V																																																																																																																																																																																																																																																																																									
4.924	3.0	51.6	38.5	33.1	3.2	-34.8	0.0	0.0	53.1	40.0	74	54	-20.9	-14.0	H																																																																																																																																																																																																																																																																																									
7.386	3.0	43.0	31.3	35.6	3.6	-34.1	0.0	0.0	48.1	36.4	74	54	-25.9	-17.6	H																																																																																																																																																																																																																																																																																									
Rev. 5.1.6 Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																																																																																																								
<table border="0"> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table>								f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																																																					
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																																																																																			
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																																																																																			
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																																																																																			
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																																																																																			
CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																																																																																					

**HARMONICS AND SPURIOUS EMISSIONS (g TURBO MODE)**

High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Company: Buffalo Inc. Project #:06J10304 Date: MAY 24, 2006 Test Engineer: Chin Pang Configuration: EUT Only Mode: TX, g Turbo mode															
<b>Test Equipment:</b>															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz				Limit					
T60; S/N: 2238 @3m		T34 HP 8449B								FCC 15.205					
Hi Frequency Cables															
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz					
		Chin 197538001		Chin 200354001				R_001		Average Measurements RBW=1MHz ; VBW=10Hz					
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Mid Ch, 2437															
4.874	3.0	52.0	37.5	33.1	3.2	-34.8	0.0	0.0	53.5	39.0	74	54	-20.5	-15.0	V
7.311	3.0	46.0	34.5	35.5	3.6	-34.1	0.0	0.0	51.0	39.5	74	54	-23.0	-14.5	V
4.874	3.0	51.4	37.0	33.1	3.2	-34.8	0.0	0.0	52.9	38.5	74	54	-21.1	-15.5	H
7.311	3.0	44.3	31.2	35.5	3.6	-34.1	0.0	0.0	49.3	36.2	74	54	-24.7	-17.8	H
Rev. 5.1.6 Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss			HPF	High Pass Filter										

### 6.3. POWERLINE CONDUCTED EMISSIONS

#### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


#### RESULTS

No non-compliance noted:


**6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Closs (dB)	Limit	EN_B		Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)			QP	AV	QP (dB)	AV (dB)	
0.20	53.78	--	47.84	0.00	63.53	53.53	-9.75	-5.69	L1	
0.27	48.14	--	39.62	0.00	61.06	51.06	-12.92	-11.44	L1	
0.41	39.18	--	32.08	0.00	57.65	47.65	-18.47	-15.57	L1	
0.20	49.82	--	45.16	0.00	63.45	53.45	-13.63	-8.29	L2	
0.27	45.08	--	36.24	0.00	61.00	51.00	-15.92	-14.76	L2	
0.34	40.92	--	30.20	0.00	59.13	49.13	-18.21	-18.93	L2	
6 Worst Data										

**LINE 1 RESULTS**

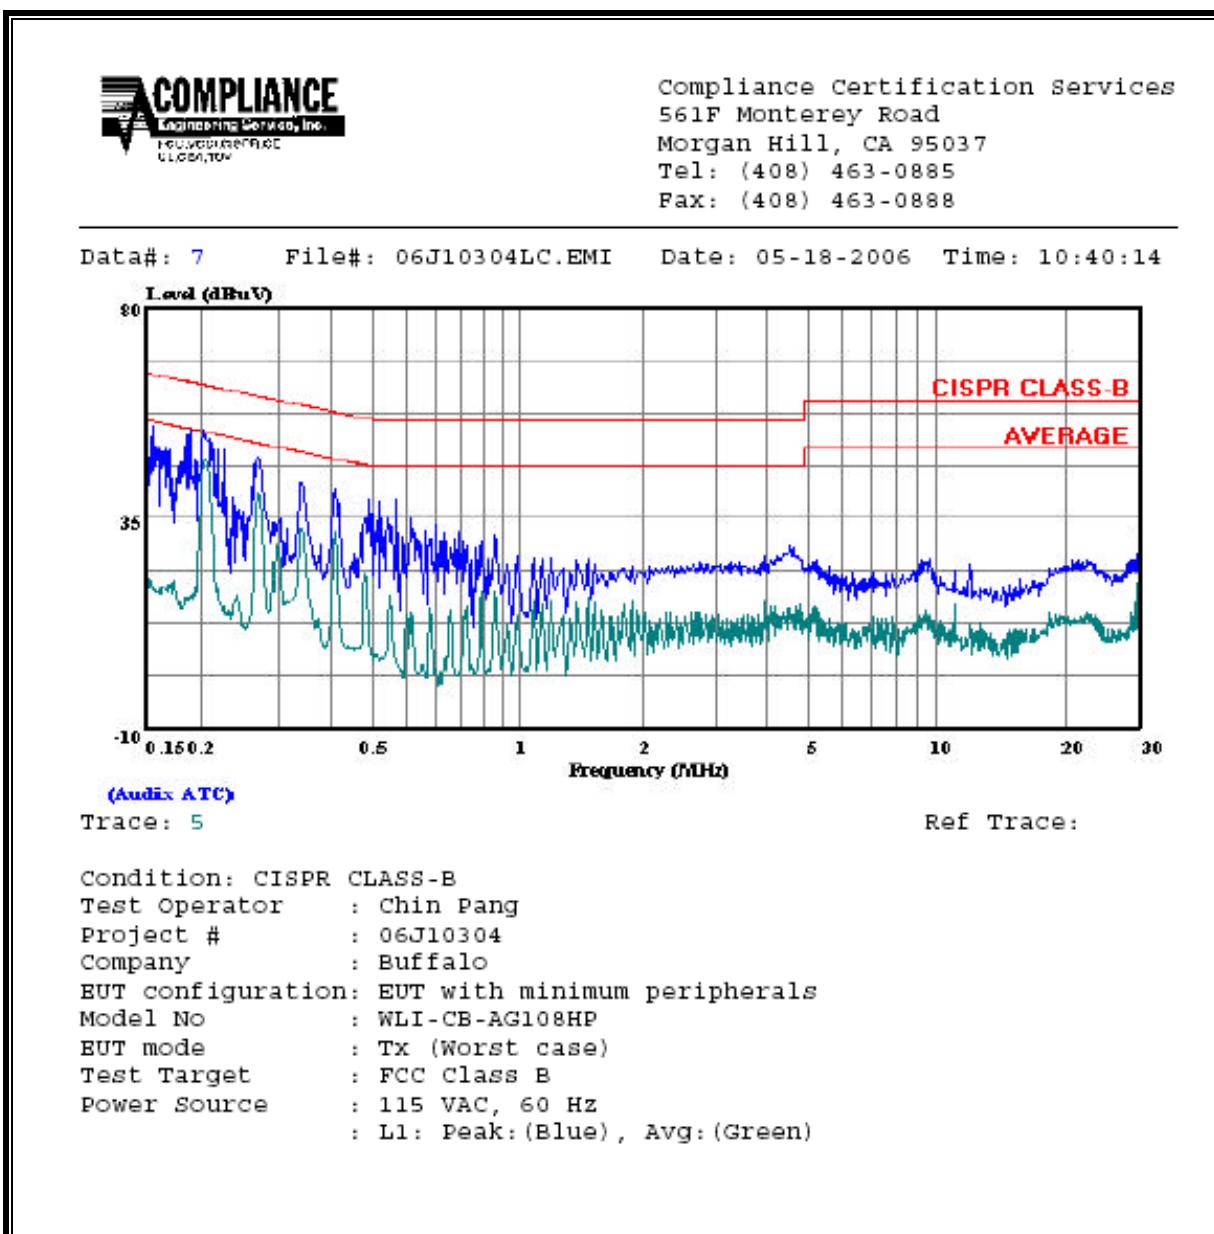


**LINE 2 RESULTS**

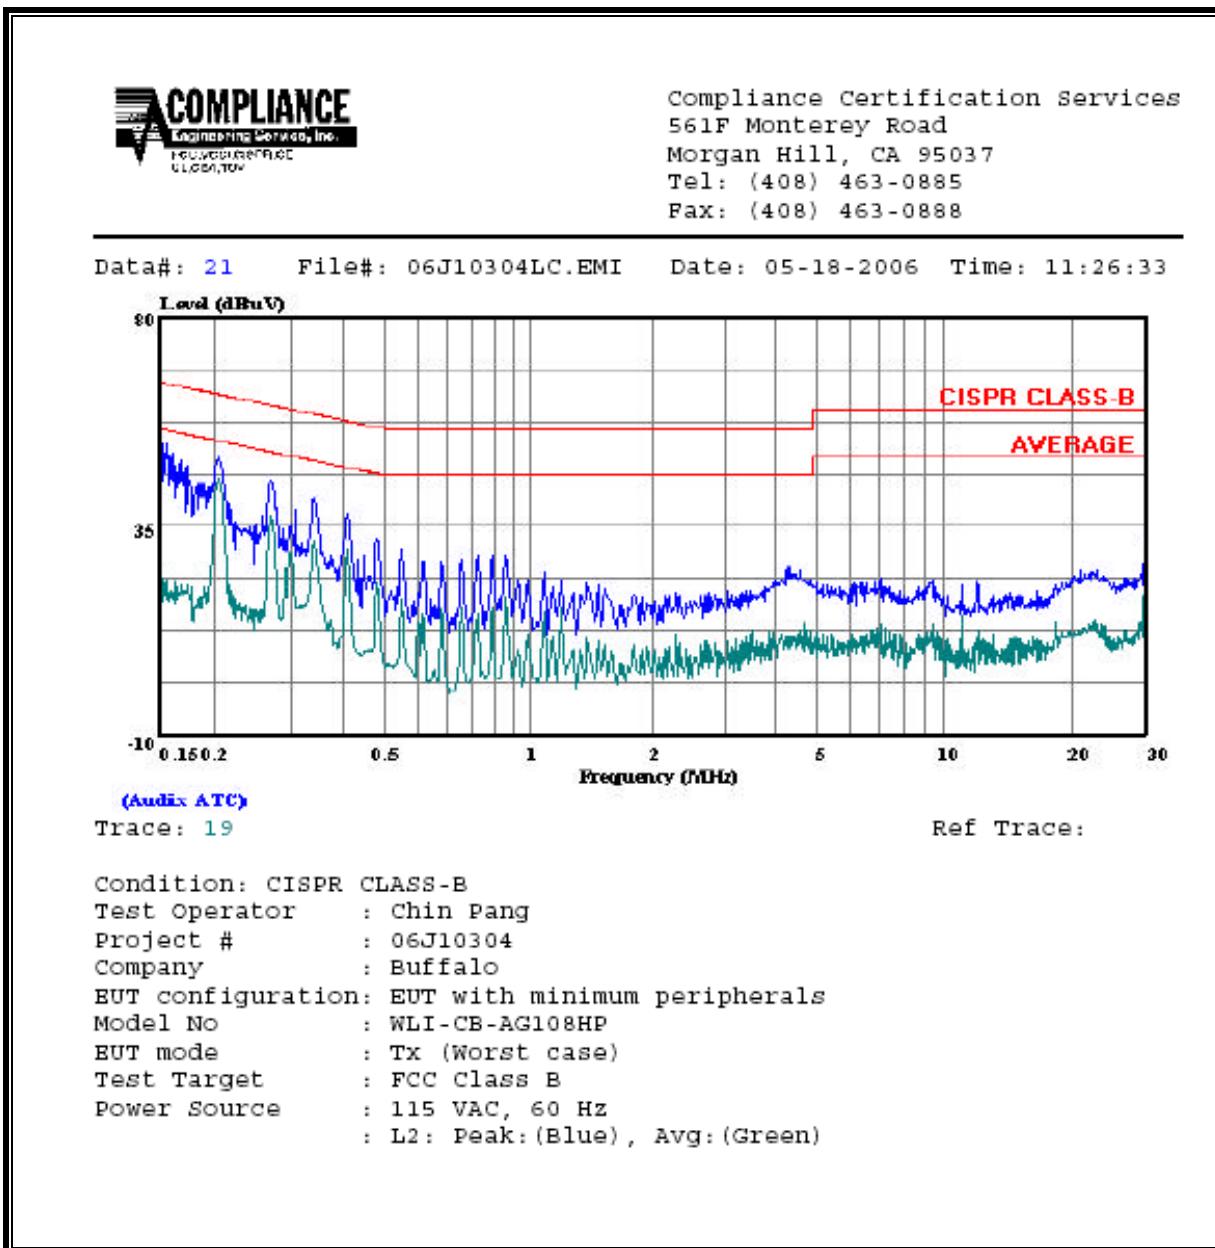



## 7. SETUP PHOTOS

### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

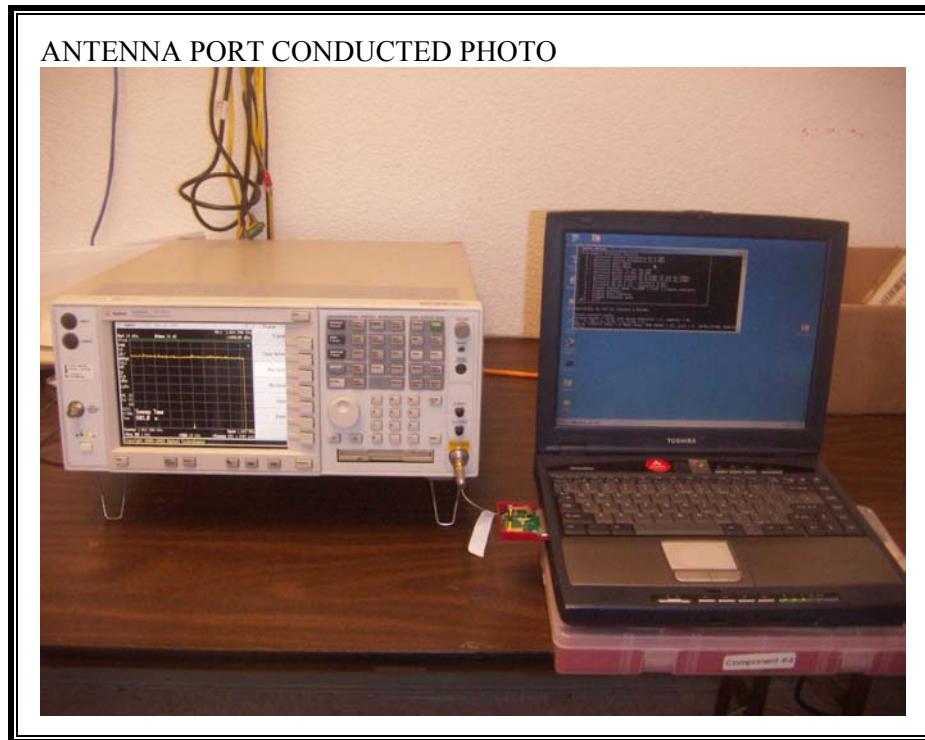


**RADIATED RF MEASUREMENT SETUP**

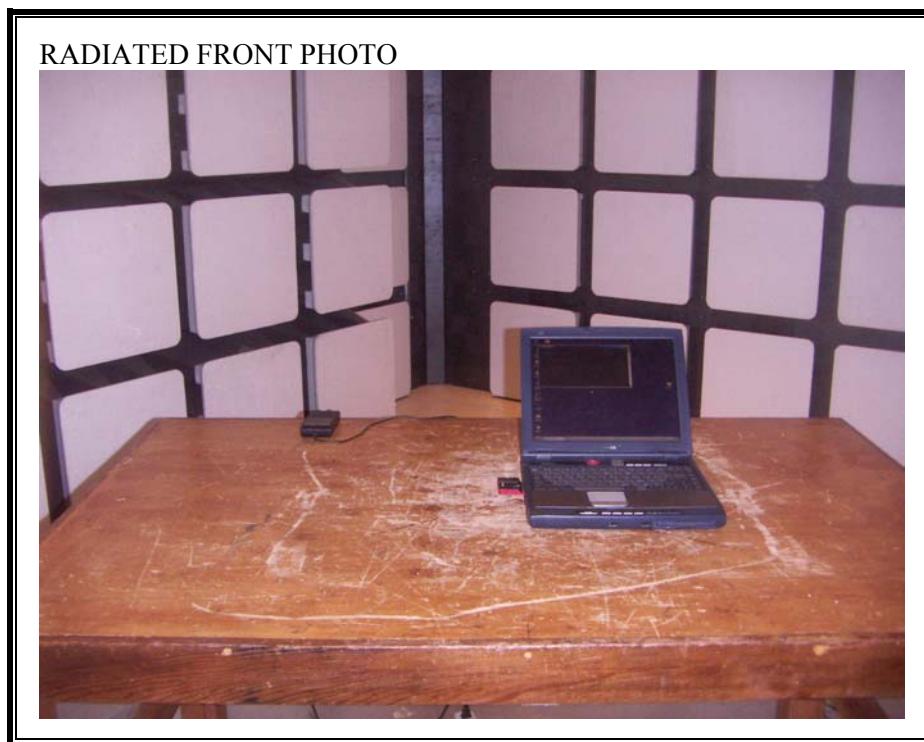

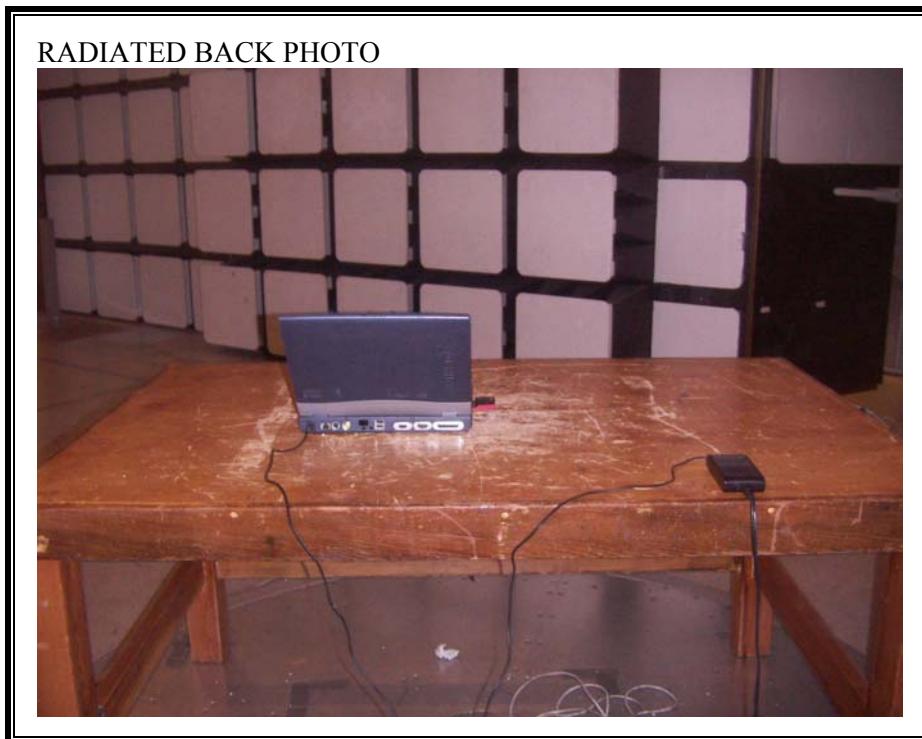

**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**

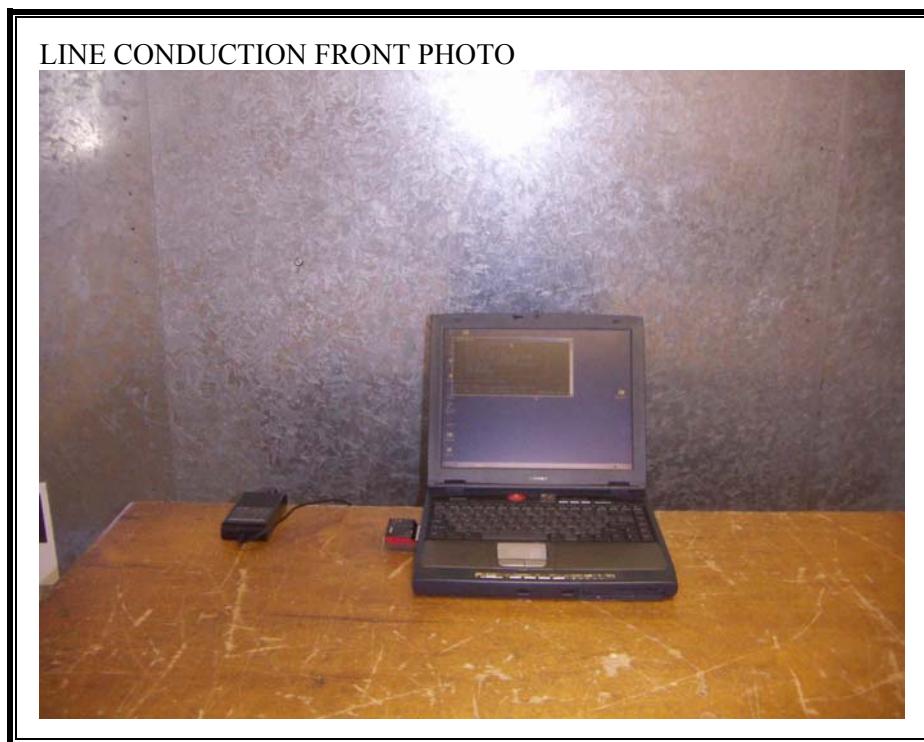

LINE CONDUCTION BACK PHOTO



**END OF REPORT**