



# FCC TEST REPORT

for

## PART 15, SUBPART B CLASS B

EQUIPMENT : FAX MODEM CARD

MODEL NO. : PT-3515

F C C I D : H52PT-3515

FILING TYPE : ORIGINAL CERTIFICATION

APPLICANT : **Puretek Industrial Co., LTD.**  
4F, No. 12, LANE 235, PAO-CHIAO RD.,  
HSIN TIEN CITY, TAIPEI, TAIWAN, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.

## **SPORTON INTERNATIONAL INC.**

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**TABLE OF CONTENT**

<b>SECTION TITLE</b>	<b>PAGE</b>
<b>CERTIFICATE OF COMPLIANCE.....</b>	<b>3</b>
<b>1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST.....</b>	<b>4</b>
1.1. APPLICANT .....	4
1.2. MANUFACTURER .....	4
1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST.....	4
1.4. FEATURE OF EQUIPMENT UNDER TEST .....	4
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>5</b>
2.1. TEST MANNER .....	5
2.2. DESCRIPTION OF TEST SYSTEM .....	5
2.3. CONNECTION DIAGRAM OF TEST SYSTEM .....	8
<b>3. TEST SOFTWARE.....</b>	<b>9</b>
<b>4. GENERAL INFORMATION OF TEST .....</b>	<b>10</b>
4.1. TEST FACILITY .....	10
4.2. STANDARD FOR METHODS OF MEASUREMENT .....	10
4.3. TEST IN COMPLIANCE WITH.....	10
4.4. FREQUENCY RANGE INVESTIGATED .....	10
4.5. TEST DISTANCE .....	10
<b>5. TEST OF CONDUCTED POWERLINE .....</b>	<b>11</b>
5.1. MAJOR MEASURING INSTRUMENTS.....	11
5.2. TEST PROCEDURES.....	12
5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE .....	13
5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION.....	14
5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION .....	15
<b>6. TEST OF RADIATED EMISSION .....</b>	<b>17</b>
6.1. MAJOR MEASURING INSTRUMENTS.....	17
6.2. TEST PROCEDURES.....	18
6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION .....	19
6.4. TEST RESULT OF RADIATED EMISSION.....	20
6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION.....	21
<b>7. ANTENNA FACTOR AND CABLE LOSS .....</b>	<b>22</b>
<b>8. LIST OF MEASURING EQUIPMENT USED .....</b>	<b>23</b>

## CERTIFICATE OF COMPLIANCE

for

### FCC PART 15, SUBPART B CLASS B

EQUIPMENT : FAX MODEM CARD

MODEL NO. : PT-3515

F C C I D : H52PT-3515

APPLICANT : **Puretek Industrial Co., LTD.**  
4F, No. 12, LANE 235, PAO-CHIAO RD.,  
HSIN TIEN CITY, TAIPEI, TAIWAN, R.O.C.

### I HEREBY CERTIFY THAT :

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was ***passed*** both radiated and conducted emissions **Class B** limits. Testing was carried out on **Aug. 26, 1998** at **SPORTON International Inc. LAB.**

  
W. L. Huang  
General Manager

**SPORTON INTERNATIONAL INC.**

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## **1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST**

### **1.1. APPLICANT**

**Puretek Industrial Co., LTD.**

4F, No. 12, LANE 235, PAO-CHIAO RD.,  
HSIN TIEN CITY, TAIPEI, TAIWAN, R.O.C.

### **1.2. MANUFACTURER :**

Same as 1.1.

### **1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST**

EQUIPMENT : FAX MODEM CARD

MODEL NO. : PT-3515

FCC ID : H52PT-3515

TRADE NAME : Puretek

Microphone, Telephone, Speaker CABLE : Non-shielded

POWER SUPPLY TYPE : N/A

POWER CORD : N/A

### **1.4. FEATURE OF EQUIPMENT UNDER TEST**

Data

- ITU-T V.90 and Rockwell K56flex
- ITU-T V.34, V.32bis, V.32, V.22bis, V.21, V.23
- Bell 103 & 212A
- V.42bis & MNP 5 ( Data compression )
- V.42 & MNP2-4 ( Error correction )
- V.80 ( H.324 video conferencing interface )

Fax

- V.17 ( 14400bps FAX )
- V.29 ( 9600bps FAX )
- V.27ter ( 4800bps FAX )

Voice

- Voice/Audio mode
- Full-Duplex speakerphone

## **2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST**

### **2.1. TEST MANNER**

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The DELL keyboard, LOGITECH RS232 mouse, HP printer, ACEEX modem, KOKA microphone, two TRANBON telephones, HITACHI monitor, JUSTER speaker and EUT were connected to the F.I.C. P.C. for EMI test.
- c. The phone jack and line jack was both connected to the TRANBON telephone by telephone line.
- d. Frequency range investigated : Conduction 450 KHz to 30 MHz, Radiation 30 MHz to 1000 MHz.

### **2.2. DESCRIPTION OF TEST SYSTEM**

#### **Support Device 1. --- P.C. (FIC)**

FCC ID : N/A  
Model No. : P2L97  
Serial No. : SP1005  
Data Cable : Shielded  
Power Cord : Non-shielded  
Power Supply Type : Switching

( Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.)

#### **Support Device 2. --- KEYBOARD (DELL)**

FCC ID : GYUM92SK  
Model No. : AT101 (DE8M)  
Serial No. : SP1021  
Data Cable : Shielded, 360 degree via metal backshells, 1.9m

**FCC TEST REPORT****REPORT NO. : F882405****Support Device 3. -- RS232 MOUSE (LOGITECH)**

FCC ID : DZL210365  
Model No. : M-M35  
Serial No. : SP1032  
Data Cable : Non-shielded, 1.9m

**Support Device 4. --- PRINTER (HP)**

FCC ID : DSI6XU2225  
Model No. : 2225C  
Serial No. : SP1041  
Data Cable : Shielded, 360 degree via metal backshells, 1.35m  
Power Supply Type : Linear, Adapter  
Power Cord : Non-shielded

**Support Device 5. -- MODEM (ACEEX)**

FCC ID : IFAXDM1414  
Model No. : DM1414  
Power Supply Type : Linear, AC Adapter  
Power Cord : Non-shielded  
Serial No. : SP1045  
Data Cable : Shielded, 360 degree via metal backshells, 1.15m

**Support Device 6. -- MICROPHONE (KOKA)**

FCC ID : N/A  
Model No. : SR-M02  
Serial No. : SP1057  
Data Cable : Non-shielded, 2.1m

**Support Device 7. --- TELEPHONE (TRANBON)**

FCC ID : N/A  
Model No. : TE-003  
Serial No. : SP1065  
Data Cable : Non-shielded, 2.1m

**FCC TEST REPORT****REPORT NO. : F882405****Support Device 8. --- TELEPHONE (TRANBON)**


FCC ID : N/A  
Model No. : TE-258  
Serial No. : SP1067  
Data Cable : Non-shielded, 2.1m

**Support Device 9. --- MONITOR (HITACHI)**

FCC ID : M9U9705C97BMD  
Model No. : CM-803ET  
Serial No. : SP1012  
Data Cable : Shielded, 360 degree via metal backshells, 1.7m  
Power Supply Type : Switching  
Power Cord : Non-shielded

**Support Device 10. -- SPEAKER (JUSTER)**

FCC ID : N/A  
Model No. : SP-480  
Serial No. : SP1053  
Data Cable : Non-shielded, 1.2m

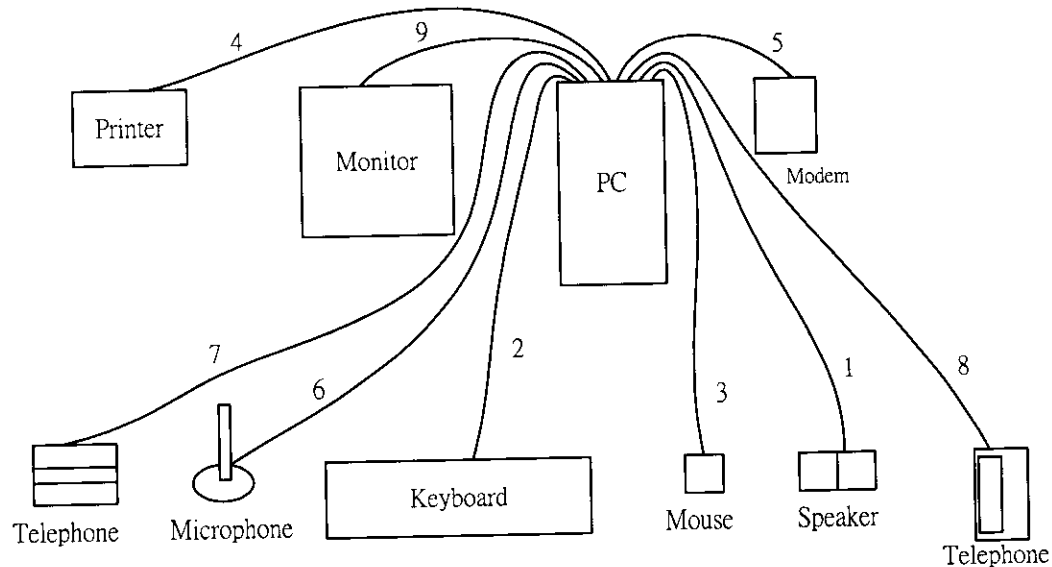**2.3. CONNECTION DIAGRAM OF TEST SYSTEM**

1. The I/O cable is connected from the EUT to the support device 10.
2. The I/O cable is connected to the support device 2.
3. The I/O cable is connected to the support device 3.
4. The I/O cable is connected to the support device 4.
5. The I/O cable is connected to the support device 5.
6. The I/O cable is connected from the EUT to the support device 6.
7. The I/O cable is connected from the EUT to the support device 7.
8. The I/O cable is connected from the EUT to the support device 8.
9. The I/O cable is connected to the support device 9.



### **3. TEST SOFTWARE**

An executive program, EMITEST.EXE under WIN98, which generates a complete line of continuously repeating " H " pattern is used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem, and modem return the "H" to P.C..
- f. The PC read and writes the floppy disk drive.
- g. Repeat the steps from b to f.

## **4. GENERAL INFORMATION OF TEST**

### **4.1. TEST FACILITY**

This test was carried out by SPORTON INTERNATIONAL INC. in an openarea test site.

Openarea Test Site Location : No. 30-1, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,  
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

### **4.2. STANDARD FOR METHODS OF MEASUREMENT**

ANSI C63.4-1992

### **4.3 .TEST IN COMPLIANCE WITH**

FCC PART 15, SUBPART B CLASS B

### **4.4. FREQUENCY RANGE INVESTIGATED**

- a. Conduction : from 450 KHz to 30 MHz
- b. Radiation : from 30 MHz to 1000 MHz.

### **4.5. TEST DISTANCE**

The test distance of radiated emission from antenna to EUT is 3M.

## **5. TEST OF CONDUCTED POWERLINE**

Conducted Emissions were measured from 450 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

### **5.1. MAJOR MEASURING INSTRUMENTS**

- Test Receiver ( HP 8591EM )
  - Attenuation 0 dB
  - Start Frequency 0.45 MHz
  - Stop Frequency 30 MHz
  - Step MHz 0.007 MHz
  - IF Bandwidth 9 KHz

**5.2. TEST PROCEDURES**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network ( LISN ).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 450 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.

**FCC TEST REPORT**

REPORT NO. : F882405

**5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION**

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 29°C
- Relative Humidity : 49 % RH
- Test Date : Aug. 26, 1998

The Conducted Emission test was passed at Neutral 0.46 MHz/ 35.10 dBuV.

Frequency ( MHz )	Line / Neutral	Meter Reading		Limits		Margin
		( dBuV )	( uV )	( dBuV )	( uV )	( dB )
0.46	L	33.10	45.19	48.00	251.19	-14.90
9.40	L	30.50	33.50	48.00	251.19	-17.50
22.57	L	32.80	43.65	48.00	251.19	-15.20
0.46	N	35.10	56.89	48.00	251.19	-12.90
1.13	N	30.50	33.50	48.00	251.19	-17.50
22.57	N	34.30	51.88	48.00	251.19	-13.70

Test Engineer : 

Kenny Chuang

## **6. TEST OF RADIATED EMISSION**

Radiated emissions from 30 MHz to 1000 MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.


### **6.1. MAJOR MEASURING INSTRUMENTS**

- Amplifier ( HP 8447D )
  - Attenuation 0 dB
  - RF Gain 25 dB
  - Signal Input 0.1 MHz to 1.3 GHz
  
- Spectrum Analyzer ( HP 8560E )
  - Attenuation 0 dB
  - Start Frequency 30 MHz
  - Stop Frequency 1000 MHz
  - Resolution Bandwidth 1 MHz
  - Video Bandwidth 1 MHz
  - Signal Input 30 Hz to 2.9 GHz
  
- Test Receiver ( R&S ESVP )
  - Resolution Bandwidth 120 KHz
  - Frequency Band 30 MHz to 1 GHz
  - Quasi-Peak Detector ON for Quasi-Peak Mode  
OFF for Peak Mode

**6.2. TEST PROCEDURES**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower ( from 1 M to 4 M ) and turn table ( from 0 degree to 360 degrees ) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

**6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION**

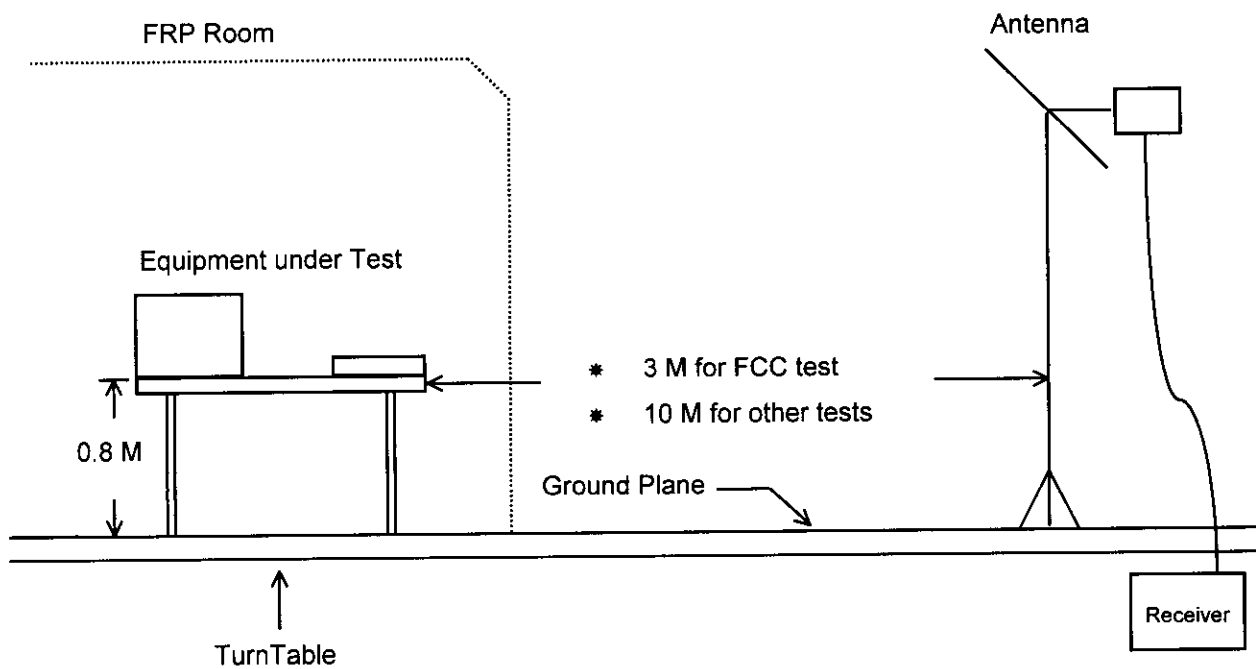



**6.4. TEST RESULT OF RADIATED EMISSION**

- Equipment meets the technical specifications of 15.109
  - Frequency Range of Test : from 30 MHz to 1000 MHz
  - Test Distance : 3 M
  - Temperature : 30°C
  - Relative Humidity : 50 % RH
  - Test Date : Aug. 25, 1998
- 
- Emission level ( dBuV/m ) = 20 log Emission level ( uV/m )
  - Sample Calculation at 169.27 MHz  
Corrected Reading = 12.22 + 2.20 + 20.45 = 34.87 (dBuV/m )

**The Radiated Emission test was passed at**

**Vertical 562.45 MHz / 42.51 dBuV**

**Antenna Height 3.0 Meter , Turntable Degree 260 °.**

Frequency ( MHz )	Antenna Polarity	Cable Factor	Reading Loss	Limits ( dBuV )	Emission ( uV )	Level ( dBuV )	Margin ( uV )	
		( dB )	( dB )	( dBuV )	( dBuV )	( uV )	( dBuV )	( dB )
169.27	H	12.22	2.20	20.45	43.50	150	34.87	55.40 -8.63
467.60	H	22.37	3.91	15.56	46.00	200	41.83	123.45 -4.17
183.97	V	13.21	2.30	20.88	43.50	150	36.39	65.99 -7.11
334.51	V	18.85	3.17	17.92	46.00	200	39.94	99.31 -6.06
466.81	V	22.37	3.90	13.85	46.00	200	40.12	101.39 -5.88
562.45	V	23.64	4.45	14.42	46.00	200	42.51	133.51 -3.49

Test Engineer : Jack Deng

Jack Deng

**7. ANTENNA FACTOR AND CABLE LOSS**

Frequency ( MHz )	Antenna Factor ( dB )	Cable Loss ( dB )
30	-1.91	0.90
35	-0.50	0.92
40	0.61	1.04
45	1.40	1.28
50	2.39	1.10
55	3.54	1.11
60	4.40	1.30
65	4.84	1.40
70	5.59	1.37
75	6.21	1.24
80	7.60	1.51
85	7.73	1.60
90	8.22	1.60
95	8.90	1.70
100	9.36	1.70
110	10.01	1.70
120	10.41	1.90
130	10.84	1.90
140	11.42	1.91
150	11.91	2.01
160	12.25	2.11
170	12.72	2.21
180	13.02	2.30
190	13.50	2.30
200	14.05	2.40
220	15.11	2.50
240	16.81	2.60
260	17.51	2.71
280	17.70	2.90
300	17.89	2.91
320	18.00	3.10
340	18.33	3.20
360	19.44	3.30
380	20.31	3.40
400	21.19	3.50
450	21.10	3.70
500	22.21	4.10
550	23.42	4.30
600	24.01	4.50
650	25.11	4.70
700	26.00	4.90
750	26.41	5.11
800	27.10	5.50
850	27.51	5.60
900	27.90	5.80
950	28.01	5.90

**8. LIST OF MEASURING EQUIPMENT USED**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver (site 2)	HP	8591EM	3710A01187	9 KHz - 18 GHz	Sep. 29, 1997	Conduction
LISN (EUT) (site 2)	Telemeter	NNB-2/16Z	98009	50 ohm / 50 uH	Jan. 29, 1998	Conduction
LISN (Support Unit) (site 2)	EMCO	3810/2NM	9703-1839	50 ohm / 50 uH	Mar. 06, 1998	Conduction
Spectrum Analyzer (Site 4)	HP	8560E	3728A03186	30Hz - 2.9GHz	Sep. 24, 1997	Radiation
Amplifier (Site 4)	HP	8447D	2944A09072	0.1MHz -1.3GHz	Sep. 17, 1997	Radiation
Test Receiver (Site 4)	R&S	ESVP	893610/003	20MHz - 1.3GHz	Apr. 13, 1998	Radiation
Bilog Antenna (Site 4)	CHASE	CBL6112A	2288	30MHz -2GHz	Jul. 14, 1998	Radiation
Half-wave dipole antenna (Site 4)	EMCO	3121C	9705-1285	28 M - 1GHz	May 19, 1998	Radiation
Turn Table (site 4)	EMCO	2080	9711-1090	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 4)	EMCO	2075	9711-2114	1 m- 4 m	N/A	Radiation

※ The column of Remark indicates that the instruments used for conduction ("C") or radiation ("R") test.