



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

| | |
|------------------------|--|
| Applicant's company | Unitech Co., Ltd. |
| Applicant Address | 3F, No.236, Sinhu 2 nd Rd., Neihu Chiu, Taipei, Taiwan114, R.O.C. |
| FCC ID | HLEPA600BTG |
| Manufacturer's company | Unitech Co., Ltd. |
| Manufacturer Address | 5F, No.136, Lan 235, Pao-Chiao Rd., Hsin-Tien City, Taipei Hsien, Taiwan, R.O.C. |

| | |
|------------------|---------------------------------------|
| Product Name | PDA Scanner |
| Brand Name | Unitech |
| Model Name | PA600BTG |
| Test Rule | 47 CFR FCC Part 15 Subpart C § 15.247 |
| Test Freq. Range | 2400 ~ 2483.5MHz |
| Received Date | Nov. 24, 2006 |
| Final Test Date | Jan. 02, 2007 |
| Submission Type | Original Equipment |
| Multiple Listing | Please refer to section 3.7 |



Statement

Test result included is only for the Bluetooth part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

NVLAP[®]

Lab Code: 200079-0

Table of Contents

| | |
|--|-----------------|
| 1. CERTIFICATE OF COMPLIANCE..... | 1 |
| 2. SUMMARY OF THE TEST RESULT | 2 |
| 3. GENERAL INFORMATION..... | 3 |
| 3.1. Product Details | 3 |
| 3.2. Accessories..... | 3 |
| 3.3. Table for Filed Antenna | 3 |
| 3.4. Table for Carrier Frequencies | 3 |
| 3.5. Table for Test Modes | 4 |
| 3.6. Table for Testing Locations..... | 4 |
| 3.7. Table for Multiple Listing | 5 |
| 3.8. Table for Supporting Units..... | 5 |
| 3.9. Table for Parameters of Test Software Setting | 5 |
| 3.10. Test Configurations | 6 |
| 4. TEST RESULT | 9 |
| 4.1. AC Power Line Conducted Emissions Measurement..... | 9 |
| 4.2. Maximum Peak Output Power Measurement..... | 13 |
| 4.3. Hopping Channel Separation Measurement | 15 |
| 4.4. Number of Hopping Frequency Measurement | 20 |
| 4.5. Dwell Time Measurement..... | 22 |
| 4.6. Radiated Emissions Measurement..... | 29 |
| 4.7. Band Edge Emissions Measurement | 41 |
| 4.8. Antenna Requirements..... | 44 |
| 5. LIST OF MEASURING EQUIPMENTS | 45 |
| 6. TEST LOCATION | 47 |
| 7. NVLAP CERTIFICATE OF ACCREDITATION..... | 48 |
| APPENDIX A. PHOTOGRAPHS OF EUT | A1 ~ A31 |
| APPENDIX B. TEST PHOTOS | B1 ~ B6 |
| APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE..... | C1 ~ C3 |



History of This Test Report

Original Issue Date: May 02, 2007

Report No.: FR6N2315-02

No additional attachment.

Additional attachment were issued as following record:



1. CERTIFICATE OF COMPLIANCE

Product Name : PDA Scanner
Brand Name : Unitech
Model Name : PA600BTG
Applicant : Unitech Co., Ltd.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 24, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Wayne Hsu S.I. 07
Wayne Hsu

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C | | | | |
|--|--------------|-------------------------------------|----------|-------------|
| Part | Rule Section | Description of Test | Result | Under Limit |
| 4.1 | 15.207 | AC Power Line Conducted Emissions | Complies | 28.82 dB |
| 4.2 | 15.247(b)(1) | Maximum Peak Conducted Output Power | Complies | 29.52 dB |
| 4.3 | 15.247(a)(1) | Hopping Channel Separation | Complies | - |
| 4.4 | 15.247(b)(1) | Number of Hopping Frequency | Complies | - |
| 4.5 | 15.247(a)(1) | Dwell Time | Complies | - |
| 4.6 | 15.247(d) | Radiated Emissions | Complies | 2.80 dB |
| 4.7 | 15.247(d) | Band Edge Emissions | Complies | 7.53 dB |
| 4.8 | 15.203 | Antenna Requirements | Complies | - |

| Test Items | Uncertainty | Remark |
|---|-----------------------|--------------------------|
| AC Power Line Conducted Emissions | ±2.3dB | Confidence levels of 95% |
| Maximum Peak Conducted Output Power | ±0.8dB | Confidence levels of 95% |
| Hopping Channel Separation | ±8.5×10 ⁻⁸ | Confidence levels of 95% |
| Radiated Emissions (9kHz~30MHz) | ±0.8dB | Confidence levels of 95% |
| Radiated Emissions (30MHz~1000MHz) | ±1.9dB | Confidence levels of 95% |
| Radiated / Band Edge Emissions (1GHz~18GHz) | ±1.9dB | Confidence levels of 95% |
| Radiated Emissions (18GHz~40GHz) | ±1.9dB | Confidence levels of 95% |
| Temperature | ±0.7 | Confidence levels of 95% |
| Humidity | ±3.2% | Confidence levels of 95% |
| DC / AC Power Source | ±1.4% | Confidence levels of 95% |

3. GENERAL INFORMATION

3.1. Product Details

EUT is a PDA Scanner with Bluetooth radio function. Only the radio detail of Bluetooth is shown in the table below. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

| Items | Description |
|--------------------------|--|
| Power Type | 5V DC from adapter; 3.7V DC from battery |
| Modulation | FHSS (GFSK) |
| Data Rate (Mbps) | 1 |
| Frequency Range | 2400 ~ 2483.5MHz |
| Channel Number | 79 |
| Channel Band Width (99%) | 888 kHz |
| Conducted Output Power | 0.48 dBm |

3.2. Accessories

| Power | Brand | Model | Rating |
|-------------------------------------|-------|------------|-------------------------------------|
| Adapter 1 | ENG | 3A-181WP05 | INPUT: 100-240V AC OUTPUT: 5V DC |
| Li-ion Battery | - | HNP-120 | 3.7V DC |
| Others | | | |
| Cradle / Earphone / Charging Cables | | | |

3.3. Table for Filed Antenna

| Ant. | Antenna Type | Connector | Gain (dBi) |
|------|--------------|-----------|------------|
| 1 | Chip | FIX | 3.00 |

3.4. Table for Carrier Frequencies

| Frequency Band | Channel No. | Frequency |
|----------------|-------------|-----------|
| 2400~2483.5MHz | 0 | 2402 MHz |
| | 1 | 2403 MHz |
| | : | : |
| | 38 | 2440 MHz |
| | 39 | 2441 MHz |
| | 40 | 2442 MHz |
| | : | : |
| | 77 | 2479 MHz |
| | 78 | 2480 MHz |

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items | Mode | Data Rate | Channel | Antenna |
|-------------------------------|-------------|-----------|-----------------|---------|
| AC Power Conducted Emissions | Normal Link | 1 Mbps | Hopping 0~78 | 1 |
| Max. Conducted Output Power | GFSK | 1 Mbps | 0/39/78 | NA |
| Hopping Channel Separation | GFSK | 1 Mbps | 0~1/39~40/77~78 | NA |
| Number of Hopping Frequency | GFSK | 1 Mbps | 0~78 | NA |
| Dwell Time | DH1/DH3/DH5 | 1 Mbps | 0/39/78 | NA |
| Radiated Emissions Below 1GHz | GFSK | 1 Mbps | 39 | 1 |
| Radiated Emissions Above 1GHz | GFSK | 1 Mbps | 0/39/78 | 1 |
| Band Edge Emissions | GFSK | 1 Mbps | 0/78 | 1 |

3.6. Table for Testing Locations

| Test Site No. | Site Category | Location | FCC Reg. No. | IC File No. | VCCI Reg. No |
|---------------|---------------|----------|--------------|-------------|--------------|
| 03CH03-HY | SAC | Hwa Ya | 101377 | IC 4088 | - |
| CO01-HY | Conduction | Hwa Ya | 101377 | IC 4088 | - |
| TH01-HY | OVEN Room | | - | - | - |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

For EMI test, the following modes were tested:

Mode 1. BT Link+Auto Scan+Charging+ USB

Mode 2. BT Link+Auto Scan+Charging+ USB+ Cradle

Mode 3. BT Link+Charging+USB+Cradle+I-Pod+SD play MP3

Mode 4. BT Link+Auto Scan+Single+Earphone+Charging

Conducted-Cause "mode 2" generated the worst test result, it was reported as final data.

3.7. Table for Multiple Listing

The model names in the following table are all refer to the identical product.

| Model Name | Description |
|--------------|---|
| PA600-065ADG | PA600 w/o engine, 128MB, 64MB, Com. BT, Mobile 5.0 ENG, Distributor Package, Green Product |
| PA600-965ADG | PA600 w/ laser engine, 128MB, 64MB, Com. BT, Mobile 5.0 ENG, Distributor Package, Green Product |
| PA600-055ADG | PA600 w/o engine, 128MB, 64MB, Com. BT, WinCE 5.0 ENG, Distributor Package, Green Product |
| PA600-955ADG | PA600 w/ laser engine, 128MB, 64MB, Com. BT, WinCE 5.0 ENG, Distributor Package, Green Product |

3.8. Table for Supporting Units

| Support Unit | Brand | Model | FCC ID |
|----------------------------------|---------------------|---------|--------------|
| Modem | ACEEX | DM1414 | IFAXDM1414 |
| Notebook | DELL | D400 | DOC |
| CMU | ANRITSU | MT8852A | DOC |
| Mouse (USB) | Microsoft | 1004 | R31264 |
| i-Pod | Apple | A1051 | R33057 |
| GSM Phone (Remote Worstation) | Sony Ericsson | W800i | PY7-A1022013 |
| Earphone | Provide by customer | | |

3.9. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.


Power Parameters of Bluetooth

| Test Software Version | CMU200 | | |
|-----------------------|----------|----------|----------|
| Frequency | 2402 MHz | 2441 MHz | 2480 MHz |
| Power Parameters | DEFAULT | DEFAULT | DEFAULT |

3.10. Test Configurations


3.10.1. Radiation Emissions Test Configuration

Below 1GHz

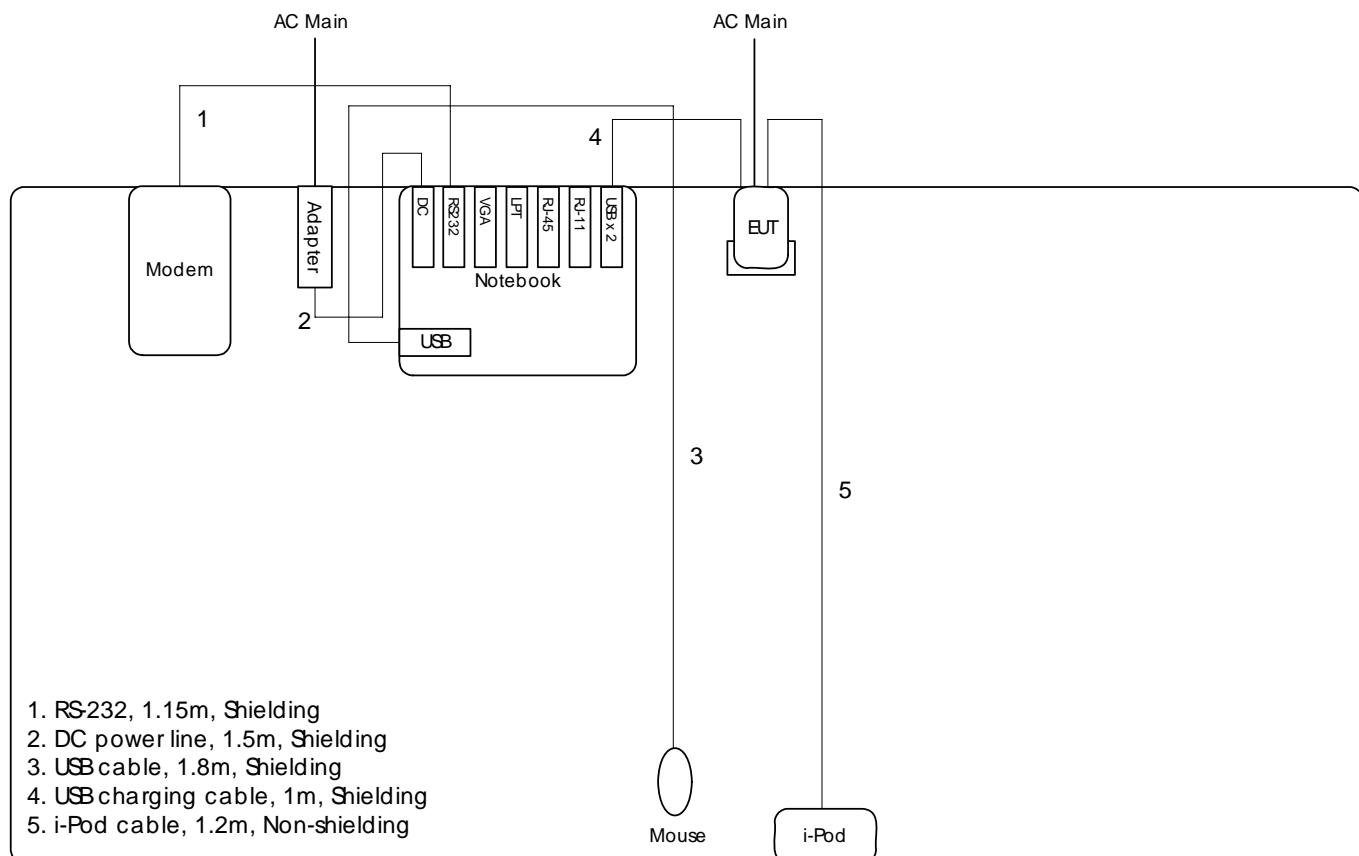




Above 1GHz

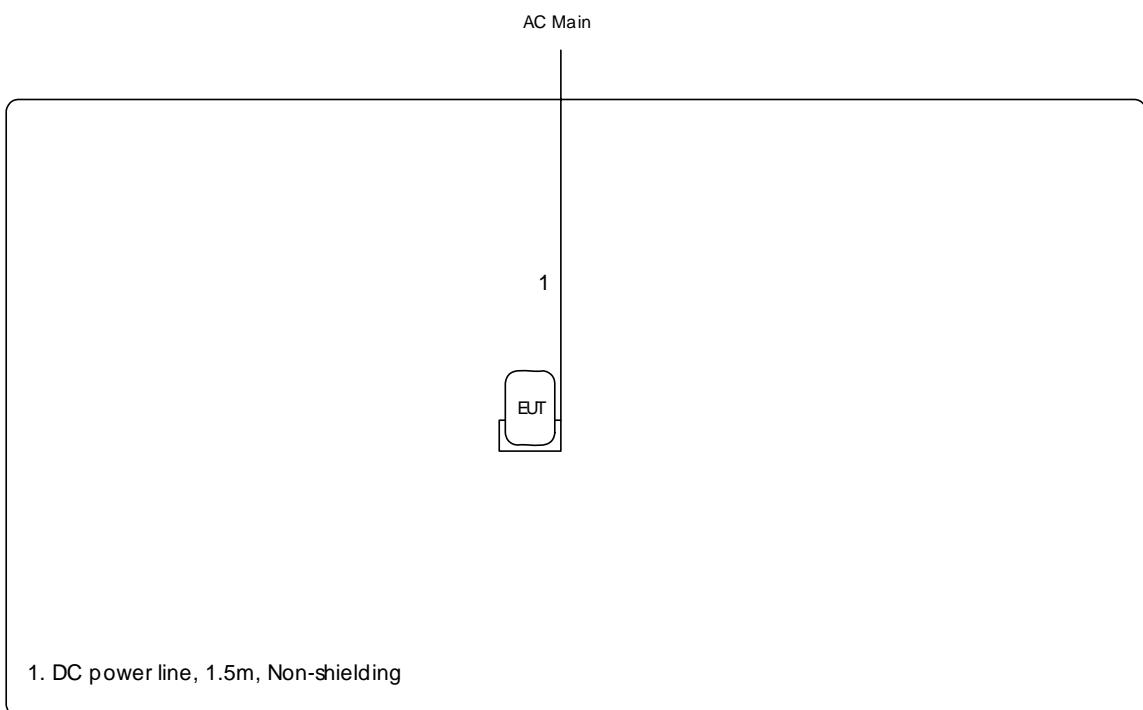

3.10.2. AC Power Line Conduction Emissions Test Configuration

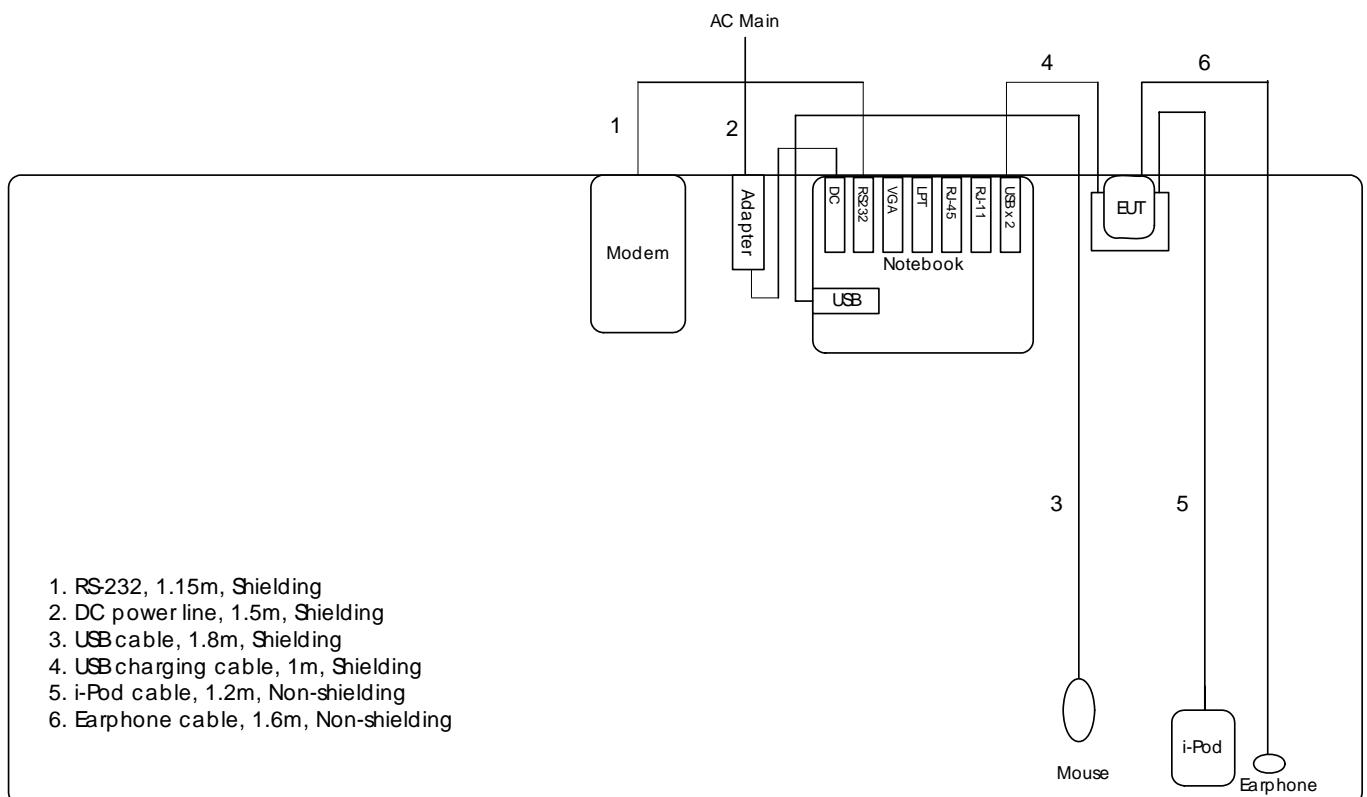

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5 | 66~56 | 56~46 |
| 0.5~5 | 56 | 46 |
| 5~30 | 60 | 50 |

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 KHz |

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

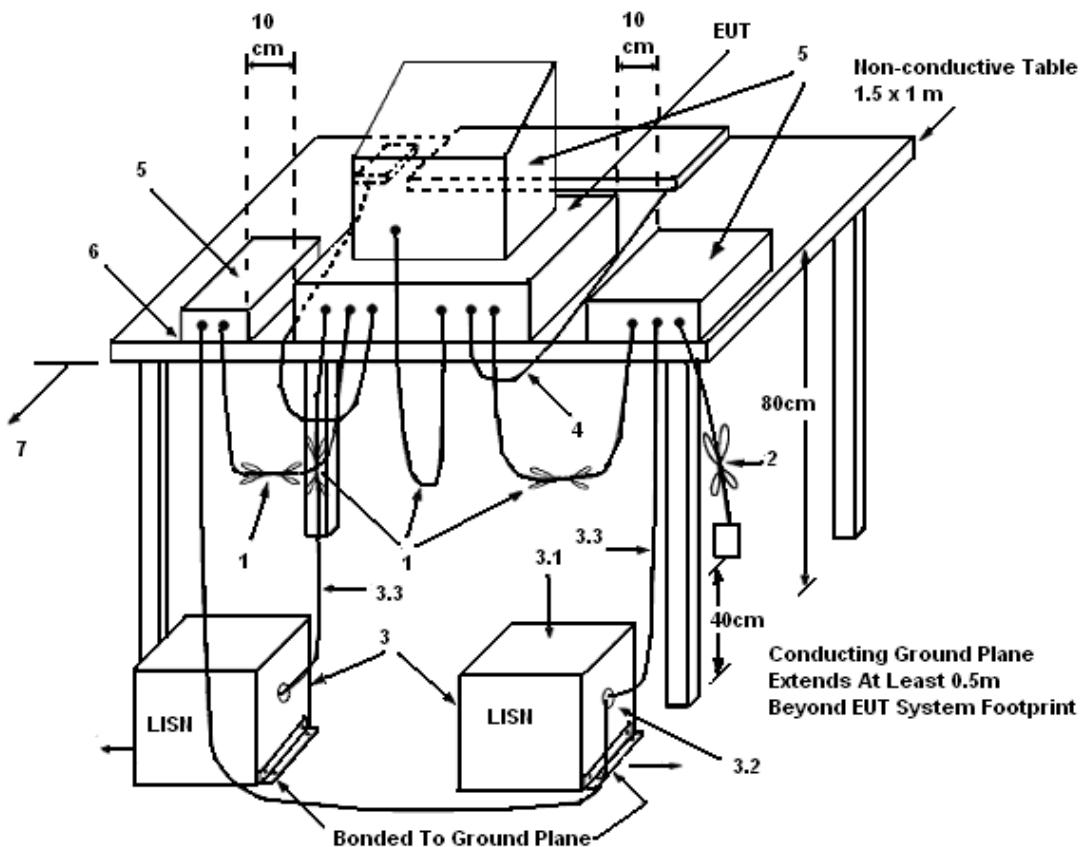

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 ohms. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

| | | | |
|---------------|--------|----------|------|
| Temperature | 26.9 | Humidity | 50% |
| Test Engineer | Eric | Phase | Line |
| Configuration | Mode 2 | | |

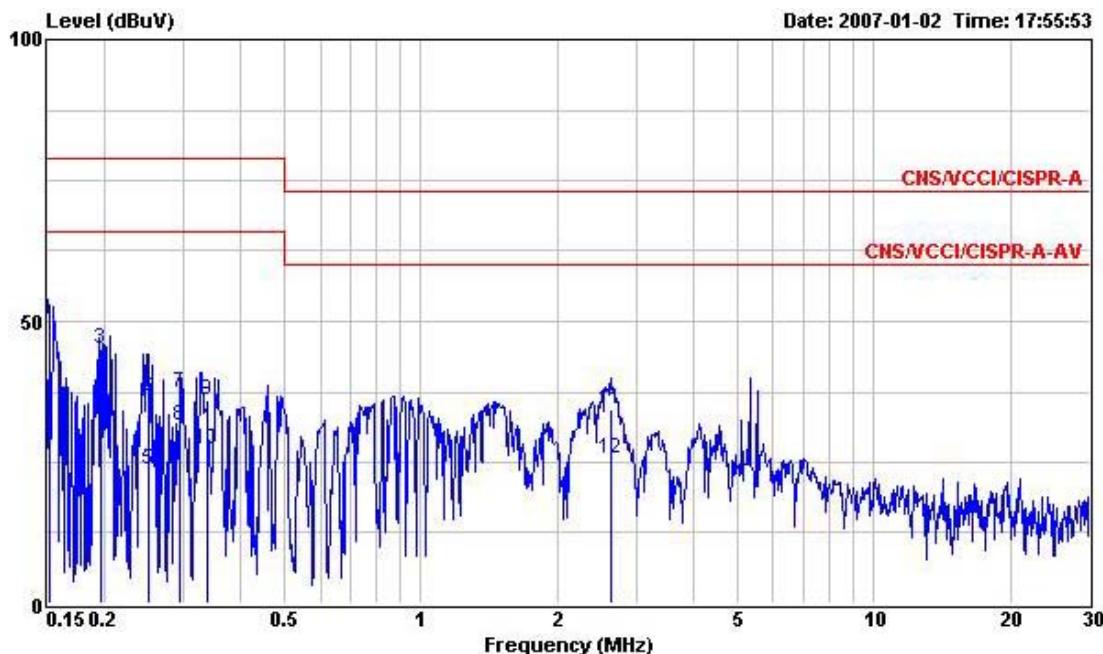

| Freq | Level | Over | Limit | Read | Probe | Cable | |
|------|-------|-------|--------|-------|--------|-------|--------------|
| | | Limit | Line | Level | Factor | Loss | |
| MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.151 | 50.18 | -28.82 | 79.00 | 50.03 | 0.10 | 0.05 QP |
| 2 | 0.151 | 31.23 | -34.77 | 66.00 | 31.08 | 0.10 | 0.05 Average |
| 3 | 0.197 | 44.99 | -34.01 | 79.00 | 44.85 | 0.10 | 0.04 QP |
| 4 | 0.197 | 32.53 | -33.47 | 66.00 | 32.39 | 0.10 | 0.04 Average |
| 5 | 0.250 | 23.68 | -42.32 | 66.00 | 23.53 | 0.10 | 0.05 Average |
| 6 | 0.250 | 36.63 | -42.37 | 79.00 | 36.48 | 0.10 | 0.05 QP |
| 7 | 0.294 | 37.36 | -41.64 | 79.00 | 37.21 | 0.10 | 0.05 QP |
| 8 | 0.294 | 31.47 | -34.53 | 66.00 | 31.32 | 0.10 | 0.05 Average |
| 9 | 0.338 | 36.06 | -42.94 | 79.00 | 35.90 | 0.10 | 0.06 QP |
| 10 | 0.338 | 27.34 | -38.66 | 66.00 | 27.18 | 0.10 | 0.06 Average |
| 11 | 2.620 | 34.49 | -38.51 | 73.00 | 34.28 | 0.14 | 0.07 QP |
| 12 | 2.620 | 25.51 | -34.49 | 60.00 | 25.30 | 0.14 | 0.07 Average |

| | | | |
|----------------------|--------|-----------------|---------|
| Temperature | 26.9 | Humidity | 50% |
| Test Engineer | Eric | Phase | Neutral |
| Configuration | Mode 2 | | |

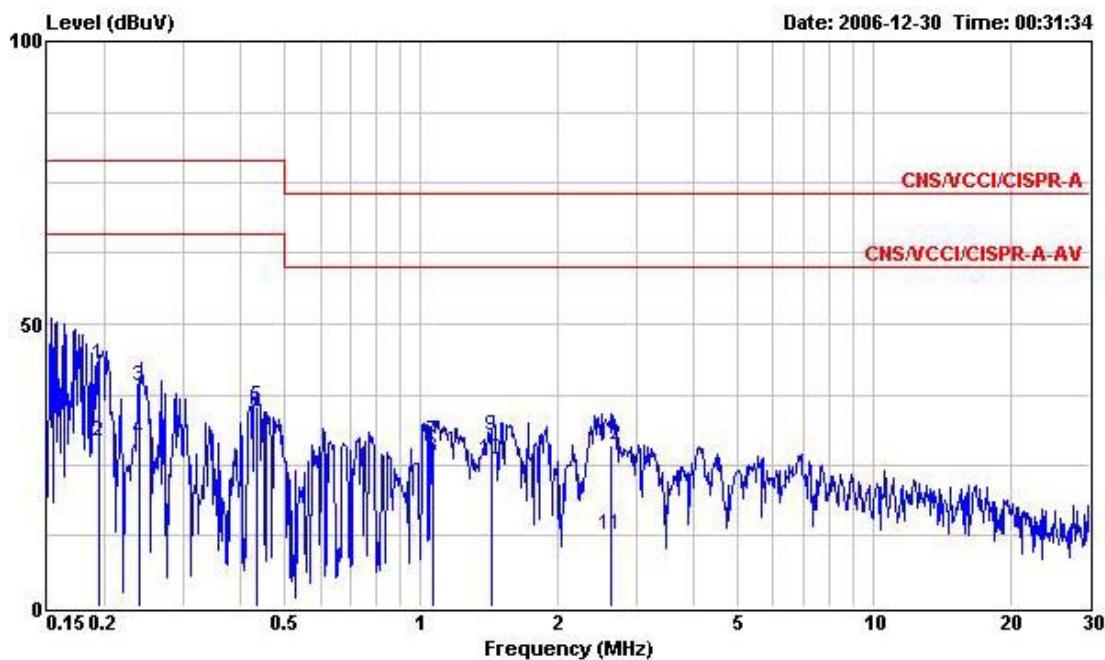

| Freq | Level | Over | Limit | Read | Probe | Cable |
|------|-------|-------|--------|-------|--------|-------|
| | | Line | dBuV | Level | Factor | Loss |
| MHz | dBuV | dB | dBuV | dBuV | dB | dB |
| 1 | 0.194 | 42.95 | -36.05 | 79.00 | 42.81 | 0.10 |
| 2 | 0.194 | 29.12 | -36.88 | 66.00 | 28.98 | 0.10 |
| 3 | 0.240 | 38.90 | -40.10 | 79.00 | 38.75 | 0.10 |
| 4 | 0.240 | 29.39 | -36.61 | 66.00 | 29.24 | 0.10 |
| 5 | 0.433 | 35.44 | -43.56 | 79.00 | 35.28 | 0.10 |
| 6 | 0.433 | 34.30 | -31.70 | 66.00 | 34.14 | 0.10 |
| 7 | 1.059 | 29.37 | -43.63 | 73.00 | 29.17 | 0.10 |
| 8 | 1.059 | 26.31 | -33.69 | 60.00 | 26.11 | 0.10 |
| 9 | 1.440 | 30.13 | -42.87 | 73.00 | 29.94 | 0.10 |
| 10 | 1.440 | 25.84 | -34.16 | 60.00 | 25.65 | 0.10 |
| 11 | 2.620 | 12.61 | -47.39 | 60.00 | 12.44 | 0.10 |
| 12 | 2.620 | 28.63 | -44.37 | 73.00 | 28.46 | 0.10 |

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Peak Output Power Measurement

4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

| Power Meter Parameter | Setting |
|-----------------------|--------------------|
| Filter No. | Auto |
| Measurement time | 0.135 s ~ 26 s |
| Used Peak Sensor | NRV-Z32 (model 04) |

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

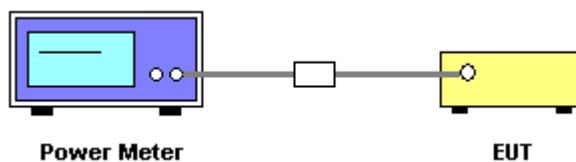

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



4.2.7. Test Result of Maximum Peak Output Power

| | | | |
|---------------|-----|----------------|------|
| Temperature | 28 | Humidity | 58% |
| Test Engineer | Sam | Configurations | GFSK |

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|----------|
| 0 | 2402 MHz | -0.34 | 30.00 | Complies |
| 39 | 2441 MHz | -0.17 | 30.00 | Complies |
| 78 | 2480 MHz | 0.48 | 30.00 | Complies |

4.3. Hopping Channel Separation Measurement

4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

| Spectrum Parameter | Setting |
|--------------------|---|
| Attenuation | Auto |
| Span Frequency | > Measurement Bandwidth or Channel Separation |
| RB | 30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation) |
| VB | 100 kHz (20dB Bandwidth) / 300 kHz (Channel Separation) |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

4.3.4. Test Setup Layout

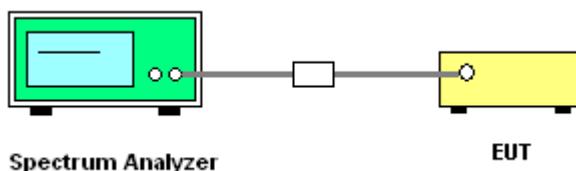

4.3.5. Test Deviation

There is no deviation with the original standard.



4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.3.7. Test Result of Hopping Channel Separation

| | | | |
|---------------|-----|----------------|------|
| Temperature | 28 | Humidity | 58% |
| Test Engineer | Sam | Configurations | GFSK |

| Frequency | Ch. Separation (MHz) | 20dB Bandwidth (kHz) | 99% Occupied Bandwidth (kHz) | Result |
|-----------|----------------------|----------------------|------------------------------|----------|
| 2402 MHz | 1.00 | 956.00 | 888.00 | Complies |
| 2441 MHz | 1.00 | 956.00 | 888.00 | Complies |
| 2480 MHz | 1.00 | 924.00 | 888.00 | Complies |


Ch. Separation Limits: >20dB bandwidth

20 dB Bandwidth Plot on Channel 0 / 2402 MHz

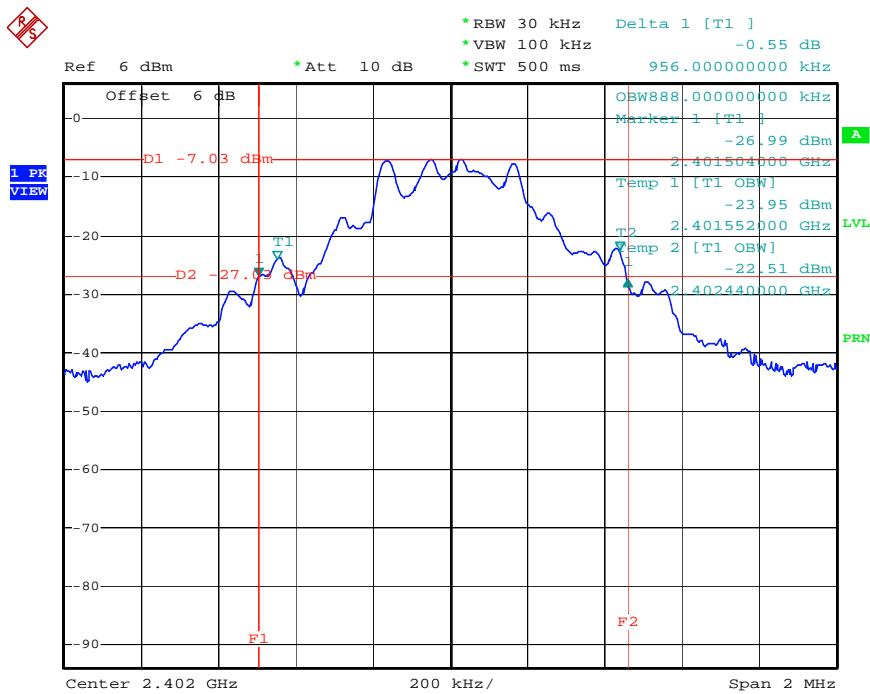


Date: 28.NOV.2006 09:53:09


20 dB Bandwidth Plot on Channel 39 / 2441 MHz

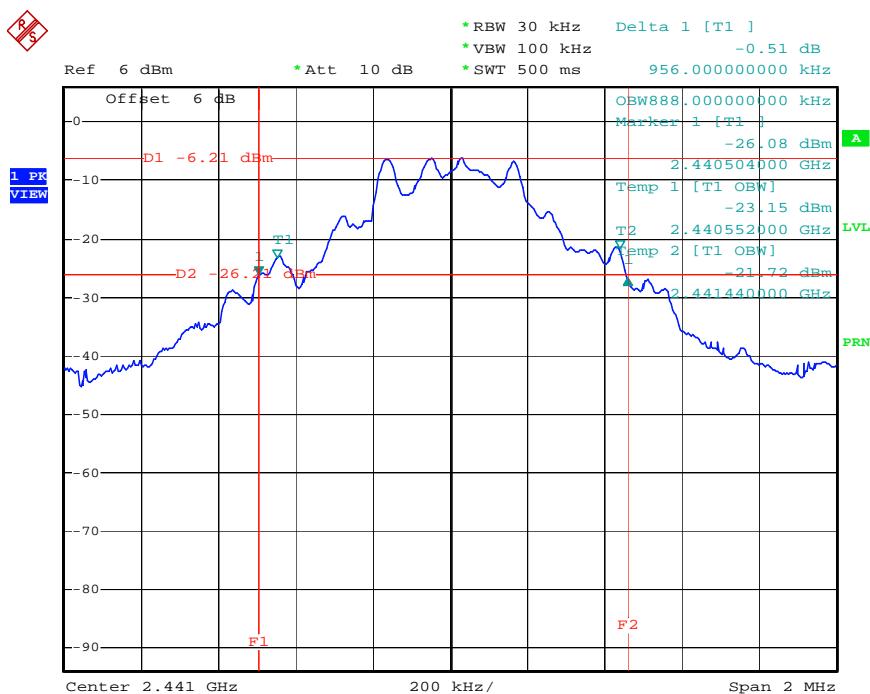

Date: 28.NOV.2006 10:14:37

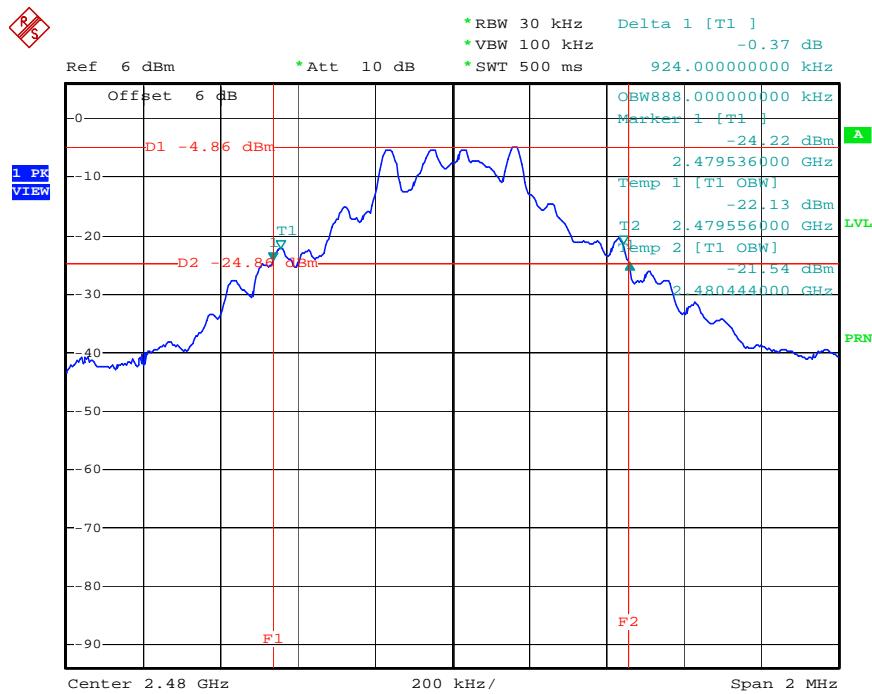
20 dB Bandwidth Plot on Channel 78 / 2480 MHz


Date: 28.NOV.2006 10:10:52

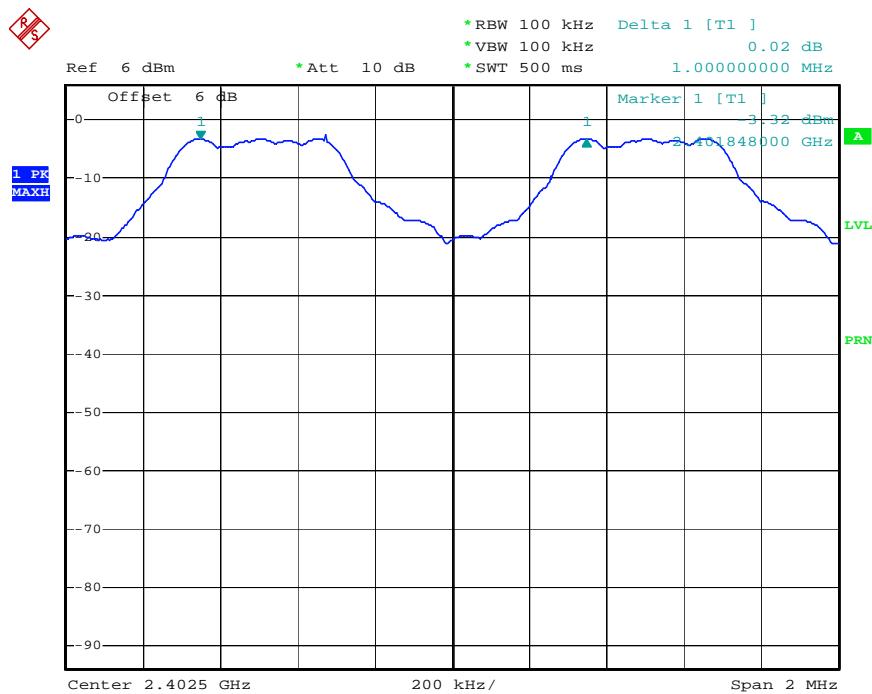Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz


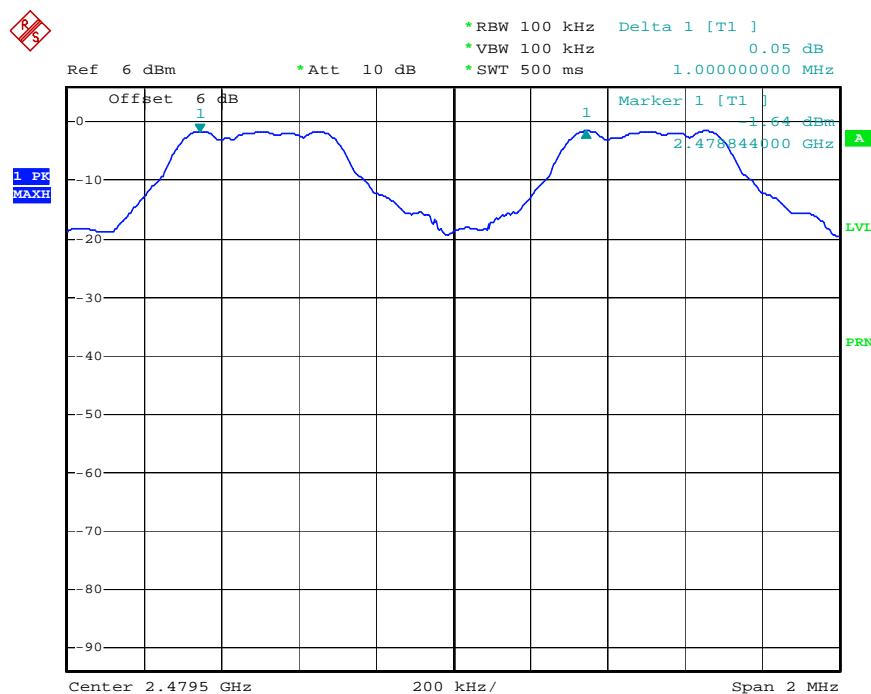
Date: 28.NOV.2006 10:07:04

Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz

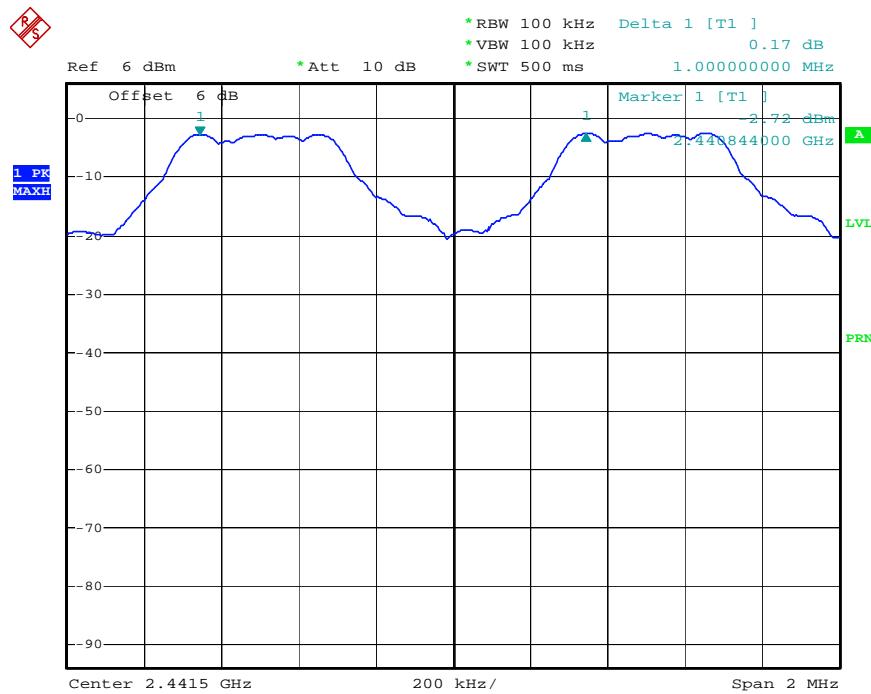

Date: 28.NOV.2006 10:08:05

Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz



Date: 28.NOV.2006 10:09:18

4.4. Number of Hopping Frequency Measurement

4.4.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

| Spectrum Parameters | Setting |
|---------------------|-----------------------------|
| Attenuation | Auto |
| Span Frequency | > Operating Frequency Range |
| RB | 100 kHz |
| VB | 100 kHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

4.4.4. Test Setup Layout

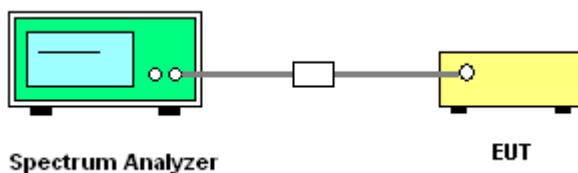

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Number of Hopping Frequency

| | | | |
|---------------|-----|----------------|------|
| Temperature | 28 | Humidity | 58% |
| Test Engineer | Sam | Configurations | GFSK |

| Modulation Type | Channel No. | Frequency (MHz) | Hopping Ch. (Channels) | Min. Limit (Channels) | Test Result |
|-----------------|-------------|-----------------|------------------------|-----------------------|-------------|
| GFSK | 0 ~ 78 | 2402 ~ 2480 | 79 | 75 | Complies |

Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

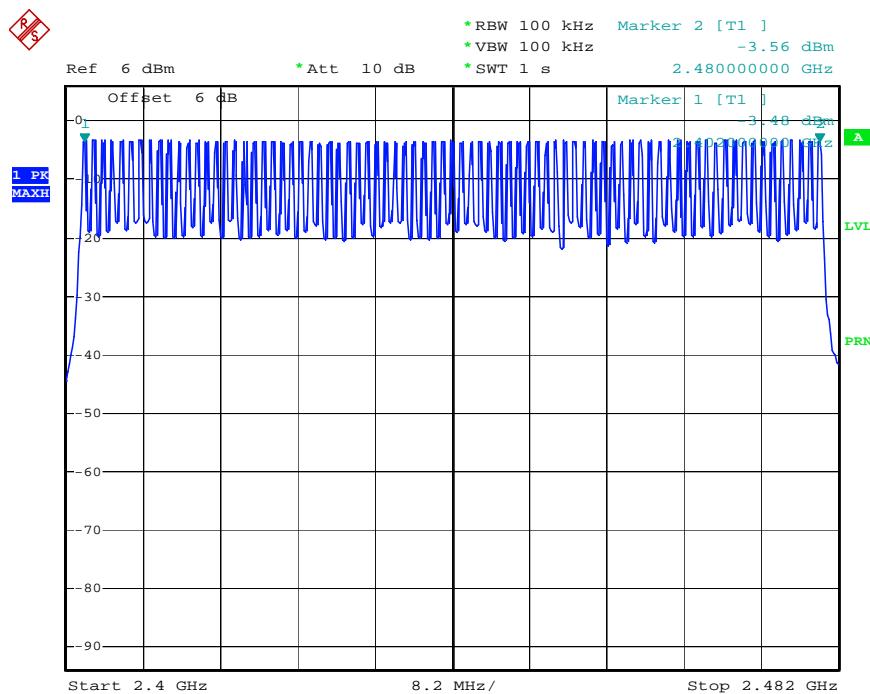

Date: 28.NOV.2006 09:44:27

4.5. Dwell Time Measurement

4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

| Spectrum Parameter | Setting |
|--------------------|----------------|
| Attenuation | Auto |
| Span Frequency | 0 MHz |
| RB | 1000 kHz |
| VB | 1000 kHz |
| Detector | Peak |
| Trace | Single Trigger |

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for DH5, DH3 and DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.
9. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
10. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
11. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.

4.5.4. Test Setup Layout

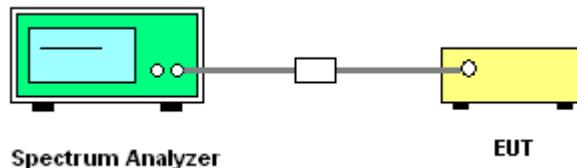

4.5.5. Test Deviation

There is no deviation with the original standard.


4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.5.7. Test Result of Dwell Time

| | | | |
|---------------|-----|----------------|---------------|
| Temperature | 28 | Humidity | 58% |
| Test Engineer | Sam | Configurations | DH1, DH3, DH5 |


| Data Packet | Frequency | Pulse Duration (ms) | Dwell Time (s) | Limits (s) | Test Result |
|-------------|-----------|---------------------|----------------|------------|-------------|
| DH5 | 2402 MHz | 3.0400 | 0.3243 | 0.4000 | Complies |
| DH3 | 2402 MHz | 1.7800 | 0.2848 | 0.4000 | Complies |
| DH1 | 2402 MHz | 0.5200 | 0.1664 | 0.4000 | Complies |
| DH5 | 2441 MHz | 3.0400 | 0.3243 | 0.4000 | Complies |
| DH3 | 2441 MHz | 1.7800 | 0.2848 | 0.4000 | Complies |
| DH1 | 2441 MHz | 0.5200 | 0.1664 | 0.4000 | Complies |
| DH5 | 2480 MHz | 3.0400 | 0.3243 | 0.4000 | Complies |
| DH3 | 2480 MHz | 1.7800 | 0.2848 | 0.4000 | Complies |
| DH1 | 2480 MHz | 0.5200 | 0.1664 | 0.4000 | Complies |

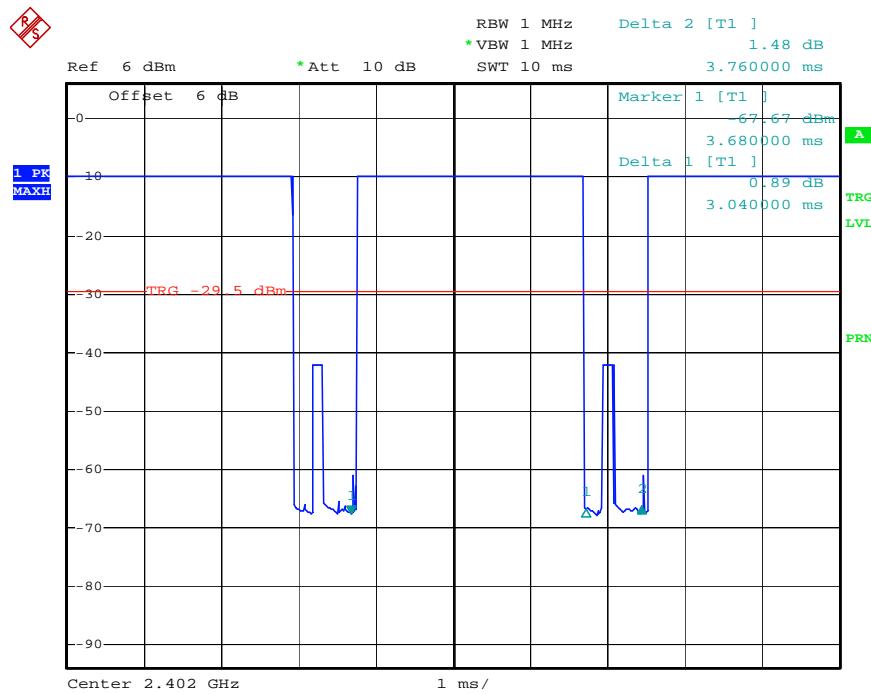DH5 Dwell Time Plot on Channel 0 / 2402 MHz


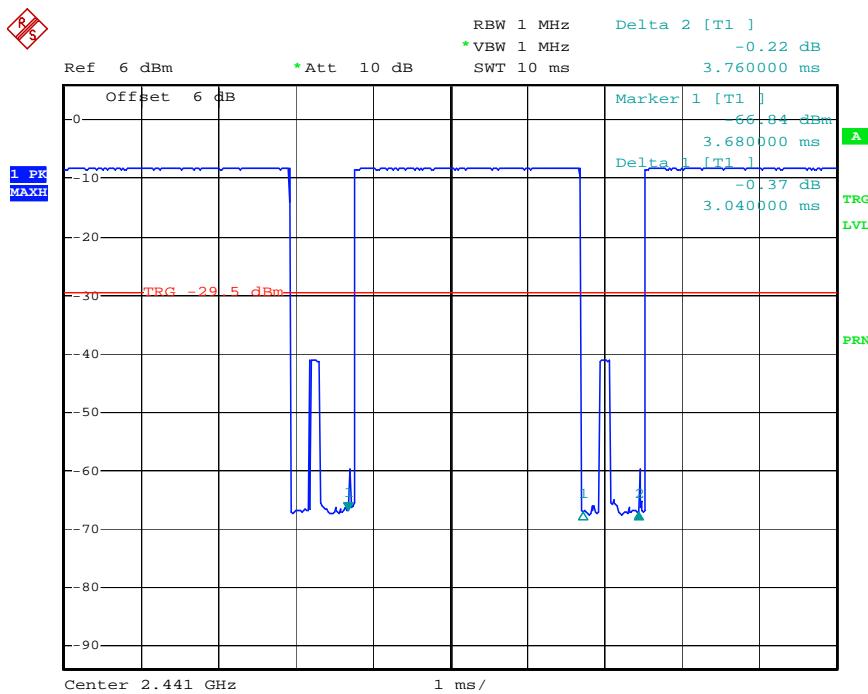
Date: 28.NOV.2006 10:31:08

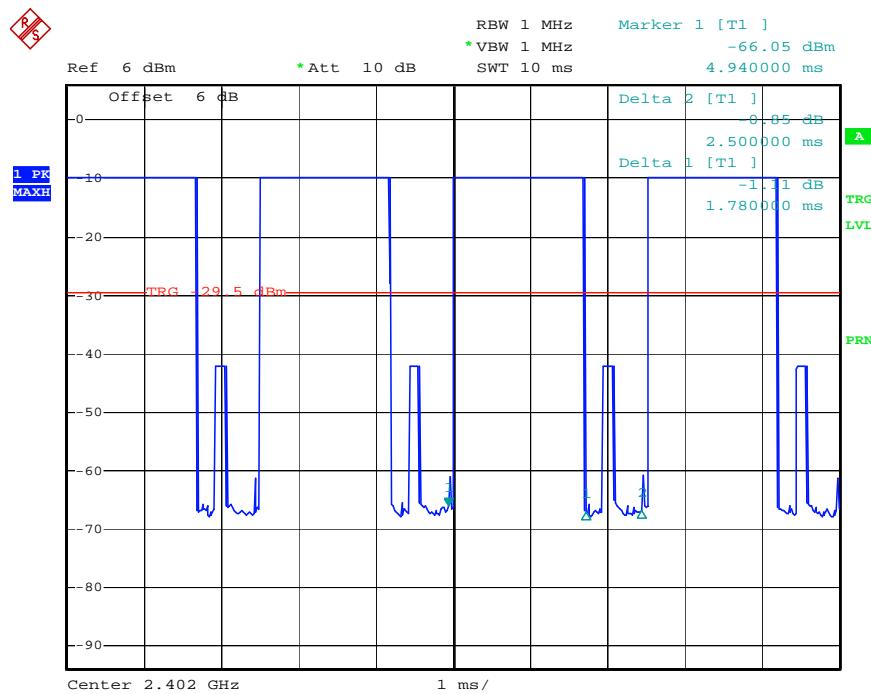DH3 Dwell Time Plot on Channel 0 / 2402 MHz


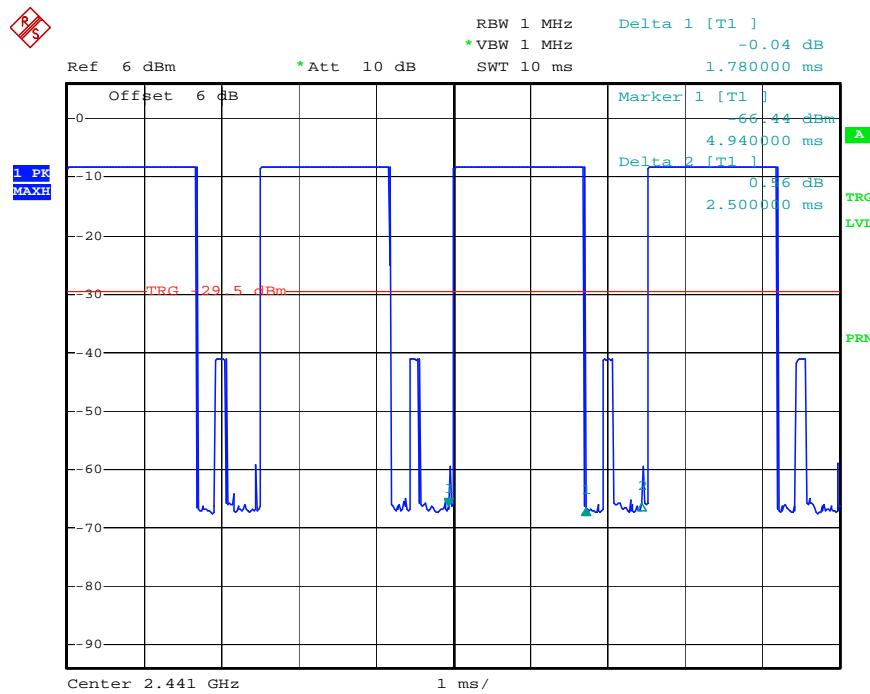
Date: 28.NOV.2006 10:35:04

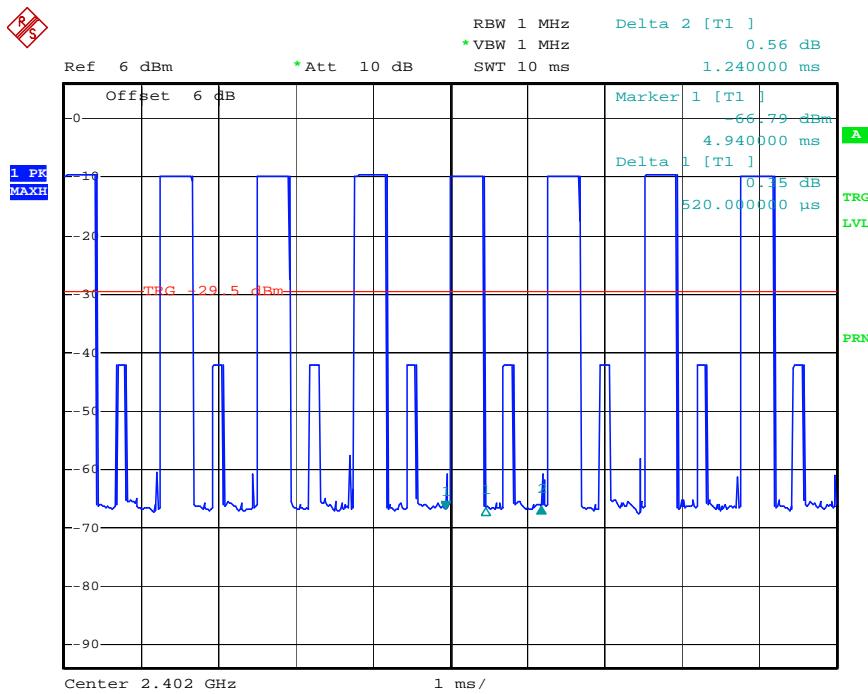DH1 Dwell Time Plot on Channel 0 / 2402 MHz


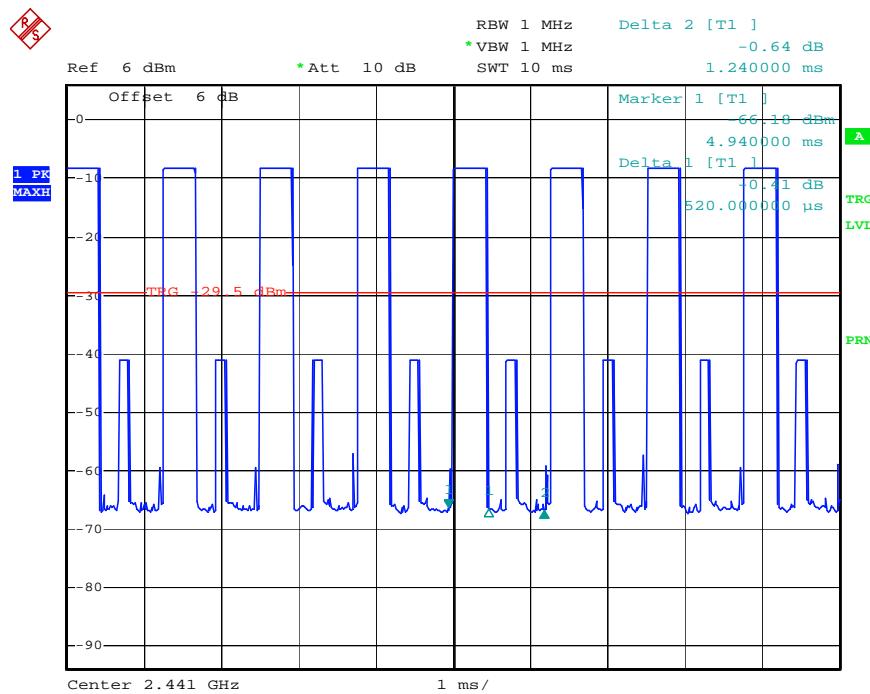
Date: 28.NOV.2006 10:38:52

DH5 Dwell Time Plot on Channel 39 / 2441 MHz


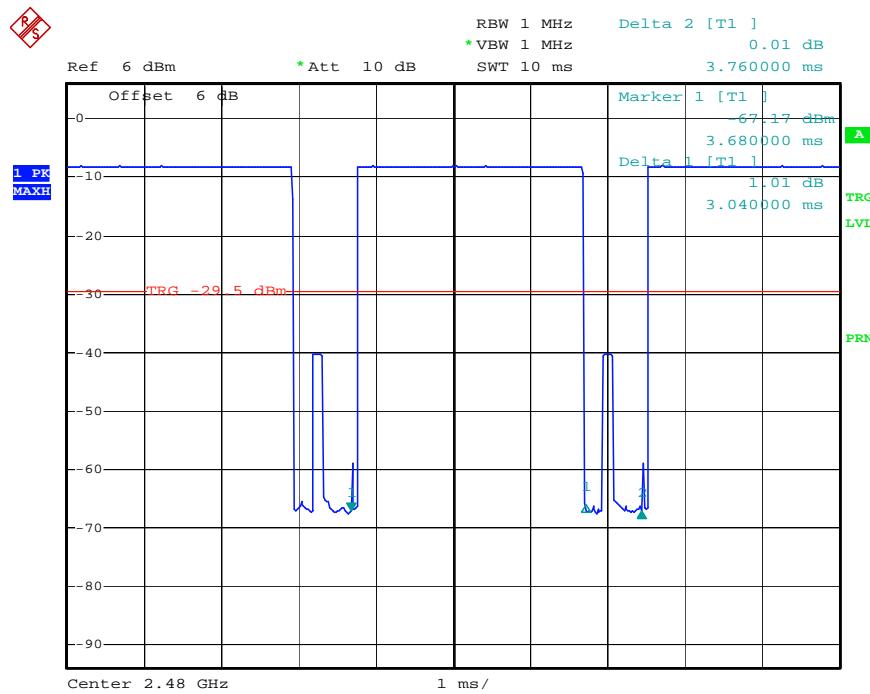
Date: 28.NOV.2006 10:30:40

DH3 Dwell Time Plot on Channel 39 / 2441 MHz


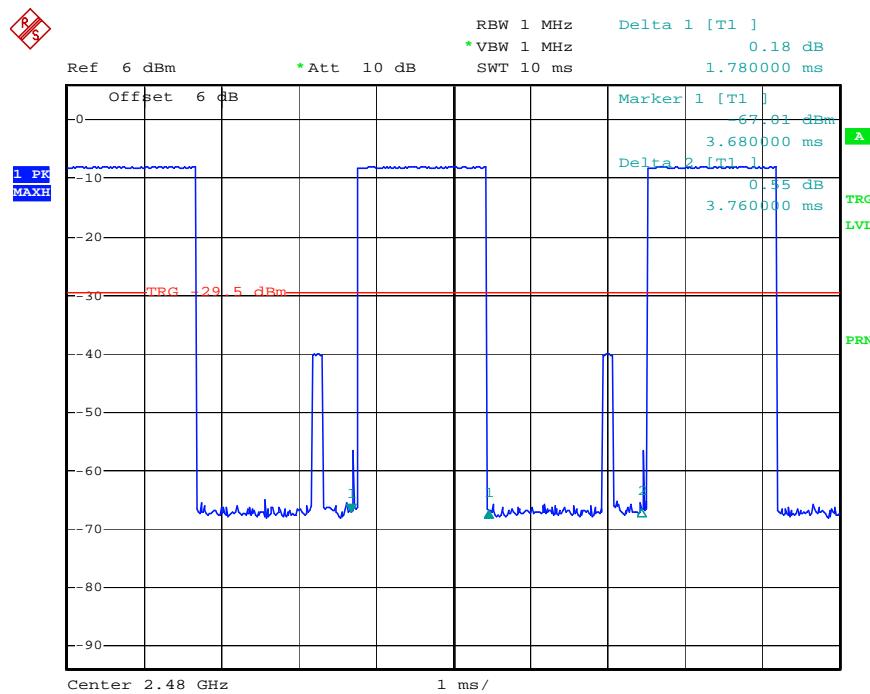
Date: 28.NOV.2006 10:30:01

DH1 Dwell Time Plot on Channel 39 / 2441 MHz


Date: 28.NOV.2006 10:28:57


DH5 Dwell Time Plot on Channel 78 / 2480 MHz


Date: 28.NOV.2006 10:31:50

DH3 Dwell Time Plot on Channel 78 / 2480 MHz


Date: 28.NOV.2006 10:34:01

DH1 Dwell Time Plot on Channel 78 / 2480 MHz

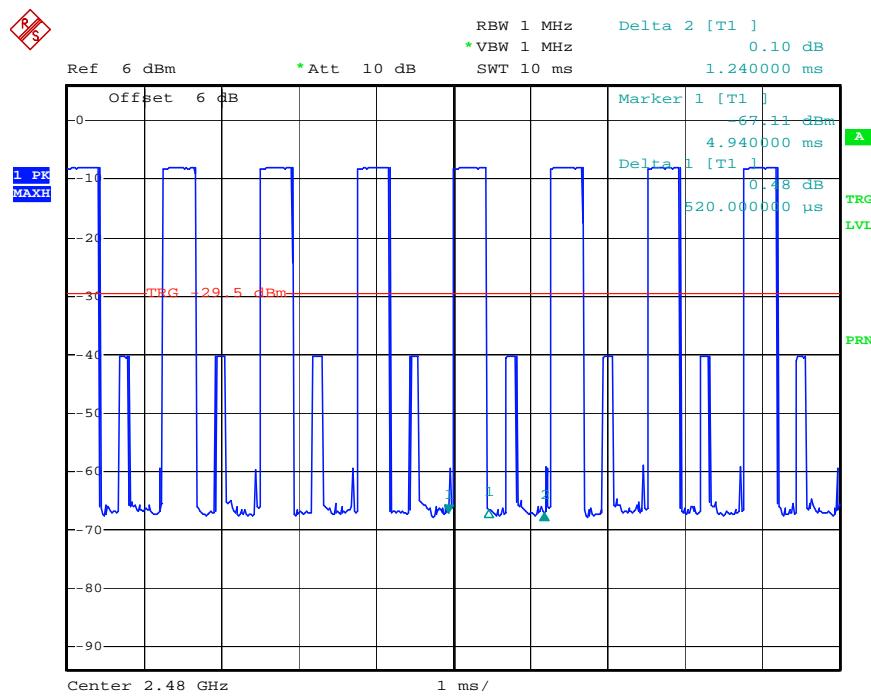

Date: 28.NOV.2006 10:39:14

4.6. Radiated Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|----------------------|-------------------------------------|----------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1000KHz / 1000KHz for peak |


| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 30MHz

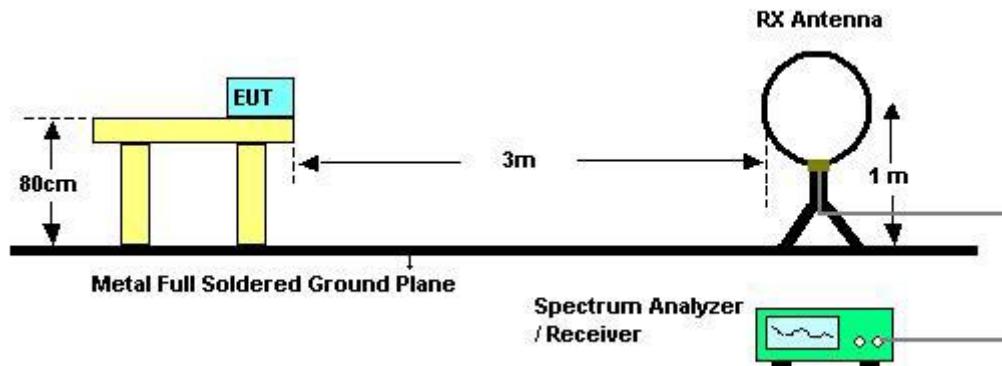

For radiated emissions above 30MHz

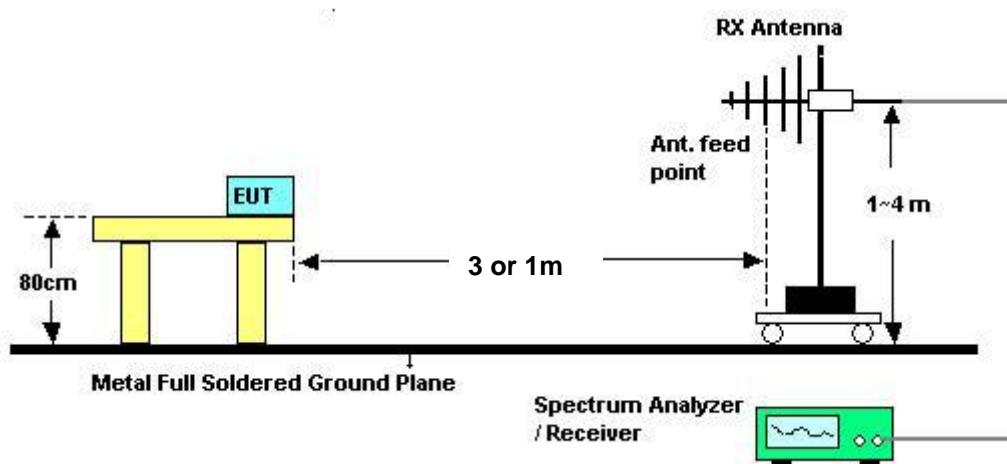

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



4.6.7. Results of Radiated Emissions (9kHz~30MHz)

| | | | |
|---------------|-----|----------|-----|
| Temperature | 26 | Humidity | 55% |
| Test Engineer | Vic | | |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Limit Line (dBuV) | Remark |
|----------------|-----------------|--------------------|----------------------|----------|
| - | - | - | - | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.6.8. Results of Radiated Emissions (30MHz~1GHz)

| | | | |
|---------------|-----|----------------|------------|
| Temperature | 26 | Humidity | 55% |
| Test Engineer | Vic | Configurations | Channel 39 |

Horizontal

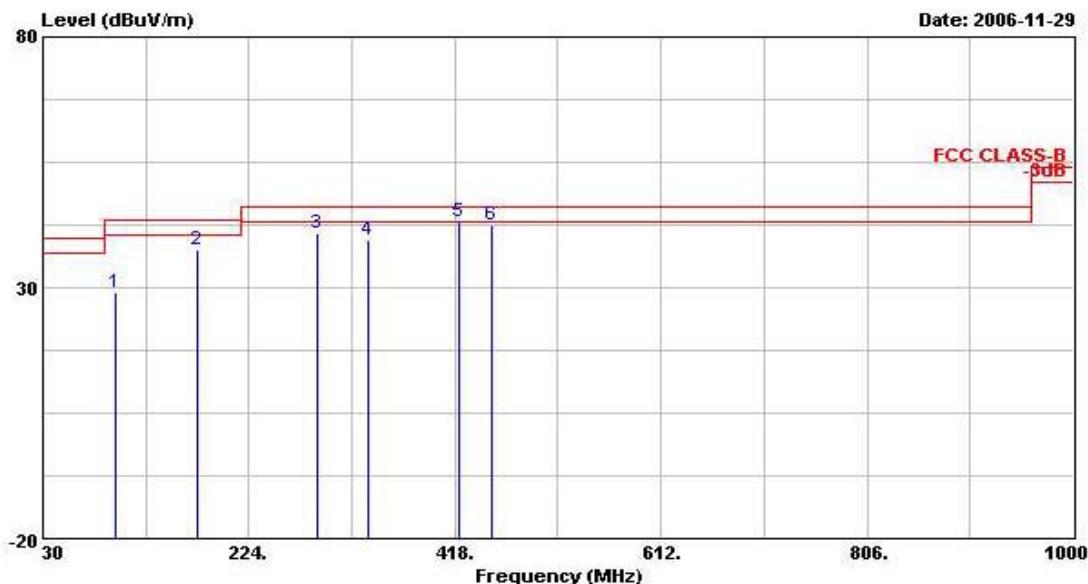

| Freq | Level | Over Limit | | Read | Antenna | Cable Preamp | | Remark |
|------|---------|------------|--------|-------|---------|--------------|------|------------|
| | | Line | dBuV/m | | | dBuV | dB/m | |
| | | MHz | dBuV/m | dB | | | dB | |
| 1 | 97.900 | 29.14 | -14.36 | 43.50 | 44.81 | 10.86 | 1.32 | 27.85 Peak |
| 2 | 175.500 | 37.65 | -5.85 | 43.50 | 54.10 | 9.38 | 2.19 | 28.02 Peak |
| 3 | 288.020 | 41.01 | -4.99 | 46.00 | 53.47 | 13.37 | 2.71 | 28.54 Peak |
| 4 | 335.550 | 39.43 | -6.57 | 46.00 | 50.28 | 14.67 | 3.27 | 28.79 Peak |
| 5 @ | 420.910 | 43.20 | -2.80 | 46.00 | 51.36 | 17.26 | 3.51 | 28.94 QP |
| 6 | 451.950 | 42.41 | -3.59 | 46.00 | 50.90 | 17.15 | 3.67 | 29.30 Peak |

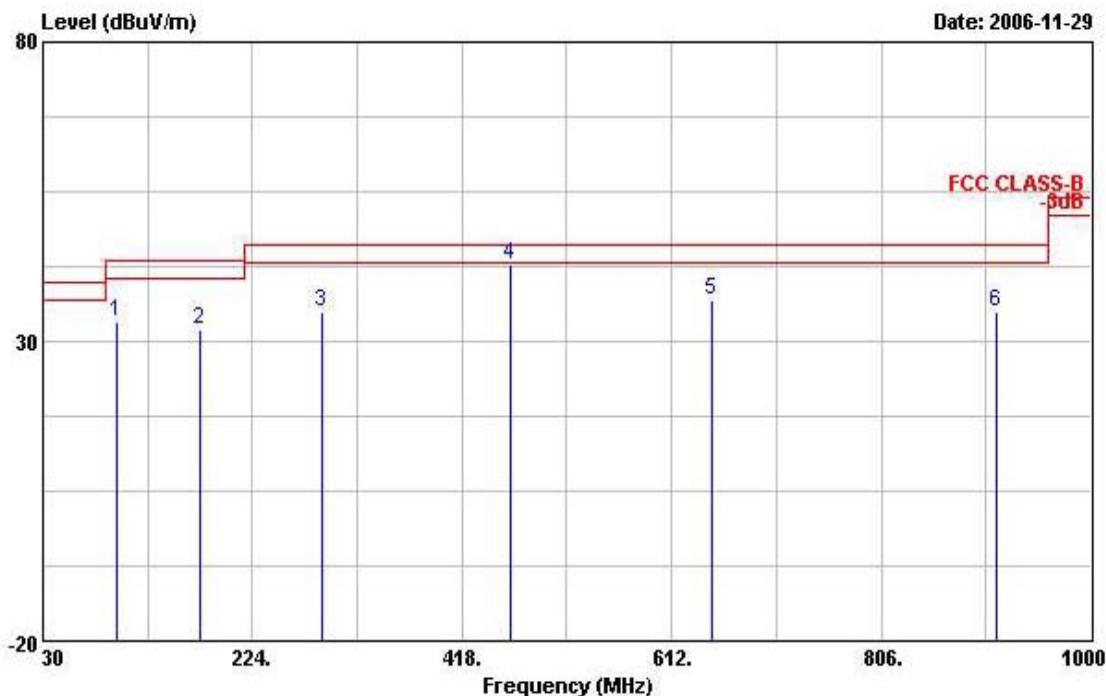Vertical


| Freq | Level | Over | Limit | Read | Antenna | Cable | Preamp |
|------|---------|-------|--------|-------|---------|-------|-----------------|
| | | Line | Limit | Level | Factor | Loss | Factor |
| MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB |
| 1 | 97.900 | 33.37 | -10.13 | 43.50 | 49.04 | 10.86 | 1.32 27.85 Peak |
| 2 | 175.500 | 31.94 | -11.56 | 43.50 | 48.39 | 9.38 | 2.19 28.02 Peak |
| 3 | 288.020 | 34.91 | -11.09 | 46.00 | 47.37 | 13.37 | 2.71 28.54 Peak |
| 4 | 462.620 | 42.96 | -3.04 | 46.00 | 51.33 | 17.37 | 3.72 29.46 Peak |
| 5 | 648.860 | 37.05 | -8.95 | 46.00 | 42.99 | 19.62 | 4.51 30.07 Peak |
| 6 | 912.700 | 34.81 | -11.19 | 46.00 | 38.29 | 21.11 | 5.35 29.94 Peak |

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


4.6.9. Results for Radiated Emissions (1GHz~10th Harmonic)

| | | | |
|---------------|-----|----------------|-----------|
| Temperature | 26 | Humidity | 55% |
| Test Engineer | Vic | Configurations | Channel 0 |

Horizontal

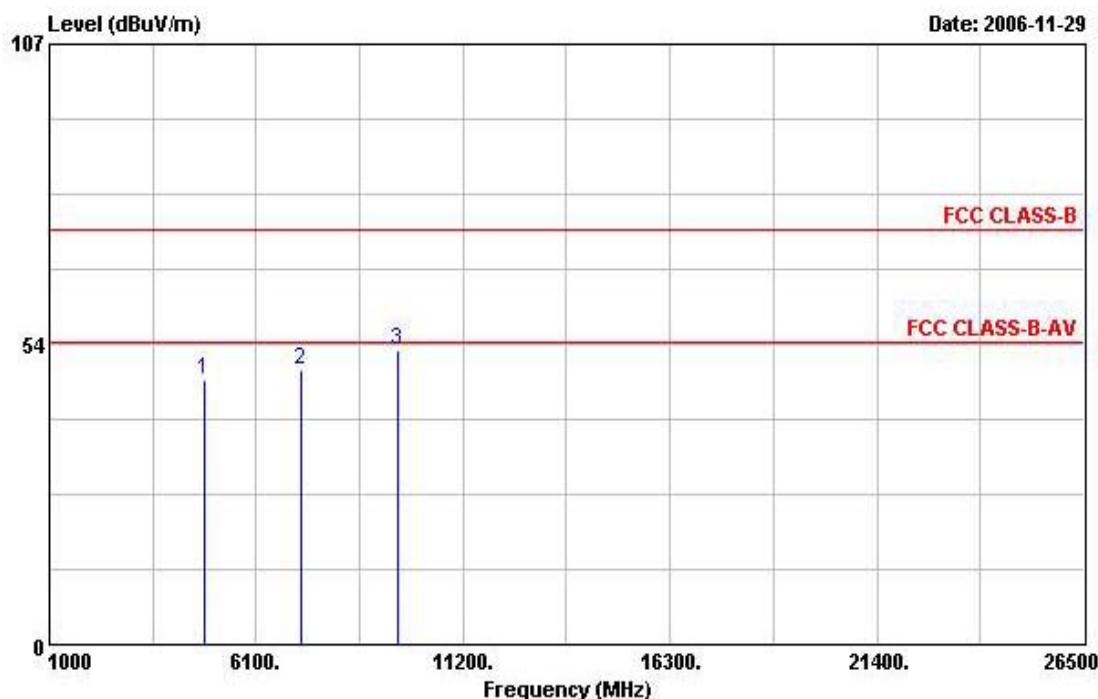


| Freq | Level | Over | Limit | Read | Antenna | Cable | Preamp | Remark |
|------|----------|-------|--------|-------|---------|--------|--------|------------|
| | | Line | Limit | Line | Level | Factor | Loss | |
| MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | |
| 1 | 4804.000 | 47.07 | -26.93 | 74.00 | 43.20 | 33.06 | 3.15 | 32.34 PEAK |
| 2 | 7202.000 | 48.90 | -25.10 | 74.00 | 41.41 | 35.90 | 4.14 | 32.54 PEAK |
| 3 | 9604.000 | 52.36 | -21.64 | 74.00 | 42.27 | 38.49 | 4.40 | 32.80 PEAK |

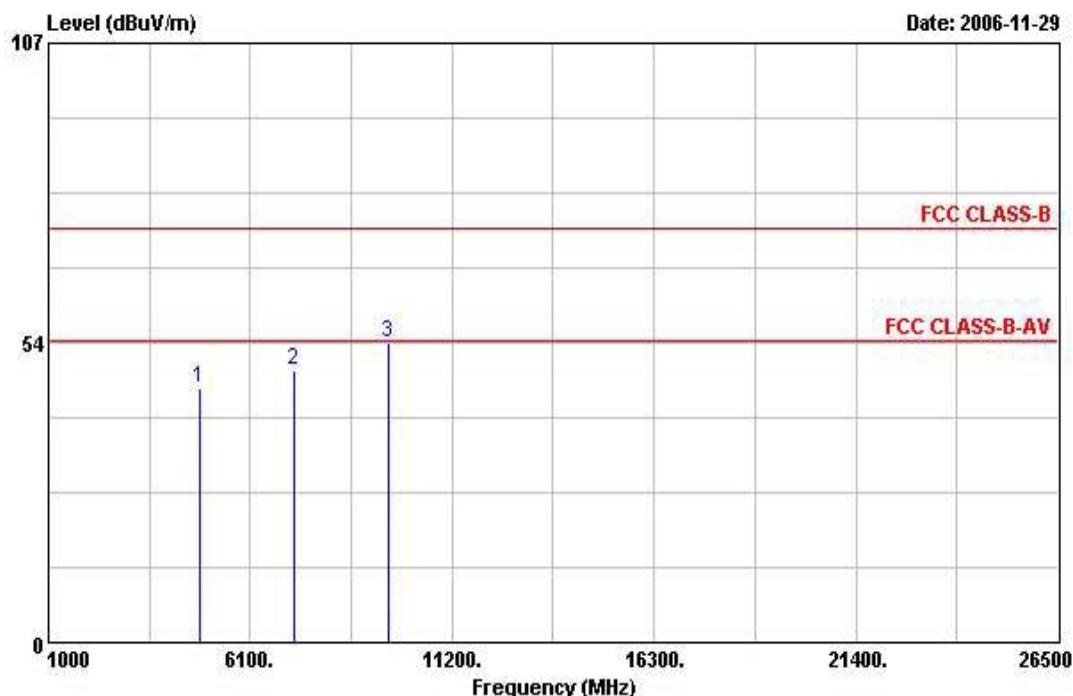**Vertical**


| Freq | Level | Over Limit | | ReadAntenna | | Cable Preamp | | Remark |
|------|-------|------------|--------|-------------|--------|--------------|-------|-----------------|
| | | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | |
| 1 | | 4804.000 | 45.43 | -28.57 | 74.00 | 41.55 | 33.06 | 3.15 32.34 PEAK |
| 2 | | 7206.000 | 48.51 | -25.49 | 74.00 | 41.02 | 35.90 | 4.14 32.54 PEAK |
| 3 | | 9608.000 | 53.53 | -20.47 | 74.00 | 43.44 | 38.49 | 4.40 32.80 PEAK |



| | | | |
|---------------|-----|----------------|------------|
| Temperature | 26 | Humidity | 55% |
| Test Engineer | Vic | Configurations | Channel 39 |

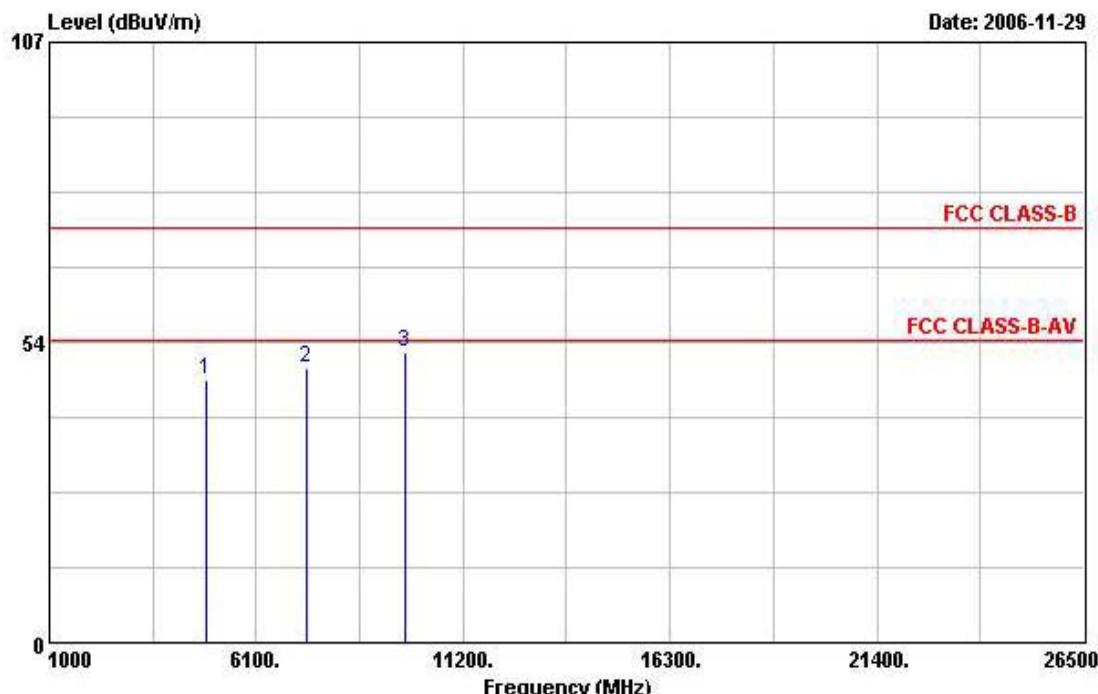
Horizontal

| Freq | Level | Over Limit | | Read | Antenna | Cable | Preamp | Remark |
|------|----------|------------|--------|-------|---------|-------|--------|------------|
| | | Line | Limit | | | | | |
| MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | |
| 1 | 4882.000 | 46.94 | -27.06 | 74.00 | 42.89 | 33.18 | 3.17 | 32.30 PEAK |
| 2 | 7319.000 | 48.91 | -25.09 | 74.00 | 41.14 | 36.19 | 4.18 | 32.61 PEAK |
| 3 | 9764.000 | 51.67 | -22.33 | 74.00 | 41.21 | 38.80 | 4.46 | 32.79 PEAK |

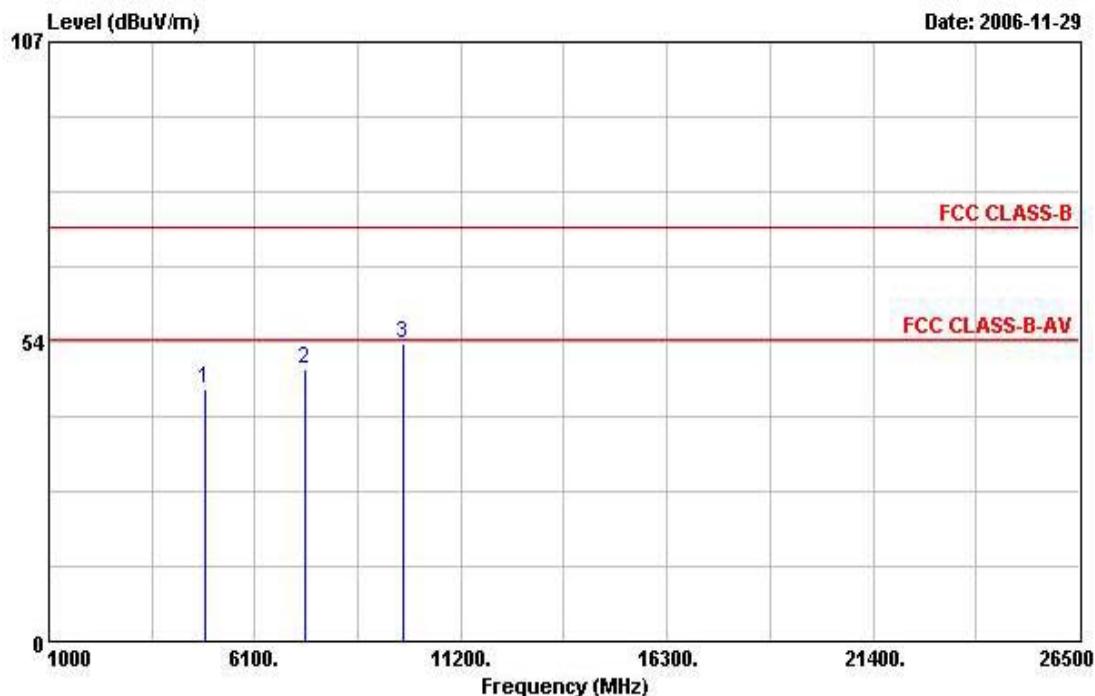
Vertical


| Freq | Level | Over | Limit | Read | Antenna | Cable | Preamp | Remark |
|------|----------|-------|--------|-------|---------|-------|--------|------------|
| | | Limit | Line | Level | Factor | dB | dB | |
| MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | |
| 1 | 4882.000 | 44.95 | -29.05 | 74.00 | 40.89 | 33.18 | 3.17 | 32.30 PEAK |
| 2 | 7323.000 | 48.61 | -25.39 | 74.00 | 40.84 | 36.19 | 4.18 | 32.61 PEAK |
| 3 | 9760.000 | 53.16 | -20.84 | 74.00 | 42.74 | 38.77 | 4.46 | 32.79 PEAK |

| | | | |
|----------------------|-----|-----------------------|------------|
| Temperature | 26 | Humidity | 55% |
| Test Engineer | Vic | Configurations | Channel 78 |

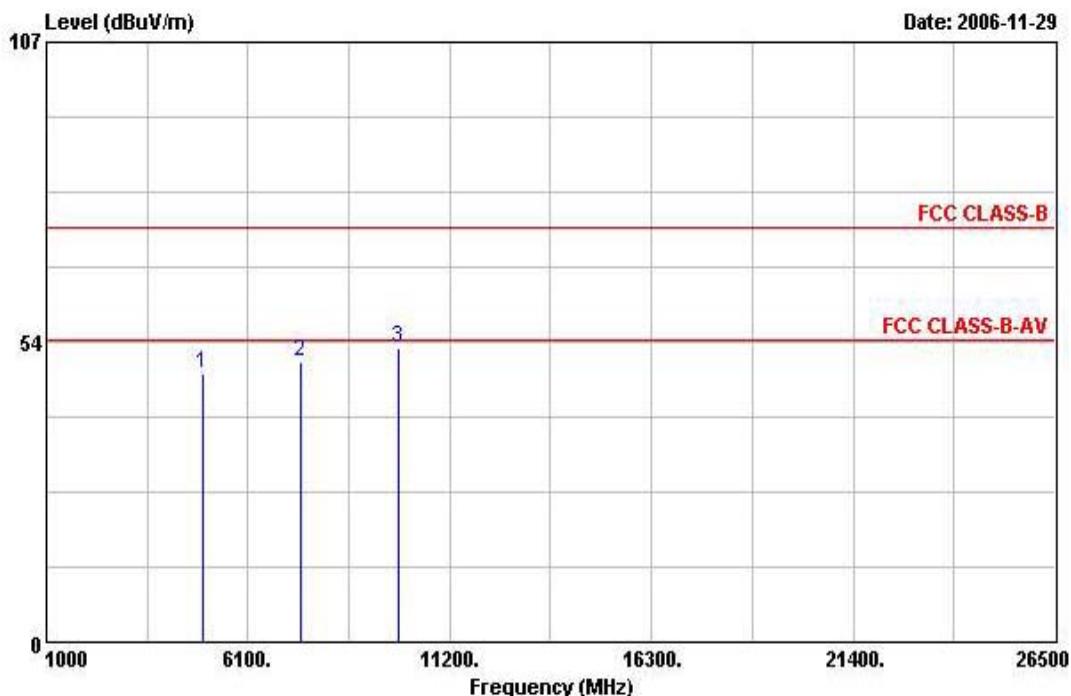Horizontal


| Freq | Level | Over Limit | Read | | Antenna Line Level | Cable Factor | Preamp Loss | Remark | |
|------|----------|------------|--------|--------|--------------------|--------------|-------------|--------|------|
| | | | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB |
| 1 | 4964.000 | 47.96 | -26.04 | 74.00 | 43.68 | 33.34 | 3.20 | 32.26 | PEAK |
| 2 | 7444.000 | 49.89 | -24.11 | 74.00 | 41.86 | 36.48 | 4.23 | 32.67 | PEAK |
| 3 | 9920.000 | 52.45 | -21.55 | 74.00 | 41.66 | 39.08 | 4.51 | 32.79 | PEAK |

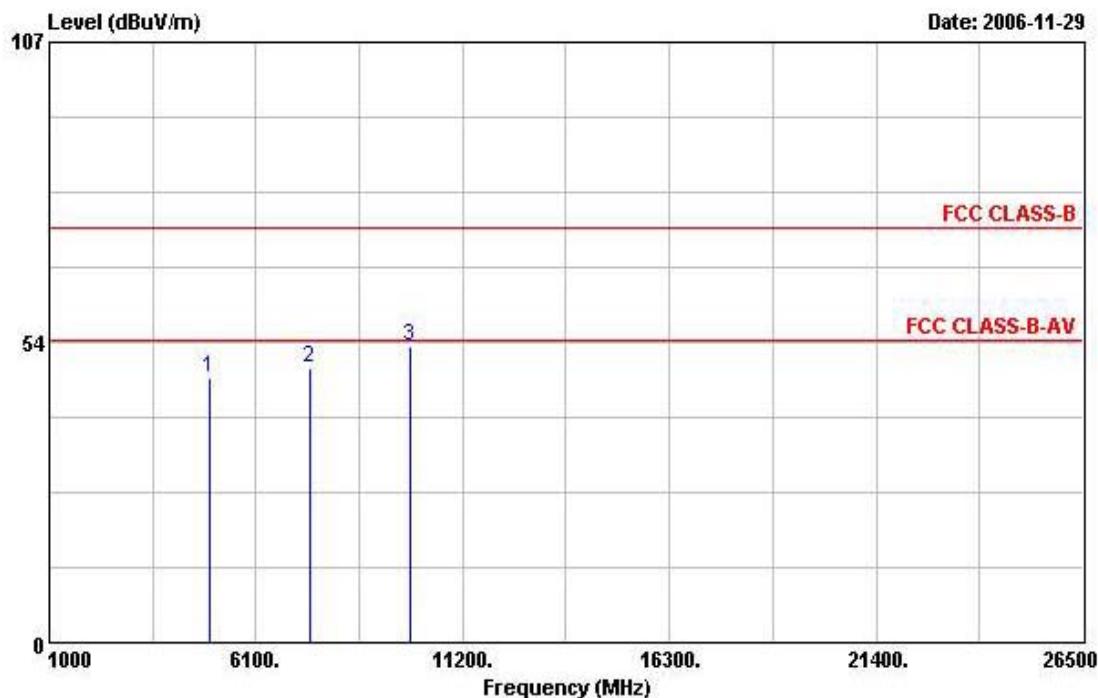Vertical


| Freq | Level | Over Limit | | Read | Antenna | Cable Preamp | | Remark |
|------|----------|------------|--------|-------|---------|--------------|--------|------------|
| | | Line | Limit | | | Level | Factor | |
| MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | |
| 1 | 4960.000 | 47.19 | -26.81 | 74.00 | 42.92 | 33.34 | 3.20 | 32.26 PEAK |
| 2 | 7440.000 | 49.05 | -24.95 | 74.00 | 41.02 | 36.48 | 4.23 | 32.67 PEAK |
| 3 | 9916.000 | 52.74 | -21.26 | 74.00 | 41.97 | 39.04 | 4.51 | 32.79 PEAK |

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|----------------------|-------------------------------------|----------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Span Frequency | 100 MHz |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 100 KHz /100 KHz for Peak |

4.7.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

| | | | |
|----------------------|-----|-----------------------|---------------|
| Temperature | 26 | Humidity | 55% |
| Test Engineer | Vic | Configurations | Channel 0, 78 |

Channel 0

| | Freq | Level | Over | Limit | Read | Antenna | Cable | Preamp | Remark |
|---|----------|--------|--------|--------|-------|---------|-------|--------|---------|
| | | | Limit | Line | Level | Factor | Loss | Factor | |
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | |
| 1 | 2390.000 | 54.85 | -19.15 | 74.00 | 24.67 | 28.29 | 1.88 | 0.00 | Peak |
| 2 | 2402.340 | 94.02 | | | | 28.29 | 1.88 | 0.00 | Peak |
| 1 | 2390.000 | 42.77 | -11.23 | 54.00 | 12.59 | 28.29 | 1.88 | 0.00 | Average |
| 2 | 2402.340 | 53.31 | | | | 28.29 | 1.88 | 0.00 | Average |

Channel 78

| | Freq | Level | Over | Limit | Read | Antenna | Cable | Preamp | Remark |
|---|----------|--------|-------|--------|-------|---------|-------|--------|---------|
| | | | Limit | Line | Level | Factor | Loss | Factor | |
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | |
| 1 | 2480.050 | 90.56 | | | | 28.47 | 1.94 | 0.00 | Peak |
| 2 | 2483.500 | 66.47 | -7.53 | 74.00 | 36.07 | 28.47 | 1.94 | 0.00 | Peak |
| 1 | 2480.050 | 60.62 | | | | 28.47 | 1.94 | 0.00 | Average |
| 2 | 2483.500 | 44.73 | -9.27 | 54.00 | 14.33 | 28.47 | 1.94 | 0.00 | Average |

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.




For Emission not in Restricted Band

Low Band Edge Plot on Channel 0 / 2402 MHz

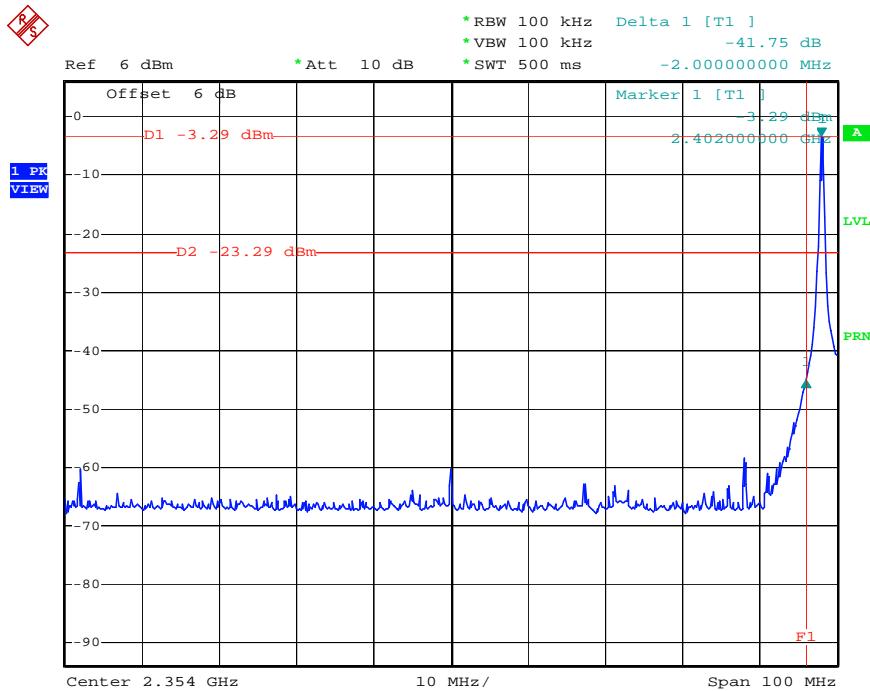

Date: 28.NOV.2006 09:54:25

High Band Edge Plot on Channel 78 / 2480 MHz

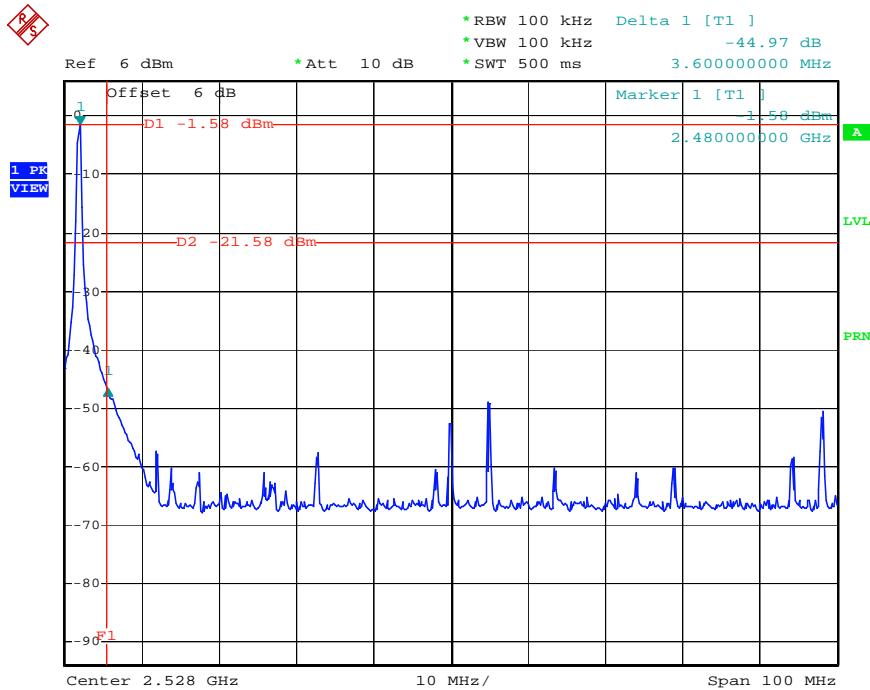

Date: 28.NOV.2006 10:12:14

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.



5. LIST OF MEASURING EQUIPMENTS

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|----------------------------|--------------------|--------------|-------------|-----------------|------------------|-----------------------|
| Spectrum Analyzer | R&S | FSP30 | 100023 | 9kHz ~ 30GHz | Nov. 25, 2006 | Conducted (TH01-HY) |
| Power Meter | R&S | NRVS | 100764 | DC ~ 40GHz | Jul. 20, 2006 | Conducted (TH01-HY) |
| Power Sensor | R&S | NRV-Z51 | 100666 | DC ~ 40GHz | Jul. 20, 2006 | Conducted (TH01-HY) |
| Power Sensor | R&S | NRV-Z32 | 100057 | 30MHz ~ 6GHz | Jun. 10, 2006 | Conducted (TH01-HY) |
| DC Power Source | G.W. | GPC-6030D | C671845 | DC 1V ~ 60V | Dec. 27, 2006 | Conducted (TH01-HY) |
| Temp. and Humidity Chamber | KSON | THS-C3L | 612 | N/A | Oct. 02, 2006 | Conducted (TH01-HY) |
| RF CABLE-1m | Jye Bao | RG142 | CB034-1m | 20MHz ~ 7GHz | Dec. 1, 2006 | Conducted (TH01-HY) |
| RF CABLE-2m | Jye Bao | RG142 | CB035-2m | 20MHz ~ 1GHz | Dec. 1, 2006 | Conducted (TH01-HY) |
| Oscilloscope | Tektronix | TDS1012 | CO38515 | 100MHz / 1GS/s | Jun. 20, 2006 | Conducted (TH01-HY) |
| Signal Generator | R&S | SMR40 | 100116 | 10MHz ~ 40GHz | Dec. 30, 2005 | Conducted (TH01-HY) |
| Data Generator | Tektronix | DG2030 | 063-2920-50 | 0.1Hz~400MHz | Jun. 16, 2006 | Conducted (TH01-HY) |
| EMC Receiver | R&S | ESCS 30 | 100132 | 9kHz – 2.75GHz | July. 04, 2006 | Conduction (CO01-HY) |
| LISN | MessTec | NNB-2/16Z | 2001/004 | 9kHz – 30MHz | Apr. 28, 2006 | Conduction (CO01-HY) |
| LISN (Support Unit) | MessTec | NNB-2/16Z | 2001/009 | 9kHz – 30MHz | Apr. 19, 2006 | Conduction (CO01-HY) |
| EMI Filter | LINDGREN | LRE-2060 | 1004 | < 450Hz | N/A | Conduction (CO01-HY) |
| EMI Filter | LINDGREN | N6006 | 201052 | 0 – 60Hz | N/A | Conduction (CO01-HY) |
| RF Cable-CON | Suhner Switzerland | RG223/U | CB029 | 9kHz – 30MHz | Dec. 21, 2006 | Conduction (CO01-HY) |
| Horn Antenna | EMCO | 3115 | 6741 | 1GHz ~ 18GHz | Apr. 27, 2006 | Radiation (03CH03-HY) |
| Horn Antenna | SCHWARZBECK | BBHA9170 | BBHA9170154 | 15 GHz - 40 GHz | NCR | Radiation (03CH03-HY) |
| RF Cable-R03m | Jye Bao | RG142 | CB021 | 30 MHz - 1 GHz | Dec. 01, 2006 | Radiation (03CH03-HY) |
| RF Cable-HIGH | SUHNER | SUCOFLEX 106 | 03CH03-HY | 1 GHz - 40 GHz | Dec. 01, 2006 | Radiation (03CH03-HY) |
| Turn Table | HD | DS 420 | 420/650/00 | 0 – 360 degree | N/A | Radiation (03CH03-HY) |
| Antenna Mast | HD | MA 240 | 240/560/00 | 1 m - 4 m | N/A | Radiation (03CH03-HY) |

Note: Calibration Interval of instruments listed above is one year. NCR: Non-Calibration required.



| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|-----------------|--------------|---------------|-------------|-------------------|------------------|-----------------------|
| Amplifier | MITEQ | AMF-6F-260400 | 923364 | 26.5 GHz - 40 GHz | Jan. 24, 2006* | Radiation (03CH03-HY) |
| AC Power Source | HPC | HPA-500W | HPA-9100024 | AC 0 ~ 300V | Apr. 21, 2005* | Conducted (TH01-HY) |
| Loop Antenna | R&S | HFH2-Z2 | 860004/001 | 9 kHz - 30 MHz | May 23, 2006* | Radiation (03CH03-HY) |

Note: Calibration Interval of instruments listed above is two year.



6. TEST LOCATION

| | |
|--------|--|
| SHIJR | ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255 |
| HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055 |
| LINKOU | ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695 |
| DUNGHU | ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740 |
| JUNGHE | ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626 |
| NEIHU | ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777 |
| JHUBEI | ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085 |



7. NVLAP CERTIFICATE OF ACCREDITATION

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 200079-0

Sportun International, Inc. Hwa Ya EMC Laboratory

Tao Yuan Hsien 333
TAIWAN

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué dated 18 June 2005).*

2007-01-01 through 2007-12-31

Effective dates



Sally S. Bruce
For the National Institute of Standards and Technology

NVLAP-01C (REV. 2006-09-13)