



TEST REPORT

Applicant: Acer Incorporated
Address: 8F, 88, Sec.1 Xintai 5th Rd. Xizhi, New Taipei City
221, Taiwan
Equipment Type: Tablet PC
Model Name: A25003
Brand Name: acer
Marketing Name: A12-11MN
FCC ID: HLZA25003
ISED Number: 1754F-A25003
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen Issue 5
RSS-247 Issue 3
(refer to section 3.1)
Sample Arrival Date: Apr. 30, 2025
Test Date: May 09, 2025 - Jun. 26, 2025
Date of Issue: Jul. 18, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu

Checked by: Ye Hongji

Approved by: Sunny Zou
(Technical Director)

Revision History		
Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Jul. 18, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Test Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Test Software List	10
4.4	Measurement Uncertainty	11
4.5	Description of Test Setup	11
4.6	Measurement Results Explanation Example	14
5	TEST ITEMS	15
5.1	Antenna Requirements	15
5.2	Frequency Hopping Systems	16
5.3	Number of Hopping Frequencies	18
5.4	Peak Output Power and E.I.R.P.	19
5.5	Occupied Bandwidth	20

5.6	Carrier Frequency Separation	21
5.7	Time of Occupancy (Dwell time)	22
5.8	Conducted Spurious Emission & Authorized-band band-edge	24
5.9	Conducted Emission	25
5.10	Radiated Spurious Emission	26
5.11	Band Edge (Restricted-band band-edge).....	28
ANNEX A	TEST RESULT	29
A.1	Number of Hopping Frequency	29
A.2	Peak Output Power and E.I.R.P	30
A.3	20 dB and 99% bandwidth	33
A.4	Hopping Frequency Separation.....	38
A.5	Average Time of Occupancy	39
A.6	Conducted Spurious Emissions & Authorized-band band-edge	42
A.7	Conducted Emissions.....	49
A.8	Radiated Spurious Emission	51
A.9	Band Edge (Restricted-band band-edge).....	59
ANNEX B	TEST SETUP PHOTOS	61
ANNEX C	EUT EXTERNAL PHOTOS	61
ANNEX D	EUT INTERNAL PHOTOS	61

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Acer Incorporated
Address	8F, 88, Sec.1 Xintai 5th Rd. Xizhi, New Taipei City 221, Taiwan

2.2 Manufacturer Information

Manufacturer	Acer Incorporated
Address	8F, 88, Sec.1 Xintai 5th Rd. Xizhi, New Taipei City 221, Taiwan

2.3 General Description for Equipment under Test (EUT)

EUT Name	Tablet PC
Model Name Under Test	A25003
Series Model Name	N/A
Description of Model name differentiation	N/A
Marketing Name	A12-11MN
Serial Number	23800078703
Hardware Version	BND-H60 V2.0
Software Version	Acer_AV0V0_A12-11MN_RV00RC01_EEA_GEN1
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac and 802.11ax GPS, GLONASS, BDS, Galileo
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	0.58 dBi
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
3	RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exemp Local Area Network (LE-LAN) Devices
4	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
5☆	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Test Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	RSS-247, 5.4 (f)	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	RSS-247, 5.1 (d)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power and E.I.R.P	15.247(b)	RSS-247, 5.4 (b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	RSS-247, 5.1 (a)	Low/Middle/High	ANNEX A.3	Pass	--
5	Carrier Frequency Separation	15.247(a)	RSS-247, 5.1 (b)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	RSS-247, 5.1 (d)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	RSS-247, 5.5	Hopping Mode; Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Low/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	RSS-Gen, 7.3	--	--	N/A	Note ³

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	42% to 69%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.0°C to +26.1°C
Working Voltage of the EUT	NV (Normal Voltage)	3.80 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2024.12.16	2025.12.15
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2024.07.04	2025.07.03
Power Sensor	KEYSIGHT	U2063XA	MY58000247	2024.07.04	2025.07.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2024.08.01	2025.07.31
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	02460	2024.05.16	2027.05.15
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	RAINFORD	9m*6m*6m	140	2024.07.28	2027.07.27
Amplifier	COM-MV	LSCX_LNA1-12G-01	7210214	2024.08.01	2025.07.31
Amplifier	COM-MV	XKu_LNA7-18G-01	7210209	2024.08.01	2025.07.31
Amplifier	COM-MV	KA LNA18 40G-01	18050001	2024.12.05	2025.12.04
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2024.08.01	2025.07.31
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-01162	2023.08.04	2026.08.03
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2024.11.28	2025.11.27
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2024.07.13	2027.07.12
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2024.08.01	2025.07.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2025.04.29	2026.04.28
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2025.02.14	2028.02.13

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

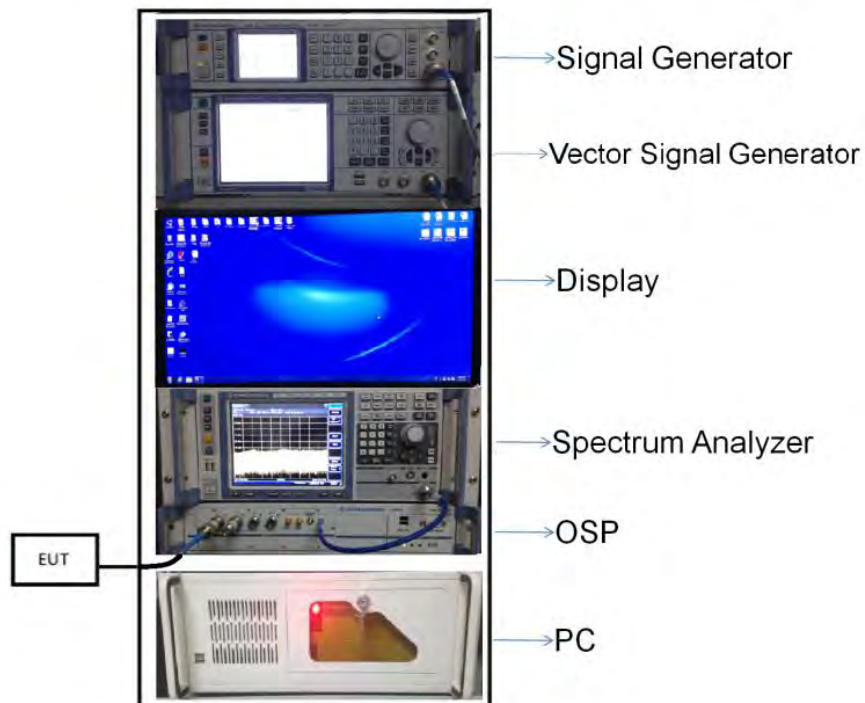


(Diagram 1)

4.5.2 For AC Power Supply Port Test




(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

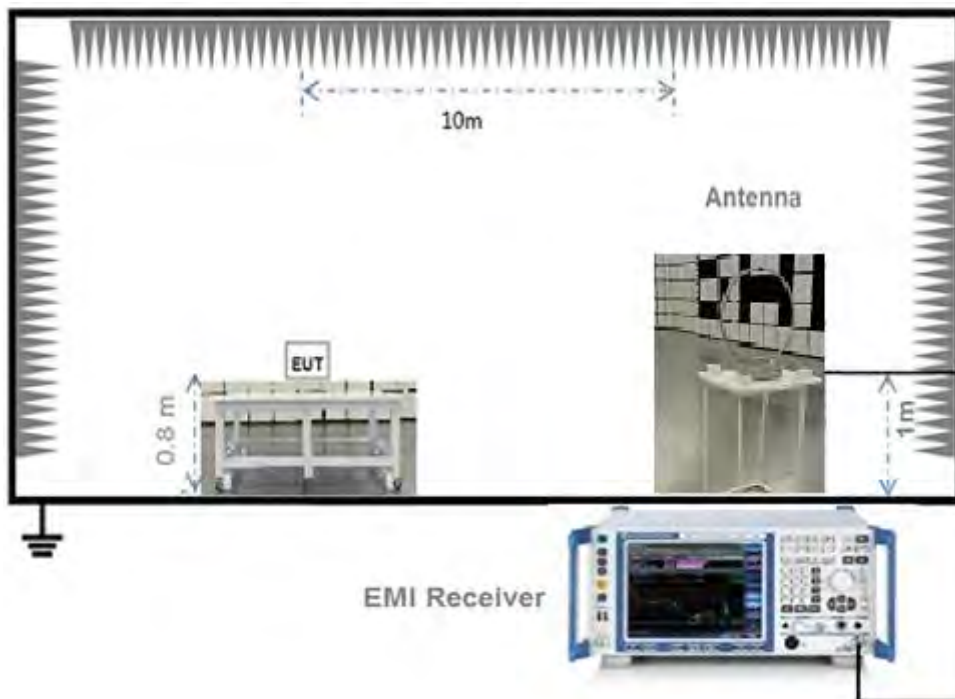


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

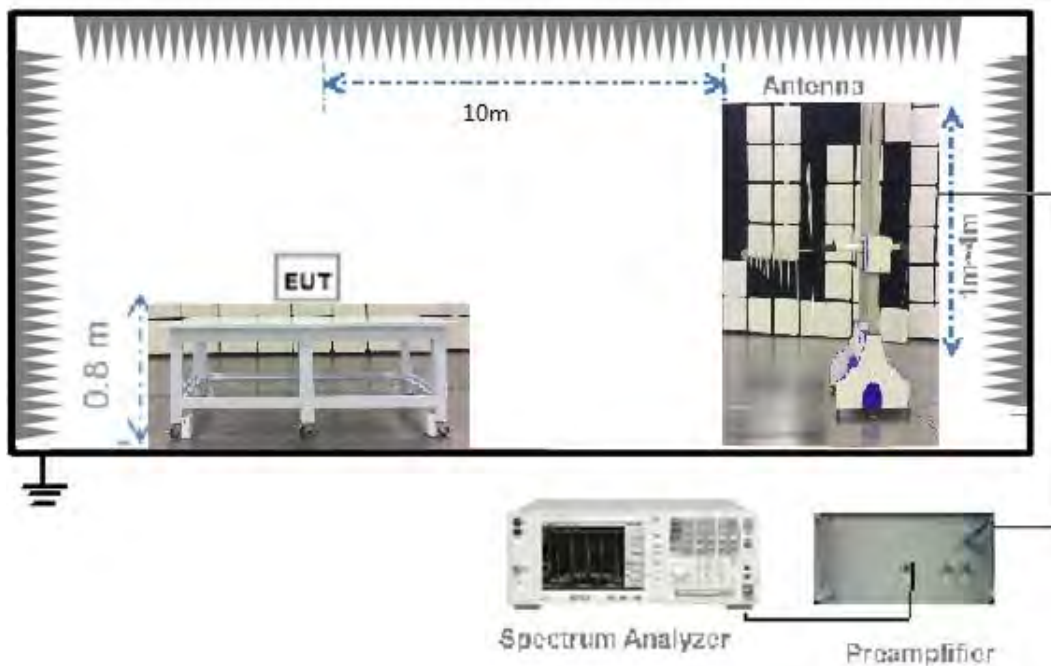

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

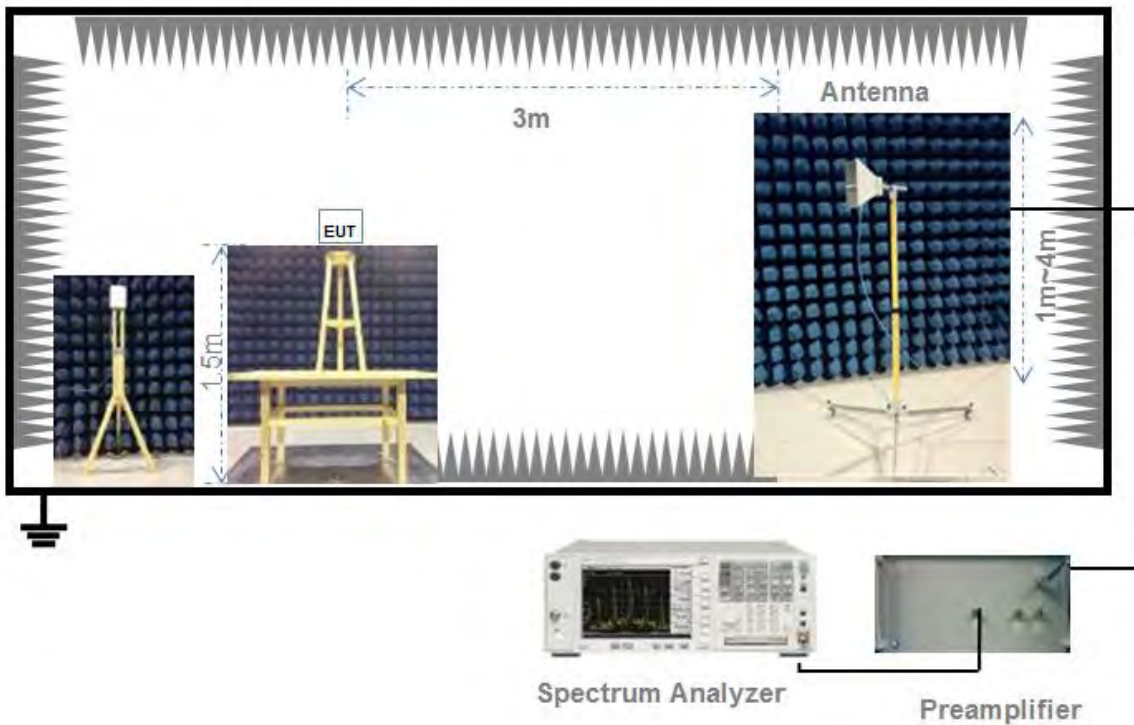

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.


Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.

For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

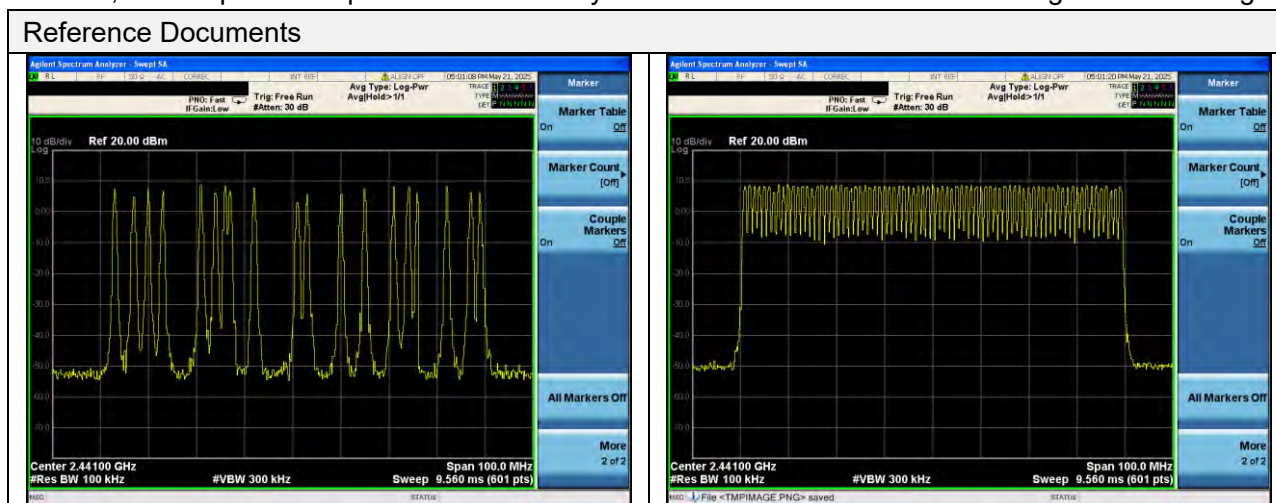

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (d)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power and E.I.R.P

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a); RSS-247, 5.1 (d)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For AFH Mode:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

{Period} = 0.4 s * {Number of Hopping Frequency}

For DH3 package type

{Total of Dwell} = {Pulse Time} * (800 / 4) / {Number of Hopping Frequency} * {Period}

{Period} = 0.4 s * {Number of Hopping Frequency}

For DH5 package type

{Total of Dwell} = {Pulse Time} * (800 / 6) / {Number of Hopping Frequency} * {Period}

{Period} = 0.4 s * {Number of Hopping Frequency}

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V}/\text{m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V}/\text{m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.10.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test Plots

GFSK 2.4 GHz ~ 2.4415 GHz

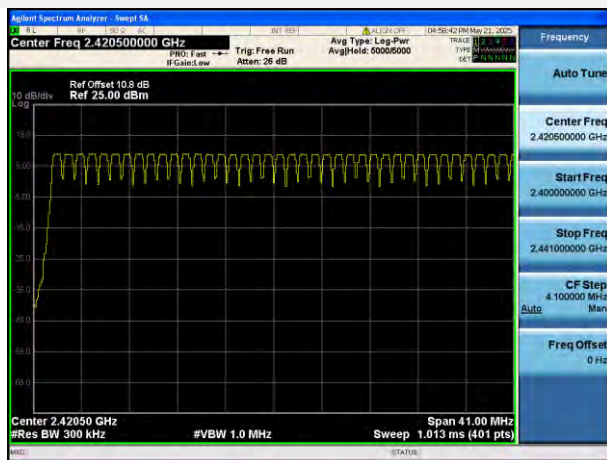

GFSK 2.4415 GHz ~ 2.4835 GHz

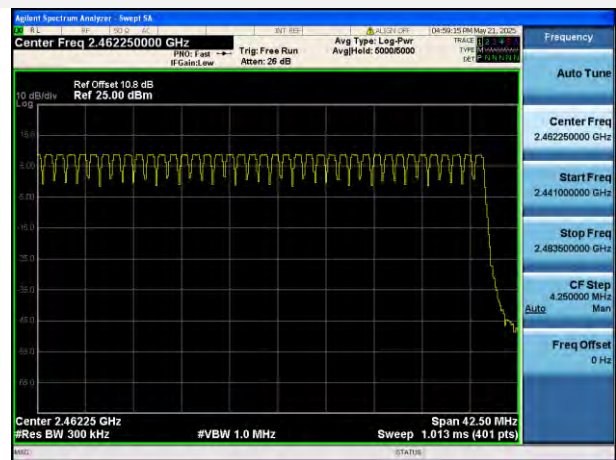

8-DPSK 2.4 GHz ~ 2.4415 GHz



8-DPSK 2.4415 GHz ~ 2.4835 GHz



A.2 Peak Output Power and E.I.R.P

Peak Power Test Data

Channel	Measured Output Peak Power						Limit		Verdict
	GFSK		$\pi/4$ -DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	-1.17	0.76	-1.75	0.67	-1.21	0.76	21	125	Pass
Middle	-0.88	0.82	-1.39	0.73	-0.91	0.81			Pass
High	-0.83	0.83	-1.42	0.72	-0.86	0.82			Pass

E.I.R.P Test Data (For ISED)

Channel	E.I.R.P						Limit		Verdict
	GFSK		$\pi/4$ -DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	-0.59	0.87	-1.17	0.76	-0.63	0.86	36	4000	Pass
Middle	-0.30	0.93	-0.81	0.83	-0.33	0.93			Pass
High	-0.25	0.94	-0.84	0.82	-0.28	0.94			Pass

Test Plots

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



A.3 20 dB and 99% bandwidth

Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.012500	0.874310
Middle	1.027300	0.871580
High	1.027300	0.878700
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.312500	1.197400
Middle	1.335000	1.195700
High	1.327400	1.199300
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.312500	1.194700
Middle	1.342500	1.191600
High	1.327400	1.196900

Test Plots

20 dB Bandwidth

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



π/4-DQPSK LOW CHANNEL



π/4-DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



99% Bandwidth

GFSK LOW CHANNEL




GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL

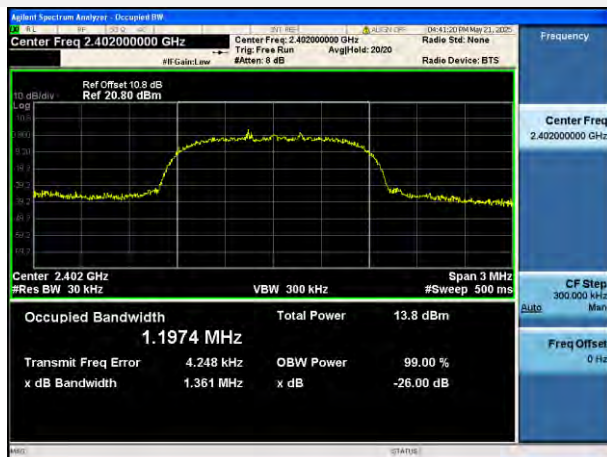

$\pi/4$ -DQPSK MIDDLE CHANNEL



π/4-DQPSK HIGH CHANNEL




8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL

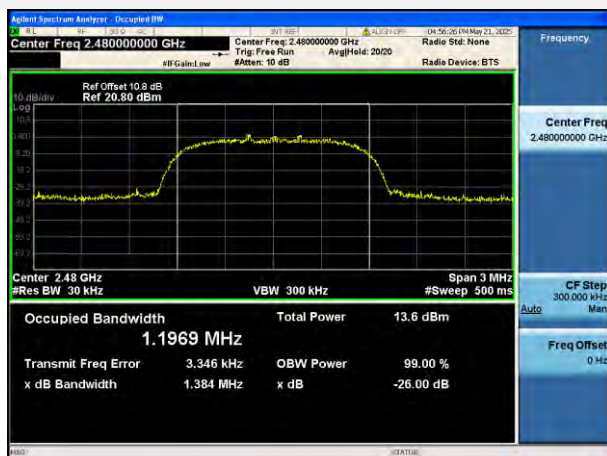

A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.000	0.685	Pass
8-DPSK	1.000	0.895	Pass

Test Plots

GFSK



8-DPSK




A.5 Average Time of Occupancy

Test Data


GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.36650	117.280	0.4	Pass
DH 3	1.62100	259.360	0.4	Pass
DH 5	2.87600	306.773	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
3DH 1	0.37600	120.320	0.4	Pass
3DH 3	1.62700	260.320	0.4	Pass
3DH 5	2.87600	306.773	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.36490	58.384	0.4	Pass
DH 3	1.62700	130.160	0.4	Pass
DH 5	2.87600	153.387	0.4	Pass

Test Plots


GFSK DH1

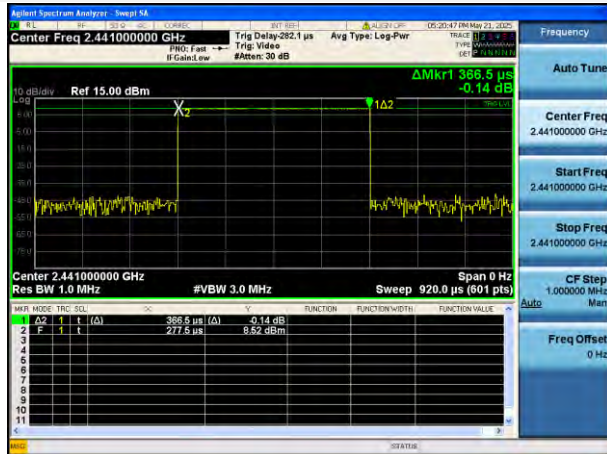


GFSK DH3

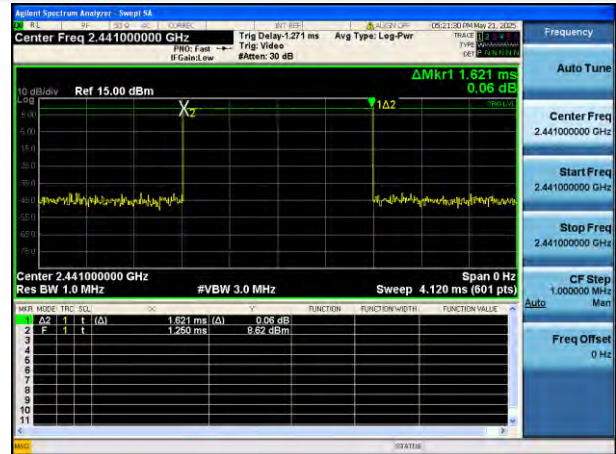


GFSK DH5

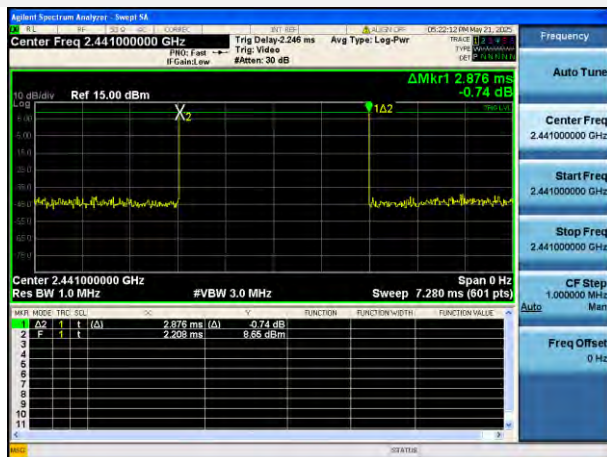


8-DPSK 3DH1

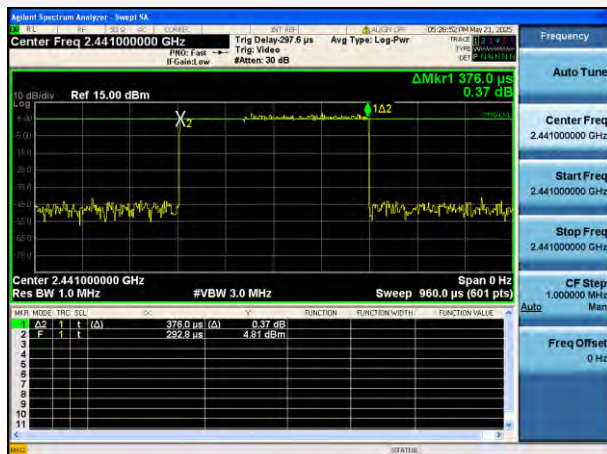


8-DPSK 3DH3

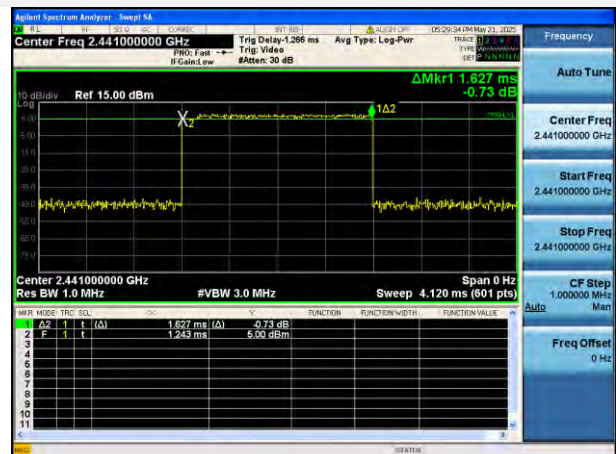


8-DPSK 3DH5

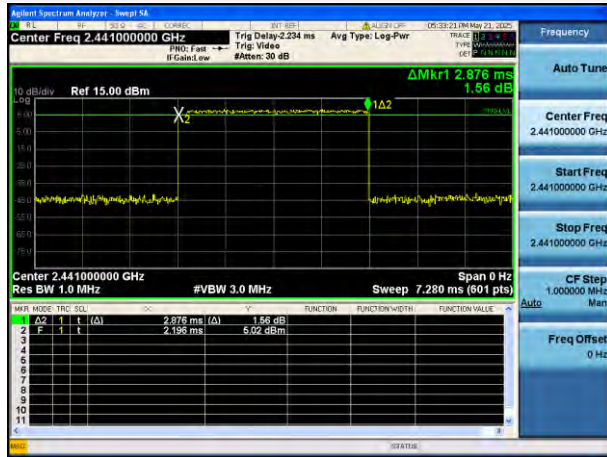


AFH Mode DH1

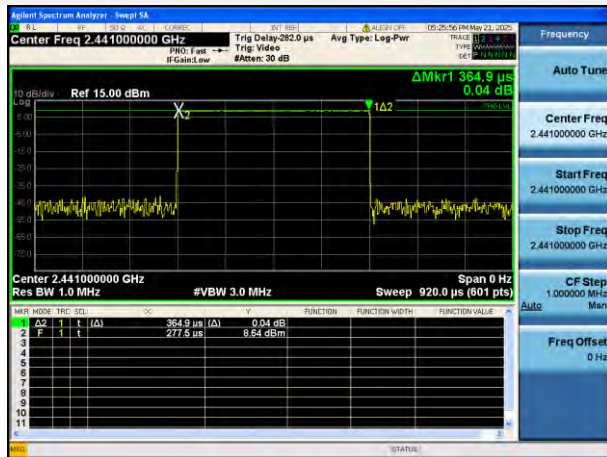

AFH Mode DH3

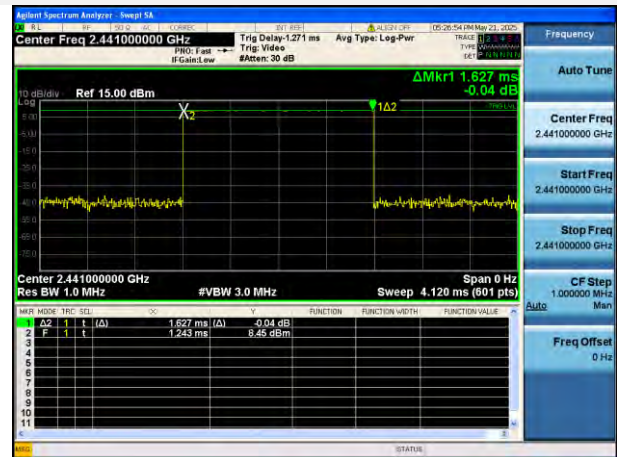

AFH Mode DH5

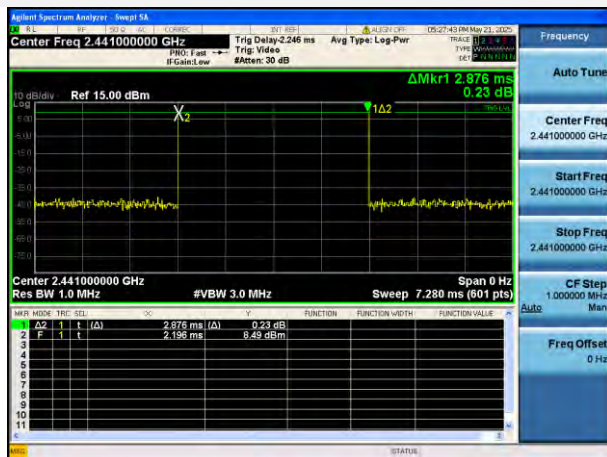

A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-37.26	-1.40	-21.40	Pass
Middle	-36.93	-1.07	-21.07	Pass
High	-36.06	-1.01	-21.01	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-37.70	-4.81	-24.81	Pass
Middle	-36.54	-4.39	-24.39	Pass
High	-35.04	-4.28	-24.28	Pass


Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-37.48	-0.98	-20.98	Pass
8-DPSK	-35.76	-4.29	-24.29	Pass

Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL




GFSK LOW CHANNEL, BAND EDGE

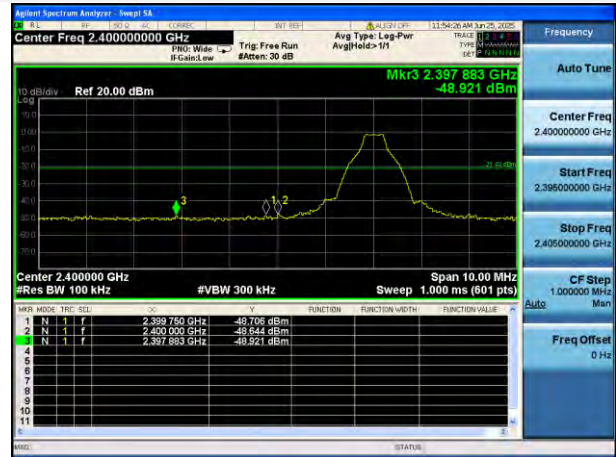


GFSK LOW CHANNEL, SPURIOUS

30 MHz ~ 3 GHz

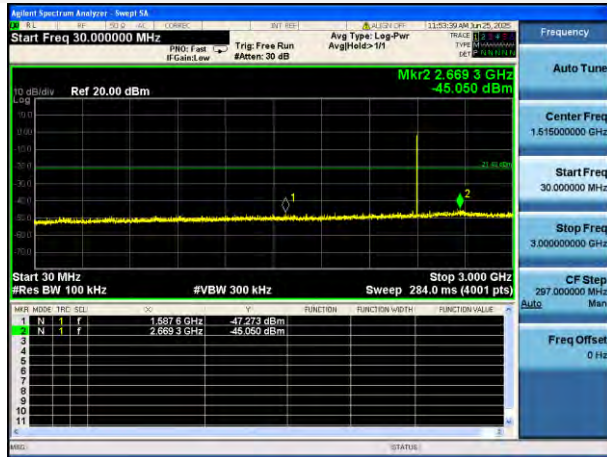

GFSK LOW CHANNEL, SPURIOUS


3 GHz ~ 25 GHz

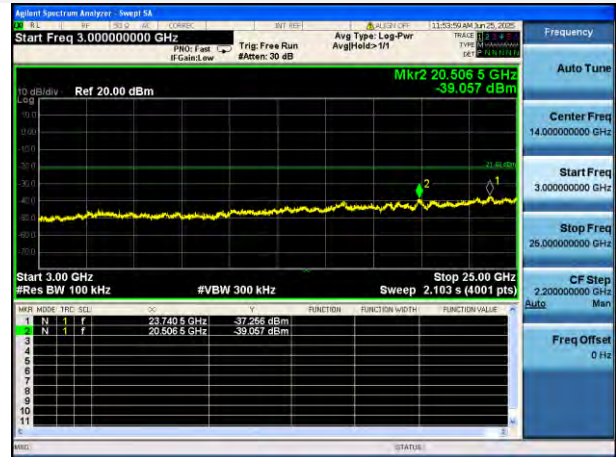


GFSK MIDDLE CHANNEL, CARRIER LEVEL



GFSK MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

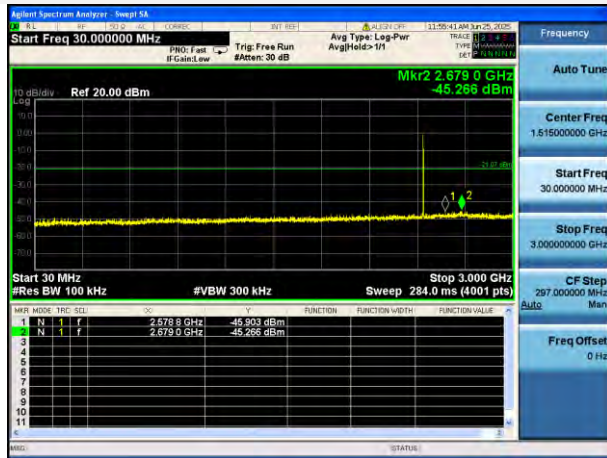


GFSK MIDDLE CHANNEL, SPURIOUS
3 GHz ~ 25 GHz

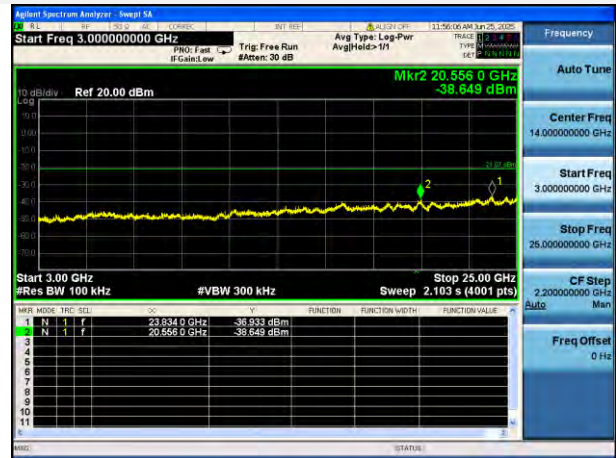


GFSK HIGH CHANNEL, CARRIER LEVEL




GFSK HIGH CHANNEL, BAND EDGE

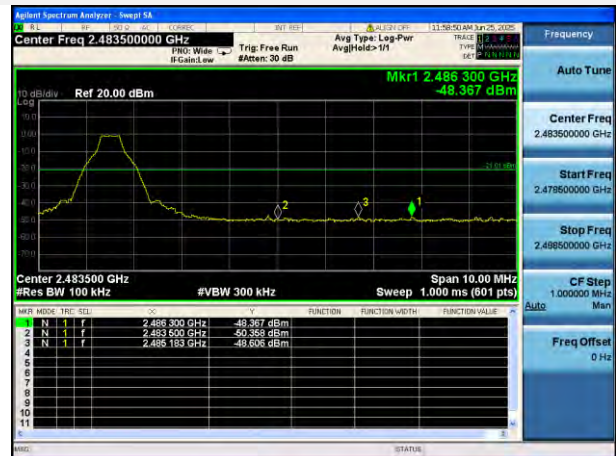


GFSK HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

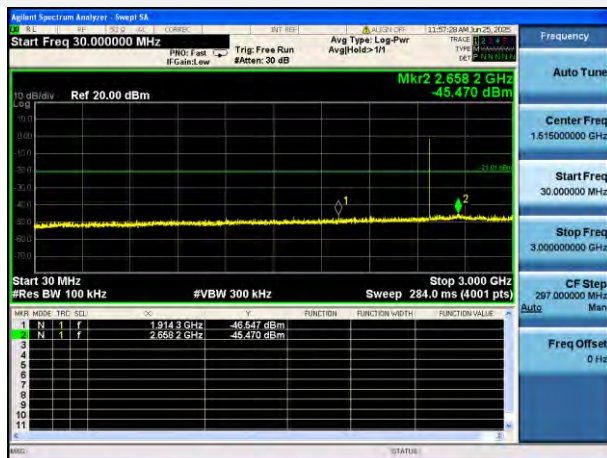


GFSK HIGH CHANNEL, SPURIOUS
3 GHz ~ 25 GHz

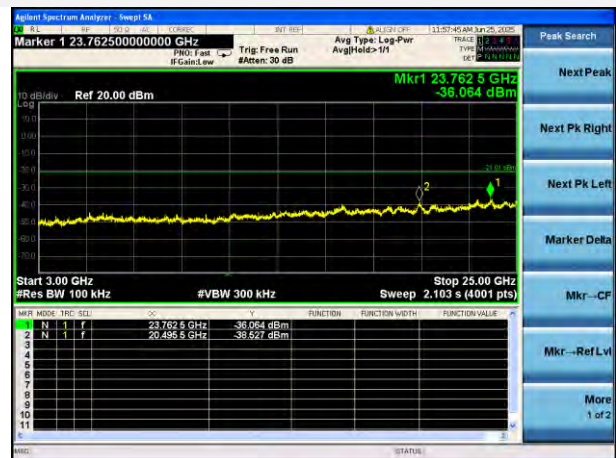

8-DPSK LOW CHANNEL, CARRIER LEVEL

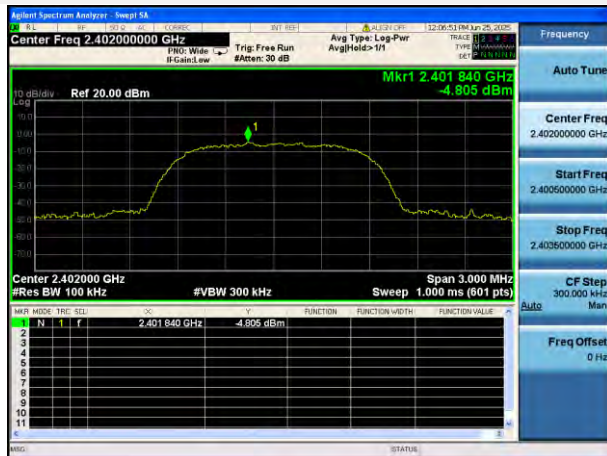


8-DPSK LOW CHANNEL, BAND EDGE

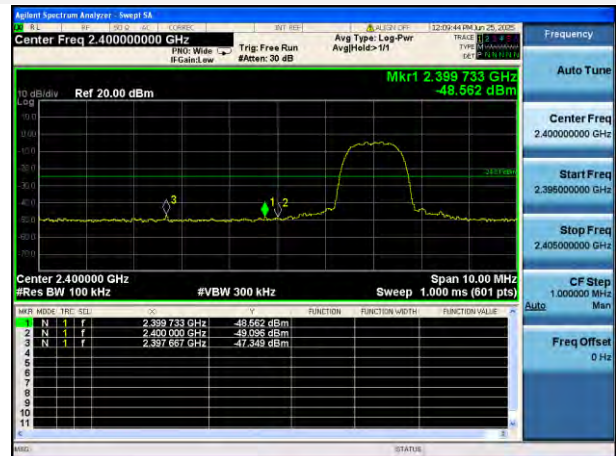


8-DPSK LOW CHANNEL, SPURIOUS

30 MHz ~ 3 GHz

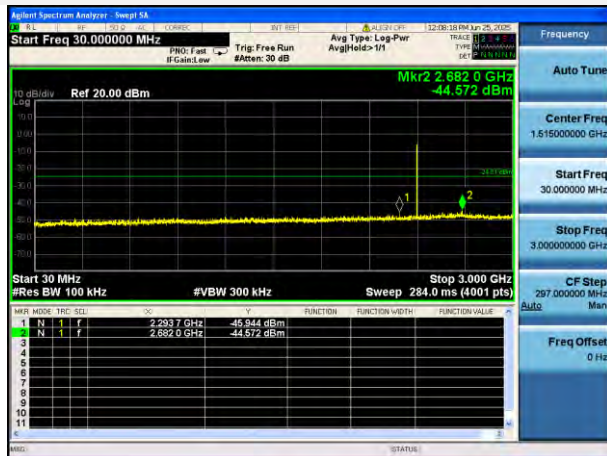


8-DPSK LOW CHANNEL, SPURIOUS


3 GHz ~ 25 GHz

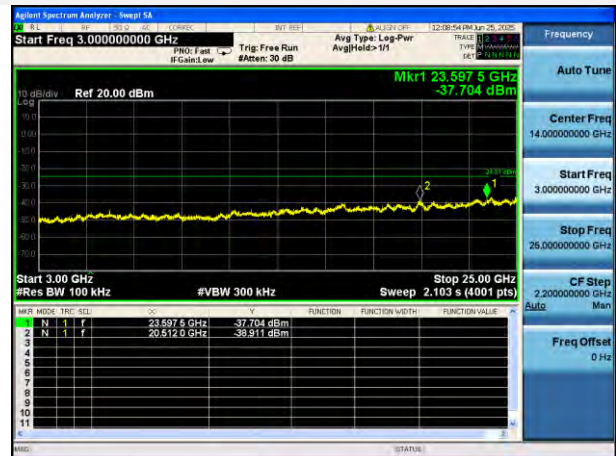


8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

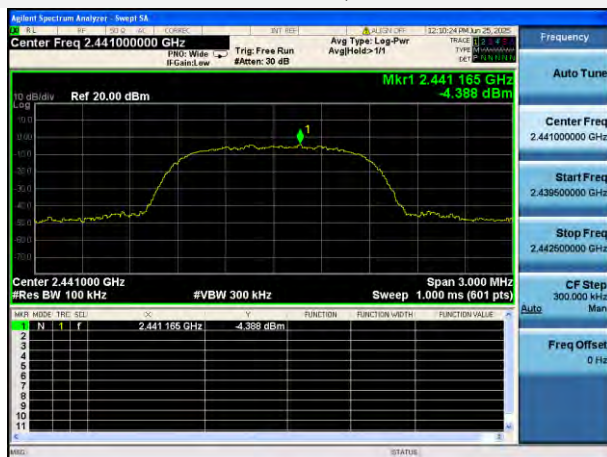


8-DPSK MIDDLE CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

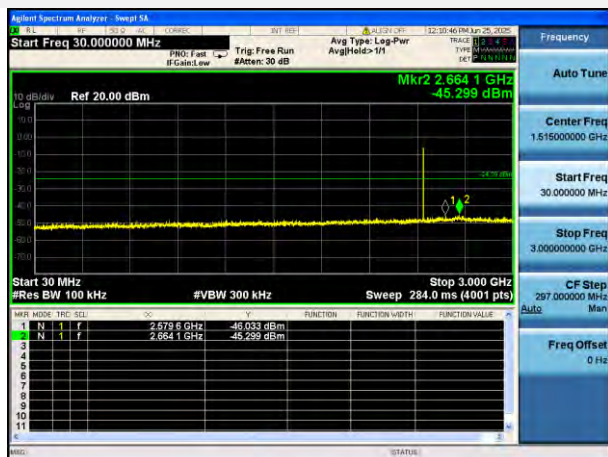


8-DPSK MIDDLE CHANNEL, SPURIOUS
3 GHz ~ 25 GHz

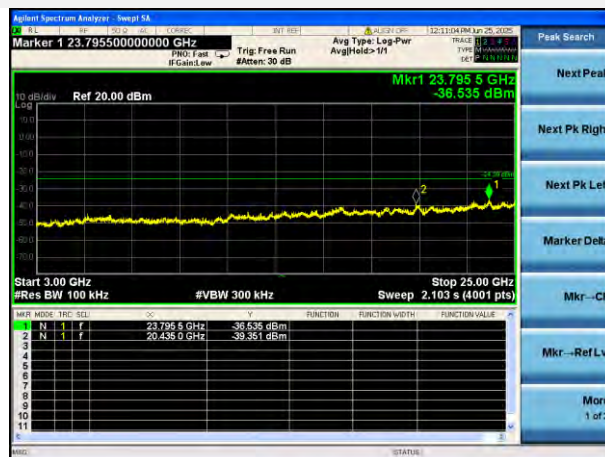


8-DPSK HIGH CHANNEL, CARRIER LEVEL

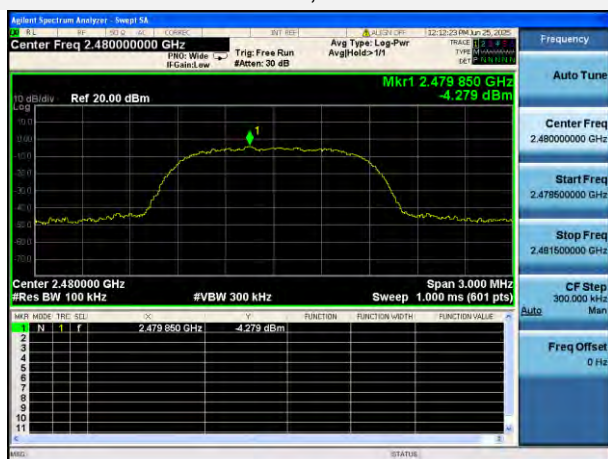


8-DPSK HIGH CHANNEL, BAND EDGE

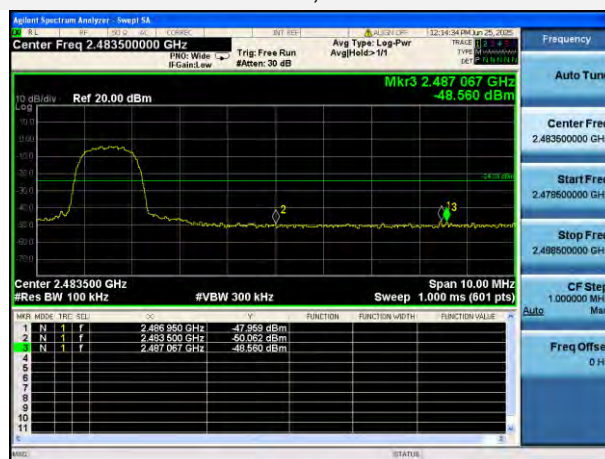


8-DPSK HIGH CHANNEL, SPURIOUS
30 MHz ~ 3 GHz

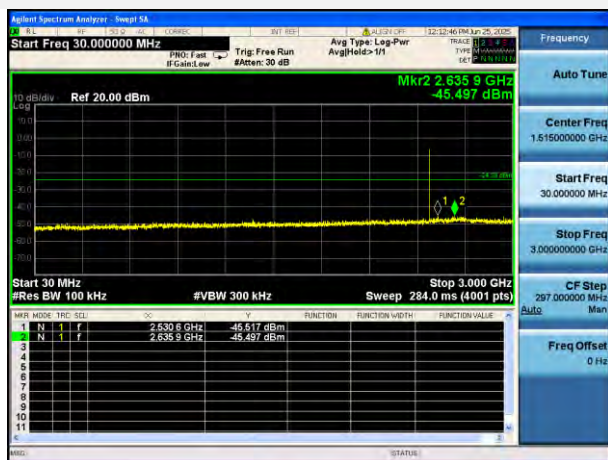


8-DPSK HIGH CHANNEL, SPURIOUS
3 GHz ~ 25 GHz

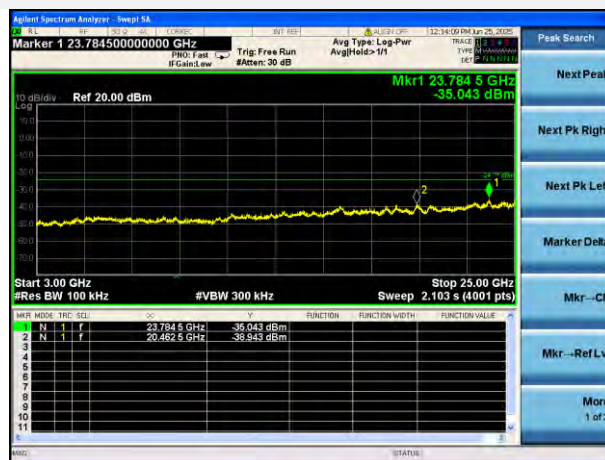


GFSK HOPPING, CARRIER LEVEL

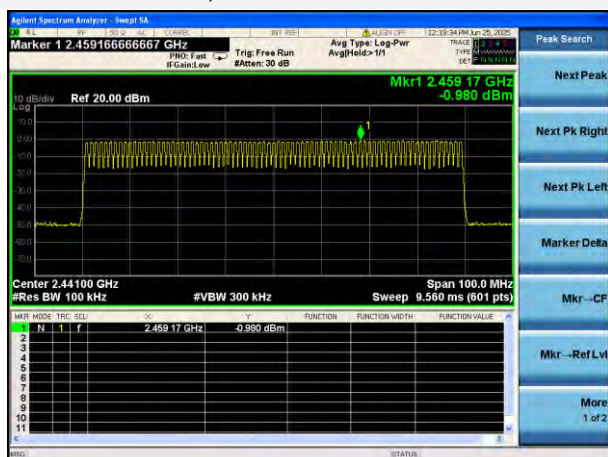


GFSK HOPPING BAND EDGE (LOW)

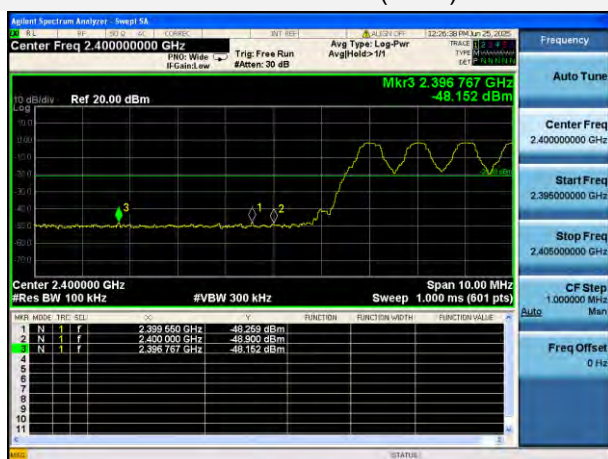


GFSK HOPPING BAND EDGE (HIGH)

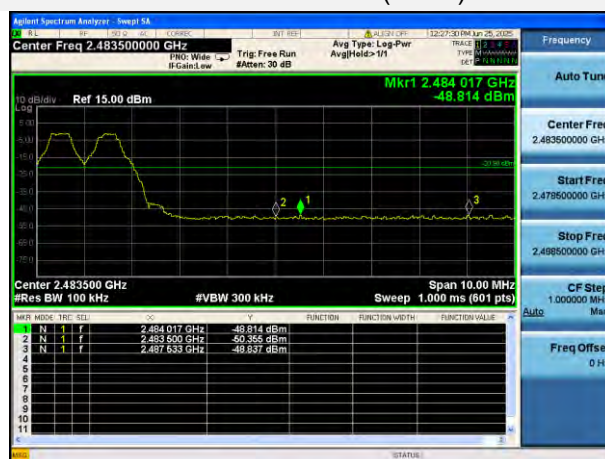


GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

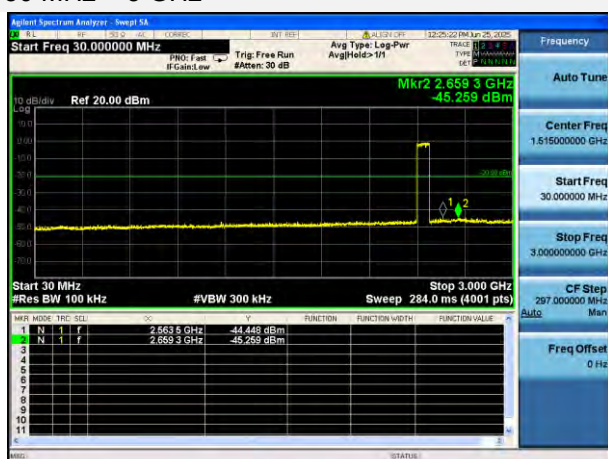


GFSK Hopping Mode, SPURIOUS 3GHz ~ 25 GHz

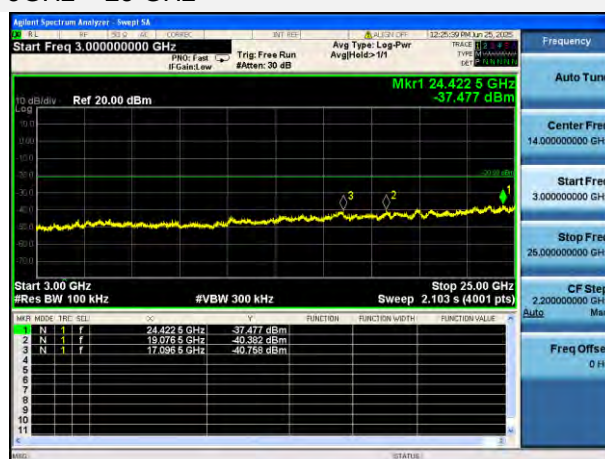


8-DPSK HOPPING, CARRIER LEVEL

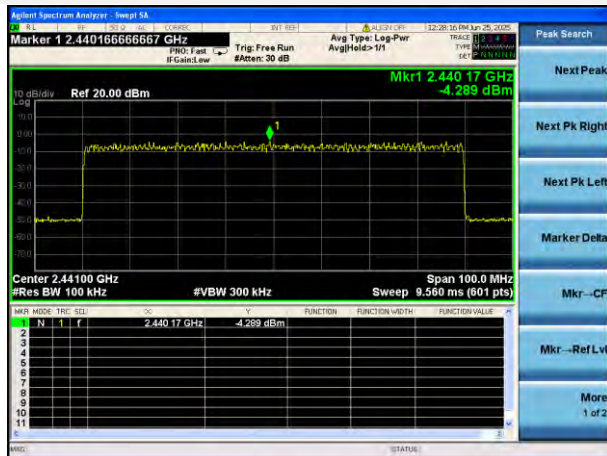


8-DPSK Hopping BAND EDGE (LOW)

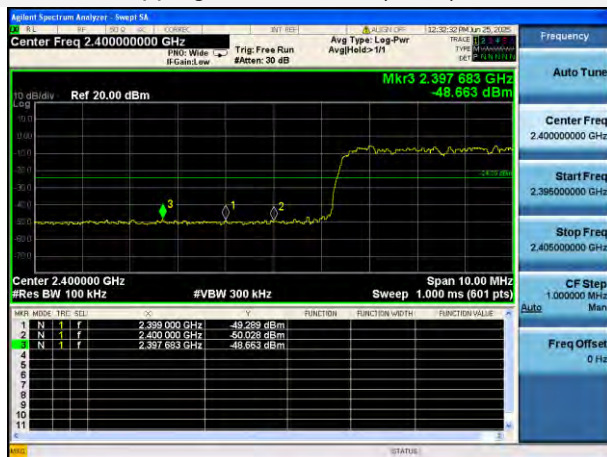


8-DPSK Hopping BAND EDGE (HIGH)

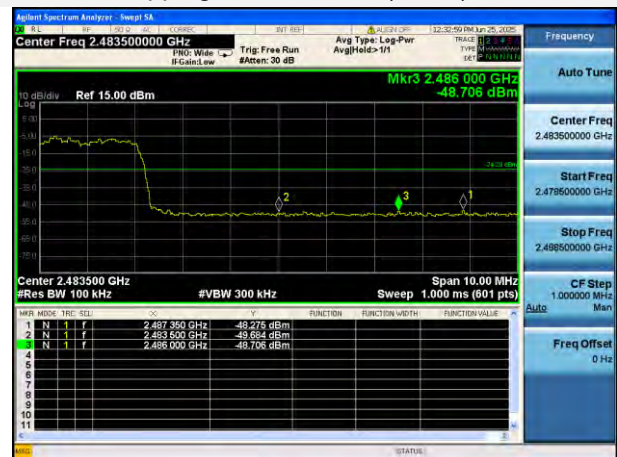

8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

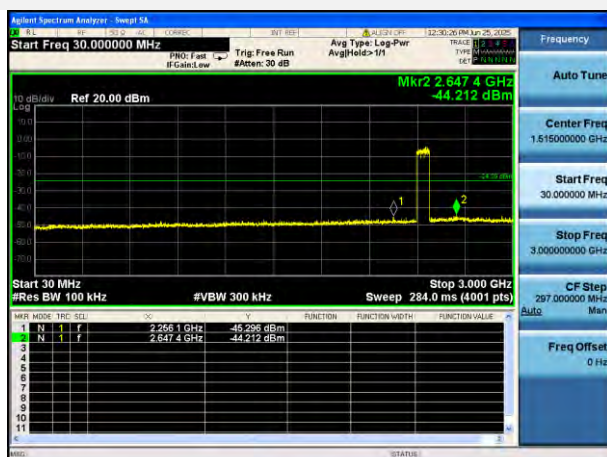

8-DPSK Hopping Mode, SPURIOUS 3GHz ~ 25 GHz

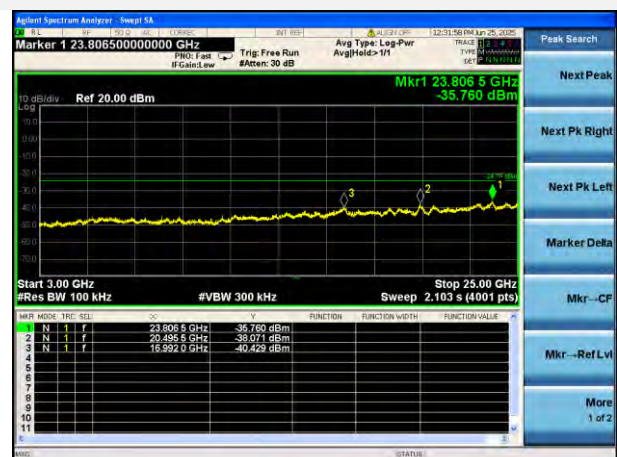

A.7 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15C

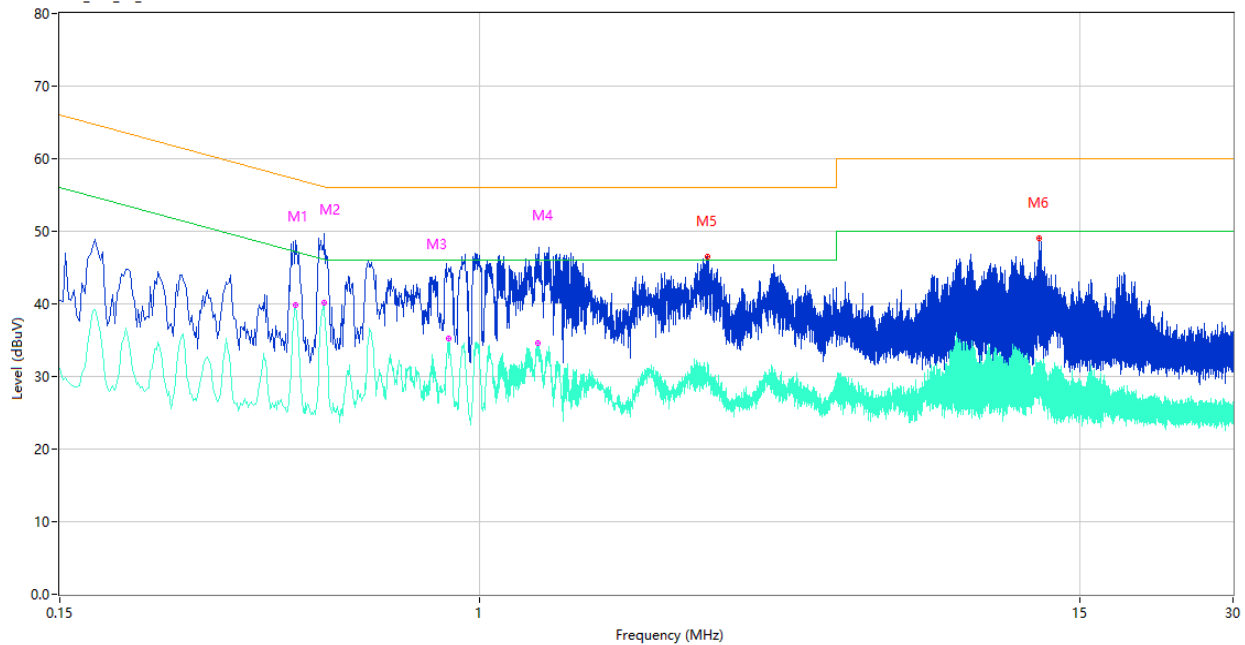

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.434	48.68	10.22	57.18	8.50	Peak	L	Pass
1**	0.434	39.86	10.22	47.18	7.32	AV	L	Pass
2	0.494	46.76	10.00	56.10	9.34	Peak	L	Pass
2**	0.494	40.20	10.00	46.10	5.90	AV	L	Pass
3	0.868	44.98	10.46	56.00	11.02	Peak	L	Pass
3**	0.868	35.20	10.46	46.00	10.80	AV	L	Pass
4	1.300	46.77	10.50	56.00	9.23	Peak	L	Pass
4**	1.300	34.56	10.50	46.00	11.44	AV	L	Pass
5	2.794	46.46	10.39	56.00	9.54	Peak	L	Pass
5**	2.794	30.08	10.39	46.00	15.92	AV	L	Pass
6	12.518	49.01	10.63	60.00	10.99	Peak	L	Pass
6**	12.518	27.59	10.63	50.00	22.41	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

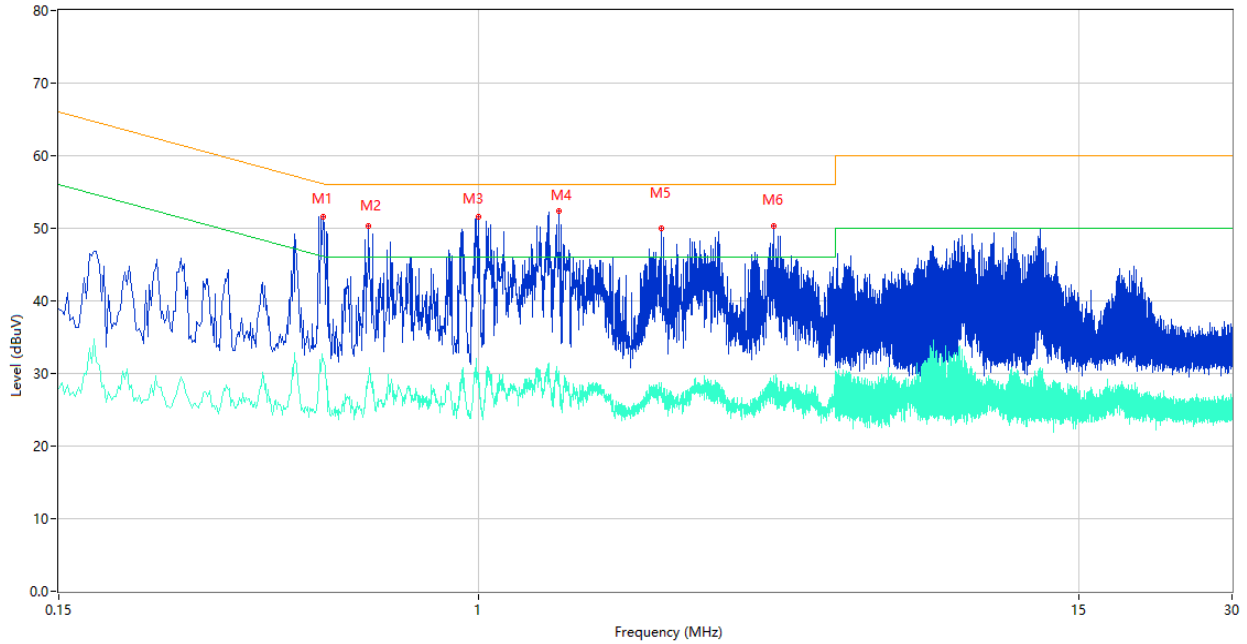

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.494	51.61	10.00	56.10	4.49	Peak	N	Pass
1**	0.494	31.74	10.00	46.10	14.36	AV	N	Pass
2	0.608	50.28	10.18	56.00	5.72	Peak	N	Pass
2**	0.608	28.74	10.18	46.00	17.26	AV	N	Pass
3	1.000	51.58	9.97	56.00	4.42	Peak	N	Pass
3**	1.000	29.97	9.97	46.00	16.03	AV	N	Pass
4	1.436	52.34	9.98	56.00	3.66	Peak	N	Pass
4**	1.436	30.34	9.98	46.00	15.66	AV	N	Pass
5	2.276	49.92	10.25	56.00	6.08	Peak	N	Pass
5**	2.276	28.76	10.25	46.00	17.24	AV	N	Pass
6	3.784	50.28	10.38	56.00	5.72	Peak	N	Pass
6**	3.784	29.69	10.38	46.00	16.31	AV	N	Pass

A.8 Radiated Spurious Emission

Note¹: The symbol of "--" in the table which means not application.

Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.


Note⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data and Plots

30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC Part 15C-30MHz-1GHz

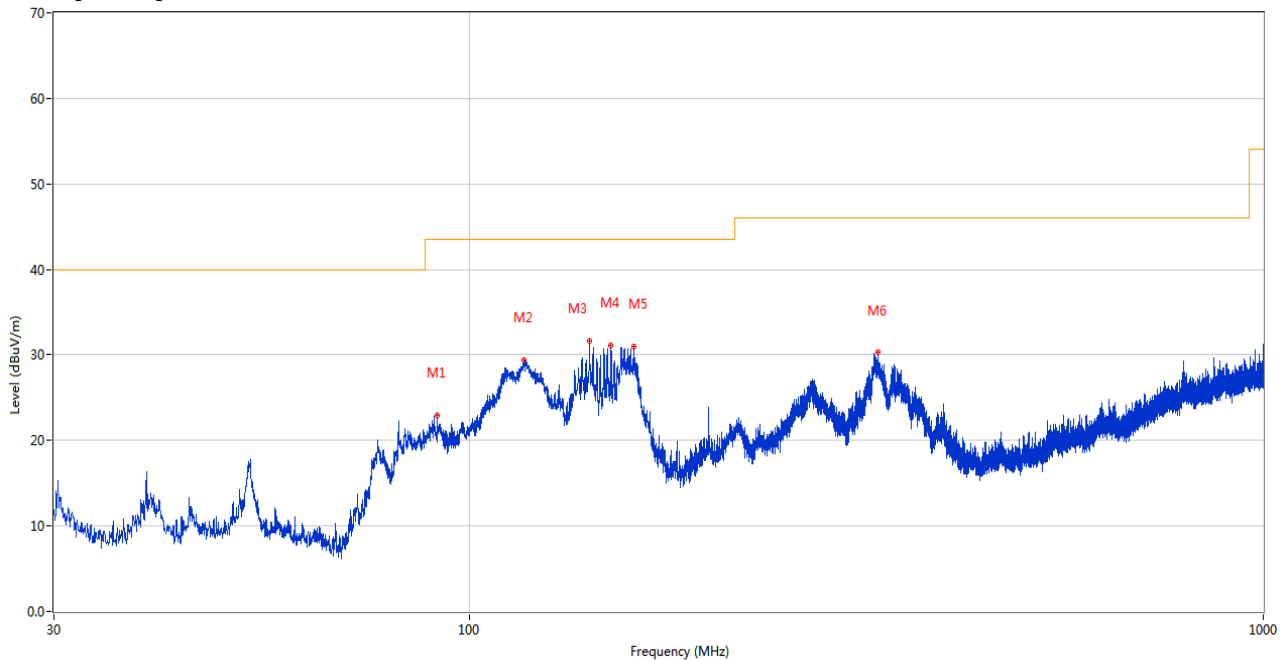

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	91.207	22.89	-30.49	43.5	20.61	Peak	114.00	200	Horizontal	Pass
2	117.106	29.46	-28.48	43.5	14.04	Peak	294.00	200	Horizontal	Pass
3	141.841	31.64	-26.46	43.5	11.86	Peak	117.00	200	Horizontal	Pass
4	150.911	31.09	-25.60	43.5	12.41	Peak	270.00	200	Horizontal	Pass
5	161.241	30.96	-25.30	43.5	12.54	Peak	263.00	200	Horizontal	Pass
6	327.450	30.26	-23.57	46.0	15.74	Peak	83.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15C_FCC Part 15C:30MHz-1GHz

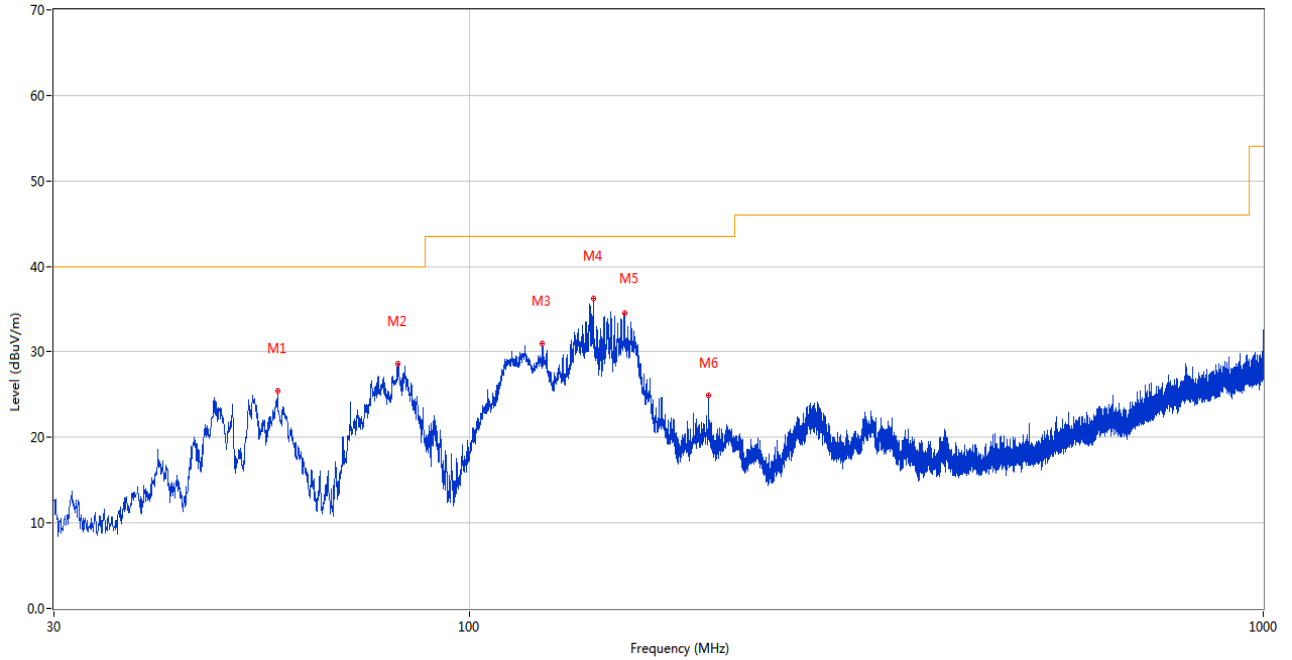

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	57.354	25.46	-27.09	40.0	14.54	Peak	174.00	100	Vertical	Pass
2	81.410	28.63	-30.28	40.0	11.37	Peak	91.00	100	Vertical	Pass
3	123.702	30.95	-27.92	43.5	12.55	Peak	216.00	100	Vertical	Pass
4	143.344	36.30	-26.32	43.5	7.20	Peak	317.00	100	Vertical	Pass
5	156.828	34.51	-25.62	43.5	8.99	Peak	319.00	100	Vertical	Pass
6	199.992	24.92	-28.77	43.5	18.58	Peak	195.00	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1337.977	41.92	74.0	32.08	Peak	99.00	400	Horizontal	Pass
1**	1337.977	29.21	54.0	24.79	AV	99.00	400	Horizontal	Pass
2	2979.156	52.06	74.0	21.94	Peak	308.00	300	Horizontal	Pass
2**	2979.156	41.55	54.0	12.45	AV	308.00	300	Horizontal	Pass
3	4913.422	48.90	74.0	25.10	Peak	348.00	200	Horizontal	Pass
3**	4913.422	38.37	54.0	15.63	AV	348.00	200	Horizontal	Pass
4	7631.430	52.55	74.0	21.45	Peak	82.00	300	Horizontal	Pass
4**	7631.430	40.41	54.0	13.59	AV	82.00	300	Horizontal	Pass
5	12478.631	54.90	74.0	19.10	Peak	9.00	300	Horizontal	Pass
5**	12478.631	43.92	54.0	10.08	AV	9.00	300	Horizontal	Pass
6	16863.916	52.70	74.0	21.30	Peak	159.00	100	Horizontal	Pass
6**	16863.916	47.86	54.0	6.14	AV	159.00	100	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1462.140	44.85	74.0	29.15	Peak	112.00	100	Vertical	Pass
1**	1462.140	35.10	54.0	18.90	AV	112.00	100	Vertical	Pass
2	2993.624	51.65	74.0	22.35	Peak	117.00	400	Vertical	Pass
2**	2993.624	41.97	54.0	12.03	AV	117.00	400	Vertical	Pass
3	4818.265	46.43	74.0	27.57	Peak	169.00	200	Vertical	Pass
3**	4818.265	40.37	54.0	13.63	AV	169.00	200	Vertical	Pass
4	7964.595	50.57	74.0	23.43	Peak	266.00	200	Vertical	Pass
4**	7964.595	43.30	54.0	10.70	AV	266.00	200	Vertical	Pass
5	12444.403	52.93	74.0	21.07	Peak	285.00	300	Vertical	Pass
5**	12444.403	44.39	54.0	9.61	AV	285.00	300	Vertical	Pass
6	17456.899	56.59	74.0	17.41	Peak	329.00	100	Vertical	Pass
6**	17456.899	43.66	54.0	10.34	AV	329.00	100	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.665	42.65	74.0	31.35	Peak	176.00	400	Horizontal	Pass
1**	1332.665	32.55	54.0	21.45	AV	176.00	400	Horizontal	Pass
2	2976.519	53.58	74.0	20.42	Peak	18.00	200	Horizontal	Pass
2**	2976.519	40.52	54.0	13.48	AV	18.00	200	Horizontal	Pass
3	4915.519	51.86	74.0	22.14	Peak	28.00	200	Horizontal	Pass
3**	4915.519	37.59	54.0	16.41	AV	28.00	200	Horizontal	Pass
4	7630.359	55.80	74.0	18.20	Peak	78.00	400	Horizontal	Pass
4**	7630.359	44.10	54.0	9.90	AV	78.00	400	Horizontal	Pass
5	12472.001	50.60	74.0	23.40	Peak	360.00	300	Horizontal	Pass
5**	12472.001	45.95	54.0	8.05	AV	360.00	300	Horizontal	Pass
6	16860.266	52.80	74.0	21.20	Peak	169.00	300	Horizontal	Pass
6**	16860.266	47.90	54.0	6.10	AV	169.00	300	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1466.564	42.17	74.0	31.83	Peak	125.00	300	Vertical	Pass
1**	1466.564	32.97	54.0	21.03	AV	125.00	300	Vertical	Pass
2	2993.177	52.48	74.0	21.52	Peak	166.00	300	Vertical	Pass
2**	2993.177	42.52	54.0	11.48	AV	166.00	300	Vertical	Pass
3	4818.259	47.84	74.0	26.16	Peak	168.00	200	Vertical	Pass
3**	4818.259	38.22	54.0	15.78	AV	168.00	200	Vertical	Pass
4	7963.798	52.15	74.0	21.85	Peak	204.00	400	Vertical	Pass
4**	7963.798	46.13	54.0	7.87	AV	204.00	400	Vertical	Pass
5	12442.422	55.41	74.0	18.59	Peak	335.00	100	Vertical	Pass
5**	12442.422	43.77	54.0	10.23	AV	335.00	100	Vertical	Pass
6	17459.075	56.12	74.0	17.88	Peak	139.00	400	Vertical	Pass
6**	17459.075	46.89	54.0	7.11	AV	139.00	400	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1336.751	43.09	74.0	30.91	Peak	311.00	200	Horizontal	Pass
1**	1336.751	31.05	54.0	22.95	AV	311.00	200	Horizontal	Pass
2	2979.312	49.39	74.0	24.61	Peak	30.00	400	Horizontal	Pass
2**	2979.312	40.14	54.0	13.86	AV	30.00	400	Horizontal	Pass
3	4913.007	47.76	74.0	26.24	Peak	90.00	200	Horizontal	Pass
3**	4913.007	38.90	54.0	15.10	AV	90.00	200	Horizontal	Pass
4	7631.023	54.92	74.0	19.08	Peak	204.00	300	Horizontal	Pass
4**	7631.023	44.01	54.0	9.99	AV	204.00	300	Horizontal	Pass
5	12478.420	53.67	74.0	20.33	Peak	211.00	100	Horizontal	Pass
5**	12478.420	42.51	54.0	11.49	AV	211.00	100	Horizontal	Pass
6	16858.000	56.45	74.0	17.55	Peak	204.00	200	Horizontal	Pass
6**	16858.000	42.88	54.0	11.12	AV	204.00	200	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1464.397	44.45	74.0	29.55	Peak	128.00	200	Vertical	Pass
1**	1464.397	33.91	54.0	20.09	AV	128.00	200	Vertical	Pass
2	2989.956	52.27	74.0	21.73	Peak	233.00	400	Vertical	Pass
2**	2989.956	43.61	54.0	10.39	AV	233.00	400	Vertical	Pass
3	4824.777	51.47	74.0	22.53	Peak	300.00	200	Vertical	Pass
3**	4824.777	37.40	54.0	16.60	AV	300.00	200	Vertical	Pass
4	7964.863	56.07	74.0	17.93	Peak	213.00	200	Vertical	Pass
4**	7964.863	43.49	54.0	10.51	AV	213.00	200	Vertical	Pass
5	12447.942	56.14	74.0	17.86	Peak	121.00	300	Vertical	Pass
5**	12447.942	45.50	54.0	8.50	AV	121.00	300	Vertical	Pass
6	17454.183	57.82	74.0	16.18	Peak	26.00	400	Vertical	Pass
6**	17454.183	47.73	54.0	6.27	AV	26.00	400	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1288.616	43.48	74.0	30.52	Peak	225.00	200	Horizontal	Pass
1**	1288.616	32.73	54.0	21.27	AV	225.00	200	Horizontal	Pass
2	2773.826	50.71	74.0	23.29	Peak	265.00	300	Horizontal	Pass
2**	2773.826	44.11	54.0	9.89	AV	265.00	300	Horizontal	Pass
3	5164.450	52.16	74.0	21.84	Peak	275.00	200	Horizontal	Pass
3**	5164.450	45.29	54.0	8.71	AV	275.00	200	Horizontal	Pass
4	6803.343	57.54	74.0	16.46	Peak	25.00	100	Horizontal	Pass
4**	6803.343	46.27	54.0	7.73	AV	25.00	100	Horizontal	Pass
5	13467.461	52.88	74.0	21.12	Peak	7.00	300	Horizontal	Pass
5**	13467.461	47.48	54.0	6.52	AV	7.00	300	Horizontal	Pass
6	17465.095	54.66	74.0	19.34	Peak	253.00	300	Horizontal	Pass
6**	17465.095	45.39	54.0	8.61	AV	253.00	300	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1280.015	42.49	74.0	31.51	Peak	22.00	100	Vertical	Pass
1**	1280.015	33.90	54.0	20.10	AV	22.00	100	Vertical	Pass
2	2769.511	56.71	74.0	17.29	Peak	86.00	200	Vertical	Pass
2**	2769.511	43.93	54.0	10.07	AV	86.00	200	Vertical	Pass
3	5166.760	55.83	74.0	18.17	Peak	352.00	200	Vertical	Pass
3**	5166.760	45.94	54.0	8.06	AV	352.00	200	Vertical	Pass
4	6806.776	53.67	74.0	20.33	Peak	3.00	200	Vertical	Pass
4**	6806.776	42.85	54.0	11.15	AV	3.00	200	Vertical	Pass
5	13465.548	53.44	74.0	20.56	Peak	82.00	400	Vertical	Pass
5**	13465.548	43.03	54.0	10.97	AV	82.00	400	Vertical	Pass
6	17462.659	60.89	74.0	13.11	Peak	253.00	200	Vertical	Pass
6**	17462.659	45.62	54.0	8.38	AV	253.00	200	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1287.495	43.18	74.0	30.82	Peak	352.00	100	Horizontal	Pass
1**	1287.495	31.65	54.0	22.35	AV	352.00	100	Horizontal	Pass
2	2772.858	49.48	74.0	24.52	Peak	52.00	400	Horizontal	Pass
2**	2772.858	44.26	54.0	9.74	AV	52.00	400	Horizontal	Pass
3	5169.421	50.64	74.0	23.36	Peak	140.00	200	Horizontal	Pass
3**	5169.421	43.26	54.0	10.74	AV	140.00	200	Horizontal	Pass
4	6804.921	54.06	74.0	19.94	Peak	79.00	200	Horizontal	Pass
4**	6804.921	45.47	54.0	8.53	AV	79.00	200	Horizontal	Pass
5	13470.343	53.31	74.0	20.69	Peak	253.00	100	Horizontal	Pass
5**	13470.343	43.61	54.0	10.39	AV	253.00	100	Horizontal	Pass
6	17467.182	53.58	74.0	20.42	Peak	266.00	200	Horizontal	Pass
6**	17467.182	46.37	54.0	7.63	AV	266.00	200	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1286.022	42.74	74.0	31.26	Peak	253.00	300	Vertical	Pass
1**	1286.022	31.95	54.0	22.05	AV	253.00	300	Vertical	Pass
2	2773.894	54.19	74.0	19.81	Peak	218.00	100	Vertical	Pass
2**	2773.894	43.09	54.0	10.91	AV	218.00	100	Vertical	Pass
3	5167.966	57.80	74.0	16.20	Peak	199.00	200	Vertical	Pass
3**	5167.966	40.79	54.0	13.21	AV	199.00	200	Vertical	Pass
4	6807.460	51.63	74.0	22.37	Peak	97.00	200	Vertical	Pass
4**	6807.460	45.16	54.0	8.84	AV	97.00	200	Vertical	Pass
5	13467.320	50.71	74.0	23.29	Peak	178.00	100	Vertical	Pass
5**	13467.320	40.25	54.0	13.75	AV	178.00	100	Vertical	Pass
6	17465.029	58.50	74.0	15.50	Peak	129.00	400	Vertical	Pass
6**	17465.029	49.92	54.0	4.08	AV	129.00	400	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1289.584	44.29	74.0	29.71	Peak	117.00	400	Horizontal	Pass
1**	1289.584	36.05	54.0	17.95	AV	117.00	400	Horizontal	Pass
2	2768.654	50.11	74.0	23.89	Peak	142.00	400	Horizontal	Pass
2**	2768.654	40.99	54.0	13.01	AV	142.00	400	Horizontal	Pass
3	5168.223	53.45	74.0	20.55	Peak	285.00	200	Horizontal	Pass
3**	5168.223	45.89	54.0	8.11	AV	285.00	200	Horizontal	Pass
4	6804.170	54.70	74.0	19.30	Peak	74.00	400	Horizontal	Pass
4**	6804.170	42.99	54.0	11.01	AV	74.00	400	Horizontal	Pass
5	13464.592	57.81	74.0	16.19	Peak	194.00	100	Horizontal	Pass
5**	13464.592	42.70	54.0	11.30	AV	194.00	100	Horizontal	Pass
6	17469.212	56.52	74.0	17.48	Peak	224.00	300	Horizontal	Pass
6**	17469.212	48.57	54.0	5.43	AV	224.00	300	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.306	43.98	74.0	30.02	Peak	348.00	100	Vertical	Pass
1**	1284.306	31.51	54.0	22.49	AV	348.00	100	Vertical	Pass
2	2768.408	56.36	74.0	17.64	Peak	267.00	400	Vertical	Pass
2**	2768.408	47.50	54.0	6.50	AV	267.00	400	Vertical	Pass
3	5167.954	51.93	74.0	22.07	Peak	97.00	200	Vertical	Pass
3**	5167.954	42.13	54.0	11.87	AV	97.00	200	Vertical	Pass
4	6802.242	55.68	74.0	18.32	Peak	216.00	400	Vertical	Pass
4**	6802.242	47.14	54.0	6.86	AV	216.00	400	Vertical	Pass
5	13465.004	51.69	74.0	22.31	Peak	4.00	100	Vertical	Pass
5**	13465.004	44.98	54.0	9.02	AV	4.00	100	Vertical	Pass
6	17459.969	58.44	74.0	15.56	Peak	267.00	300	Vertical	Pass
6**	17459.969	49.96	54.0	4.04	AV	267.00	300	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note⁴: The Level (dBuV/m) has been corrected by factor.

Test Data

GFSK LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2351.000	55.34	74.0	18.66	Peak	242.00	200	Horizontal	Pass
1**	2351.000	43.27	54.0	10.73	AV	242.00	200	Horizontal	Pass
2	2389.833	53.13	74.0	20.87	Peak	211.00	100	Horizontal	Pass
2**	2389.833	42.66	54.0	11.34	AV	211.00	100	Horizontal	Pass

GFSK HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.93	74.0	19.07	Peak	243.00	200	Horizontal	Pass
1**	2483.500	43.82	54.0	10.18	AV	243.00	200	Horizontal	Pass
2	2492.000	55.72	74.0	18.28	Peak	360.00	100	Horizontal	Pass
2**	2492.000	43.69	54.0	10.31	AV	360.00	100	Horizontal	Pass

8-DPSK LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2330.500	55.44	74.0	18.56	Peak	265.00	100	Horizontal	Pass
1**	2330.500	43.37	54.0	10.63	AV	265.00	100	Horizontal	Pass
2	2389.833	54.10	74.0	19.90	Peak	213.00	150	Horizontal	Pass
2**	2389.833	42.88	54.0	11.12	AV	213.00	150	Horizontal	Pass

8-DPSK HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.63	74.0	19.37	Peak	74.00	200	Horizontal	Pass
1**	2483.500	43.48	54.0	10.52	AV	74.00	200	Horizontal	Pass
2	2491.800	55.76	74.0	18.24	Peak	282.00	100	Horizontal	Pass
2**	2491.800	43.63	54.0	10.37	AV	282.00	100	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2550017-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2550017-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2550017-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--