



**MOBILE DEVICES BUSINESS**

**PRODUCT SAFETY AND COMPLIANCE  
EMC LABORATORY**

**EMC TEST REPORT - Addendum**

**Test Report Number** – 23314-1 BT

**Report Date** – 2009-09-29

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

Signature:

Name: Lei Yang

Title: EMC Project Manager

Test: 2009-08-26 to 2009-09-28

As the responsible test lab manager, I hereby declare that the model tested as specified in this report conforms to the requirements indicated.

Signature:

Name: Yilin Zhao

Title: Test Lab Manager

Date: 2009-10-27

This report must not be reproduced, except in full, without written approval from this laboratory.

FCC Registration Number: 177885  
IC Registration Number: 109AW-1

ADR Testing Service location ADR BJ  
ISO/IEC-17025:2005 accredited by UKAS



## **Table of Contents**

Test Report Details .....	3
Applicable Standards .....	3
Summary of Testing .....	4
General and Special Conditions .....	4
Equipment and Cable Configurations .....	5
Measuring Equipment and Calibration Information .....	5
Description of Bluetooth Transmitter .....	5
CARRIER FREQUENCY SEPARATION .....	6
Measurement Procedure .....	6
Measurement Results .....	6
NUMBER OF HOPPING FREQUENCIES .....	8
Measurement Procedure .....	8
Measurement Results .....	8
TIME OF OCCUPANCY (DWELL TIME) .....	10
Measurement Procedure .....	10
Measurement Results .....	10
20dB Bandwidth .....	12
Measurement Procedure .....	12
Measurement Results .....	12
PEAK OUTPUT POWER .....	14
Measurement Procedure .....	14
Measurement Results .....	14
BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS .....	18
Measurement Procedure .....	18
Measurement Results .....	18
SPURIOUS RF CONDUCTED EMISSIONS .....	23
Measurement Procedure .....	23
Measurement Results .....	23
AC LINE CONDUCTED .....	30
Measurement Procedure .....	30
Measurement Results .....	30

**Test Report Details**

Tests Performed By: Motorola (China) Technologies Ltd.  
Asia Global Compliance Labs  
No.1 Wang Jing East Road  
Chao Yang District  
Beijing, 100102, P. R. China  
Phone: +86 10 8473 2610  
FCC Registration Number: 177885  
IC Registration Number: 109AW-1

Tests Requested By: Motorola Inc.  
Mobile Devices business  
600 North US Hwy 45  
Libertyville, IL 60048

Product Type: Cell phone with embedded Bluetooth

Signaling Capability: WCDMA 850/1900/2100, GSM  
850/900/1800/1900, HSDPA 7.2 Mbps  
(Category 7/8), HSUPA 5.76 Mbps (Category  
6), EDGE Class 12, GPRS Class 12, aGPS,  
Bluetooth Version 2.0, 802.11b/802.11g

IMEI: 004401027324629

FCC ID: IHDP56KD1

Project number: 23314-1

Testing Complete Date: 09-28-2009

**Applicable Standards**

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

  X   Part 15 Subpart C – Intentional Radiators

Applicable Standards: ANSI C63.4-2003, RSS-Gen Issue 2, RSS-210 Issue 7.

DA 00-705, “Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems” published by the Federal Communications Commission was also used in the testing of this product.

**Summary of Testing**

Test	Test Name	Pass/Fail
1	Carrier Frequency Separation	Pass
2	Number of Hopping Frequencies	Pass
3	Time of Occupancy (Dwell Time)	Pass
4	20 dB Bandwidth	Pass
5	Spurious RF Conducted Emissions	Pass
6	Max Power	N/A
7	Band Edges	Pass
8	AC Line Conducted Spurious Emissions	Pass

Test	Test Name	Results
1	Carrier Frequency Separation	1.00 MHz
2	Number of Hopping	79
3	Time of Occupancy (Dwell Time)	2.9 ms
4	20 dB Bandwidth	See plots
5	Spurious RF Conducted Emissions	See plots
6	Max Power	See plots
7	Band Edges	See plots
8	AC Line Conducted Spurious Emissions	See plots

**General and Special Conditions**

The Cellular Phone hereinafter referred to as the Equipment under Test or EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment. The temperature and the relative humidity were maintained within the ANSI C63.4-2003 Standard requirements during the entire duration of testing.

## **Equipment and Cable Configurations**

The EUT was tested in a stand-alone configuration that is representative of typical use.

## **Measuring Equipment and Calibration Information**

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde Schwarz	Receiver	ESU40	100036	12/11/09
Rohde Schwarz	Receiver	ESCI	100650	12/11/09
Agilent	Attenuator	8491A	MY39263202	03/03/10
Rohde Schwarz	LISN	ENV216	100055	12/19/09

All test equipment was within their calibration date during the time of testing. When equipment went out of calibration during testing it was replaced using a similar piece of calibrated equipment. All these equipments are listed in the equipment list. All equipment is on a one-year calibration cycle.

## **Description of Bluetooth Transmitter**

The EUT offers Bluetooth as a feature. The Bluetooth spread-spectrum, frequency hopping transceiver is designed to operate between 2402 and 2480 MHz. The Bluetooth antenna is mounted inside of the EUT. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a Bluetooth transmitter, it is designed operate with other Bluetooth devices as defined by the industrial standard. In this application, the device is battery operated. The Bluetooth transmitter supports Bluetooth version 2.0.

## **Measurement Procedures and Data**

### **CARRIER FREQUENCY SEPARATION**

CFR 47 Part 15.247

#### **Measurement Procedure**

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 3dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth transmitter of the EUT had its hopping function enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span
3. Video (or Average) Bandwidth (VBW)  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

#### **Measurement Results**

See attached.

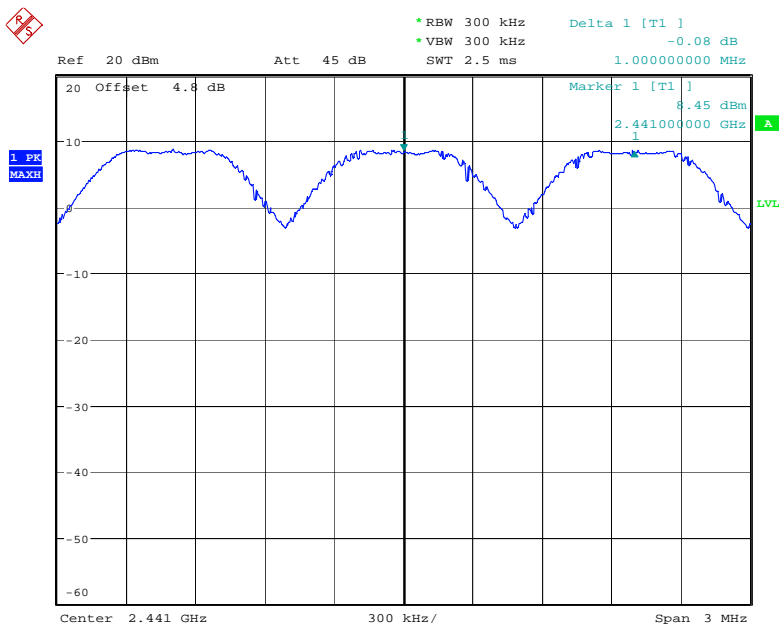

Date: 15.SEP.2009 07:31:27

Carrier Frequency Separation

**NUMBER OF HOPPING FREQUENCIES**

CFR 47 Part 15.247

**Measurement Procedure**

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 3dB passive attenuator. A fully charged battery was used for the supply voltage.

The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:


1. Span = the frequency band of operation
2. RBW  $\geq$  1% of the span
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize.

**Measurement Results**


See attached.



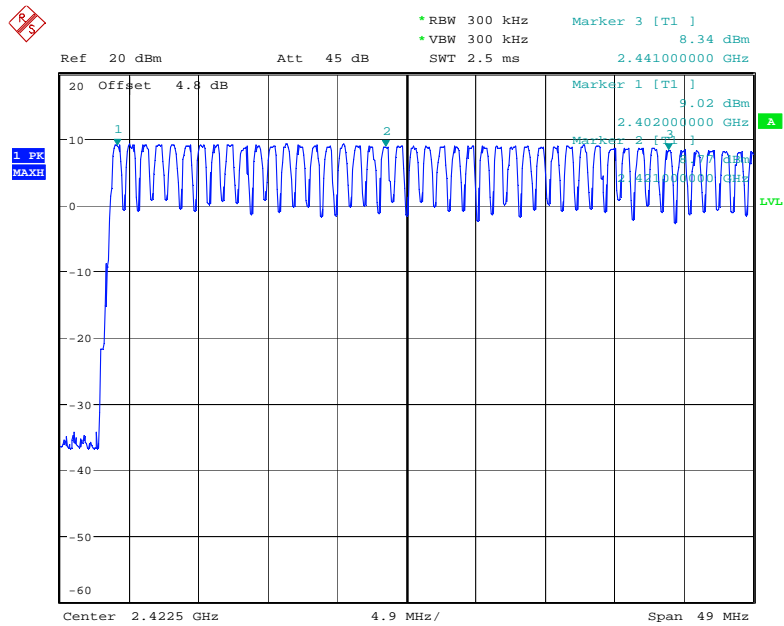

Date: 15.SEP.2009 07:35:34

## Number of Hopping Frequencies (Channels 0 – 39)

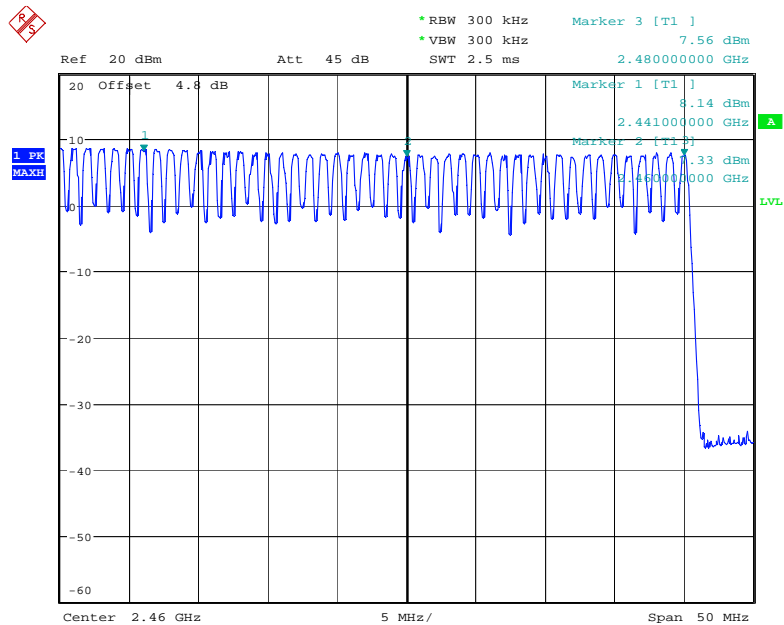

Date: 15.SEP.2009 07:38:01

## Number of Hopping Frequencies (Channels 39 – 78)

**TIME OF OCCUPANCY (DWELL TIME)**

CFR47 Part 15.247

**Measurement Procedure**

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 3dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW  $\geq$  RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.

**Measurement Results**

See attached

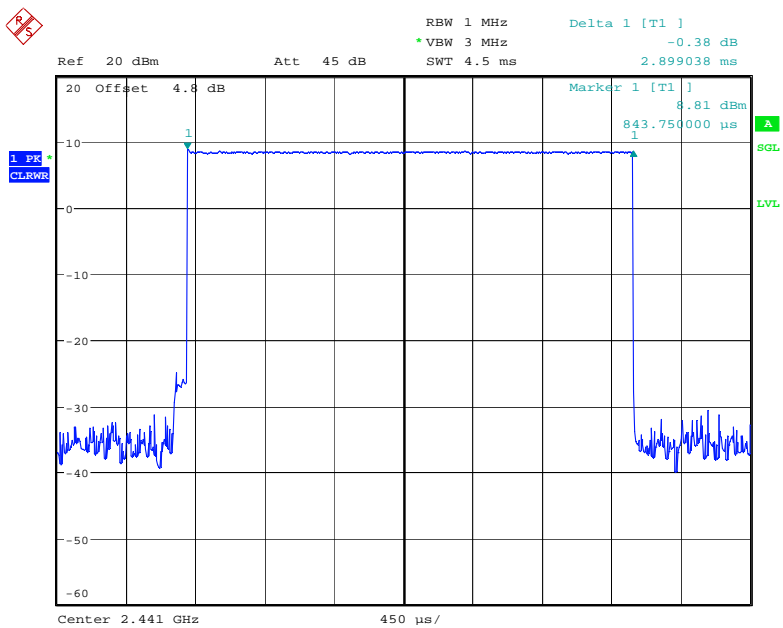

Date: 15.SEP.2009 07:41:27

Dwell Time

**20dB Bandwidth**

CFR 47 Part 15.247

**Measurement Procedure**

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 3dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth frequency hopping function of the EUT was disabled. The spectrum analyzer used the following settings:

1. Span = 2MHz, centered on the center channel frequency
2. RBW  $\geq$  1% of the 20dB span
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The n dB down function was used to measure 20dB down one side of the emission. The n dB down function and marker was moved to the other side of the emission until it was even with the reference marker. The 20 dB down reading at this point was the 20dB bandwidth of the emission.


**Measurement Results**

See attached

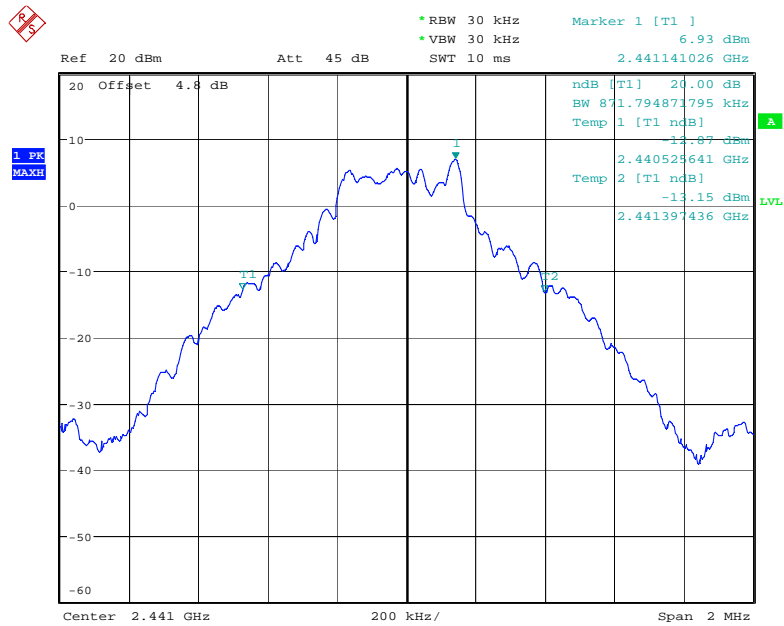

Date: 15.SEP.2009 07:44:21

## 20dB Bandwidth

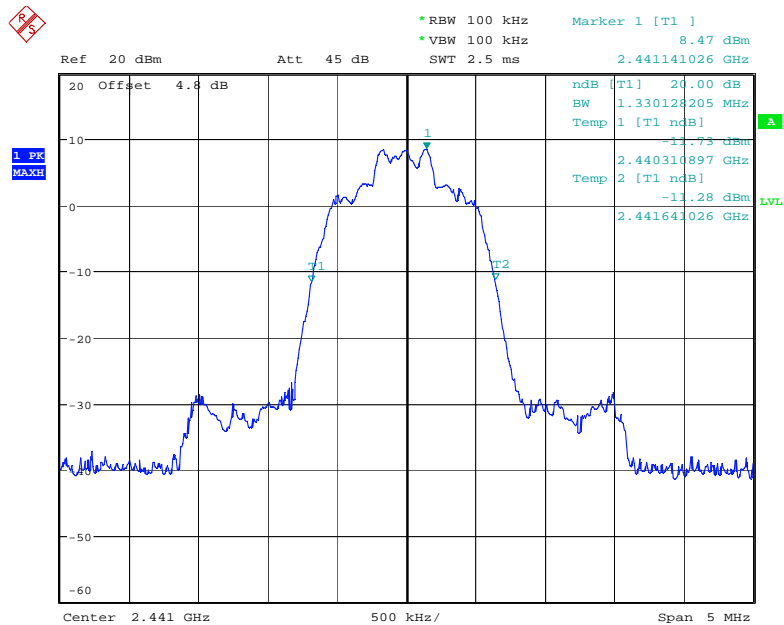

Date: 15.SEP.2009 07:46:46

## 20dB Bandwidth EDR Mode

## PEAK OUTPUT POWER


CFR 47 Part 15.247

### Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 3dB passive attenuator. A fully charged battery was used for the supply voltage. The peak output power was measured with the Hopping mode disabled.


### Measurement Results

See Attached

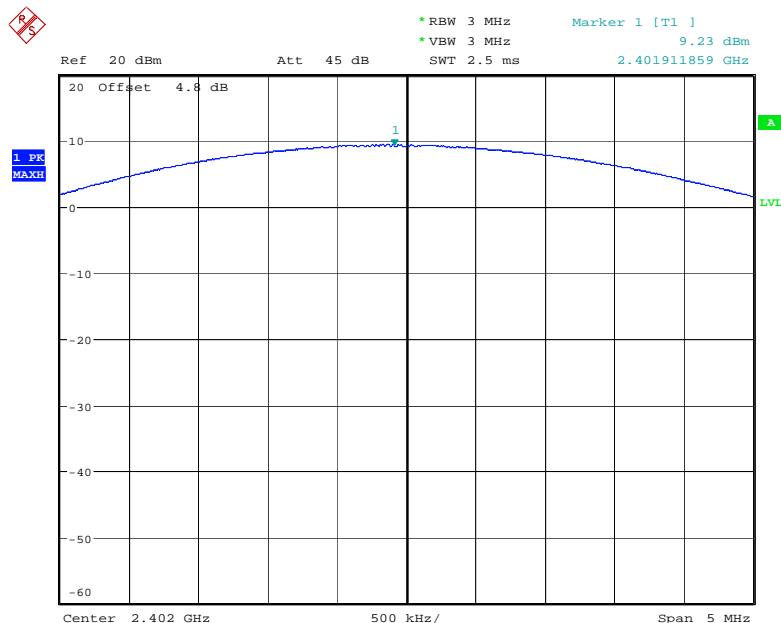


Date: 15.SEP.2009 07:48:17

### Peak Output Power – Low Channel

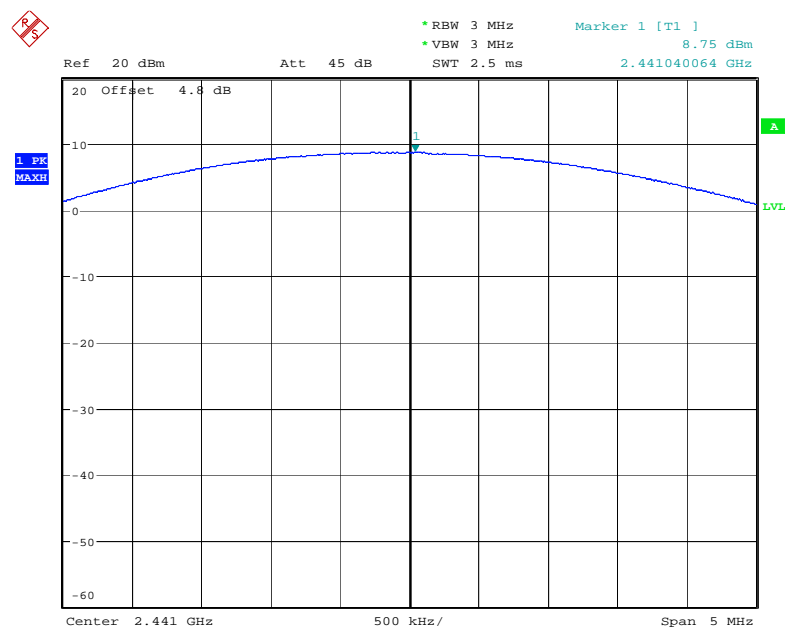


Date:
 15.SEP.2009 07:48:58

Peak Output Power – Mid Channel

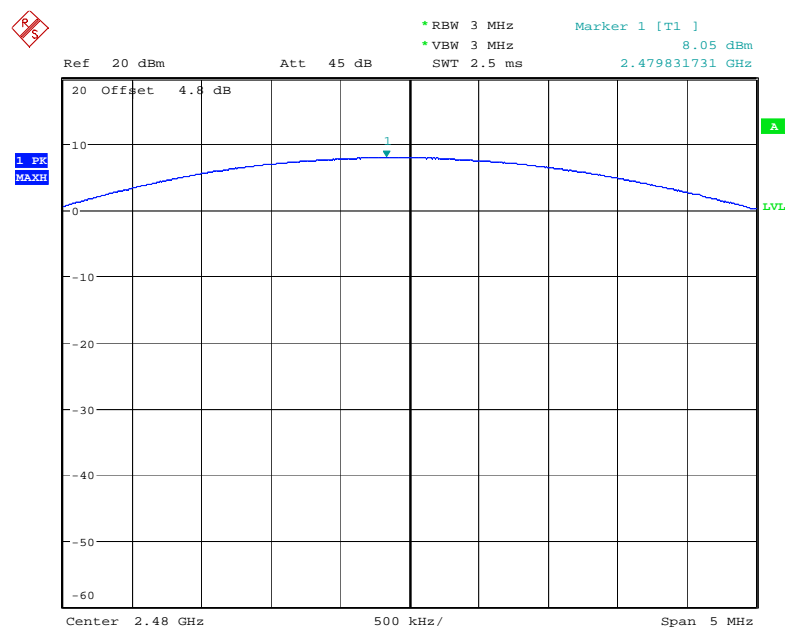


Date:
 15.SEP.2009 07:49:57

Peak Output Power – High Channel

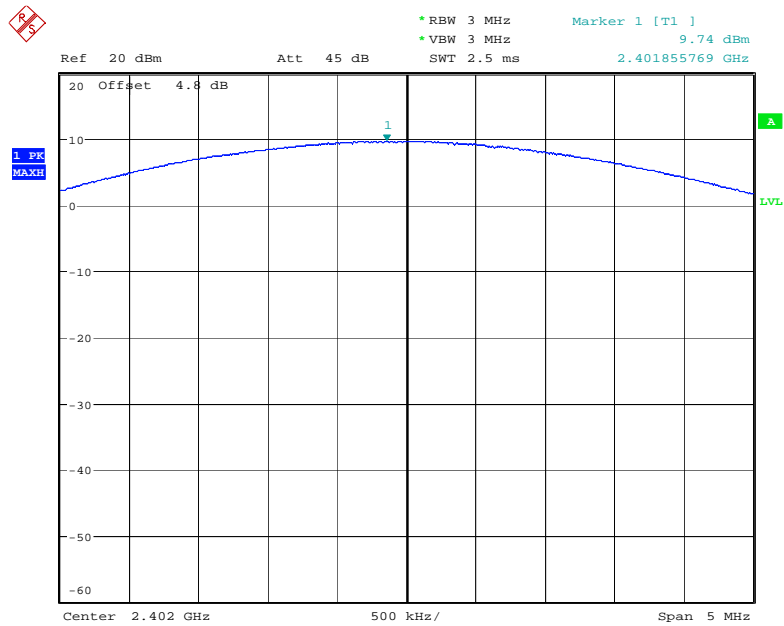

Date: 15.SEP.2009 07:52:37


## Peak Output Power EDR Mode – Low Channel

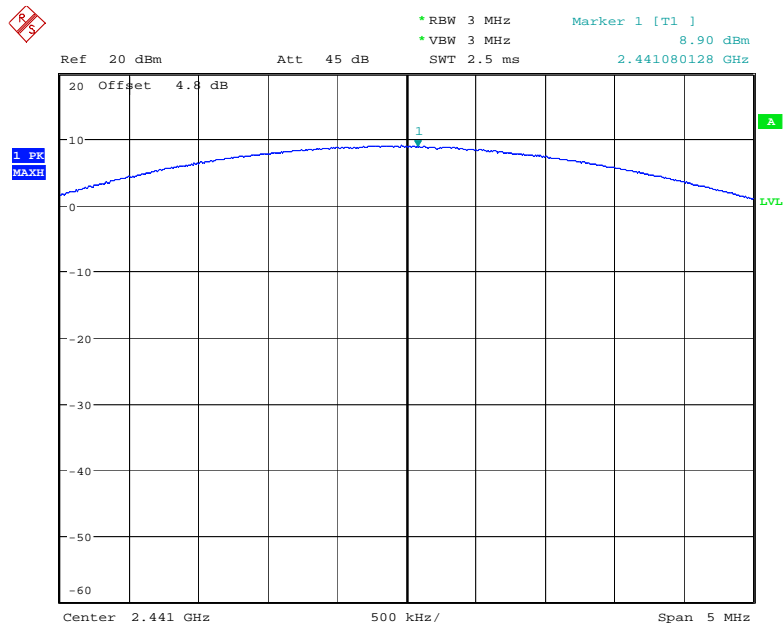

Date: 15.SEP.2009 07:51:35

## Peak Output Power EDR Mode – Mid Channel



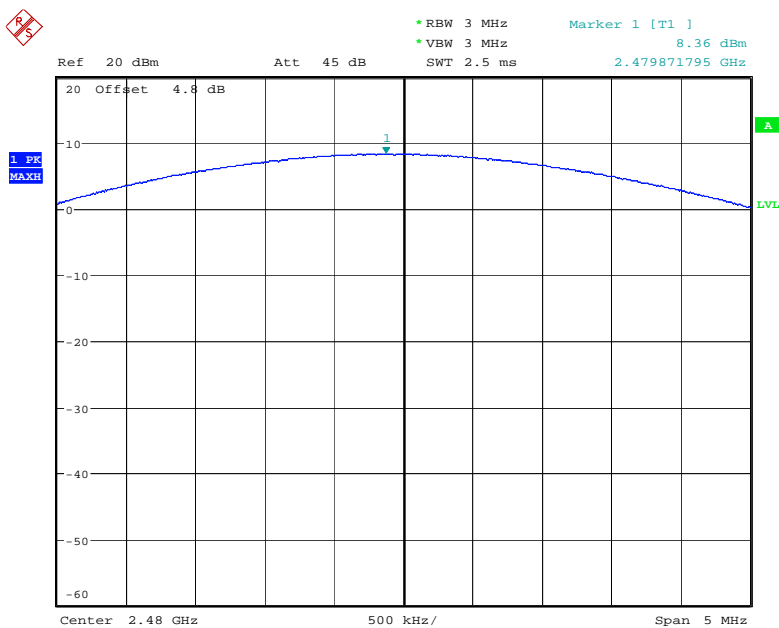

Date: 15.SEP.2009 07:50:57

Peak Output Power EDR Mode – High Channel

## **BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS**


CFR 47 Part 15.247

### **Measurement Procedure**

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 3dB passive attenuator. A fully charged battery was used for the supply voltage.


### **Measurement Results**

See Attached:

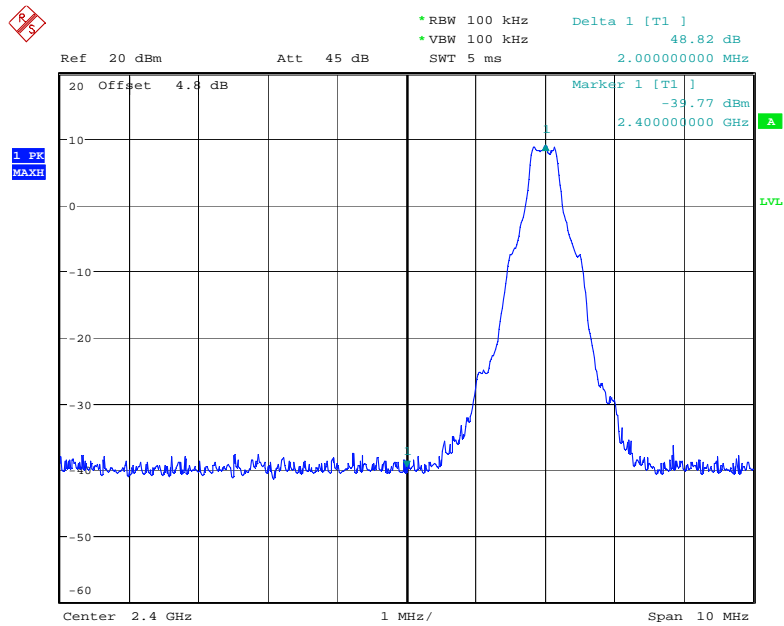


Date: 15.SEP.2009 07:59:10

## Low Band edge with Hopping Disabled

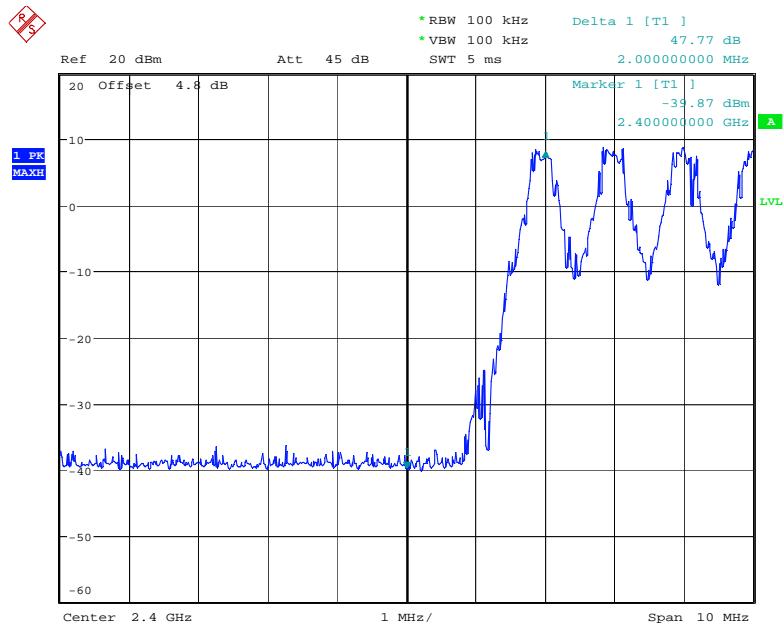


Date: 15.SEP.2009 07:58:34

## Low Band edge with Hopping Enabled

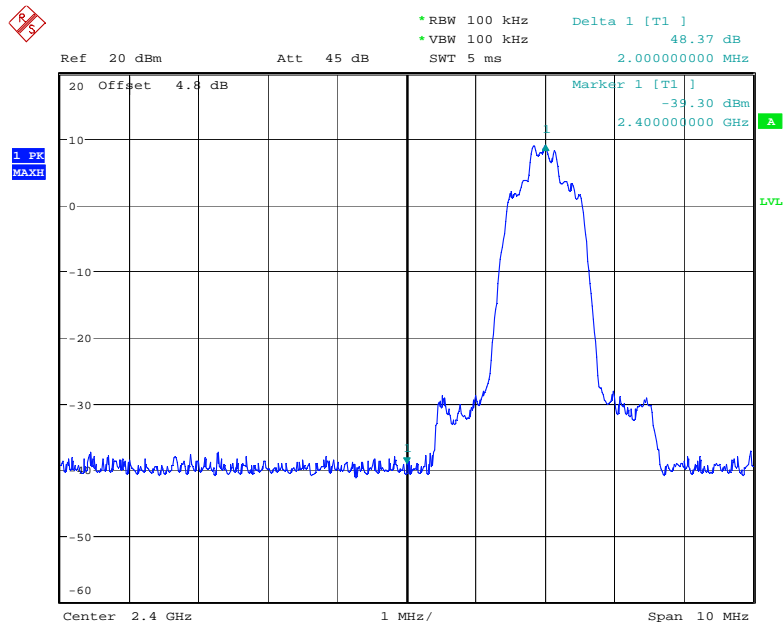


Date: 15.SEP.2009 07:55:01

### Low Band Edge with Hopping Disabled (EDR MODE)

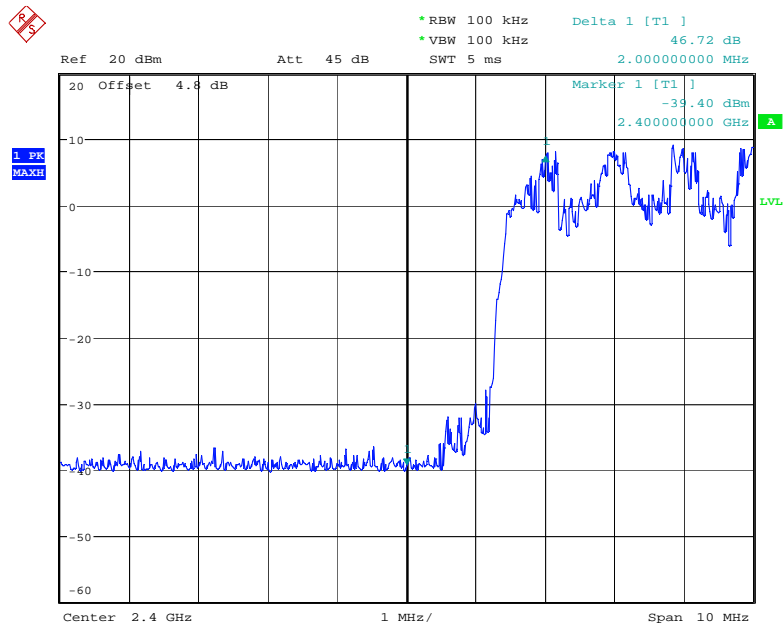


Date: 15.SEP.2009 07:56:49

### Low Band Edge with Hopping Enabled (EDR MODE)

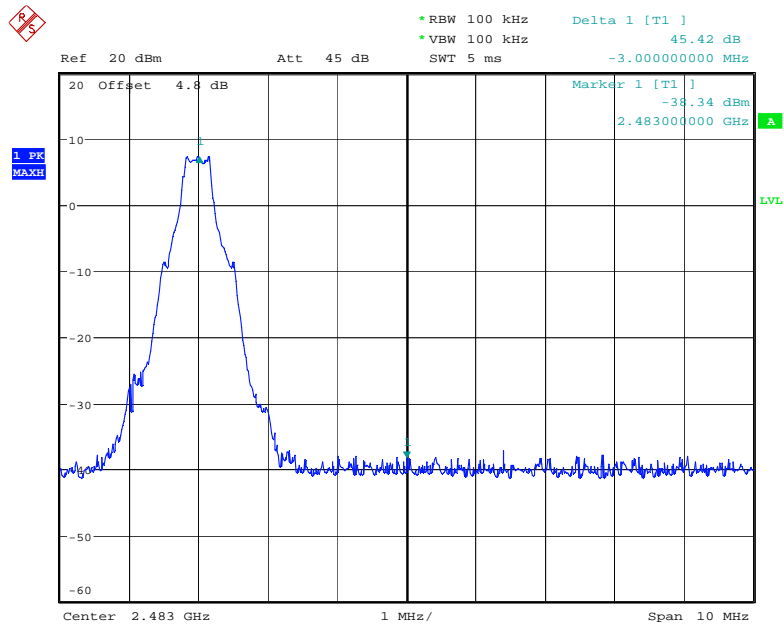


Date: 15.SEP.2009 08:00:52

## High Band edge with Hopping Disabled

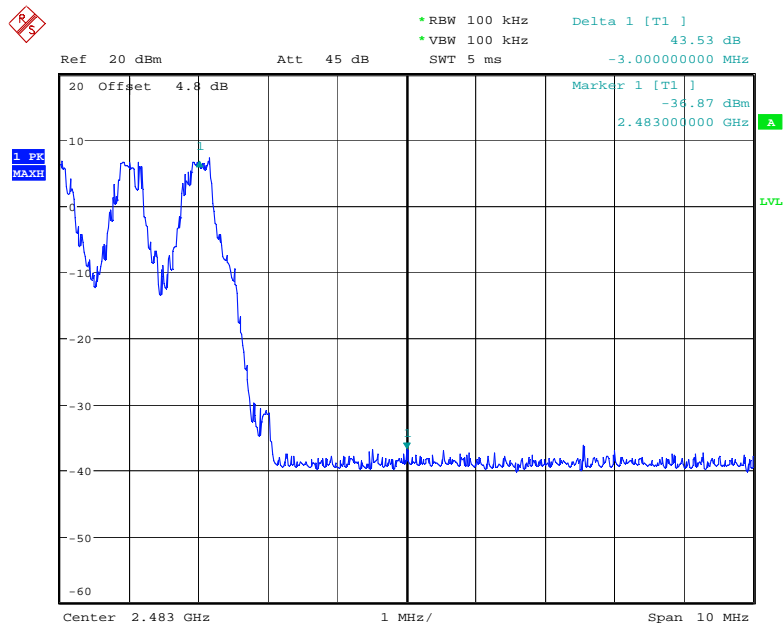


Date: 15.SEP.2009 08:02:31

## High Band edge with Hopping Enabled

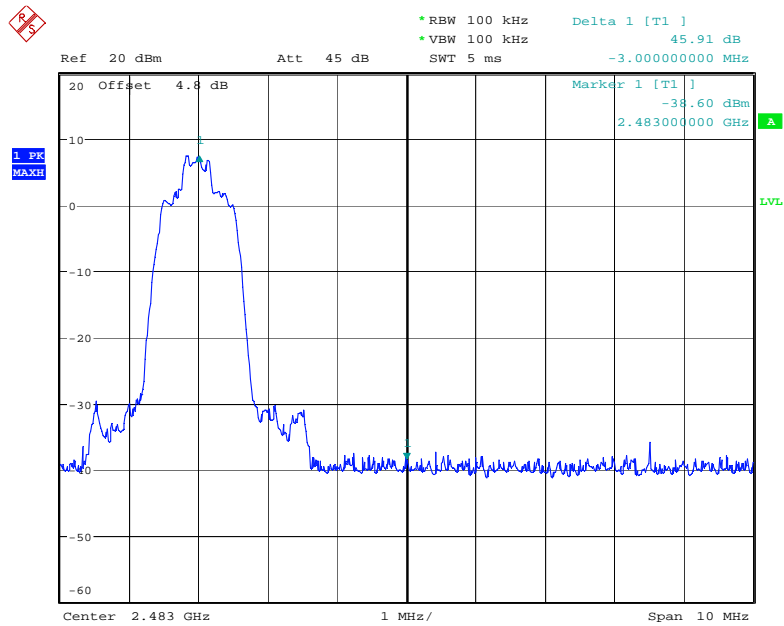

Date: 15.SEP.2009 08:04:46

## High Band Edge with Hopping Disabled (EDR MODE)

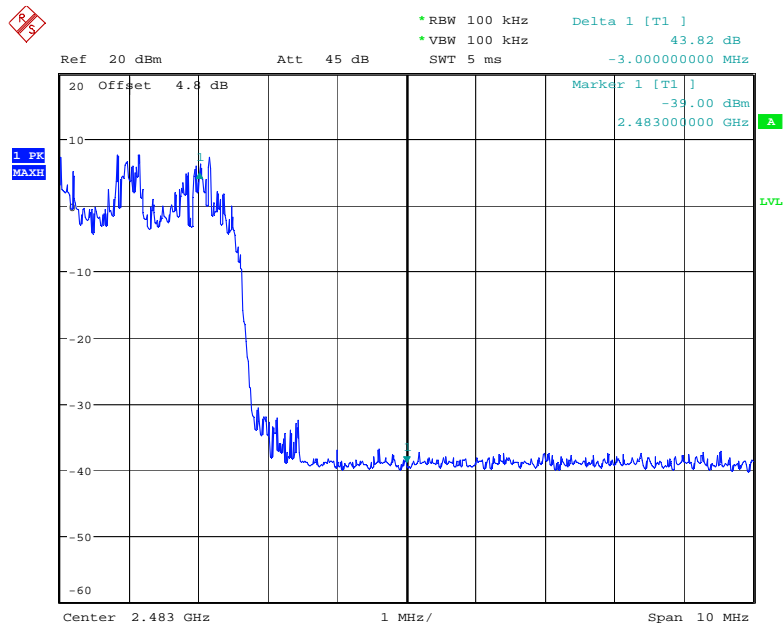

Date: 15.SEP.2009 08:04:07

## High Band Edge with Hopping Enabled (EDR MODE)

## **SPURIOUS RF CONDUCTED EMISSIONS**


CFR 47 Part 15.247

### **Measurement Procedure**

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 3dB passive attenuator. A fully charged battery was used for the supply voltage.


### **Measurement Results**

See attached:

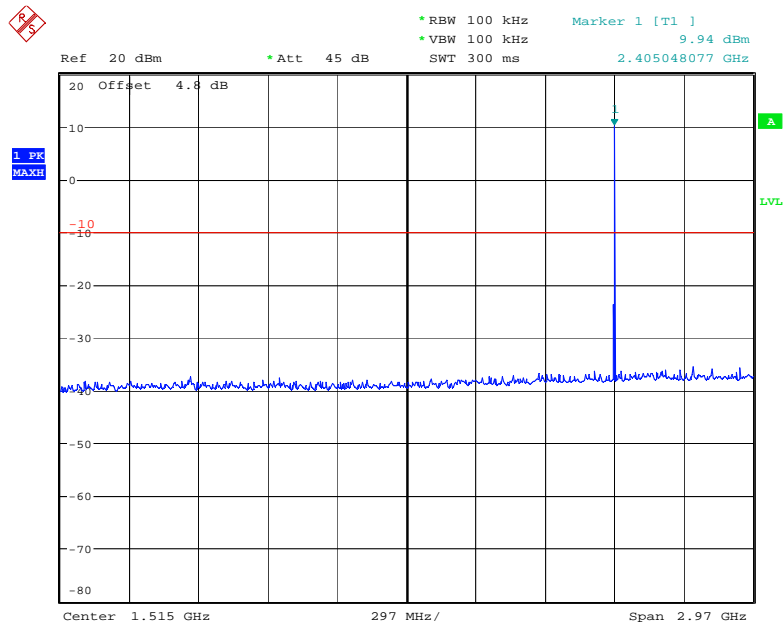

Date: 29.SEP.2009 08:35:52


## Conducted Spurious Emissions 30-3000MHz (Low Channel Enabled)

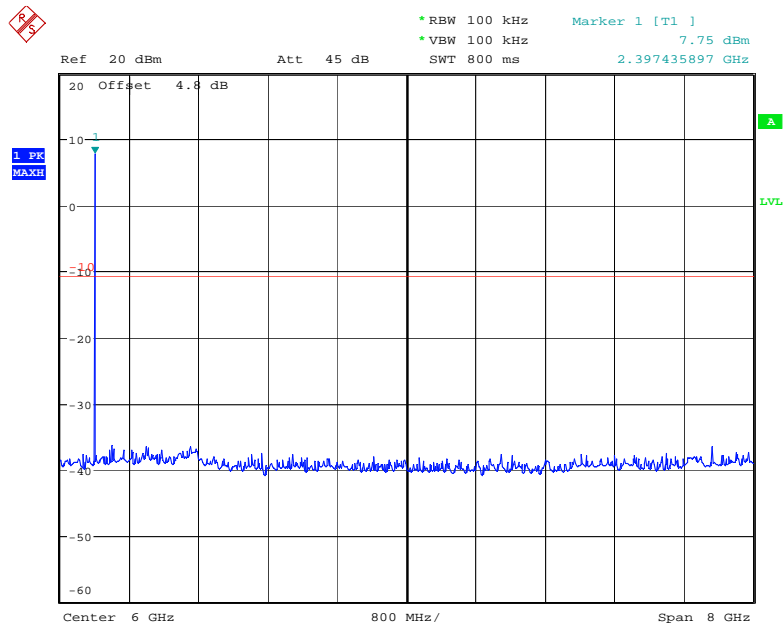

Date: 15.SEP.2009 08:14:44


## Conducted Spurious Emissions 2-10GHz (Low Channel Enabled)



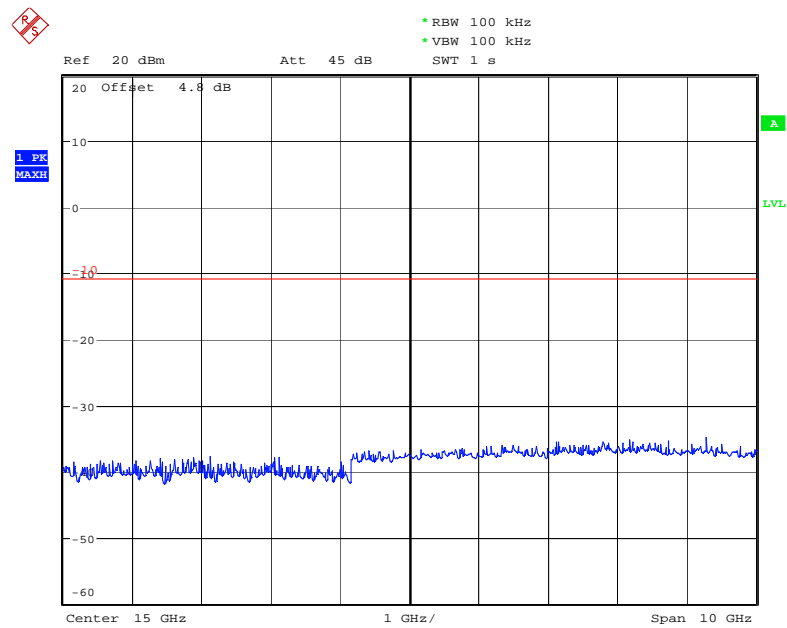


Date:
 15.SEP.2009 08:17:50

Conducted Spurious Emissions 10-20GHz (Low Channel Enabled)

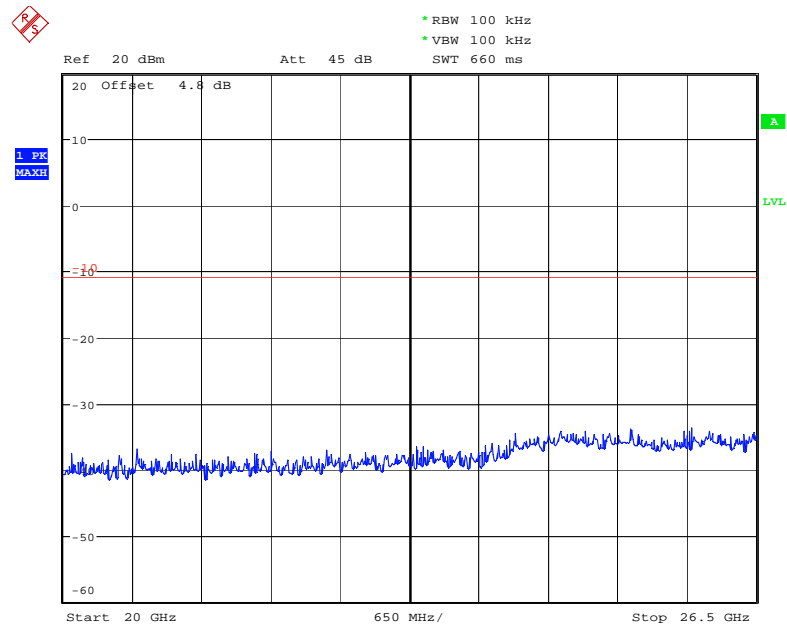


Date:
 15.SEP.2009 08:18:12

Conducted Spurious Emissions 20-26.5GHz (Low Channel Enabled)

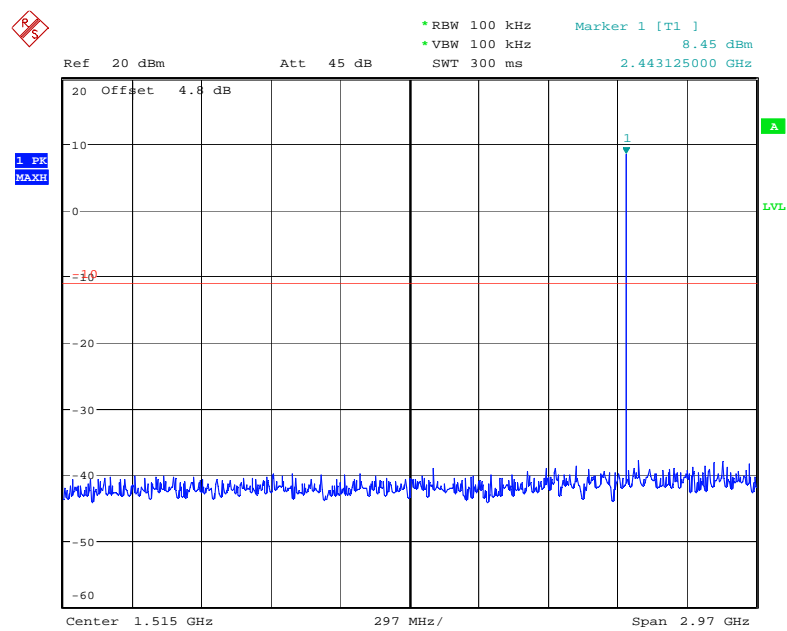


Date: 15.SEP.2009 08:23:28

Conducted Spurious Emissions 30-3000MHz (Mid Channel Enabled)

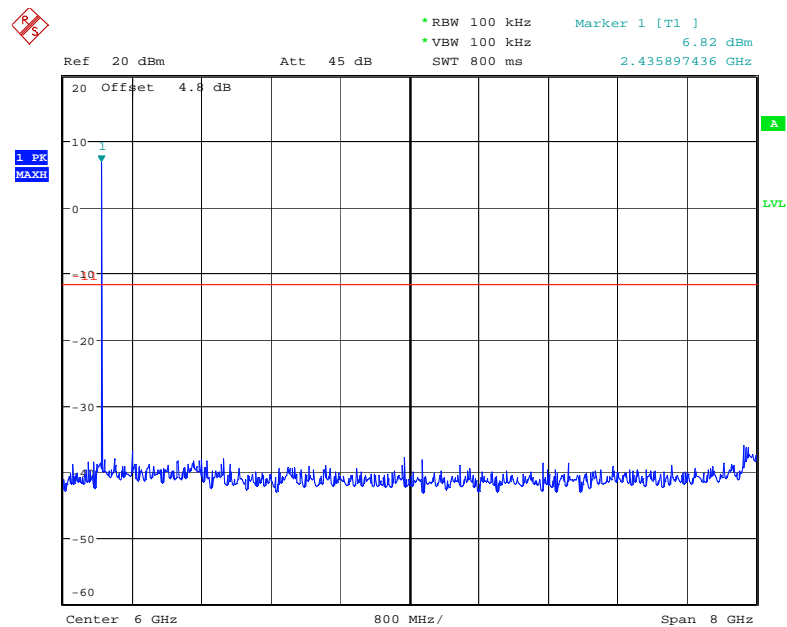


Date: 15.SEP.2009 08:25:29

Conducted Spurious Emissions 2-10GHz (Mid Channel Enabled)

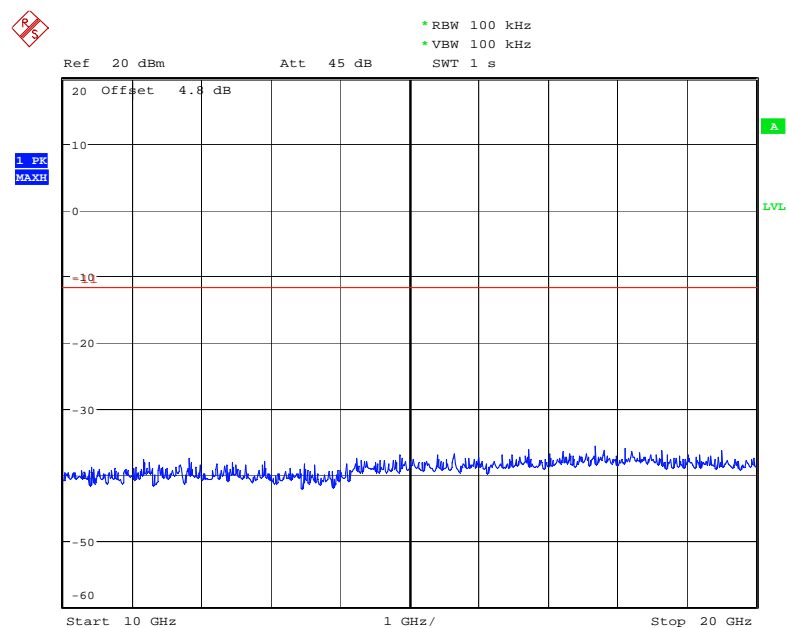


Date: 15.SEP.2009 08:25:58

Conducted Spurious Emissions 10-20GHz (Mid Channel Enabled)

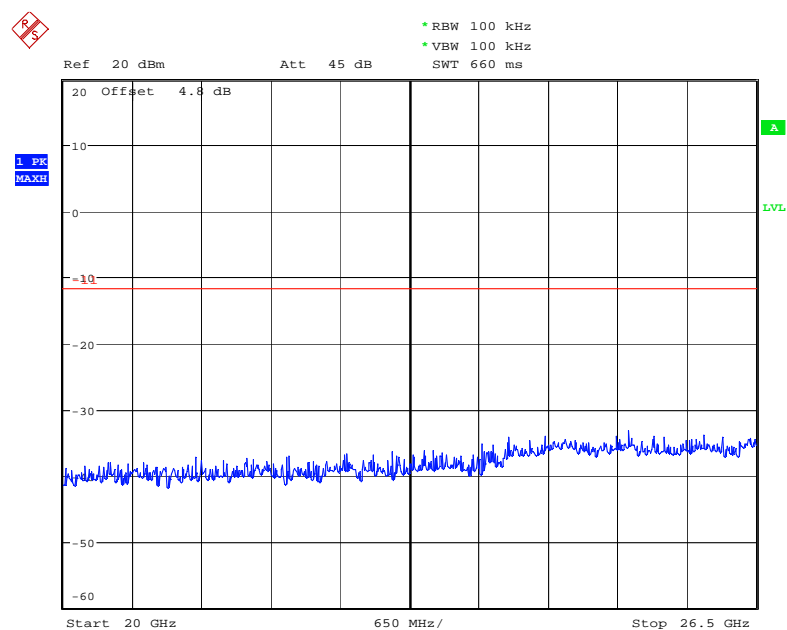


Date: 15.SEP.2009 08:26:17

Conducted Spurious Emissions 20-26.5GHz (Mid Chan Enabled)

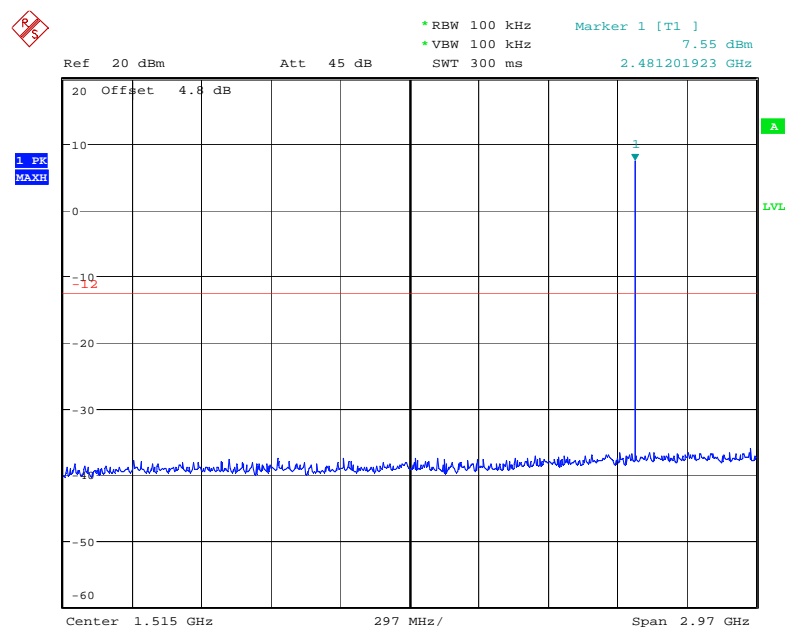


Date:
 15.SEP.2009    08:28:57

Conducted Spurious Emissions 30-3000MHz (High Channel Enabled)

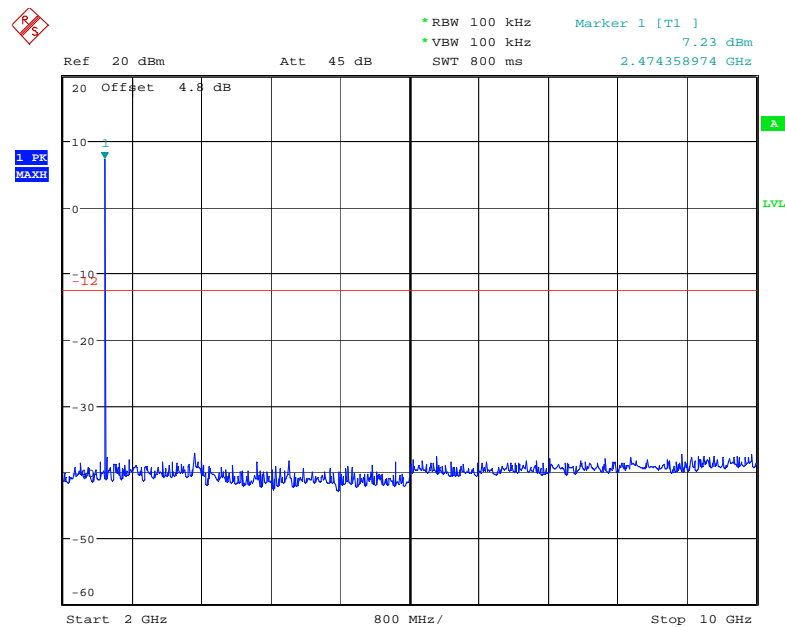


Date:
 15.SEP.2009    08:29:39

Conducted Spurious Emissions 2-10GHz (High Channel Enabled)

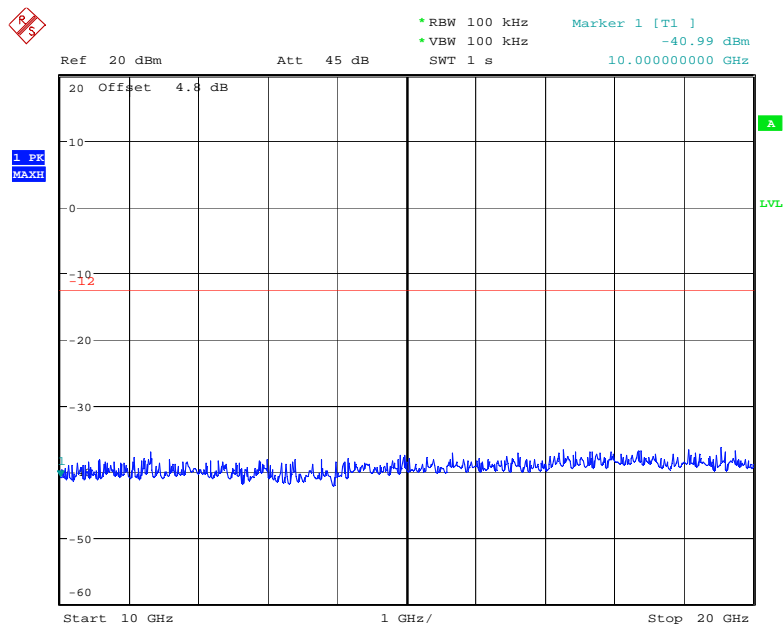

Date:
 15.SEP.2009 08:29:59

Conducted Spurious Emissions 10-20GHz (High Channel Enabled)

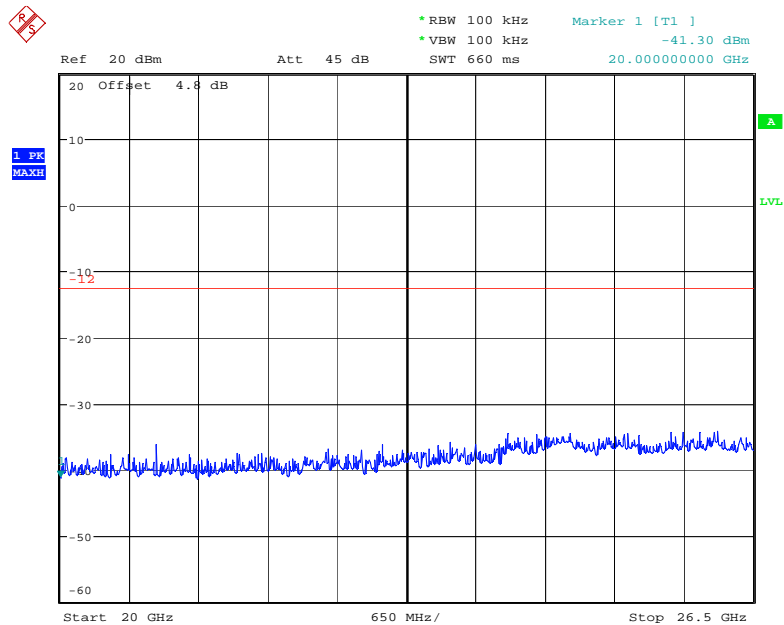

Date:
 15.SEP.2009 08:30:18

Conducted Spurious Emissions 20-26.5GHz (High Channel Enabled)

**AC LINE CONDUCTED**

CFR 47 Part 15.207

**Measurement Procedure**


Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50  $\Omega$  LISN port, where permitted, terminated into a 50  $\Omega$  noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50  $\Omega$  measuring port is terminated by a 50  $\Omega$  radio-noise meter or a 50  $\Omega$  resistive load. All other ports are terminated in 50  $\Omega$ .


Detectors – Peak and Average Detector

**Measurement Results**

See attached:

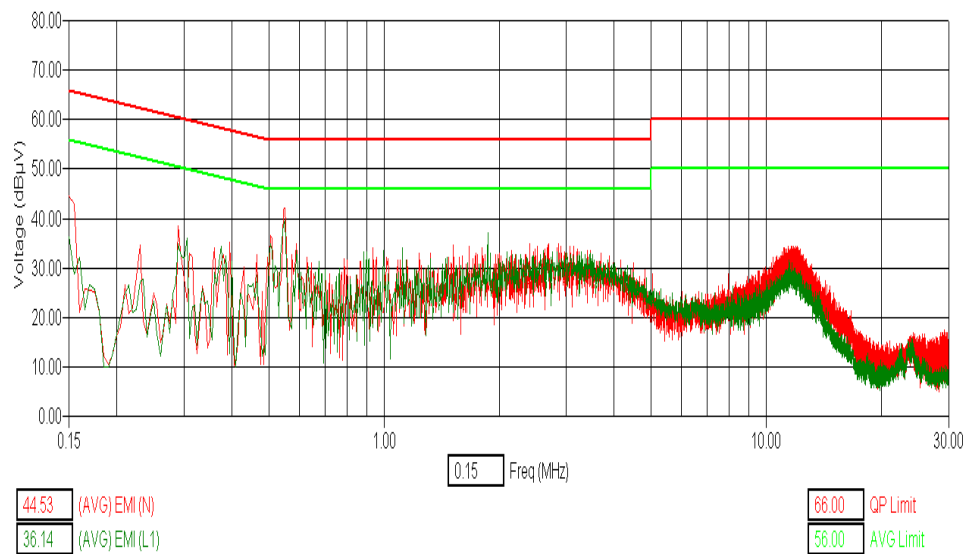

Bluetooth – Hopping - Tx Mode – Average Detector

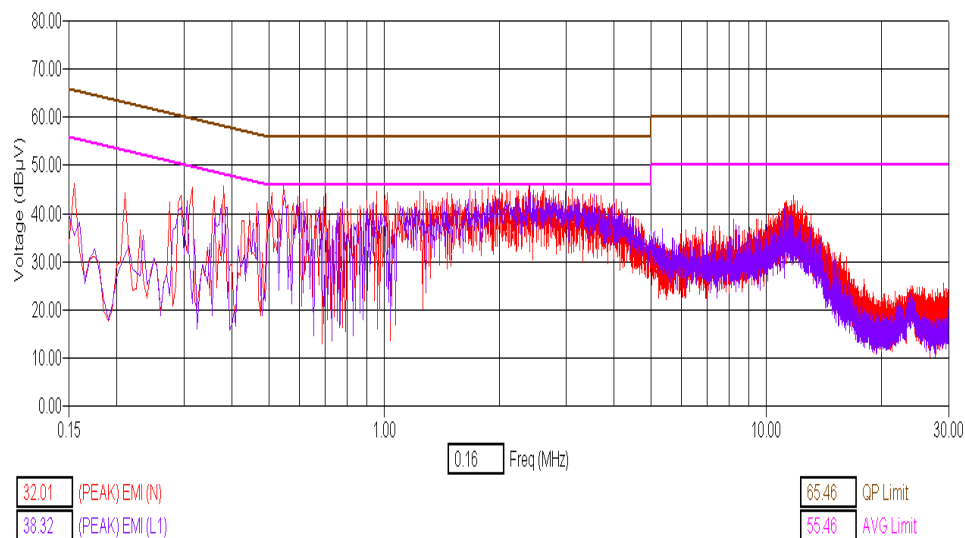

Bluetooth – Hopping - Tx Mode – Peak Detector

End of Test Report