



EMC Test Report

Product Name:
HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth

Model Number: EX300

Report No: SYBHZ(R)E016042010EB-1

FCC ID: IHDP56LP2

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice 1

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has obtained the accreditation of THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION (A2LA), and Accreditation Council Certificate Number: 2174.01.
3. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-1.
5. The laboratory also has been listed by the VCCI to perform EMC measurements. The accreditation number is R2364, C2583, and T256.
6. The test report is invalid if not marked with "exclusive stamp for the test report".
7. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
8. The test report is invalid if there is any evidence of erasure and/or falsification.
9. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
10. Normally, the test report is only responsible for the samples that have undergone the test.
11. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.

Notice 2

Modification Information:

Table 1 Modification Information

Modification Information	1	
	2	
	3	<i>Not Applicable!</i>
	4	
	5	
	6	
	7	



REPORT ON

EMC TEST OF HSDPA/UMTS/GPRS/GSM/EDGE
Mobile Phone with Bluetooth

M/N: EX300

REGULATION

FCC CFR47 Part 15: Subpart B;

FCC CFR47 Part 24: Subpart E;

START OF TEST

Apr.12, 2010

END OF TEST

Apr.16, 2010

Final Judgement:

Pass

Approver

2010-05-13
Date

张兴海
Name

Signature



Operator

2010-05-11
Date

温剑锋
Name

Signature

温剑锋

REPORT BODY CONTENT

1	Status	6
1.1	Product Information.....	6
1.2	Test Site	6
1.3	Test environment condition	6
2	Summary of Results.....	7
3	Equipment Specification	8
3.1	General Description	8
3.2	Sub-Assembly Identity	8
4	System Configuration during EMC Test	11
4.1	Cables Used during Test	11
4.2	Associated Equipment Used during Test	11
4.3	Test Configurations and Test Mode.....	11
4.4	Test conditions and test Connections.....	11
5	Electromagnetic Interference (EMI)	13
5.1	Radiated Disturbance 30MHz to 18GHz	13
5.2	Conducted Disturbance 0.15 MHz to 30MHz	14
5.3	Radiated Spurious Emissions	15
6	Main Test Instruments	17
7	System Measurement Uncertainty.....	18
8	Graph and Data of Emission Test.....	19
8.1	Radiated Disturbance	19
8.2	Conducted Disturbance	21
8.3	Radiated Spurious Emission.....	22



1 Status

1.1 Product Information

Applicant and Manufacturer

Motorola (China) Technology Ltd

Beijing Chaoyang wangjing technology Zone

Phone: +86 10 84 73 27 68

Contact: Zhao xinpeng

e-mail: DGVI84@motorola.com

1.2 Test Site

Site 1:

EMC LABORATORY OF RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD

1.3 Test environment condition

Ambient temperature	20~25°C
Relative humidity	40%~52%
Atmospheric pressure	101kPa

2 Summary of Results

Table 2 below shows a brief summary of the results obtained.

Table 2 Summary of results

EUT Classification: Wireless Terminal				
Test Items	Test Configuration & Test Mode	Required Performance Criteria	Result	Site
<u>Radiated Emissions</u> Enclosure Port	TC1/TC2 (TM1-TM3)	N/A	Pass	Site1
<u>Conducted Emissions</u>	TC1 (TM1-TM6)	N/A	Pass	Site1
<u>Radiated Spurious Emissions</u> Enclosure Port	TC1 (TM4-TM6)	N/A	Pass	Site1
Note: 1, Measurement taken is within the measurement uncertainty of measurement system. 2, TC = Test configuration				

3 Equipment Specification

3.1 General Description

HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth-EX300 is subscriber equipment in the WCDMA/GSM system. The WCDMA frequency band is Band I and Band VIII, they can't be used in this report. The GSM/GPRS/EDGE frequency band includes GSM900 and DCS1800 and PCS1900, but only PCS1900MHz band test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, WCDMA and GSM/GPRS/EDGE protocol processing, voice, video, MMS service, etc. Externally it provides micro SD card interface, earphone port(to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

3.1.1 Main Equipment Technical Data

Description:	HSDPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth
Models:	EX300
Type name	DVT6-33411A11
Input Rated Voltage	3.7V
Extreme Voltage	3.5V and 4.2V
Rated Power	Normal 3W ,Max 8 W
Dimensions	106mm (L)×56.4mm (W)×13.9mm (H)
Weight	<100g (with battery)

Table 3 Sub-Assembly Identity









Mode		Work Frequency	
		Transmitt Frequency (MHz)	Receive Frequency (MHz)
GSM	PCS1900	1850-1910	1930-1990
Bluetooth		2400-2483.5	

3.2 Sub-Assembly Identity


Table 4 Sub-Assembly Identity

Board				
Model Name	Qty.	Hardware Version	Serial	Description
/	1	HD1U751M	I32AB11022100215	Main board of Mobile Phone
Accessory				
Name	Qty.	Manufacture	Serials number	Description
Rechargeable Li-ion	1	Motorola	FM1003255000001	Battery Model: OM5B Rated capacity: 1150mAh Nominal Voltage: \approx +3.7V Charging Voltage: \approx +4.2V

AC/DCAdapter Model	DCH3-050EU-0304
Moto model	: SPN5409A
Manufacturer	: Motorola
Input Voltage	: ~100-240V 50/60Hz 0.2A
Output Voltage	: 5V \approx 550mA
Rated Power	: 2.75W
AC/DCAdapter Model	FMP5342A
Moto model	: SPN5409A
Manufacturer	: Motorola

Input Voltage	:	~100-240V 50/60Hz 0.2A
Output Voltage	:	5V  550mA
Rated Power	:	2.75W
AC/DCAdapter Model		DCH3-050US-0304
Moto model	:	SPN5404A
Manufacturer	:	Motorola
Input Voltage	:	~100-240V 50/60Hz 0.2A
Output Voltage	:	5V  550mA
Rated Power	:	2.75W
AC/DCAdapter Model		FMP5334A
Moto model	:	SPN5404A
Manufacturer	:	Motorola
Input Voltage	:	~100-240V 50/60Hz 0.2A
Output Voltage	:	5V  550mA
Rated Power	:	2.75W
AC/DCAdapter Model		DCH3-050UK-0304
Moto model	:	SPN5410A
Manufacturer	:	Motorola
Input Voltage	:	~100-240V 50/60Hz 0.2A
Output Voltage	:	5V  550mA
Rated Power	:	2.75W
AC/DCAdapter Model		FMP5340A
Moto model	:	SPN5410A
Manufacturer	:	Motorola
Input Voltage	:	~100-240V 50/60Hz 0.2A
Output Voltage	:	5V  550mA
Rated Power	:	2.75W
AC/DCAdapter Model		DCH3-050AU-0304
Moto model	:	SPN5414A
Manufacturer	:	Motorola
Input Voltage	:	~100-240V 50/60Hz 0.2A
Output Voltage	:	5V  550mA
Rated Power	:	2.75W
AC/DCAdapter Model		FMP5344A
Moto model	:	SPN5414A
Manufacturer	:	Motorola
Input Voltage	:	~100-240V 50/60Hz 0.2A
Output Voltage	:	5V  550mA
Rated Power	:	2.75W
AC/DCAdapter Model		DCH3-050IN-0304
Moto model	:	SPN5415A
Manufacturer	:	Motorola
Input Voltage	:	~100-240V 50/60Hz 0.2A
Output Voltage	:	5V  550mA
Rated Power	:	2.75W



AC/DCAdapter Model		FMP5346A
Moto model	:	SPN5415A
Manufacturer	:	Motorola
Input Voltage	:	~100-240V 50/60Hz 0.2A
Output Voltage	:	5V  550mA
Rated Power	:	2.75W

4 System Configuration during EMC Test

The Equipment under Test (EUT) was functioning correctly during all tests. The EUT was installed within the test site and was configured to simulate a typical user installation.

4.1 Cables Used during Test

Table 5 Cable Used during Test

Port	Quantity	Type of Cable
AC Power Port	1	Unshielded
USB	1	shielded
Earphone	1	Unshielded

4.2 Associated Equipment Used during Test

Table 6 Associated Equipment Used during Test

Name	Model	Manufacturer	S/N	Cal Date
Radio Communication Tester	CMU200	R&S	3608105673	2009-10-10
Notebook	D810	DELL	3105083303	NA

4.3 Test Configurations and Test Mode

4.3.1 Test Configuration.

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment).

TC1:EUT powered with an adapter and connected to the test system (Base Station Simulator).

TC2:EUT connected to the notebook by USB port.

Table 7 Configuration table

TC1/TC2	TM1~TM6
---------	---------

4.3.2 Test Mode

There were 6 test Modes. TM1 to TM6 were shown in the diagrams below:

TM1: operate in idle PCS1900;

TM2: operate in idle GPRS1900;

TM3: operate in idle EDGE1900;

TM4: operate in traffic PCS1900;

TM5: operate in traffic GPRS1900;

TM6: operate in traffic EDGE1900;

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment).

4.4 Test conditions and test Connections

4.4.1 Test Conditions

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment).

4.4.2 Test Connections

Traffic Mode:

The EUT is required to be in the traffic mode, a call is set up according to the generic call set up procedure and enter the EUT into loop back test mode. (GSM see ETSI TS 151.010).

For EGSM, the following conditions shall also be met:

The EUT shall be commanded to operate at maximum transmit power;

The downlink RXQUAL shall be monitored.

Assign channel frequency to an appropriate channel number.

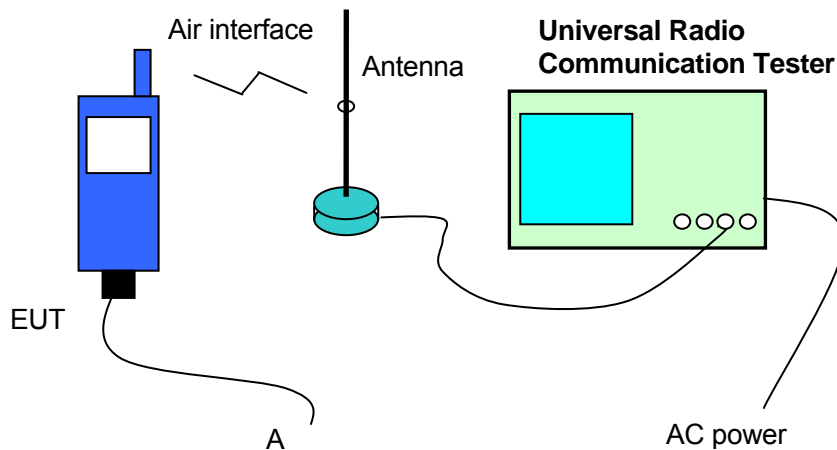


Figure 1.: Test Configuration


Idle Mode:

The EUT is required to be in the idle mode.

For PCS1900, the following conditions shall be met::

When the EUT is required to be in the idle mode, the test system shall simulate a Base Station (BS) with Broadcast Control Channel/Common Control Channel (BCCH/CCCH) on one carrier. The EUT shall be synchronized to the BCCH, listening to the CCCH and able to respond to paging messages. Periodic Location Updating shall be disabled.

Please refer to following figure:

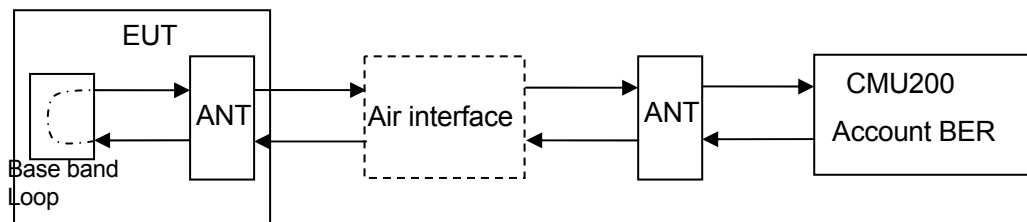

ANT: Antenna

BER: Bit Error Rate

Figure 2. Test Configuration

5 Electromagnetic Interference (EMI)

5.1 Radiated Disturbance 30MHz to 18GHz

5.1.1 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4. The test distance was 3m. The set-up and test methods were according to ANSI 63.4 and CAN/CSA-CEI/IEC CISPR 22

A preliminary scan and a final scan of the emissions were made from 30 MHz to 18 GHz by using test script of software; the emissions were measured using Quasi-Peak Detector (30MHz~1GHz) and AV detector (above 1GHz). The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°, The receive antenna has two polarizations V and H.

EUT was configured in idle mode and the test performed at worst emission state.

Measurement bandwidth: 30 MHz – 1000 MHz: 120 k Hz

Measurement bandwidth: 1GHz – 18GHz: 1MHz

Test set up figure:

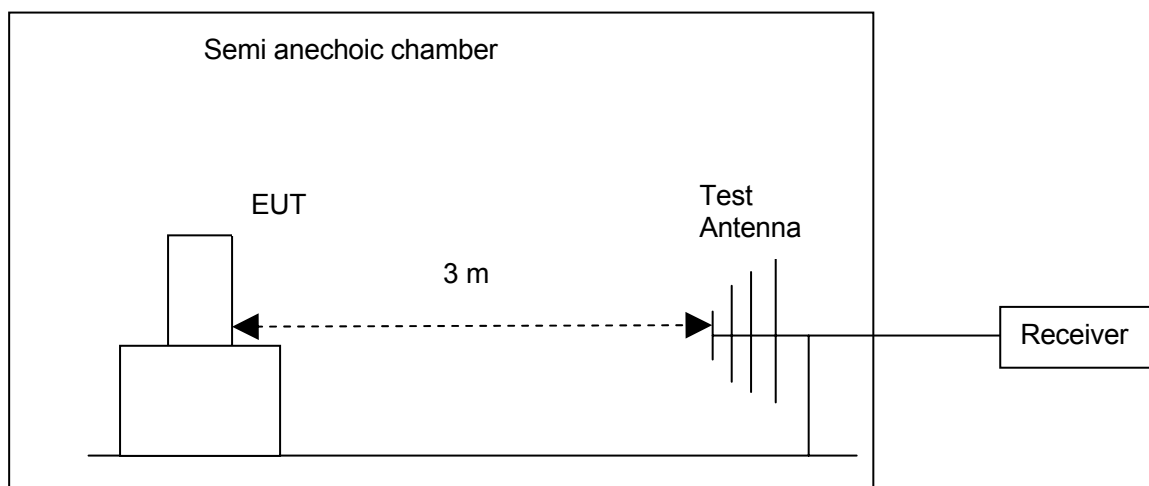


Figure 3. Test set-up

5.1.2 Test Results

The EUT has met the requirements for Radiated Emission of enclosure port.

Table 8 Test Limits

Frequency of Emission (MHz)	Radiated Limit	
	Unit(μ V/m)	Unit(dB μ V/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

5.2 Conducted Disturbance 0.15 MHz to 30MHz

5.2.1 Test Procedure

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4: 2003.

Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.

Huawei Mobile Station was communicated with the BTS simulator through Air interface, the BTS simulator controls the Mobile Station to transmitter the maximum power which defined in specification of product. The Mobile Station operated on the typical channel.

Measurement bandwidth (RBW) for 150kHz to 30 MHz: 9 kHz;

Test Set-up figure:

The Mobile Station was setup in the screened chamber and operated under nominal conditions.

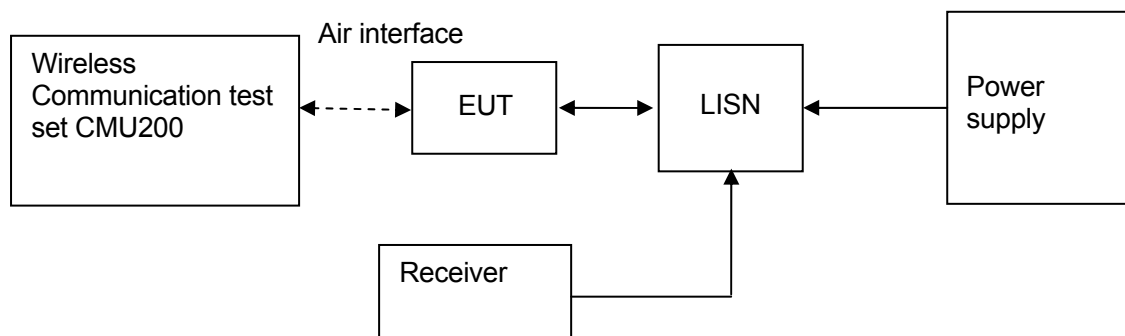


Figure 4. Test Set-up

5.2.2 Test Results

The EUT has met requirements for Conducted disturbance of power lines.

Table 9 Test Limit of DC&AC Power Port

Frequency range	150kHz~ 30MHz	
Classification	Class B	
Limit(Class B)	Voltage limits	
	QP	AV
0.15MHz~0.5MHz	66~56 dB μ V	56~46 dB μ V
0.5MHz~5MHz	56 dB μ V	46 dB μ V
5MHz~30MHz	60 dB μ V	50 dB μ V

5.3 Radiated Spurious Emissions


5.3.1 Test Procedure

A test site fulfilling the requirements of ITU-R Recommendation SM329-10 was used. The EUT was placed on a non-conducting support in the anechoic chamber and was operated from a power source via an RF filter to avoid radiation from the power leads.

Step 1:


For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the BTS simulator via the air interface.

Test the Radiated maximum output power by the Rohde and Schwarz ESIB26 Test Receiver from test antenna.

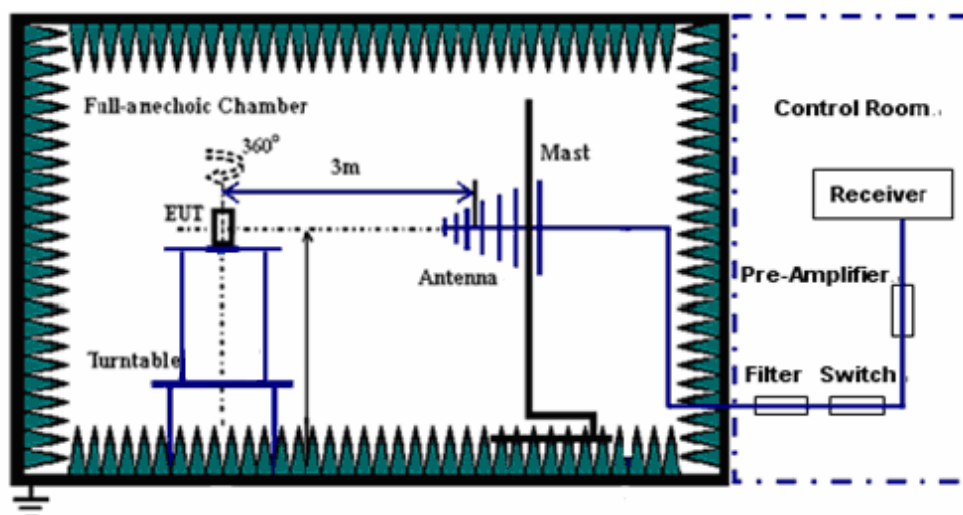

Step 2:

Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step1 on ESIB26 Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

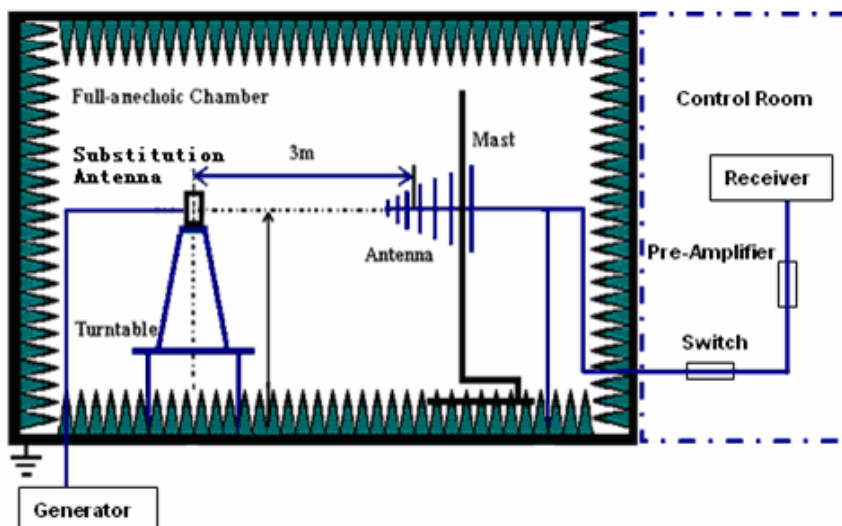

According to part 24.238, the defined measurement bandwidth as following:

24.238 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;

Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;

Measurement bandwidth (RBW) for 30 MHz up to 26.5 GHz: 1 MHz;

Table 10 Radiated Spurious Emissions Limits

Frequency band	Minimum requirement (E.R.P) traffic mode
30MHz~26.5GHz	-13dBm

No peak found in pre- test. All frequency points' margin is bigger than 20dB, so the substitution method isn't used.

Calculation Sample:

Table 11 Substitution Results

Freq. [MHz]	Measure ment Value [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Signal Generator Level [dBm]	Substitution Level [dBm]	FCC limit [dBm]	Result

Note: For get the E.R.P. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{E.R.P. [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

5.3.2 Test Results

The EUT has met the requirements of FCC Part24 requirement.

6 Main Test Instruments

Table 12 Main Test Equipments

Test item	Test Instrument	Model	Manufacturer	Cal-Date	Cal Interval (month)
RE&CE	EMI Test receiver	ESU26	R&S	Jul.07, 2009	2
	Broadband Antenna	VULB 9163	SCHWARZBECK	Jun.24, 2009	12
	Horn Antenna	HF906	R&S	Jun.19.2009	12
	LISN	ENV216	R&S	Aug.12.2009	12
RSE	EMI Test receiver	ESIB26	R&S	April.22, 2009	12
	Broadband Antenna	CBL6112B	SCHAFFNER	Sep.21.2009	12
	Horn Antenna	3117	ETS-Lindgren	Sep.11.2009	12
	Horn Antenna	3160	ETS-Lindgren	Sep.21.2009	12
Software Information					
Test Item	Software Name	Manufacturer		Version	
RE/CE	ES-K1	R&S		1.7.1	
RSE	EMC32	R&S		V5.10.99	

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Table 14 System Measurement Uncertainty


Items		Extended Uncertainty
RE	Field strength (dB μ V/m)	U=4.1dB; k=2(30MHz-1GHz)
RE	Field strength (dB μ V/m)	U=4.1dB; k=2(1GHz-18GHz)
RSE	ERP (dBm)	U=2.2dB; k=2
CE	Disturbance Voltage (dB μ V)	U=3.4dB; k=2

8 Graph and Data of Emission Test

8.1 Radiated Disturbance

This test was carried out in all the test modes, Here only the worst test result was shown.


30MHz-1GHz

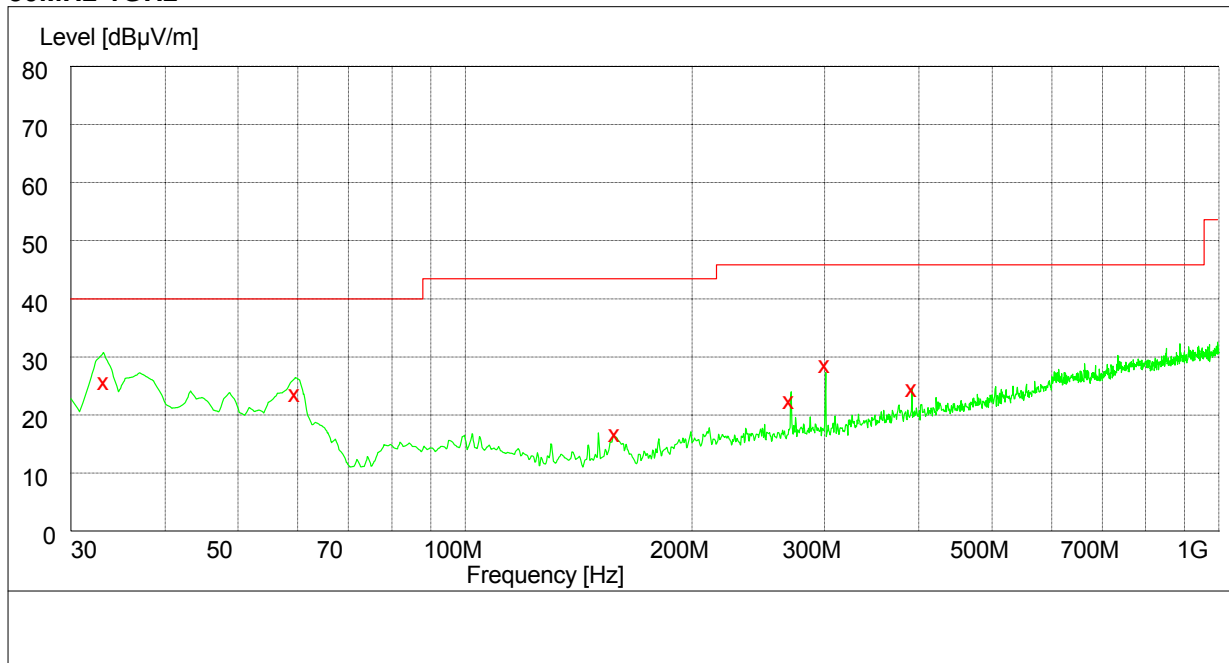

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
33.300000	26.40	11.7	40.0	13.6	105.0	115.00	VERTICAL
59.640000	23.50	12.4	40.0	16.5	107.0	254.00	VERTICAL
158.400000	17.50	9.5	43.5	26.0	100.0	315.00	VERTICAL
269.880000	22.10	14.5	46.0	23.9	102.0	26.00	HORIZONTAL
301.080000	29.40	15.6	46.0	16.6	102.0	5.00	HORIZONTAL
392.460000	24.90	17.9	46.0	21.1	102.0	336.00	HORIZONTAL

1GHz-18GHz

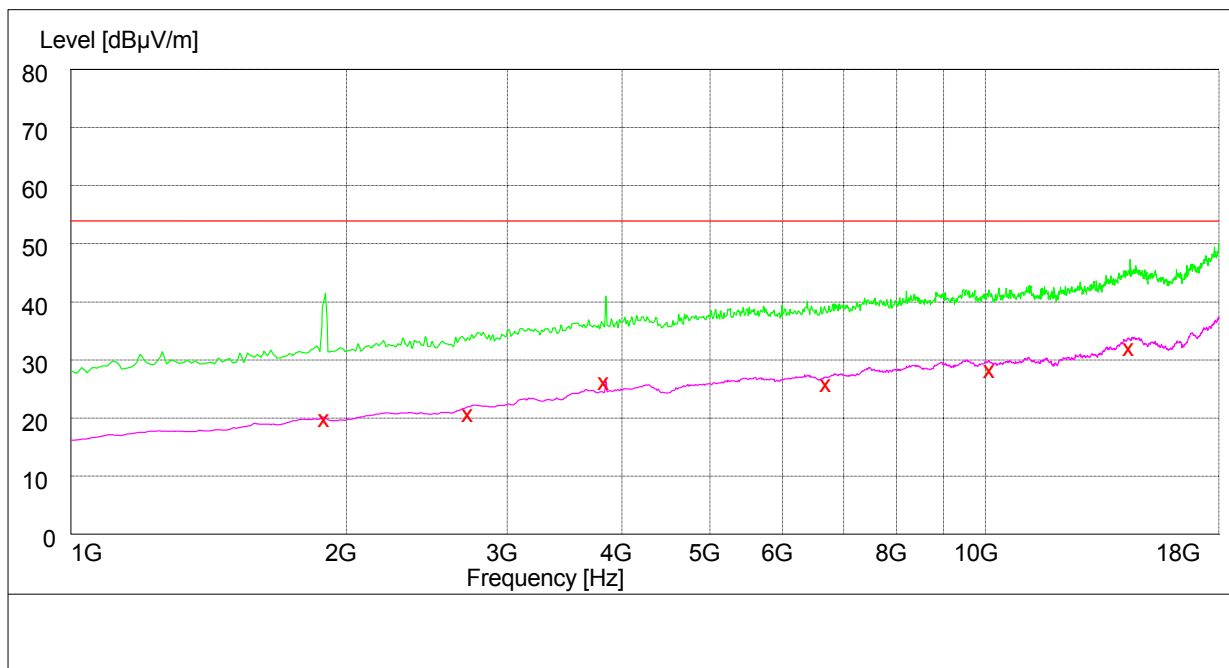


MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1897.000000	20.60	-13.0	54.0	33.4	156.0	237.00	VERTICAL
2723.500000	21.50	-10.1	54.0	32.5	181.0	244.00	VERTICAL
3840.500000	27.60	-6.2	54.0	26.4	113.0	76.00	VERTICAL
6707.000000	26.70	-0.6	54.0	27.3	127.0	31.00	VERTICAL
10131.500000	29.10	5.2	54.0	24.9	189.0	222.00	HORIZONTAL
14403.000000	32.80	12.1	54.0	21.2	117.0	322.00	HORIZONTAL

8.2 Conducted Disturbance

This test was carried out in all the test modes, Here only the worst test result was shown.

AC Power Port Test Data

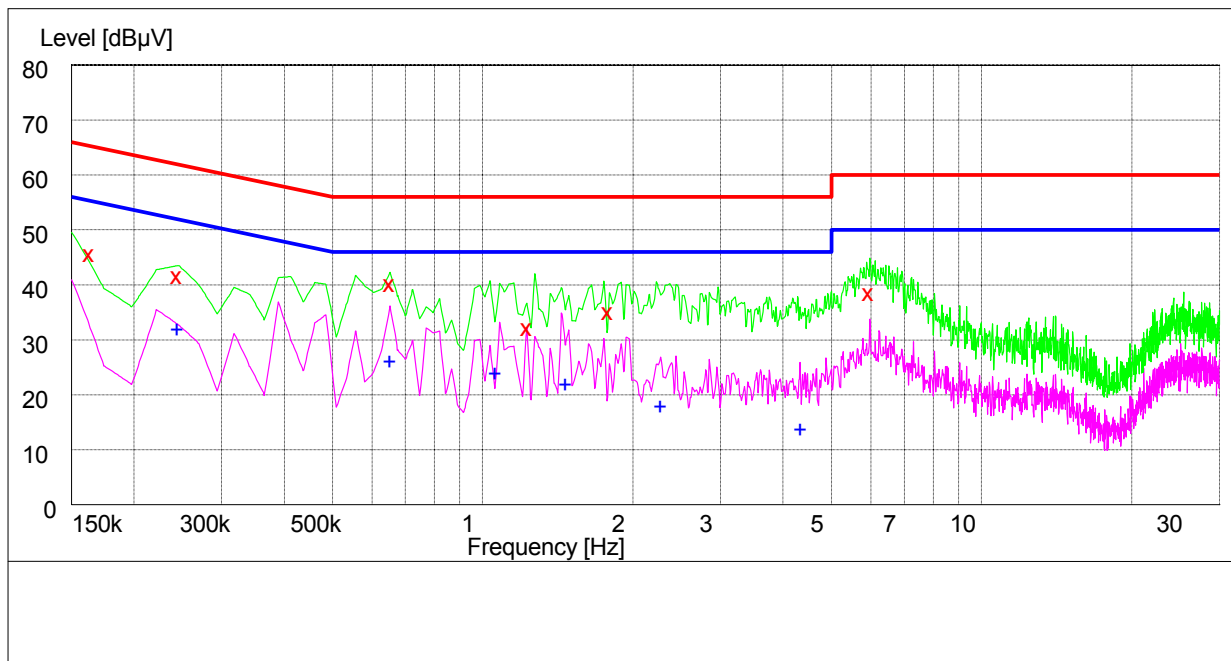

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.163500	46.60	10.1	65	18.4	N	FLO
0.244500	42.50	10.0	62	19.5	N	FLO
0.654000	41.10	10.1	56	14.9	N	FLO
1.234500	33.10	10.1	56	22.9	N	FLO
1.792500	36.00	10.1	56	20.0	N	FLO
5.964000	39.40	10.2	60	20.6	N	FLO

MEASUREMENT RESULT: AV Detector


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.244500	32.80	10.0	52	19.2	N	FLO
0.654000	26.90	10.1	46	19.1	N	FLO
1.063500	24.70	10.1	46	21.3	N	FLO
1.473000	22.70	10.1	46	23.3	N	FLO
2.278500	18.70	10.1	46	27.3	N	FLO
4.357500	14.50	10.2	46	31.5	N	FLO

8.3 Radiated Spurious Emission


This test results are the maximum level of radiated spurious emissions in vertical and horizontal polarity.

8.3.1 For PCS 1900


Traffic Mode (9kHz-30MHz)

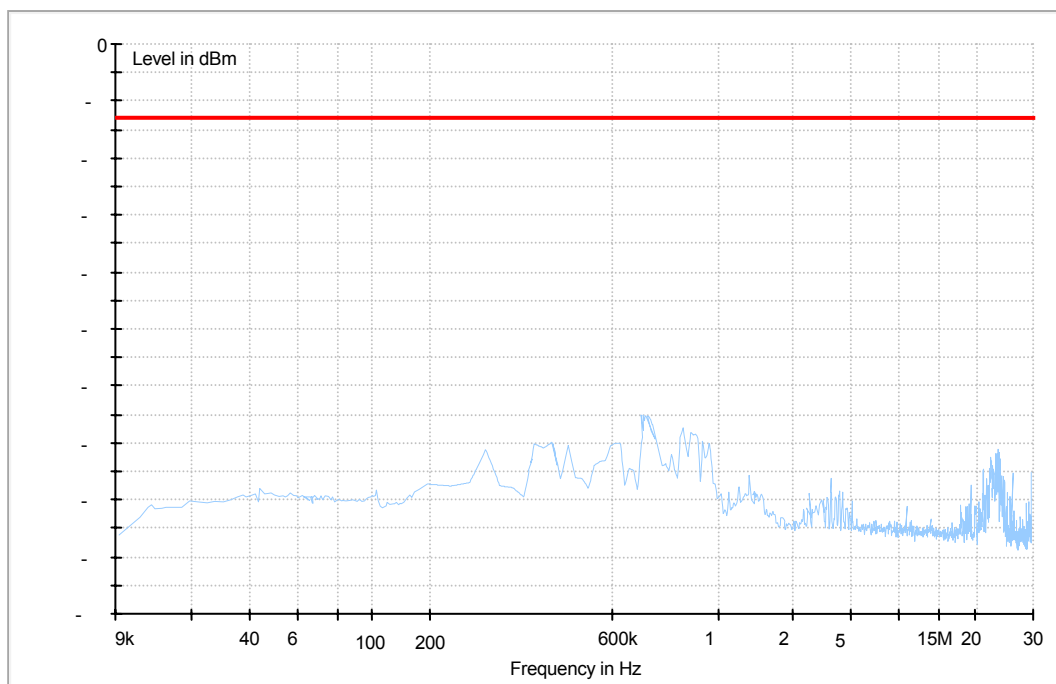


Traffic Mode (30MHz-2GHz)

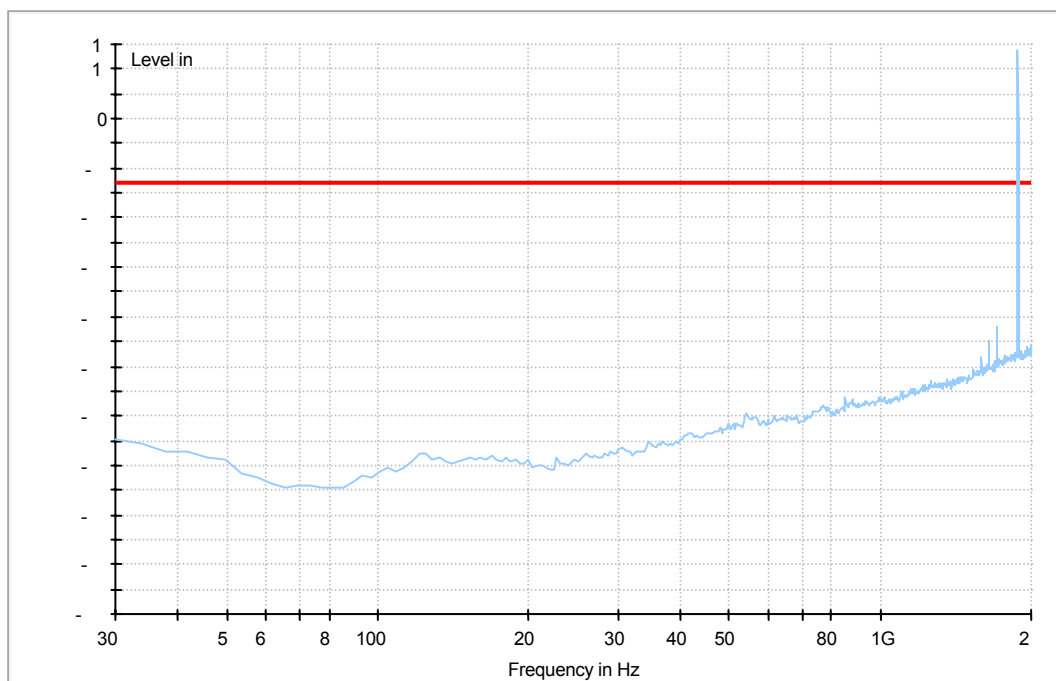

Traffic Mode (2GHz-18GHz)

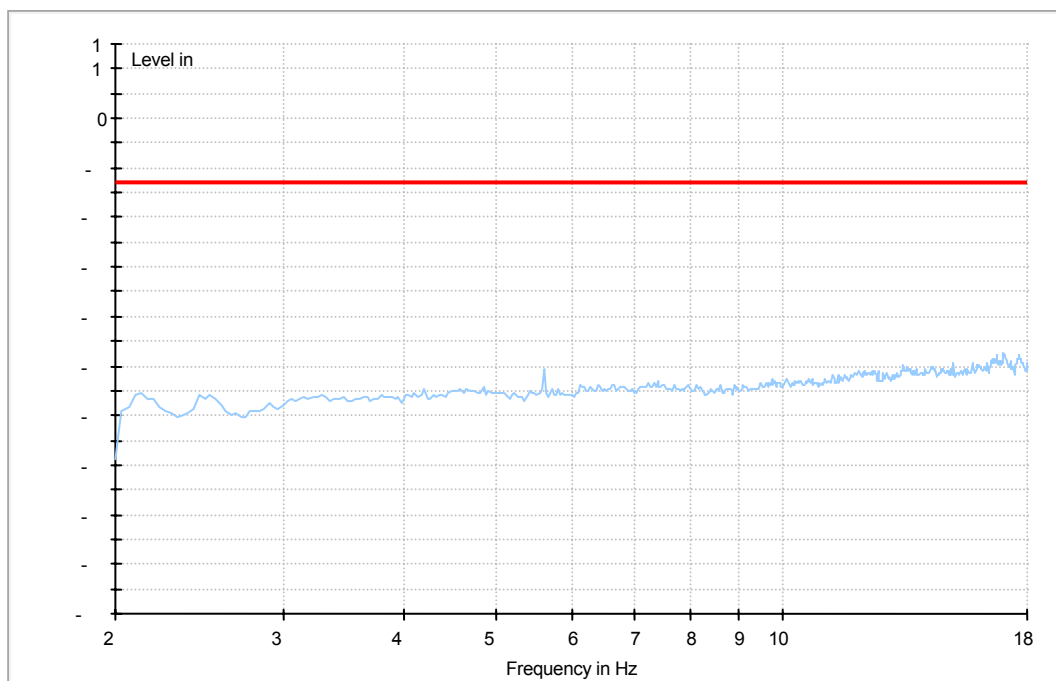


Traffic Mode (18GHz-26.5GHz)

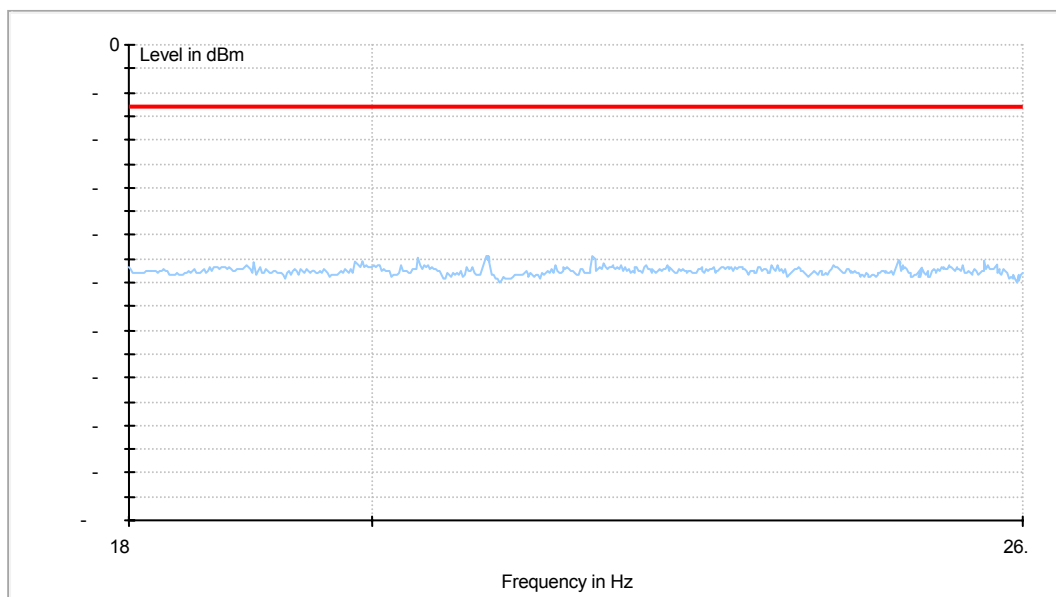


8.3.2 For GPRS 1900


Traffic Mode (9kHz-30MHz)

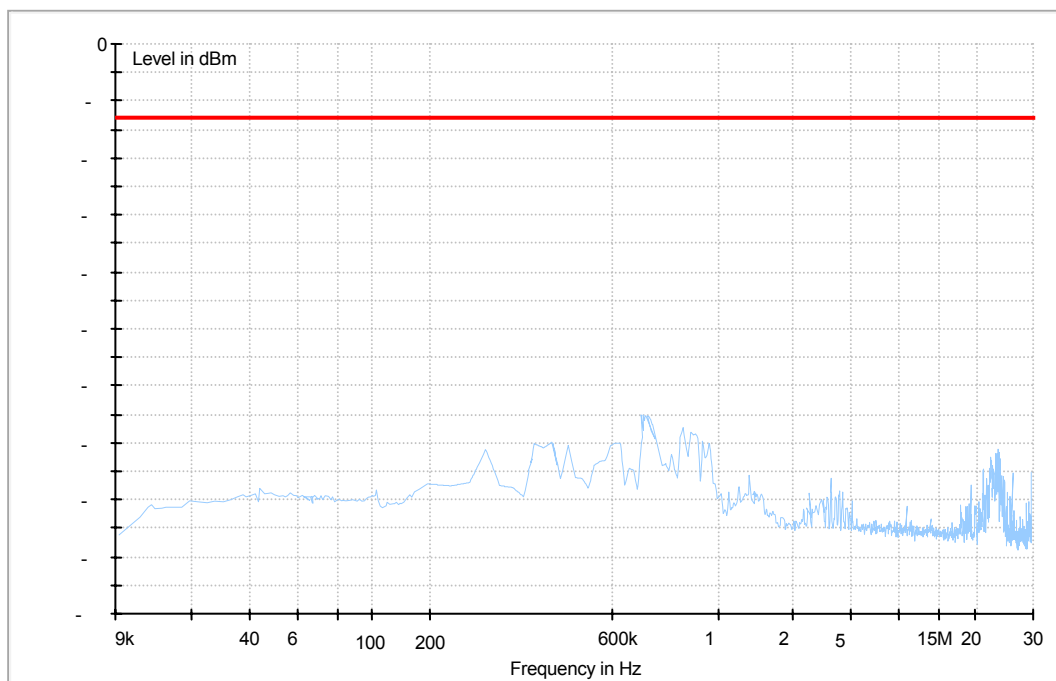


Traffic Mode (30MHz-2GHz)

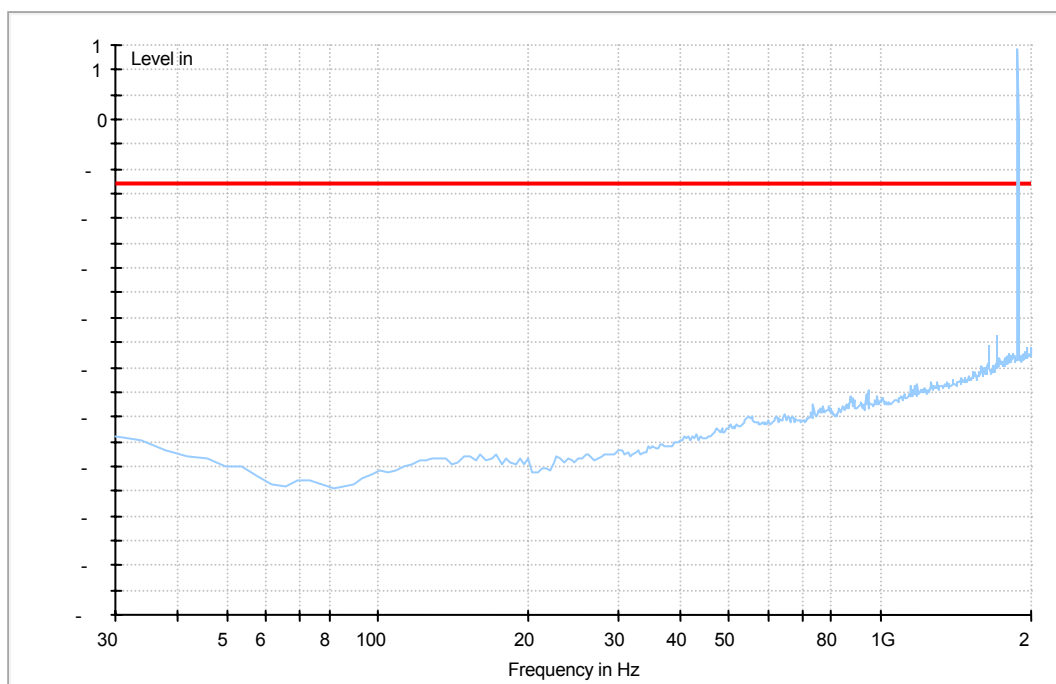

Traffic Mode (2GHz-18GHz)

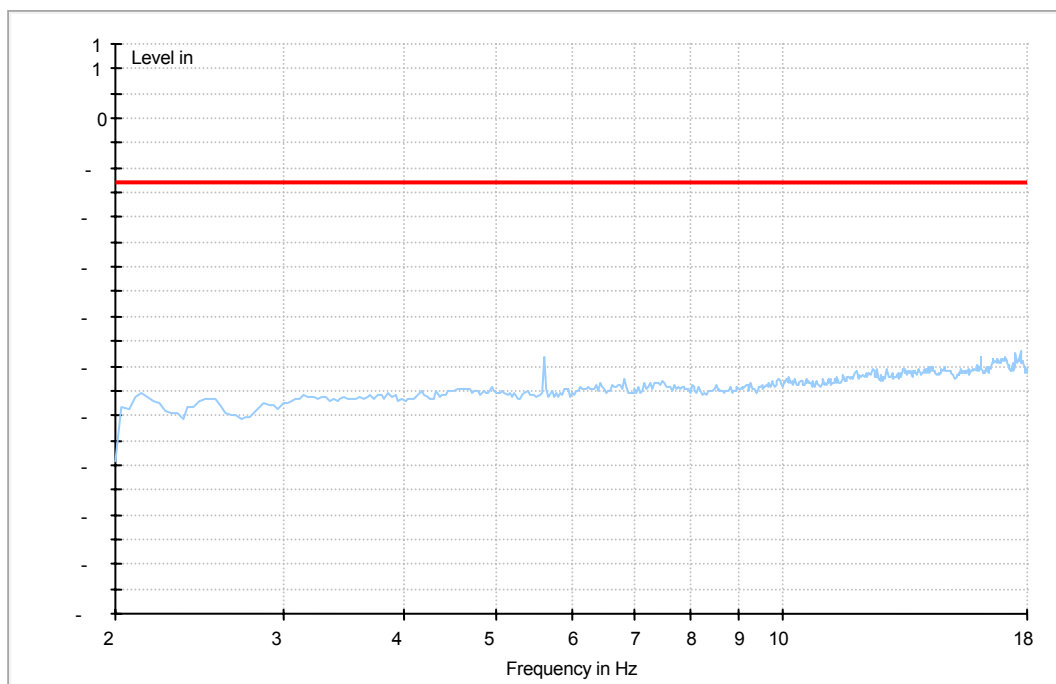


Traffic Mode (18GHz-26.5GHz)

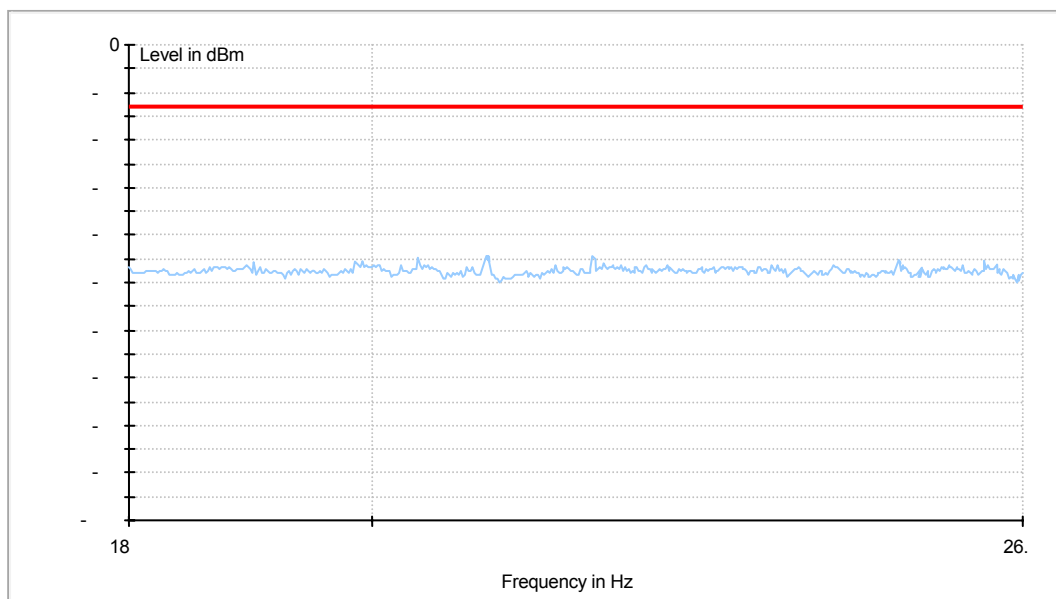


8.3.3 For EDGE 1900


Traffic Mode (9kHz-30MHz)

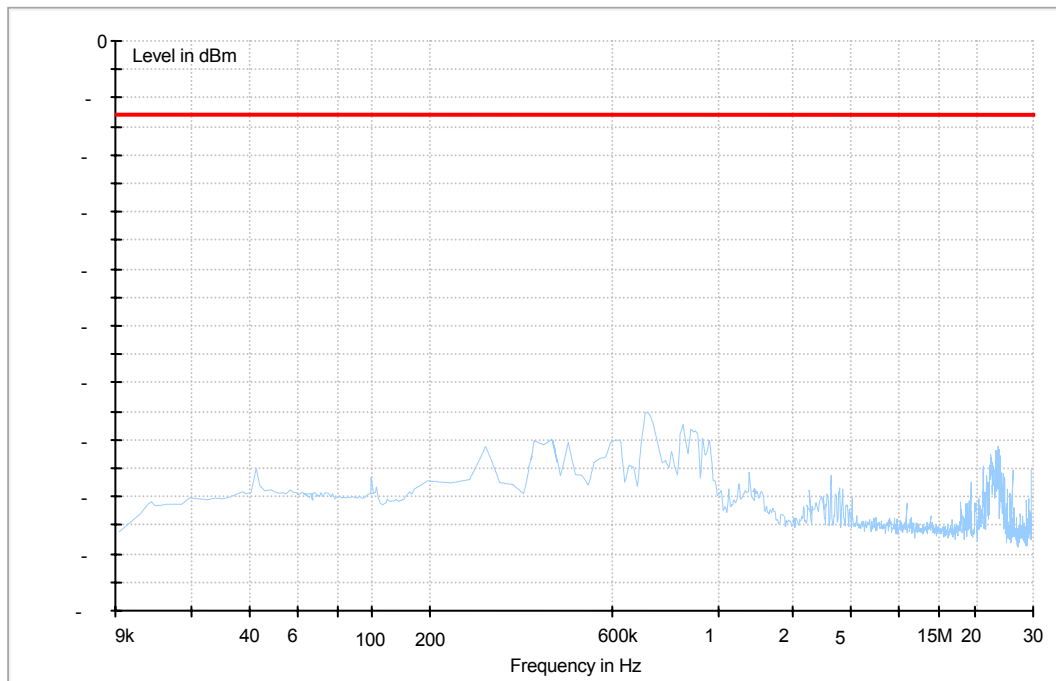


Traffic Mode (30MHz-2GHz)

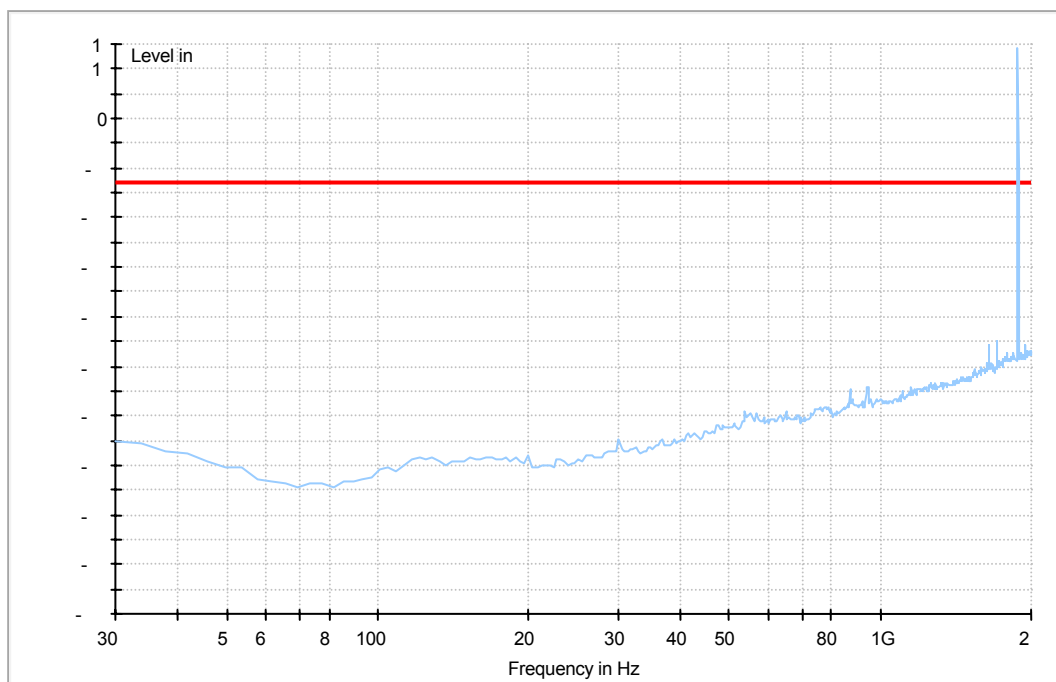

Traffic Mode (2GHz-18GHz)

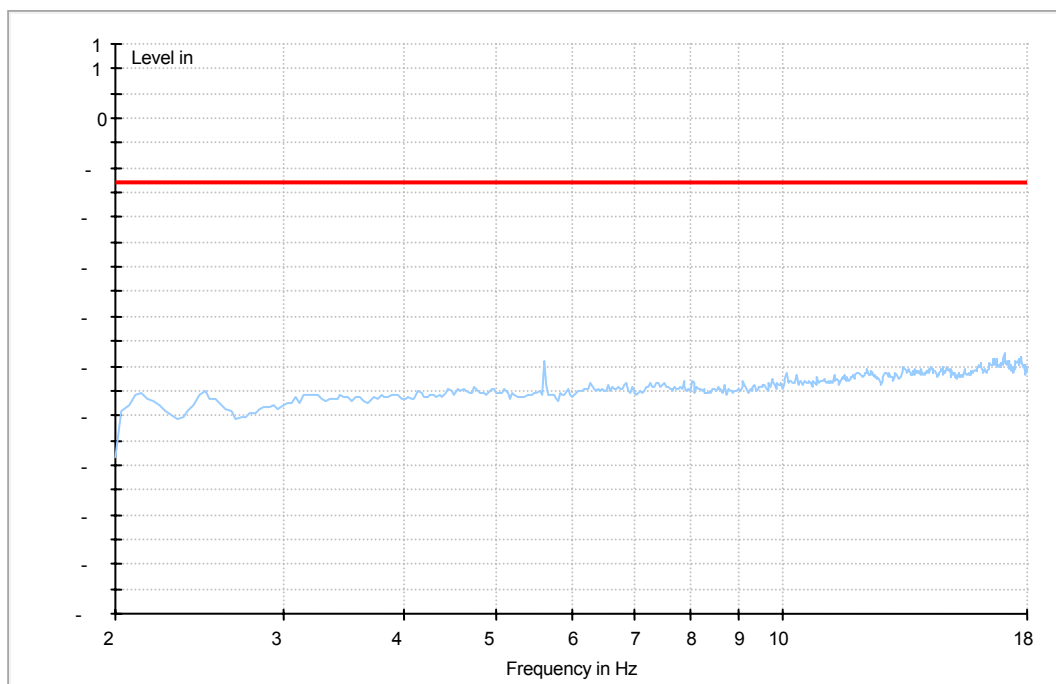

Traffic Mode (18GHz-26.5GHz)

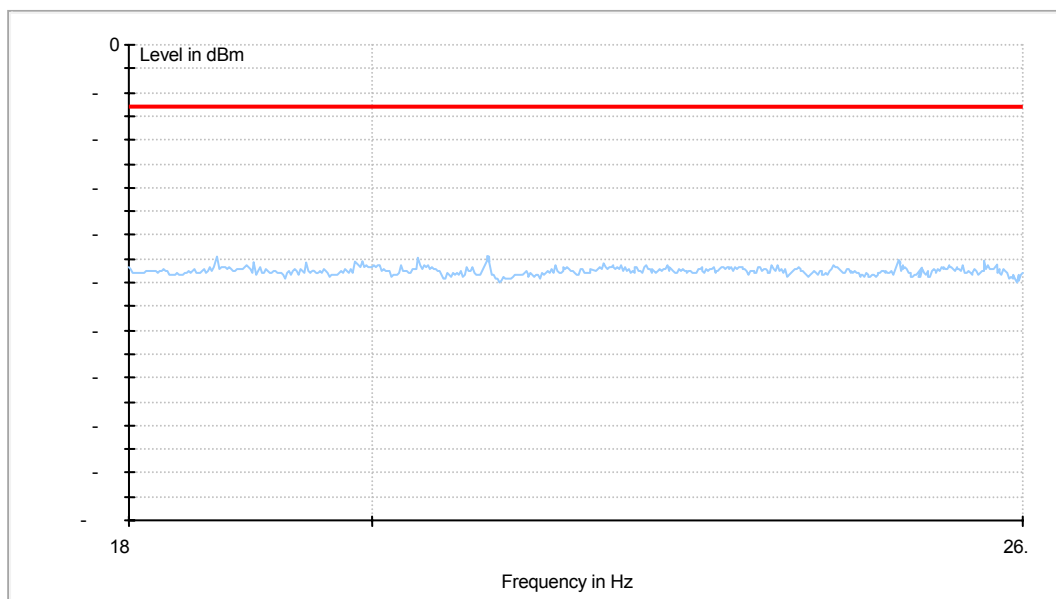

-----END-----