

# Application For Grant of Certification

FOR

FOR

Model: A02947  
2402-2480 MHz  
47CFR 15.249 and RSS-247  
Low Power Transmitter  
FCC ID: IPH-02947  
IC: 1792A-02947


FOR

## Garmin International, Inc.

1200 East 151st Street  
Olathe, KS 66062

Test Report Number: 150828  
IC Test Site Registration: 3041A-1

Authorized Signatory: *Scot D Rogers*  
Scot D. Rogers



## **ROGERS LABS, INC.**

4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone / Fax (913) 837-3214

# Engineering Test Report For Grant of Certification Application

FOR

47 CFR, PART 15C - Intentional Radiators Paragraph 15.249 and  
Industry Canada RSS-247 Issue 1, RSS-GEN Issue 4  
License Exempt Intentional Radiator

For

## **Garmin International, Inc.**

1200 East 151st Street  
Olathe, KS 66062

Model: A02947

### **Low Power Transmitter**

Frequency Range 2402-2480 MHz  
FCC ID#: IPH-02947  
IC: 1792A-02947

Test Date: August 28, 2015

Certifying Engineer: *Scot D. Rogers*  
Scot D. Rogers  
Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.  
This report must not be used by the client to claim product certification, approval, or endorsement by  
NVLAP, NIST, or any agency of the Federal Government.

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Garmin International, Inc.  
Model: A02947  
Test #: 150828  
Test to: CFR47 15C, RSS-247  
File: Garmin A02947 TstRpt 150828

SN: 3908535043  
FCC ID#: IPH-02947  
IC: 1792A-02947  
Date: September 30, 2015  
Page 2 of 42

**Table Of Contents**

**TABLE OF CONTENTS..... 3**

**REVISIONS..... 4**

**FORWARD ..... 5**

**OPINION / INTERPRETATION OF RESULTS ..... 5**

**EQUIPMENT TESTED..... 5**

**EQUIPMENT FUNCTION AND CONFIGURATION..... 6**

    Equipment Configuration.....7

**APPLICATION FOR CERTIFICATION..... 8**

**APPLICABLE STANDARDS & TEST PROCEDURES ..... 9**

**EQUIPMENT TESTING PROCEDURES ..... 9**

    AC Line Conducted Emission Test Procedure .....9

    Radiated Emission Test Procedure.....9

        Diagram 1 Test arrangement for Conducted emissions ..... 10

        Diagram 2 Test arrangement for radiated emissions of tabletop equipment..... 11

        Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)..... 12

**TEST SITE LOCATIONS ..... 12**

**LIST OF TEST EQUIPMENT ..... 13**

**UNITS OF MEASUREMENTS ..... 14**

**ENVIRONMENTAL CONDITIONS..... 14**

**INTENTIONAL RADIATORS..... 14**

    Antenna Requirements .....14

    Restricted Bands of Operation.....14

        Table 1 Radiated Emissions in Restricted Frequency Bands Data ..... 15

**Summary of Results for Radiated Emissions in Restricted Bands .....15**

**AC Line Conducted EMI Procedure .....16**

        Figure 1 AC Line Conducted emissions of EUT line 1 (EUT AC Adapter SCB055600P).....17

        Figure 2 AC Line Conducted emissions of EUT line 2 (EUT AC Adapter SCB055600P)..... 17

        Figure 3 AC Line Conducted emissions of EUT line 1 (EUT AC Adapter 326-00072-00)..... 18

        Figure 4 AC Line Conducted emissions of EUT line 2 (EUT AC Adapter 326-00072-00)..... 18

        Figure 5 AC Line Conducted emissions of EUT line 1 (EUT AC Adapter 326-00086-01).....19

        Figure 6 AC Line Conducted emissions of EUT line 2 (EUT AC Adapter 326-00086-01)..... 19

        Figure 7 AC Line Conducted emissions of EUT line 1 (EUT AC Adapter 326-00087-00).....20

        Figure 8 AC Line Conducted emissions of EUT line 2 (EUT AC Adapter 326-00087-00).....20

        Figure 9 AC Line Conducted emissions of EUT line 1 (EUT-USB-CPU AC Adapter) .....21

        Figure 10 AC Line Conducted emissions of EUT line 2 (EUT-USB-CPU AC Adapter) .....21

        Table 2 AC Line Conducted Emissions Data L1 (EUT-AC Adapter, SCB0500600P) .....22

        Table 3 AC Line Conducted Emissions Data L2 (EUT-AC Adapter, SCB0500600P) .....22

Table 4 AC Line Conducted Emissions Data L1 (EUT-AC Adapter, 362-00072-00)	23
Table 5 AC Line Conducted Emissions Data L2 (EUT-AC Adapter, 362-00072-00)	23
Table 6 AC Line Conducted Emissions Data L1 (EUT-AC Adapter, 362-00086-01)	24
Table 7 AC Line Conducted Emissions Data L2 (EUT-AC Adapter, 362-00086-01)	24
Table 8 AC Line Conducted Emissions Data L1 (EUT-AC Adapter, 362-00087-00)	25
Table 9 AC Line Conducted Emissions Data L2 (EUT-AC Adapter, 362-00087-00)	25
Table 10 AC Line Conducted Emissions Data L1 (EUT-USB-CPU)	26
Table 11 AC Line Conducted Emissions Data L2 (EUT-USB-CPU)	26
<b>Summary of Results for AC Line Conducted Emissions Results</b>	<b>26</b>
<b>General Radiated Emissions Procedure</b>	<b>27</b>
Table 12 General Radiated Emissions from EUT Data	28
<b>Summary of Results for General Radiated Emissions</b>	<b>28</b>
<b>Operation in the Band 2400 – 2483.5 MHz</b>	<b>29</b>
Figure 11 Plot of Transmitter Emissions (In 2402-2479 MHz Band, Mode 1)	30
Figure 12 Plot of Transmitter Emissions (2402-2479 MHz, 99% Occupied Bandwidth, Mode 1)	30
Figure 13 Plot of Transmitter Emissions (Low Band Edge, Mode 1)	31
Figure 14 Plot of Transmitter Emissions (High Band Edge, Mode 1)	31
Figure 15 Plot of Transmitter Emissions (In 2402-2480 MHz Band, Mode 2)	32
Figure 16 Plot of Transmitter Emissions (2402-2480 MHz, 99% Occupied Bandwidth, Mode 2)	32
Figure 17 Plot of Transmitter Emissions (Low Band Edge, Mode 2)	33
Figure 18 Plot of Transmitter Emissions (High Band Edge, Mode 1)	33
<b>Transmitter Emissions Data</b>	<b>34</b>
Table 13 Transmitter Radiated Emissions (Mode 1)	34
Table 14 Transmitter Radiated Emissions (Mode 2)	35
<b>Summary of Results for Transmitter Radiated Emissions of Intentional Radiator</b>	<b>36</b>
<b>STATEMENT OF MODIFICATIONS AND DEVIATIONS</b>	<b>36</b>
<b>ANNEX</b>	<b>37</b>
Annex A Measurement Uncertainty Calculations	38
Annex B Rogers Labs Test Equipment List	39
Annex C Rogers Qualifications	40
Annex D FCC Site Registration Letter	41
Annex E Industry Canada Site Registration Letter	42

## Revisions

Revision 1 Issued September 30, 2015

## Forward

The following information is submitted for consideration in obtaining Grant of Certification for low power intentional radiator per 47 CFR Paragraph 15.249 and Industry Canada RSS-247, low power digital device transmitter operations in the 2400 – 2483.5 MHz frequency band.

Name of Applicant: Garmin International, Inc.  
1200 East 151st Street  
Olathe, KS 66062

Model: A02947

FCC ID: IPH-02947 IC: 1792A-02947

Operating power: 2402-2480 MHz Maximum Average power 91.9 dBμV/m @ 3 meters (and peak 95.7 dBμV/m @ 3 meters, 1,082.5 kHz (99% OBW)

## Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Bands 47CFR 15.205	-14.0	Complies
AC Line Conducted 47CFR 15.207	-11.7	Complies
Radiated Emissions 47CFR 15.209	-25.0	Complies
Harmonic Emissions per 47CFR 15.249	-7.7	Complies

## Equipment Tested

<u>Equipment</u>	<u>Model / PN</u>	<u>Serial Number</u>
EUT	A02947	3908535043
EUT #2	A02947	4JE000016
AC Adapter	SCB0500600P	Not Available
AC Adapter	362-00072-00	Not Available
AC Adapter	362-00086-01	D42402246A1
AC Adapter	362-00087-00	Not Available
DC Adapter	013-00434-00	Not Available
USB cradle	320-01035-00	N/A
Laptop Computer	studio XPS (PP35L)	921LBN1
USB Printer	Dell 0N5819	5D1SL61

Test results in this report relate only to the items tested.

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Garmin International, Inc.  
Model: A02947  
Test #: 150828  
Test to: CFR47 15C, RSS-247  
File: Garmin A02947 TstRpt 150828


SN: 3908535043  
FCC ID#: IPH-02947  
IC: 1792A-02947  
Date: September 30, 2015  
Page 5 of 42

## Equipment Function and Configuration

The EUT is a portable GPS enabled digital device. The device provides ability for tracking position and incorporates sensors to log movement. The design includes a low power transmitter for communications with compliant equipment and incorporates interface options as presented below in configuration diagrams. A completed system offers end user ability to utilize received GPS and other information for tracking location and other information and provides wireless connectivity. The EUT incorporates low power transmitter with operation capability in the 2402-2480 MHz frequency band. The design provides wireless communications in one of two modes providing wireless interface capabilities with compatible equipment. The product operates from internal rechargeable battery only. Recharge of internal battery may be accomplished with the use of USB interface cradle, while connected to compliant AC adapter or standard USB interface port. The design utilizes internal fixed antenna system and offers no provision for antenna replacement or modification. Two samples were provided for testing, one representative of production design, and the other modified for testing purposes replacing integral antenna with RF connection port. The test samples were provided with test software enabling testing personnel ability to enable transmitter function on defined channels. The antenna modification offered testing facility ability to connect test equipment to the temporary antenna port for antenna port conducted emission testing. The EUT was arranged as described by the manufacturer emulating typical user configurations for testing purposes. The EUT offers no other interface connections than those in the configuration options as presented and described by the manufacturer. For testing purposes, the EUT received powered from freshly charged internal battery and /or while interfaced with compatible USB powering devices and configured to operate in available modes. As requested by the manufacturer and required by regulations, the equipment was tested for emissions compliance using the available configurations with the worst-case data presented. The test software was capable of enabling 100% transmission for testing purposes. The production product will not operate at high duty cycles. Test results in this report relate only to the products described in this report.

## Equipment Configuration


1. A02947 operating off internal Li-Ion Battery




2. A02947 internal battery charged by PC through USB cable




3. A02947 internal battery charged by AC adapter through USB cable




4. A02947 internal battery charged by AC adapter through USB cable




5. A02947 internal battery charged by AC adapter through USB cable




6. A02947 internal battery charged by AC adapter through USB cable



7. A02947 internal battery charged by DC adapter through USB cable



8. A02947 transmitting data through wireless 2.4 GHz communication (see test procedure document) and powered by internal battery

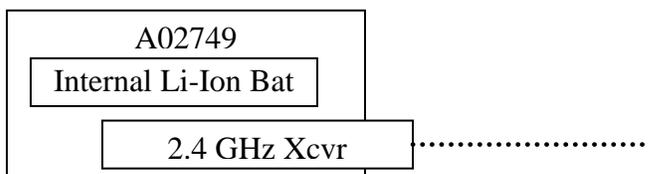

## Application for Certification

- (1) Manufacturer: Garmin International, Inc.  
1200 East 151st Street  
Olathe, KS 66062
- (2) Identification: Model: A02947  
FCC ID: IPH-02947 IC: 1792A-02947
- (3) Instruction Book:  
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:  
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:  
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:  
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:  
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from internal rechargeable battery as documented in this report. The battery may be charged with use of compliant AC adapter or USB port. The device provides information wirelessly to remotely located compliant equipment. The EUT offers no other connection ports than those presented in this filing.
- (9) Transition Provisions of CFR47 15.37 are not requested.
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.

## Applicable Standards & Test Procedures

In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2014; Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.249, and Industry Canada RSS-247 operation in the 2400 – 2483.5 MHz Frequency band. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013.


## Equipment Testing Procedures

### ***AC Line Conducted Emission Test Procedure***

Testing for the AC line-conducted emissions was performed as defined in ANSI C63.10-2013. The test setup, including the EUT, was arranged in the test configurations as presented during testing. The test configuration was placed on a 1 x 1.5-meter bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- $\mu$ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table. Refer to diagram 1 showing typical test arrangement and photographs in exhibits for EUT placement used during testing.


### ***Radiated Emission Test Procedure***

The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. Radiated emissions testing was performed as required in the regulations and specified in ANSI C63.10-2013. EMI energy was maximized by equipment placement permitting orientation in three orthogonal axes, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken and recorded. The frequency spectrum from 9 kHz to 25,000 MHz was searched for emissions during preliminary investigation. Refer to diagrams two and three showing typical test setup and photographs for equipment arrangement in the test setup exhibits for specific EUT placement during testing.

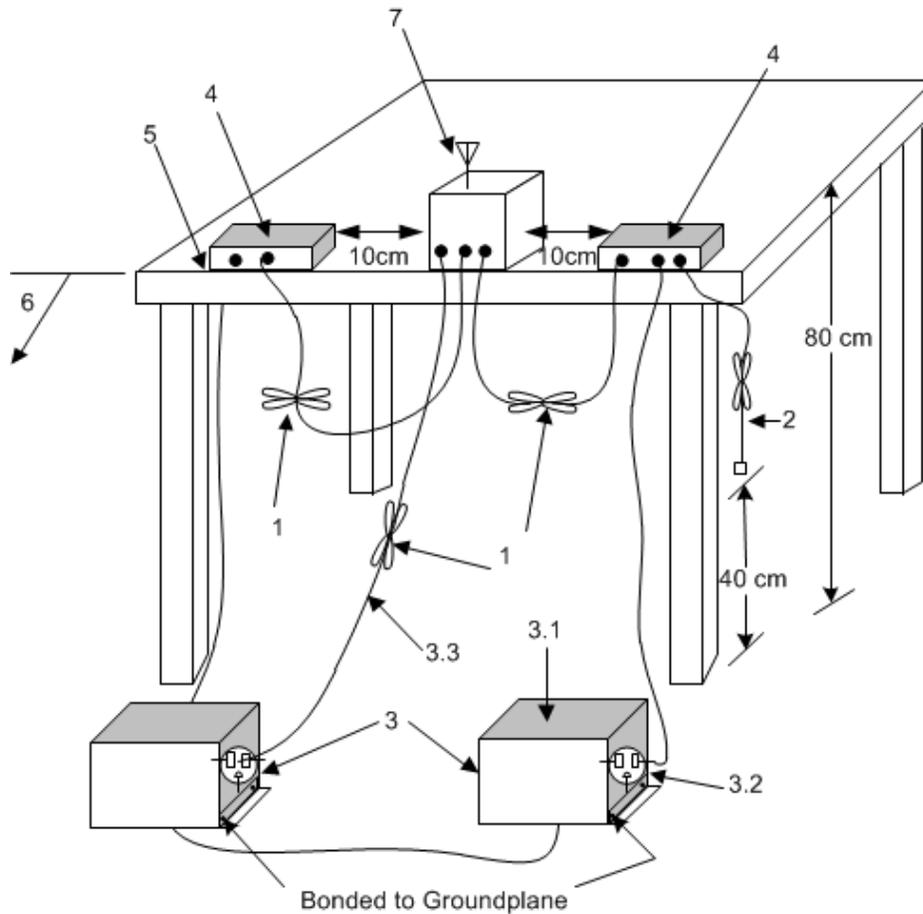

- 1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.2).
- 2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).
- 3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$  loads. LISN may be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
- 3.1—All other equipment powered from additional LISN(s).
- 3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.
- 3.3—LISN at least 80 cm from nearest part of EUT chassis.
- 4—Non-EUT components of EUT system being tested.
- 5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop (see 6.2.3.2).
- 6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
- 7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.

**Diagram 1 Test arrangement for Conducted emissions**

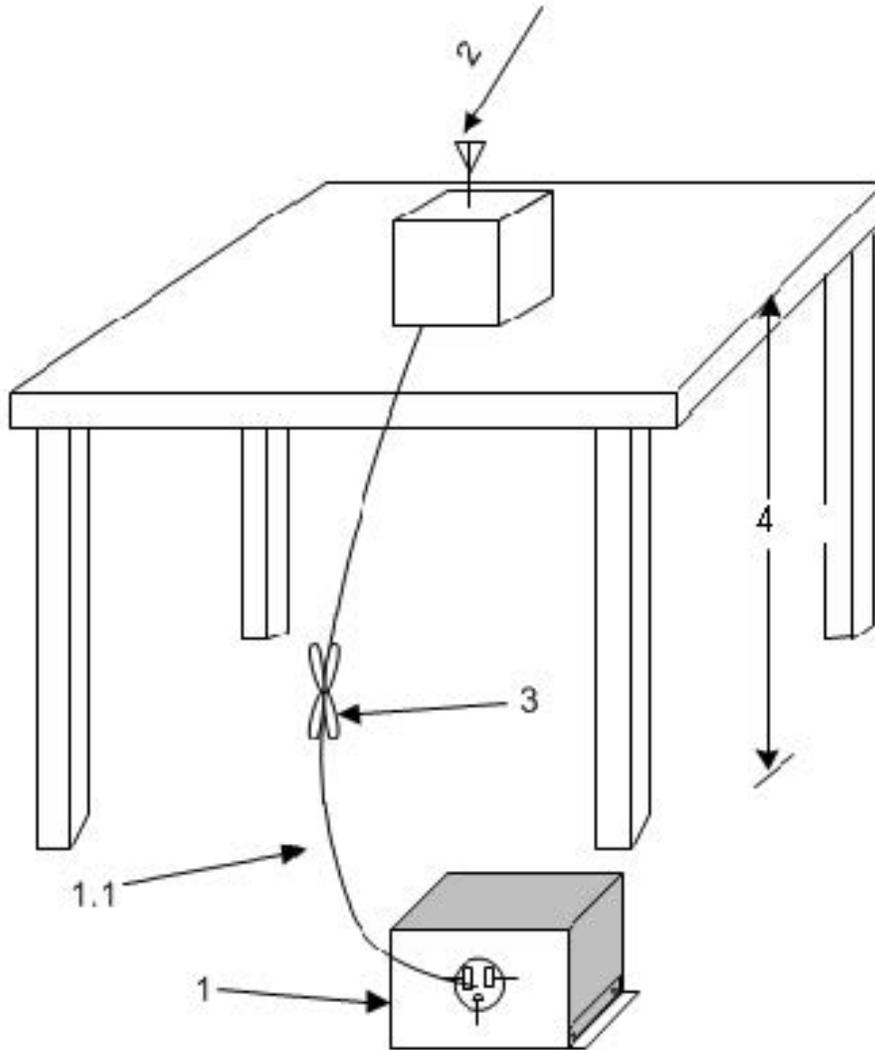

1—A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).


1.1—LISN spaced at least 80 cm from the nearest part of the EUT chassis.

2—Antenna can be integral or detachable, depending on the EUT (see 6.3.1).

3—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).

4—For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

**Diagram 2 Test arrangement for radiated emissions of tabletop equipment**

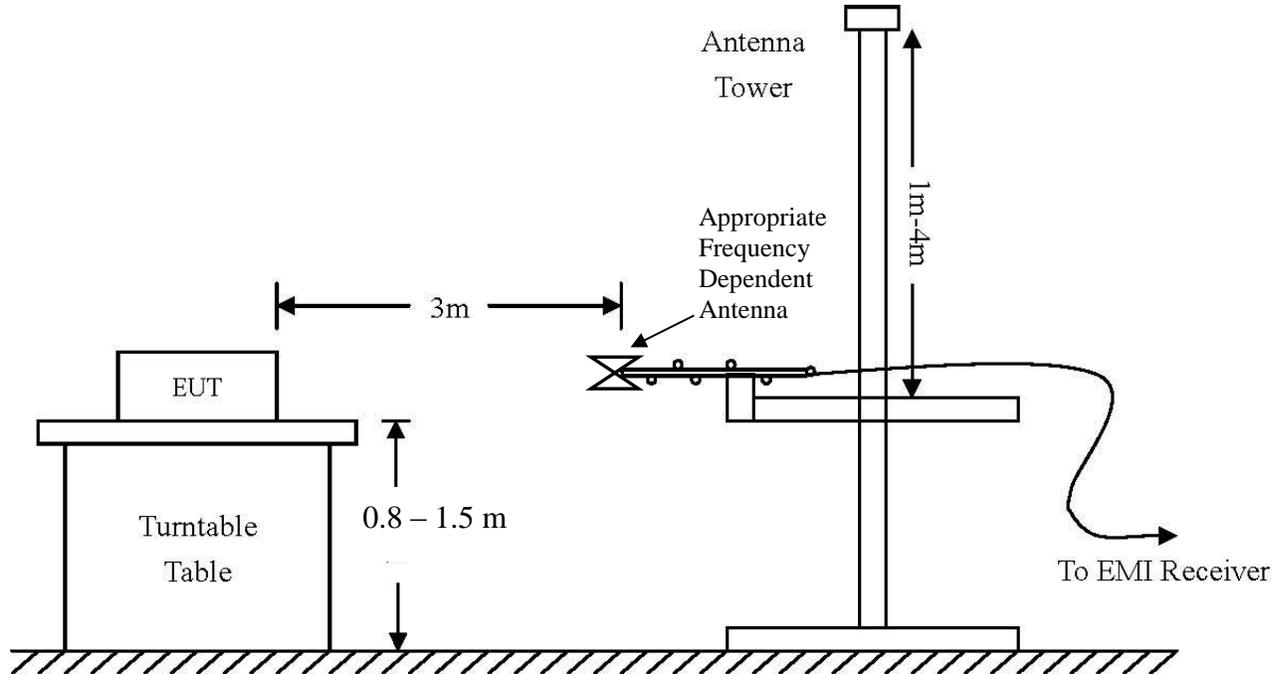

Frequency: 9 kHz-30 MHz	Frequency: 30 MHz- 1 GHZ	Frequency: Above 1 GHz
Loop Antenna	Broadband Biconilog	Horn
RBW = 9 kHz	RBW = 120 kHz	RBW = 1 MHz
VBW = 30 kHz	VBW = 120 kHz	VBW = 1 MHz
Sweep time = Auto	Sweep time = Auto	Sweep time = Auto
Detector = PK, QP	Detector = PK, QP	Detector = PK, AV
Antenna Height 1m	Antenna Height 1-4m	Antenna Height 1-4m

**Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)**

### Test Site Locations

**Conducted EMI** The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS

**Radiated EMI** The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS

**Site Registration** Refer to Annex for Site Registration Letters

**NVLAP Accreditation** Lab code 200087-0

Rogers Labs, Inc.  
 4405 W. 259th Terrace  
 Louisburg, KS 66053  
 Phone/Fax: (913) 837-3214  
 Revision 1

Garmin International, Inc.  
 Model: A02947  
 Test #: 150828  
 Test to: CFR47 15C, RSS-247  
 File: Garmin A02947 TstRpt 150828

SN: 3908535043  
 FCC ID#: IPH-02947  
 IC: 1792A-02947  
 Date: September 30, 2015  
 Page 12 of 42

## List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

AC Line Conducted Emissions (0.150 -30 MHz)		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Emissions (30-1000 MHz)		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date</u>	<u>Due</u>
<input checked="" type="checkbox"/> LISN	FCC	FCC-LISN-50-2-10(1PA) (160611)	.15-30MHz	6/15	5/16
<input checked="" type="checkbox"/> Cable	Time Microwave	750HF290-750 (L10M)	9kHz-40 GHz	10/14	10/15
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	10/14	10/15
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	10/14	10/15
<input type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	10/14	10/15
<input type="checkbox"/> Antenna	EMCO	3147 (40582)	200-1000MHz	10/14	10/15
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	5/15	5/17
<input type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	10/14	10/16
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	5/15	5/17
<input checked="" type="checkbox"/> Antenna	EMCO	6509 (9502-1374)	.001-30 MHz	10/14	10/15
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	10/14	10/15
<input type="checkbox"/> Antenna	EMCO	3143 (9607-1277)	20-1200 MHz	5/15	5/16
<input type="checkbox"/> Analyzer	HP	8591EM (3628A00871)	9kHz-1.8GHz	5/15	5/16
<input type="checkbox"/> Analyzer	HP	8562A (3051A05950)	9kHz-110GHz	5/15	5/16
<input type="checkbox"/> Analyzer	HP External Mixers	11571, 11970	25GHz-110GHz	5/15	5/16
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	5/15	5/16
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	10/14	10/15
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPA-102 (01254)	1-1000 MHz	10/14	10/15
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	10/14	10/15

## Units of Measurements

Conducted EMI      Data is in dB $\mu$ V; dB referenced to one microvolt

Radiated EMI      Data is in dB $\mu$ V/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses

RFS (dB $\mu$ V/m @ 3m) = FSM (dB $\mu$ V) + A.F. (dB) - Gain (dB)

## Environmental Conditions

Ambient Temperature	23.5° C
Relative Humidity	48%
Atmospheric Pressure	1013.7 mb

## Intentional Radiators

As per CFR47, Subpart C, paragraph 15.249 and Industry Canada RSS-247, the following information is submitted.

### ***Antenna Requirements***

The EUT incorporates integral antenna system and offers no provision for connection to alternate antenna system. The antenna connection point complies with the unique antenna connection requirements. The unique antenna connection requirements are fulfilled. There are no deviations or exceptions to the specification.

### ***Restricted Bands of Operation***

Spurious emissions falling in the restricted frequency bands of operation were measured at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were investigated at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed emission values take into account the received radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Rogers Labs, Inc.  
 4405 W. 259th Terrace  
 Louisburg, KS 66053  
 Phone/Fax: (913) 837-3214  
 Revision 1

Garmin International, Inc.  
 Model: A02947  
 Test #: 150828  
 Test to: CFR47 15C, RSS-247  
 File: Garmin A02947 TstRpt 150828

SN: 3908535043  
 FCC ID#: IPH-02947  
 IC: 1792A-02947  
 Date: September 30, 2015  
 Page 14 of 42

**Table 1 Radiated Emissions in Restricted Frequency Bands Data**

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
<b>Mode 1</b>							
2390.0	52.3	N/A	26.9	43.3	N/A	26.8	54.0
2483.5	57.1	N/A	27.3	47.3	N/A	26.6	54.0
4804.0	44.5	N/A	32.2	44.1	N/A	31.6	54.0
4882.0	50.3	N/A	32.0	44.4	N/A	32.0	54.0
4958.0	44.4	N/A	31.6	44.7	N/A	31.6	54.0
7206.0	45.5	N/A	32.8	45.2	N/A	32.6	54.0
7323.0	46.7	N/A	33.8	46.9	N/A	34.1	54.0
7437.0	46.9	N/A	33.7	46.6	N/A	33.5	54.0
12010.0	51.5	N/A	39.0	51.6	N/A	38.8	54.0
12205.0	52.1	N/A	39.1	52.8	N/A	38.9	54.0
12395.0	52.3	N/A	39.5	52.7	N/A	40.0	54.0
<b>Mode 2</b>							
2390.0	54.4	N/A	27.3	44.9	N/A	26.9	54.0
2483.5	53.9	N/A	30.5	47.4	N/A	27.5	54.0
4804.0	45.2	N/A	32.1	43.8	N/A	31.5	54.0
4884.0	43.7	N/A	31.3	44.2	N/A	31.4	54.0
4960.0	45.4	N/A	32.2	45.2	N/A	32.0	54.0
7206.0	45.7	N/A	32.7	49.2	N/A	37.1	54.0
7326.0	49.1	N/A	36.3	50.5	N/A	39.3	54.0
7440.0	48.8	N/A	35.9	50.6	N/A	38.9	54.0
12010.0	51.5	N/A	38.9	51.0	N/A	38.4	54.0
12210.0	51.2	N/A	38.3	51.2	N/A	38.5	54.0
12400.0	53.2	N/A	40.0	52.7	N/A	40.0	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

**Summary of Results for Radiated Emissions in Restricted Bands**

The EUT demonstrated compliance with the radiated emissions requirements of 47 CFR Part 15C Intentional Radiators. The EUT demonstrated a worst-case minimum margin of -14.0 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

## **AC Line Conducted EMI Procedure**

The EUT was arranged in typical equipment configurations as offered by manufacturer. Testing was performed with the EUT placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. Testing for the line-conducted emissions were the procedures of ANSI C63.10-2013. The AC adapter for the EUT was connected to the LISN for line-conducted emissions testing. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor, internal to the LISN. Power line conducted emissions testing was carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequencies of each of the emissions, which demonstrated the highest amplitudes. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then data was recorded with maximum conducted emissions levels. Refer to figures one through eight showing plots of the worst-case AC Line conducted emissions of the AC Adapter options while charging the EUT. Refer to figures nine and ten showing plots of the worst-case AC Line conducted emissions of the EUT-USB-CPU configuration.

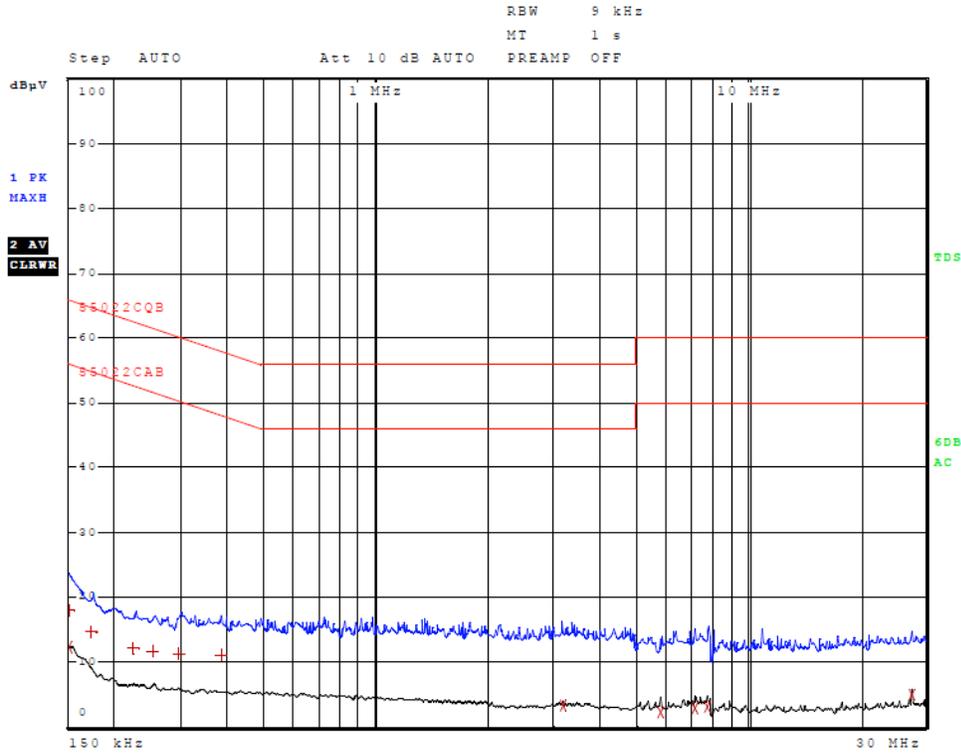


Figure 1 AC Line Conducted emissions of EUT line 1 (EUT AC Adapter SCB055600P)

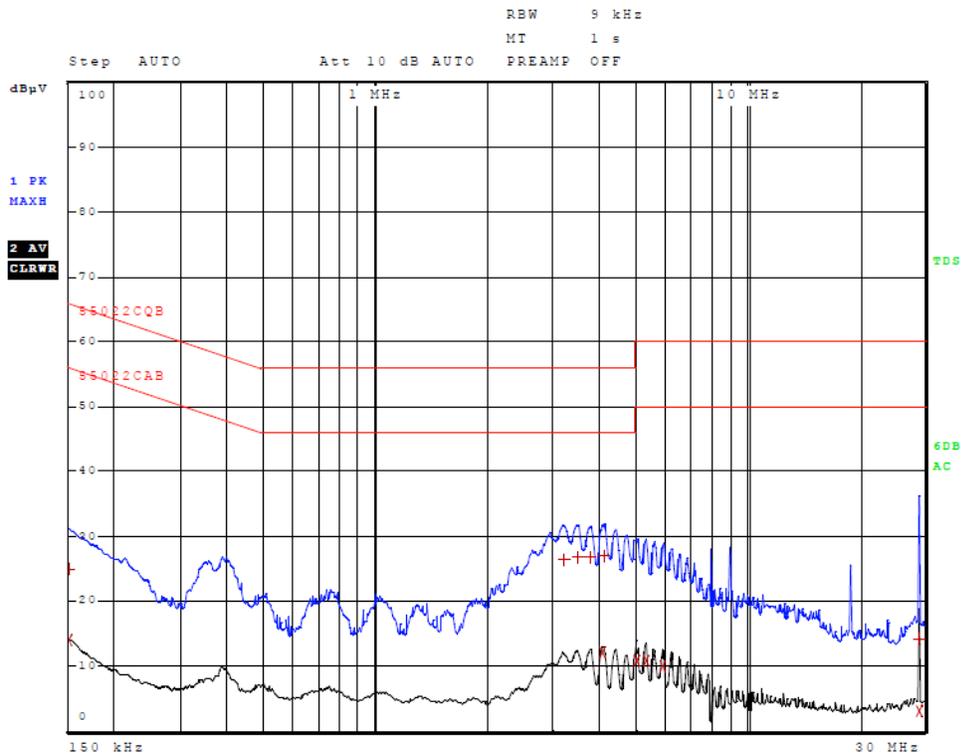


Figure 2 AC Line Conducted emissions of EUT line 2 (EUT AC Adapter SCB055600P)

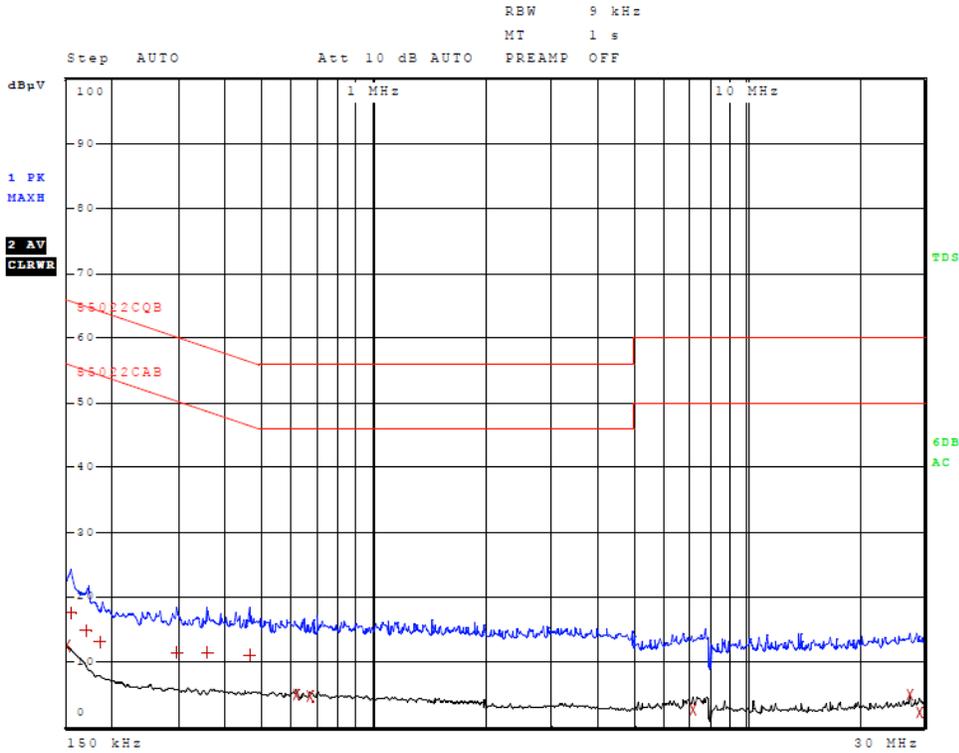


Figure 3 AC Line Conducted emissions of EUT line 1 (EUT AC Adapter 326-00072-00)

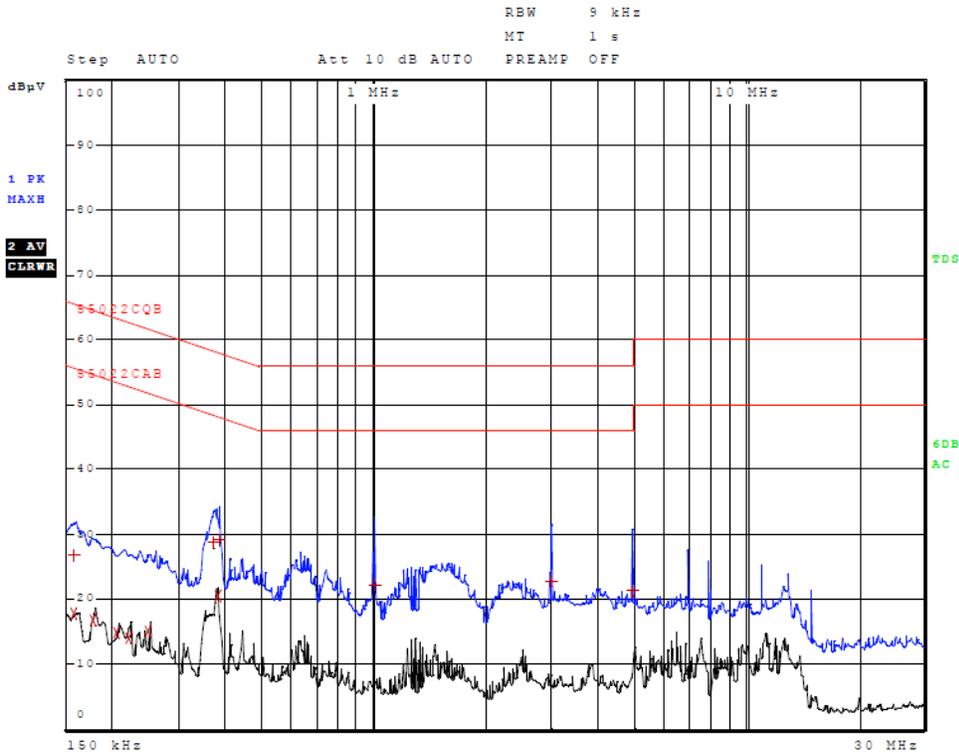


Figure 4 AC Line Conducted emissions of EUT line 2 (EUT AC Adapter 326-00072-00)

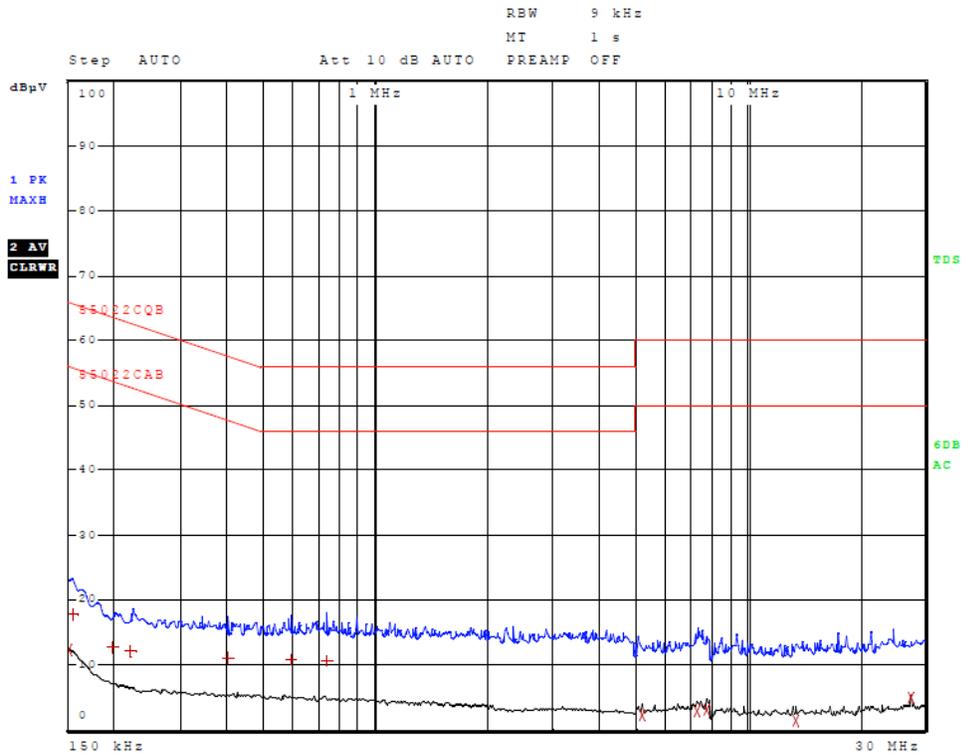


Figure 5 AC Line Conducted emissions of EUT line 1 (EUT AC Adapter 326-00086-01)



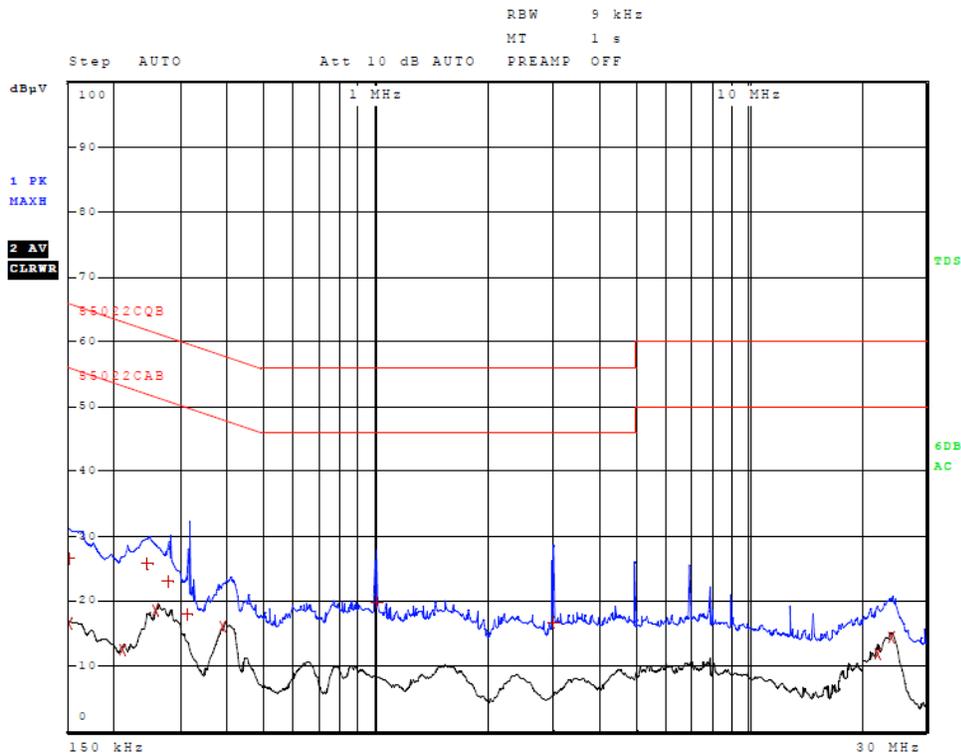


Figure 6 AC Line Conducted emissions of EUT line 2 (EUT AC Adapter 326-00086-01)

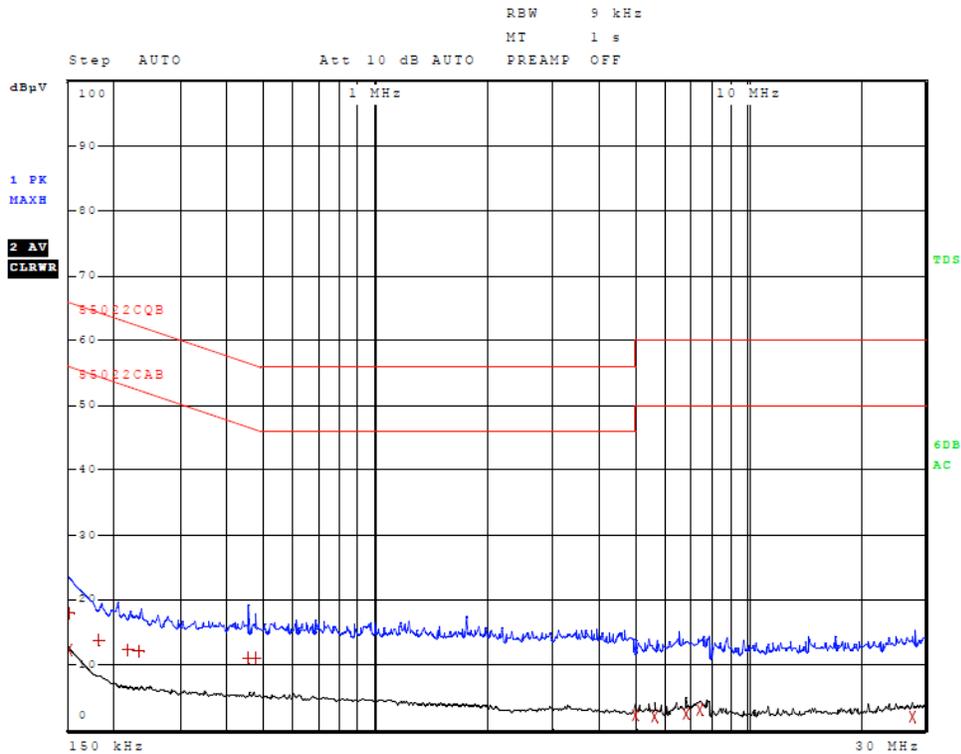

**Figure 7 AC Line Conducted emissions of EUT line 1 (EUT AC Adapter 326-00087-00)**

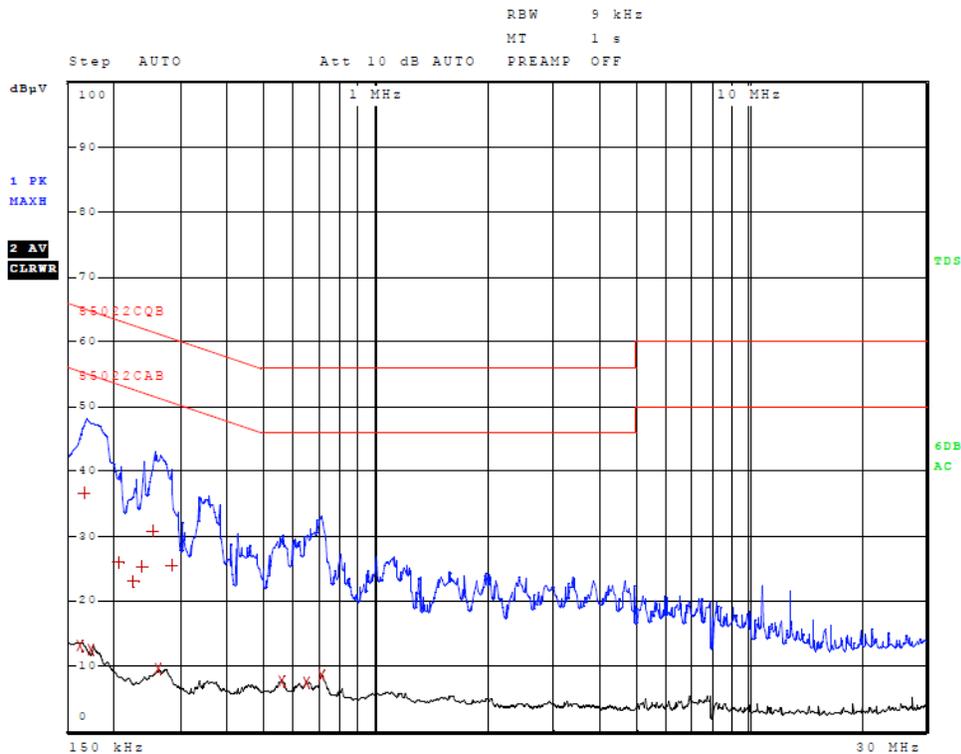


**Figure 8 AC Line Conducted emissions of EUT line 2 (EUT AC Adapter 326-00087-00)**


Rogers Labs, Inc.  
 4405 W. 259th Terrace  
 Louisburg, KS 66053  
 Phone/Fax: (913) 837-3214  
 Revision 1

Garmin International, Inc.  
 Model: A02947  
 Test #: 150828  
 Test to: CFR47 15C, RSS-247  
 File: Garmin A02947 TstRpt 150828

SN: 3908535043  
 FCC ID#: IPH-02947  
 IC: 1792A-02947  
 Date: September 30, 2015  
 Page 20 of 42

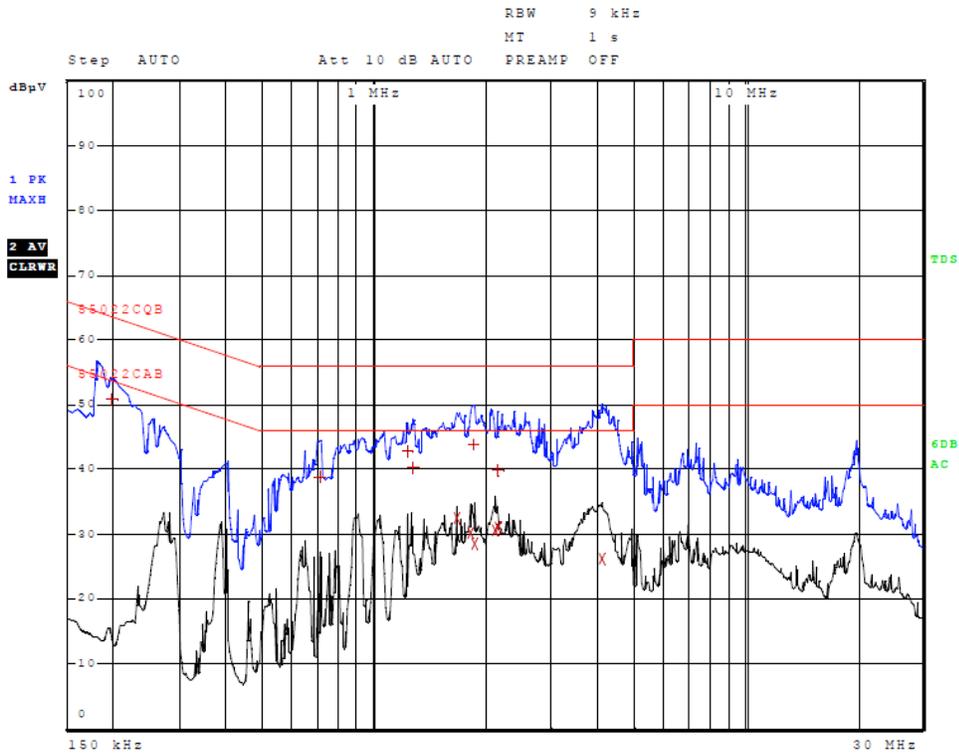

**Figure 9 AC Line Conducted emissions of EUT line 1 (EUT-USB-CPU AC Adapter)**

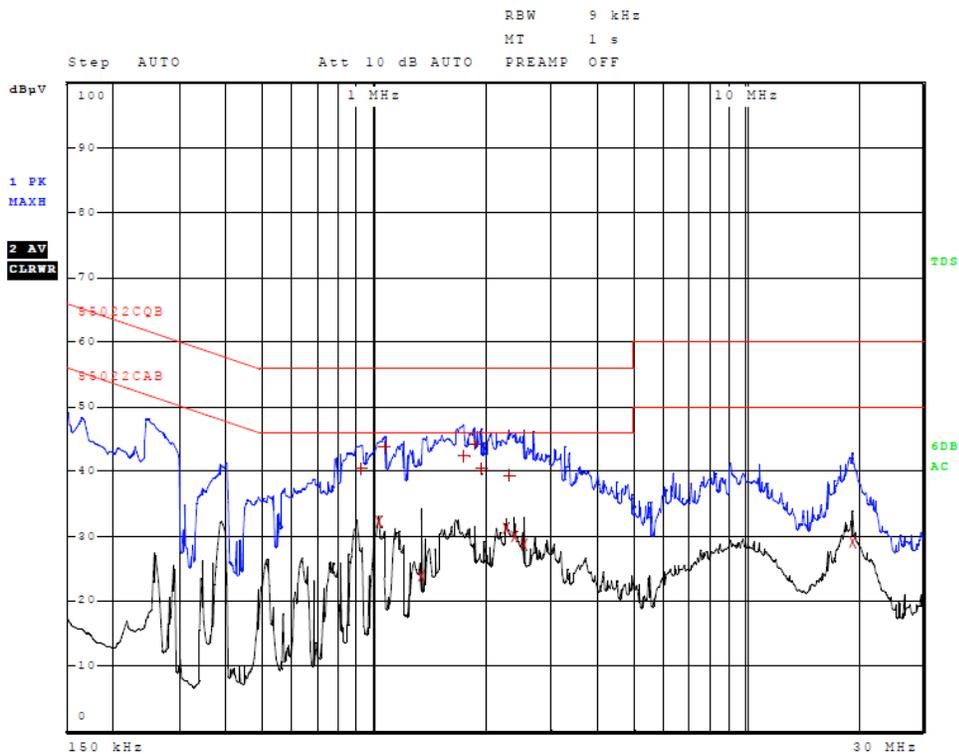

**Figure 10 AC Line Conducted emissions of EUT line 2 (EUT-USB-CPU AC Adapter)**

**Table 2 AC Line Conducted Emissions Data L1 (EUT-AC Adapter, SCB0500600P)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
2	150.000000000 kHz	12.30	Average	-43.70
1	150.000000000 kHz	18.07	Quasi Peak	-47.93
1	174.000000000 kHz	14.55	Quasi Peak	-50.22
1	226.000000000 kHz	11.98	Quasi Peak	-50.61
1	254.000000000 kHz	11.63	Quasi Peak	-49.99
1	298.000000000 kHz	11.33	Quasi Peak	-48.97
1	382.000000000 kHz	11.13	Quasi Peak	-47.10
2	3.190000000 MHz	3.16	Average	-42.84
2	5.844000000 MHz	2.22	Average	-47.78
2	7.216000000 MHz	2.84	Average	-47.16
2	7.768000000 MHz	3.02	Average	-46.98
2	27.584000000 MHz	4.90	Average	-45.10

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 3 AC Line Conducted Emissions Data L2 (EUT-AC Adapter, SCB0500600P)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	150.000000000 kHz	24.96	Quasi Peak	-41.04
2	150.000000000 kHz	14.00	Average	-42.00
1	3.214000000 MHz	26.27	Quasi Peak	-29.73
1	3.486000000 MHz	26.69	Quasi Peak	-29.31
1	3.782000000 MHz	26.84	Quasi Peak	-29.16
2	4.082000000 MHz	12.13	Average	-33.87
1	4.098000000 MHz	27.08	Quasi Peak	-28.92
2	5.060000000 MHz	10.79	Average	-39.21
2	5.332000000 MHz	10.75	Average	-39.25
2	5.940000000 MHz	9.97	Average	-40.03
2	28.900000000 MHz	3.01	Average	-46.99
1	28.900000000 MHz	14.27	Quasi Peak	-45.73

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 4 AC Line Conducted Emissions Data L1 (EUT-AC Adapter, 362-00072-00)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
2	150.000000000 kHz	12.40	Average	-43.60
1	154.000000000 kHz	17.62	Quasi Peak	-48.16
1	170.000000000 kHz	14.82	Quasi Peak	-50.14
1	186.000000000 kHz	13.22	Quasi Peak	-50.99
1	294.000000000 kHz	11.36	Quasi Peak	-49.05
1	354.000000000 kHz	11.36	Quasi Peak	-47.51
1	462.000000000 kHz	10.96	Quasi Peak	-45.70
2	614.000000000 kHz	4.88	Average	-41.12
2	670.000000000 kHz	4.71	Average	-41.29
2	7.212000000 MHz	2.68	Average	-47.32
2	27.584000000 MHz	4.98	Average	-45.02
2	29.348000000 MHz	2.26	Average	-47.74

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 5 AC Line Conducted Emissions Data L2 (EUT-AC Adapter, 362-00072-00)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	158.000000000 kHz	26.88	Quasi Peak	-38.69
2	158.000000000 kHz	17.81	Average	-37.76
2	178.000000000 kHz	16.73	Average	-37.85
2	206.000000000 kHz	14.84	Average	-38.53
2	222.000000000 kHz	13.96	Average	-38.78
2	250.000000000 kHz	14.93	Average	-36.83
1	374.000000000 kHz	28.72	Quasi Peak	-29.69
2	378.000000000 kHz	20.55	Average	-27.77
1	382.000000000 kHz	29.05	Quasi Peak	-29.18
1	998.000000000 kHz	22.24	Quasi Peak	-33.76
1	2.990000000 MHz	22.77	Quasi Peak	-33.23
1	4.986000000 MHz	21.32	Quasi Peak	-34.68

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 6 AC Line Conducted Emissions Data L1 (EUT-AC Adapter, 362-00086-01)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
2	150.000000000 kHz	12.29	Average	-43.71
1	154.000000000 kHz	17.82	Quasi Peak	-47.96
1	198.000000000 kHz	12.76	Quasi Peak	-50.94
1	222.000000000 kHz	12.16	Quasi Peak	-50.58
1	398.000000000 kHz	11.08	Quasi Peak	-46.82
1	590.000000000 kHz	10.87	Quasi Peak	-45.13
1	734.000000000 kHz	10.52	Quasi Peak	-45.48
2	5.196000000 MHz	2.13	Average	-47.87
2	7.320000000 MHz	2.74	Average	-47.26
2	7.800000000 MHz	3.01	Average	-46.99
2	13.508000000 MHz	1.40	Average	-48.60
2	27.584000000 MHz	4.89	Average	-45.11

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 7 AC Line Conducted Emissions Data L2 (EUT-AC Adapter, 362-00086-01)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	150.000000000 kHz	26.50	Quasi Peak	-39.50
2	150.000000000 kHz	16.45	Average	-39.55
2	210.000000000 kHz	12.53	Average	-40.68
1	246.000000000 kHz	25.67	Quasi Peak	-36.22
2	258.000000000 kHz	18.60	Average	-32.89
1	278.000000000 kHz	23.07	Quasi Peak	-37.81
1	314.000000000 kHz	18.02	Quasi Peak	-41.84
2	390.000000000 kHz	16.06	Average	-32.00
1	998.000000000 kHz	19.84	Quasi Peak	-36.16
1	2.994000000 MHz	16.75	Quasi Peak	-39.25
2	22.264000000 MHz	11.93	Average	-38.07
2	24.160000000 MHz	14.36	Average	-35.64

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 8 AC Line Conducted Emissions Data L1 (EUT-AC Adapter, 362-00087-00)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
2	150.000000000 kHz	12.32	Average	-43.68
1	150.000000000 kHz	18.04	Quasi Peak	-47.96
1	182.000000000 kHz	13.71	Quasi Peak	-50.69
1	218.000000000 kHz	12.29	Quasi Peak	-50.61
1	234.000000000 kHz	11.98	Quasi Peak	-50.32
1	454.000000000 kHz	10.99	Quasi Peak	-45.81
1	470.000000000 kHz	11.02	Quasi Peak	-45.50
2	5.004000000 MHz	2.23	Average	-47.77
2	5.620000000 MHz	2.05	Average	-47.95
2	6.824000000 MHz	2.49	Average	-47.51
2	7.460000000 MHz	3.00	Average	-47.00
2	27.684000000 MHz	2.07	Average	-47.93

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 9 AC Line Conducted Emissions Data L2 (EUT-AC Adapter, 362-00087-00)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
2	162.000000000 kHz	13.16	Average	-42.20
1	166.000000000 kHz	36.61	Quasi Peak	-28.55
2	174.000000000 kHz	12.53	Average	-42.24
1	206.000000000 kHz	25.88	Quasi Peak	-37.49
1	226.000000000 kHz	22.96	Quasi Peak	-39.63
1	238.000000000 kHz	25.40	Quasi Peak	-36.76
1	254.000000000 kHz	30.86	Quasi Peak	-30.77
2	262.000000000 kHz	9.62	Average	-41.75
1	282.000000000 kHz	25.60	Quasi Peak	-35.16
2	554.000000000 kHz	7.64	Average	-38.36
2	650.000000000 kHz	7.50	Average	-38.50
2	710.000000000 kHz	8.41	Average	-37.59

Other emissions present had amplitudes at least 20 dB below the limit.

**Table10 AC Line Conducted Emissions Data L1 (EUT-USB-CPU)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	198.000000000 kHz	50.63	Quasi Peak	-13.06
1	710.000000000 kHz	38.73	Quasi Peak	-17.27
1	1.230000000 MHz	42.82	Quasi Peak	-13.18
1	1.270000000 MHz	40.13	Quasi Peak	-15.87
2	1.666000000 MHz	32.39	Average	-13.61
2	1.818000000 MHz	30.14	Average	-15.86
1	1.854000000 MHz	43.73	Quasi Peak	-12.27
2	1.858000000 MHz	28.37	Average	-17.63
2	2.110000000 MHz	30.46	Average	-15.54
1	2.146000000 MHz	39.91	Quasi Peak	-16.09
2	2.150000000 MHz	31.02	Average	-14.98
2	4.126000000 MHz	26.11	Average	-19.89

Other emissions present had amplitudes at least 20 dB below the limit.

**Table 11 AC Line Conducted Emissions Data L2 (EUT-USB-CPU)**

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	918.000000000 kHz	40.43	Quasi Peak	-15.57
2	1.030000000 MHz	32.27	Average	-13.73
1	1.066000000 MHz	43.84	Quasi Peak	-12.16
2	1.334000000 MHz	23.93	Average	-22.07
1	1.738000000 MHz	42.40	Quasi Peak	-13.60
1	1.862000000 MHz	44.23	Quasi Peak	-11.77
1	1.950000000 MHz	40.34	Quasi Peak	-15.66
2	2.258000000 MHz	31.20	Average	-14.80
1	2.306000000 MHz	39.29	Quasi Peak	-16.71
2	2.386000000 MHz	29.89	Average	-16.11
2	2.526000000 MHz	28.68	Average	-17.32
2	19.388000000 MHz	29.17	Average	-20.83

Other emissions present had amplitudes at least 20 dB below the limit.

**Summary of Results for AC Line Conducted Emissions Results**

The EUT demonstrated compliance with the AC Line Conducted Emissions requirements of CFR 47 Part 15B and other applicable Class B emissions requirements. The EUT AC Adapter worst-case configuration demonstrated a minimum margin of -28.5 dB below the limit. The EUT-USB-CPU worst-case configuration demonstrated a minimum margin of -11.7 dB below the limit. Other emissions were present with amplitudes at least 20 dB below the limit and worst-case amplitudes recorded.

### **General Radiated Emissions Procedure**

The EUT was arranged in a typical equipment configuration and operated through all available modes during testing. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 25,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or double Ridge or pyramidal horns and mixers above 1 GHz, notch filters and appropriate amplifiers and external mixers were utilized.

**Table 12 General Radiated Emissions from EUT Data**

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
Mode 1							
2362.2	38.8	N/A	26.5	39.8	N/A	26.7	54.0
2392.0	54.3	N/A	26.8	44.3	N/A	27.1	54.0
2485.3	53.6	N/A	28.9	47.8	N/A	27.5	54.0
Mode 2							
2362.2	39.5	N/A	26.8	39.9	N/A	26.9	54.0
2392.0	55.9	N/A	27.6	44.9	N/A	26.9	54.0
2485.3	54.7	N/A	29.0	47.1	N/A	27.2	54.0


Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

**Summary of Results for General Radiated Emissions**


The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15C paragraph 15.209 Intentional Radiators. The EUT demonstrated a minimum margin of -25.0 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

**Operation in the Band 2400 – 2483.5 MHz**


The transmitter output power; harmonic and general emissions were measured on an open area test site @ 3 meters. The EUT was placed on a turntable elevated as required above the ground plane and at a distance of 3 meters from the FSM antenna. The table permitted orientation of the EUT in each of three orthogonal axis positions during testing. The peak and quasi-peak amplitude of frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of frequencies above 1000 MHz were measured using a spectrum analyzer. The amplitude of each emission was then recorded from the analyzer display. Emissions radiated outside of the specified bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits, whichever is the lesser attenuation. Plots were taken of transmitter performance for reference in this and other documentation. Refer to figures eleven through fourteen showing plots taken of the 2402-2479 MHz Mode 1 performance displaying compliance with the specifications. Refer to figures fifteen through eighteen showing plots taken of the 2402-2480 MHz Mode 2 performance displaying compliance with the specifications. The amplitude of each radiated emission was measured on the OATS at a distance of 3 meters from the FSM antenna (testing was performed on sample 1 representative of production with integral antenna). The amplitude of each radiated emission was maximized by equipment placement (orientation in three orthogonal axis), raising, and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable by varying the FSM antenna height, polarization, and by rotating the turntable. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas from 1 GHz to 25 GHz. Emissions were measured in dB $\mu$ V/m @ 3 meters.

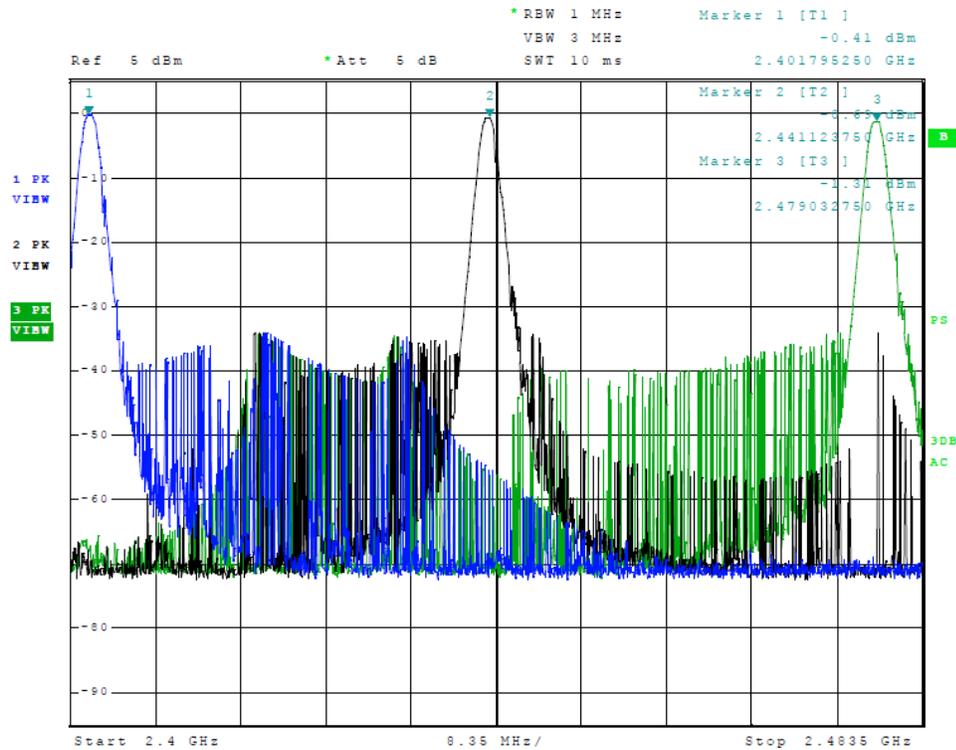


**Figure 11 Plot of Transmitter Emissions (In 2402-2479 MHz Band, Mode 1)**

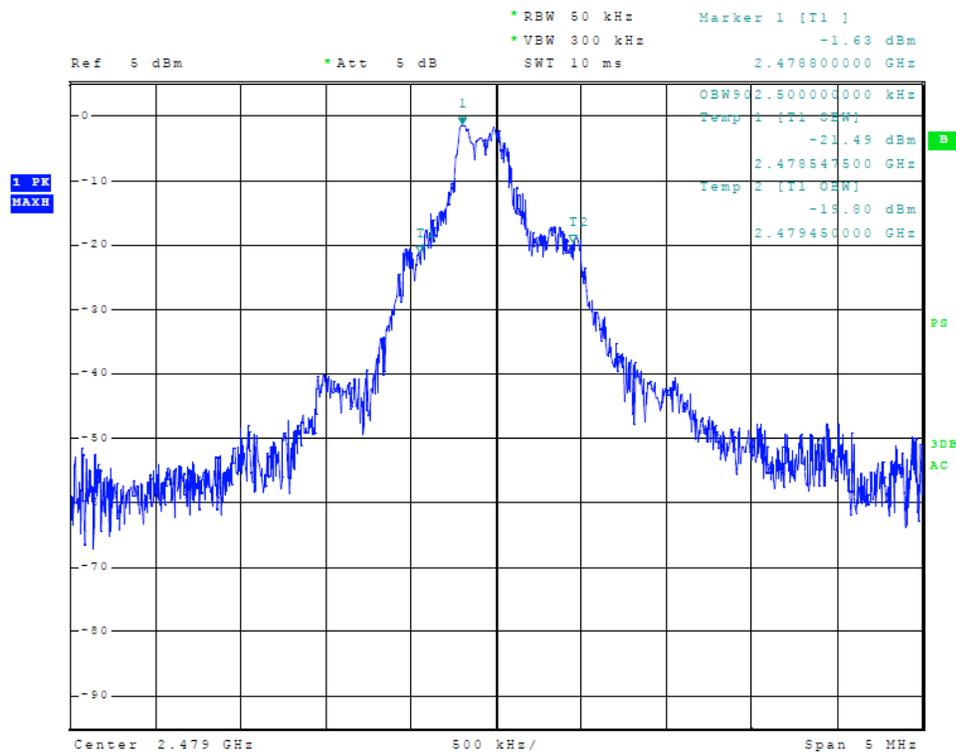


**Figure 12 Plot of Transmitter Emissions (2402-2479 MHz, 99% Occupied Bandwidth, Mode 1)**

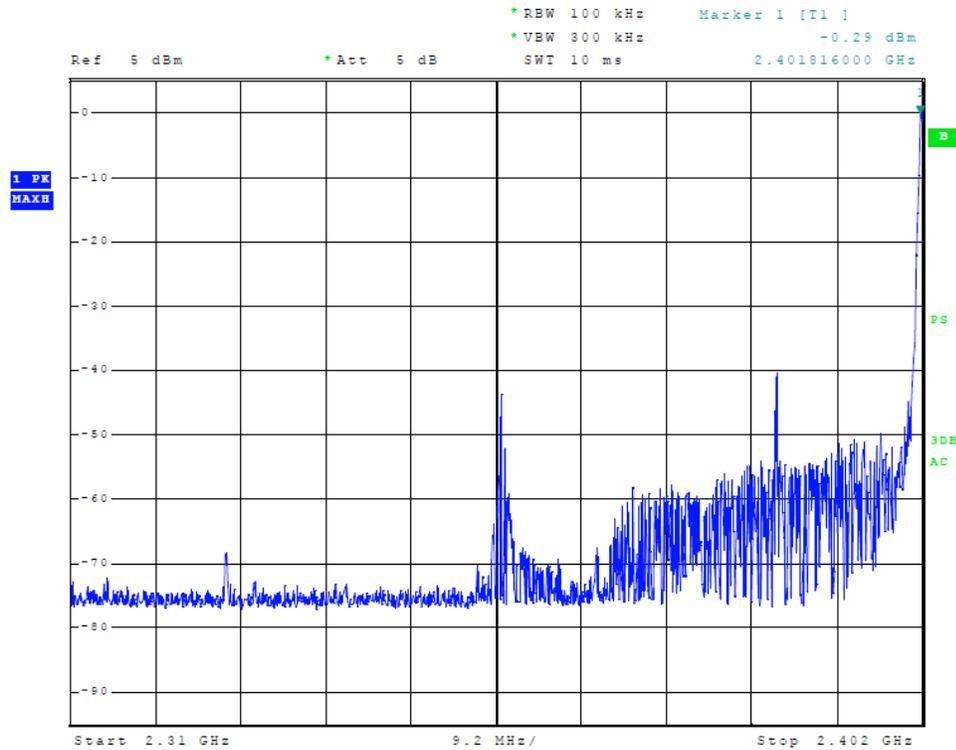


**Figure 13 Plot of Transmitter Emissions (Low Band Edge, Mode 1)**

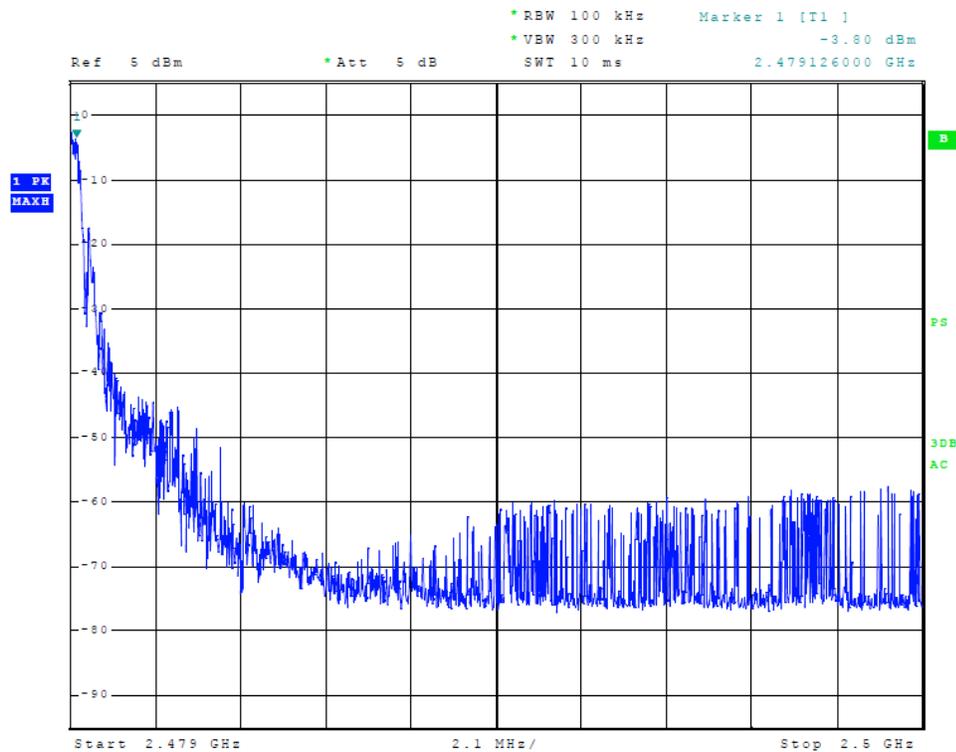


**Figure 14 Plot of Transmitter Emissions (High Band Edge, Mode 1)**

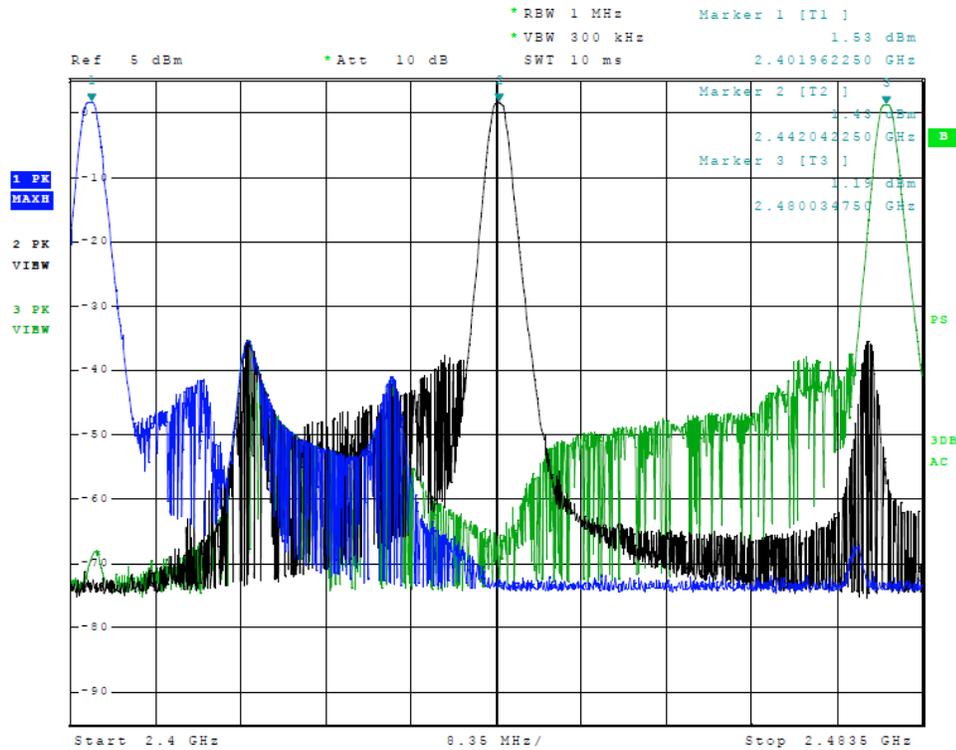


**Figure 15 Plot of Transmitter Emissions (In 2402-2480 MHz Band, Mode 2)**

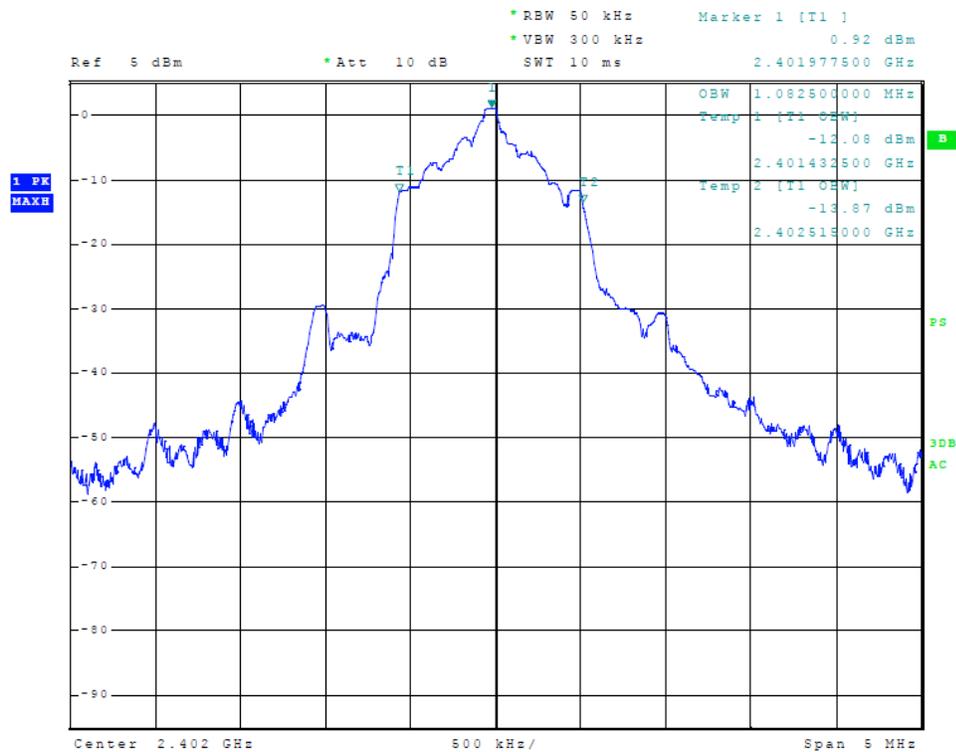

**Figure 16 Plot of Transmitter Emissions (2402-2480 MHz, 99% Occupied Bandwidth, Mode 2)**

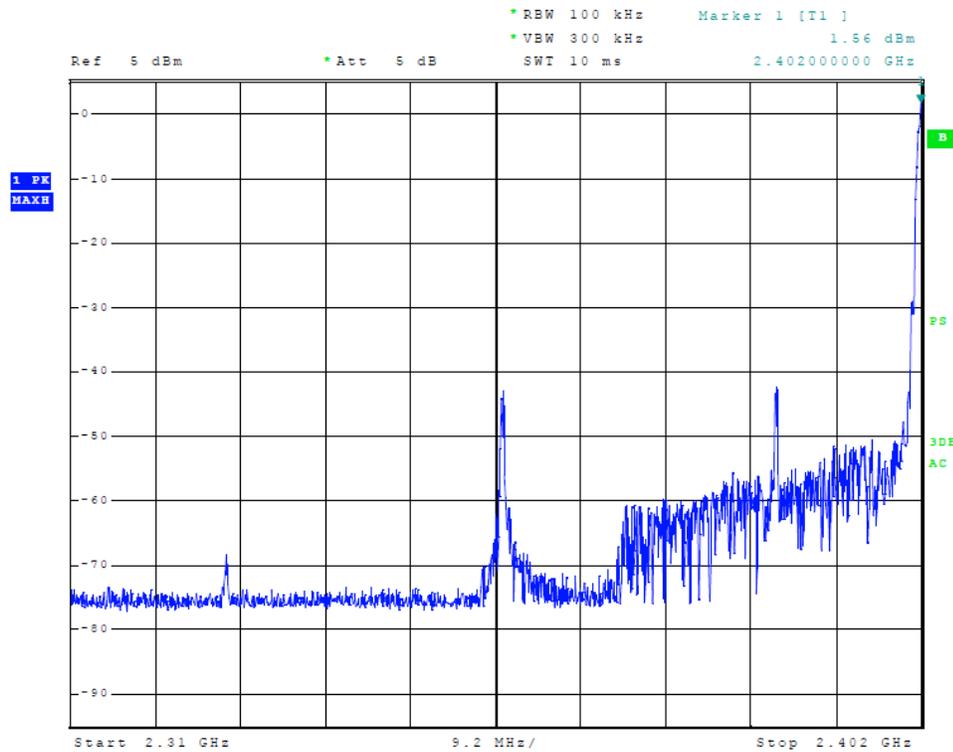

**Figure 17 Plot of Transmitter Emissions (Low Band Edge, Mode 2)**

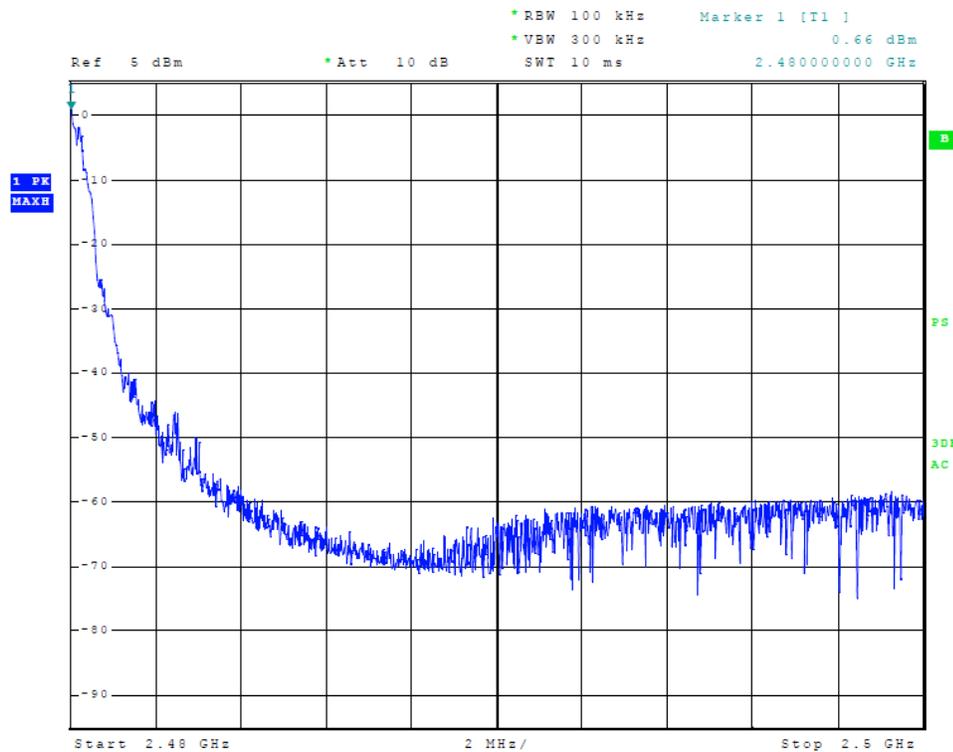

**Figure 18 Plot of Transmitter Emissions (High Band Edge, Mode 1)**

## Transmitter Emissions Data

**Table 13 Transmitter Radiated Emissions (Mode 1)**

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
2402.0	90.5	N/A	58.6	85.7	N/A	52.5	94.0
4804.0	44.5	N/A	32.2	44.1	N/A	31.6	54.0
7206.0	45.5	N/A	32.8	45.2	N/A	32.6	54.0
9608.0	47.3	N/A	34.5	47.1	N/A	34.4	54.0
12010.0	51.5	N/A	39.0	51.6	N/A	38.8	54.0
14412.0	52.1	N/A	39.7	53.3	N/A	39.7	54.0
16814.0	56.6	N/A	44.2	56.2	N/A	44.2	54.0
2441.0	91.9	N/A	58.6	84.6	N/A	52.6	94.0
4882.0	50.3	N/A	32.0	44.4	N/A	32.0	54.0
7323.0	46.7	N/A	33.8	46.9	N/A	34.1	54.0
9764.0	47.7	N/A	35.0	47.9	N/A	35.2	54.0
12205.0	52.1	N/A	39.1	52.8	N/A	38.9	54.0
14646.0	53.1	N/A	40.3	53.2	N/A	40.1	54.0
17087.0	59.2	N/A	46.3	59.3	N/A	46.3	54.0
2479.0	92.8	N/A	60.5	83.2	N/A	51.2	94.0
4958.0	44.4	N/A	31.6	44.7	N/A	31.6	54.0
7437.0	46.9	N/A	33.7	46.6	N/A	33.5	54.0
9916.0	47.5	N/A	34.9	48.0	N/A	35.0	54.0
12395.0	52.3	N/A	39.5	52.7	N/A	40.0	54.0
14874.0	55.1	N/A	41.6	54.5	N/A	41.6	54.0
17353.0	57.5	N/A	44.6	57.8	N/A	44.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

**Table 14 Transmitter Radiated Emissions (Mode 2)**

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
2402.0	95.1	N/A	91.1	87.0	N/A	82.8	94.0
4804.0	45.2	N/A	32.1	43.8	N/A	31.5	54.0
7206.0	45.7	N/A	32.7	49.2	N/A	37.1	54.0
9608.0	46.8	N/A	34.3	46.9	N/A	34.4	54.0
12010.0	51.5	N/A	38.9	51.0	N/A	38.4	54.0
14412.0	53.3	N/A	39.7	52.1	N/A	39.5	54.0
16814.0	56.6	N/A	44.0	56.4	N/A	43.9	54.0
2442.0	93.0	N/A	87.4	88.6	N/A	82.8	94.0
4884.0	43.7	N/A	31.3	44.2	N/A	31.4	54.0
7326.0	49.1	N/A	36.3	50.5	N/A	39.3	54.0
9768.0	48.7	N/A	35.4	49.6	N/A	35.3	54.0
12210.0	51.2	N/A	38.3	51.2	N/A	38.5	54.0
14652.0	53.2	N/A	40.5	53.1	N/A	40.5	54.0
17094.0	58.0	N/A	45.5	58.2	N/A	45.5	54.0
2480.0	95.7	N/A	90.2	86.2	N/A	80.7	94.0
4960.0	45.4	N/A	32.2	45.2	N/A	32.0	54.0
7440.0	48.8	N/A	35.9	50.6	N/A	38.9	54.0
9920.0	49.0	N/A	34.7	48.2	N/A	34.6	54.0
12400.0	53.2	N/A	40.0	52.7	N/A	40.0	54.0
14880.0	54.1	N/A	41.6	55.2	N/A	41.7	54.0
17360.0	57.8	N/A	44.7	58.4	N/A	44.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded for frequency range above 1000 MHz.

### ***Summary of Results for Transmitter Radiated Emissions of Intentional Radiator***

The EUT demonstrated compliance with the radiated emissions requirements of FCC 47 CFR Part 15.249 and other applicable Intentional Radiator regulations. The EUT worst-case test sample configuration demonstrated minimum average margin of -2.9 dB below the average emission limit. The EUT worst-case configuration demonstrated minimum radiated harmonic emission margin of -7.7 dB below the limits. No other radiated emissions were found in the restricted bands less than 20 dB below limits than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the limits.

### **Statement of Modifications and Deviations**

No modifications to the EUT were required for the equipment to demonstrate compliance with the CFR47 Part 15C emissions standards. There were no deviations to the specifications.

## Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

### **Annex A Measurement Uncertainty Calculations**

Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

Measurement Uncertainty	$U_{(E)}$	$U_{(lab)}$
3 Meter Horizontal 30-200 MHz Measurements	2.08	4.16
3 Meter Vertical 30-200 MHz Measurements	2.16	4.33
3 Meter Vertical Measurements 200-1000 MHz	2.99	5.97
10 Meter Horizontal Measurements 30-200 MHz	2.07	4.15
10 Meter Vertical Measurements 30-200 MHz	2.06	4.13
10 Meter Horizontal Measurements 200-1000 MHz	2.32	4.64
10 Meter Vertical Measurements 200-1000 MHz	2.33	4.66
3 Meter Measurements 1-6 GHz	2.57	5.14
3 Meter Measurements 6-18 GHz	2.58	5.16
AC Line Conducted	1.72	3.43

## Annex B Rogers Labs Test Equipment List

List of Test Equipment	Calibration	Date	Due
Spectrum Analyzer: Rohde & Schwarz ESU40		5/15	5/16
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520		5/15	5/16
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W			
Spectrum Analyzer: HP 8591EM		5/15	5/16
Antenna: EMCO Biconilog Model: 3143		5/15	5/16
Antenna: Sunol Biconilog Model: JB6		10/14	10/15
Antenna: EMCO Log Periodic Model: 3147		10/14	10/15
Antenna: Com Power Model: AH-118		10/14	10/16
Antenna: ETS-Lindgren Model: 3117		5/15	5/17
Antenna: Com Power Model: AH-840		5/15	5/17
Antenna: Antenna Research Biconical Model: BCD 235		10/14	10/15
Antenna: EMCO 6509		10/14	10/15
LISN: Compliance Design Model: FCC-LISN-50-25-2-10-CISPR16		6/15	5/16
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 µHy/50 ohm/0.1 µf		10/14	10/15
R.F. Preamp CPPA-102		10/14	10/15
Attenuator: HP Model: HP11509A		10/14	10/15
Attenuator: Mini Circuits Model: CAT-3		10/14	10/15
Attenuator: Mini Circuits Model: CAT-3		10/14	10/15
Cable: Belden RG-58 (L1)		10/14	10/15
Cable: Belden RG-58 (L2)		10/14	10/15
Cable: Belden 8268 (L3)		10/14	10/15
Cable: Time Microwave: 4M-750HF290-750		10/14	10/15
Cable: Time Microwave: 10M-750HF290-750		10/14	10/15
Frequency Counter: Leader LDC825		2/15	2/16
Oscilloscope Scope: Tektronix 2230		2/15	2/16
Wattmeter: Bird 43 with Load Bird 8085		2/15	2/16
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140		2/15	2/16
R.F. Generators: HP 606A, HP 8614A, HP 8640B		2/15	2/16
R.F. Power Amp 65W Model: 470-A-1010		2/15	2/16
R.F. Power Amp 50W M185- 10-501		2/15	2/16
R.F. Power Amp A.R. Model: 10W 1010M7		2/15	2/16
R.F. Power Amp EIN Model: A301		2/15	2/16
LISN: Compliance Eng. Model 240/20		2/15	2/16
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08		2/15	2/16
Antenna: EMCO Dipole Set 3121C		2/15	2/16
Antenna: C.D. B-101		2/15	2/16
Antenna: Solar 9229-1 & 9230-1		2/15	2/16
Audio Oscillator: H.P. 201CD		2/15	2/16
ELGAR Model: 1751		2/15	2/16
ELGAR Model: TG 704A-3D		2/15	2/16
ESD Test Set 2010i		2/15	2/16
Fast Transient Burst Generator Model: EFT/B-101		2/15	2/16
Field Intensity Meter: EFM-018		2/15	2/16
KEYTEK Ecat Surge Generator		2/15	2/16
Rogers Labs, Inc.	Garmin International, Inc.	SN: 3908535043	
4405 W. 259th Terrace	Model: A02947	FCC ID#: IPH-02947	
Louisburg, KS 66053	Test #: 150828	IC: 1792A-02947	
Phone/Fax: (913) 837-3214	Test to: CFR47 15C, RSS-247	Date: September 30, 2015	
Revision 1	File: Garmin A02947 TstRpt 150828	Page 39 of 42	

## **Annex C Rogers Qualifications**

**Scot D. Rogers, Engineer**

### **Rogers Labs, Inc.**

Mr. Rogers has approximately 17 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

#### Positions Held


Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

#### Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



Scot D. Rogers

**Annex D FCC Site Registration Letter**

**FEDERAL COMMUNICATIONS COMMISSION**

**Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046**

April 16, 2015

Registration Number: 90910

Rogers Labs, Inc.  
4405 West 259th Terrace  
Louisburg, KS 66053

Attention: Scot Rogers,


Re: Measurement facility located at Louisburg  
3 & 10 meter site  
Date of Renewal: April 16, 2015

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

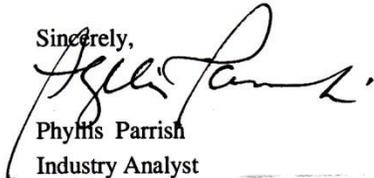
  
Phyllis Parrish  
Industry Analyst

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Garmin International, Inc.  
Model: A02947  
Test #: 150828  
Test to: CFR47 15C, RSS-247  
File: Garmin A02947 TstRpt 150828

SN: 3908535043  
FCC ID#: IPH-02947  
IC: 1792A-02947  
Date: September 30, 2015  
Page 41 of 42

## Annex E Industry Canada Site Registration Letter



June 08, 2015

OUR FILE: 46405-3041  
Authorization No: 010277847-001

Rogers Labs Inc.  
4405 West 259th Terrace  
Louisburg, KS  
USA  
66053

**Attention:** Mr. Scot D. Rogers

Dear Sir:

The Bureau has received your application for the renewal of 3m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought ( **Site# 3041A-1** ). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2009 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2009 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2009 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed **three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL; [http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h\\_tt00052e.html](http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html).

If you have any questions, you may contact the Bureau by e-mail at [certification.bureau@ic.gc.ca](mailto:certification.bureau@ic.gc.ca) Please reference our file and submission number above for all correspondence.

Yours sincerely,

A handwritten signature in black ink, appearing to read "Bill Payn".

Bill Payn  
For: Wireless Laboratory Manager  
Certification and Engineering Bureau  
3701 Carling Ave., Building 94  
P.O. Box 11490, Station AH@  
Ottawa, Ontario K2H 8S2  
Email: [certification.bureau@ic.gc.ca](mailto:certification.bureau@ic.gc.ca)

Rogers Labs, Inc.  
4405 W. 259th Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Garmin International, Inc.  
Model: A02947  
Test #: 150828  
Test to: CFR47 15C, RSS-247  
File: Garmin A02947 TstRpt 150828

SN: 3908535043  
FCC ID#: IPH-02947  
IC: 1792A-02947  
Date: September 30, 2015  
Page 42 of 42