



## Compliance Testing, LLC

Previously Flom Test Lab

EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

[info@ComplianceTesting.com](mailto:info@ComplianceTesting.com)

# SAR Test Report

Prepared for: Garmin International Inc

Model: A03063

Description: Handheld GPS

Serial Number: N/A

FCC ID: IPH-03063

IC: 1792A-03063

Date of Issue: June 23, 2016

On the behalf of the applicant:

Garmin International Inc  
1200 E. 151st. Street  
Olathe, KS 66062

Attention of:

Paul Phrommany, Compliance Engineer  
Ph: (913)440-2012  
E-Mail: [Paul.Phrommany@garmin.com](mailto:Paul.Phrommany@garmin.com)

Prepared By  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p1630046

**Poona Saber**  
**Project Test Engineer**

I attest to the accuracy and completeness of these measurements taken and the data presented, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment evaluated is capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-1999.

### Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	05/26/2016	Poona Saber	Original Document
2.0	06/23/2016	Poona Saber	TX range and addition of calibration certification for the probe



## Table of Contents

<u>Description</u>	<u>Page</u>
Introduction .....	4
EUT Description .....	5
SAR Measurement Results .....	6
SAR Definition .....	8
SAR Measurement System .....	9
EAR Reference Point .....	11
Positioning for Cheek/Touch .....	12
Body Worn Configurations .....	13
Data Evaluation Procedures .....	14
System Performance Check .....	16
Tissue Verification .....	17
Robot System Specifications .....	19
Phantom(s): .....	20
SAR Measurement System .....	21
Test Equipment Utilized .....	24
Measurement Uncertainties .....	25
References .....	27

## Introduction

This measurement report demonstrates that Garmin 0Axxxxxx, 750 series device , FCC ID: IPH-03063 as described within this report complies with the Specific Absorption Rate (SAR) RF exposure requirements specified in ANSI/IEEE Std. C95.1-1999, FCC 47 CFR §2.1093 and RSS-102 for General Population/Uncontrolled Exposure .

The test results herein were based on a representative sample and therefore only apply to the sample tested. A description of the device under test, device operating configuration and test conditions, measurement and site description, methodology and procedures used in the evaluation, equipment used, detailed summary of the test results and the various provisions of the rules are included in this dosimetry assessment test report.

## Test and Measurement Data

The wireless device referenced in this report was found to be compliant for localized SAR for uncontrolled/general population exposure limits as specified in ANSI/IEEE Std.C95.1-1992 and has been tested in accordance with measurement procedures specified in IEEE 1528-2013 and EN/IEC 62209:2010

References	Description
FCC KDB 447498 D01v05r02	General SAR Guidance
FCC KDB 865664 D01	SAR measurement 100 MHz to 6 GHz v01r03
FCC KDB 865664 D01	SAR Reporting v01r01
IEEE Std. 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013
IEC 62209-1	Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range 300MHz to 3GHz), February 2005
IEC 62209-2	Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity of the ear (frequency range 30MHz to 6GHz), February 2010

**EUT Description**

<b>EUT:</b>	0Axxxxxx, 750 series
<b>Test Dates:</b>	5/24/2016- 5/25/2016
<b>RF Exposure Environment:</b>	Uncontrolled Exposure/General Population
<b>RF Exposure Category:</b>	Portable
<b>Power Supply:</b>	Internal battery
<b>Antenna:</b>	Internal PCB trace antenna with gain 2.6 dBi
<b>Production/prototype:</b>	Production
<b>Modulations Tested:</b>	DSSS
<b>Duty Cycle:</b>	100 %
<b>TX Range:</b>	2412-2462 MHz – 802.11 b
<b>Max SAR Measured:</b>	0.638 mW/g

## SAR Measurement Results

SAR MEASUREMENT RESULTS Body Worn General Population/Uncontrolled Exposure FCC/IC Spatial Peak SAR Limit 1.6W/kg									
Channel	Freq (MHz)	Power (dBm)	Test Mode	Battery Type	Accessory	EUT Position and Separation Distance	SAR 1g (mW/g) 100% Duty Cycle	Drift	Compensated SAR
6	2437	15	802.11 b	Li-ion	Belt Clip	Front Side (0mm)	0.242	2.2 %	0.242
6	2437	15	802.11 b	Li-ion	Belt Clip	Back Side (0mm)	0.091	2.7 %	0.091
6	2437	15	802.11 b	Li-ion	Belt Clip	Left Side (0mm)	0.595	-7.3 %	0.638
6	2437	15	802.11 b	Li-ion	Belt Clip	Top Side (0mm)	0.076	-2.2 %	0.076

### Drift Measurements & measured SAR compensation:

The drift is recorded as the percent difference of the secondary reference measurement, *Ref secondary* (SAR or conducted power), from the primary reference measurement, *Ref primary*:

$$\text{Drift} = 100\% \cdot (\text{Ref secondary} - \text{Ref primary}) / \text{Ref primary}$$

Commercial handsets should have SAR drifts within  $\pm 5\%$ . Some devices could have significant fluctuations in output power that are not classifiable as undesirable power drift but rather are a characteristic of the normal operating behavior of the device. In this case, other methods such as SAR scaling shall be considered so that a conservative SAR is obtained.

If the SAR drift is within 5%, then it shall be treated either as an uncertainty (i.e., random error) or a systematic offset. If the drift is larger than 5%, the measurement drift shall be considered a systematic offset rather than an uncertainty. If treated as a systematic offset and correction of the zoom scan values has not been performed as previously described, apply a correction to the measured SAR value, i.e., by adding the absolute difference to the determined value if the drift is either negative or positive:

$$\text{SAR compensated} = \text{SAR measured} \cdot (1 + |\text{Drift}|/100\%)$$

### Multiple Transmitter Evaluation

Test Distance: 0mm with belt clip installed.		
Mode	SAR Test Exclusion Threshold(mW) Per KDB 447498 D01v05r01	Highest Power(mW)
802.11 B	10	31.6
BT LE	10	1.65

Note: Radio does not support simultaneous transmission.

Per table above the Stand-alone SAR evaluation is required for 802.11 B and the BT LE is excluded.

## SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy ( $dU$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho$ ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 1.1).

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$

**Figure 1.1**  
**SAR Mathematical Equation**

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \sigma E^2 / \rho$$

where:

$\sigma$  - conductivity of the tissue - simulant material (S/m)

$\rho$  - mass density of the tissue - simulant material (kg/m<sup>3</sup>)


E - Total RMS electric field strength (V/m)


NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

## SAR Measurement System

The SAR measurements used for this evaluation were performed using a DASY4 Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). The Cell controller system contain the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit.


Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

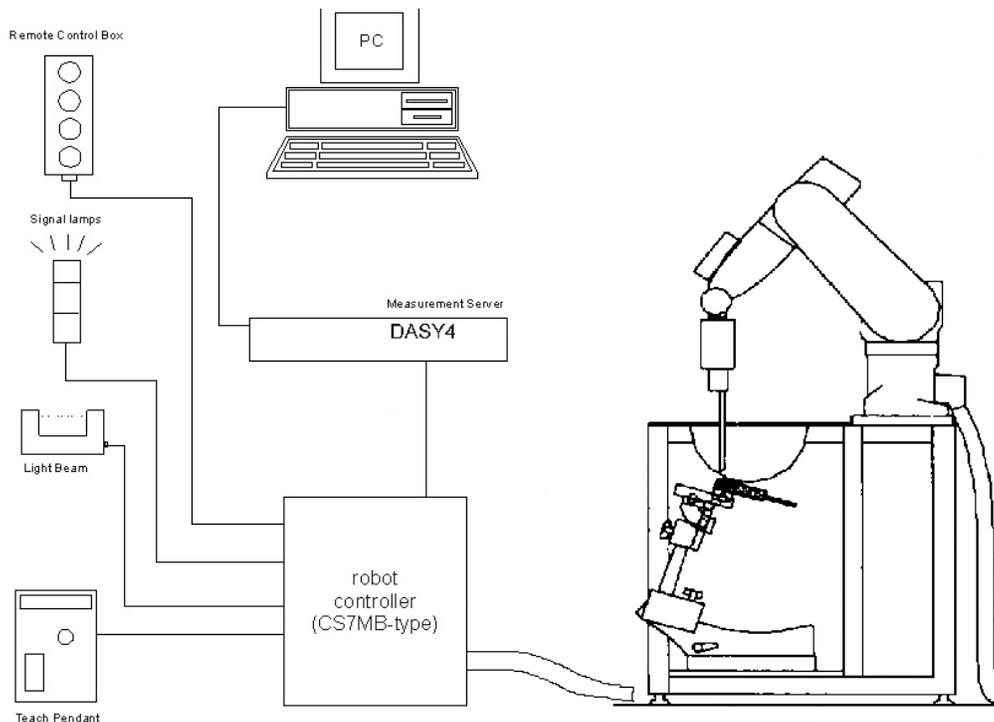

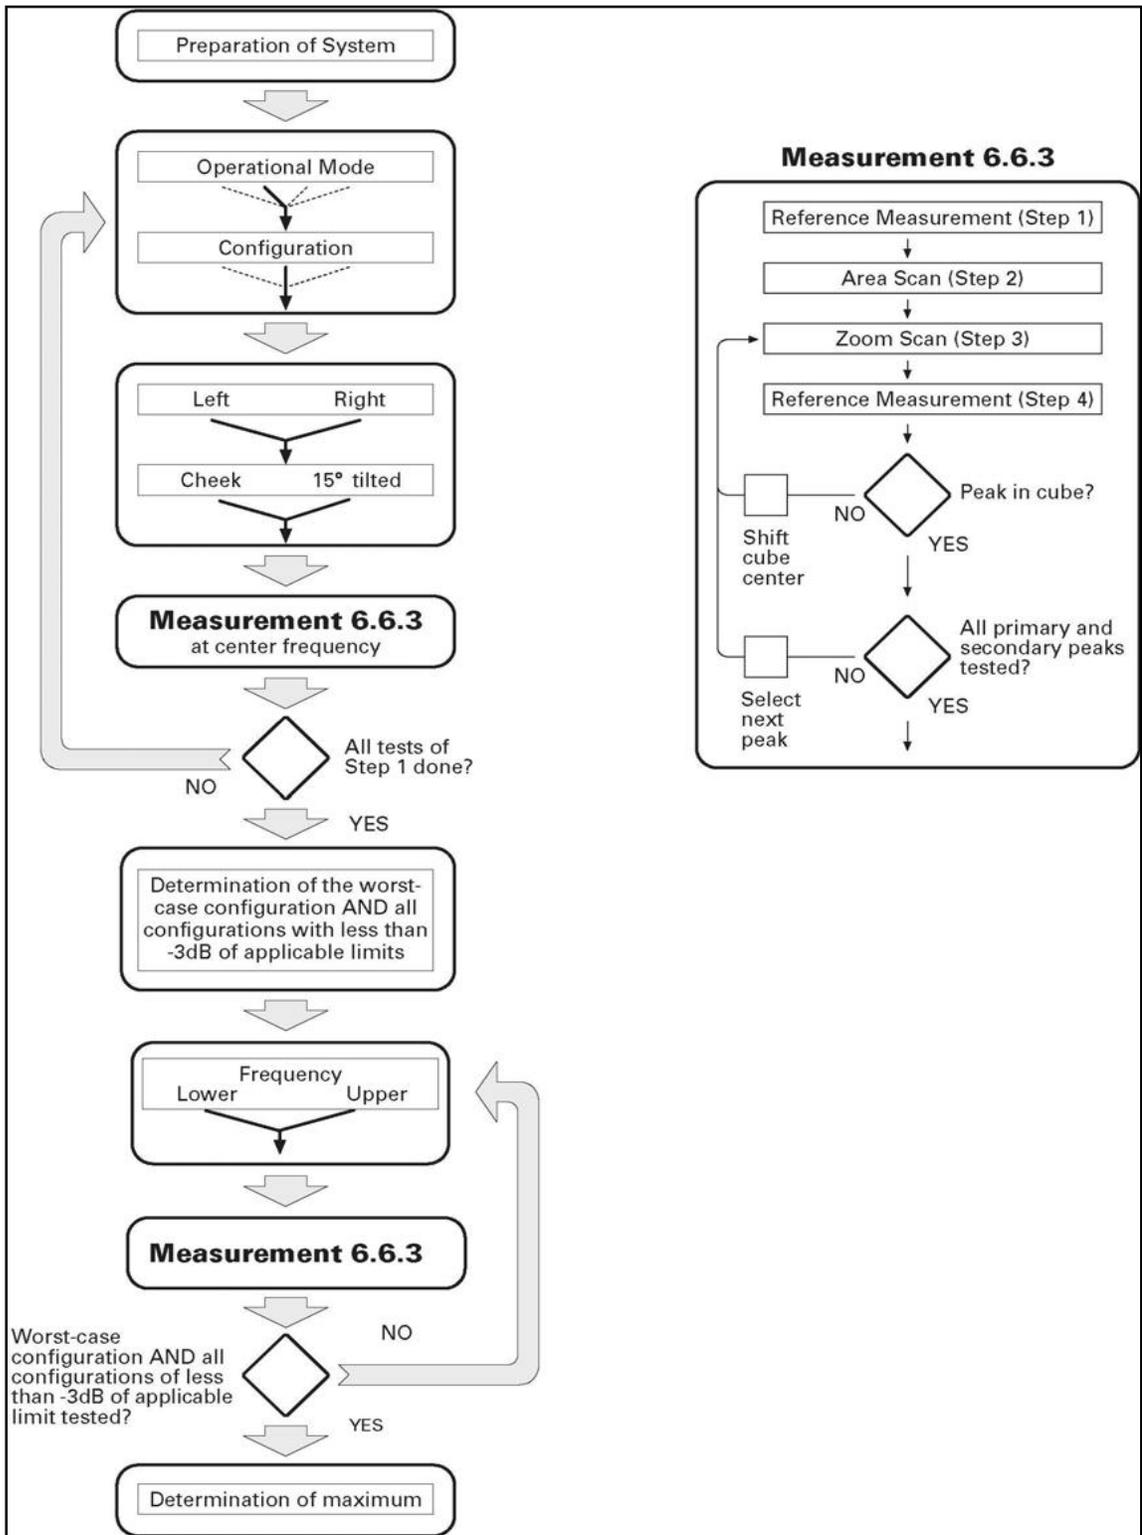


### EAR Reference Point

Figure 12.1 shows the front, back and side views of the SAM Twin Phantom. The point M is the reference point for the center of the mouth, LE is the left ear reference point (ERP), and RE is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 12.2. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting. Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.

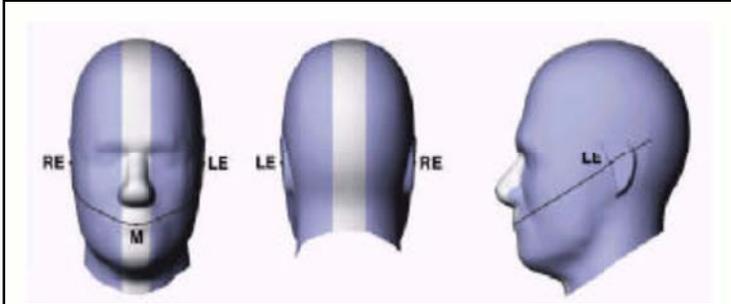


Front, back and side view of SAM Twin Phantom

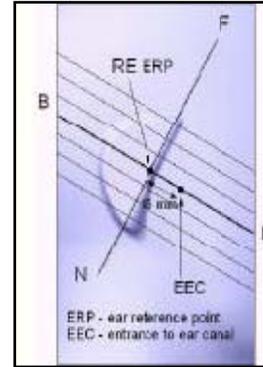

Side view of ERPs

### Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the test device reference point located along the vertical centerline on the front of the device aligned to the ear reference point. The test device reference point was then located at the same level as the center of the ear reference point. The test device was positioned so that the vertical centerline was bisecting the front surface of the handset at its top and bottom edges, positioning the ear reference point on the outer surface of the both the left and right head phantoms on the ear reference point.

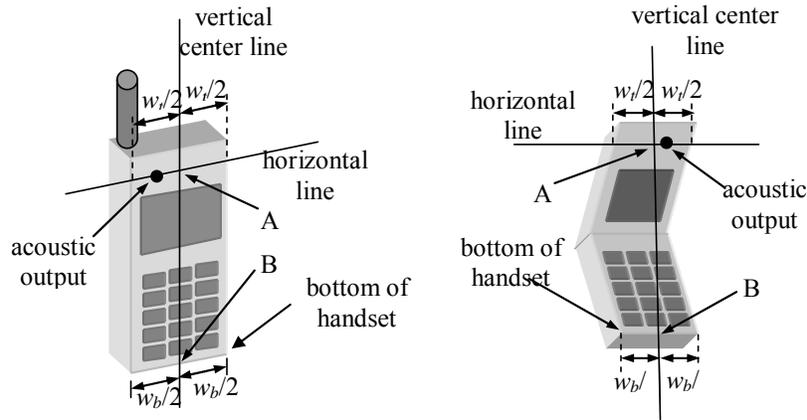


Handset Vertical Center & Horizontal Line Reference Points

## Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom, such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.
2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek).




**Front, Side and Top View of Cheek/Touch Position**

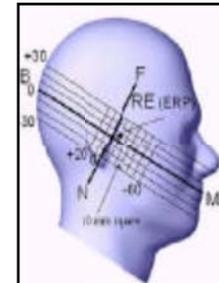

**Positioning for Cheek/Touch**

1. With the test device aligned in the Cheek/Touch Position:
2. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
3. The phone was then rotated around the horizontal line by 15 degree.
4. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head.

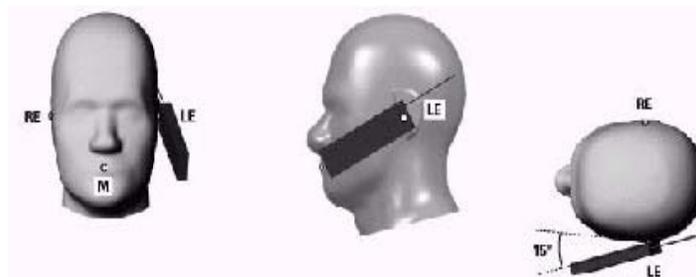


**Front, Side and Top View of Ear/15 Tilt Position**

## Body Worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

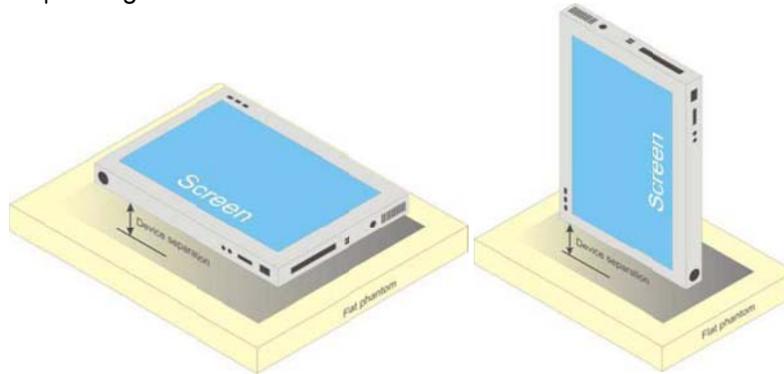

## EVALUATION PROCEDURES

The evaluation was performed in the applicable area of the phantom depending on the type of device being tested.

- i. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
- ii. For body-worn and face-held devices a planar phantom was used.
- iii. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
- iv. An area scan was determined as follows:
  - a. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
  - b. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
- v. A 1g and 10g spatial peak SAR was determined as follows:
  - a. For frequencies  $\leq 4.5\text{GHz}$  a 32mm x 32mm x 34mm (7x7x7 data points) zoom scan was assessed at the position where the greatest V/m was detected. For frequencies  $\geq 4.5\text{GHz}$  a 28mm x 28mm x 24mm (7x7x9 data points) zoom scan was assessed at the position where the greatest V/m was detected. The data at the surface was extrapolated since the distance from the probes sensors to the surface is 3.9cm. A least squares fourth-order polynomial was used to generate points between the probe detector and the inner surface of the phantom.
  - b. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- vi. Z-Scan was determined as follows:
- vii. The Z-scan measures points along a vertical straight line. The line runs along a line normal to the inner surface of the phantom surface.

## Data Evaluation Procedures

The DASY4 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe Parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion Factor	$ConvF_i$
	- Dipole Compression Point	$dcp_i$
Device parameters:	- Frequency	$f$
	- Crest factor	$cf$
Media parameters:	- Conductivity	$\sigma$
	- Density	$\rho$

These parameters must be set correctly in the software. They can be found in the component documents or can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC - transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = Compensated signal of channel i (i = x, y, z)  
 $U_i$  = Input signal of channel i (i = x, y, z)  
 $cf$  = Crest factor of exciting field (DASY parameter)  
 $dcp_i$  = Diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\begin{aligned} \text{E - fieldprobes :} \quad E_i &= \sqrt{\frac{V_i}{Norm_i \cdot ConvF}} \\ \text{H - fieldprobes :} \quad H_i &= \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f} \end{aligned}$$

with  $V_i$  = Compensated signal of channel i (i = x, y, z)  
 $Norm_i$  = Sensor sensitivity of channel i (i = x, y, z)  
 $\mu V / (V/m)^2$  for E-field probes  
 $ConvF$  = Sensitivity enhancement in solution  
 $a_{ij}$  = Sensor sensitivity factors for H-field probes  
 $f$  = Carrier frequency (GHz)  
 $E_i$  = Electric field strength of channel i in V/m  
 $H_i$  = Magnetic field strength of channel i in A/m



The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

With  $SAR$  = local specific absorption rate in mW/g

$E_{tot}$  = total field strength in V/m

$\sigma$  = conductivity in [mho/m] or [Siemens/m]

$\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

With  $P_{pwe}$  = Equivalent power density of a plane wave in mW/cm<sup>2</sup>

$E_{tot}$  = total electric field strength in V/m


$H_{tot}$  = total magnetic field strength in A/m

### System Performance Check

Prior to the SAR evaluation a system check was performed with a 2450 MHz dipole. The dielectric parameters of the simulated brain fluid were measured prior to the system performance check using an 85070B Dielectric Probe Kit and an 8753D Network Analyzer. A forward power of 250mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$ . All results were normalized to 1W.

Test Date	Fluid Type (MHz)	SAR 1g(W/kg)		Permittivity Constant $\epsilon_r$		Conductivity $\sigma$ (mho/m)		Ambient Temp. (C)	Fluid Temp (C)	Fluid Depth (cm)
		IEEE Target	Measured	IEEE Target	Measured	IEEE Target	Measured			
5/23/2016	2450 Body	12.9	13.4	52.2	52.7	2.01	1.95	24	22	$\geq 15$

Note: The ambient and fluid temperatures were measured prior to the fluid parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.

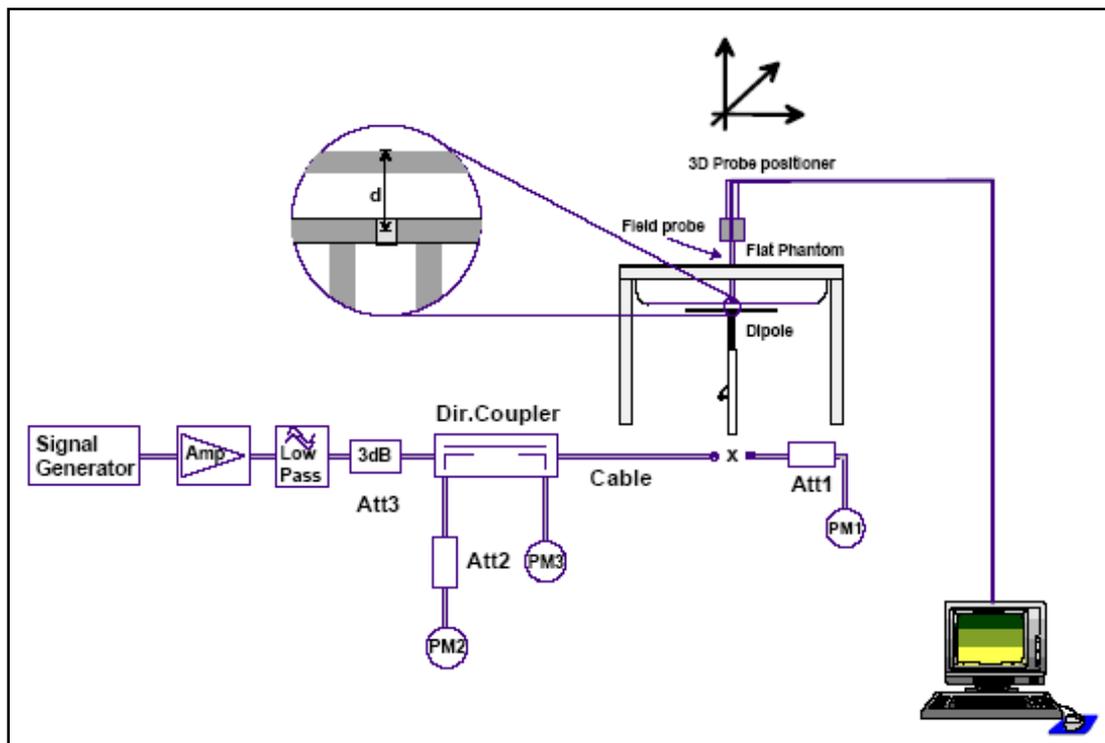

**Tissue Verification**

<b>Mixture Type</b>	<b>2450 MHz Body</b>	
<b>Date(s) Measured</b>	5/23/2016	
	<b>Target</b>	<b>Measured</b>
<b>Dielectric Constant <math>\epsilon_r</math></b>	52.7	52.2
<b>Conductivity <math>\sigma</math> (mho/m)</b>	1.95	2.01

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1g of tissue)	1.60	8.0
Spatial Peak hands/wrists/feet/ankles (averaged over 10g)	4.0	20.0

**Notes:**

1. Uncontrolled exposure environments are locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled exposure environments are locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

## Robot System Specifications

### Positioner:

Robot: Staubli Robot Model: RX60  
Repeatability: 0.02 mm  
No. of axis: 6

### Data Acquisition Electronic (DAE) System:

DAE4

### Computer Controller:

Processor: Intel core 3.2GHz  
Operating System: Windows 7

### Data Converter:

Features: Signal Amplifier, multiplexer, A/D converter, and control logic  
Software: DASY4 software  
Connecting Lines: Optical downlink for data and status info.  
Optical uplink for commands and clock

### Dasy4 Measurement Server:

Function: Real-time data evaluation for field measurements and surface detection  
Hardware: PC/104 166MHz Pentium CPU; 32 MB chip disk; 64 MB RAM  
Connections: COM1, COM2, DAE, Robot, Ethernet, Service Interface

### E-Field Probe:

Model: ES3DV3  
Construction: Triangular core mechanical detection system  
Frequency: 10 MHz to 4 GHz  
Linearity:  $\pm 0.2$  dB (30 MHz to 4 GHz)

### E-Field Probe:

Model: EX3DV4  
Construction: Triangular core mechanical detection system  
Frequency: 10 MHz – >6 GHz  
Linearity:  $\pm 0.2$  dB (30 MHz to 6 GHz)



**Phantom(s):**

**Validation & Evaluation Phantom**

Type: SAM V4.0C  
Shell Material: Fiberglass  
Thickness: 2.0 ±0.1 mm  
Volume: Approx. 20 liters

**Validation & Evaluation Phantom**

Type: Oval Flat Phantom ELI v6.0  
Shell Material: Fiberglass  
Thickness: 2.0 ±0.2 mm  
Volume: 30 liters



### **Data Acquisition Electronics**

The Data Acquisition Electronics consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain switching multiplexer, a fast 16-bit A/D converter and a command decoder and control logic unit. Some of the tasks the DAE performs is signal amplification, signal multiplexing, A/D conversion, and offset measurements. The DAE also contains the mechanical probe-mounting device, which contains two different sensor systems for frontal and sideways probe contacts used for probe collision detection and mechanical surface detection for controlling the distance between the probe and the inner surface of the phantom shell. Transmission from the DAE to the measurement server, via the EOC, is through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

### **Electro-Optical Converter (EOC)**

The Electro-Optical Converter performs the conversion between the optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC connects to, and transfers data to, the DASY4 measurement server. The EOC also contains the fiber optical surface detection system for controlling the distance between the probe and the inner surface of the phantom shell.

### **Measurement Server**

The Measurement Server performs time critical tasks such as signal filtering, all real-time data evaluation for field measurements and surface detection, controls robot movements, and handles safety operation. The PC-operating system cannot interfere with these time critical processes. A watchdog supervises all connections, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements.

### **Dosimetric Probe**

Dosimetric Probe is a symmetrical design with triangular core that incorporates three 3 mm long dipoles arranged so that the overall response is close to isotropic. The probe sensors are covered by an outer protective shell, which is resistant to organic solvents i.e. glycol. The probe is equipped with an optical multi-fiber line, ending at the front of the probe tip, for optical surface detection. This line connects to the EOC box on the robot arm and provides automatic detection of the phantom surface. The optical surface detection works in transparent liquids and on diffuse reflecting surfaces with a repeatability of better than  $\pm 0.1$ mm.

### **SAM Phantom**

The SAM (Specific Anthropomorphic Mannequin) twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm) integrated into a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left hand, right hand phone usage as well as body mounted usage at the flat phantom region. The flat section is also used for system validation and the length and width of the flat section are at least  $0.75 \lambda_0$  and  $0.6 \lambda_0$  respectively at frequencies of 824 MHz and above ( $\lambda_0$  = wavelength in air).

Reference markings on the phantom top allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. A white cover is provided to cover the phantom during off-periods preventing water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible. The phantom is filled with a tissue simulating liquid to a depth of at least 15 cm at each ear reference point. The bottom plate of the wooden table contains three pair of bolts for locking the device holder.

### **ELI Phantom**

The planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of handheld radio transceivers. The planar phantom is mounted on the wooden table of the DASY4 system.

### Device Holder

The device holder is designed to cope with the different measurement positions in the three sections of the SAM phantom given in the standard. It has two scales, one for device rotation (with respect to the body axis) and one for device inclination (with respect to the line between the ear openings). The rotation center for both scales is the ear opening, thus the device needs no repositioning when changing the angles. The plane between the ear openings and the mouth tip has a rotation angle of 65°.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The dielectric properties of the liquid conform to all the tabulated values [2-5]. Liquids are prepared according to Annex A and dielectric properties are measured according to Annex B.

### System Validation Kits

**Power Capability:** Dipoles > 100 W ( $f < 1\text{GHz}$ ); > 40 W ( $f > 1\text{GHz}$ )  
Confined Loop Antenna (CLA-150) > 10W

**Dipoles:** Symmetrical dipole with 1/4 balun enables measurement of feed point impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

**CLA-150:** The source is a resonant loop antenna which is integrated in a metallic structure to isolate the resonant structure from the environment.

**Frequency:** 150, 300, 450, 835, 1900, 2450 MHz, 5-6GHz

**Return Loss:** Dipoles >20 dB at specified validation position  
CLA >10dB

**Dimensions:** 150 MHz Confined Loop Antenna (CLA-150), 222 x 95 mm  
450 MHz Dipole: Length: 272.0 mm; Overall Height: 330 mm; Diameter: 6 mm  
835 MHz Dipole: Length: 161.0 mm; Overall Height: 340 mm; Diameter: 3.6 mm  
1900 MHz Dipole: Length: 67.7 mm; Overall Height: 300 mm; Diameter: 3.6 mm  
2450 MHz Dipole: Length: 52.0 mm; Overall Height: 390 mm; Diameter: 3.6 mm

**Test Equipment Utilized**

<b>Test Equipment</b>	<b>Serial Number</b>	<b>Calibration Date</b>
DASY4 System Robot RX60	FO3/5X20A1/C/01	N/A
DAE3	493	May 13, 2016
D2450V2	979	Feb 29, 2016
SAM Phantom V4.0C	N/A	N/A
Oval Flat Phantom ELI v6.0	N/A	N/A
ES3DV3	3035	May 18, 2016
NRP-Z21 Power sensor	103714	Feb 11, 2016
NRP-Z21 Power sensor	102001	Feb 11, 2016
85070B dielectric probe kit	N/A	N/A
Agilent E4437B signal generator	US39260968	March 18, 2016
Mini-circuits amplifier	N/A	N/A

**Measurement Uncertainties**
**UNCERTAINTY ASSESSMENT 300MHz-3GHz for Device Evaluation**

Error Description	Tol. ±%	Prob. Dist.	Div.	$c_i$ 1g	$c_i$ 10g	Std Unc ±% (1g)	Std Unc ±% (10g)	$v_i$ or $v_{eff}$
<b>Measurement System</b>								
Probe calibration	4.8	N	1	1	1	4.8	4.8	N/A
Axial isotropy of the probe	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	N/A
Spherical isotropy of the probe	9.6	R	$\sqrt{3}$	0.7	0.7	3.9	3.9	N/A
Boundary effects	1.0	R	$\sqrt{3}$	1	1	4.8	4.8	N/A
Probe linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	N/A
Detection limit	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	N/A
Readout electronics	1.0	N	1	1	1	1.0	1.0	N/A
Response time	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	N/A
Integration time	2.6	R	$\sqrt{3}$	1	1	0.8	0.8	N/A
RF ambient conditions	3.0	R	$\sqrt{3}$	1	1	0.43	0.43	N/A
Mech. constraints of robot	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	N/A
Probe positioning	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	N/A
Extrapolation & integration	1.0	R	$\sqrt{3}$	1	1	2.3	2.3	N/A
<b>Test Sample Related</b>								
Device positioning	2.9	N	1	1	1	2.23	2.23	145
Device holder uncertainty	3.6	N	1	1	1	5.0	5.0	5
Power drift	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	N/A
<b>Phantom and Setup</b>								
Phantom uncertainty	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	N/A
Liquid conductivity (target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	N/A
Liquid conductivity (measured)	2.5	N	1	0.64	0.43	1.6	1.1	N/A
Liquid permittivity (target)	5.0	R	$\sqrt{3}$	0.6	0.5	1.7	1.4	N/A
Liquid permittivity (measured)	2.5	N	1	0.6	0.5	1.5	1.2	N/A
Combined Standard Uncertainty (k=1)	RSS					10.8	10.6	330
Expanded Uncertainty (k=2) 95% Confidence Level						21.6	21.1	

Worst-case uncertainty for DASY4 assessed according to IEEE P1528.

The budget is valid for the frequency range 300MHz to 3GHz and represents a worst-case analysis.

**UNCERTAINTY ASSESSMENT 300MHz-3GHz System Performance**

Error Description	Tol. ±%	Prob. Dist.	Div.	$c_i$ 1g	$c_i$ 10g	Std Unc ±% (1g)	Std Unc ±% (10g)	$v_i$ or $v_{eff}$
<b>Measurement System</b>								
Probe calibration	5.9	N	1	1	1	5.9	5.9	∞
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7	∞
Hemispherical Isotropy	9.6	R	√3	0	0	0	0	∞
Boundary effects	1.0	R	√3	1	1	0.6	0.6	∞
Linearity	4.7	R	√3	1	1	2.7	2.7	∞
System Detection limit	1.0	R	√3	1	1	0.6	0.6	∞
Readout electronics	0.3	N	1	1	1	0.3	0.3	∞
Response time	0	R	√3	1	1	0	0	∞
Integration time	0	R	√3	1	1	0	0	∞
RF Ambient Noise	3.0	R	√3	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	√3	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	√3	1	1	0.2	0.2	∞
Probe positioning	2.9	R	√3	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	R	√3	1	1	0.6	0.6	∞
<b>Dipole</b>								
Dipole Axis to Liquid Distance	2.0	R	√3	1	1	1.2	1.2	∞
Input power and SAR drift meas.	4.7	R	√3	1	1	2.7	2.7	∞
<b>Phantom and Tissue Parameters</b>								
Phantom uncertainty	4.0	R	√3	1	1	2.3	2.3	∞
Liquid conductivity (target)	5.0	R	√3	0.64	0.43	1.8	1.2	∞
Liquid conductivity (measured)	2.5	N	1	0.64	0.43	1.6	1.1	∞
Liquid permittivity (target)	5.0	R	√3	0.6	0.5	1.7	1.4	∞
Liquid permittivity (measured)	2.5	N	1	0.6	0.5	1.5	1.2	∞
<b>Combined Standard Uncertainty</b>						9.2	8.9	
<b>Coverage Factor for 95%</b>						kp=2		
<b>Expanded Uncertainty</b>						18.4	17.8	

Uncertainty of a system performance check with DASY4 system  
 The budget is valid for the frequency range 300MHz to 3GHz and represents a worst-case analysis.

## References

1. Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
2. ANSI/IEEE C95.1 - 1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 kHz to 100GHz, New York: IEEE, Aug. 1992.
3. ANSI/IEEE C95.3 - 1992, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, 1992.
4. IEEE Standards Coordinating Committee 34, IEEE 1528 (August 2003), Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
5. NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb.1995.
6. Federal Communications Commission, Radiofrequency radiation exposure evaluation: portable devices, Rule Part 47 CFR 2.1093: 1999.
7. Health Canada, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz Safety Code 6.
8. Industry Canada, Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields, Radio Standards Specification RSS-102 Issue 1 (Provisional): September 1999.

END OF TEST REPORT