


FCC Test Report

FCC ID : IPH-03958
Equipment : Smart Watch
Model No. : A03958
Brand Name : GARMIN
Applicant : Garmin International, Inc.
Address : 1200 E. 151st Street Olathe, KS 66062 United States
Standard : 47 CFR FCC Part 15.247
Received Date : Apr. 30, 2020
Tested Date : Mar. 27 ~ Jun. 09, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

Reviewed by:


Along Chen / Assistant Manager

Approved by:


Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	The Equipment List	9
1.5	Test Standards	10
1.6	Reference Guidance	10
1.7	Deviation from Test Standard and Measurement Procedure.....	10
1.8	Measurement Uncertainty	10
2	TEST CONFIGURATION.....	11
2.1	Testing Condition	11
2.2	Testing Facility	11
2.3	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS	13
3.1	Conducted Emissions.....	13
3.2	Unwanted Emissions into Restricted Frequency Bands	16
3.3	Unwanted Emissions into Non-Restricted Frequency Bands	35
3.4	Conducted Output Power	42
3.5	Number of Hopping Frequency	45
3.6	20dB and Occupied Bandwidth.....	49
3.7	Channel Separation.....	56
3.8	Number of Dwell Time	61
4	TEST LABORATORY INFORMATION	66

Release Record

Report No.	Version	Description	Issued Date
FR051401AD	Rev. 01	Initial issue	Jul. 01, 2020

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.763MHz 25.51 (Margin -20.49dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2483.50MHz 68.29 (Margin -5.71dB) - PK	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 12.64	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps
Note 1: RF output power specifies that Maximum Peak Conducted Output Power. Note 2: Bluetooth BR uses a GFSK. Note 3: Bluetooth EDR uses a combination of $\pi/4$-DQPSK and 8DPSK.				

1.1.2 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)
1	Slot	No	-2.13

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from host 3.87Vdc from battery
-------------------	--

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	Battery	Brand: GARMIN Model: 361-00136-10 Rating: 3.87Vdc, 195mAh
2	USB cable	Brand: GARMIN Model: 320-01069-10 Power line: 0.52m shielded without core

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	CBT Test	
Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)
DH5	80.00%	0.97
3DH5	80.00%	0.97



1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	2441	2480
GFSK/1Mbps	Default	Default	Default
$\pi/4$ -DQPSK /2Mbps	Default	Default	Default
8DPSK/3Mbps	Default	Default	Default

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Adapter	Samsung	ETA-U90JWS	---	---

1.3 Test Setup Chart

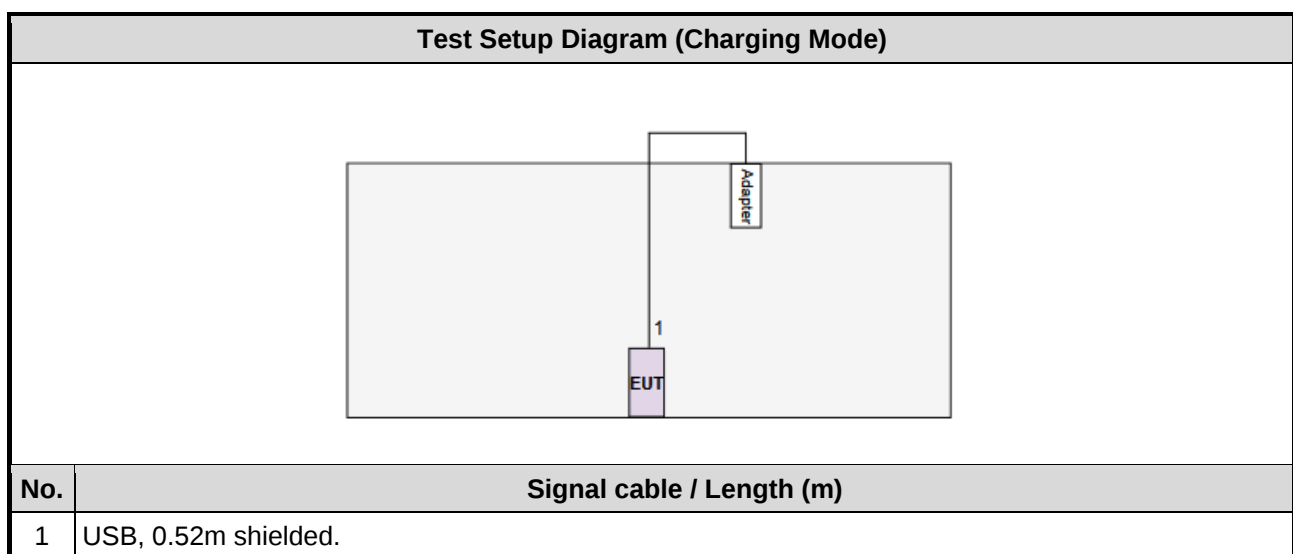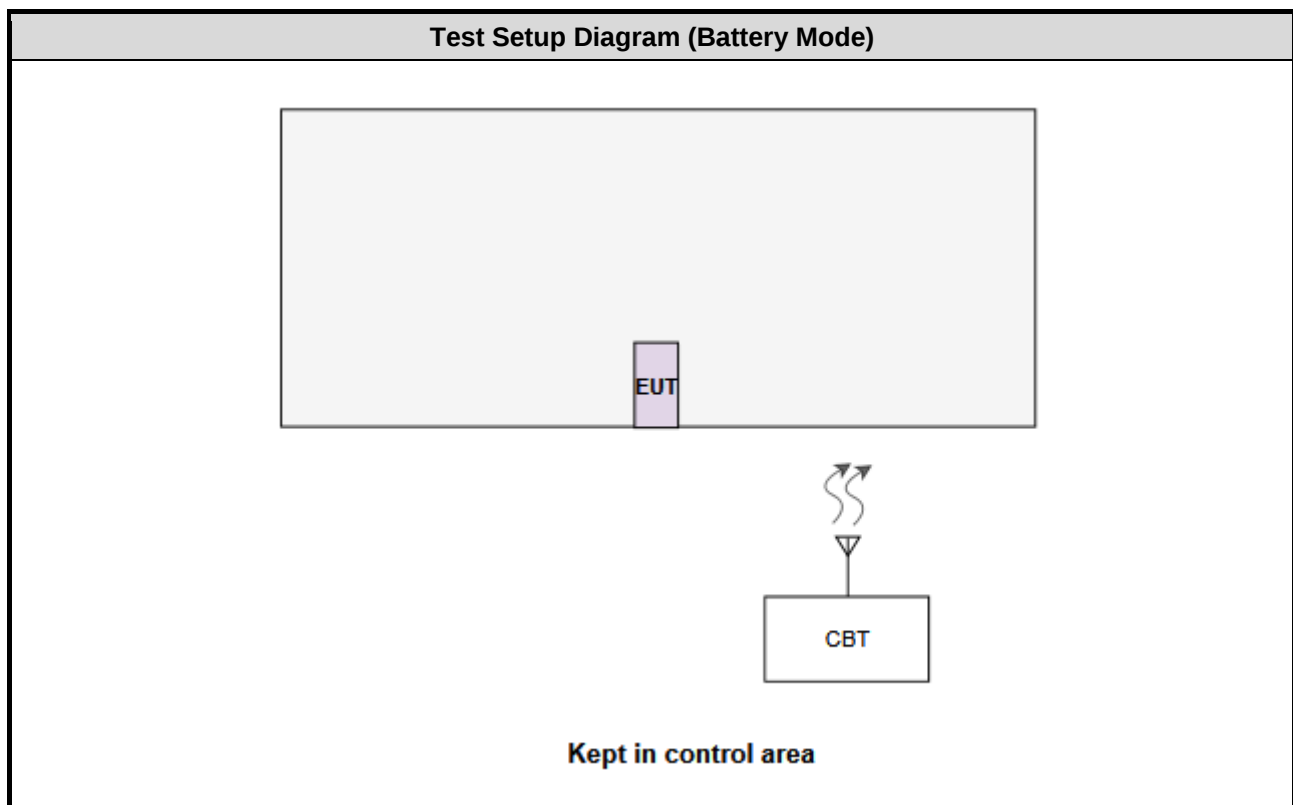

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Jun. 09, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020
LISN	R&S	ENV216	101579	Mar. 12, 2020	Mar. 11, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 22, 2019	Oct. 21, 2020
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Bluetooth Tester	R&S	CBT	100959	Oct. 18, 2019	Oct. 17, 2020
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	May 27 ~ Jun. 01, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 12, 2019	Dec. 11, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020
RF Cable	EMC	EMC104-SM-SM-8000	181106	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020
LF cable 1M	EMC	EMCCFD400-NM-NM-1000	160502	Oct. 07, 2019	Oct. 06, 2020
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Bluetooth Tester	R&S	CBT	100959	Oct. 18, 2019	Oct. 17, 2020
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Jun. 02, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 30, 2020	Apr. 29, 2021
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 02, 2019	Dec. 01, 2020
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Bluetooth Tester	R&S	CBT	100959	Oct. 18, 2019	Oct. 17, 2020
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247
ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.41 dB
Radiated emission > 1 GHz	± 4.59 dB
Time	$\pm 0.1\%$

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	21°C / 56%	Alex Tsai
Radiated Emissions	03CH01-WS	24-25°C / 64-65%	Akun Chung Brad Wu
RF Conducted	TH01-WS	25°C / 67%	Aska Huang

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 Testing Facility

Test Laboratory	International Certification Corp.
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

2.3 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions	Charging	---	---	1
Radiated Emissions $\leq$ 1GHz	GFSK	2402	1Mbps	2
	Charging	---	---	1
Radiated Emissions $>$ 1GHz	GFSK	2402, 2441, 2480	1Mbps	2
	8DPSK	2402, 2441, 2480	3Mbps	
Conducted Output Power	GFSK	2402, 2441, 2480	1Mbps	2
	π/4 DQPSK	2402, 2441, 2480	2Mbps	
	8DPSK	2402, 2441, 2480	3Mbps	
Number of Hopping Channels	GFSK	2402~2480	1Mbps	2
	π/4 DQPSK	2402~2480	2Mbps	
	8DPSK	2402~2480	3Mbps	
Hopping Channel Separation 20dB and Occupied bandwidth	GFSK	2402, 2441, 2480	1Mbps	2
	π/4 DQPSK	2402, 2441, 2480	2Mbps	
	8DPSK	2402, 2441, 2480	3Mbps	
Dwell Time	GFSK	2402	1Mbps	2
	π/4 DQPSK	2402	2Mbps	
	8DPSK	2402	3Mbps	

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** result was found as the worst case and was shown in this report.
2. The test configurations are listed as follows:
 Test Configuration 1: Charging mode
 Test Configuration 2: Battery mode

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup

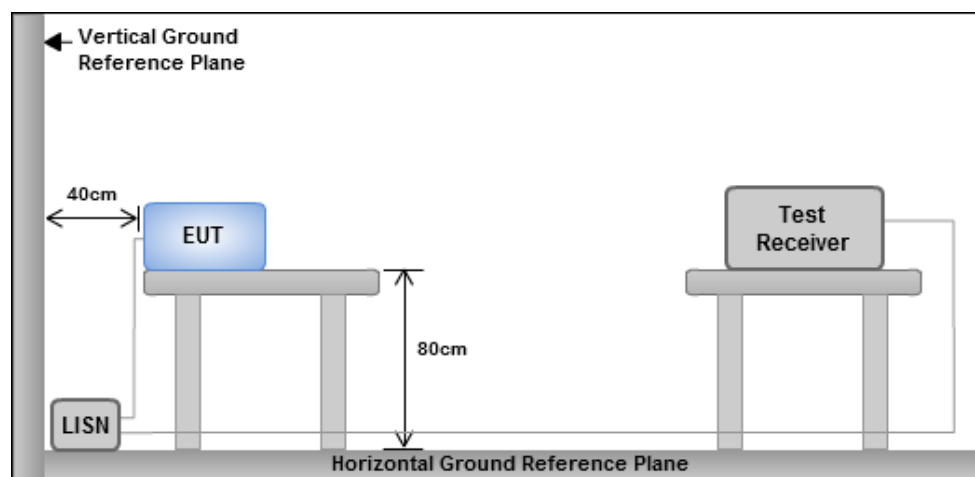

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

Modulation Mode	Charging	Test Freq. (MHz)	---
Power Phase	Line		

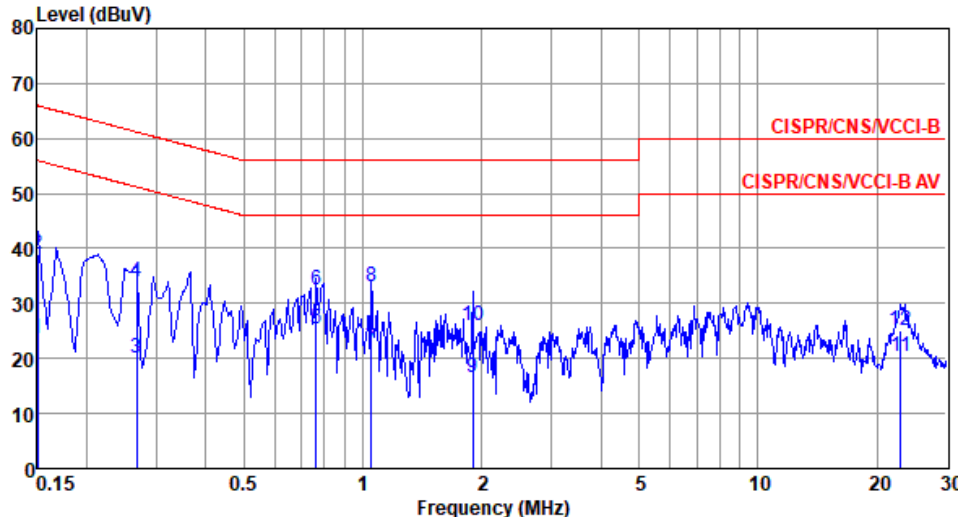


	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.150	23.76	56.00	-32.24	13.91	9.64	0.05	Average
2	0.150	39.00	66.00	-27.00	29.15	9.64	0.05	QP
3	0.267	20.03	51.20	-31.17	10.12	9.63	0.07	Average
4	0.267	34.03	61.20	-27.17	24.12	9.63	0.07	QP
5*	0.763	25.51	46.00	-20.49	15.47	9.63	0.11	Average
6	0.763	32.57	56.00	-23.43	22.53	9.63	0.11	QP
7	1.053	21.75	46.00	-24.25	11.68	9.63	0.12	Average
8	1.053	33.20	56.00	-22.80	23.13	9.63	0.12	QP
9	1.898	16.40	46.00	-29.60	6.24	9.64	0.18	Average
10	1.898	25.94	56.00	-30.06	15.78	9.64	0.18	QP
11	23.018	20.44	50.00	-29.56	9.39	9.69	0.69	Average
12	23.018	25.16	60.00	-34.84	14.11	9.69	0.69	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation Mode	Charging	Test Freq. (MHz)	---
Power Phase	Neutral		

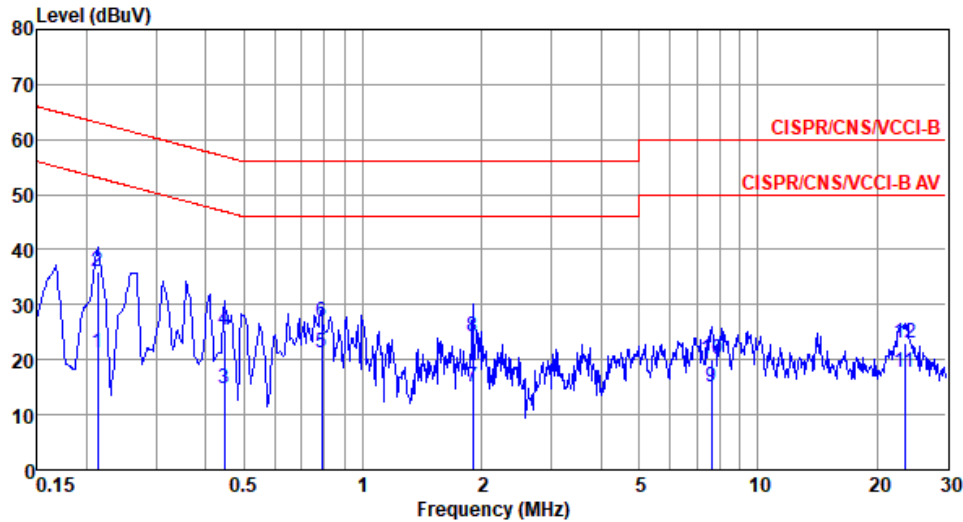

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	dBuV	dB	dBuV	factor	loss	
1	0.213	21.30	53.10	-31.80	11.44	9.65	0.06	Average
2	0.213	35.94	63.10	-27.16	26.08	9.65	0.06	QP
3	0.447	14.89	46.93	-32.04	4.99	9.65	0.08	Average
4	0.447	25.49	56.93	-31.44	15.59	9.65	0.08	QP
5*	0.788	21.18	46.00	-24.82	11.23	9.65	0.11	Average
6	0.788	26.73	56.00	-29.27	16.78	9.65	0.11	QP
7	1.898	14.98	46.00	-31.02	4.88	9.66	0.18	Average
8	1.898	24.14	56.00	-31.86	14.04	9.66	0.18	QP
9	7.646	14.96	50.00	-35.04	4.58	9.71	0.36	Average
10	7.646	19.97	60.00	-40.03	9.59	9.71	0.36	QP
11	23.511	17.60	50.00	-32.40	6.46	9.81	0.70	Average
12	23.511	22.99	60.00	-37.01	11.85	9.81	0.70	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9~90 kHz, 110~490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. Radiated emission above 1GHz / Peak value
RBW=1MHz, VBW=3MHz and Peak detector
Radiated emission above 1GHz / Average value for harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:
3.
$$20\log (\text{Duty cycle}) = 20\log \frac{1\text{s} / 1600 * 5}{100 \text{ ms}} = -30.1\text{dB}$$
4. Radiated emission above 1GHz / Average value for other emissions
RBW=1MHz, VBW=1/T and Peak detector

3.2.3 Test Setup

Radiated Emissions below 1 GHz

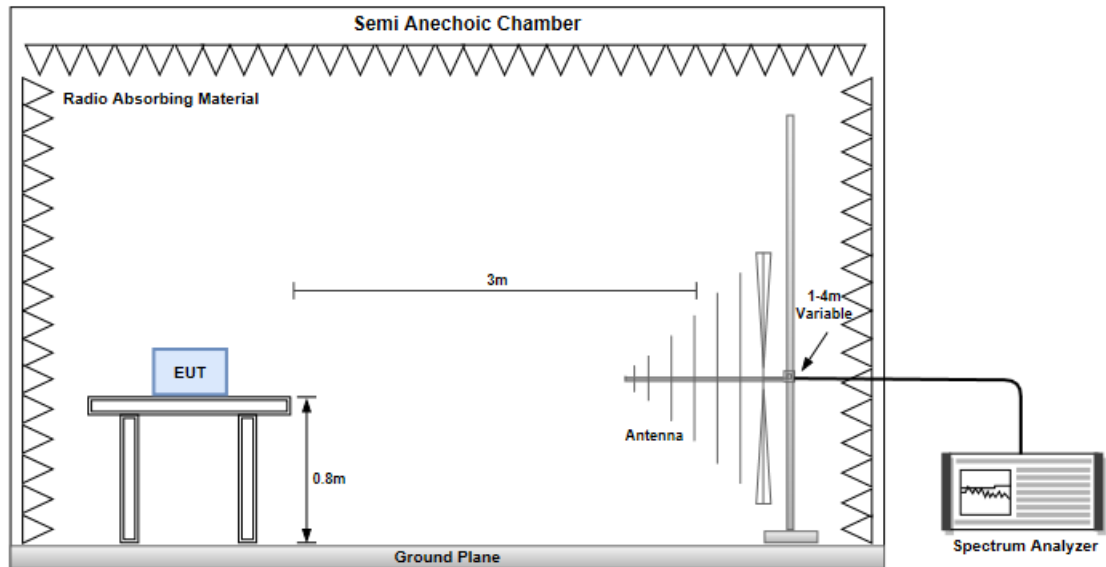


Radiated Emissions above 1 GHz

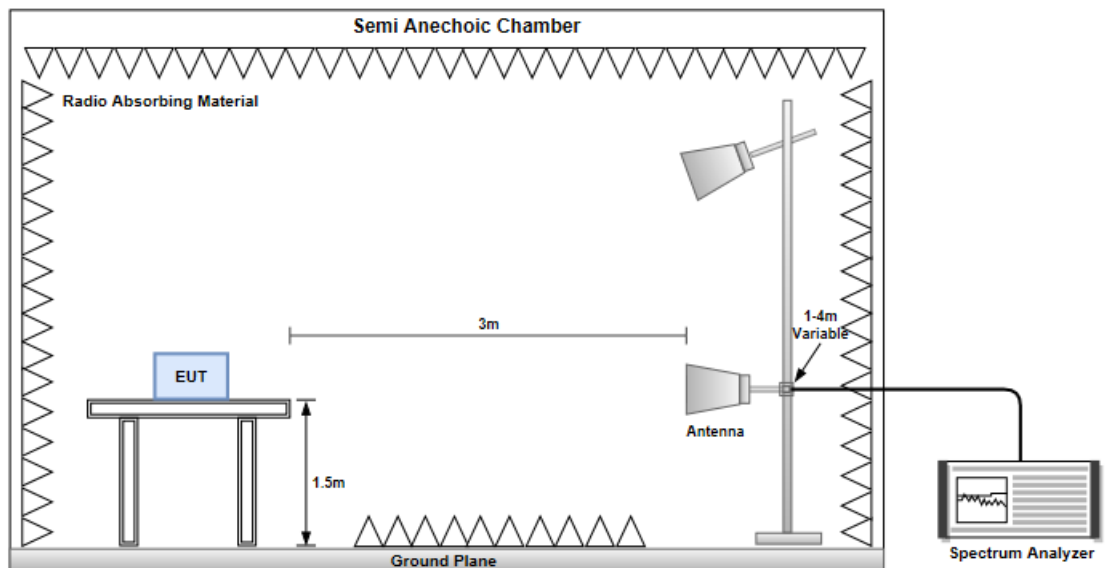

Test Configuration 1: Charging mode.

3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal		

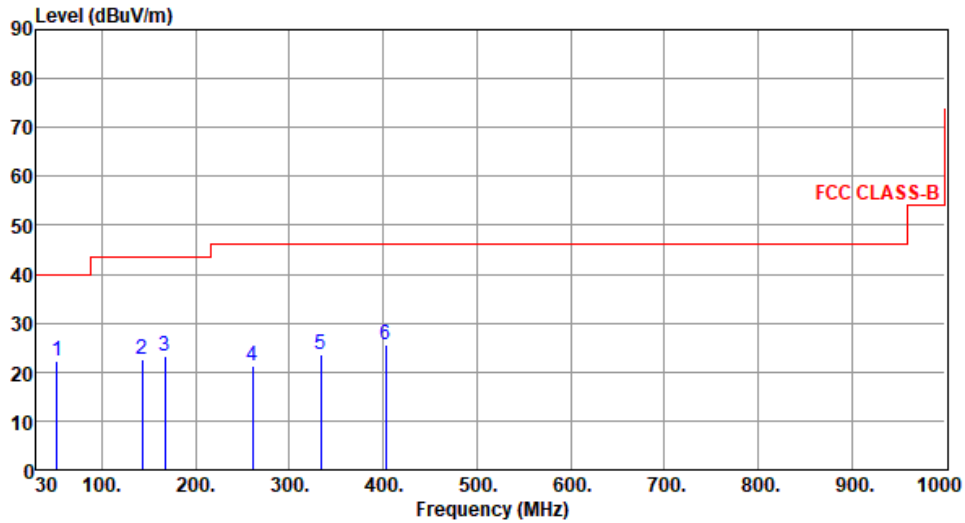


The graph displays the emission level in dBuV/m on the y-axis (0 to 90) against frequency in MHz on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 300 MHz, 46 dBuV/m from 300 to 1000 MHz, and 55 dBuV/m above 1000 MHz. Six blue vertical lines represent measured emissions at 52.31, 142.52, 166.77, 260.86, 333.61, and 402.48 MHz, labeled 1 through 6 respectively.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	52.31	22.12	40.00	-17.88	30.58	-8.46	Peak	---	---
2	142.52	22.48	43.50	-21.02	31.18	-8.70	Peak	---	---
3	166.77	23.20	43.50	-20.30	31.90	-8.70	Peak	---	---
4	260.86	21.20	46.00	-24.80	30.77	-9.57	Peak	---	---
5	333.61	23.71	46.00	-22.29	30.85	-7.14	Peak	---	---
6	402.48	25.42	46.00	-20.58	30.92	-5.50	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

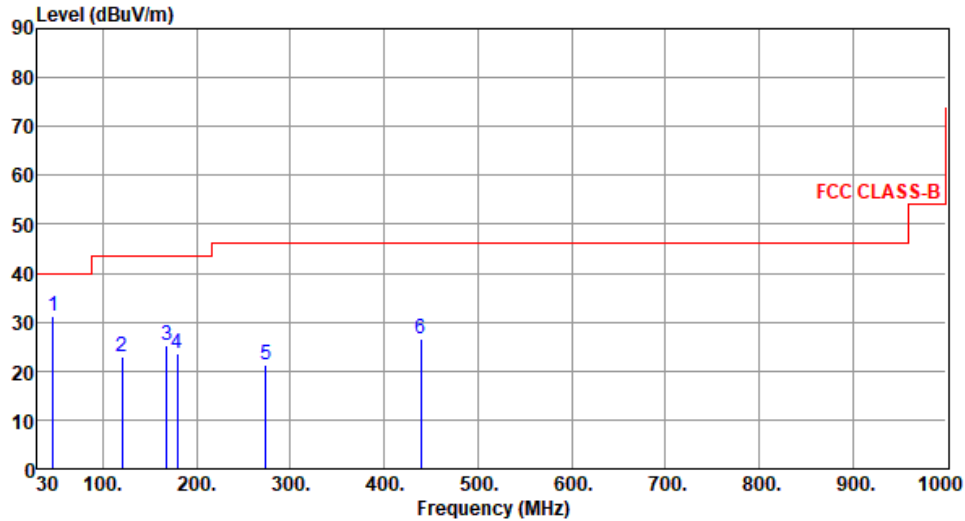

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.49	31.27	40.00	-8.73	39.63	-8.36	Peak	---	---
2	120.21	22.93	43.50	-20.57	33.52	-10.59	Peak	---	---
3	167.74	25.18	43.50	-18.32	33.88	-8.70	Peak	---	---
4	179.38	23.47	43.50	-20.03	33.28	-9.81	Peak	---	---
5	273.47	21.27	46.00	-24.73	30.14	-8.87	Peak	---	---
6	439.34	26.56	46.00	-19.44	30.90	-4.34	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Test Configuration 2: Battery mode

3.2.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal		
Level (dBuV/m) </			

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

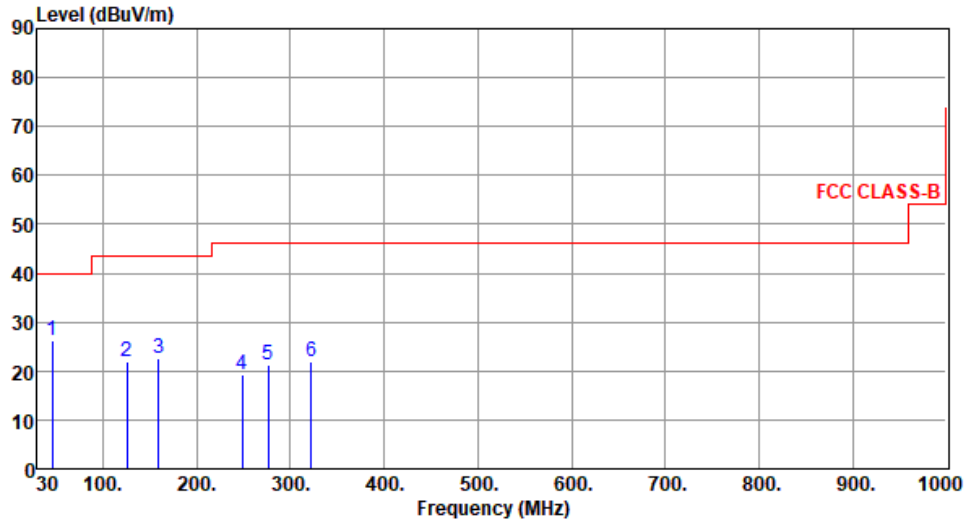

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	45.52	26.19	40.00	-13.81	34.56	-8.37	Peak	---	---
2	126.03	21.96	43.50	-21.54	32.03	-10.07	Peak	---	---
3	159.01	22.57	43.50	-20.93	30.89	-8.32	Peak	---	---
4	248.25	19.16	46.00	-26.84	29.12	-9.96	Peak	---	---
5	276.38	21.13	46.00	-24.87	29.87	-8.74	Peak	---	---
6	321.97	22.01	46.00	-23.99	29.35	-7.34	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal		
Level (dBuV/m) </			


Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

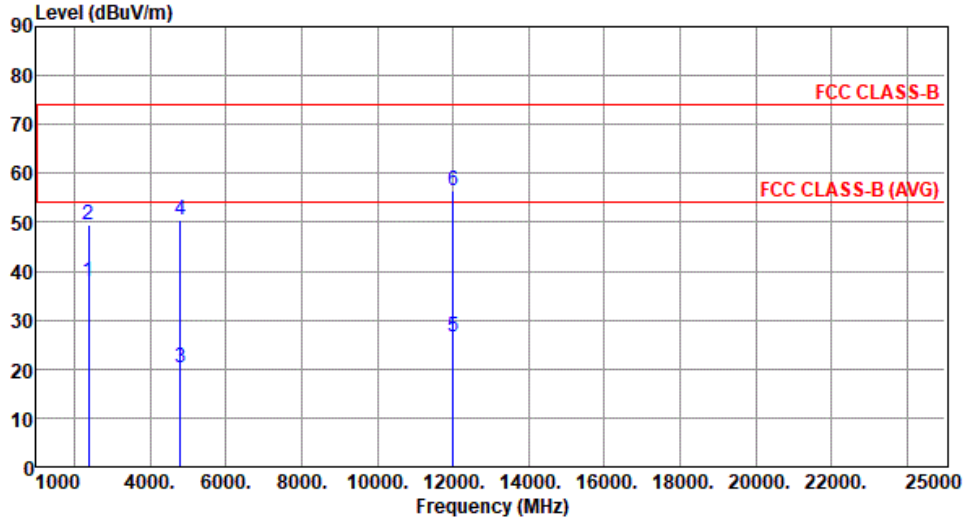

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.86	54.00	-16.14	40.66	-2.80	Average	100	274
2	2390.00	49.64	74.00	-24.36	52.44	-2.80	Peak	100	274
3	4804.00	20.38	54.00	-33.62	16.85	3.53	Average	240	129
4	4804.00	50.48	74.00	-23.52	46.95	3.53	Peak	240	129
5	12010.00	26.50	54.00	-27.50	12.78	13.72	Average	100	142
6	12010.00	56.60	74.00	-17.40	42.88	13.72	Peak	100	142

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal		

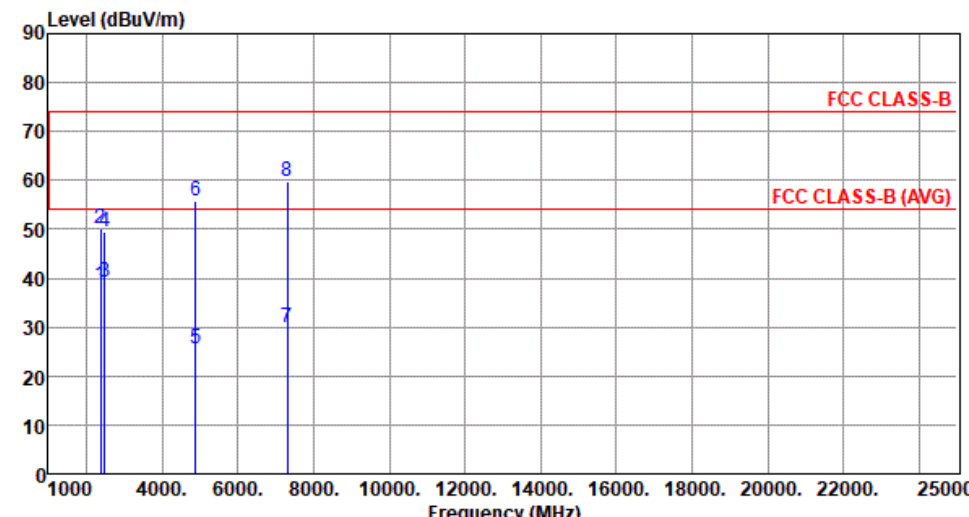

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.53	54.00	-15.47	41.33	-2.80	Average	147	204
2	2390.00	50.08	74.00	-23.92	52.88	-2.80	Peak	147	204
3	2483.50	39.17	54.00	-14.83	42.20	-3.03	Average	147	204
4	2483.50	49.57	74.00	-24.43	52.60	-3.03	Peak	147	204
5	4882.00	25.53	54.00	-28.47	21.90	3.63	Average	242	183
6	4882.00	55.63	74.00	-18.37	52.00	3.63	Peak	242	183
7	7323.00	29.74	54.00	-24.25	20.53	9.21	Average	195	141
8	7323.00	59.84	74.00	-14.15	50.63	9.21	Peak	195	141

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical		

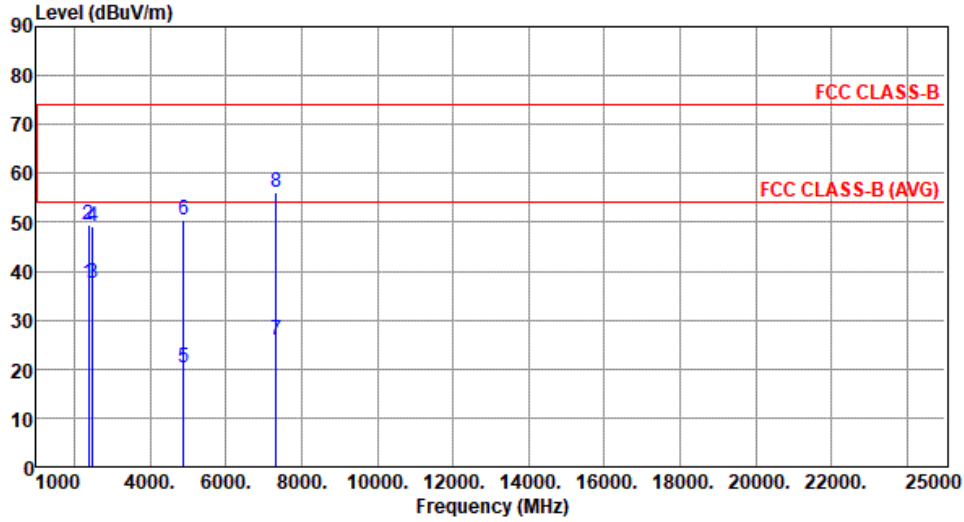


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.53	54.00	-16.47	40.33	-2.80	Average	100	278
2	2390.00	49.34	74.00	-24.66	52.14	-2.80	Peak	100	278
3	2483.50	37.66	54.00	-16.34	40.69	-3.03	Average	100	278
4	2483.50	49.27	74.00	-24.73	52.30	-3.03	Peak	100	278
5	4882.00	20.38	54.00	-33.62	16.75	3.63	Average	240	127
6	4882.00	50.48	74.00	-23.52	46.85	3.63	Peak	240	127
7	7323.00	25.97	54.00	-28.03	16.76	9.21	Average	342	137
8	7323.00	56.07	74.00	-17.93	46.86	9.21	Peak	342	137

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480																																																																						
Polarization	Horizontal																																																																								
Level (dBuV/m) 90 80 70 60 50 40 30 20 10 0 1 2 3 4 5 6 1000 4000 6000 8000 10000 12000 14000 16000 18000 20000 22000 25000 Frequency (MHz) FCC CLASS-B FCC CLASS-B (AVG) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>2483.50</td><td>41.74</td><td>54.00</td><td>-12.26</td><td>44.77</td><td>-3.03</td><td>Average</td><td>143</td><td>205</td></tr><tr><td>2</td><td>2483.50</td><td>62.85</td><td>74.00</td><td>-11.15</td><td>65.88</td><td>-3.03</td><td>Peak</td><td>143</td><td>205</td></tr><tr><td>3</td><td>4960.00</td><td>25.11</td><td>54.00</td><td>-28.89</td><td>21.28</td><td>3.83</td><td>Average</td><td>237</td><td>185</td></tr><tr><td>4</td><td>4960.00</td><td>55.21</td><td>74.00</td><td>-18.79</td><td>51.38</td><td>3.83</td><td>Peak</td><td>237</td><td>185</td></tr><tr><td>5</td><td>7440.00</td><td>29.53</td><td>54.00</td><td>-24.47</td><td>20.32</td><td>9.21</td><td>Average</td><td>193</td><td>136</td></tr><tr><td>6</td><td>7440.00</td><td>59.63</td><td>74.00</td><td>-14.37</td><td>50.42</td><td>9.21</td><td>Peak</td><td>193</td><td>136</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	2483.50	41.74	54.00	-12.26	44.77	-3.03	Average	143	205	2	2483.50	62.85	74.00	-11.15	65.88	-3.03	Peak	143	205	3	4960.00	25.11	54.00	-28.89	21.28	3.83	Average	237	185	4	4960.00	55.21	74.00	-18.79	51.38	3.83	Peak	237	185	5	7440.00	29.53	54.00	-24.47	20.32	9.21	Average	193	136	6	7440.00	59.63	74.00	-14.37	50.42	9.21	Peak	193	136
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
1	2483.50	41.74	54.00	-12.26	44.77	-3.03	Average	143	205																																																																
2	2483.50	62.85	74.00	-11.15	65.88	-3.03	Peak	143	205																																																																
3	4960.00	25.11	54.00	-28.89	21.28	3.83	Average	237	185																																																																
4	4960.00	55.21	74.00	-18.79	51.38	3.83	Peak	237	185																																																																
5	7440.00	29.53	54.00	-24.47	20.32	9.21	Average	193	136																																																																
6	7440.00	59.63	74.00	-14.37	50.42	9.21	Peak	193	136																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

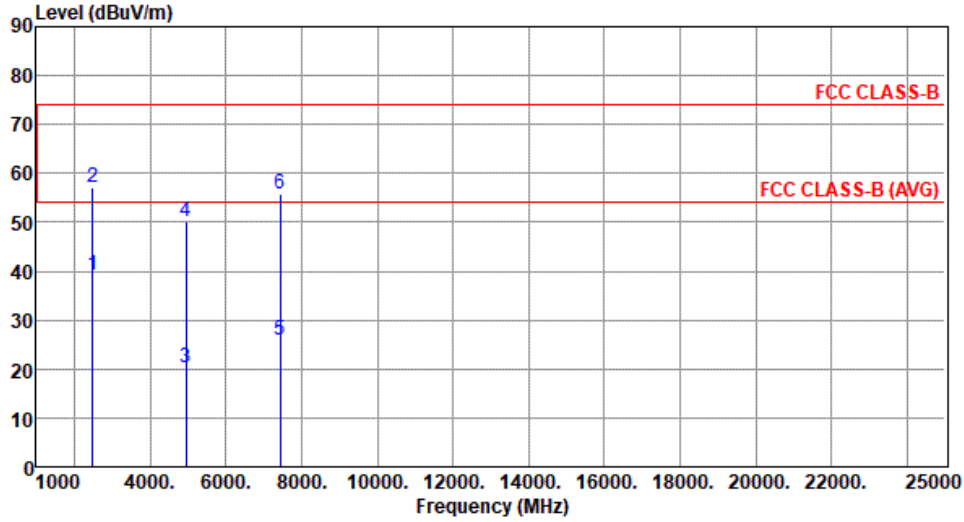


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.22	54.00	-14.78	42.25	-3.03	Average	100	272
2	2483.50	57.19	74.00	-16.81	60.22	-3.03	Peak	100	272
3	4960.00	20.21	54.00	-33.79	16.38	3.83	Average	237	124
4	4960.00	50.31	74.00	-23.69	46.48	3.83	Peak	237	124
5	7440.00	25.76	54.00	-28.24	16.55	9.21	Average	340	136
6	7440.00	55.86	74.00	-18.14	46.65	9.21	Peak	340	136

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

3.2.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal		
Level (dBuV/m) </			


Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical		

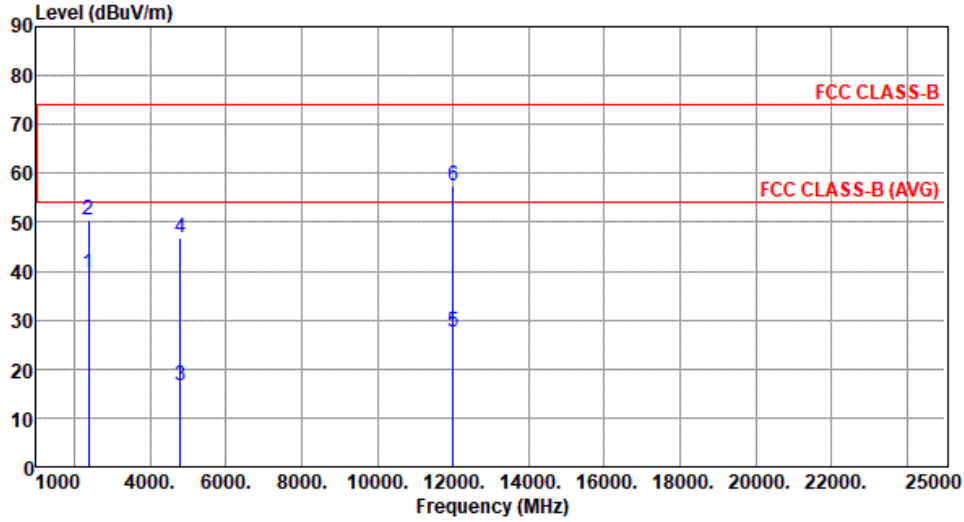

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.57	54.00	-14.43	42.37	-2.80	Average	100	265
2	2390.00	50.45	74.00	-23.55	53.25	-2.80	Peak	100	265
3	4804.00	16.76	54.00	-37.24	13.23	3.53	Average	100	60
4	4804.00	46.86	74.00	-27.14	43.33	3.53	Peak	100	60
5	12010.00	27.40	54.00	-26.60	13.68	13.72	Average	100	55
6	12010.00	57.50	74.00	-16.50	43.78	13.72	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal		

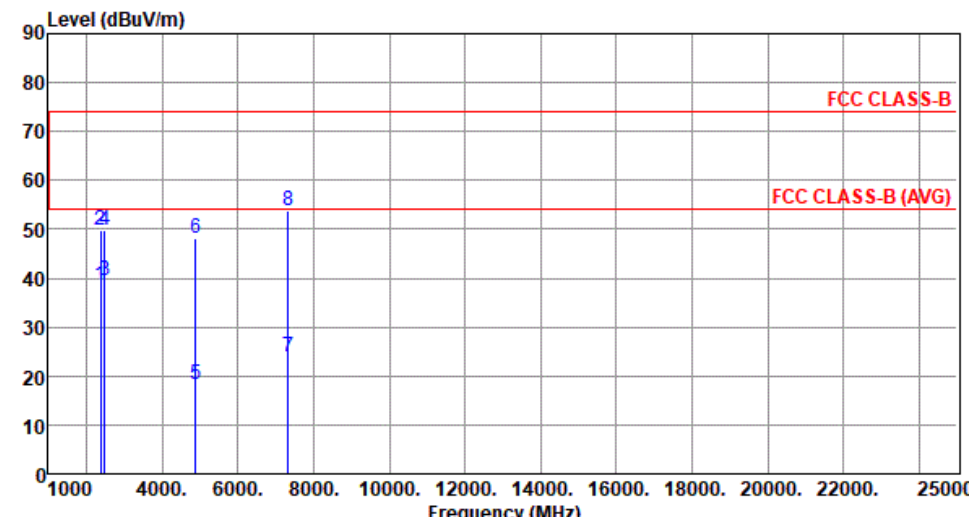

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.61	54.00	-15.39	41.41	-2.80	Average	147	211
2	2390.00	49.86	74.00	-24.14	52.66	-2.80	Peak	147	211
3	2483.50	39.66	54.00	-14.34	42.69	-3.03	Average	147	211
4	2483.50	49.72	74.00	-24.28	52.75	-3.03	Peak	147	211
5	4882.00	18.17	54.00	-35.83	14.54	3.63	Average	100	139
6	4882.00	48.27	74.00	-25.73	44.64	3.63	Peak	100	139
7	7323.00	23.82	54.00	-30.18	14.61	9.21	Average	100	142
8	7323.00	53.92	74.00	-20.08	44.71	9.21	Peak	100	142

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical		

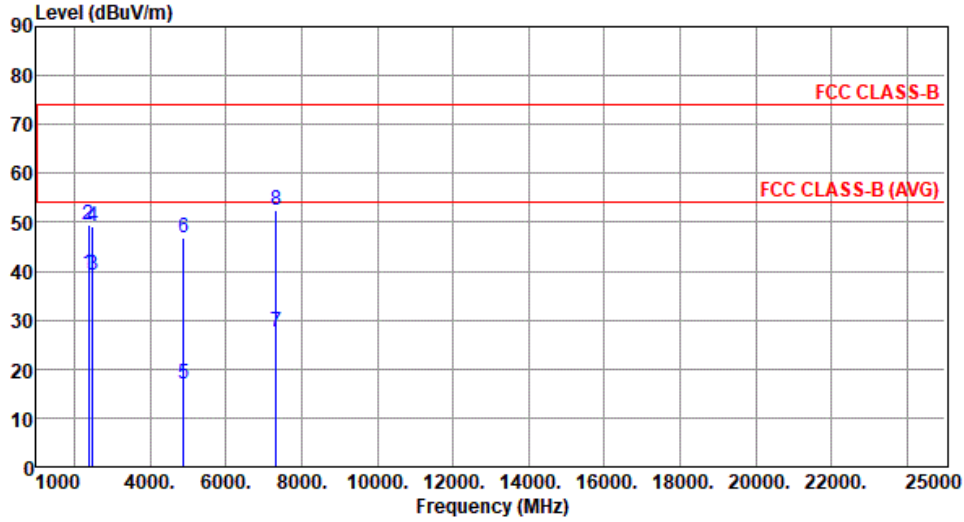

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.45	54.00	-14.55	42.25	-2.80	Average	100	268
2	2390.00	49.62	74.00	-24.38	52.42	-2.80	Peak	100	268
3	2483.50	39.23	54.00	-14.77	42.26	-3.03	Average	100	268
4	2483.50	49.30	74.00	-24.70	52.33	-3.03	Peak	100	268
5	4882.00	16.79	54.00	-37.21	13.16	3.63	Average	100	51
6	4882.00	46.89	74.00	-27.11	43.26	3.63	Peak	100	51
7	7323.00	27.47	54.00	-26.53	18.26	9.21	Average	100	57
8	7323.00	52.57	74.00	-21.43	43.36	9.21	Peak	100	57

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal		

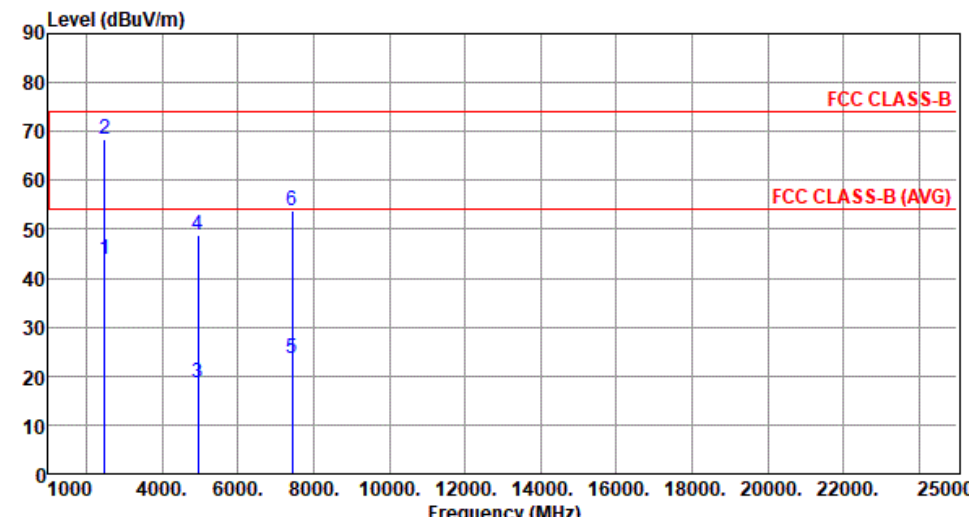

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	43.73	54.00	-10.27	46.76	-3.03	Average	144	203
2	2483.50	68.29	74.00	-5.71	71.32	-3.03	Peak	144	203
3	4960.00	18.64	54.00	-35.36	14.81	3.83	Average	100	132
4	4960.00	48.74	74.00	-25.26	44.91	3.83	Peak	100	132
5	7440.00	23.63	54.00	-30.37	14.42	9.21	Average	100	144
6	7440.00	53.73	74.00	-20.27	44.52	9.21	Peak	100	144

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical		

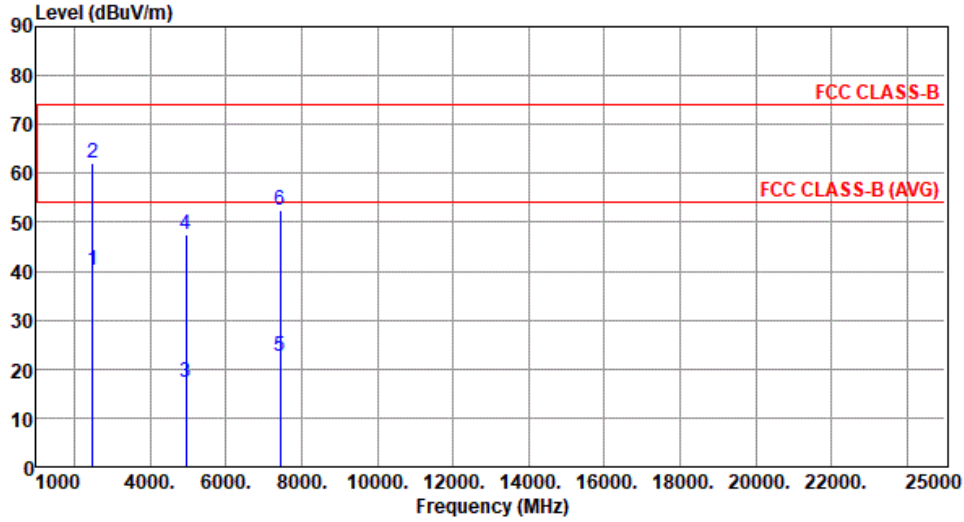

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	40.33	54.00	-13.67	43.36	-3.03	Average	100	264
2	2483.50	62.22	74.00	-11.78	65.25	-3.03	Peak	100	264
3	4960.00	17.25	54.00	-36.75	13.42	3.83	Average	100	58
4	4960.00	47.35	74.00	-26.65	43.52	3.83	Peak	100	58
5	7440.00	22.50	54.00	-31.50	13.29	9.21	Average	100	63
6	7440.00	52.60	74.00	-21.40	43.39	9.21	Peak	100	63

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.3.3 Test Setup




3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

BT-BR(1Mbps)

CSENdB-FS


2402MHz

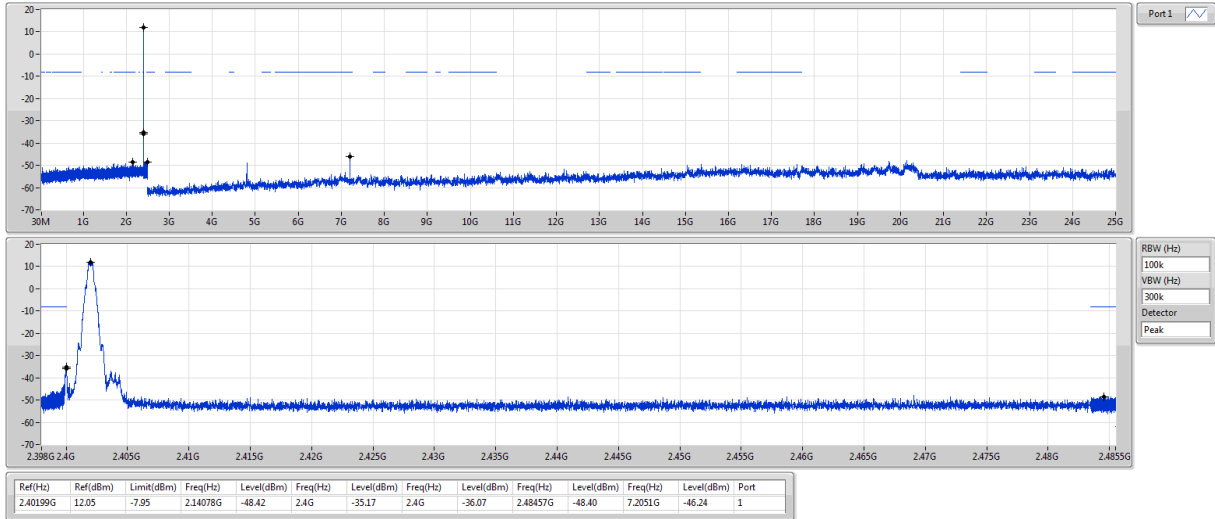

BT-BR(1Mbps)

CSENdB-FS


2441MHz

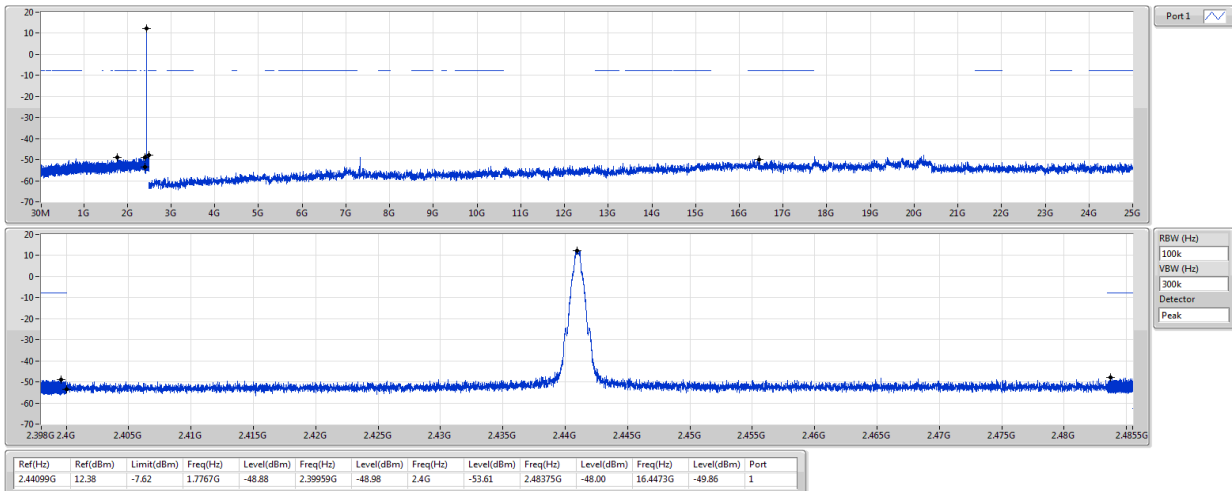

BT-BR(1Mbps)

2480MHz


CSENdB-FS

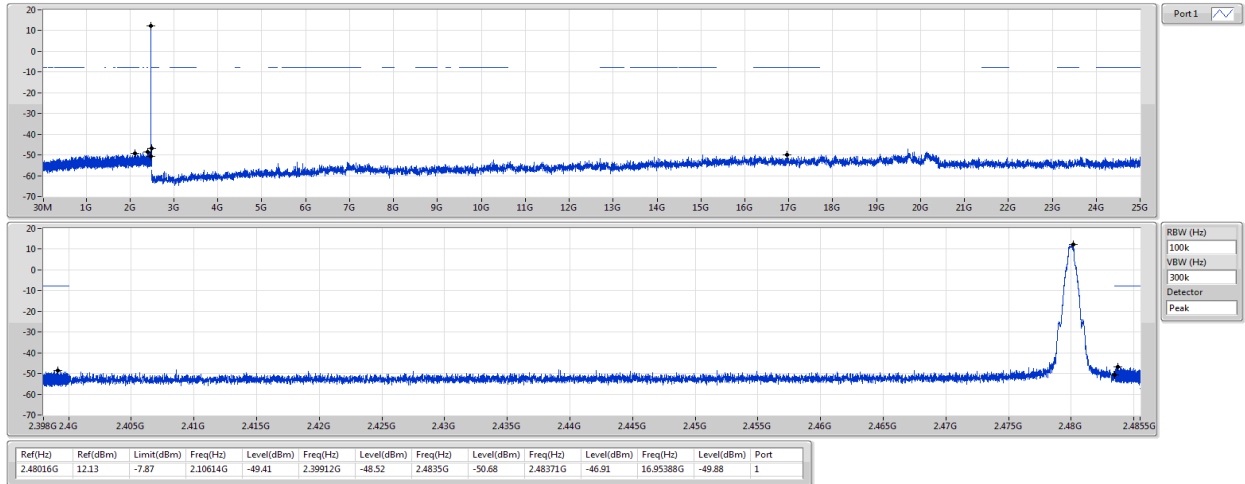

BT-EDR(2Mbps)

2402MHz


CSENdB-FS

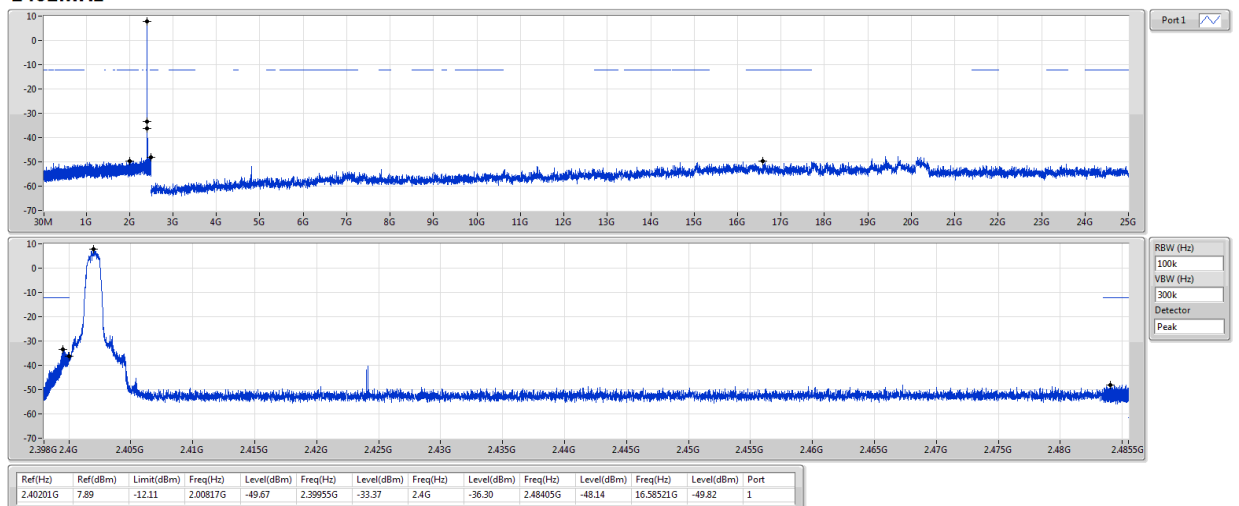

BT-EDR(2Mbps)

CSENdB-FS


2441MHz

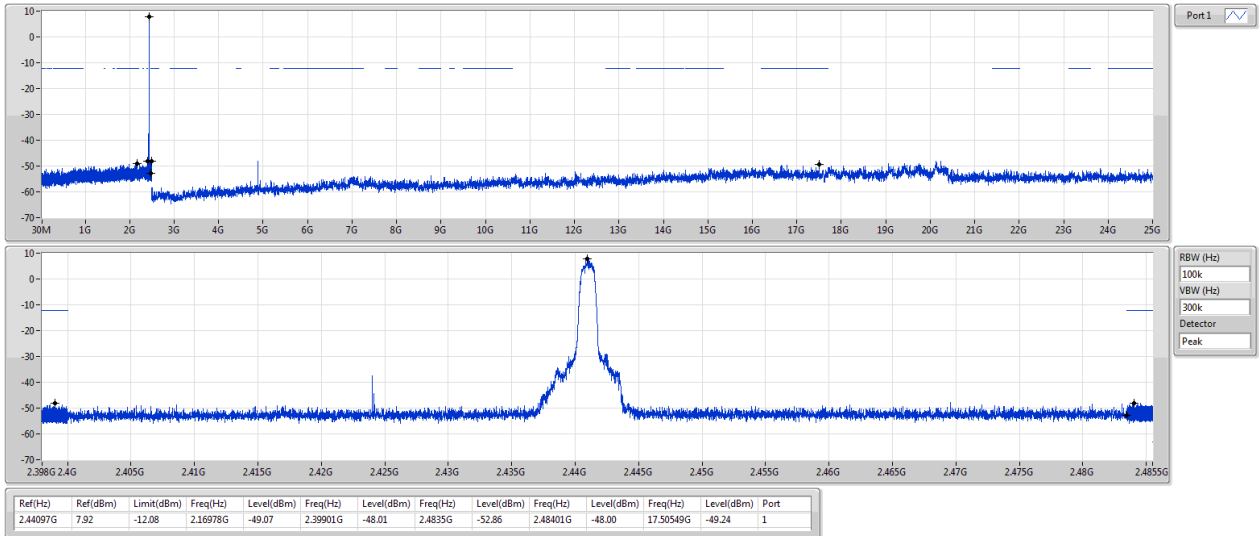

BT-EDR(2Mbps)

CSENdB-FS


2480MHz

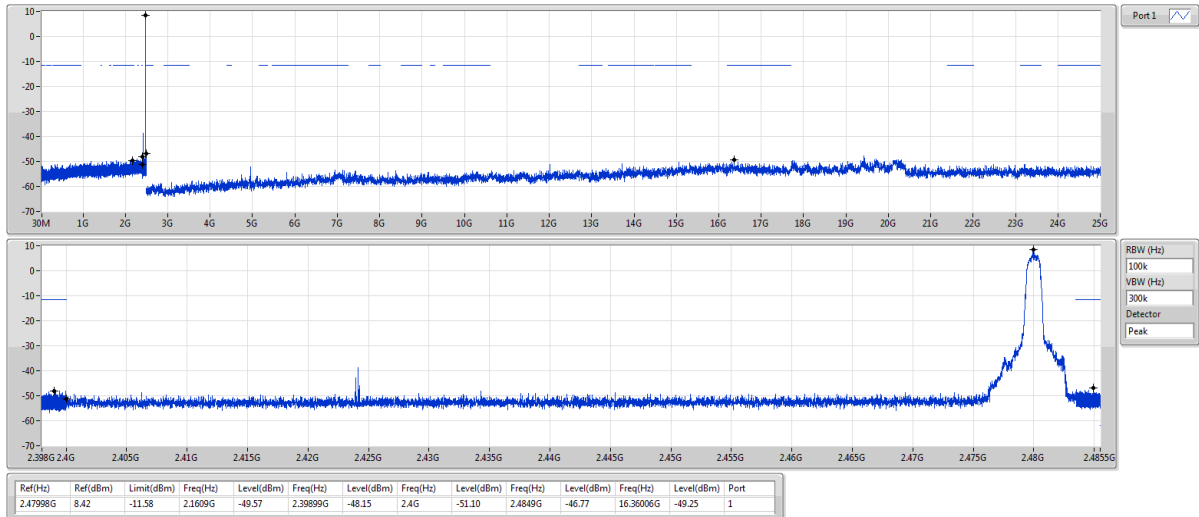

BT-EDR(3Mbps)

CSENdB-FS


2402MHz

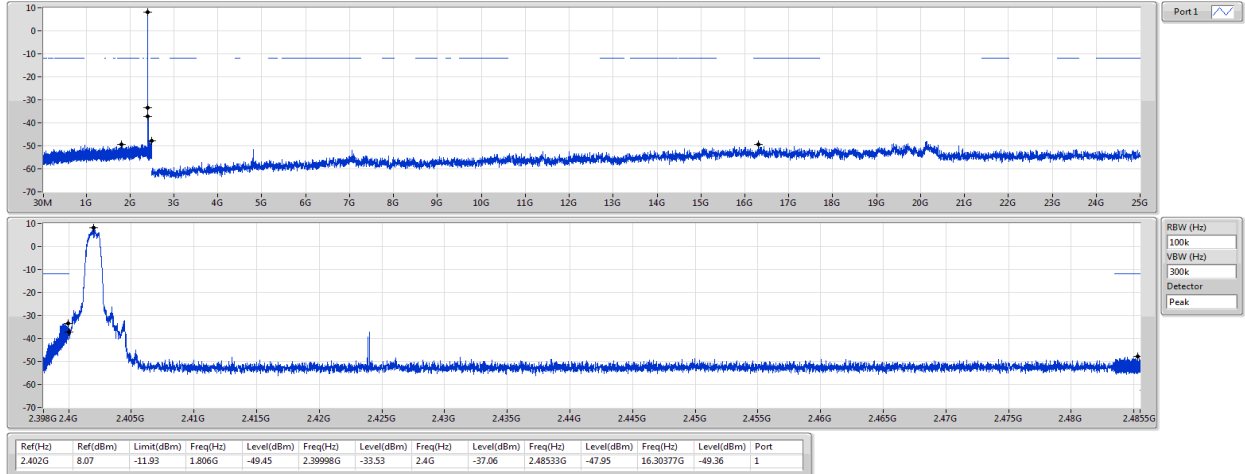

BT-EDR(3Mbps)

CSENdB-FS


2441MHz

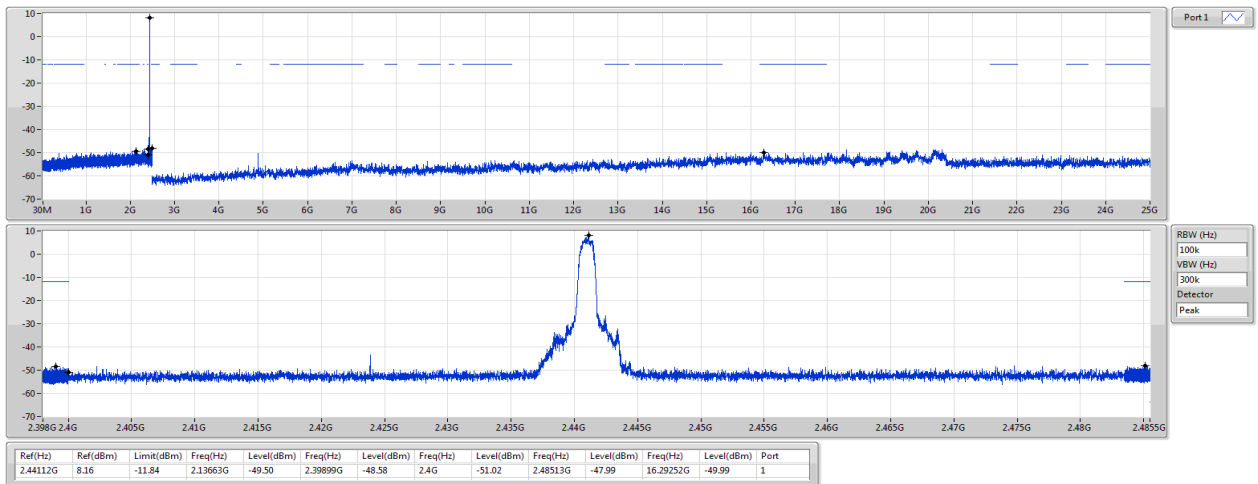

BT-EDR(3Mbps)

2480MHz


CSEndB-FS

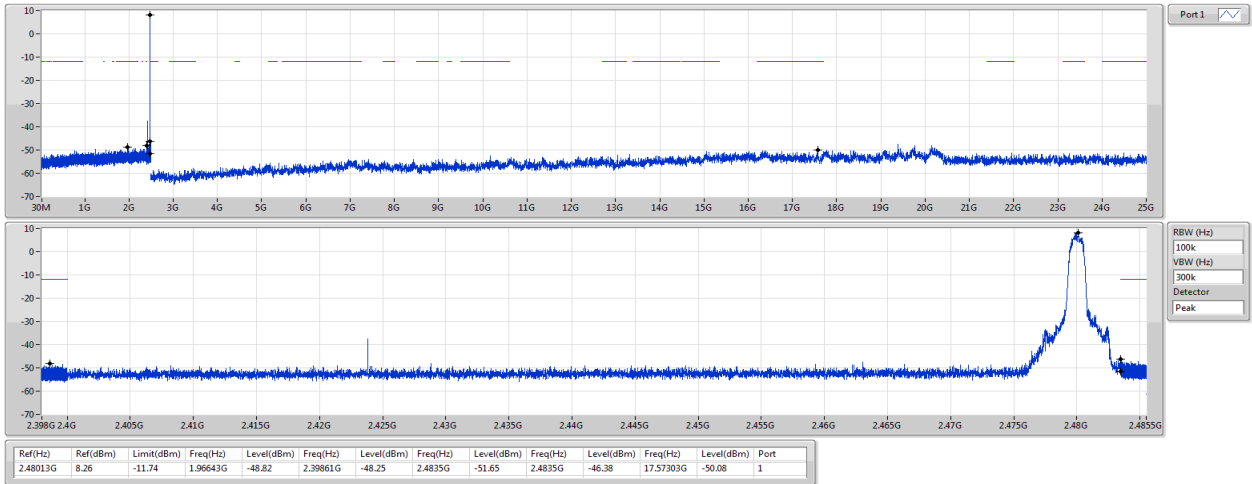

BT-BR(1Mbps)

2441MHz


Hopping Ch Bandedge (Non-restricted Band)

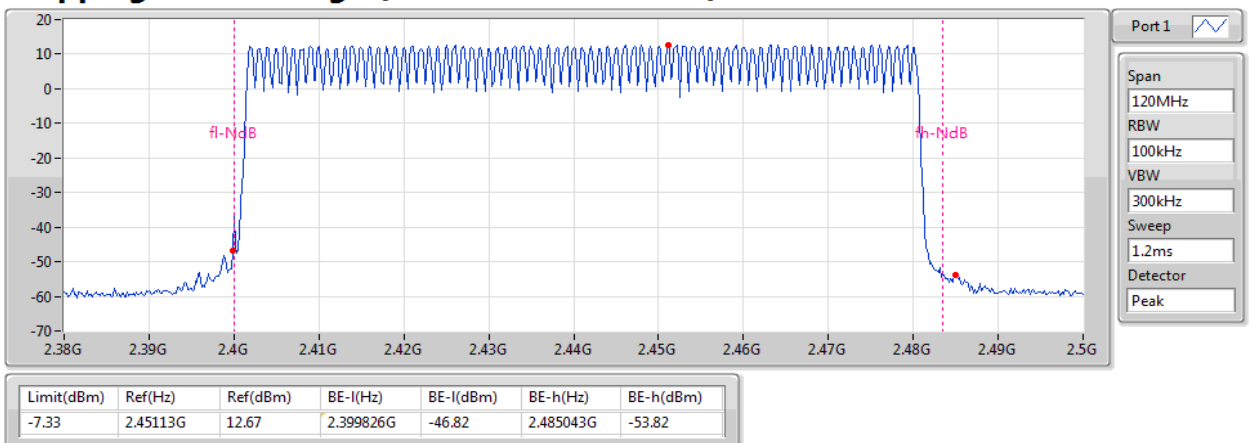

BT-EDR(2Mbps)

2441MHz


Hopping Ch Bandedge (Non-restricted Band)

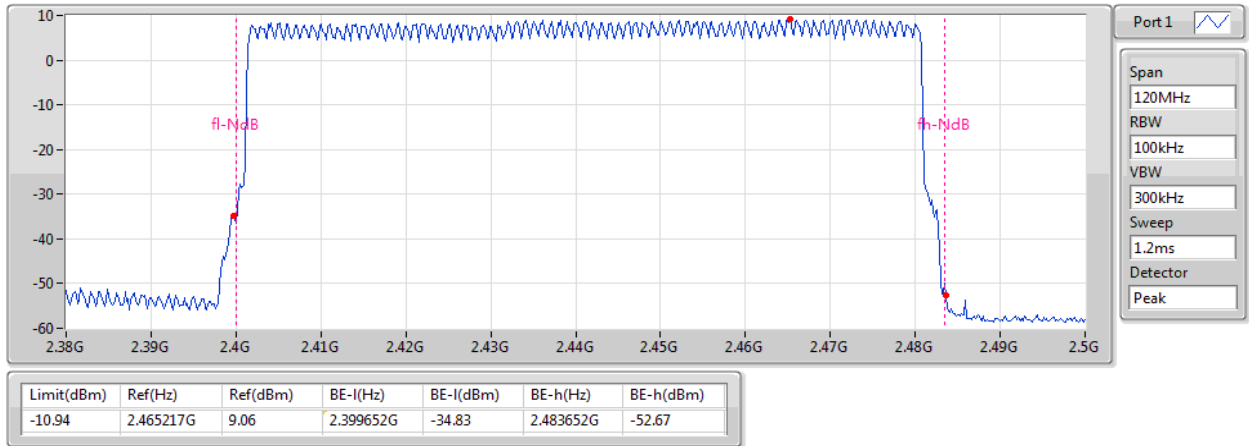

BT-EDR(3Mbps)

2441MHz

Hopping Ch Bandedge (Non-restricted Band)

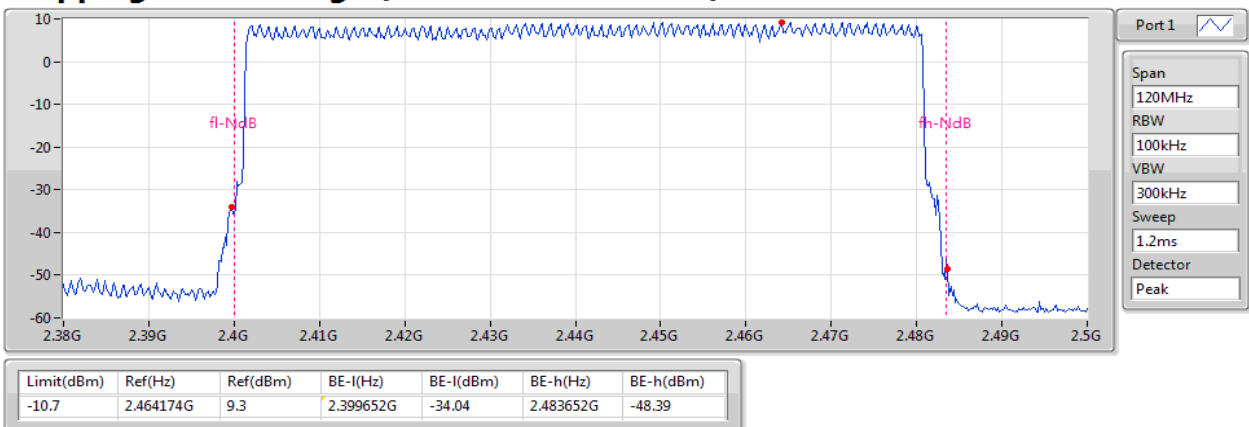

3.4 Conducted Output Power


3.4.1 Limit of Conducted Output Power

- ☐ 1 Watt
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
- ☒ 0.125 Watt
For all other frequency hopping systems in the 2400–2483.5 MHz band.
- ☐ 0.125 Watt
For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz
2. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup



3.4.4 Test Result of Conducted Output Power

Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	12.64	0.01837
BT-EDR(2Mbps)	11.42	0.01387
BT-EDR(3Mbps)	11.54	0.01426

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	-2.13	12.64	21.00
2441MHz	Pass	-2.13	12.63	21.00
2480MHz	Pass	-2.13	12.62	21.00
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	-2.13	11.34	21.00
2441MHz	Pass	-2.13	11.42	21.00
2480MHz	Pass	-2.13	11.36	21.00
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	-2.13	11.38	21.00
2441MHz	Pass	-2.13	11.54	21.00
2480MHz	Pass	-2.13	11.42	21.00

Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	12.60	0.01820
BT-EDR(2Mbps)	9.14	0.00820
BT-EDR(3Mbps)	9.14	0.00820

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	-2.13	12.60	-
2441MHz	Pass	-2.13	12.59	-
2480MHz	Pass	-2.13	12.58	-
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	-2.13	9.02	-
2441MHz	Pass	-2.13	9.14	-
2480MHz	Pass	-2.13	8.90	-
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	-2.13	9.05	-
2441MHz	Pass	-2.13	9.14	-
2480MHz	Pass	-2.13	8.91	-

Note: Average power is for reference only.

3.5 Number of Hopping Frequency


3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

3.5.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

3.5.3 Test Setup



3.5.4 Test Result of Number of Hopping Frequency

Summary


Mode	Max-Hop No
2.4-2.4835GHz	-
BT-BR(1Mbps)	79
BT-EDR(2Mbps)	79
BT-EDR(3Mbps)	79

Result

Mode	Result	Hopping No	Limit
BT-BR(1Mbps)	-	-	-
2441MHz	Pass	79	15
BT-EDR(2Mbps)	-	-	-
2441MHz	Pass	79	15
BT-EDR(3Mbps)	-	-	-
2441MHz	Pass	79	15


BT-BR(1Mbps)
2441MHz

Hopping Ch

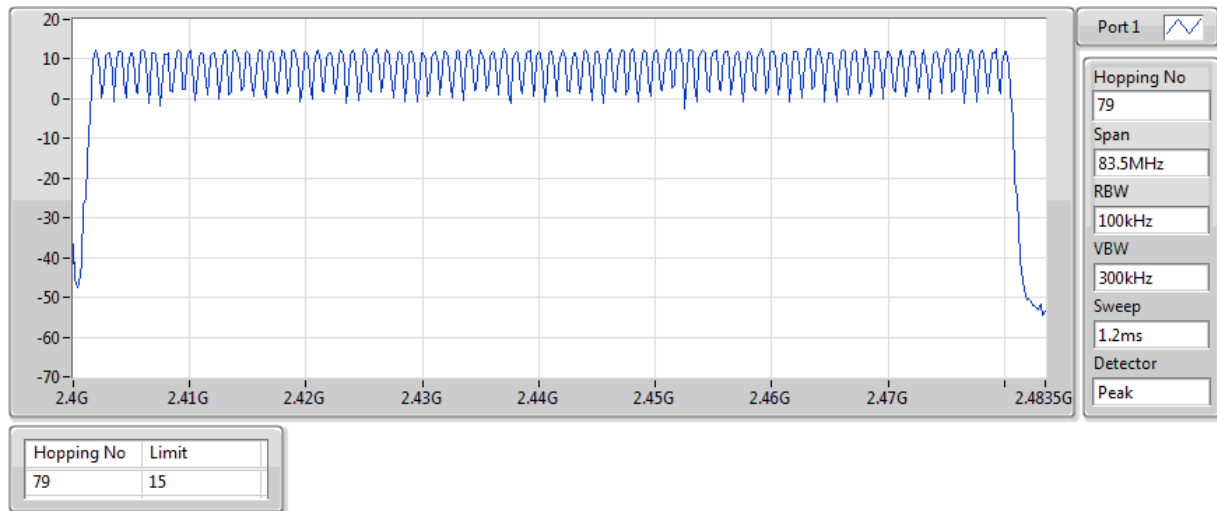


BT-EDR(2Mbps)
2441MHz

Hopping Ch

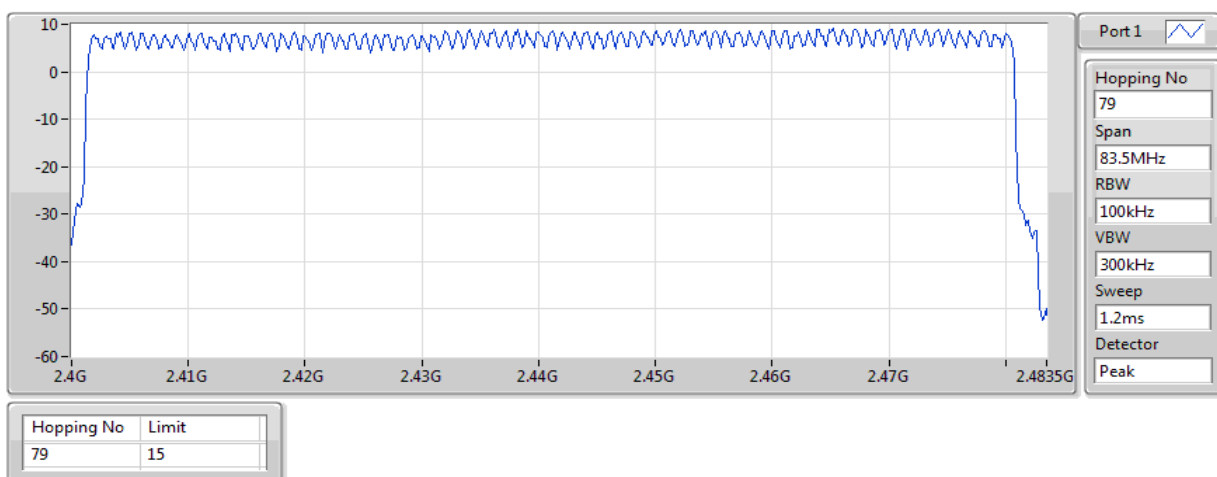

BT-EDR(3Mbps)
2441MHz

Hopping Ch

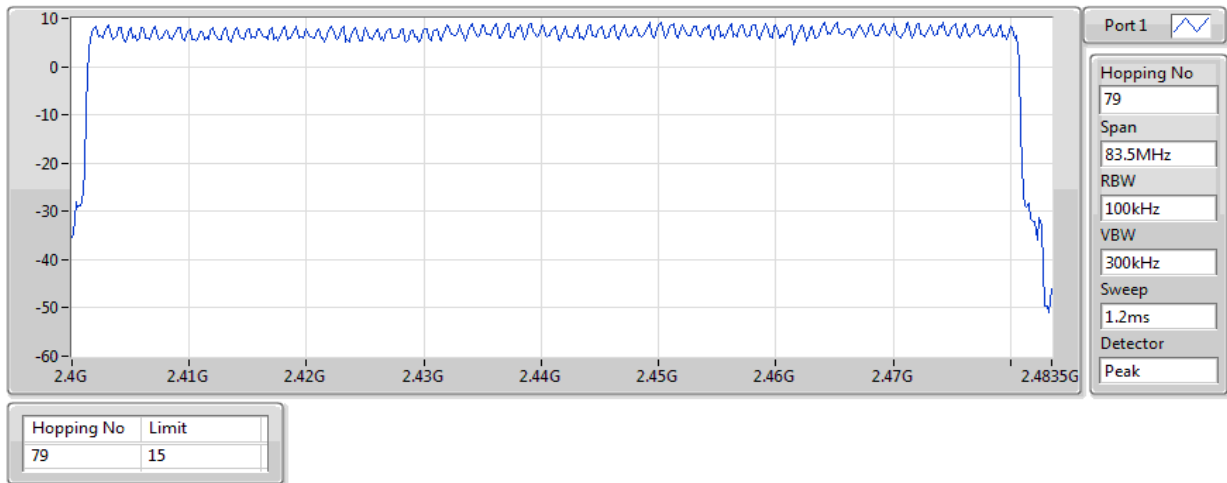

3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures


20dB Bandwidth

1. Set RBW=10kHz VBW= 30kHz for BT BR mode, RBW=20kHz, VBW=100kHz for other modes, Sweep time = Auto, Detector=Peak , Trace max hold
2. Allow trace to stabilize
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set RBW=10kHz VBW= 30kHz for BT BR mode, RBW=20kHz, VBW=100kHz for other modes, Sweep time = Auto, Detector=Sample , Trace max hold
2. Allow trace to stabilize
3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup



3.6.3 Test result of 20dB and Occupied Bandwidth

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-BR(1Mbps)	996.377k	923.3k	923KF1D	891.304k	903.039k
BT-EDR(2Mbps)	1.348M	1.219M	1M22G1D	1.33M	1.204M
BT-EDR(3Mbps)	1.341M	1.221M	1M22G1D	1.333M	1.219M

Max-N dB = Maximum 20dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 20dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	Inf	981.884k	903.039k
2441MHz	Pass	Inf	891.304k	923.3k
2480MHz	Pass	Inf	996.377k	923.3k
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.33M	1.219M
2441MHz	Pass	Inf	1.341M	1.204M
2480MHz	Pass	Inf	1.348M	1.216M
BT-EDR(3Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.333M	1.219M
2441MHz	Pass	Inf	1.341M	1.221M
2480MHz	Pass	Inf	1.341M	1.221M

Port X-N dB = Port X 20dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;


BT-BR(1Mbps)

2402MHz




20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
981.884k	2.401522G	2.402504G	903.039k	2.401548G	2.402452G	Inf	1

EBW-FS

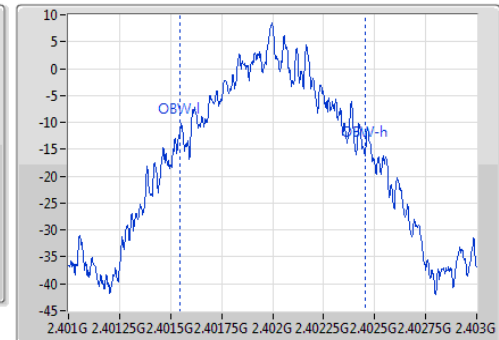


BT-BR(1Mbps)

2441MHz

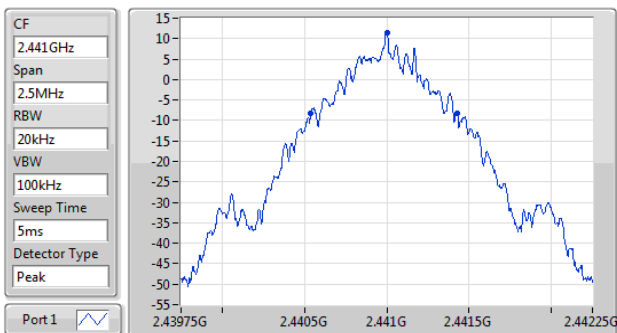


20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
891.304k	2.44054G	2.441431G	923.3k	2.440537G	2.44146G	Inf	1

EBW-FS

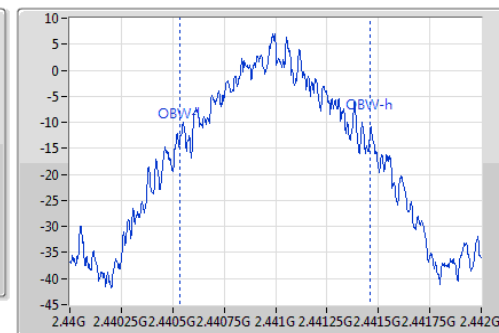

BT-BR(1Mbps)


2480MHz

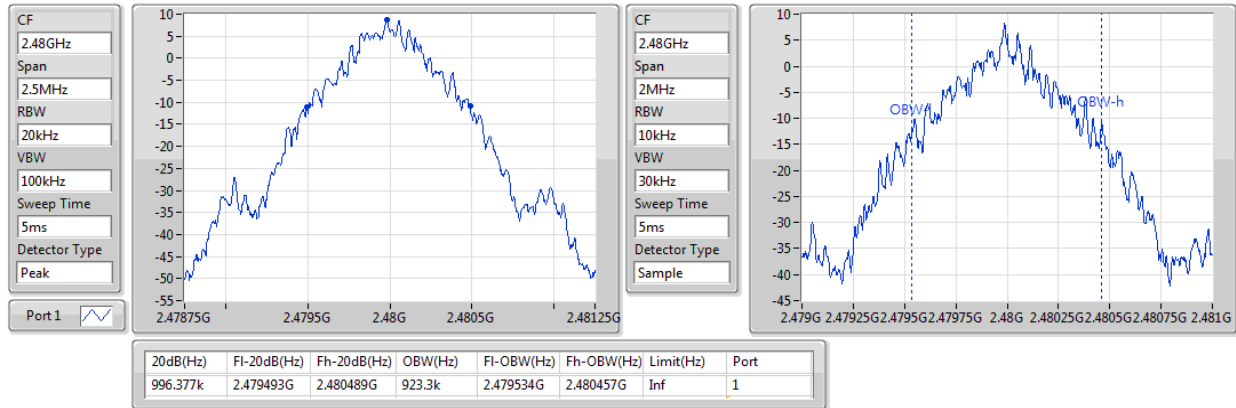

EBW-FS

BT-EDR(2Mbps)


2402MHz

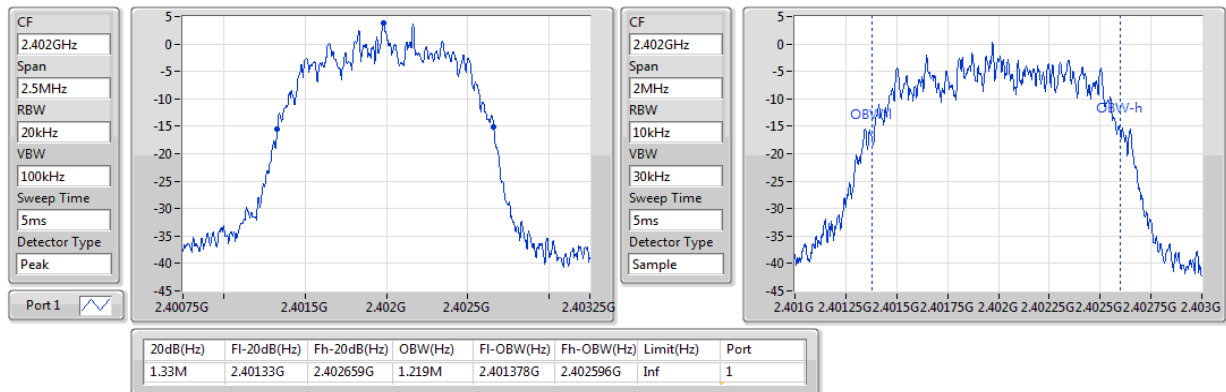

EBW-FS


BT-EDR(2Mbps)

2441MHz

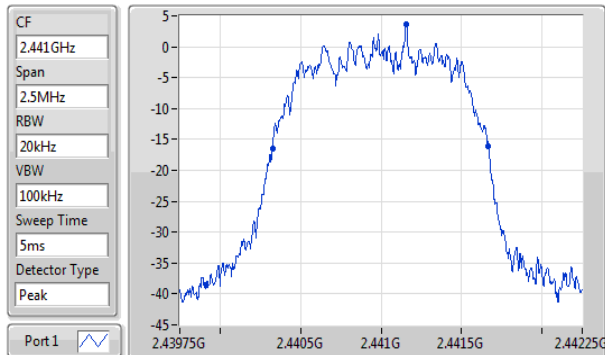


20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.341M	2.440326G	2.441667G	1.204M	2.440389G	2.441593G	Inf	1

EBW-FS

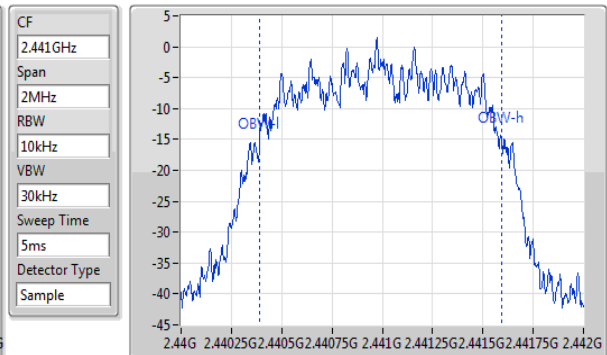


BT-EDR(2Mbps)

2480MHz

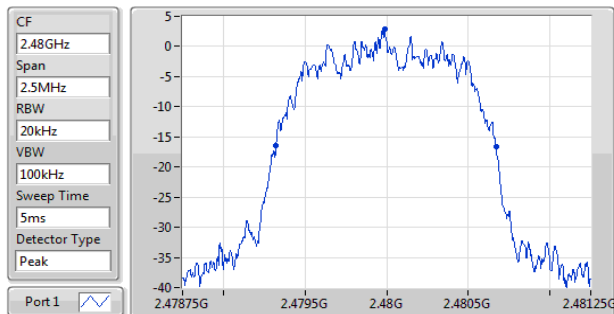

20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.348M	2.479322G	2.48067G	1.216M	2.479381G	2.480596G	Inf	1

EBW-FS

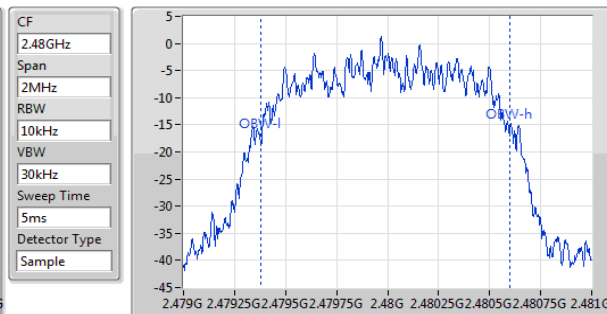


BT-EDR(3Mbps)

2402MHz




20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.333M	2.401322G	2.402656G	1.219M	2.401372G	2.40259G	Inf	1

EBW-FS

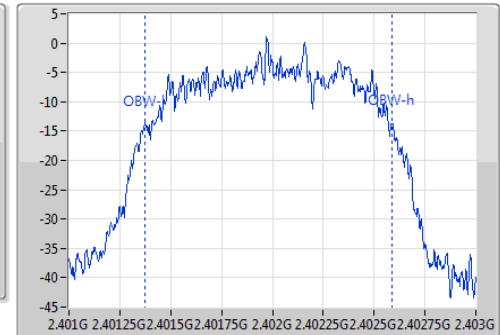


BT-EDR(3Mbps)

2441MHz

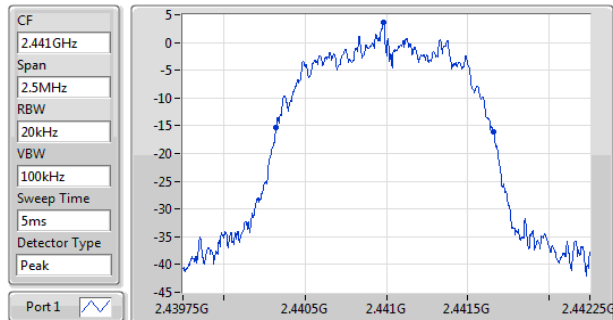


20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.341M	2.440319G	2.441659G	1.221M	2.440369G	2.44159G	Inf	1

EBW-FS

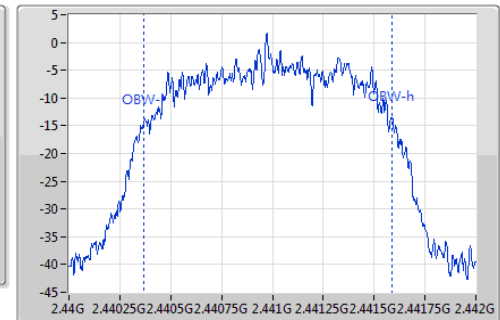


BT-EDR(3Mbps)

2480MHz

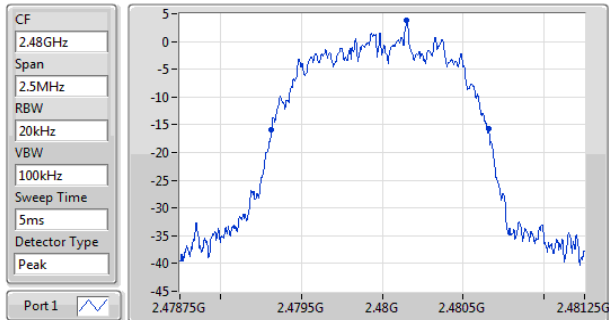

EBW-FS

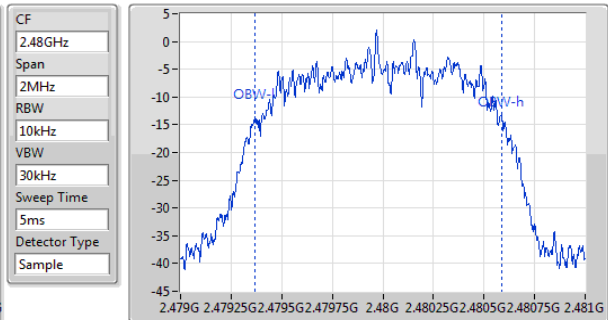

20dB(Hz)	Fl-20dB(Hz)	Fh-20dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.341M	2.479315G	2.480656G	1.221M	2.479369G	2.48059G	Inf	1

3.7 Channel Separation


3.7.1 Limit of Channel Separation

- ☐ Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- ☒ Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures

1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup



3.7.4 Test result of Channel Separation

Summary

Mode	Max-Space (Hz)	Min-Space (Hz)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	1.004348M	1M
BT-EDR(2Mbps)	1.004348M	1M
BT-EDR(3Mbps)	1M	1M

Result

Mode	Result	Fl (Hz)	Fh (Hz)	Ch.Space (Hz)	Limit (Hz)
BT-BR(1Mbps)	-	-	-	-	-
2402MHz	Pass	2.401996G	2.403G	1.004348M	653.934744k
2441MHz	Pass	2.440996G	2.441996G	1M	593.608464k
2480MHz	Pass	2.478996G	2.479996G	1M	663.587082k
BT-EDR(2Mbps)	-	-	-	-	-
2402MHz	Pass	2.401987G	2.402987G	1M	885.78k
2441MHz	Pass	2.440983G	2.441983G	1M	893.106k
2480MHz	Pass	2.478978G	2.479983G	1.004348M	897.768k
BT-EDR(3Mbps)	-	-	-	-	-
2402MHz	Pass	2.401987G	2.402987G	1M	887.778k
2441MHz	Pass	2.440983G	2.441983G	1M	893.106k
2480MHz	Pass	2.478983G	2.479983G	1M	917.082k

BT-BR(1Mbps)

Channel Separation

2.402G/2.403GHz



BT-BR(1Mbps)

Channel Separation

2.441G/2.442GHz



BT-BR(1Mbps)

Channel Separation


2.48G/2.479GHz



BT-EDR(2Mbps)

Channel Separation


2.402G/2.403GHz

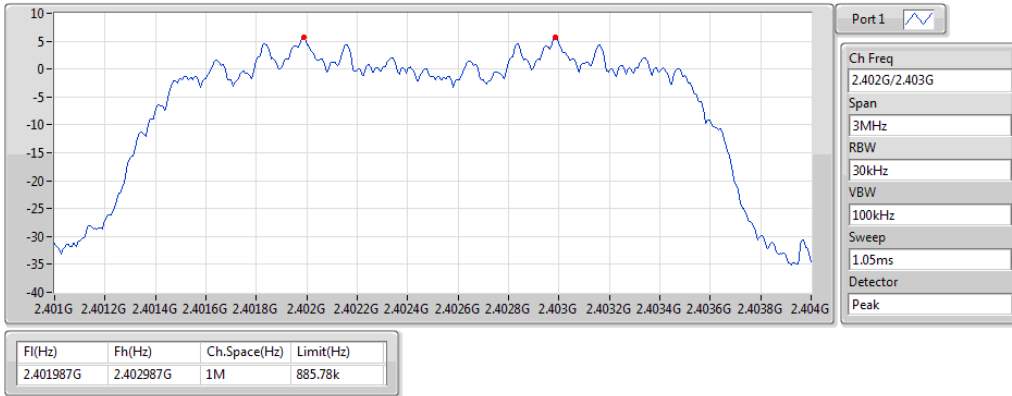

BT-EDR(2Mbps)

Channel Separation


2.441G/2.442GHz

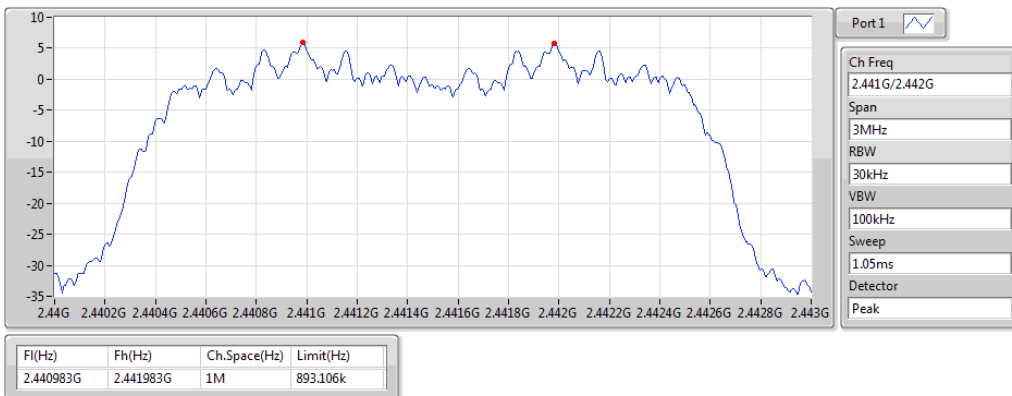

BT-EDR(2Mbps)

Channel Separation

2.48G/2.479GHz

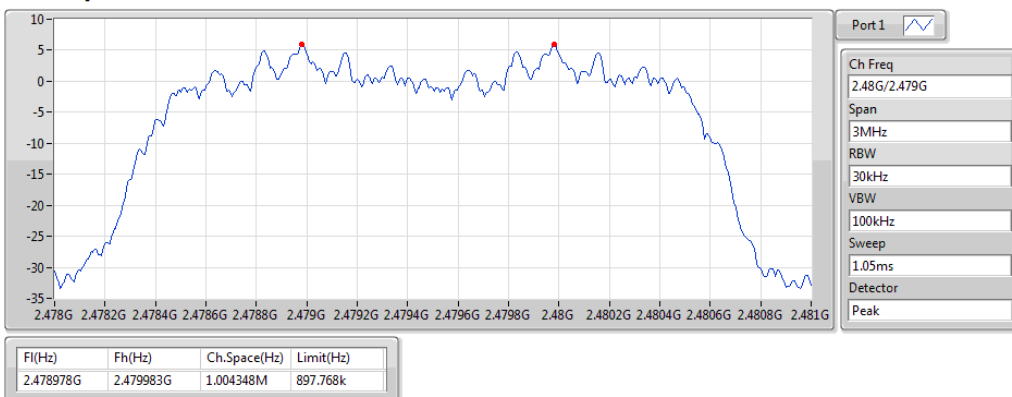

BT-EDR(3Mbps)

Channel Separation


2.402G/2.403GHz



BT-EDR(3Mbps)

Channel Separation


2.441G/2.442GHz

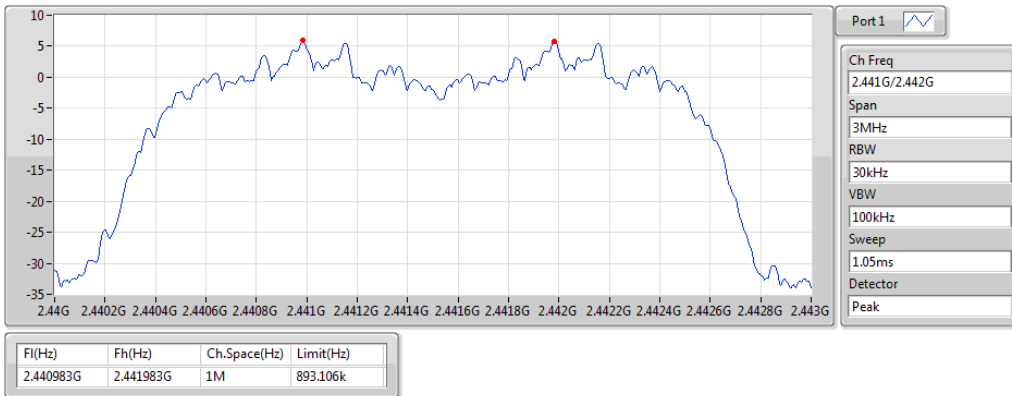

BT-EDR(3Mbps)

Channel Separation

2.48G/2.479GHz

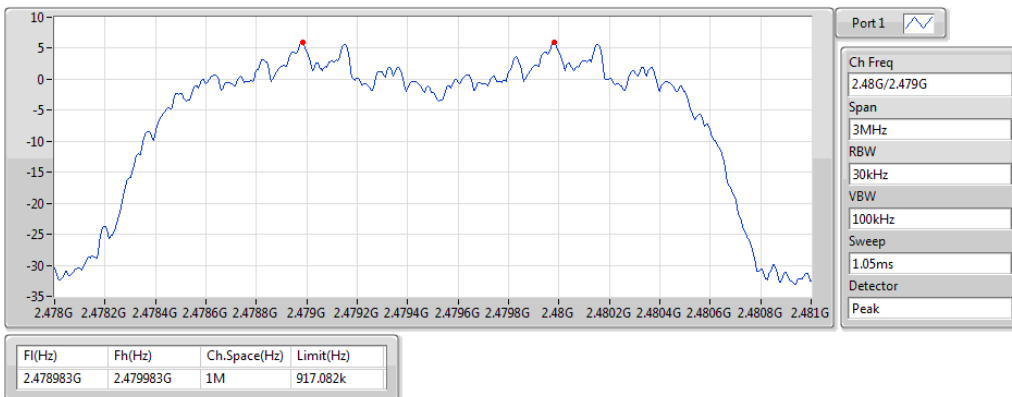

3.8 Number of Dwell Time


3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures

1. Set RBW=300kHz,VBW=1MHz,Sweep time = 10 ms, Detector=Peak, Span=0Hz,Trace max hold
2. Enable gating and trigger function of spectrum analyzer to measure burst on time.
3. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots.
Non AFH mode
The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
AFH mode
The hopping rate is 800 hops/second so the maximum dwell time is 5/800 seconds. DH5 Packet permit maximum $800 / 20 / 6 = 6.667$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $6.667 \times 8 = 53.33$ within 8 seconds

3.8.3 Test Setup



3.8.4 Test Result of Dwell Time

Result/ Non AFH mode

Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (ms)	Number of transmission in a 5 s
BT-BR(1Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.35451	0.4	2.95225	19
BT-EDR(2Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.31093	0.4	2.89400	17
BT-EDR(3Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	31.6	0.31109	0.4	2.89550	17

Note 1: Dwell time =Number of transmission in a 5 second x Tx On Time x 6.32

Note 2: DH5 was the worst mode.

Result/ AFH mode

Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (ms)	Number of transmission in a 2 s
BT-BR-AFH(1Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.31882	0.4	2.95200	27
BT-EDR-AFH(2Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.30092	0.4	2.89350	26
BT-EDR-AFH(3Mbps)	-	-	-	-	-	-
2402MHz_DH5	PASS	8	0.30116	0.4	2.89575	26

Note 1: Dwell time =Number of transmission in a 2 second x Tx On Time x 4

Note 2: DH5 was the worst mode.

BT-BR(1Mbps)

Dwell


2402MHz



BT-EDR(2Mbps)


Dwell

2402MHz

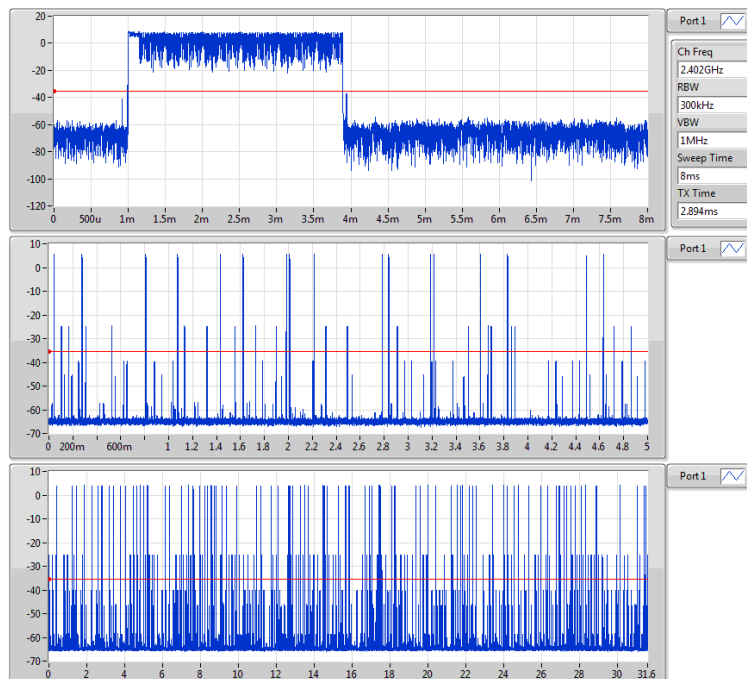


BT-EDR(3Mbps)

2402MHz

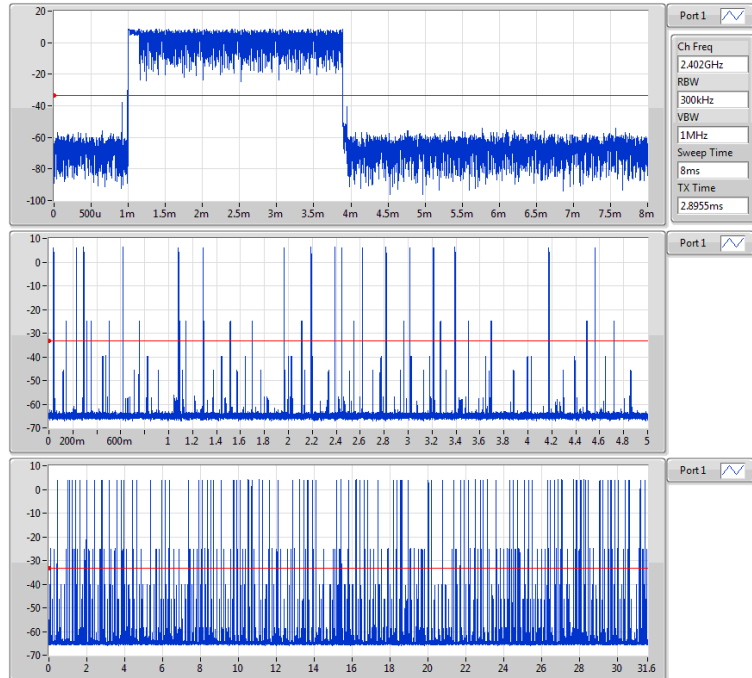

BT-BR-AFH(1Mbps)


2402MHz

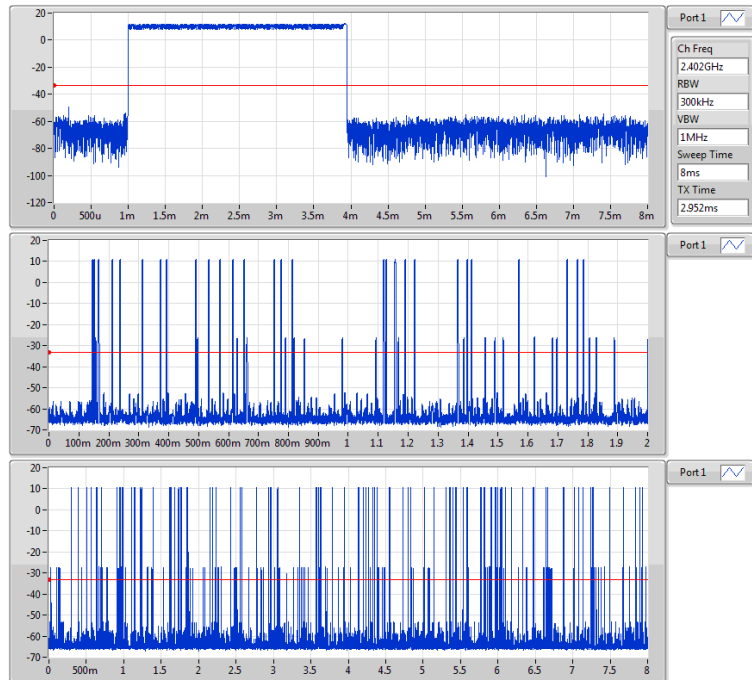

BT-EDR-AFH(2Mbps)

Dwell

2402MHz

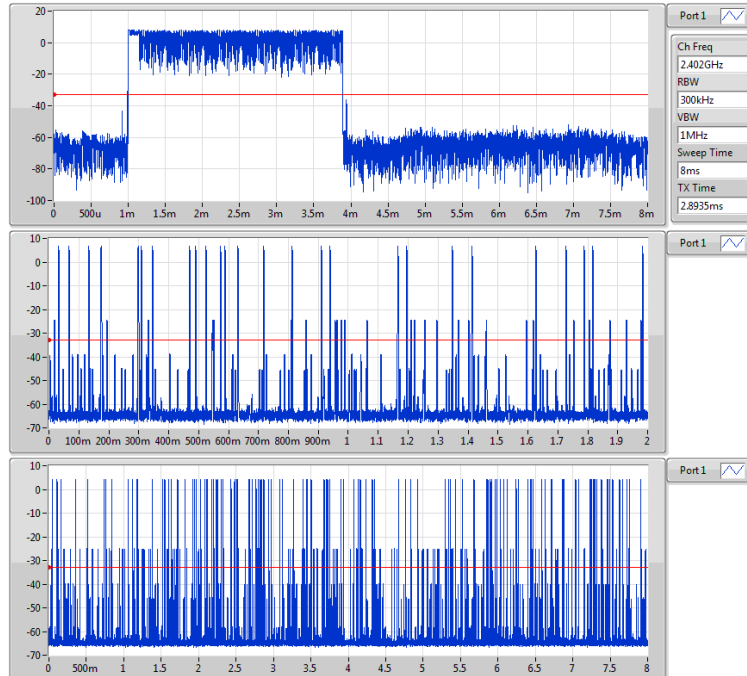

BT-EDR-AFH(3Mbps)

Dwell

2402MHz



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==