

FCC Test Report

Report No.: RF180802E10-1

FCC ID: JNZCU0018

Test Model: C-U0018

Received Date: Aug. 02, 2018

Test Date: Aug. 07 to 09, 2018

Issued Date: Aug. 30, 2018

Applicant: LOGITECH FAR EAST LTD.

Address: #2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Co Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Description of Support Units	11
3.3.1 Configuration of System under Test	11
3.4 Duty Cycle of Test Signal	12
3.5 General Description of Applied Standards	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement.....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard	16
4.1.5 Test Setup.....	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results	19
4.2 Conducted Emission Measurement	27
4.2.1 Limits of Conducted Emission Measurement	27
4.2.2 Test Instruments	27
4.2.3 Test Procedures.....	28
4.2.4 Deviation from Test Standard	28
4.2.5 Test Setup.....	28
4.2.6 EUT Operating Conditions.....	28
4.2.7 Test Results	29
4.3 6dB Bandwidth Measurement	33
4.3.1 Limits of 6dB Bandwidth Measurement	33
4.3.2 Test Setup.....	33
4.3.3 Test Instruments	33
4.3.4 Test Procedure	33
4.3.5 Deviation from Test Standard	33
4.3.6 EUT Operating Conditions.....	33
4.3.7 Test Result.....	34
4.4 Conducted Output Power Measurement.....	36
4.4.1 Limits of Conducted Output Power Measurement	36
4.4.2 Test Setup.....	36
4.4.3 Test Instruments	36
4.4.4 Test Procedures.....	36
4.4.5 Deviation from Test Standard	36
4.4.6 EUT Operating Conditions.....	36
4.4.7 Test Results	37
4.5 Power Spectral Density Measurement.....	39
4.5.1 Limits of Power Spectral Density Measurement	39
4.5.2 Test Setup.....	39
4.5.3 Test Instruments	39
4.5.4 Test Procedure	39
4.5.5 Deviation from Test Standard	39
4.5.6 EUT Operating Condition	39

4.5.7 Test Results	40
4.6 Conducted Out of Band Emission Measurement	42
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	42
4.6.2 Test Setup.....	42
4.6.3 Test Instruments	42
4.6.4 Test Procedure	42
4.6.5 Deviation from Test Standard	42
4.6.6 EUT Operating Condition	42
4.6.7 Test Results	43
5 Pictures of Test Arrangements.....	45
Appendix – Information on the Testing Laboratories	46

Release Control Record

Issue No.	Description	Date Issued
RF180802E10-1	Original release.	Aug. 30, 2018

1 Certificate of Conformity

Product: Wireless Transceiver

Brand: Logitech

Test Model: C-U0018

Sample Status: ENGINEERING SAMPLE

Applicant: LOGITECH FAR EAST LTD.

Test Date: Aug. 07 to 09, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Mary Ko , **Date:** Aug. 30, 2018
Mary Ko / Specialist

Approved by : May Chen , **Date:** Aug. 30, 2018
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.48dB at 0.20469MHz.
15.205 & 209 & 15.247(d)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -4.1dB at 7320.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.33 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.10 dB
	6GHz ~ 18GHz	4.85 dB
	18GHz ~ 40GHz	5.24 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless Transceiver
Brand	Logitech
Test Model	C-U0018
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 5V from host equipment
Modulation Type	GFSK
Modulation Technology	DTS
Transfer Rate	Up to 2Mbps
Operating Frequency	LE 1M (BT 4.0): 2402MHz ~ 2480MHz LE 2M (BT 5.0): 2404MHz ~ 2478MHz
Number of Channel	LE 1M (BT 4.0): 40 LE 2M (BT 5.0): 38
Output Power	LE 1M (BT 4.0): 2.547mW LE 2M (BT 5.0): 2.541mW
Antenna Type	Refer to Note
Antenna Connector	NA
Accessory Device	USB stand x 1
Data Cable Supplied	USB to Micro USB cable x 1 (shielded, 1.8m with one core)

Note:

1. The EUT may have a lot of colors for marketing requirement.
2. The antenna provided to the EUT, please refer to the following table:

Antenna Gain (dBi)	Frequency range (GHz)	Antenna Type	Connector Type
7.07	2.4~2.4835	Printed	None

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

Technology LE 1M (BT 4.0)

40 channels are provided for BT-LE mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Technology LE 2M (BT 5.0)

38 channels are provided for BT-LE mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460		
10	2422	20	2442	30	2462		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane (below 1GHz) & Z-plane (above 1GHz)**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1
1 to 38	1, 19, 38	GFSK	2

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0	GFSK	1
1 to 38	1	GFSK	2

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0	GFSK	1
1 to 38	1	GFSK	2

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1
1 to 38	1, 19, 38	GFSK	2

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (system)	TESTED BY
RE $\geq$ 1G	22deg. C, 64%RH	120Vac, 60Hz	Robert Cheng
RE<1G	21deg. C, 65%RH	120Vac, 60Hz	Frank Chuang
PLC	25deg. C, 75%RH	120Vac, 60Hz	Frank Chuang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
B.	Micro USB to USB Type A Converter	Logitech	NA	NA	NA	Supplied by client

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Cable	1	1.8	Yes	1	Supplied by client

3.3.1 Configuration of System under Test

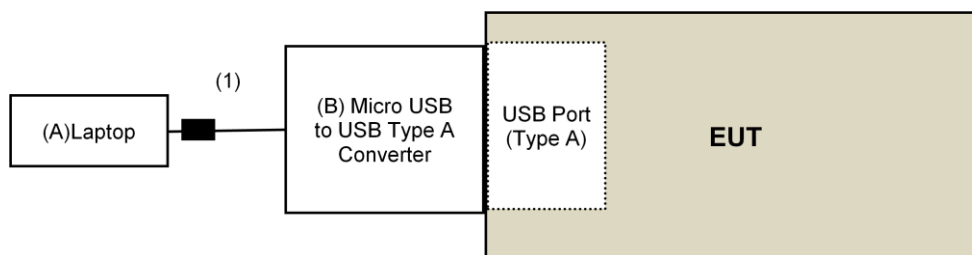


3.4 Duty Cycle of Test Signal

Technology LE 1M (BT 4.0)

Duty cycle of test signal is < 98 %, duty factor shall be considered.


Duty cycle = $0.311 \text{ ms} / 0.978 \text{ ms} = 0.318$, Duty factor = $10 * \log(1/0.318) = 4.98$

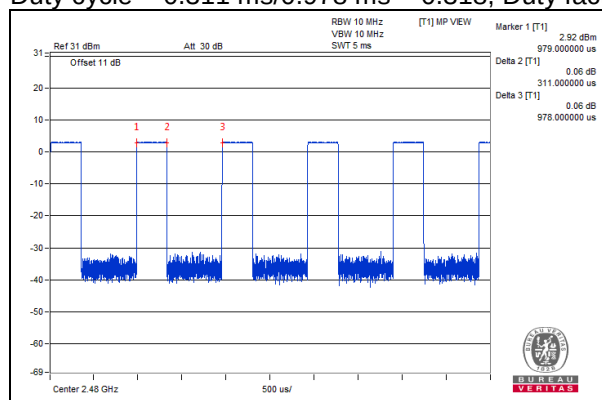

Technology LE 2M (BT 5.0)

Duty cycle of test signal is < 98 %, duty factor shall be considered.

Duty cycle = $0.173 \text{ ms} / 0.979 \text{ ms} = 0.177$, Duty factor = $10 * \log(1/0.177) = 7.53$

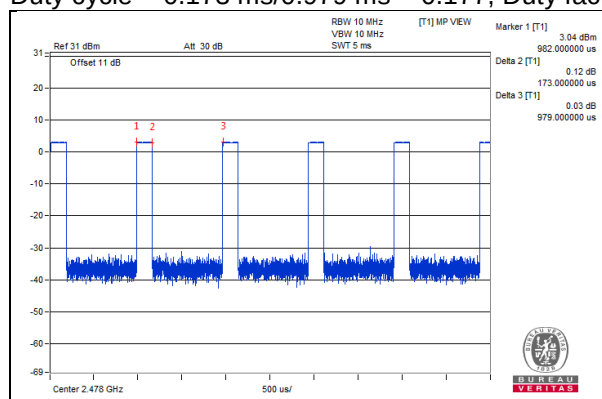

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v05
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 05, 2018	July 04, 2019
Pre-Amplifier EMCI	EMC001340	980142	Feb. 09, 2018	Feb. 08, 2019
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001	Jan. 15, 2018	Jan. 14, 2019
RF Cable	NA	LOOPCAB-002	Jan. 15, 2018	Jan. 14, 2019
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 09, 2017	Nov. 08, 2018
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 29, 2017	Nov. 28, 2018
RF Cable	8D	966-4-1	Mar. 21, 2018	Mar. 20, 2019
RF Cable	8D	966-4-2	Mar. 21, 2018	Mar. 20, 2019
RF Cable	8D	966-4-3	Mar. 21, 2018	Mar. 20, 2019
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 03, 2017	Oct. 02, 2018
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 12, 2017	Dec. 11, 2018
Pre-Amplifier EMCI	EMC12630SE	980385	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-1200	160923	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-2000	150318	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM-SM-5000	150321	Jan. 29, 2018	Jan. 28, 2019
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 29, 2018	Jan. 28, 2019
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 14, 2017	Dec. 13, 2018
RF Cable	EMC102-KM-KM-1200	160925	Jan. 29, 2018	Jan. 28, 2019
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Spectrum Analyzer R&S	FSv40	100964	June 20, 2018	June 19, 2019
Power meter Anritsu	ML2495A	1014008	May 09, 2018	May 08, 2019
Power sensor Anritsu	MA2411B	0917122	May 09, 2018	May 08, 2019

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The CANADA Site Registration No. is 20331-2
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: Aug. 07 to 09, 2018

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

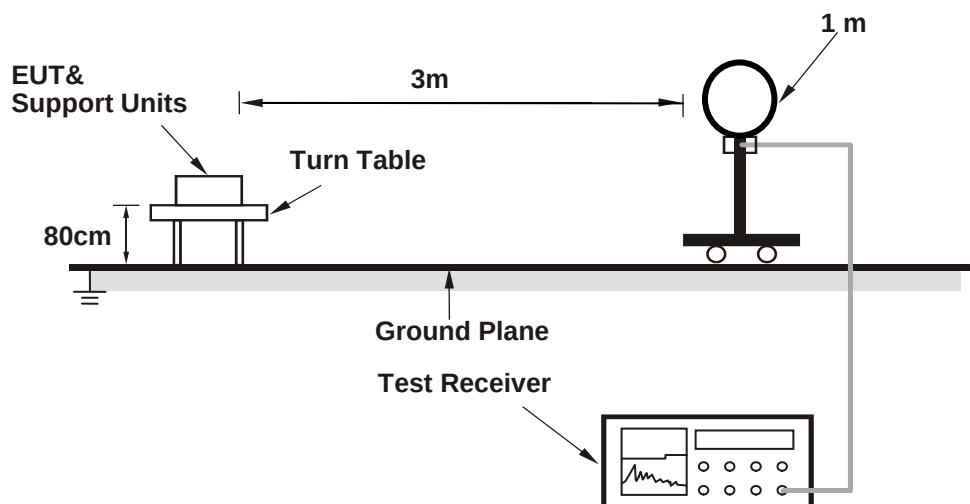

For Radiated emission 30MHz to 1GHz

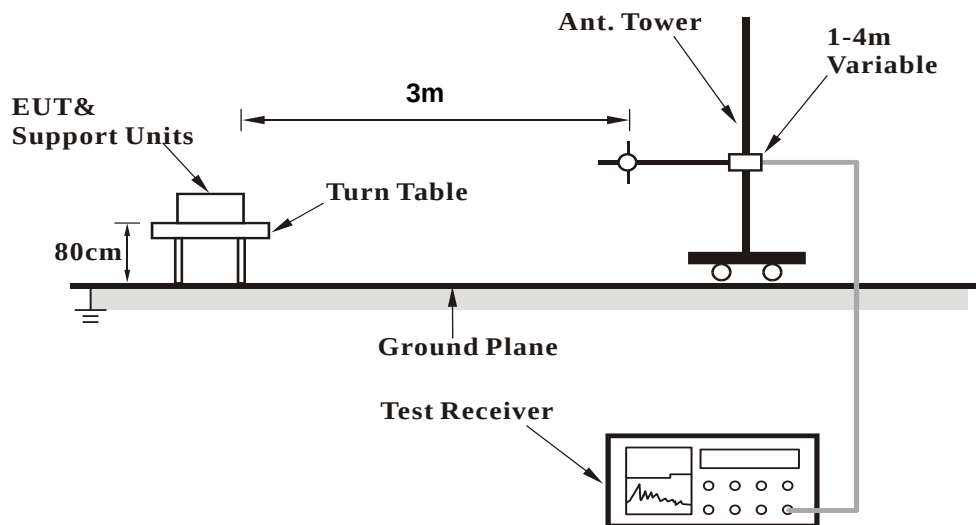

For Radiated emission above 1GHz

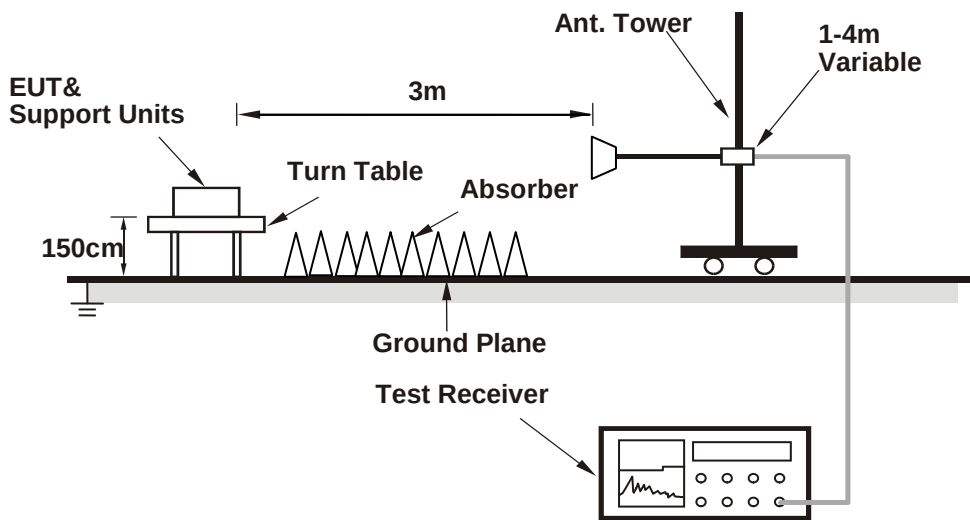

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Controlling command (Press "Num_Lock" key, then "Notepad") has been activated to set the EUT on specific status.

4.1.7 Test Results

Technology LE 1M (BT 4.0)

Above 1GHz Data :

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2338.00	58.2 PK	74.0	-15.8	1.45 H	107	60.1	-1.9
2	2338.00	43.8 AV	54.0	-10.2	1.45 H	107	45.7	-1.9
3	*2402.00	104.8 PK			1.45 H	107	107.1	-2.3
4	*2402.00	104.2 AV			1.45 H	107	106.5	-2.3
5	4804.00	43.1 PK	74.0	-30.9	1.61 H	107	41.3	1.8
6	4804.00	31.5 AV	54.0	-22.5	1.61 H	107	29.7	1.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2338.00	57.7 PK	74.0	-16.3	2.50 V	79	59.6	-1.9
2	2338.00	43.5 AV	54.0	-10.5	2.50 V	79	45.4	-1.9
3	*2402.00	104.1 PK			2.50 V	79	106.4	-2.3
4	*2402.00	103.5 AV			2.50 V	79	105.8	-2.3
5	4804.00	43.4 PK	74.0	-30.6	1.98 V	97	41.6	1.8
6	4804.00	31.8 AV	54.0	-22.2	1.98 V	97	30.0	1.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2376.00	58.1 PK	74.0	-15.9	1.49 H	109	60.2	-2.1
2	2376.00	43.4 AV	54.0	-10.6	1.49 H	109	45.5	-2.1
3	*2440.00	104.5 PK			1.49 H	109	107.1	-2.6
4	*2440.00	103.9 AV			1.49 H	109	106.5	-2.6
5	2494.90	58.3 PK	74.0	-15.7	1.49 H	109	60.7	-2.4
6	2494.90	43.6 AV	54.0	-10.4	1.49 H	109	46.0	-2.4
7	4880.00	42.7 PK	74.0	-31.3	1.67 H	110	40.7	2.0
8	4880.00	31.2 AV	54.0	-22.8	1.67 H	110	29.2	2.0
9	7320.00	51.7 PK	74.0	-22.3	2.48 H	162	43.3	8.4
10	7320.00	44.9 AV	54.0	-9.1	2.48 H	162	36.5	8.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2376.00	57.8 PK	74.0	-16.2	2.52 V	71	59.9	-2.1
2	2376.00	43.2 AV	54.0	-10.8	2.52 V	71	45.3	-2.1
3	*2440.00	104.0 PK			2.52 V	71	106.6	-2.6
4	*2440.00	103.3 AV			2.52 V	71	105.9	-2.6
5	2494.90	58.0 PK	74.0	-16.0	2.52 V	71	60.4	-2.4
6	2494.90	43.1 AV	54.0	-10.9	2.52 V	71	45.5	-2.4
7	4880.00	43.8 PK	74.0	-30.2	2.06 V	111	41.8	2.0
8	4880.00	31.7 AV	54.0	-22.3	2.06 V	111	29.7	2.0
9	7320.00	55.8 PK	74.0	-18.2	1.26 V	111	47.4	8.4
10	7320.00	49.9 AV	54.0	-4.1	1.26 V	111	41.5	8.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	104.4 PK			1.51 H	95	107.0	-2.6
2	*2480.00	103.8 AV			1.51 H	95	106.4	-2.6
3	2483.50	53.6 PK	74.0	-20.4	1.51 H	95	56.0	-2.4
4	2483.50	42.9 AV	54.0	-11.1	1.51 H	95	45.3	-2.4
5	4960.00	42.9 PK	74.0	-31.1	1.65 H	100	40.8	2.1
6	4960.00	31.3 AV	54.0	-22.7	1.65 H	100	29.2	2.1
7	7440.00	51.5 PK	74.0	-22.5	2.46 H	152	42.7	8.8
8	7440.00	44.6 AV	54.0	-9.4	2.46 H	152	35.8	8.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	103.8 PK			2.46 V	73	106.4	-2.6
2	*2480.00	103.1 AV			2.46 V	73	105.7	-2.6
3	2483.50	53.4 PK	74.0	-20.6	2.46 V	73	55.8	-2.4
4	2483.50	42.6 AV	54.0	-11.4	2.46 V	73	45.0	-2.4
5	4960.00	43.2 PK	74.0	-30.8	2.00 V	100	41.1	2.1
6	4960.00	31.3 AV	54.0	-22.7	2.00 V	100	29.2	2.1
7	7440.00	55.4 PK	74.0	-18.6	1.22 V	108	46.6	8.8
8	7440.00	49.5 AV	54.0	-4.5	1.22 V	108	40.7	8.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.99	34.3 QP	40.0	-5.7	1.50 H	260	42.5	-8.2
2	105.01	30.2 QP	43.5	-13.3	1.50 H	254	41.7	-11.5
3	166.02	32.4 QP	43.5	-11.1	1.50 H	304	40.4	-8.0
4	229.84	38.7 QP	46.0	-7.3	1.00 H	103	49.3	-10.6
5	333.17	24.2 QP	46.0	-21.8	1.00 H	261	30.3	-6.1
6	601.45	28.2 QP	46.0	-17.8	1.50 H	360	27.4	0.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	77.60	31.9 QP	40.0	-8.1	2.00 V	360	43.7	-11.8
2	166.60	31.2 QP	43.5	-12.3	1.00 V	274	39.2	-8.0
3	233.51	35.9 QP	46.0	-10.1	1.00 V	138	45.9	-10.0
4	258.05	33.6 QP	46.0	-12.4	1.00 V	273	42.2	-8.6
5	285.69	34.1 QP	46.0	-11.9	2.00 V	336	41.6	-7.5
6	498.12	29.1 QP	46.0	-16.9	2.00 V	221	30.9	-1.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

Technology LE 2M (BT 5.0)
Above 1GHz Data :

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2340.00	58.5 PK	74.0	-15.5	1.55 H	92	60.4	-1.9
2	2340.00	44.3 AV	54.0	-9.7	1.55 H	92	46.2	-1.9
3	*2404.00	104.8 PK			1.55 H	92	107.1	-2.3
4	*2404.00	103.9 AV			1.55 H	92	106.2	-2.3
5	4808.00	42.6 PK	74.0	-31.4	1.67 H	108	40.8	1.8
6	4808.00	31.1 AV	54.0	-22.9	1.67 H	108	29.3	1.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2340.00	58.1 PK	74.0	-15.9	2.51 V	59	60.0	-1.9
2	2340.00	43.7 AV	54.0	-10.3	2.51 V	59	45.6	-1.9
3	*2404.00	103.9 PK			2.51 V	59	106.2	-2.3
4	*2404.00	103.5 AV			2.51 V	59	105.8	-2.3
5	4808.00	43.1 PK	74.0	-30.9	2.00 V	97	41.3	1.8
6	4808.00	31.0 AV	54.0	-23.0	2.00 V	97	29.2	1.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2376.00	58.2 PK	74.0	-15.8	1.48 H	85	60.3	-2.1
2	2376.00	43.4 AV	54.0	-10.6	1.48 H	85	45.5	-2.1
3	*2440.00	105.2 PK			1.48 H	85	107.8	-2.6
4	*2440.00	104.3 AV			1.48 H	85	106.9	-2.6
5	2494.90	58.2 PK	74.0	-15.8	1.48 H	85	60.6	-2.4
6	2494.90	43.6 AV	54.0	-10.4	1.48 H	85	46.0	-2.4
7	4880.00	43.1 PK	74.0	-30.9	1.61 H	104	41.1	2.0
8	4880.00	31.6 AV	54.0	-22.4	1.61 H	104	29.6	2.0
9	7320.00	51.6 PK	74.0	-22.4	2.48 H	147	43.2	8.4
10	7320.00	44.6 AV	54.0	-9.4	2.48 H	147	36.2	8.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2376.00	57.6 PK	74.0	-16.4	2.43 V	71	59.7	-2.1
2	2376.00	42.6 AV	54.0	-11.4	2.43 V	71	44.7	-2.1
3	*2440.00	103.9 PK			2.43 V	71	106.5	-2.6
4	*2440.00	102.9 AV			2.43 V	71	105.5	-2.6
5	2494.90	58.0 PK	74.0	-16.0	2.43 V	71	60.4	-2.4
6	2494.90	42.8 AV	54.0	-11.2	2.43 V	71	45.2	-2.4
7	4880.00	43.2 PK	74.0	-30.8	2.05 V	98	41.2	2.0
8	4880.00	31.4 AV	54.0	-22.6	2.05 V	98	29.4	2.0
9	7320.00	55.2 PK	74.0	-18.8	1.22 V	110	46.8	8.4
10	7320.00	49.0 AV	54.0	-5.0	1.22 V	110	40.6	8.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2478.00	104.9 PK			1.53 H	102	107.5	-2.6
2	*2478.00	104.2 AV			1.53 H	102	106.8	-2.6
3	2483.50	53.8 PK	74.0	-20.2	1.53 H	102	56.2	-2.4
4	2483.50	42.8 AV	54.0	-11.2	1.53 H	102	45.2	-2.4
5	4956.00	43.1 PK	74.0	-30.9	1.61 H	104	41.0	2.1
6	4956.00	31.4 AV	54.0	-22.6	1.61 H	104	29.3	2.1
7	7434.00	51.8 PK	74.0	-22.2	2.42 H	155	43.0	8.8
8	7434.00	44.8 AV	54.0	-9.2	2.42 H	155	36.0	8.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2478.00	103.2 PK			2.44 V	69	105.8	-2.6
2	*2478.00	102.6 AV			2.44 V	69	105.2	-2.6
3	2483.50	53.2 PK	74.0	-20.8	2.44 V	69	55.6	-2.4
4	2483.50	42.5 AV	54.0	-11.5	2.44 V	69	44.9	-2.4
5	4956.00	43.5 PK	74.0	-30.5	2.04 V	94	41.4	2.1
6	4956.00	31.4 AV	54.0	-22.6	2.04 V	94	29.3	2.1
7	7434.00	55.3 PK	74.0	-18.7	1.19 V	111	46.5	8.8
8	7434.00	49.4 AV	54.0	-4.6	1.19 V	111	40.6	8.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.99	34.4 QP	40.0	-5.6	1.50 H	266	42.6	-8.2
2	72.90	26.9 QP	40.0	-13.1	1.50 H	78	37.5	-10.6
3	119.99	27.3 QP	43.5	-16.2	1.50 H	277	37.0	-9.7
4	166.02	32.2 QP	43.5	-11.3	1.50 H	314	40.2	-8.0
5	218.64	33.5 QP	46.0	-12.5	1.50 H	314	44.7	-11.2
6	265.37	31.2 QP	46.0	-14.8	1.50 H	145	39.6	-8.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	77.63	30.3 QP	40.0	-9.7	1.50 V	0	42.1	-11.8
2	166.62	30.9 QP	43.5	-12.6	1.00 V	268	39.0	-8.1
3	233.46	36.1 QP	46.0	-9.9	1.00 V	5	46.1	-10.0
4	258.05	34.1 QP	46.0	-11.9	1.00 V	255	42.7	-8.6
5	282.64	32.1 QP	46.0	-13.9	1.00 V	129	39.6	-7.5
6	430.25	27.9 QP	46.0	-18.1	1.00 V	144	31.0	-3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Nov. 01, 2017	Oct. 31, 2018
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Nov. 15, 2017	Nov. 14, 2018
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 04, 2018	June 03, 2019
50 ohms Terminator	N/A	EMC-02	Sep. 22, 2017	Sep. 21, 2018
RF Cable	5D-FB	COCCAB-001	Sep. 29, 2017	Sep. 28, 2018
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 16, 2018	Mar. 15, 2019
Software BVADT	BVADT_Conc_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: Aug. 09, 2018

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

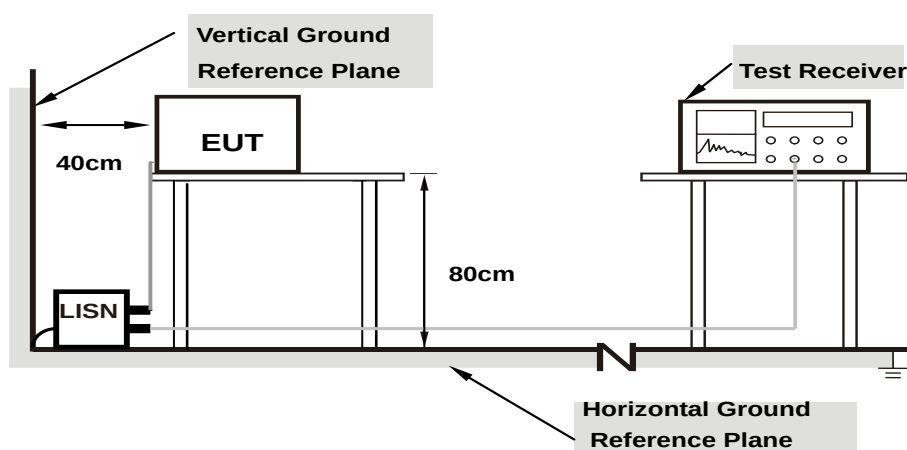

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


Technology LE 1M (BT 4.0)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.03	35.43	23.66	45.46	33.69	66.00	56.00	-20.54	-22.31
2	0.18906	10.05	34.83	17.72	44.88	27.77	64.08	54.08	-19.20	-26.31
3	0.58359	10.12	19.04	11.23	29.16	21.35	56.00	46.00	-26.84	-24.65
4	0.80234	10.14	19.41	7.32	29.55	17.46	56.00	46.00	-26.45	-28.54
5	2.59375	10.21	16.36	10.21	26.57	20.42	56.00	46.00	-29.43	-25.58
6	9.33203	10.51	13.95	8.98	24.46	19.49	60.00	50.00	-35.54	-30.51

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

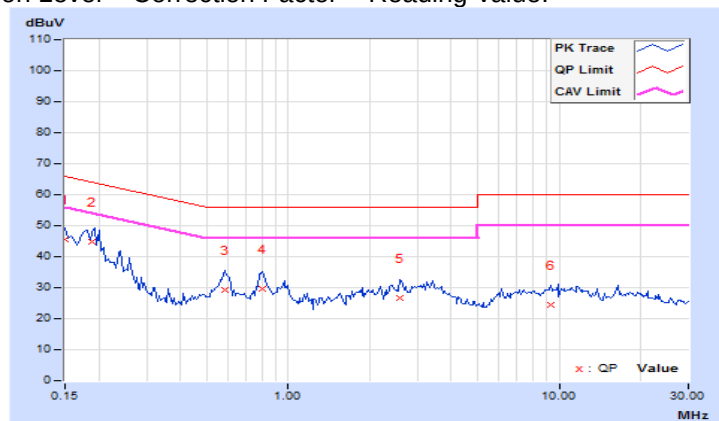


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.94	41.97	22.62	51.91	32.56	66.00	56.00	-14.09	-23.44
2	0.21250	9.96	38.06	15.84	48.02	25.80	63.11	53.11	-15.09	-27.31
3	0.59922	10.01	19.04	9.92	29.05	19.93	56.00	46.00	-26.95	-26.07
4	0.79453	10.02	17.05	7.77	27.07	17.79	56.00	46.00	-28.93	-28.21
5	3.34375	10.12	20.09	13.39	30.21	23.51	56.00	46.00	-25.79	-22.49
6	6.90234	10.26	16.16	10.55	26.42	20.81	60.00	50.00	-33.58	-29.19

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

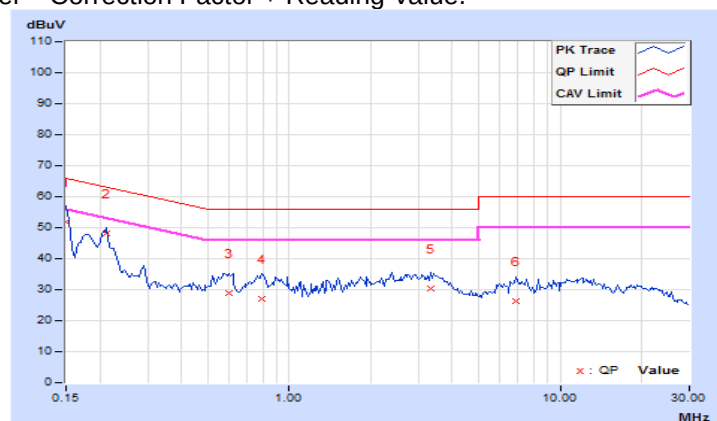


Technology LE 2M (BT 5.0)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18906	10.05	39.02	26.38	49.07	36.43	64.08	54.08	-15.01	-17.65
2	0.26328	10.08	29.05	22.84	39.13	32.92	61.33	51.33	-22.20	-18.41
3	0.57578	10.12	20.84	9.49	30.96	19.61	56.00	46.00	-25.04	-26.39
4	0.79453	10.14	20.62	8.87	30.76	19.01	56.00	46.00	-25.24	-26.99
5	1.98047	10.19	15.04	10.48	25.23	20.67	56.00	46.00	-30.77	-25.33
6	6.99219	10.40	14.38	9.38	24.78	19.78	60.00	50.00	-35.22	-30.22

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

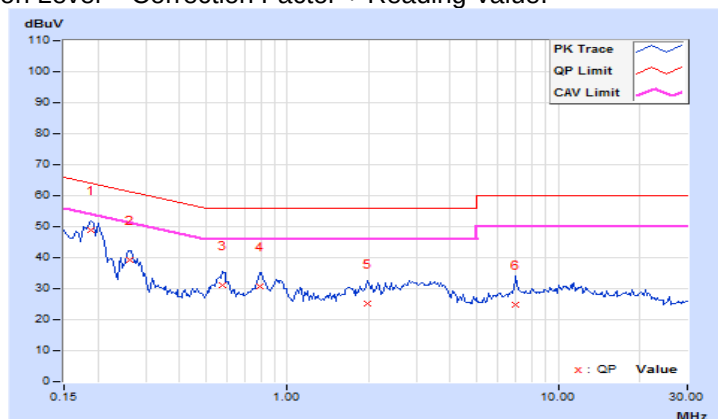


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.95	36.30	24.14	46.25	34.09	65.38	55.38	-19.13	-21.29
2	0.20469	9.96	40.18	34.98	50.14	44.94	63.42	53.42	-13.28	-8.48
3	0.28672	9.98	30.11	10.75	40.09	20.73	60.62	50.62	-20.53	-29.89
4	0.56797	10.01	20.19	8.10	30.20	18.11	56.00	46.00	-25.80	-27.89
5	0.80234	10.02	20.76	9.81	30.78	19.83	56.00	46.00	-25.22	-26.17
6	2.93750	10.10	18.83	13.20	28.93	23.30	56.00	46.00	-27.07	-22.70

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

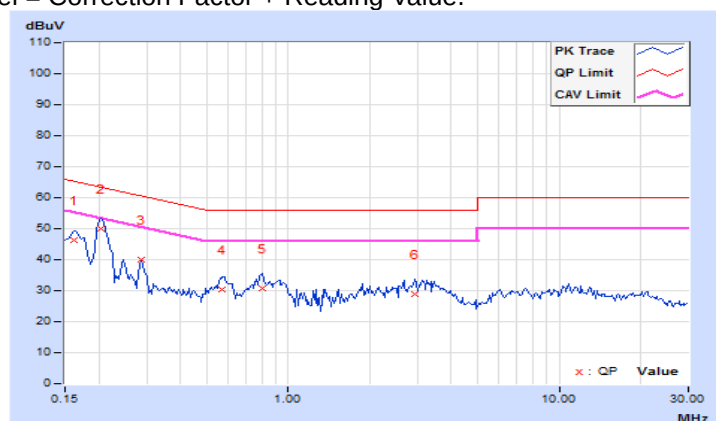


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.


4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Technology LE 1M (BT 4.0)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.70	0.5	Pass
19	2440	0.69	0.5	Pass
39	2480	0.69	0.5	Pass

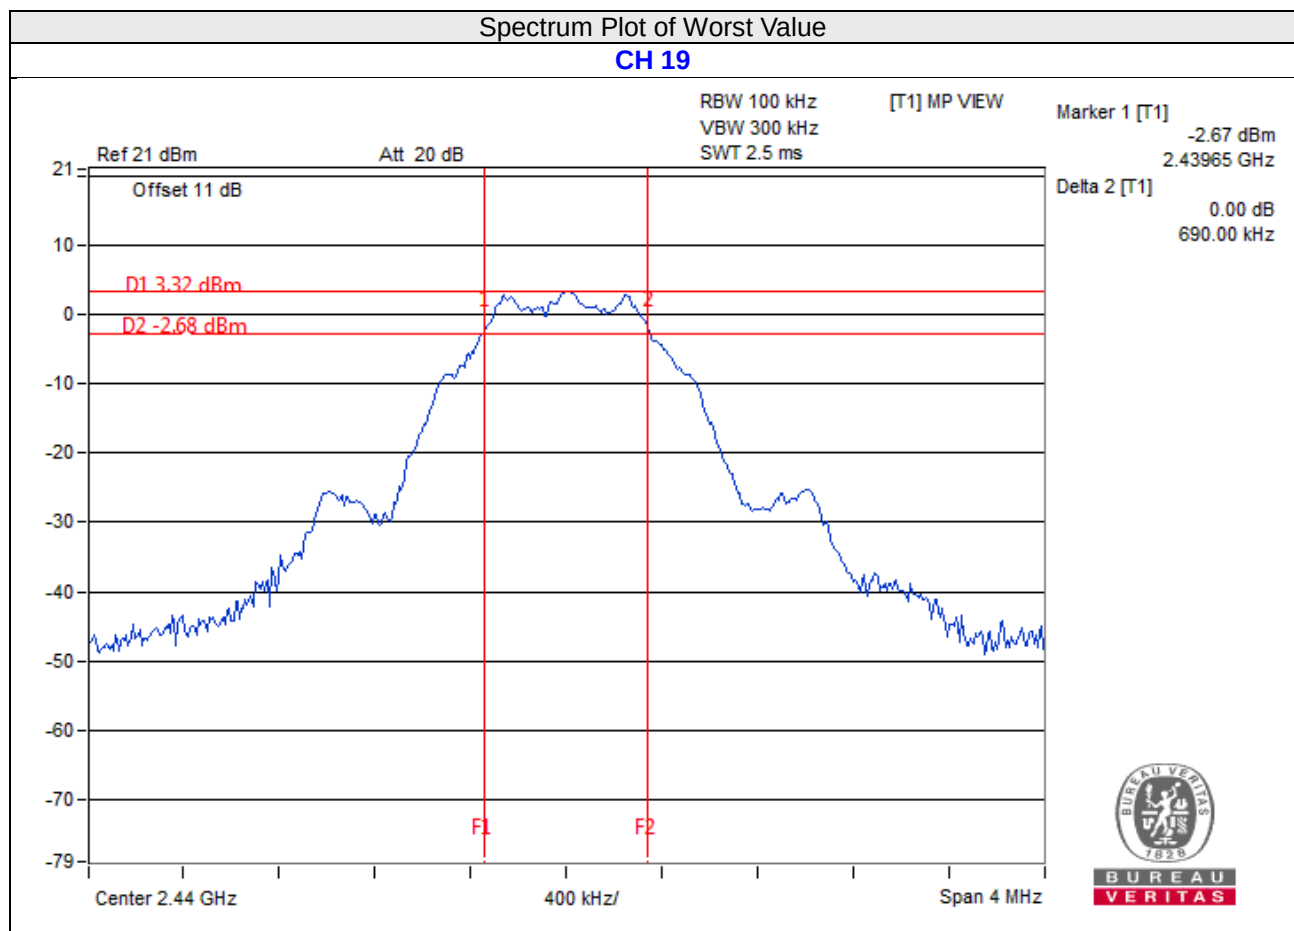


Technology LE 2M (BT 5.0)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2404	1.14	0.5	Pass
19	2440	1.09	0.5	Pass
38	2478	1.13	0.5	Pass

Spectrum Plot of Worst Value

CH 19

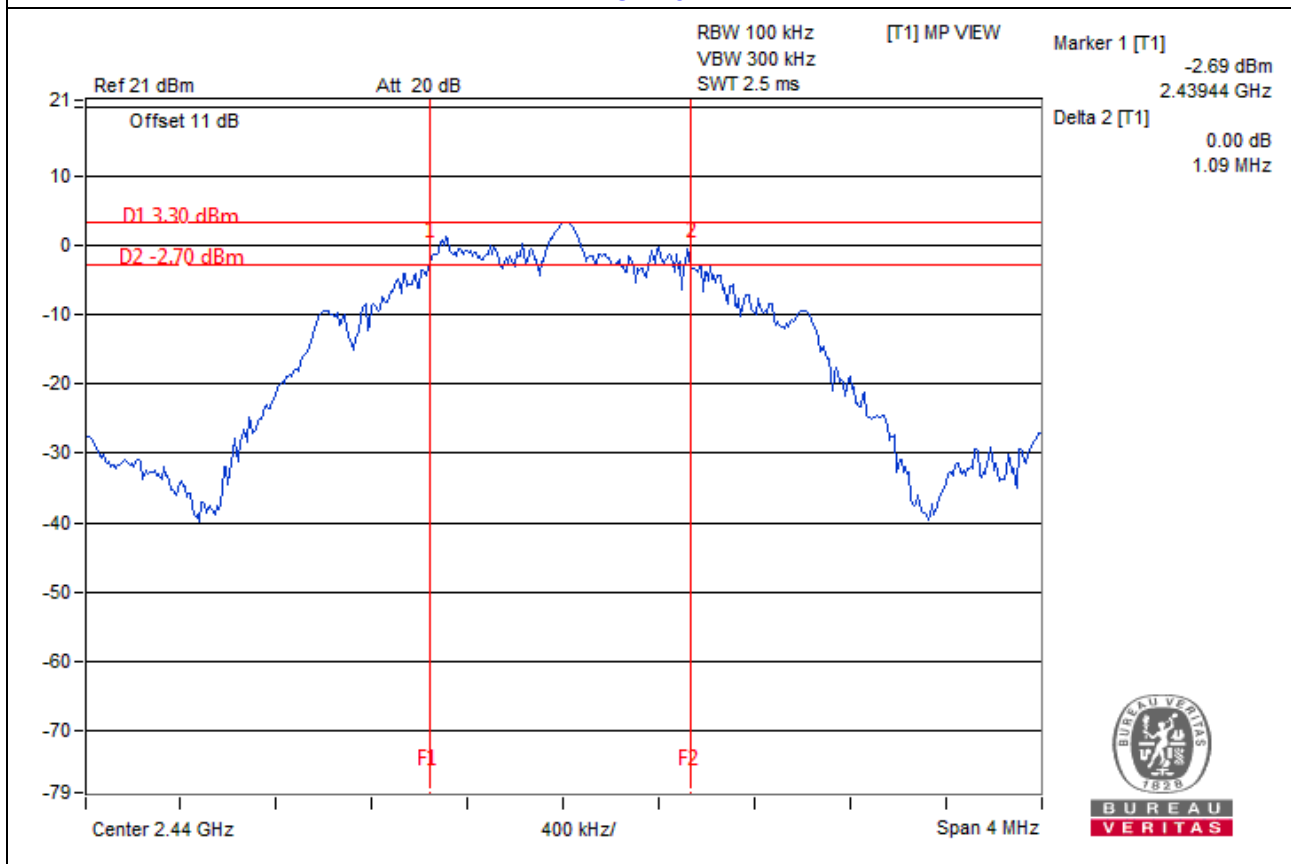


4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup

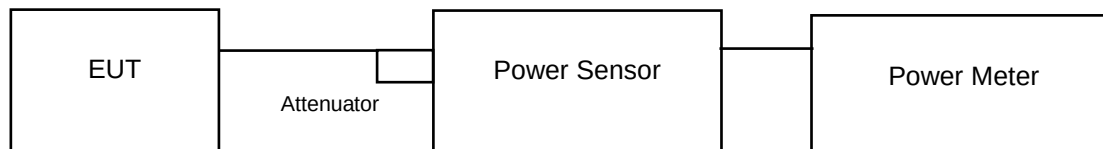

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

Technology LE 1M (BT 4.0)

FOR PEAK POWER

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	2.547	4.06	28.93	Pass
19	2440	2.477	3.94	28.93	Pass
39	2480	2.344	3.70	28.93	Pass

Note: 1. Max. gain = 7.07dBi > 6dBi, so the power limit shall be reduced to $30 - (7.07 - 6) = 28.93\text{dBm}$.

FOR AVERAGE POWER

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	2.472	3.93
19	2440	2.404	3.81
39	2480	2.265	3.55

Technology LE 2M (BT 5.0)

FOR PEAK POWER

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2404	2.541	4.05	28.93	Pass
19	2440	2.472	3.93	28.93	Pass
38	2478	2.355	3.72	28.93	Pass

Note: 1. Max. gain = 7.07dBi > 6dBi, so the power density limit shall be reduced to $30 - (7.07 - 6) = 28.93\text{dBm}$.

FOR AVERAGE POWER


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2404	2.466	3.92
19	2440	2.399	3.80
38	2478	2.27	3.56

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition


Same as Item 4.3.6

4.5.7 Test Results

Technology LE 1M (BT 4.0)

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	2402	0.81	6.93	Pass
19	2440	0.25	6.93	Pass
39	2480	0.05	6.93	Pass


Note: 1. Max. gain = 7.07dBi > 6dBi, so the power density limit shall be reduced to $8 - (7.07 - 6) = 6.93$ dBm.

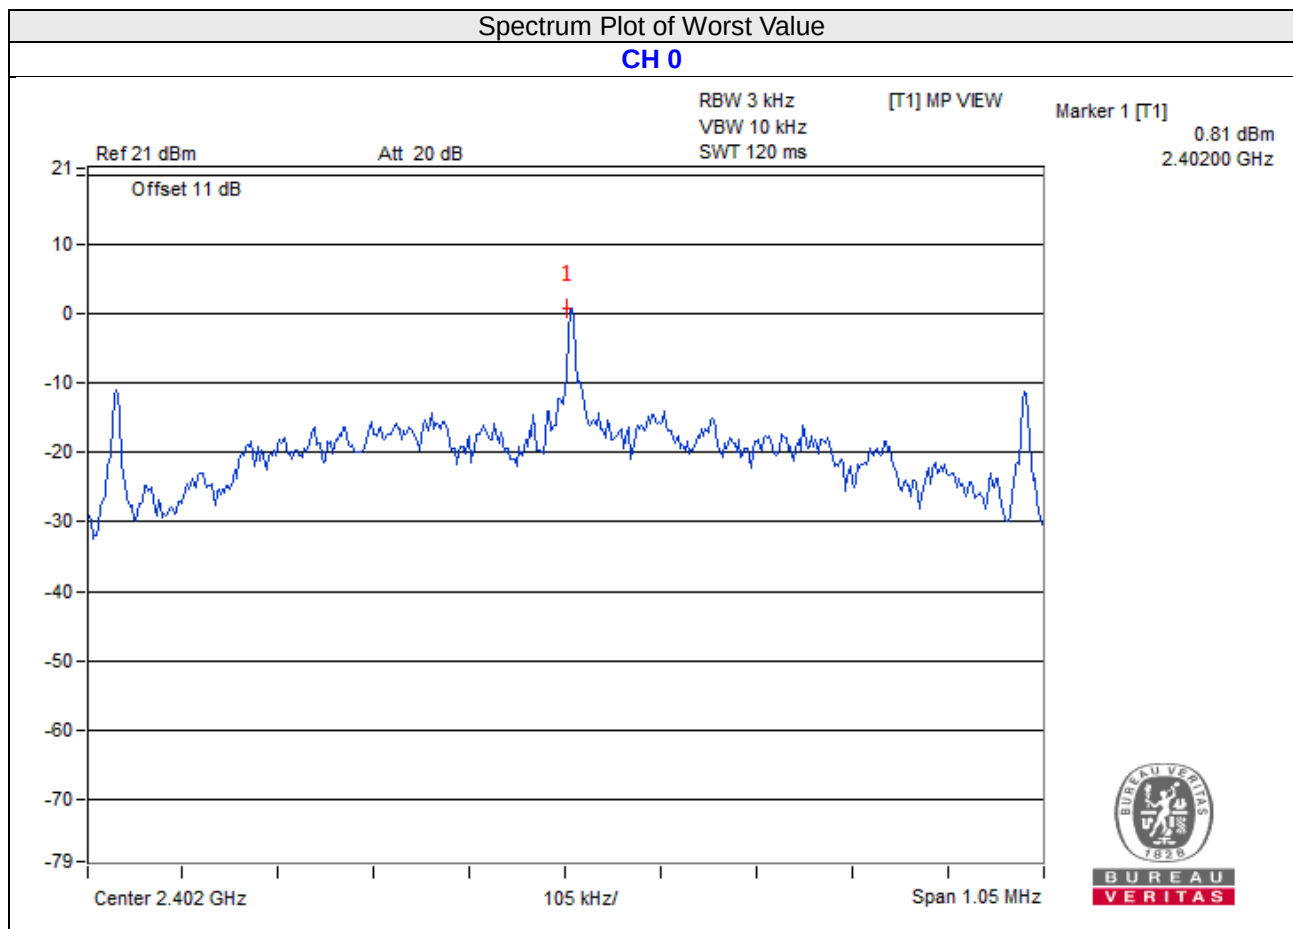

Technology LE 2M (BT 5.0)

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2404	-3.37	6.93	Pass
19	2440	-3.48	6.93	Pass
38	2478	-4.08	6.93	Pass

Note: 1. Max. gain = 7.07dBi > 6dBi, so the power density limit shall be reduced to $8 - (7.07 - 6) = 6.93$ dBm.

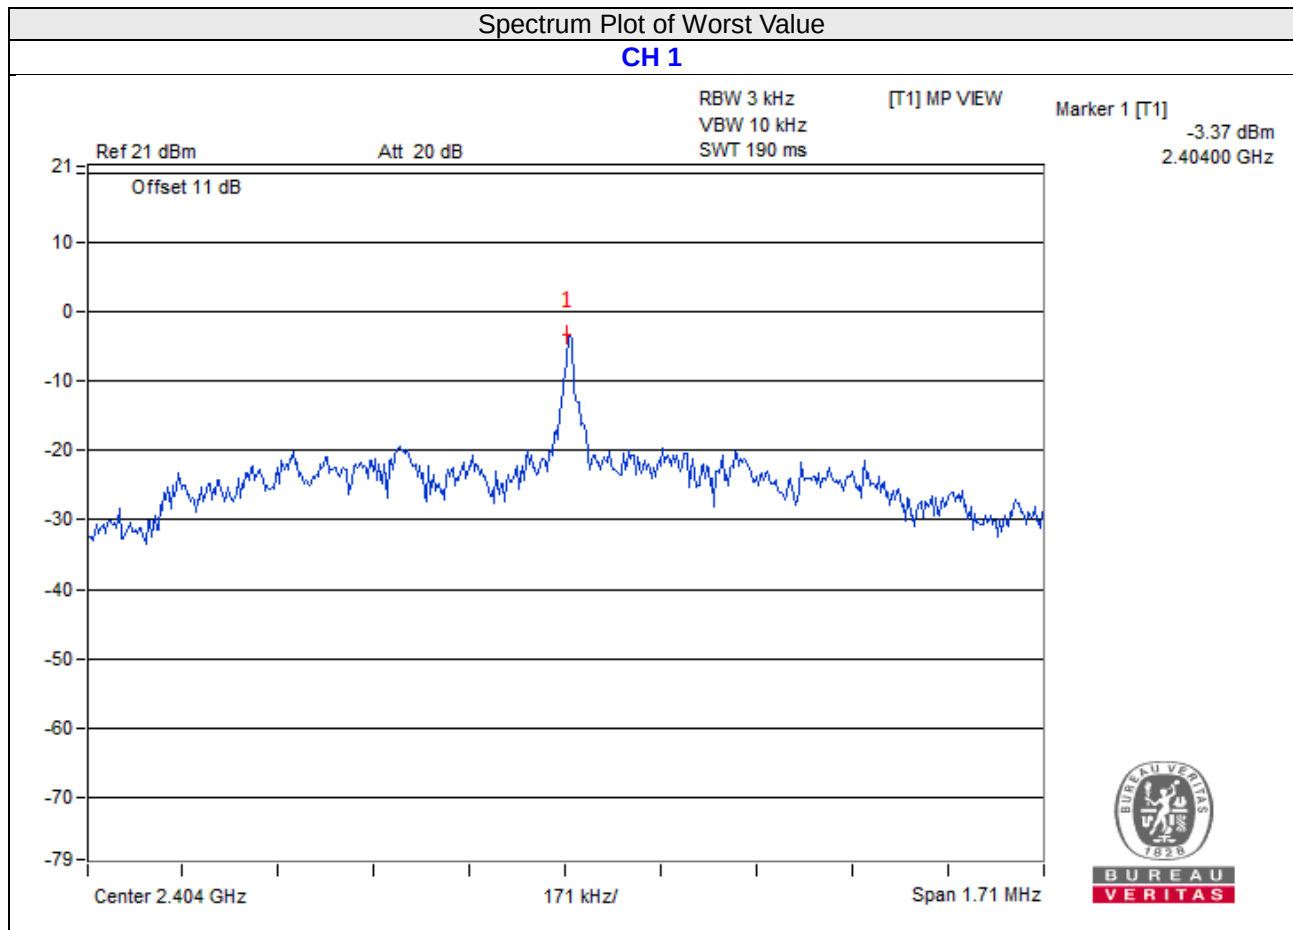


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard


No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6



4.6.7 Test Results

Technology LE 1M (BT 4.0)


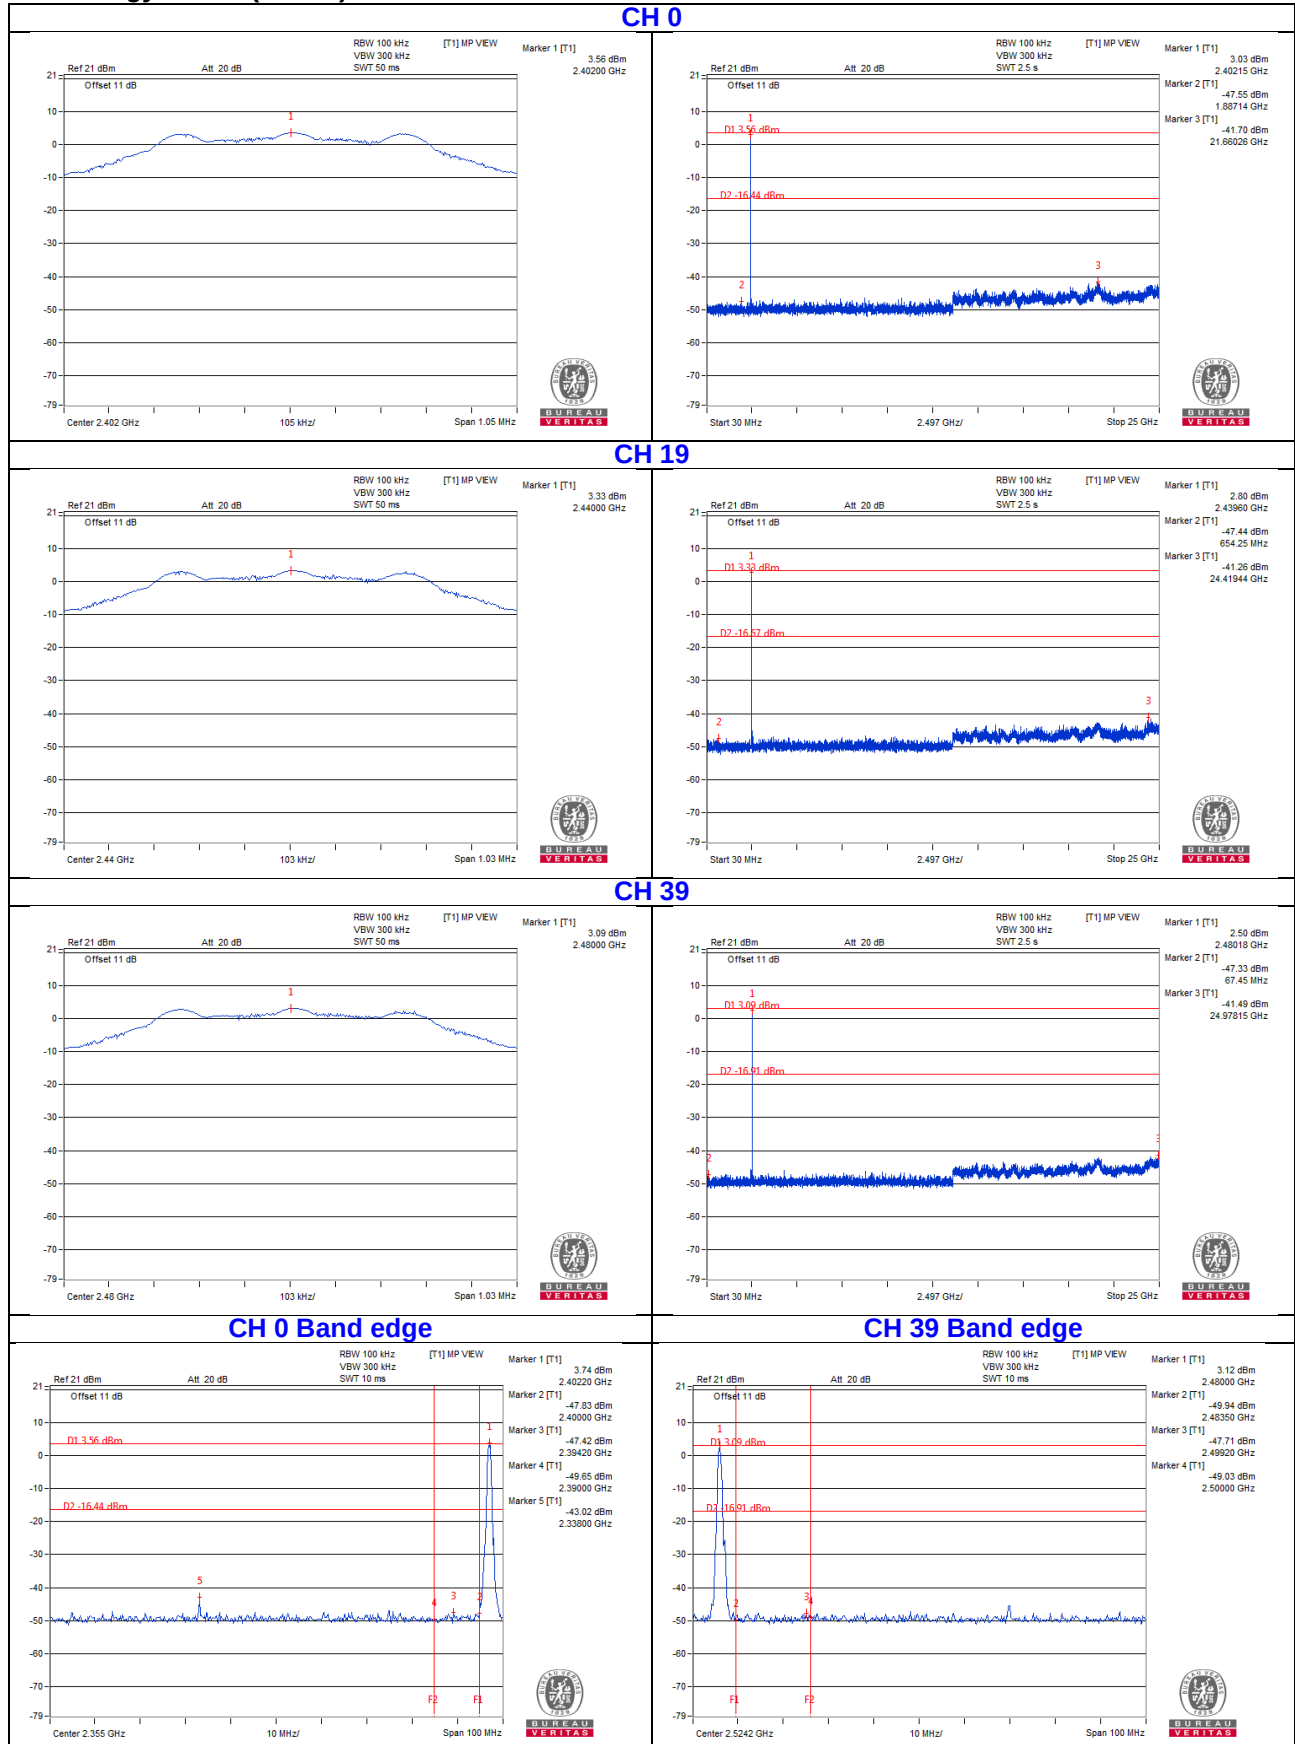


Technology LE 2M (BT 5.0)



CH 1

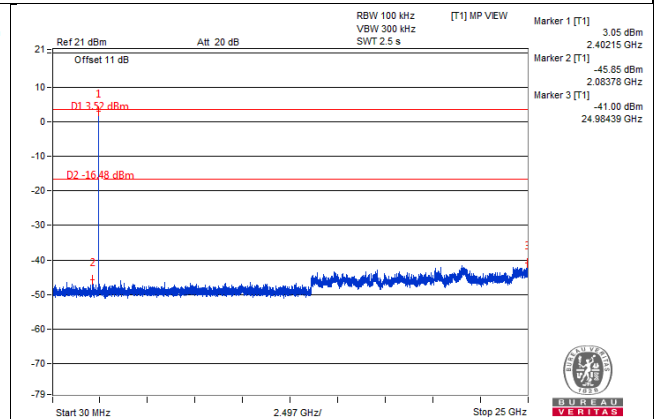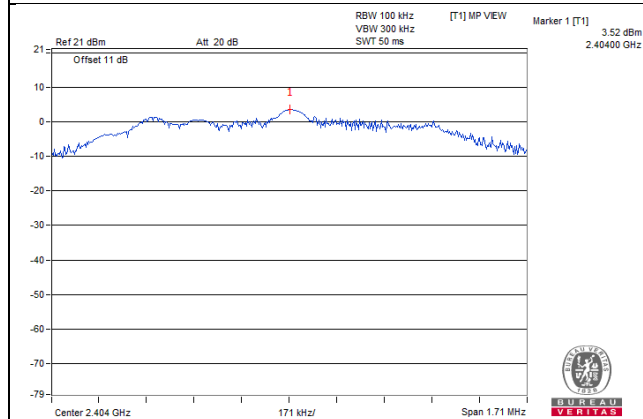


CH 19

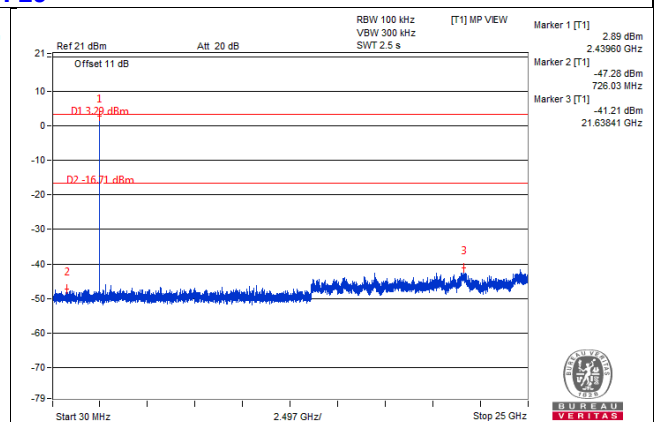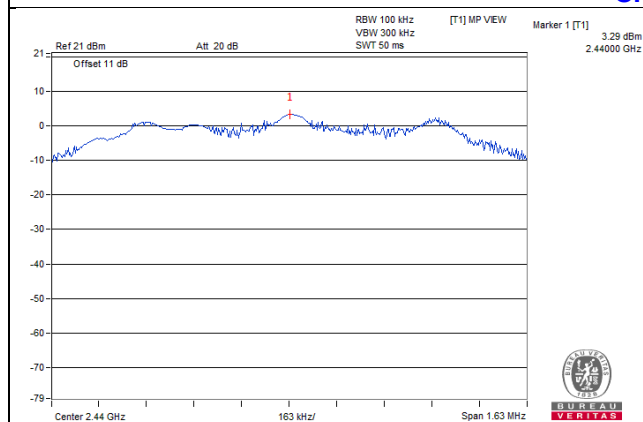


CH 38

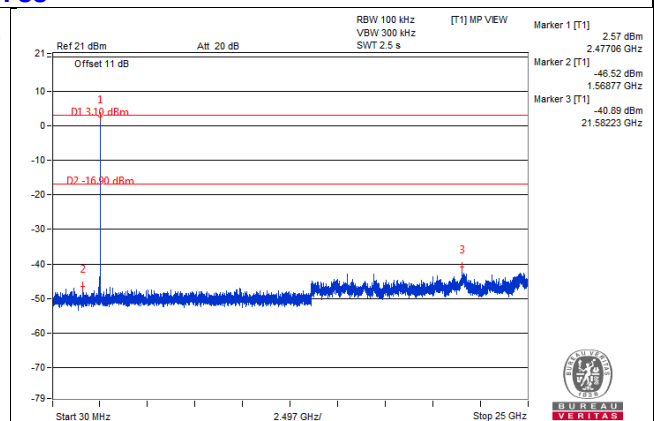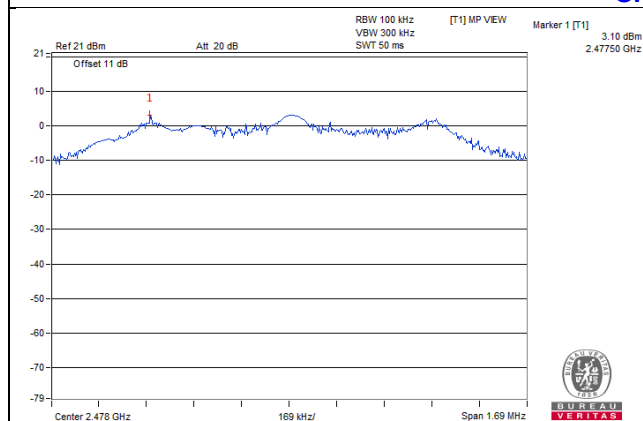

CH 1 Band edge

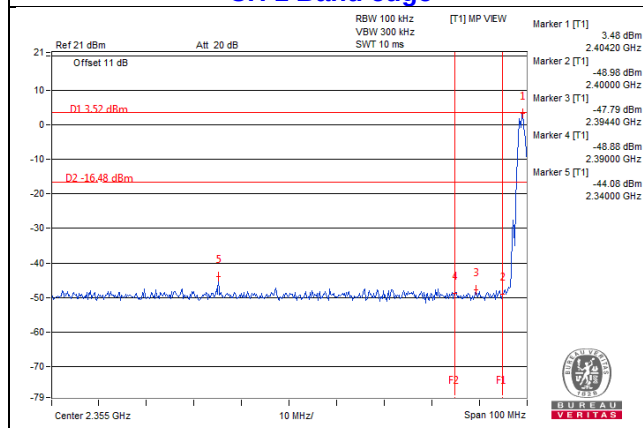

CH 38 Band edge

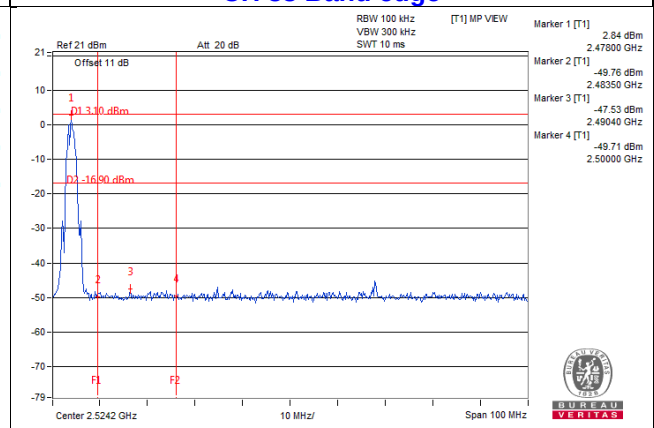

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linkou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---