



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Transmitter Certification

of

FCC ID: K6610443240

Model: VXR-9000V

to

Federal Communications Commission

Rule Part(s) 2, 22, 74, 90, 90.210, Confidentiality

Date of report: January 28, 2004

On the Behalf of the Applicant:

Vertex Standard Co., Ltd.

At the Request of:

P.O. UPS 01/08/04

Vertex Standard USA Inc.
10900 Walker Street
Cypress, CA 90630

Attention of:

Mikio Maruya, Executive Vice President
(800) 255-9237; FAX: (800) 477-9237
(714) 827-7600; FAX: -8100
m.maruya@vxstdusa.com

Supervised by:

A handwritten signature in black ink, appearing to read 'M. Flom, P. Eng.'

Morton Flom, P. Eng.

List of Exhibits

(FCC **Certification** (Transmitters) - Revised 9/28/98)

Applicant: Vertex Standard Co., Ltd.

FCC ID: K6610443240

By Applicant:

1. Letter of Authorization	x
2. Identification Drawings, 2.1033(c)(11)	
<input checked="" type="checkbox"/> Label	
<input checked="" type="checkbox"/> Location of Label	
<input checked="" type="checkbox"/> Compliance Statement	
<input checked="" type="checkbox"/> Location of Compliance Statement	
3. Photographs, 2.1033(c)(12)	x
4. Documentation: 2.1033(c)	
(3) User Manual	x
(9) Tune Up Info	x
(10) Schematic Diagram	x
(10) Circuit Description	x
Block Diagram	x
Active Devices	x
5. Part 90.203(e) & (g) Attestation	x
6. Request for Confidentiality	x
7. MPE Report	x

By M.F.A. Inc.:

A. Testimonial & Statement of Certification

The Applicant has been cautioned as to the following:

15.21 Information to the User.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Table of Contents

<u>Rule</u>	<u>Description</u>	<u>Page</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a)	Carrier Output Power (Conducted)	7
2.1046(a)	ERP Carrier Power (Radiated)	9
2.1051	Unwanted Emissions (Transmitter Conducted)	10
2.1053(a)	Field Strength of Spurious Radiation	14
2.1049(c)(1)	Emission Masks (Occupied Bandwidth)	18
90.214	Transient Frequency Behavior	25
2.1047(a)	Audio Low Pass Filter (Voice Input)	31
2.1047(a)	Audio Frequency Response	34
2.1047(b)	Modulation Limiting	36
2.1055(a)(1)	Frequency Stability (Temperature Variation)	39
2.1055(b)(1)	Frequency Stability (Voltage Variation)	42
2.202(g)	Necessary Bandwidth and Emission Bandwidth	43

Page Number

1 of 43.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a)

Test Report

b) Laboratory:
(FCC: 31040/SIT)
(Canada: IC 2044) M. Flom Associates, Inc.
3356 N. San Marcos Place, Suite 107
Chandler, AZ 85225

c) Report Number: d0410043

d) Client: Vertex Standard USA Inc.
10900 Walker Street
Cypress, CA 90630

e) Identification: VXR-9000V
FCC ID: K6610443240
S/N: 3N000001

EUT Description: VHF Repeater

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: January 28, 2004
EUT Received: January 8, 2004

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

List of General Information Required for Certification

In Accordance with FCC Rules and Regulations,
Volume II, Part 2 and to

2, 22, 74, 90, 90.210, Confidentiality

Sub-part 2.1033**(c)(1): Name and Address of Applicant:**

Vertex Standard Co., Ltd.
4-8-8 Nakameguro, Meguro-Ku
Tokyo 153-8644 Japan

Manufacturer:

Applicant

(c)(2): FCC ID:

K6610443240

Model Number:

VXR-9000V

(c)(3): Instruction Manual(s):

Please see attached exhibits

(c)(4): Type of Emission:

16K0F3E, 11K0F3E

(c)(5): Frequency Range, MHz:

148 to 174

(c)(6): Power Rating, Watts:

Switchable Variable 10 to 50 N/A

FCC Grant Note:

BF - The output power is continuously variable from the value listed in this entry to 20%-25% of the value listed.

(c)(7): Maximum Power Rating, Watts:

300


DUT Results:

Passes Fails

Page Number

3 of 43.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.

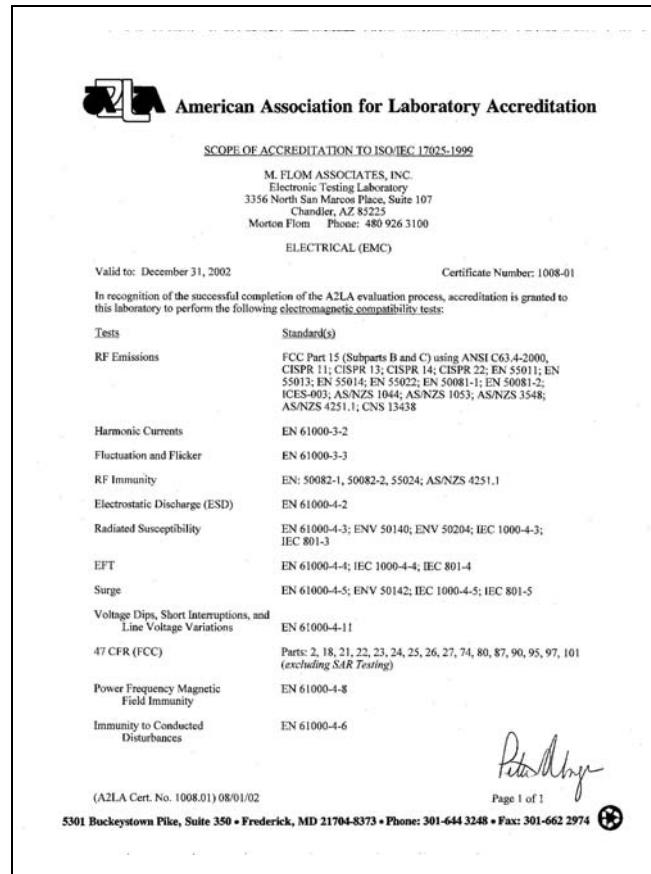

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not be covered by this laboratory's A2LA accreditation.

Page Number

4 of 43.

Subpart 2.1033 (continued)

(c)(8): Voltages & currents in all elements in final RF stage, including final transistor or solid-state device:

Collector Current, A	= 11
Collector Voltage, Vdc	= 13.6
Supply Voltage, Vdc	= 13.6

(c)(9): **Tune-Up Procedure:**

Please see attached exhibits

(c)(10): **Circuit Diagram/Circuit Description:**

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Please see attached exhibits

(c)(11): **Label Information:**

Please see attached exhibits

(c)(12): **Photographs:**

Please see attached exhibits

(c)(13): **Digital Modulation Description:**

Attached Exhibits
 N/A

(c)(14): **Test and Measurement Data:**

Follows

Sub-part

2.1033(c)(14):**Test and Measurement Data**

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- ____ 21 – Domestic Public Fixed Radio Services
- 22 – Public Mobile Services
- ____ 22 Subpart H - Cellular Radiotelephone Service
- ____ 22.901(d) - Alternative technologies and auxiliary services
- ____ 23 – International Fixed Public Radiocommunication services
- ____ 24 – Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- ____ 80 – Stations in the Maritime Services
- ____ 80 Subpart E - General Technical Standards
- ____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- ____ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- ____ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- ____ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- ____ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- ____ 80 Subpart V - Emergency Position Indicating Radio Beacons (EPIRB'S)
- ____ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- ____ 80 Subpart X - Voluntary Radio Installations
- ____ 87 – Aviation Services
- 90 – Private Land Mobile Radio Services
- ____ 94 – Private Operational-Fixed Microwave Service
- ____ 95 Subpart A - General Mobile Radio Service (GMRS)
- ____ 95 Subpart C - Radio Control (R/C) Radio Service
- ____ 95 Subpart D - Citizens Band (CB) Radio Service
- ____ 95 Subpart E - Family Radio Service
- ____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- ____ 97 - Amateur Radio Service
- ____ 101 – Fixed Microwave Services

**Standard Test Conditions
and
Engineering Practices**

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.

Page Number 7 of 43.

Name of Test: Carrier Output Power (Conducted)

Specification: 47 CFR 2.1046(a)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

Test Equipment: As per attached page

Measurement Procedure

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an RF Power Meter.
2. Measurement accuracy is $\pm 3\%$.

Measurement Results (Worst case)

Frequency of Carrier, MHz	=	161, 148, 174
Ambient Temperature	=	23°C $\pm 3^\circ\text{C}$

Power Setting	RF Power, Watts
Low	10
High	50


Performed by:



Daniel M. Dillon, Test Engineer

Transmitter Power Conducted Measurements

Test A. RF Power Output
 Test B. Frequency Stability

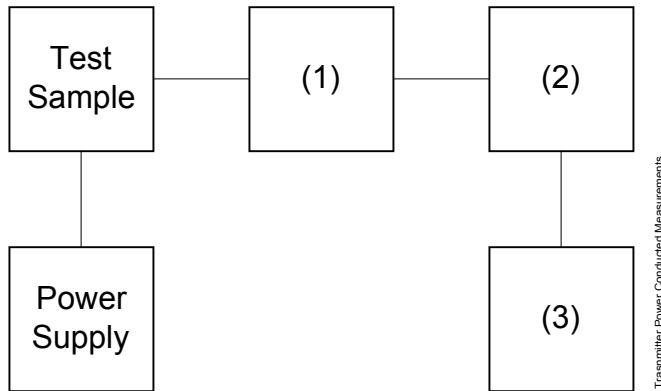

Asset	Description	s/n
(1) Coaxial Attenuator		
X i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232
i00122/3	NARDA 766 (10 dB)	7802 or 7802A
(2) Power Meters		
X i00020	HP 8901A Power Mode	2105A01087
(3) Frequency Counter		
X i00020	HP 8901A Frequency Mode	2105A01087

Page Number

9 of 43.

Name of Test:

ERP Carrier Power (Radiated)


Specification:

TIA/EIA 603A (Substitution Method)

2.2.17.1 Definition: The average radiated power of a licensed device is the equivalent power required, when delivered to a half-wave dipole or horn antenna, to produce at a distant point the same average received power as produced by the licensed device.

2.2.17.2 Method of Measurement:

a) Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

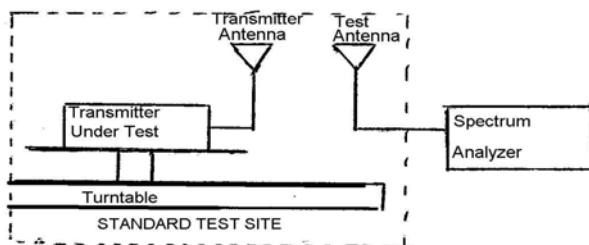

b) Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.

c) Repeat step b) for seven additional readings at 45° interval positions of the turntable.

d) Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.

e) Calculate the average radiated output power from the readings in step c) and d) by the following:

$$\text{average radiated power} = 10 \log_{10} \sum 10(\text{LVL} - \text{LOSS})/10 \text{ (dBm)}$$

	Results					
	148 MHz		161 MHz		174 MHz	
	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db	LVL, dbm	Path Loss, db
0°	44.2	1.6	47.7	-2.2	43.5	1.3
45°	44.0	1.6	46.9	-2.2	43.8	1.3
90°	44.1	1.6	47.4	-2.2	41.9	1.3
135°	43.8	1.6	47.6	-2.2	42.8	1.3
180°	44.7	1.6	48.1	-2.2	44.6	1.3
225°	45.0	1.6	47.5	-2.2	41.4	1.3
270°	44.3	1.6	46.0	-2.2	43.1	1.3
315°	45.1	1.6	48.6	-2.2	41.7	1.3
Av. Radiated Power:						
			148 MHz	161 MHz	174 MHz	
			46.0 dbm	45.28 dbm	44.15 dbm	

Page Number 10 of 43.

Name of Test: Unwanted Emissions (Transmitter Conducted)

Specification: 47 CFR 2.1051

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

Test Equipment: As per attached page

Measurement Procedure

1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. Measurement Results: Attached for worst case

Frequency of carrier, MHz	=	161, 148, 174
Spectrum Searched, GHz	=	0 to $10 \times F_c$
Maximum Response, Hz	=	2820
All Other Emissions	=	≥ 20 dB Below Limit


Performed by:



Daniel M. Dillon, Test Engineer

Transmitter Spurious Emission

Test A. Occupied Bandwidth (In-Band Spurious)
 Test B. Out-Of-Band Spurious

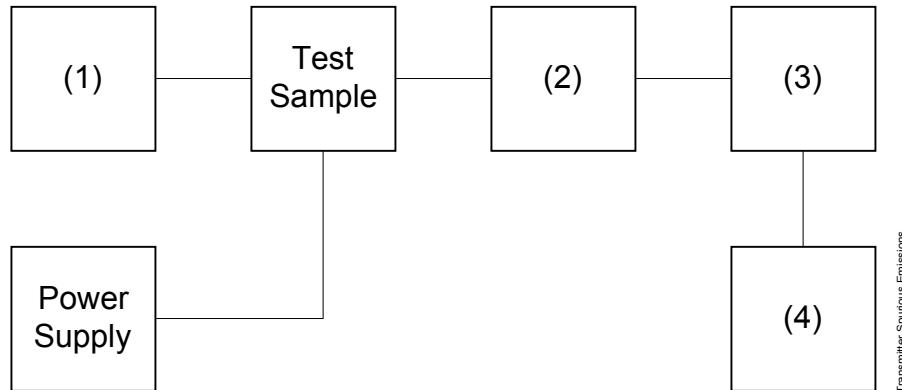

Asset	Description	s/n
(1) Audio Oscillator/Generator		
X i00017	HP 8903A Audio Analyzer	2216A01753
i00002	HP 3336B Synthesizer / Level Gen.	1931A01465
(2) Coaxial Attenuator		
X i00231/2	PASTERACK PE7021-30 (30 dB)	231 or 232
i0012/3	NARDA 766 (10 dB)	7802 or 7802A
(3) Filters; Notch, HP, LP, BP		
i00126	Eagle TNF-1 Notch Filter	100-250
i00125	Eagle TNF-1 Notch Filter	50-60
i00124	Eagle TNF-1 Notch Filter	250-850
(4) Spectrum Analyzer		
X i00048	HP 8566B Spectrum Analyzer	2511A01467
i00029	HP 8563E Spectrum Analyzer	3213A00104

Page Number

12 of 43.

Name of Test: Unwanted Emissions (Transmitter Conducted)
 Limit(s), dBc: -(43+10xLOG P) = -53 (10 Watts)
 -(43+10xLOG P) = -60 (50 Watts)

g0410177: 2004-Jan-21 Wed 09:44:00

State: 1:Low Power

Ambient Temperature: 23°C ± 3°C

Frequency Tuned, MHz	Frequency Emission, MHz	Level, dBm	Level, dBc	Margin, dB
148.000000	296.000000	-45.9	-75.9	-32.9
161.000000	321.998000	-48.7	-78.7	-35.7
174.000000	347.877500	-51.5	-81.5	-38.5
148.000000	443.997500	-52.7	-82.7	-39.7
161.000000	483.239000	-51.7	-81.7	-38.7
174.000000	522.203000	-52.2	-82.2	-39.2
148.000000	592.225500	-51.3	-81.3	-38.3
161.000000	643.937500	-52	-82	-39
174.000000	695.868500	-50.9	-80.9	-37.9
148.000000	739.791500	-52.1	-82.1	-39.1
161.000000	804.957000	-51.9	-81.9	-38.9
174.000000	869.868000	-51.9	-81.9	-38.9
148.000000	887.937000	-52.3	-82.3	-39.3
161.000000	965.804000	-51.3	-81.3	-38.3
148.000000	1036.033000	-51	-81	-38
174.000000	1044.061000	-51.6	-81.6	-38.6
161.000000	1127.145000	-51.5	-81.5	-38.5
148.000000	1183.782000	-52	-82	-39
174.000000	1218.135000	-51.8	-81.8	-38.8
161.000000	1288.107000	-52.1	-82.1	-39.1
148.000000	1331.975000	-52.1	-82.1	-39.1
174.000000	1391.849000	-51.5	-81.5	-38.5
161.000000	1449.095500	-51.7	-81.7	-38.7
148.000000	1479.857000	-51.2	-81.2	-38.2
174.000000	1566.246000	-51.4	-81.4	-38.4
161.000000	1610.109000	-51	-81	-38
148.000000	1628.121000	-51.2	-81.2	-38.2
174.000000	1739.832000	-50.9	-80.9	-37.9
161.000000	1771.013000	-50.9	-80.9	-37.9
148.000000	1775.981000	-50.8	-80.8	-37.8
174.000000	1914.066500	-51	-81	-38
148.000000	1924.138500	-51	-81	-38
161.000000	1931.807500	-51.8	-81.8	-38.8
148.000000	2071.965500	-50.8	-80.8	-37.8
174.000000	2088.205000	-51	-81	-38
161.000000	2092.850000	-51.7	-81.7	-38.7
148.000000	2219.918500	-50	-80	-37
161.000000	2254.149000	-49.9	-79.9	-36.9
174.000000	2262.213000	-50	-80	-37
161.000000	2414.790000	-50.4	-80.4	-37.4
174.000000	2436.140500	-50.5	-80.5	-37.5
174.000000	2610.088500	-52.6	-82.6	-39.6

Performed by:

MFA p0410002, d0410043


 Daniel M. Dillon, Test Engineer

Page Number

13 of 43.

Name of Test: Unwanted Emissions (Transmitter Conducted)
 Limit(s), dBc: -(43+10xLOG P) = -53 (10 Watts)
 -(43+10xLOG P) = -60 (50 Watts)

g0410178: 2004-Jan-21 Wed 09:57:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

Frequency Tuned, MHz	Frequency Emission, MHz	Level, dBm	Level, dBc	Margin, dB
148.000000	296.000500	-45.9	-75.9	-32.9
161.000000	322.013000	-46	-76	-33
174.000000	347.994500	-51.3	-81.3	-38.3
148.000000	443.780500	-52.4	-82.4	-39.4
161.000000	483.211000	-51.8	-81.8	-38.8
174.000000	521.884500	-52.2	-82.2	-39.2
148.000000	592.035500	-52.4	-82.4	-39.4
161.000000	644.229500	-51.8	-81.8	-38.8
174.000000	696.074500	-52.7	-82.7	-39.7
148.000000	739.841500	-52.9	-82.9	-39.9
161.000000	805.214000	-52	-82	-39
174.000000	869.884000	-52.4	-82.4	-39.4
148.000000	887.996000	-53.6	-83.6	-40.6
161.000000	966.106500	-52.5	-82.5	-39.5
148.000000	1035.848500	-52.4	-82.4	-39.4
174.000000	1043.820500	-51.8	-81.8	-38.8
161.000000	1126.919500	-52	-82	-39
148.000000	1183.947000	-51.7	-81.7	-38.7
174.000000	1217.762000	-52.6	-82.6	-39.6
161.000000	1287.803000	-52	-82	-39
148.000000	1331.961500	-52.5	-82.5	-39.5
174.000000	1392.199000	-52.4	-82.4	-39.4
161.000000	1449.021000	-51.8	-81.8	-38.8
148.000000	1480.224500	-51.9	-81.9	-38.9
174.000000	1565.763000	-51.3	-81.3	-38.3
161.000000	1610.042500	-51.1	-81.1	-38.1
148.000000	1627.822500	-51.1	-81.1	-38.1
174.000000	1740.002500	-51.2	-81.2	-38.2
161.000000	1771.204500	-51.6	-81.6	-38.6
148.000000	1775.868000	-50.8	-80.8	-37.8
174.000000	1914.205000	-51.8	-81.8	-38.8
148.000000	1923.887500	-50.6	-80.6	-37.6
161.000000	1932.223000	-50.3	-80.3	-37.3
148.000000	2071.913000	-50.3	-80.3	-37.3
174.000000	2087.783000	-48.8	-78.8	-35.8
161.000000	2092.961000	-51.2	-81.2	-38.2
148.000000	2219.894000	-50.9	-80.9	-37.9
161.000000	2254.161500	-51.1	-81.1	-38.1
174.000000	2261.815500	-49.7	-79.7	-36.7
161.000000	2415.086500	-50.3	-80.3	-37.3
174.000000	2436.091000	-50.1	-80.1	-37.1
174.000000	2609.767500	-53.2	-83.2	-40.2

Performed by:

MFA p0410002, d0410043


 Daniel M. Dillon, Test Engineer

Page Number 14 of 43.

Name of Test: Field Strength of Spurious Radiation

Specification: 47 CFR 2.1053(a)


Guide: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

Measurement Procedure

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth 100 kHz (<1 GHZ), 1 MHZ (> 1GHz).
 - 2) Video Bandwidth \geq 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed \leq 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

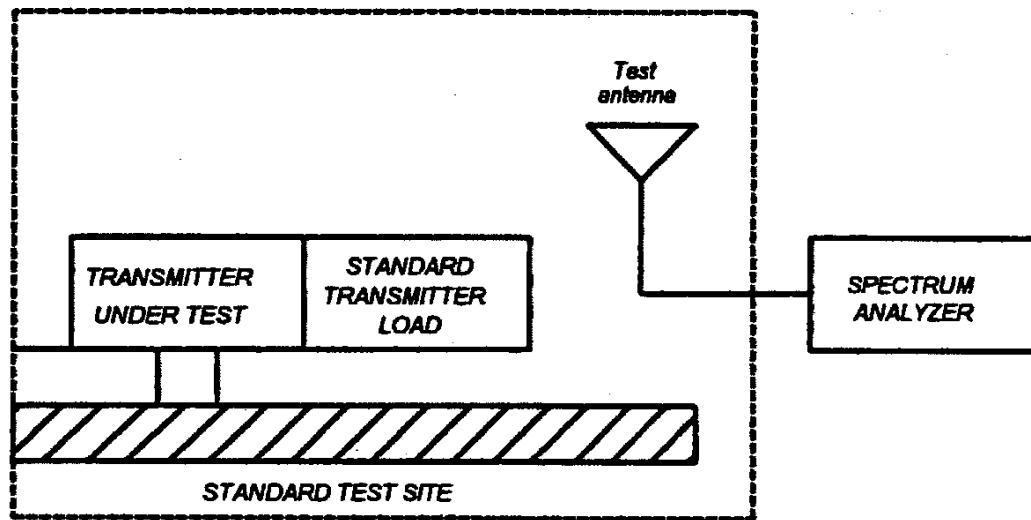


Name of Test: Field Strength of Spurious Radiation (Cont.)

D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).

E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.

F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

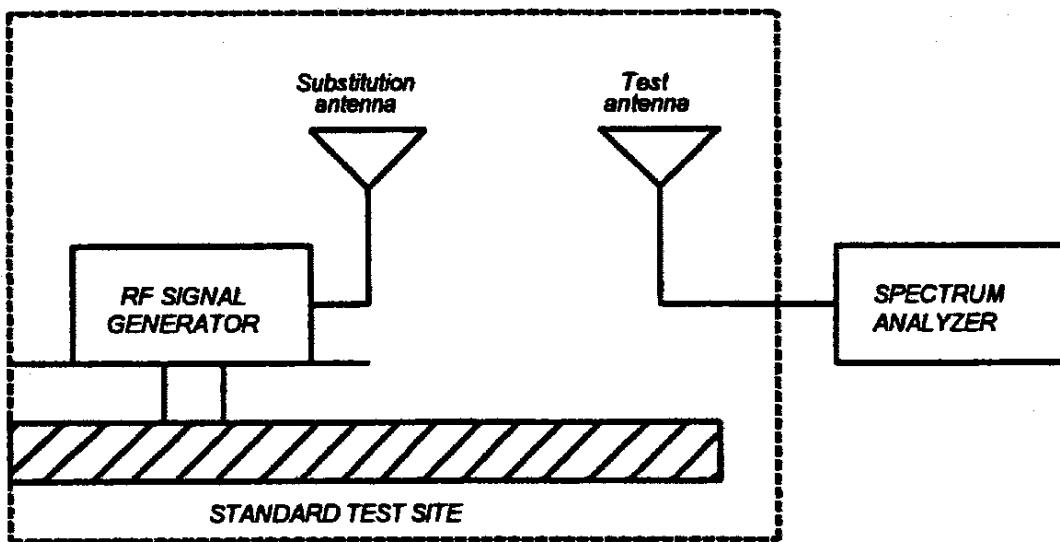

G) Reconnect the equipment as illustrated.

H) Keep the spectrum analyzer adjusted as in step B).

I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

Name of Test: Field Strength of Spurious Radiation (Cont.)

J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.

K) Repeat step J) with both antennas vertically polarized for each spurious frequency.

L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step I})$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset	Description	s/n	Cycle	Last Cal
<small>Per ANSI C63.4-1992/2000 Draft, 10.1.4</small>				
Transducer				
	i00088 EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-03
X	i00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-03
X	i00103 EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Jan-03
Amplifier				
X	i00028 HP 8449A	2749A00121	12 mo.	May-03
Spectrum Analyzer				
X	i00029 HP 8563E	3213A00104	12 mo.	May-03
X	i00033 HP 85462A	3625A00357	12 mo.	Aug-03
Substitution Generator				
X	i00067 HP 8920A Communication TS	3345U01242	12 mo.	Oct-03
	i00207 HP 8753D Network Analyzer	3410A08514	12 mo.	Jul-03
Microphone, Antenna Port, and Cabling				
Microphone	Yes	Cable Length	1.0	Meters
Antenna Port Terminated	Yes	Load	Yes	Antenna Gain
All Ports Terminated by Load	Yes	Peripheral	N/A	0 dBd

Page Number

17 of 43.

Name of Test: Field Strength of Spurious Radiation

g0410033: 2004-Jan-12 Mon 10:24:00

STATE: 2:High Power

Ambient Temperature: 23°C ± 3°C

Frequency Tuned, MHz	Frequency Emission, MHz	ERP, dBm	ERP, dBc
148.000000	296.000000	-23.3	-70.27
161.000000	322.008000	-23.6	-70.27
174.000000	348.008000	-35.5	-70.27
148.000000	444.008000	-24.6	-70.27
161.000000	483.008000	-22.6	-70.27
174.000000	522.008000	-29.3	-70.27
148.000000	591.999750	-29.2	-70.27
161.000000	644.010000	-25	-70.27
174.000000	696.008000	-34.7	-70.27
148.000000	740.017000	-35.4	-70.27
161.000000	805.008000	-32	-70.27
174.000000	870.008000	-30.4	-70.27
148.000000	888.017000	-42.1	-70.27
161.000000	966.008000	-34.4	-70.27
148.000000	1036.010000	-34.5	-70.27
174.000000	1044.010000	-31.6	-70.27
161.000000	1127.010000	-31.4	-70.27
148.000000	1184.010000	-41.3	-70.27
174.000000	1218.010000	-34.7	-70.27
161.000000	1288.010000	-36.7	-70.27
148.000000	1332.010000	-42.2	-70.27
174.000000	1392.010000	-36.9	-70.27
161.000000	1449.010000	-36.1	-70.27
148.000000	1480.010000	-40.5	-70.27
174.000000	1566.010000	-32.3	-70.27
161.000000	1610.010000	-34.8	-70.27
174.000000	1740.010000	-32.4	-70.27

Limit = 50 + 10 log 54.48 = -67.36 dbc

Performed by:



Daniel M. Dillon, Test Engineer

Page Number 18 of 43.

Name of Test: Emission Masks (Occupied Bandwidth)

Specification: 47 CFR 2.1049(c)(1)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

Test Equipment: As per previous page

Measurement Procedure

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. Measurement Results: Attached

Page Number

19 of 43.


Name of Test:

Emission Masks (Occupied Bandwidth)

g0410170: 2004-Jan-21 Wed 09:15:00

State: 1:Low Power


Ambient Temperature: 23°C ± 3°C

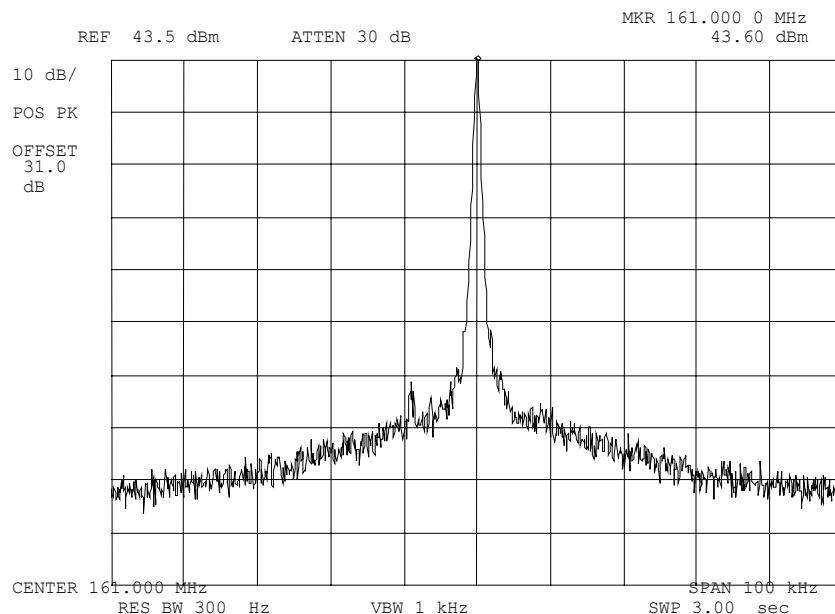

Power:
 Modulation:

LOW
 NONE
 REFERENCE

Performed by:


 Daniel M. Dillon, Test Engineer

Page Number

20 of 43.


Name of Test:

Emission Masks (Occupied Bandwidth)

g0410172: 2004-Jan-21 Wed 09:22:00

State: 1:Low Power

Ambient Temperature: 23°C ± 3°C

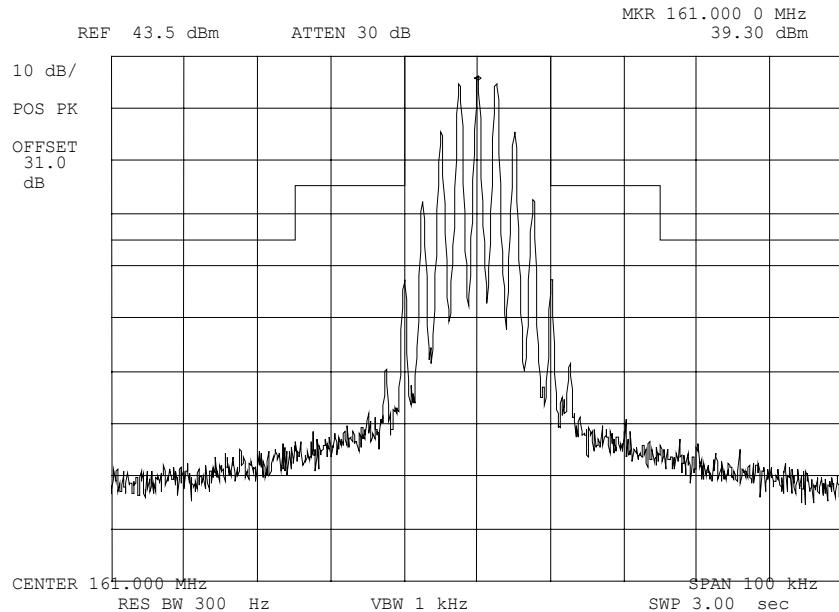

Power:

LOW

Modulation:

VOICE: 2500 Hz SINE WAVE

MASK: B, VHF/UHF 25kHz, w/LPF

Performed by:


 Daniel M. Dillon, Test Engineer

Page Number

21 of 43.


Name of Test:

Emission Masks (Occupied Bandwidth)

g0410174: 2004-Jan-21 Wed 09:28:00

State: 1:Low Power

Ambient Temperature: 23°C ± 3°C

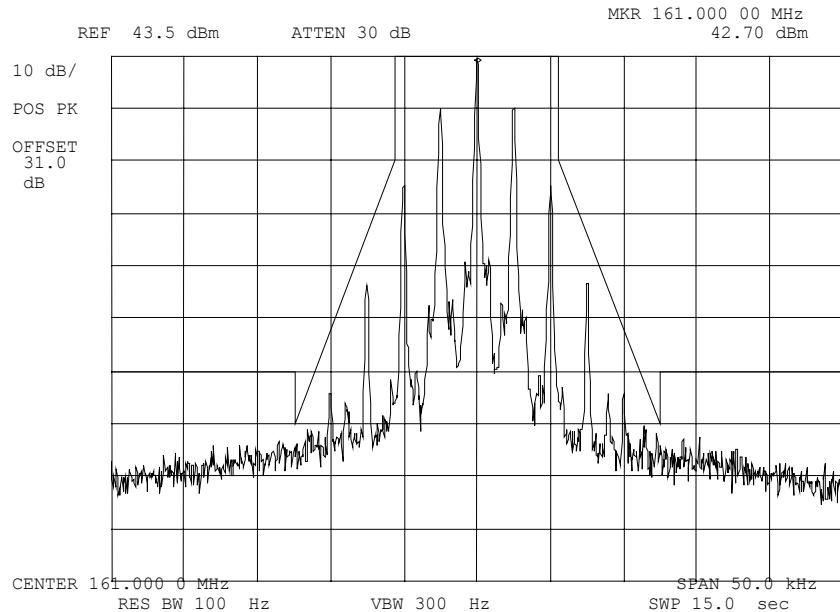**Power:**

LOW

Modulation:

VOICE: 2500 Hz SINE WAVE

MASK: D, VHF/UHF 12.5kHz BW

Performed by:


 Daniel M. Dillon, Test Engineer

Page Number

22 of 43.


Name of Test:

Emission Masks (Occupied Bandwidth)

g0410169: 2004-Jan-21 Wed 09:14:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

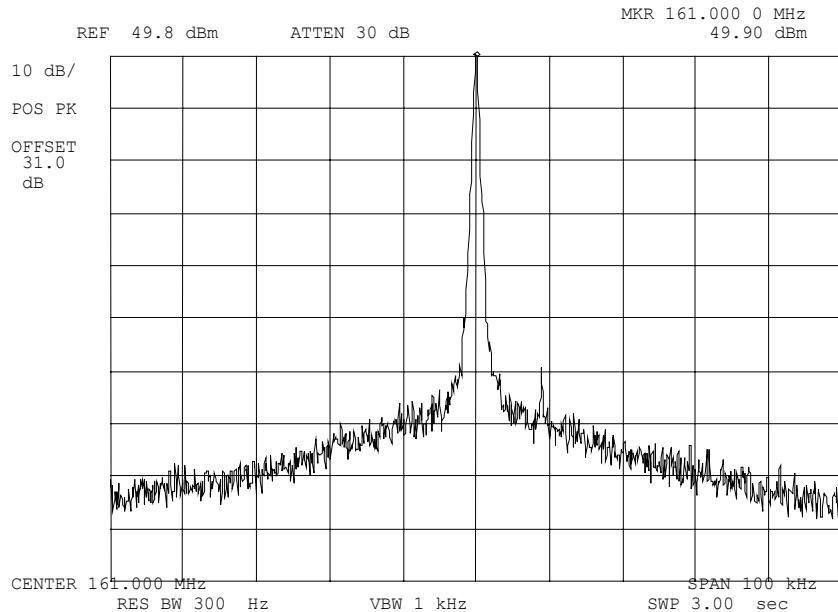

Power:
 Modulation:

HIGH
 NONE
 REFERENCE HIGH

Performed by:


 Daniel M. Dillon, Test Engineer

Page Number

23 of 43.


Name of Test:

Emission Masks (Occupied Bandwidth)

g0410171: 2004-Jan-21 Wed 09:20:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

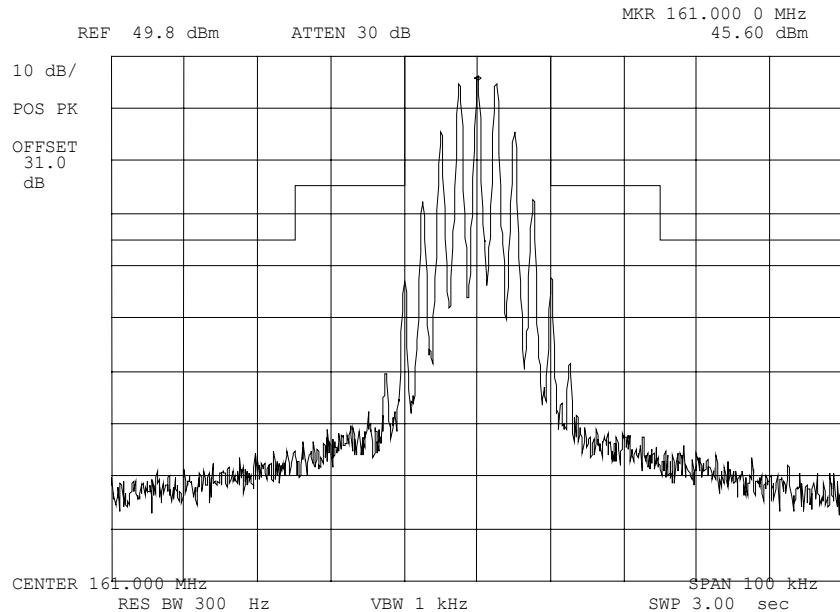

Power:

HIGH

Modulation:

VOICE: 2500 Hz SINE WAVE

MASK: B, VHF/UHF 25kHz, w/LPF

Performed by:


 Daniel M. Dillon, Test Engineer

Page Number

24 of 43.


Name of Test:

Emission Masks (Occupied Bandwidth)

g0410173: 2004-Jan-21 Wed 09:26:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

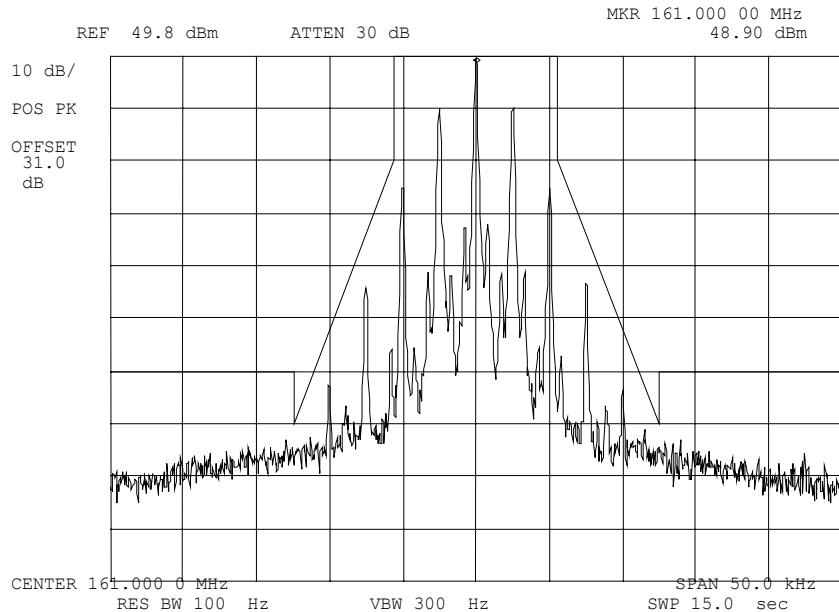

Power:
Modulation:

HIGH
VOICE: 2500 Hz SINE WAVE
MASK: D, VHF/UHF 12.5kHz BW

Performed by:



Daniel M. Dillon, Test Engineer

Page Number 25 of 43.

Name of Test: Transient Frequency Behavior
Specification: 47 CFR 90.214
Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.19

Test Equipment: As per attached page

Measurement Procedure


- A) The EUT was setup as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a *guide*.
- B) The transmitter was turned on.
- C) Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded.
- D) The transmitter was turned off.
- E) An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step C) above, measured at the output of the combiner. This level was then fixed for the remainder of the test.
- F) The oscilloscope was setup using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5 ms/div (VHF).
- G) The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded.
- H) The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.

Performed by:



Daniel M. Dillon, Test Engineer

Transient Frequency Behavior

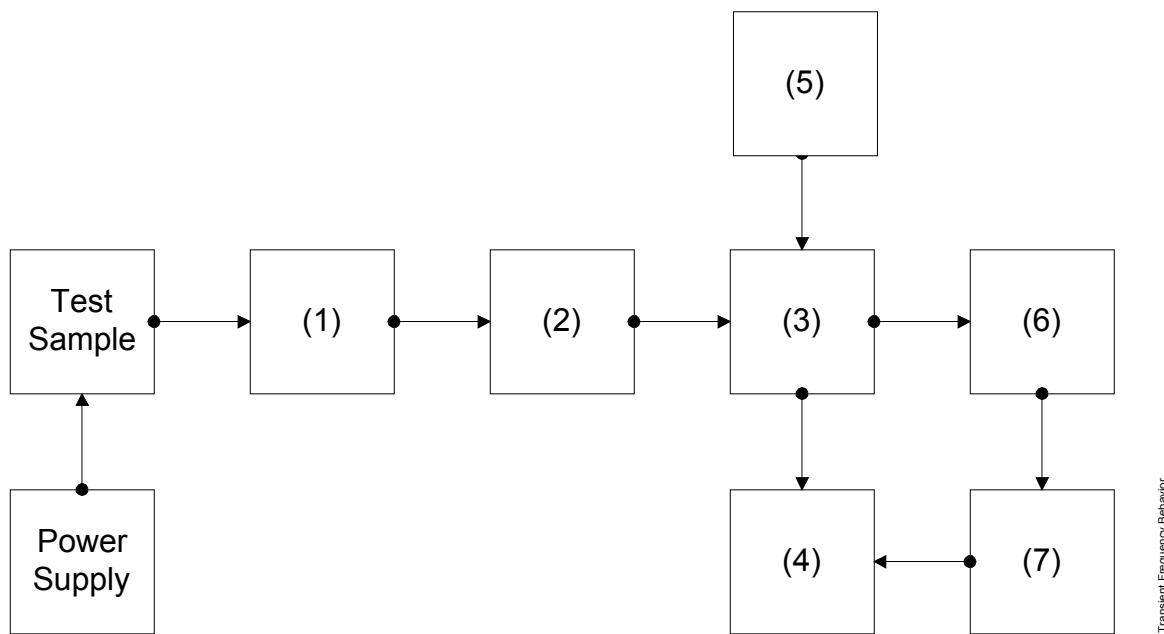

Transient Frequency Behavior

Asset	Description	s/n
(1) Attenuator (Removed after 1st step)		
X i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232
(2) Attenuator		
X i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232
i00122/3	NARDA 766 (10 dB)	7802 or 7802A
(3) Combiner		
X i00154	4 x 25 Ω Combiner	154
(4) Crystal Decoder		
X i00159	HP 8470B Crystal Detector	1822A10054
(5) RF Signal Generator		
X i00067	HP 8920A Communication TS	3345U01242
(6) Modulation Analyzer		
X i00020	HP 8901A Modulation Meter	2105A01087
(7) Oscilloscope		
X i00030	HP 54502A Digital Oscilloscope	2927A00209

Page Number

27 of 43.


Name of Test:

Transient Frequency Behavior

g0410179: 2004-Jan-21 Wed 10:28:00

State: 0:General

Ambient Temperature: 23°C ± 3°C

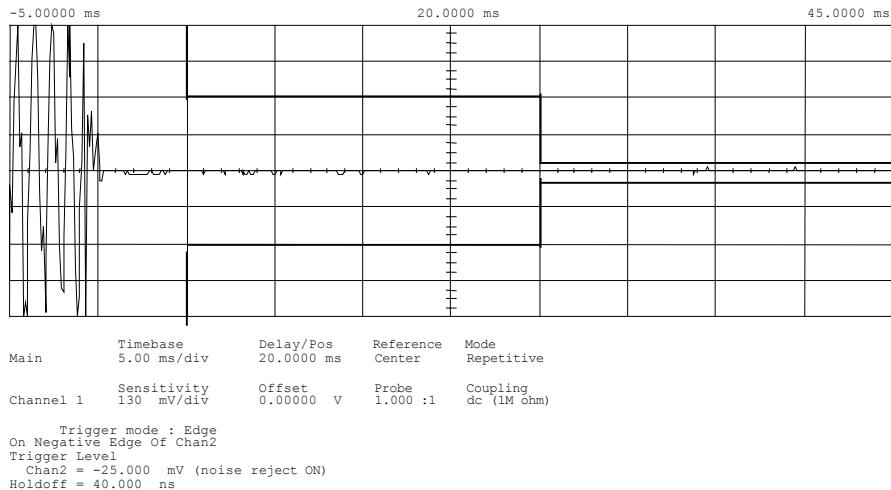**Power:**

n/a

Modulation:

Ref Gen=25 kHz Deviation

Description:

CARRIER ON TIME

Performed by:

Daniel M. Dillon, Test Engineer

Page Number

28 of 43.


Name of Test:

Transient Frequency Behavior

g0410180: 2004-Jan-21 Wed 10:33:00

State: 0:General

Ambient Temperature: 23°C ± 3°C

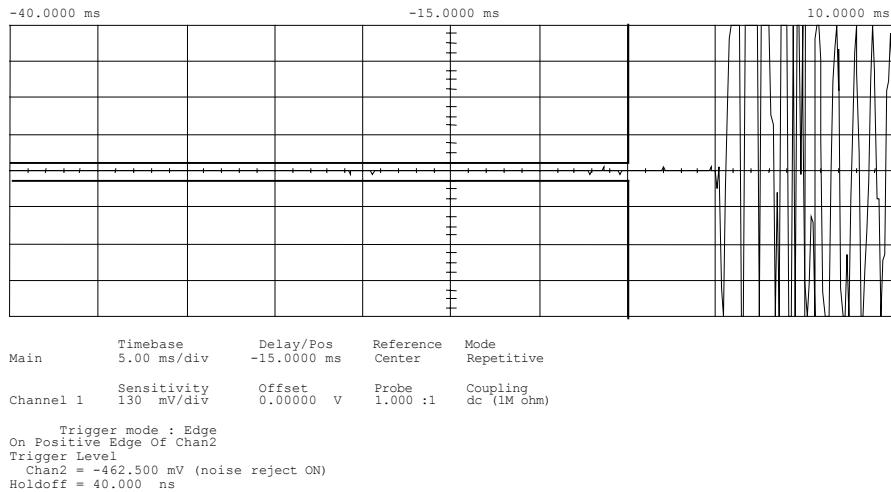**Power:**

n/a

Modulation:

Ref Gen=25 kHz Deviation

Description:

CARRIER OFF TIME

Performed by:

Daniel M. Dillon, Test Engineer

Page Number

29 of 43.


Name of Test:

Transient Frequency Behavior

g0410181: 2004-Jan-21 Wed 10:40:00

State: 0:General

Ambient Temperature: 23°C ± 3°C

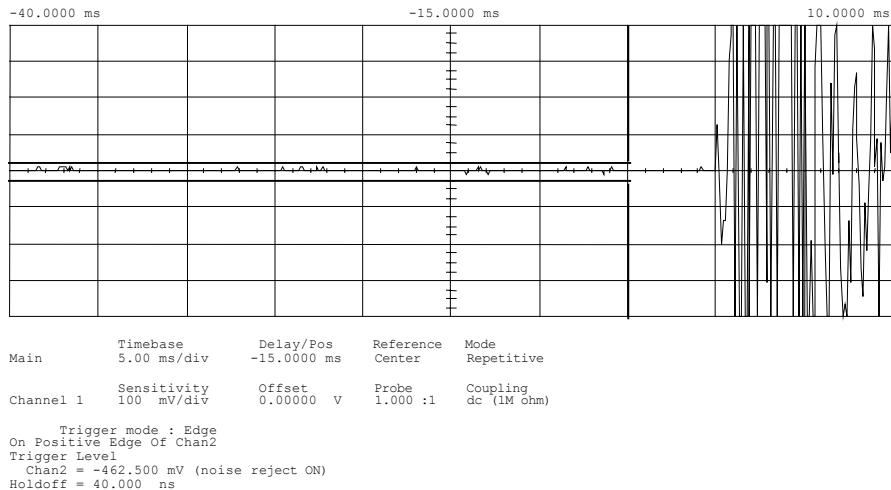**Power:**

n/a

Modulation:

Ref Gen=12.5 kHz Deviation

Description:

CARRIER OFF TIME

Performed by:

Daniel M. Dillon, Test Engineer

Page Number

30 of 43.


Name of Test:

Transient Frequency Behavior

g0410182: 2004-Jan-21 Wed 10:52:00

State: 0:General

Ambient Temperature: 23°C ± 3°C

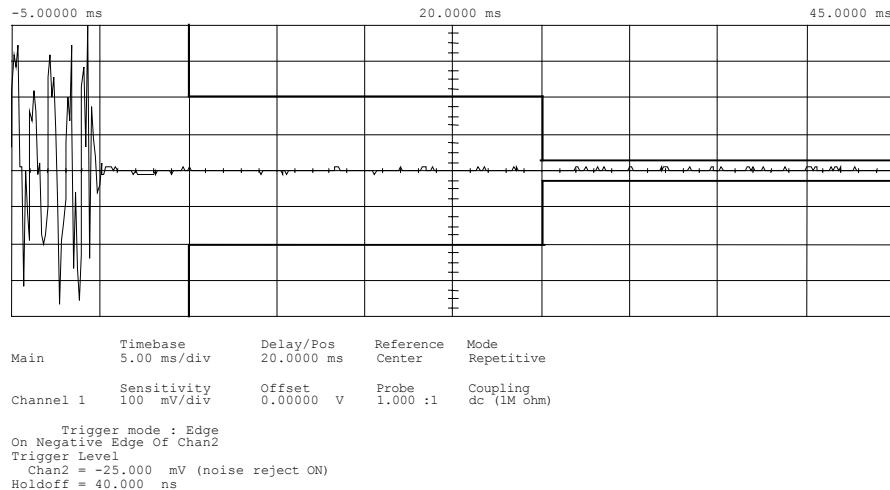**Power:**

n/a

Modulation:

Ref Gen=12.5 kHz Deviation

Description:

CARRIER ON TIME

Performed by:


 Daniel M. Dillon, Test Engineer

Page Number 31 of 43.

Name of Test: Audio Low Pass Filter (Voice Input)

Specification: 47 CFR 2.1047(a)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.15

Test Equipment: As per attached page

Measurement Procedure

1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. Measurement Results: Attached

Transmitter Test Set-Up


Test A. Modulation Capability/Distortion

Test B. Audio Frequency Response

Test C. Hum and Noise Level

Test D. Response of Low Pass Filter

Test E. Modulation Limiting

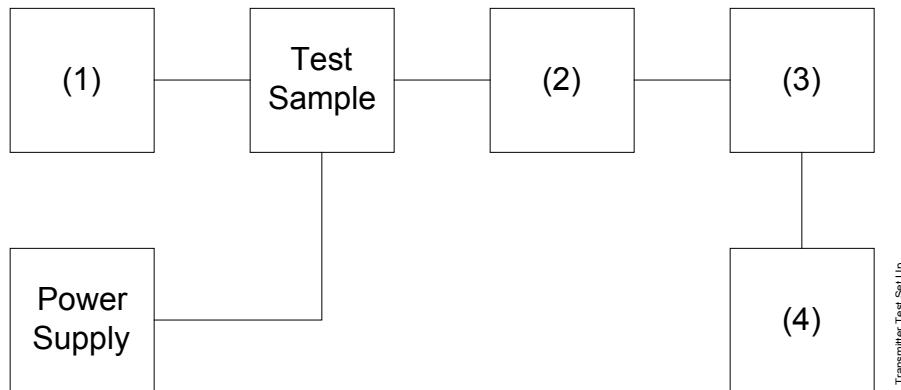

Transmitter Test Set Up

Asset	Description	s/n
(1) Audio Oscillator		
X i00002	HP 3336B Synthesizer / Level Gen.	1931A01465
(2) Coaxial Attenuator		
i00122/3	NARDA 766 (10dB)10	7802 or 7802A
X i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232
(3) Modulation Analyzer		
X i00020	HP 8901A Modulation Meter	2105A01087
(4) Audio Analyzer		
X i00001	HP 3586B Selective Level Meter	1928A01360

Page Number

33 of 43.


Name of Test:

Audio Low Pass Filter (Voice Input)


g0410070: 2004-Jan-21 Wed 11:20:00

State: 0:General

Ambient Temperature: 23°C ± 3°C

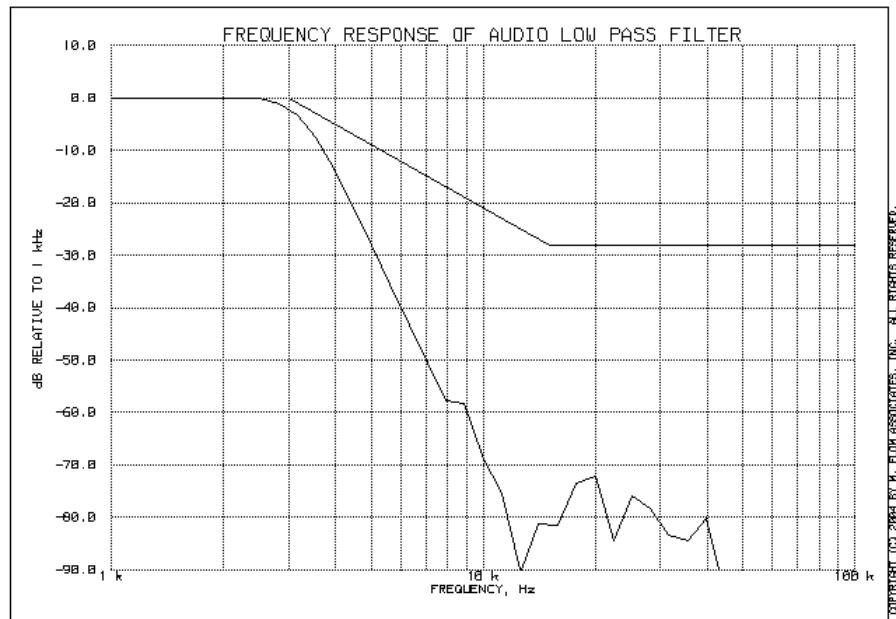

Performed by:



Daniel M. Dillon, Test Engineer

Page Number 34 of 43.

Name of Test: Audio Frequency Response

Specification: 47 CFR 2.1047(a)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6

Test Equipment: As per previous page

Measurement Procedure

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. Measurement Results: Attached

Page Number

35 of 43.


Name of Test:

Audio Frequency Response

g0410071: 2004-Jan-21 Wed 11:26:00

State: 0:General

Ambient Temperature: 23°C ± 3°C

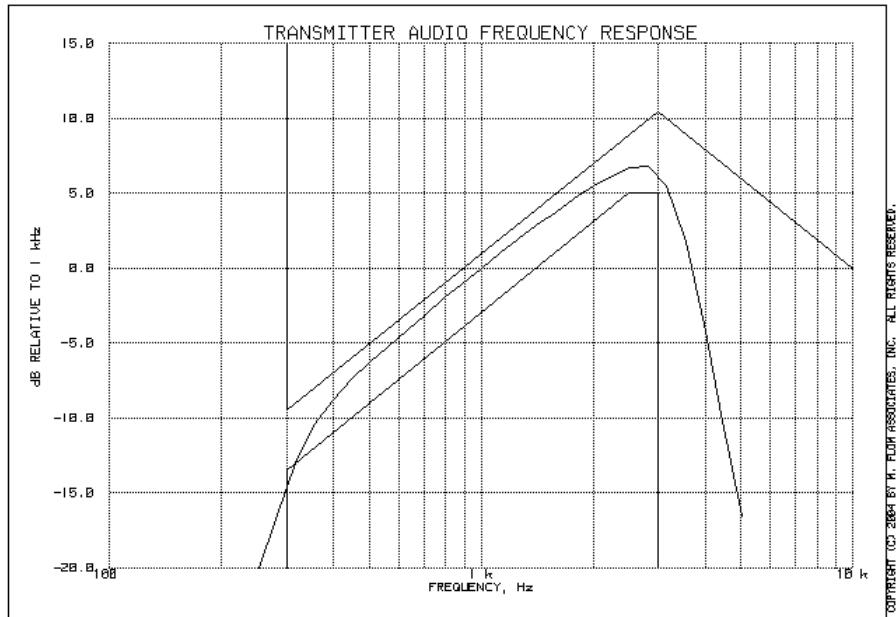

Frequency of Maximum Audio Response, Hz = 2820

Additional points:

Frequency, Hz	Level, dB
300	-14.55
20000	-25.68
30000	-25.93
50000	-25.93

Performed by:

Daniel M. Dillon, Test Engineer

Page Number 36 of 43.

Name of Test: Modulation Limiting

Specification: 47 CFR 2.1047(b)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3

Test Equipment: As per previous page

Measurement Procedure

1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. Measurement Results: Attached

Page Number



37 of 43.

Name of Test:

Modulation Limiting

g0410072: 2004-Jan-21 Wed 11:29:00

State: 0:General

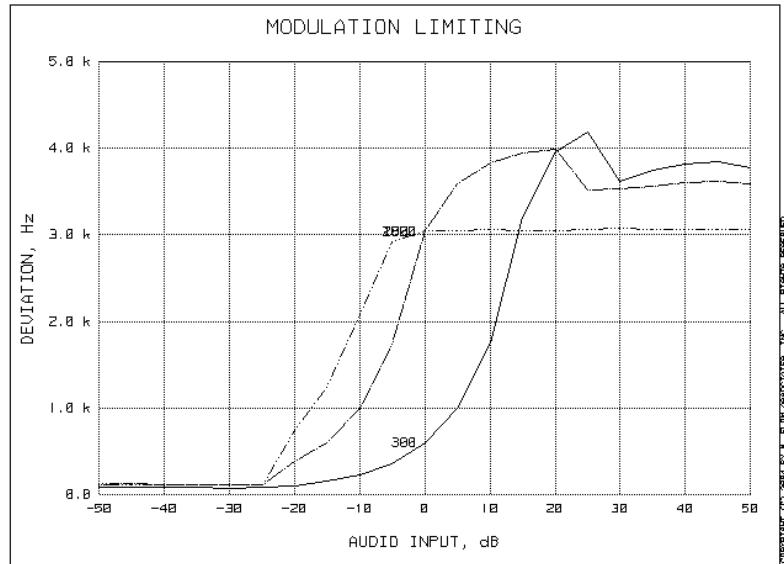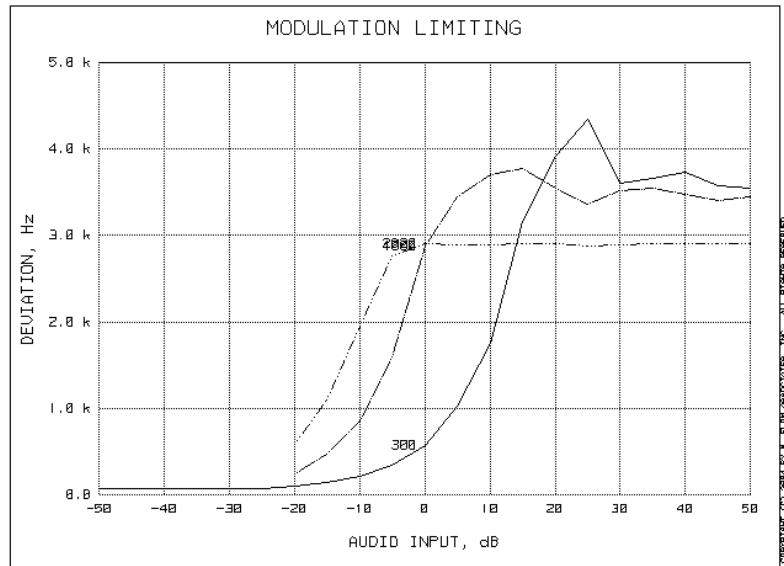Ambient Temperature: $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$ Positive
Peaks:Negative
Peaks:

Performed by:

Daniel M. Dillon, Test Engineer

Page Number



38 of 43.

Name of Test:

Modulation Limiting

g0410073: 2004-Jan-21 Wed 11:32:00

State: 0:General

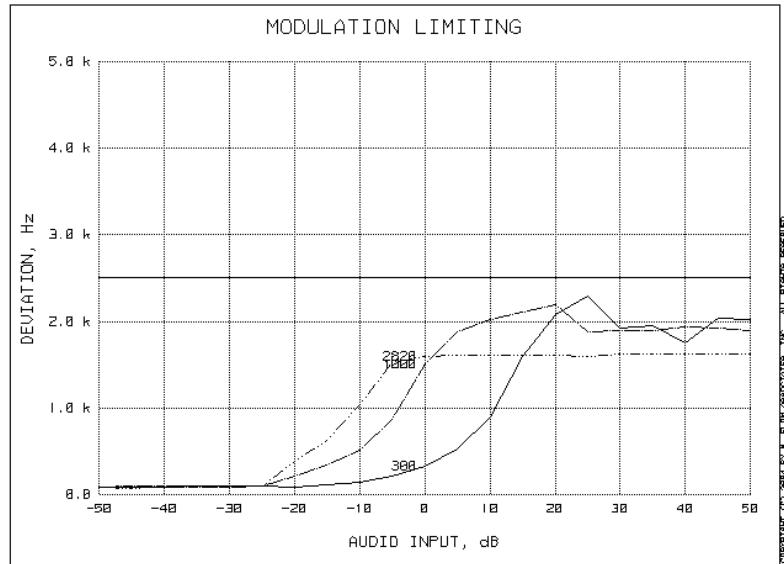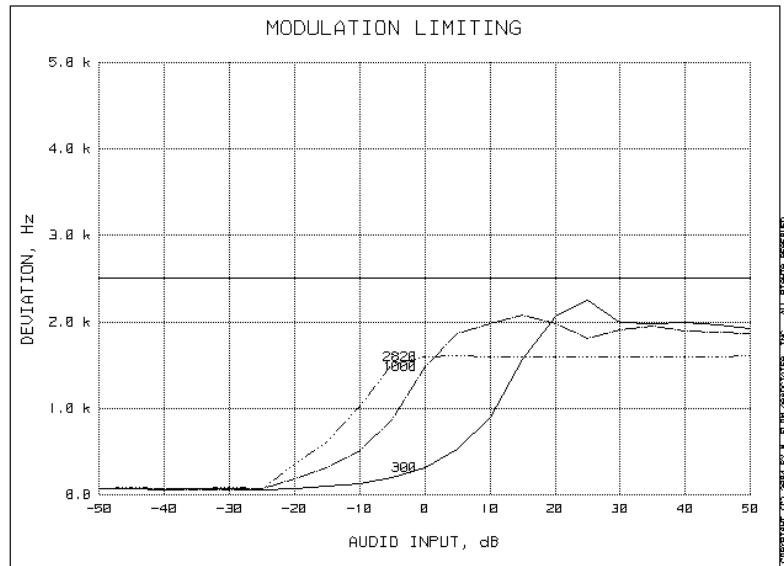Ambient Temperature: $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$ Positive
Peaks:Negative
Peaks:

Performed by:

Daniel M. Dillon, Test Engineer

Page Number 39 of 43.

Name of Test: Frequency Stability (Temperature Variation)

Specification: 47 CFR 2.1055(a)(1)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

Test Conditions: As Indicated


Test Equipment: As per previous page

Measurement Procedure

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. Measurement Results: Attached

Transmitter Test Set-Up

Frequency Stability: Temperature Variation
 Frequency Stability: Voltage Variation

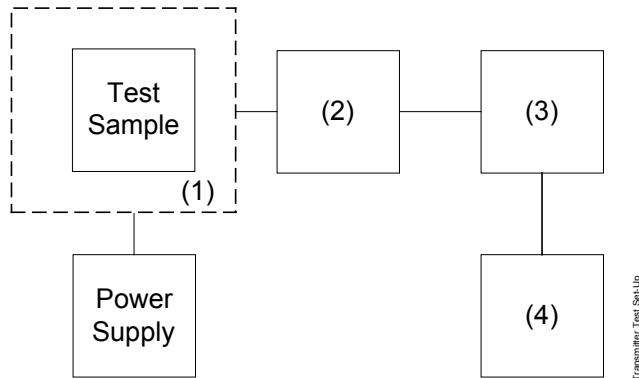


Asset	Description	s/n
(1) Temperature, Humidity, Vibration		
X i00027	Tenney Temp. Chamber	9083-765-234
(2) Coaxial Attenuator		
X i00231/2	PASTERNACK PE7021-30 (30 dB)	231 or 232
i00122/3	NARDA 766 (10 dB)	7802 or 7802A
(3) RF Power		
X i00067	HP 8920A Communications TS	3345U01242
(4) Frequency Counter		
X i00067	HP 8920A Communications TS	3345U01242

Page Number

41 of 43.

Name of Test:

Frequency Stability (Temperature Variation)

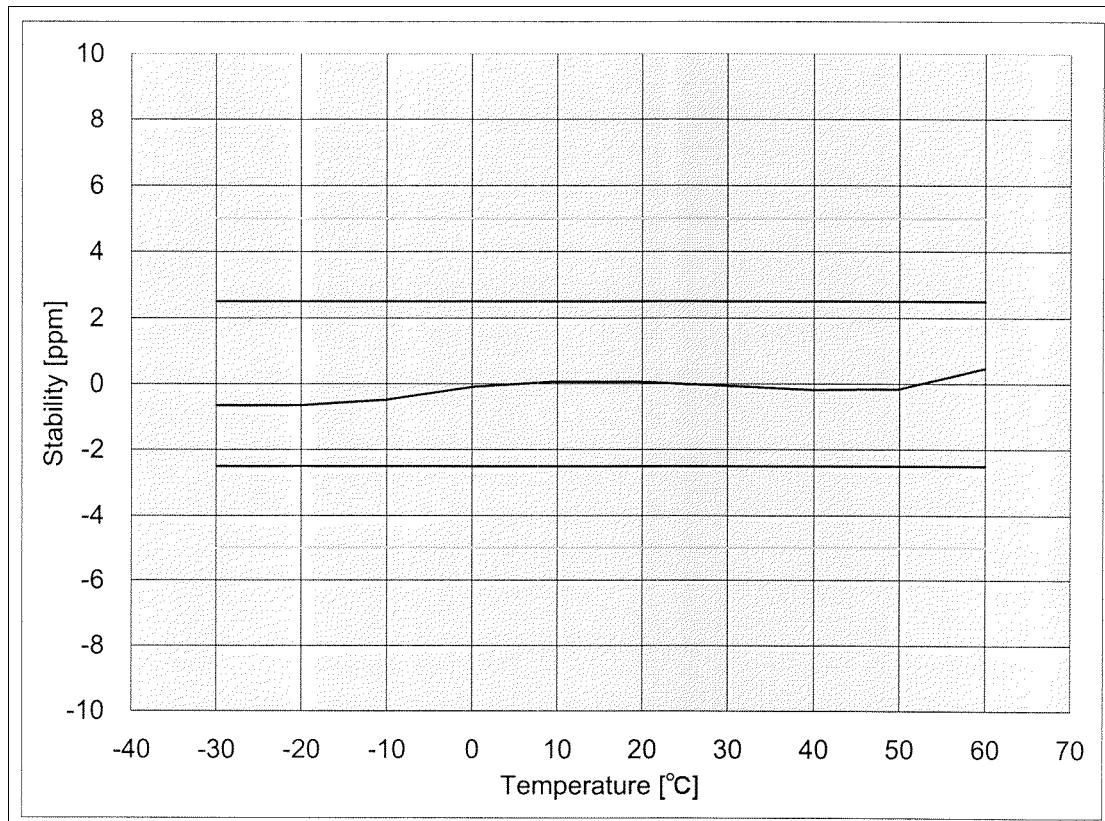

*Data supplied by Applicant.

Page Number 42 of 43.

Name of Test: Frequency Stability (Voltage Variation)

Specification: 47 CFR 2.1055(d)(1)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

Test Equipment: As per previous page

Measurement Procedure

1. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

Results: Frequency Stability (Voltage Variation)

g0410184: 2004-Jan-21 Wed 11:10:45

State: 0:General

Ambient Temperature: $23^{\circ}\text{C} \pm 3^{\circ}\text{C}$

Limit, ppm	= 5
Limit, Hz	= 805
Battery End Point (Voltage)	= 12.5

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	11.56	161.000000	0	0.00
100	13.6	161.000000	0	0.00
115	15.64	161.000000	0	0.00
92	12.5	160.999990	-10	-0.06

Performed by:



Daniel M. Dillon, Test Engineer

Page Number 43 of 43.

Name of Test: Necessary Bandwidth and Emission Bandwidth

Specification: 47 CFR 2.202(g)

Modulation = 16K0F3E

Necessary Bandwidth Calculation:

Maximum Modulation (M), kHz	= 3
Maximum Deviation (D), kHz	= 5
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 16.0

Modulation = 11K0F3E

Necessary Bandwidth Calculation:

Maximum Modulation (M), kHz	= 3
Maximum Deviation (D), kHz	= 2.5
Constant Factor (K)	= 1
Necessary Bandwidth (B _N), kHz	= $(2 \times M) + (2 \times D \times K)$
	= 11.0

Performed by:



Daniel M. Dillon, Test Engineer

END OF TEST REPORT

**Testimonial
and
Statement of Certification**

This is to Certify:

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certifying Engineer:



Morton Flom, P. Eng.