



# Electromagnetic Compatibility Test Report

Tests Performed on an Aclara Technologies, LLC

Radio Module Transceiver, Model: 101-2017-025

Radiometrics Document RP-9040



*Product Detail:*

FCC ID: LLB2017025

IC: 4546A-2017025

Equipment type: 450-470 MHz Transceiver

*Test Standards:*

US CFR Title 47, Chapter I, FCC Part 2 and 90

FCC Parts 2, 15, and 90 CFR Title 47: 2019

IC RSS-119 Issue 12: 2015

IC RSS-GEN Issue 5: 2019

*Tests Performed For:*

**Aclara Technologies, LLC**

77 Westport Plaza Drive, Suite 500  
Saint Louis, MO 63146

*Test Facility:*

**Radiometrics Midwest Corporation**

12 Devonwood Avenue  
Romeoville, IL 60446  
Phone: (815) 293-0772

*Test Dates:*

June 6 to 25 & September 19, 2019

Document RP-9040 Revisions:

Rev.	Issue Date	Affected Sections	Revised By
0	August 6, 2019		
1	August 23, 2019	6, 10.5.1 & 10.5.2	Joseph Strzelecki
2	September 23, 2019	Cover, 5.0 & 10.3.1	Joseph Strzelecki




## Table of Contents

1.0 ADMINISTRATIVE DATA .....	3
2.0 TEST SUMMARY AND RESULTS .....	3
3.0 EQUIPMENT UNDER TEST (EUT) DETAILS .....	4
3.1 EUT Description .....	4
4.0 TESTED SYSTEM DETAILS .....	4
4.1 Tested System Configuration .....	4
4.2 Special Accessories .....	4
4.3 Equipment Modifications .....	4
5.0 TEST SPECIFICATIONS AND RELATED DOCUMENTS .....	4
6.0 RADIOMETRICS' TEST FACILITIES .....	5
7.0 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS .....	5
8.0 CERTIFICATION .....	5
9.0 TEST EQUIPMENT TABLE .....	5
10.0 TEST SECTIONS .....	7
10.1 AC Conducted Emissions .....	7
10.2 Peak Output Power .....	10
10.3 Emissions Masks .....	11
10.3.1 Conducted Spurious Emissions .....	39
10.4 Occupied Bandwidth .....	42
10.5 Field Strength of Unwanted Spurious Radiation .....	51
10.5.1 Test Procedures .....	51
Figure 1. Drawing of Radiated Emissions Setup .....	52
10.5.2 Spurious Radiated Emissions Test Results .....	54
10.6 Frequency Stability .....	55
10.6.1 Frequency Stability Vs Temperature .....	55
10.6.2 Frequency Stability Vs Supply Voltage .....	55
10.6.3 Test Results for Frequency Stability .....	55
10.7 Transient Frequency Behavior .....	56
10.7.1 Test method .....	56
10.7.2 Limits of transient frequency .....	56
10.7.3 Test Results .....	57
10.7.4 Results for Time Periods t1 and t2 .....	57
10.7.5 Results for Time Period between t2 and t3 .....	59
10.7.6 Results for Time Period t3 .....	61
10.8 Radiated Emissions (Receive Mode) .....	63
10.8.1 Radiated Emissions Field Strength Sample Calculation .....	63
10.8.2 Spurious Radiated Emissions Test Results (Receive Mode) .....	63
11.0 MEASUREMENT INSTRUMENTATION UNCERTAINTY .....	65

Notice: This report must not be reproduced (except in full) without the written approval of Radiometrics Midwest Corporation.



## 1.0 ADMINISTRATIVE DATA

<i>Equipment Under Test:</i> An Aclara Technologies LLC., Radio Module Transceiver Model: 101-2017-025; Serial Number: 0028 These will be referred to as the EUT in this Report	
<i>Date EUT Received at Radiometrics:</i> May 28, 2019	<i>Test Dates:</i> June 6 to 25 & September 19, 2019
<i>Test Report Written and Authorized By:</i> Joseph Strzelecki Senior EMC Engineer	<i>Test Witnessed By:</i> The tests were not witnessed by personnel from Aclara Technologies, LLC
<i>Radiometrics' Personnel Responsible for Test:</i>  07/31/2019 Date Joseph Strzelecki Senior EMC Engineer NARTE EMC-000877-NE  Richard L. Tichgelaar EMC Technician  Dave Jarvis EMC Technician  Chris E. Dalessio EMC Technician	<i>EUT Checked By:</i> Joseph Strzelecki Richard L. Tichgelaar Dave Jarvis Radiometrics

## 2.0 TEST SUMMARY AND RESULTS

The EUT (Equipment Under Test) is a Radio Module Transceiver, Model 101-2017-025, manufactured by Aclara Technologies, LLC. The detailed test results are presented in a separate section. The following is a summary of the test results.

### Transmitter Requirements

Environmental Phenomena	Frequency Range	FCC Sections	RSS 119 Section	Test Result
RF Power Output	450-470 MHz	2.1046 & 90.205	5.4	Pass
Occupied Bandwidth Test; Emissions Masks	450-470 MHz	2.1049 & 90.209	5.5	Pass
Spurious RF Conducted Emissions	1-4700 MHz	2.1051 & 90.210	5.8	Pass
Field Strength of Spurious Radiation	30-4700 MHz	2.1053	5.3	Pass
Frequency Vs. Temperature	450-470 MHz	2.1055 & 90.213	5.3	Pass
Frequency Vs. Voltage	450-470 MHz	2.1055 & 90.213	5.3	Pass
Transient Frequency Behavior	450-470 MHz	90.214	5.9	Pass
AC Conducted Emissions	0.15-30 MHz	15.207	RSS Gen Sec. 8.8	Pass



### 3.0 EQUIPMENT UNDER TEST (EUT) DETAILS

#### 3.1 EUT Description

The EUT is a Radio Module Transceiver. The EUT is a module that will be installed in only Aclara products. It sends data over a narrow-band RF transmission link. The EUT is a 450-470 MHz transceiver, manufactured by Aclara Technologies, LLC. The RF communications link is encrypted in both directions. The EUT was in good working condition during the tests, with no known defects.

### 4.0 TESTED SYSTEM DETAILS

#### 4.1 Tested System Configuration

The system was configured for testing in a typical fashion. The testing was performed in conditions as close as possible to installed conditions. Wiring was consistent with manufacturer's recommendations. The identification for all equipment used in the tested system is:

**Tested System Configuration List**

Item	Description	Type*	Manufacturer	Model Number	Serial Number
1	Aclara Radio Module	E	Aclara Technologies, LLC	101-2017-025	0028
2	Power Supply	P	PWR Plus	PWR-TAA03610	180600109
3	Lap Top Computer	S	Panasonic	CF-52	RMC # NB-11

\* Type: E = EUT; P = Peripheral; S = Support Equipment

#### 4.2 Special Accessories

No special accessories were used during the tests in order to achieve compliance.

#### 4.3 Equipment Modifications

No modifications were made to the EUT at Radiometrics' test facility in order to comply with the standards listed in this report.

### 5.0 TEST SPECIFICATIONS AND RELATED DOCUMENTS

Document	Date	Title
FCC CFR Title 47	2019	Code of Federal Regulations Title 47, Chapter 1, Federal Communications Commission, Part 15 & 90 - Radio Frequency Devices
ANSI C63.4-2014	2014	Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/TIA-603-E	2016	Land Mobile FM or PM Communications Equipment – Measurement and Performance Standards
IC RSS-Gen Issue 5	2019	General Requirements for Compliance of Radio Apparatus
IC RSS-119 Issue 12	2015	Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.41-960 MHz



## 6.0 RADIOMETRICS' TEST FACILITIES

The results of these tests were obtained at Radiometrics Midwest Corp. in Romeoville, Illinois, USA. Radiometrics is accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025: 2005 "General Requirements for the Competence of Calibration and Testing Laboratories". Radiometrics' Lab Code is 121191 and Certification Number is 1495.01. A copy of the accreditation can be accessed on our web site ([www.radiomet.com](http://www.radiomet.com)). Radiometrics accreditation status can be verified at A2LA's web site ([www.a2la2.org](http://www.a2la2.org)).

The following is a list of shielded enclosures located in Romeoville, Illinois used during the tests:

Chamber A: Is an anechoic chamber that measures 24' L X 12' W X 12' H. The walls and ceiling are fully lined with ferrite absorber tiles. The floor has a 10' x 10' section of ferrite absorber tiles located in the center. Panashield of Rowayton, Connecticut manufactured the chamber. The enclosure is NAMAS certified.

Chamber B: Is a shielded enclosure that measures 20' L X 12' W X 8' H. Erik A. Lindgren & Associates of Chicago, Illinois manufactured the enclosure.

Chamber C: Is a shielded enclosure that measures 17' L X 10' W X 8' H. Lindgren RF Enclosures Inc. of Addison, Illinois manufactured the enclosure.

Chamber E: Is a custom-made anechoic chamber that measures 52' L X 30' W X 18' H. The walls and ceiling are fully lined with RF absorber. Pro-shield of Collinsville, Oklahoma manufactured the chamber.

A separate ten-foot long, brass plated, steel ground rod attached via a 6-inch copper braid grounds each of the above chambers. Each enclosure is also equipped with low-pass power line filters.

The FCC has accepted these sites as test site number US1065. The FCC test site Registration Number is 732175. Details of the site characteristics are on file with the Industry Canada as site number IC3124A.

## 7.0 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS

There were no deviations or exclusions from the test specifications.

## 8.0 CERTIFICATION

Radiometrics Midwest Corporation certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specification. The results relate only to the EUT listed herein. Any modifications made to the EUT subsequent to the indicated test date will invalidate the data and void this certification.

## 9.0 TEST EQUIPMENT TABLE

RMC ID	Manufacturer	Description	Model No.	Serial No.	Frequency Range	Cal Period	Cal Date
AMP-05	RMC/Celeritek	Pre-amplifier	MW110G	1001	1.0-12GHz	12 Mo.	01/10/19
ANT-06	EMCO	Log-Periodic Ant.	3146	1248	200-1000MHz	24 Mo.	12/05/17
ANT-13	EMCO	Horn Antenna	3115	2502	1.0-18GHz	24 Mo.	01/16/19
ANT-36	Ailtech-Eaton	Horn Antenna	96001	2013	1.0-18GHz	24 Mo.	11/19/18
ANT-66	ETS-Lindgren	Horn Antenna	3115	62580	1.0-18GHz	24 Mo.	03/05/19



RMC ID	Manufacturer	Description	Model No.	Serial No.	Frequency Range	Cal Period	Cal Date
ANT-68	EMCO	Log Periodic Antenna	93146	9604-4456	200-1000MHz	24 Mo.	12/05/17
ANT-79	AH Systems	Bicon Antenna	SAS-540	293	20-330MHz	24 Mo.	12/14/18
ANT-80	AH Systems	Bicon Antenna	SAS-540	294	20-330MHz	24 Mo.	12/14/18
ATT-53	Weinschel	Attenuator (20 dB)	23-20-34	CG7857	DC-18 GHz	12 Mo	11/06/18
CAB-044A	Teledyne	Coaxial Cable	N/A	044A	DC-18 GHz	24 Mo.	05/15/18
CAB-090C	Teledyne	Coaxial Cable	N/A	090C	DC-18 GHz	24 Mo.	05/15/18
CAB-114F	Teledyne	Coaxial Cable	N/A	114F	DC-18 GHz	24 Mo.	05/15/18
CAB-114G	Teledyne	Coaxial Cable	N/A	114G	DC-18 GHz	24 Mo.	05/15/18
CAB-142G	Teledyne	Coaxial Cable	N/A	142G	DC-18 GHz	24 Mo.	05/09/18
CAB-144F	Teledyne	Coaxial Cable	N/A	142G	DC-18 GHz	24 Mo.	05/15/18
CAB-160B	Teledyne	Coaxial Cable	N/A	160B	DC-18 GHz	24 Mo.	05/09/18
CAB-210A	Teledyne	Coaxial Cable	N/A	210A	DC-18 GHz	24 Mo.	05/09/18
CAB-210B	Teledyne	Coaxial Cable	N/A	210B	DC-18 GHz	24 Mo.	05/09/18
CAB-272A	Teledyne	Coaxial Cable	N/A	272A	DC-18 GHz	24 Mo.	05/09/18
CAB-1090	Teledyne	Coaxial Cable	N/A	1090	DC-18 GHz	24 Mo.	05/16/18
CDT-01	Wilttron	Crystal RF Detector	75N50	CDT-01	DC-18GHz	N/A	NCR
CNT-01	Racal-Dana	Freq. Counter	1991	910357	DC-160MHz	24 Mo.	07/26/18
COM-01	Anaren	Coupler	10023-3	COM-01	250-1000MHz	N/A	NCR
DIR-19	Narda	Directional Coupler	3000-10	01174	200-500MHz	N/A	NCR
DMM-11	Fluke	DMM	17B	23490125	DC-100kHz	24 Mo.	04/05/18
DMM-14	Fluke	DMM	17B+	42682153WS	DC-100kHz	24 Mo	02/20/19
HPF-01	Solar	High Pass Filter	7930-100	HPF-1	0.15-30MHz	24 Mo.	03/04/18
HPF-09	Mini-Circuits	High Pass Filter	SHP-700+	RUU75101737	700-3000MHz	12 Mo.	10/18/18
LSN-01	Electrometrics	50 uH LISN	FCC/VDE 50/2	1001	0.01-30MHz	24 Mo.	06/30/17
PWM-01	Boonton	Power Meter	4230	22503	50kHz-18GHz	24 Mo.	12/26/17
REC-20	HP / Agilent	Spectrum Analyzer	85460A/84562A	33330A00135 3410A00178	30Hz-6GHz	24 Mo.	08/03/17
REC-21	Agilent	Spectrum Analyzer	E7405A	MY45118341	9kHz-26.5 GHz	24 Mo.	01/06/18
REC-22	Rohde Schwarz	Spectrum Analyzer	ESIB 26	100145	26.5 GHz	24 Mo	08/29/17
REC-31	Agilent	Spectrum Analyzer	E7402A	US41160415	9kHz-3GHz	24 Mo.	05/20/19
SCP-02	Tektronix	Oscilloscope	TDS784A	B040258	DC-1GHz	24 Mo.	01/15/19
SIG-30	Rohde Schwarz	Signal Generator	SMC100A	102914	9k-3.2GHz	36 Mo.	11/29/17
SIG-31	Rohde & Schwarz	Vector Signal Generator	SMJ 100A	101395	100kHz-6GHz	36 Mo.	08/25/17
TC-01	GS Blue M Electric	Temperature Chamber	ETC-04S-E	0003-ETC-201	-40 to 100 Deg C	24 Mo.	01/03/18
THM-02	Fluke	Temp/Humid Meter	971	93490471	N/A	24 Mo.	10/17/17

Note: All calibrated equipment is subject to periodic checks.

NCR – No Calibration Required. Device monitored by calibrated equipment. N/A: Not Applicable.

The Tests with REC-20 were performed prior to 08/02/2019

The Tests with REC-22 were performed prior to 08/28/2019



## 9.1 Test Software

Software Company	Test Software Name	Version	Applicable Tests
Radiometrics	REREC11D	06.18.18	RF Radiated Emissions (ISED; FCC Part 15)
Agilent	PSA/ESA-E/L/EMC	2.4.0.42	Bandwidth and screen shots

## 10.0 TEST SECTIONS

### 10.1 AC Conducted Emissions

The tests and limits are in accordance with FCC section 15.207 and RSS Gen section 8.8.

A computer-controlled analyzer was used to perform the conducted emissions measurements. The frequency range was divided into 500 subranges equally spaced on a logarithmic scale. The computer recorded the peak of each subrange. This data was then plotted on a semi-log graph generated by the computer. Adjusting the positions of the cables and orientation of the test system then maximizes the highest emissions.

Mains Conducted emission measurements were performed using a 50 Ohm/50 uH Line Impedance Stabilization Network (LISN) as the pick-up device. Measurements were repeated on both leads within the power cord. If the EUT power cord exceeded 80 cm in length, the excess length of the power cord was made into a 30 to 40 cm bundle near the center of the cord. The LISN was placed on the floor at the base of the test platform and electrically bonded to the ground plane.

**FCC Limits of Conducted Emissions at the AC Mains Ports**

Frequency Range (MHz)	Class B Limits (dBuV)	
	Quasi-Peak	Average
0.150 - 0.50*	66 - 56	56 - 46
0.5 - 5.0	56	46
5.0 - 30	60	50

\* The limit decreases linearly with the logarithm of the frequency in this range.

The initial step in collecting conducted data is a peak detector scan and the plotting of the measurement range. Significant peaks are then marked as shown on the following table, and these signals are then measured with the quasi-peak detector. The following represents the worst case emissions from the power cord, after testing all modes of operation.


Test Date : June 12, 2019

The Amplitude listed are the final corrected values with cable and LISN Loss.




Radiometrics Midwest Corporation

Test Report for the Aclara, Radio Module Transceiver, Model 101-2017-025

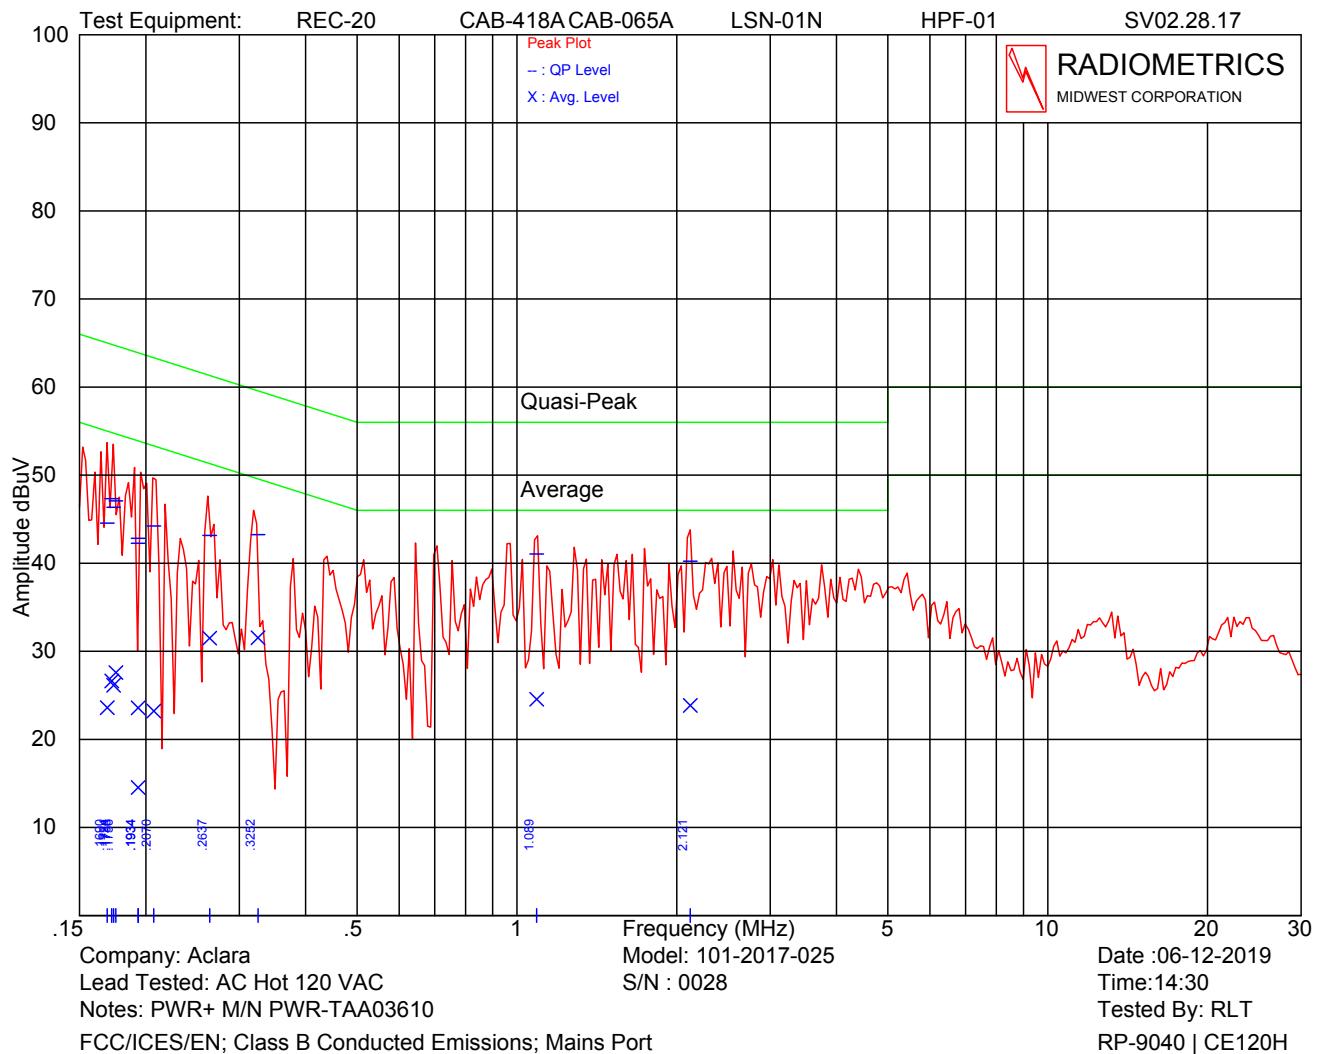

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.169	44.5	65.0	23.6	55.0	20.5
0.172	47.3	64.8	26.6	54.8	17.5
0.174	46.3	64.8	26.1	54.8	18.4
0.176	47.1	64.7	27.6	54.7	17.6
0.193	42.8	63.9	23.6	53.9	21.1
0.207	44.2	63.3	23.2	53.3	19.1
0.264	43.2	61.3	31.5	51.3	18.2
0.325	43.3	59.6	31.5	49.6	16.3
1.089	41.0	56.0	24.6	46.0	15.0
2.121	40.2	56.0	23.8	46.0	15.8

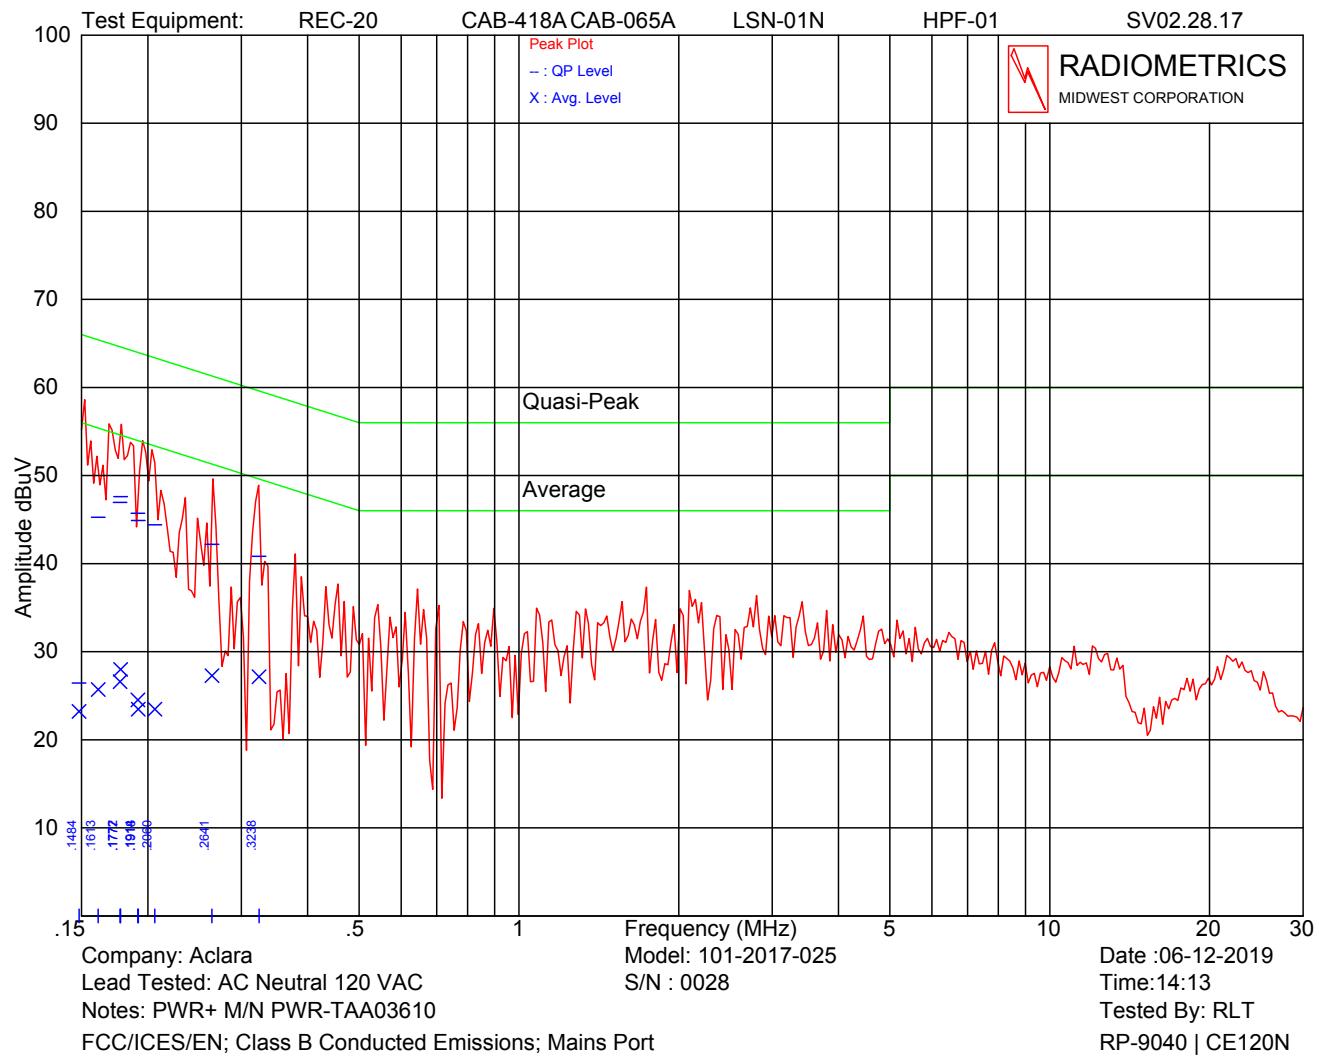

Frequency (MHz)	QP Amplitude (dBuV)	QP Limit (dBuV)	Average Amplitude (dBuV)	Average Limit (dBuV)	Margin (dB)
0.148	26.5	66.1	23.2	56.1	32.9
0.161	45.3	65.4	25.7	55.4	20.1
0.177	47.0	64.6	26.6	54.6	17.7
0.178	47.6	64.6	28.0	54.6	17.0
0.191	45.7	64.0	24.5	54.0	18.3
0.192	44.9	64.0	23.5	54.0	19.1
0.206	44.4	63.4	23.5	53.4	19.0
0.264	42.2	61.3	27.3	51.3	19.1
0.324	40.8	59.6	27.1	49.6	18.8

\* QP readings are quasi-peak with a 9 kHz bandwidth and no video filter.

Judgment: Passed by at least 6 dB



## 10.2 Peak Output Power

The peak power was measured by connecting the EUT antenna port to the spectrum analyzer via a low loss coaxial cable and an appropriate power attenuator.

Model	101-2017-025	Specification	FCC part 90.205 RSS-119 Section 5.4
Serial Number	0028	Test Date	06/07/2019
Test Personnel	Richard Tichgelaar	Test Location	Chamber B
Test Equipment	Power meter (PWM-01)		

### Peak Output Power Standard Mode: SoftwareTest Application Power Level Setting 2

TX Freq MHz	Reading dBm	Atten & Cable	Total dBm	Peak Power Watts	Antenna Gain dBi	ERP Watts
450.025	3.54	20.2	23.74	0.237	5	0.456
460.000	3.55	20.2	23.75	0.237	5	0.457
469.975	4.11	20.2	24.31	0.270	5	0.520

### Peak Output Power Extended Mode: SoftwareTest Application Power Level Setting 5

TX Freq MHz	Reading dBm	Atten & Cable	Total dBm	Peak Power Watts	Antenna Gain dBi	ERP Watts
450.0250	8.90	20.2	29.1	0.813	5.0	1.567
460.0000	8.69	20.2	28.89	0.774	5.0	1.493
469.9750	8.96	20.2	29.16	0.824	5.0	1.589

### Peak Output Power Maximum Mode: SoftwareTest Application Power Level Setting 7

TX Freq MHz	Reading dBm	Atten & Cable	Total dBm	Peak Power Watts	Antenna Gain dBi	ERP Watts
450.0250	9.94	20.2	30.14	1.033	5.0	1.991
460.0000	9.96	20.2	30.16	1.038	5.0	2.000
469.9750	10.11	20.2	30.31	1.074	5.0	2.070

Judgement: Pass

The fundamental emission ERP limit is 100 watts (50 dBm) for an 8 km service area radius.

Note that in decibel units:

ERP = EIRP - 2.15 = P+G-2.15

where:

P = transmitter output power in dB(W)

G = Gain of the transmitting antenna in dBi



### 10.3 Emissions Masks

Model	101-2017-025	Specification	FCC Part 90.209 & 90.210 RSS-119 Section 5.5
Serial Number	0028	Test Date	June 6 & September 19, 2019
Test Personnel	Richard Tichgelaar	Test Location	Chamber C
Test Equipment	Spectrum Analyzer (REC-21), ( REC-43 )		

The spectrum analyzer was set to the MAX HOLD mode to record the worst case of the modulation. The EUT was transmitting at its maximum data rate. The trace was allowed to stabilize. All Channels are 12.5 kHz. The emissions Mask D is from FCC part 90.210.


- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d - 2.88 \text{ kHz})$  dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P)$  dB.


For all Frequencies beyond 25 kHz from the center of the transmit frequency, the worst-case limit was used. The red line is a 50-dB reduction from carrier based on 1 watt.


The pink line in the 4 GHz wide plots is calculated as reduction from the carrier of  $50 + 10 \log (P)$  in dB.





## Emission Masks: Maximum Power

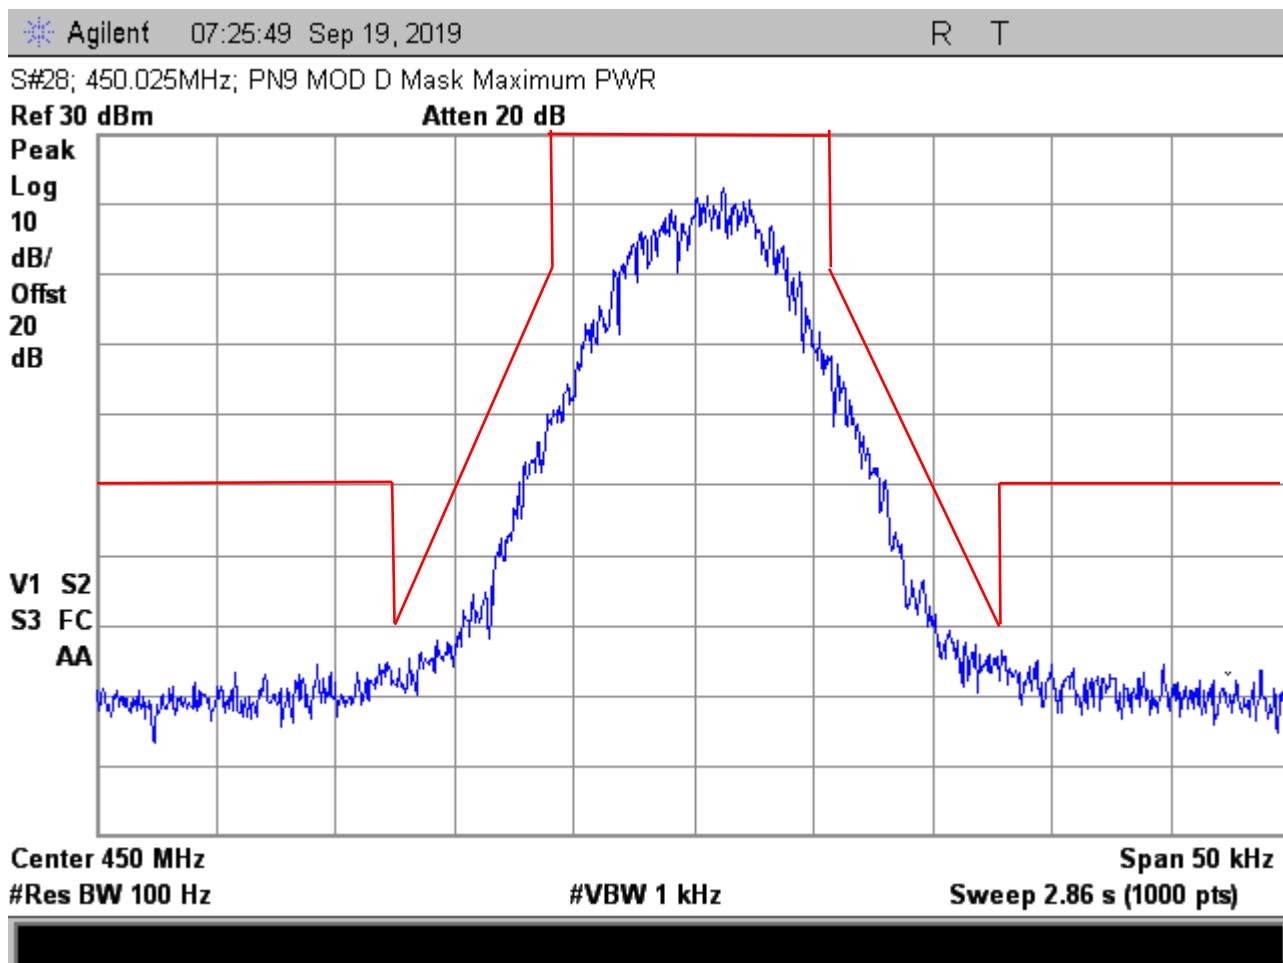


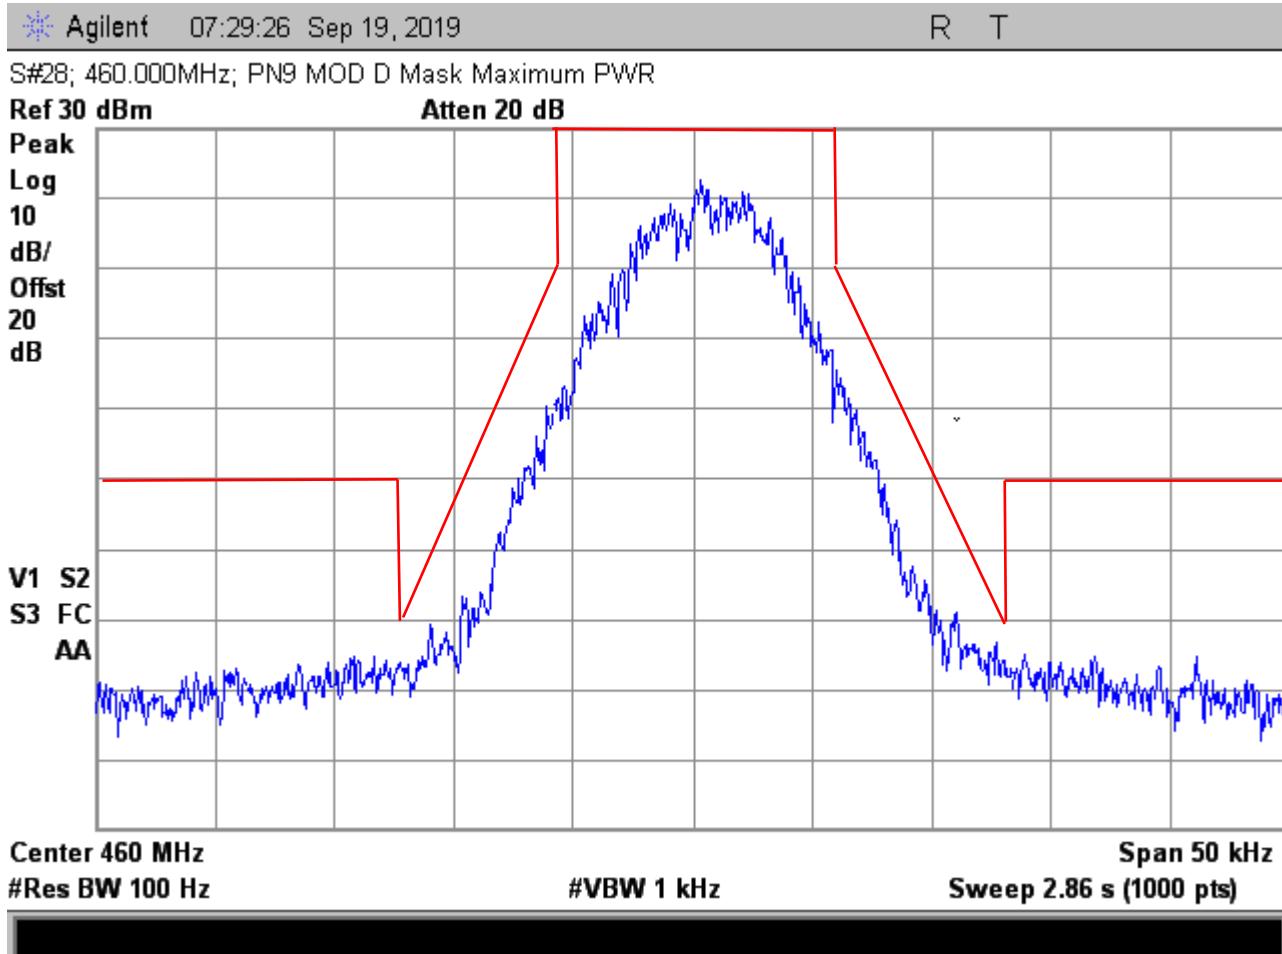


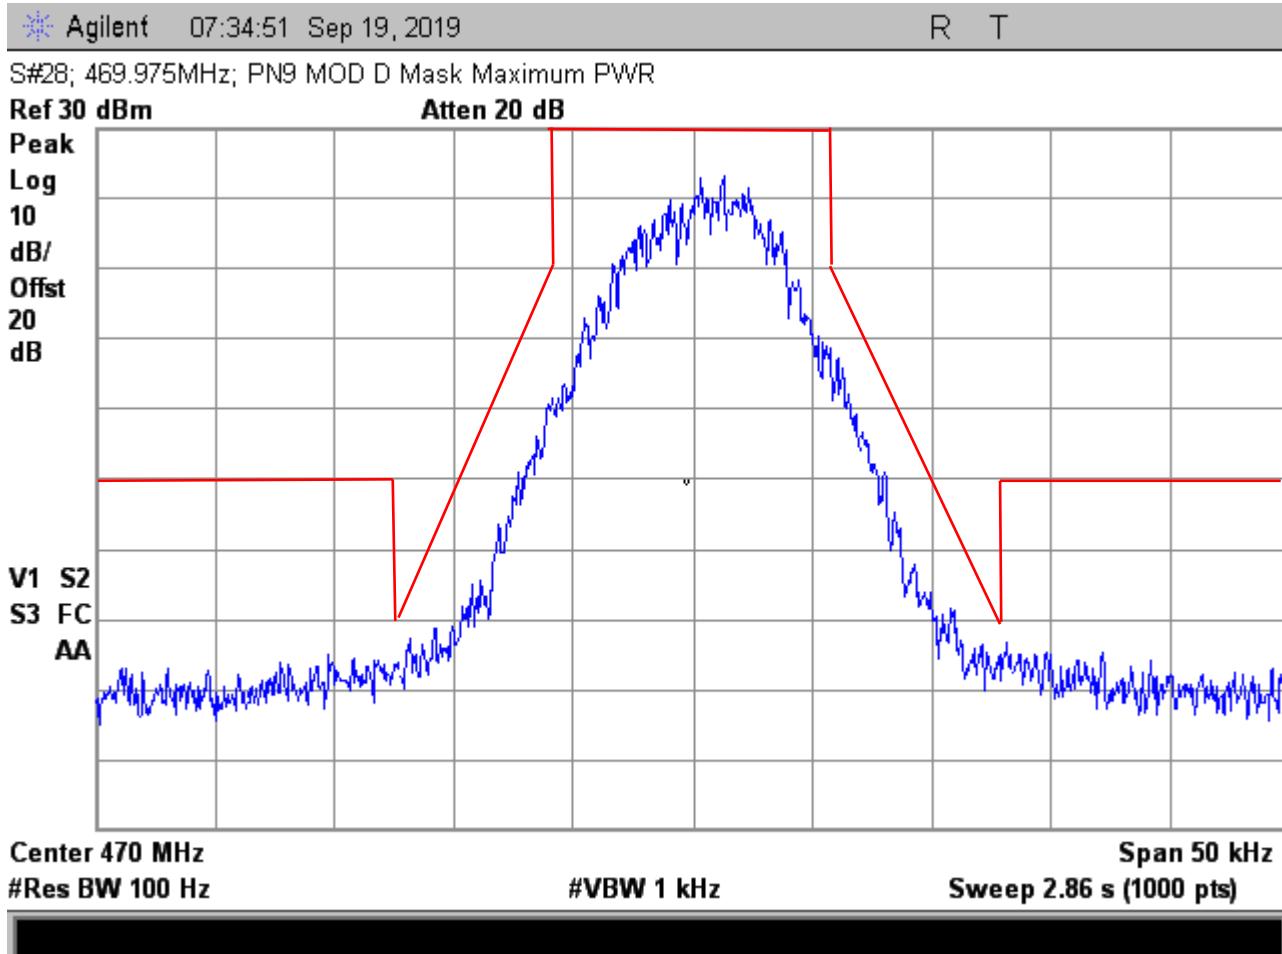


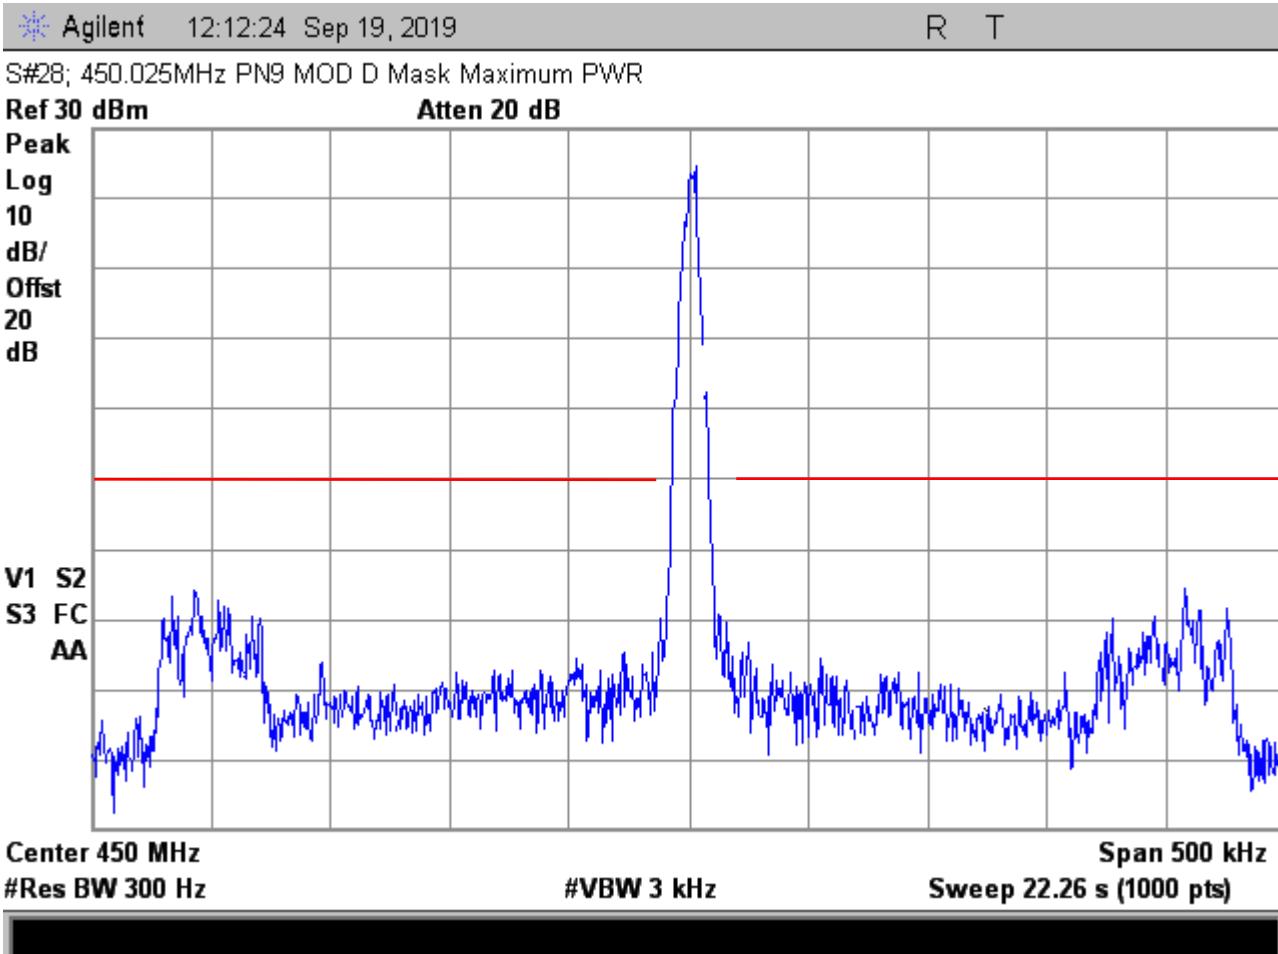


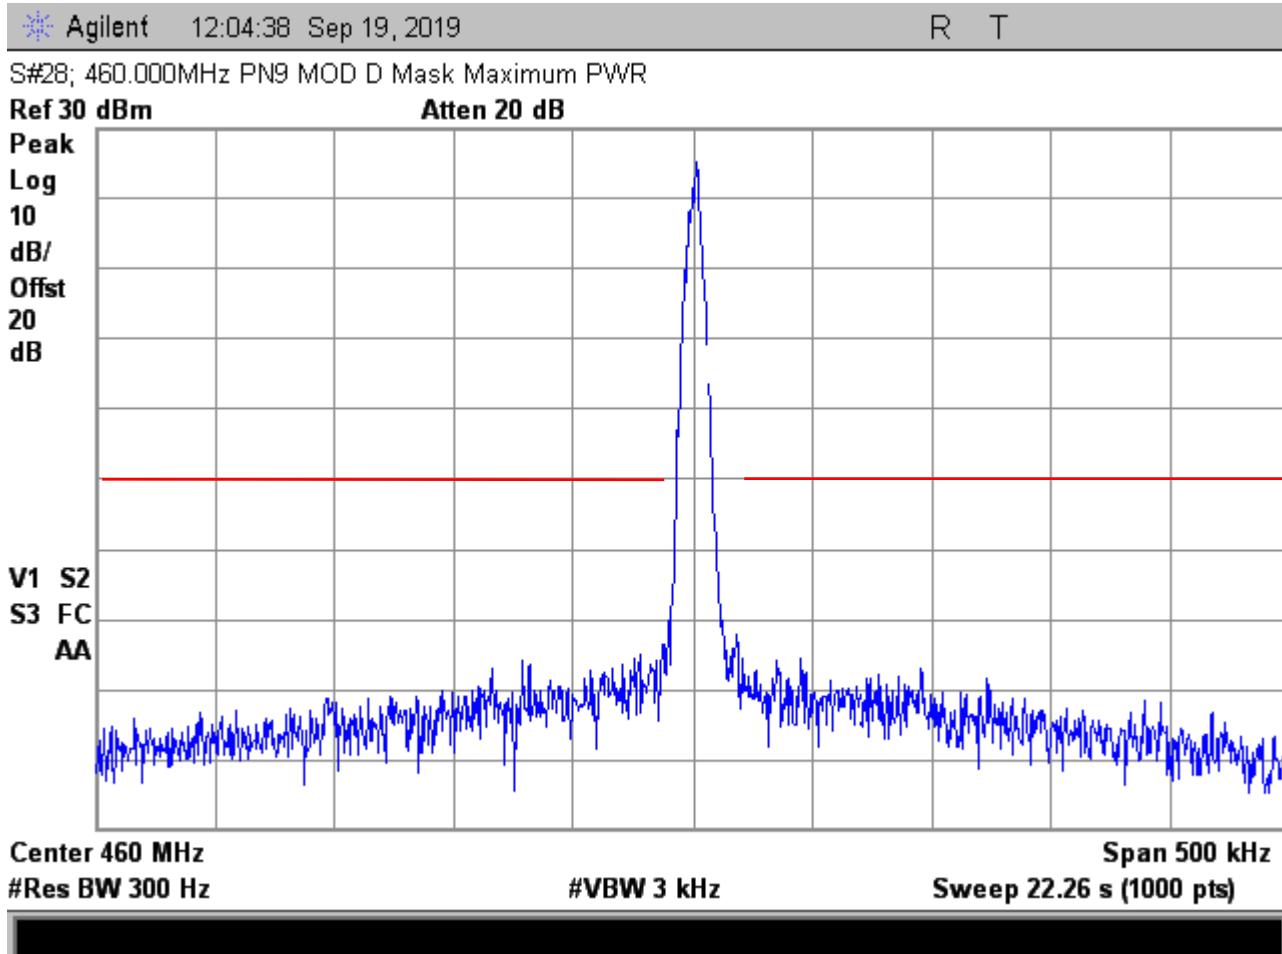

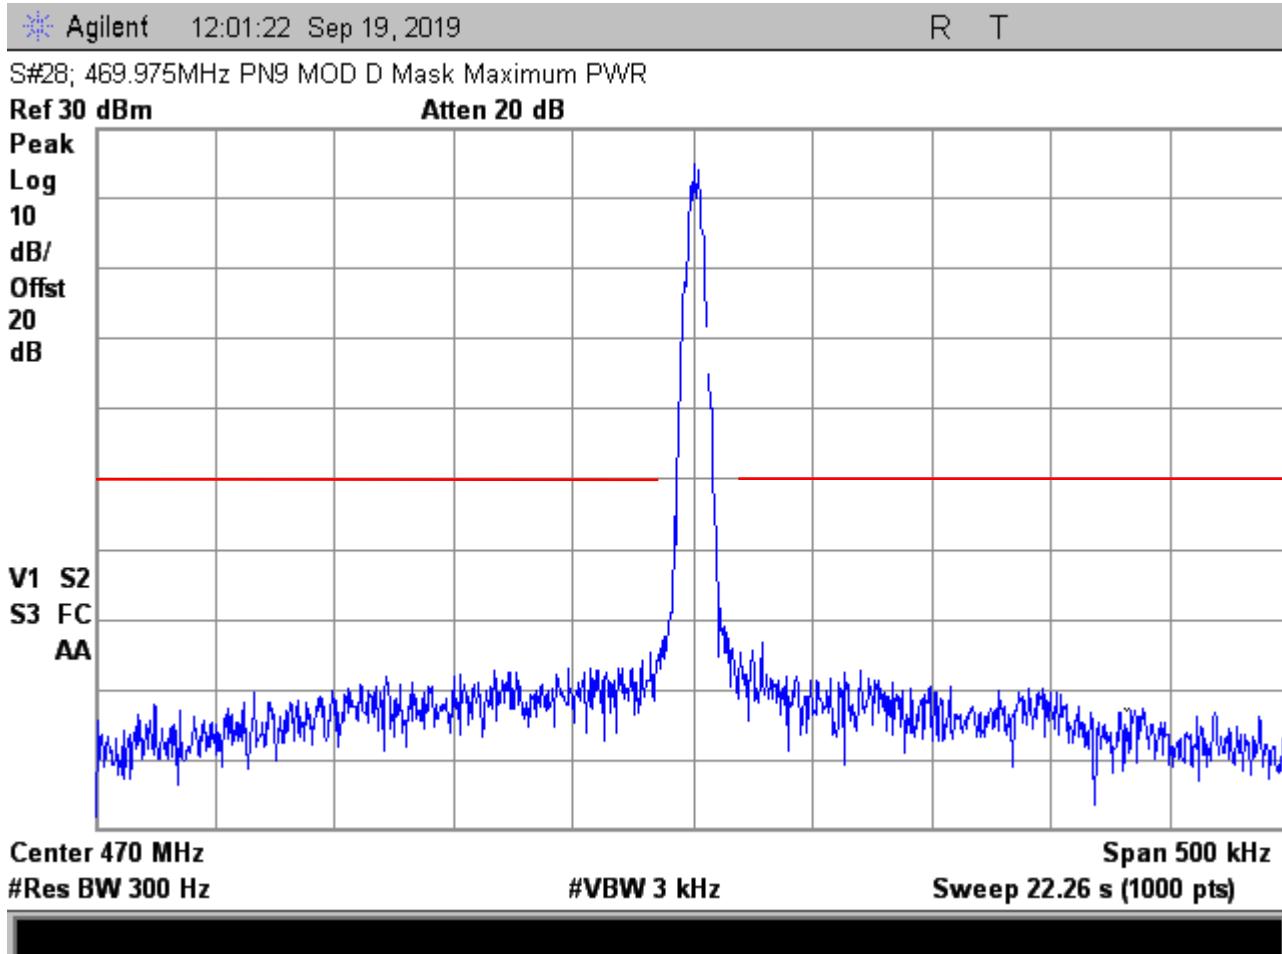

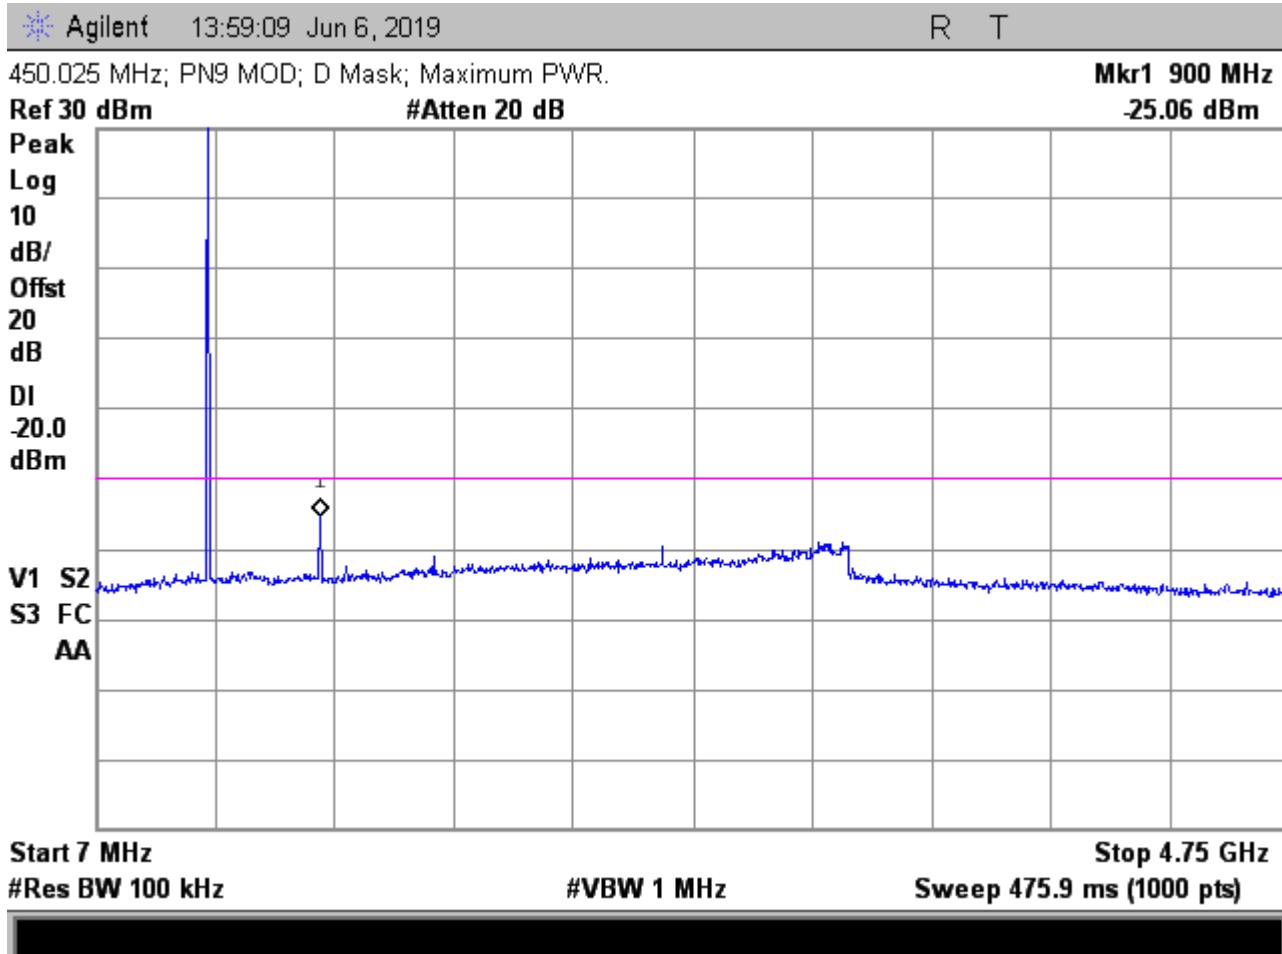

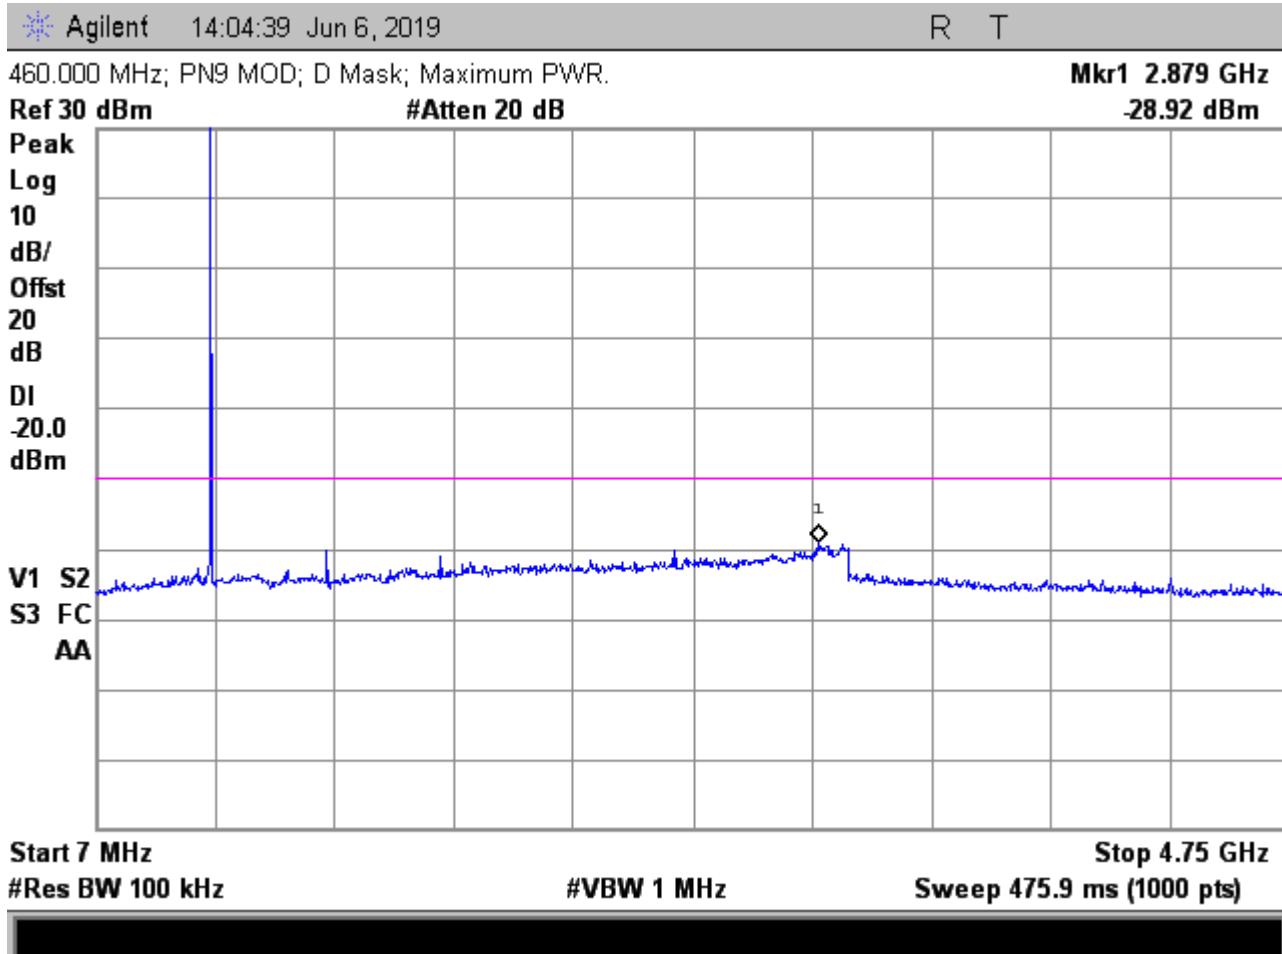


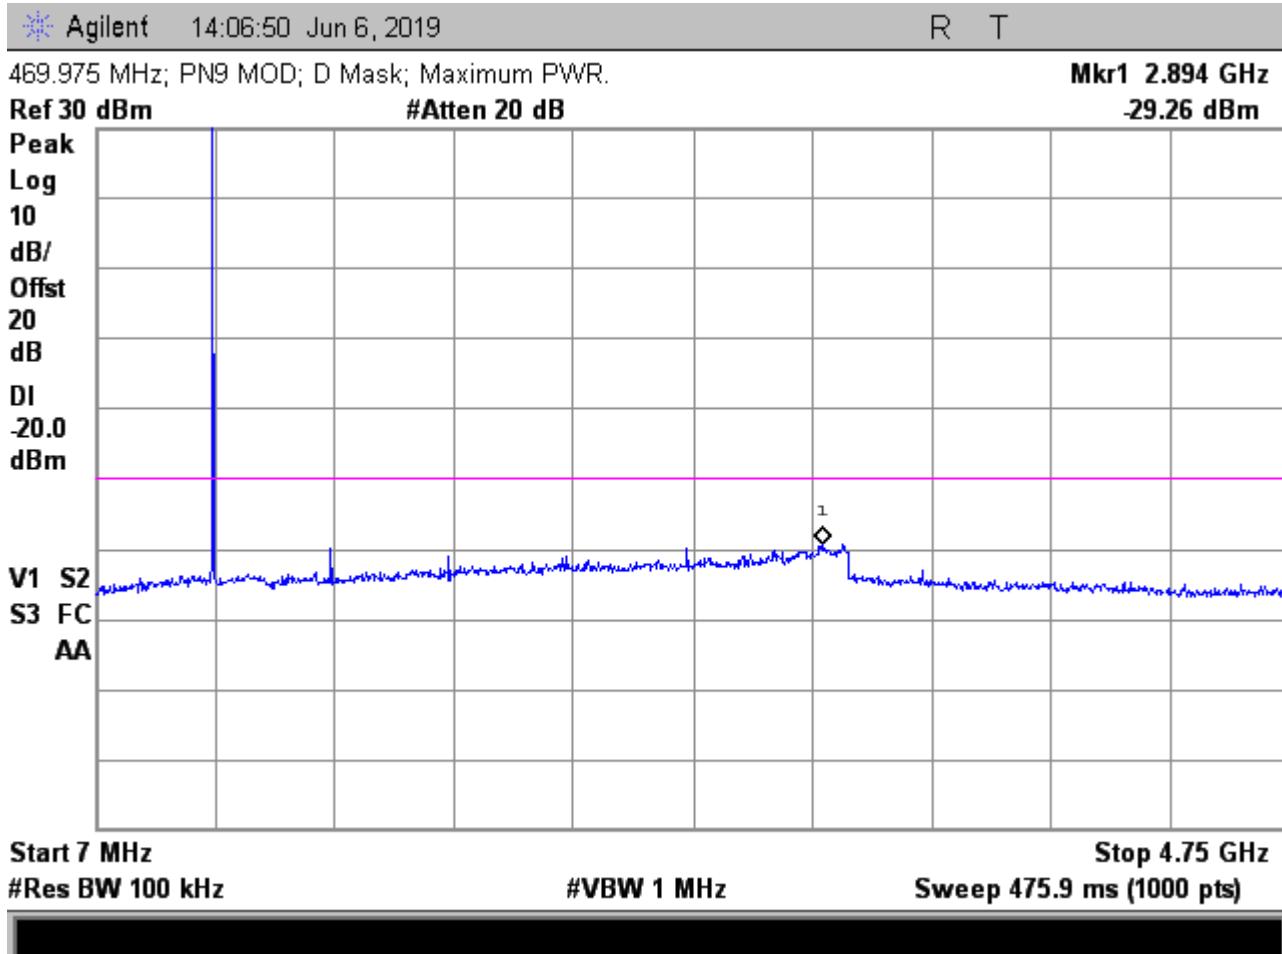



Judgement: Pass





## Emission Masks: Extended Power

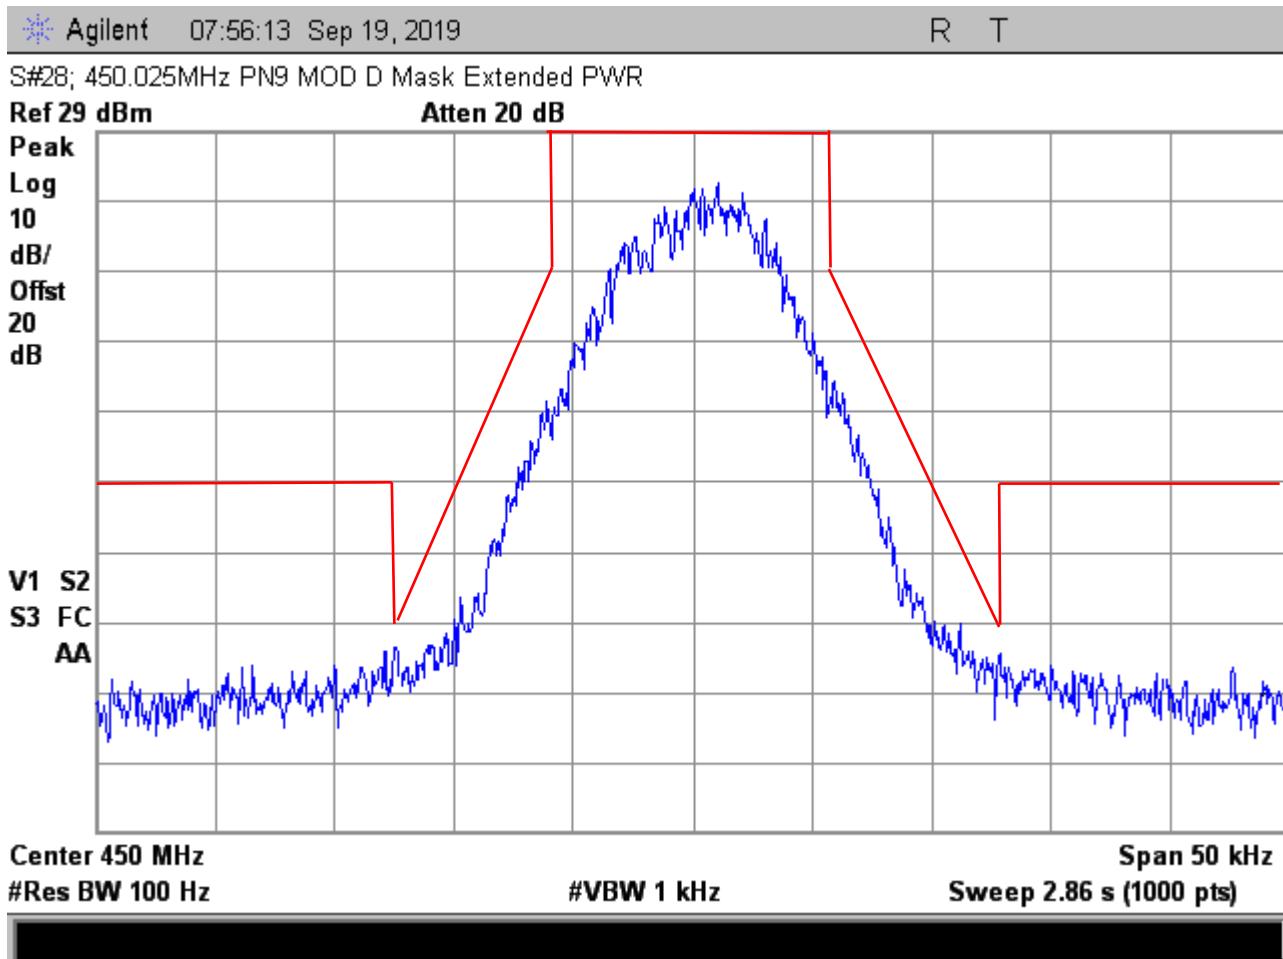


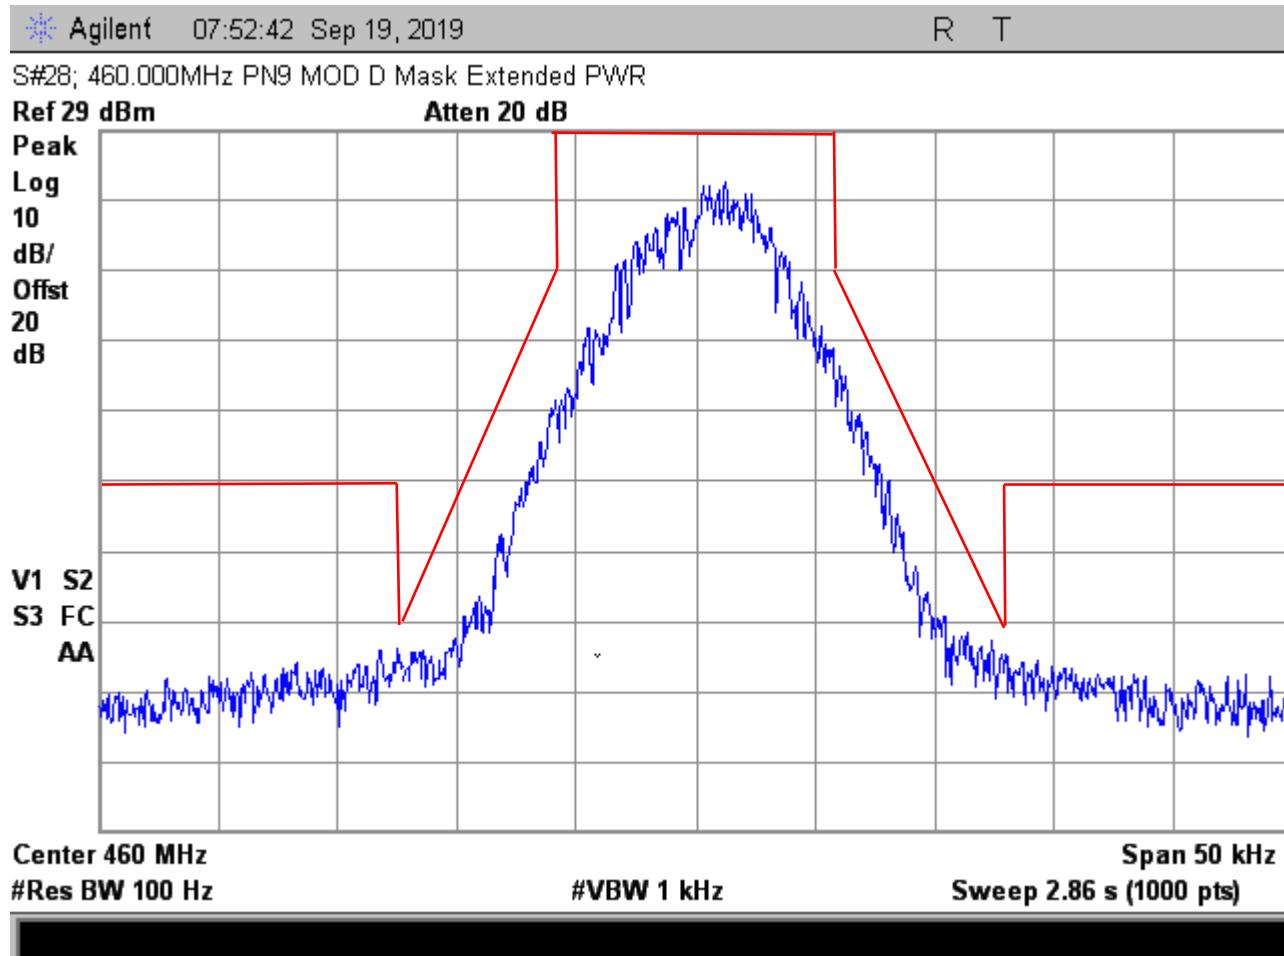


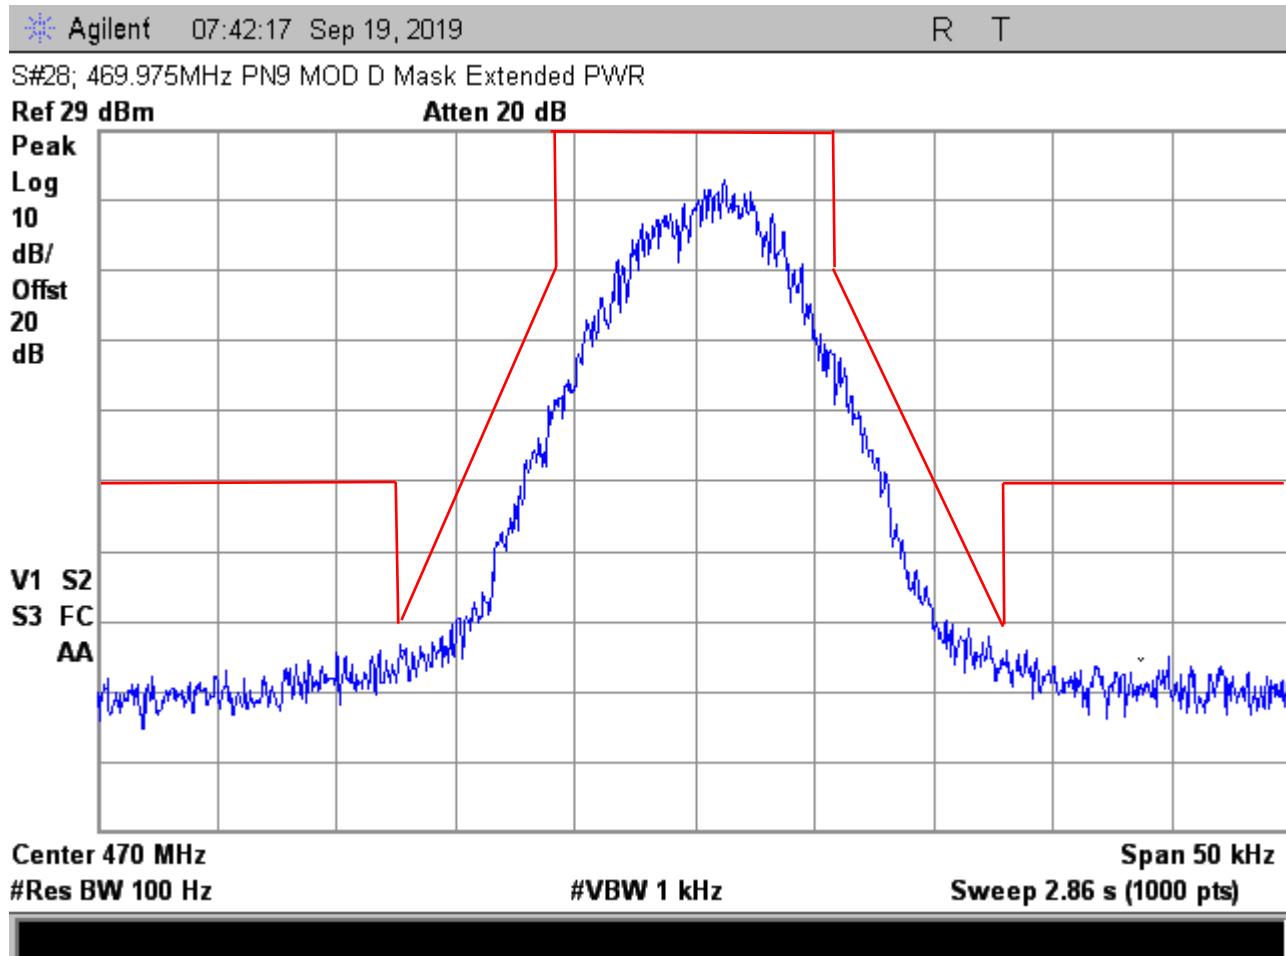


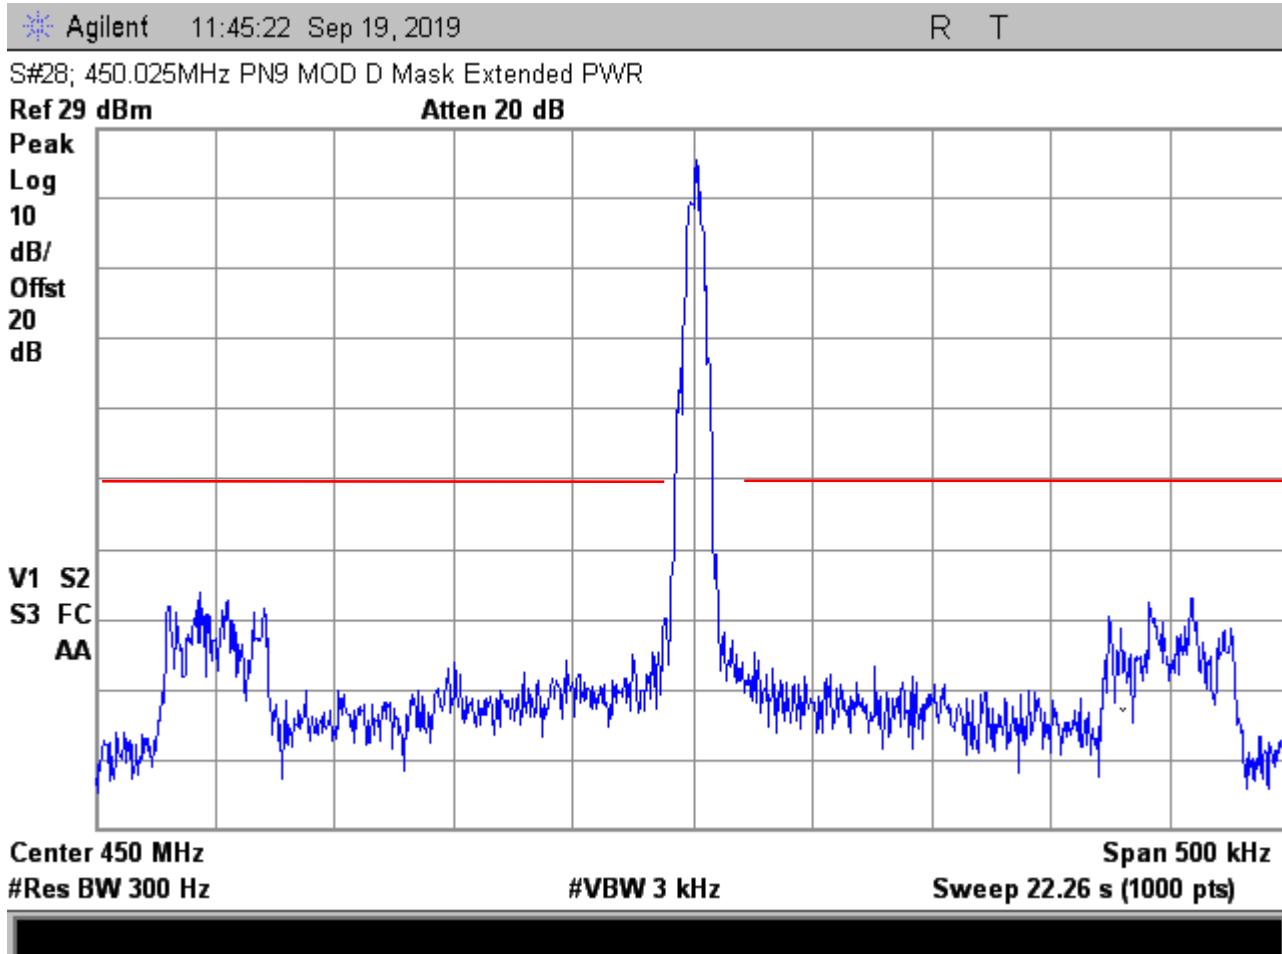


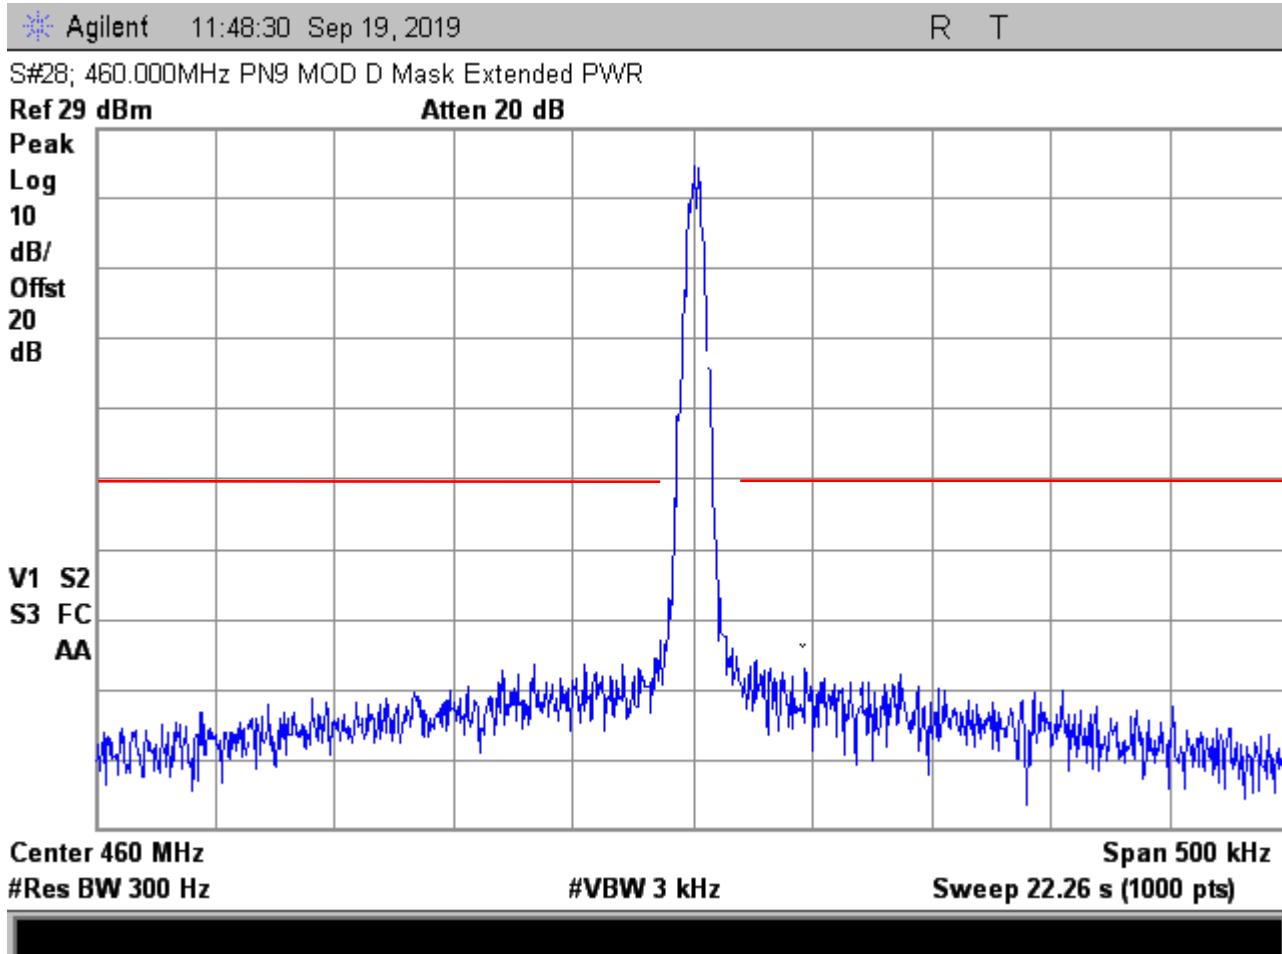

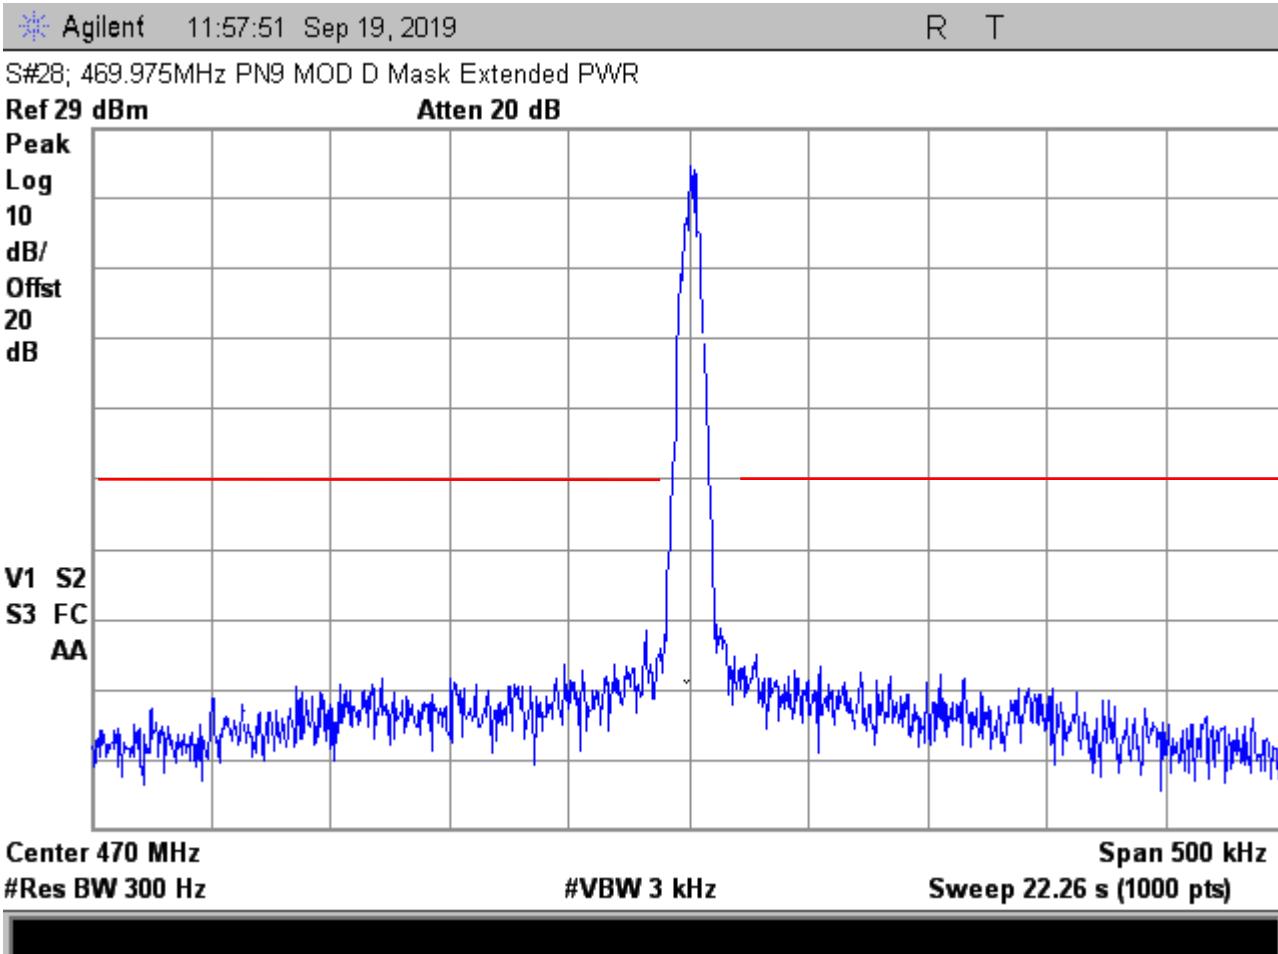


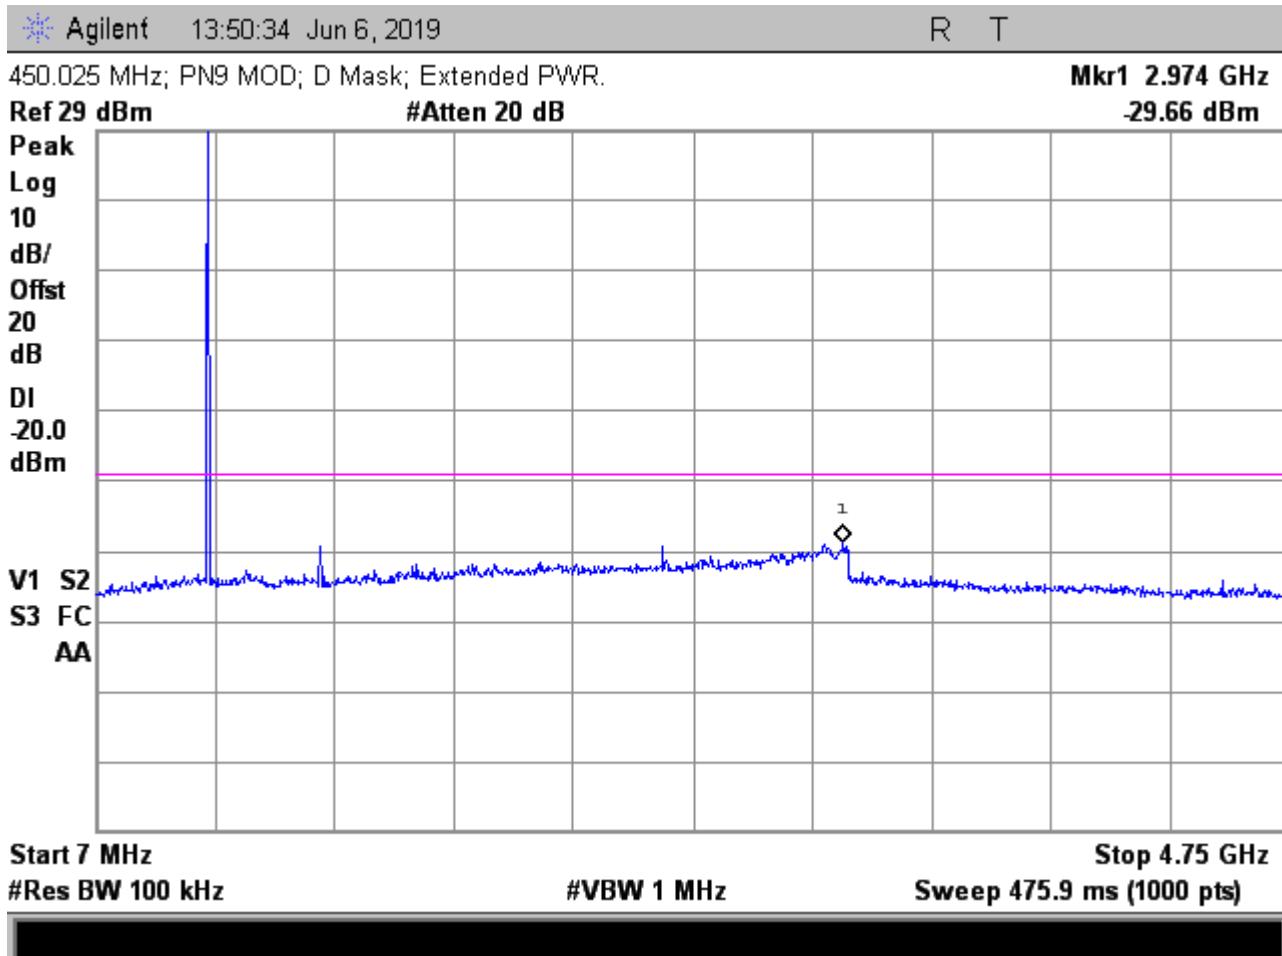


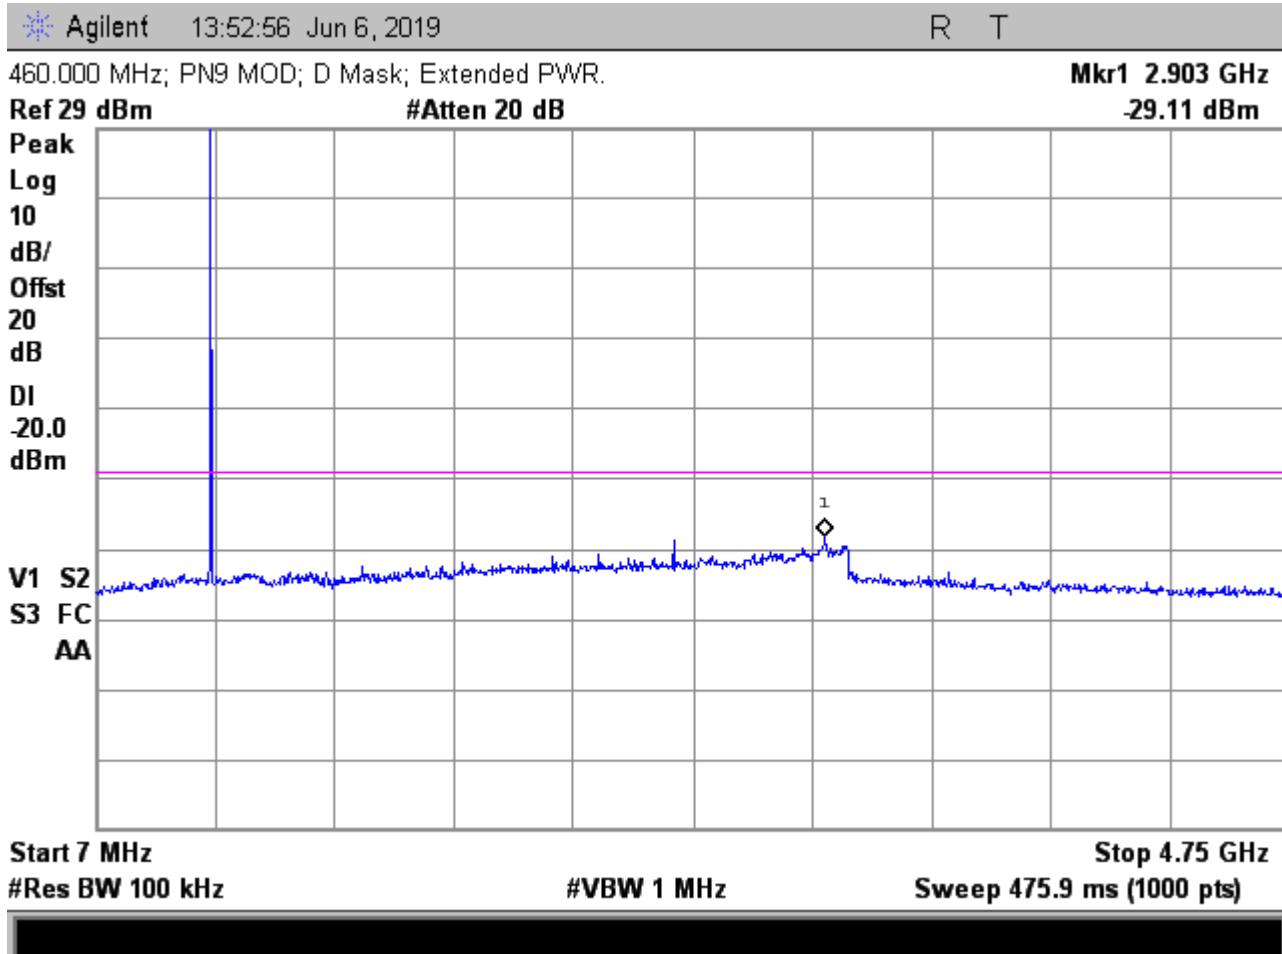


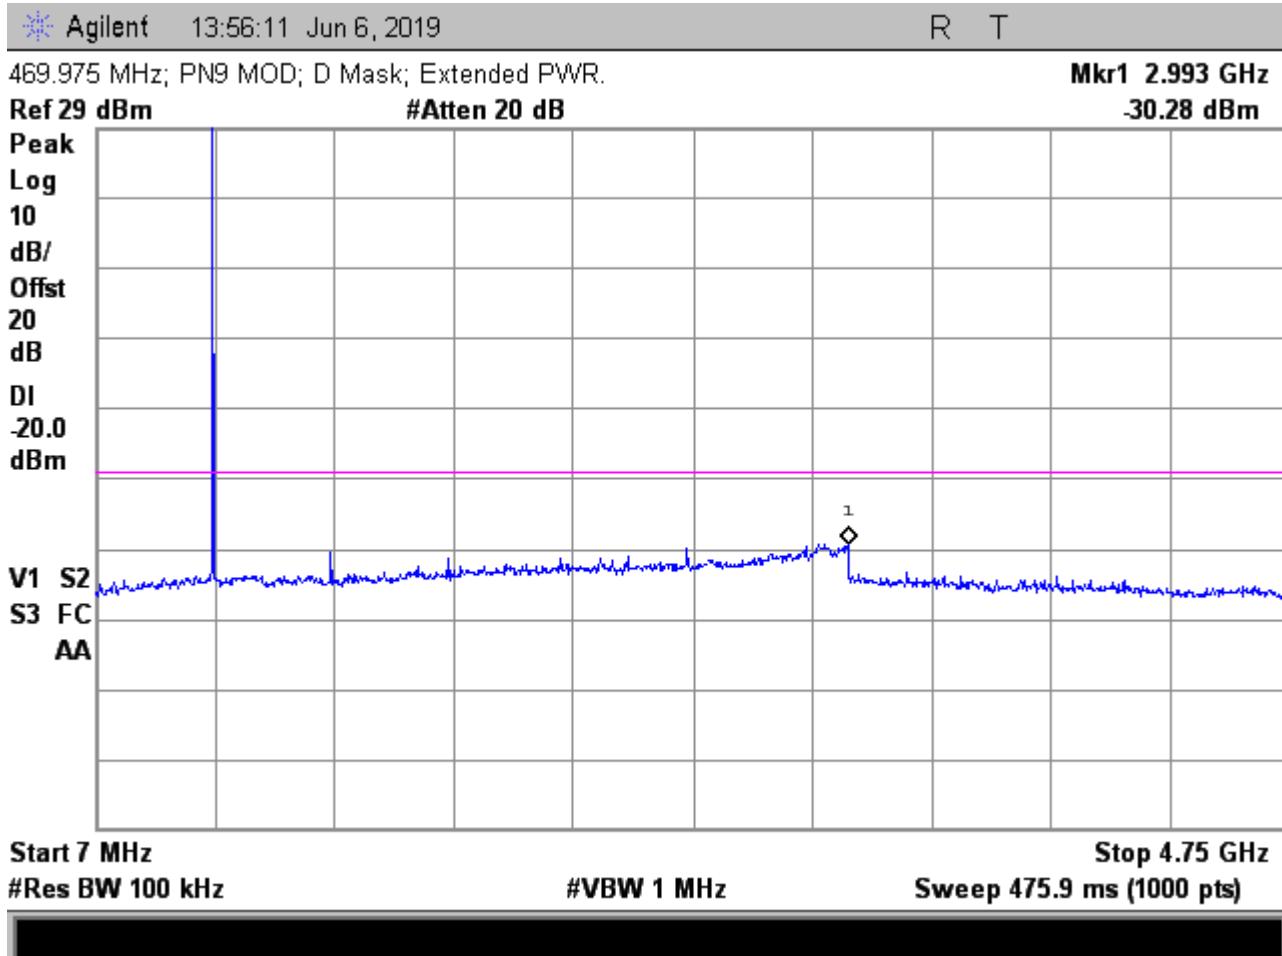



Judgement: Pass

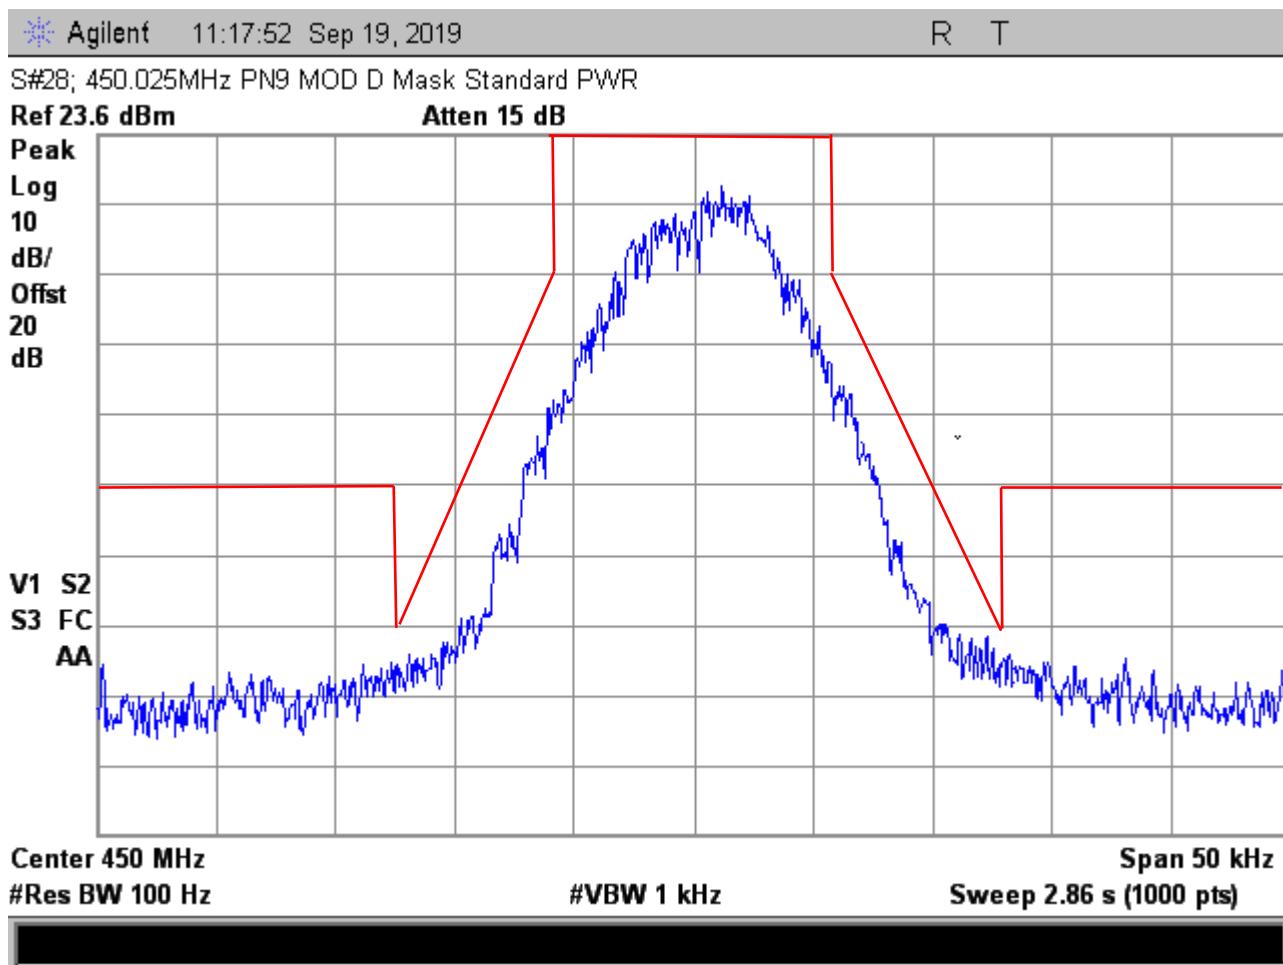**Emission Masks: Standard Power**

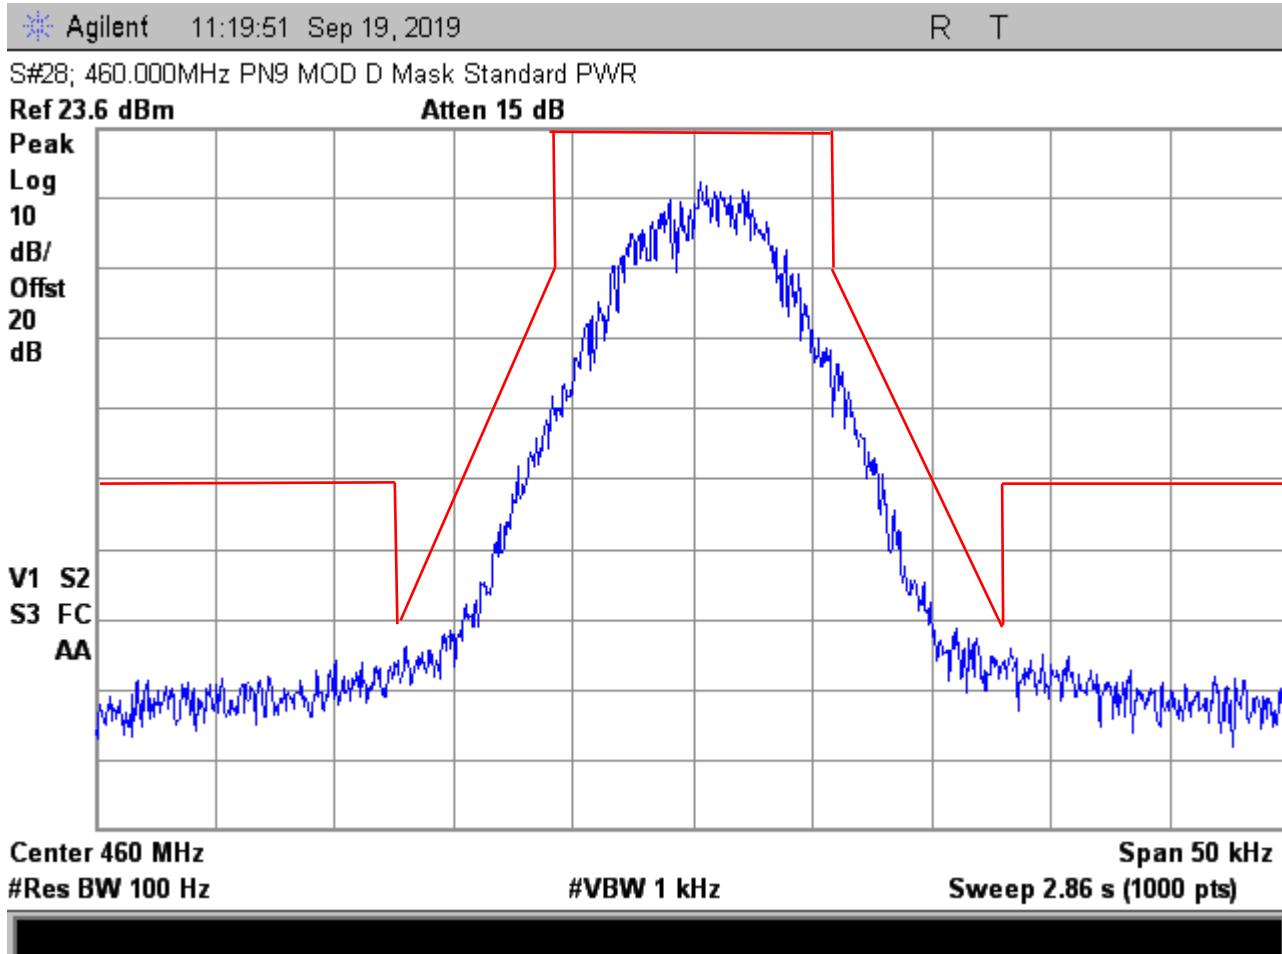

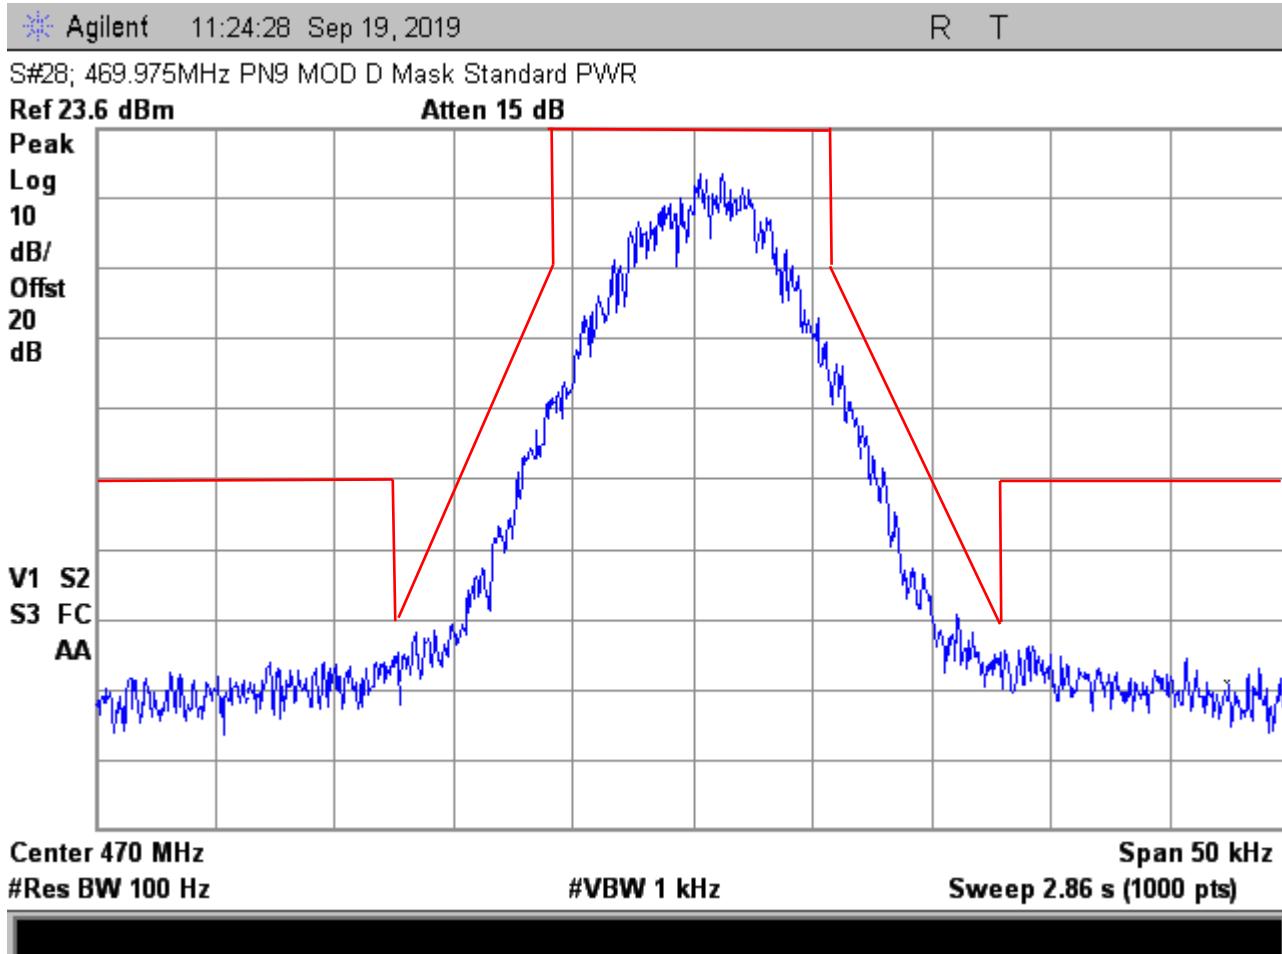

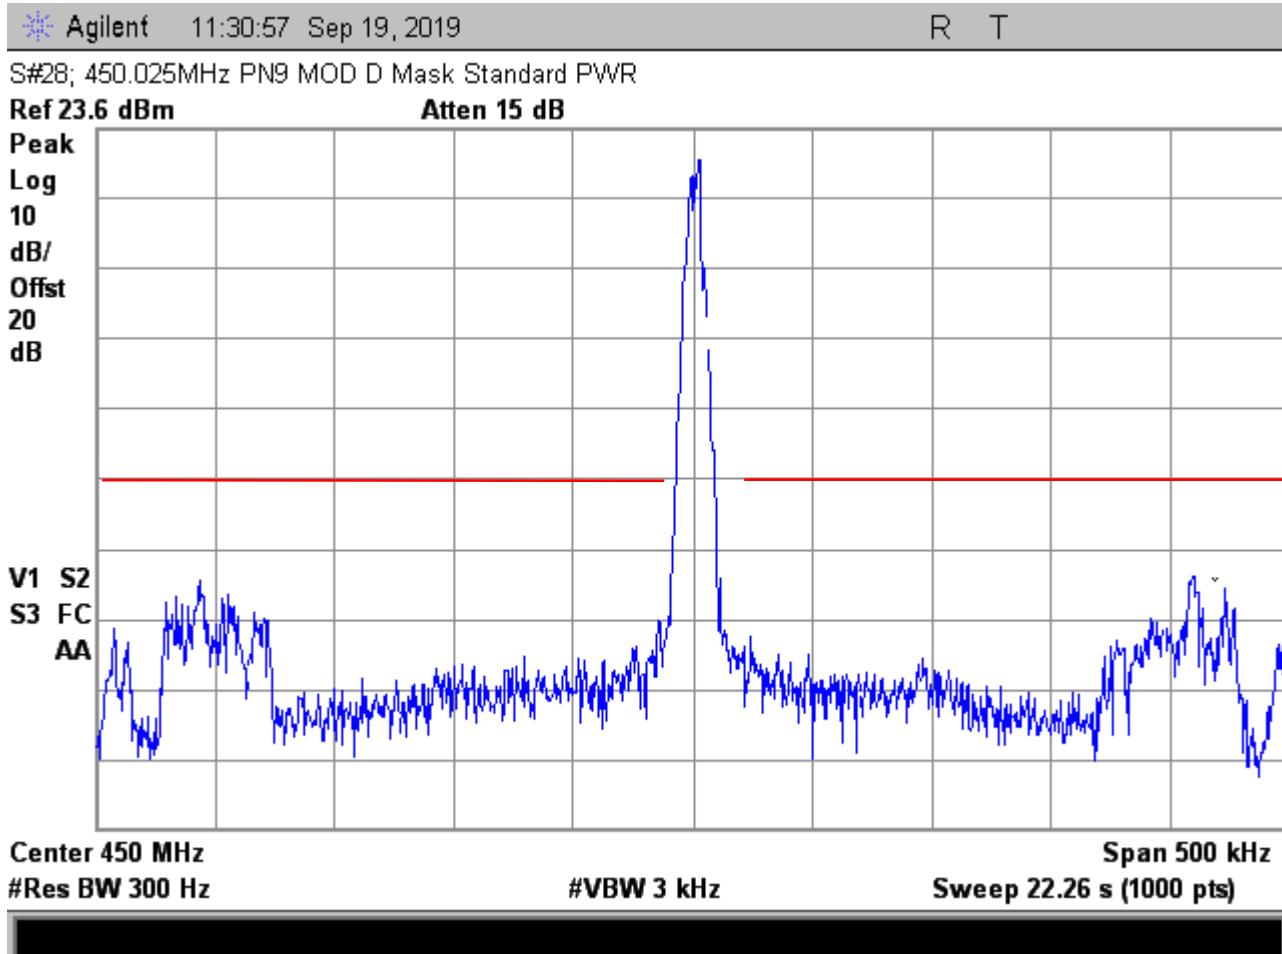

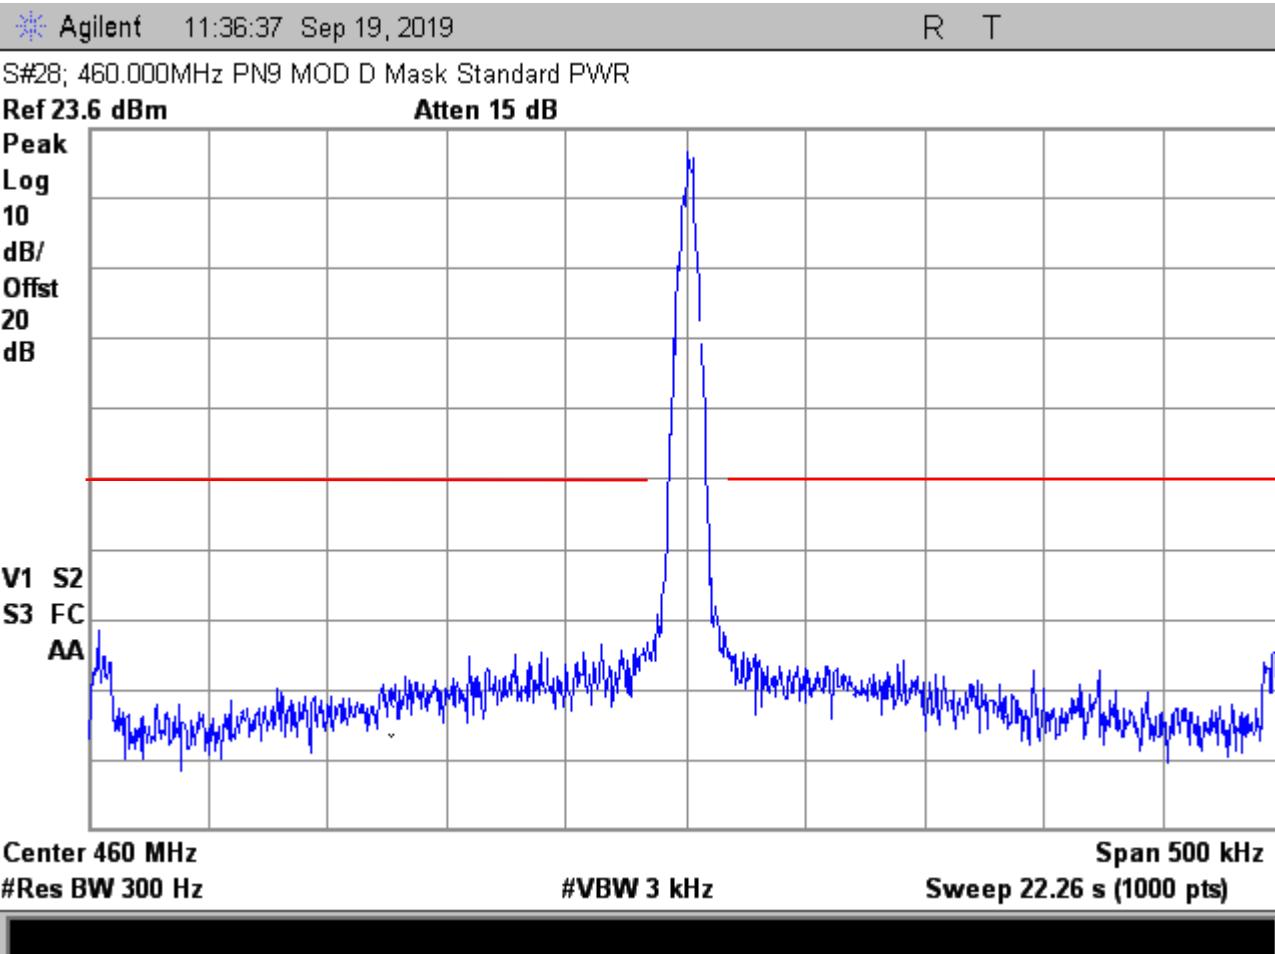




Agilent 11:40:46 Sep 19, 2019

R T

S#28; 469.975MHz PN9 MOD D Mask Standard PWR


Ref 23.6 dBm


Atten 15 dB

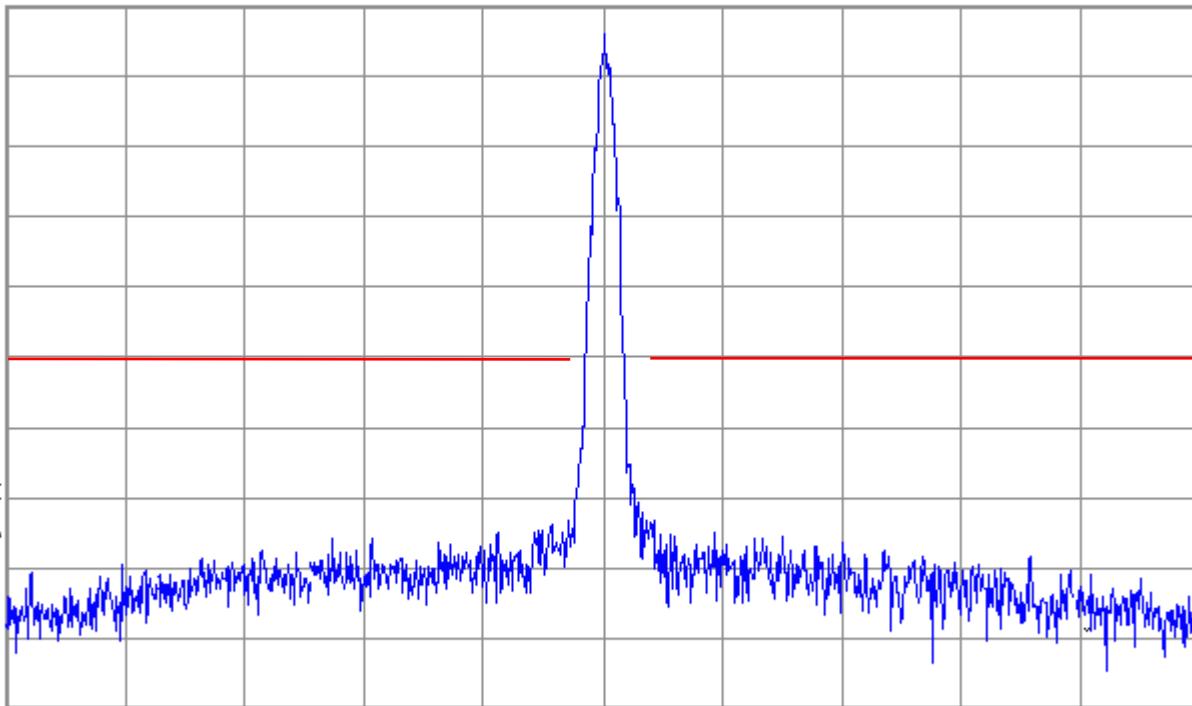
Peak  
Log  
10  
dB/  
Offst  
20  
dBV1 S2  
S3 FC  
AACenter 470 MHz  
#Res BW 300 Hz

#VBW 3 kHz

Span 500 kHz  
Sweep 22.26 s (1000 pts)

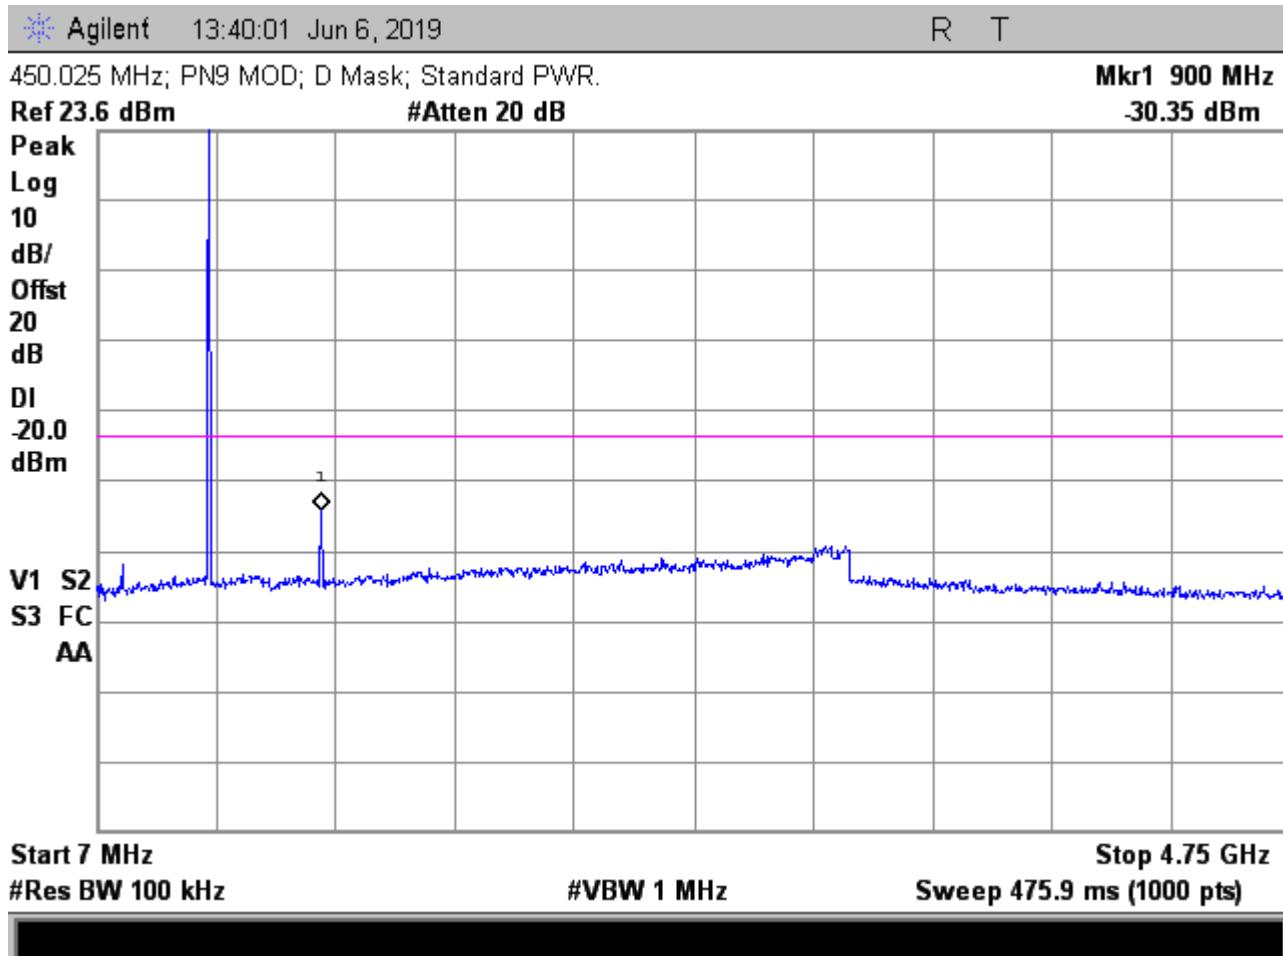

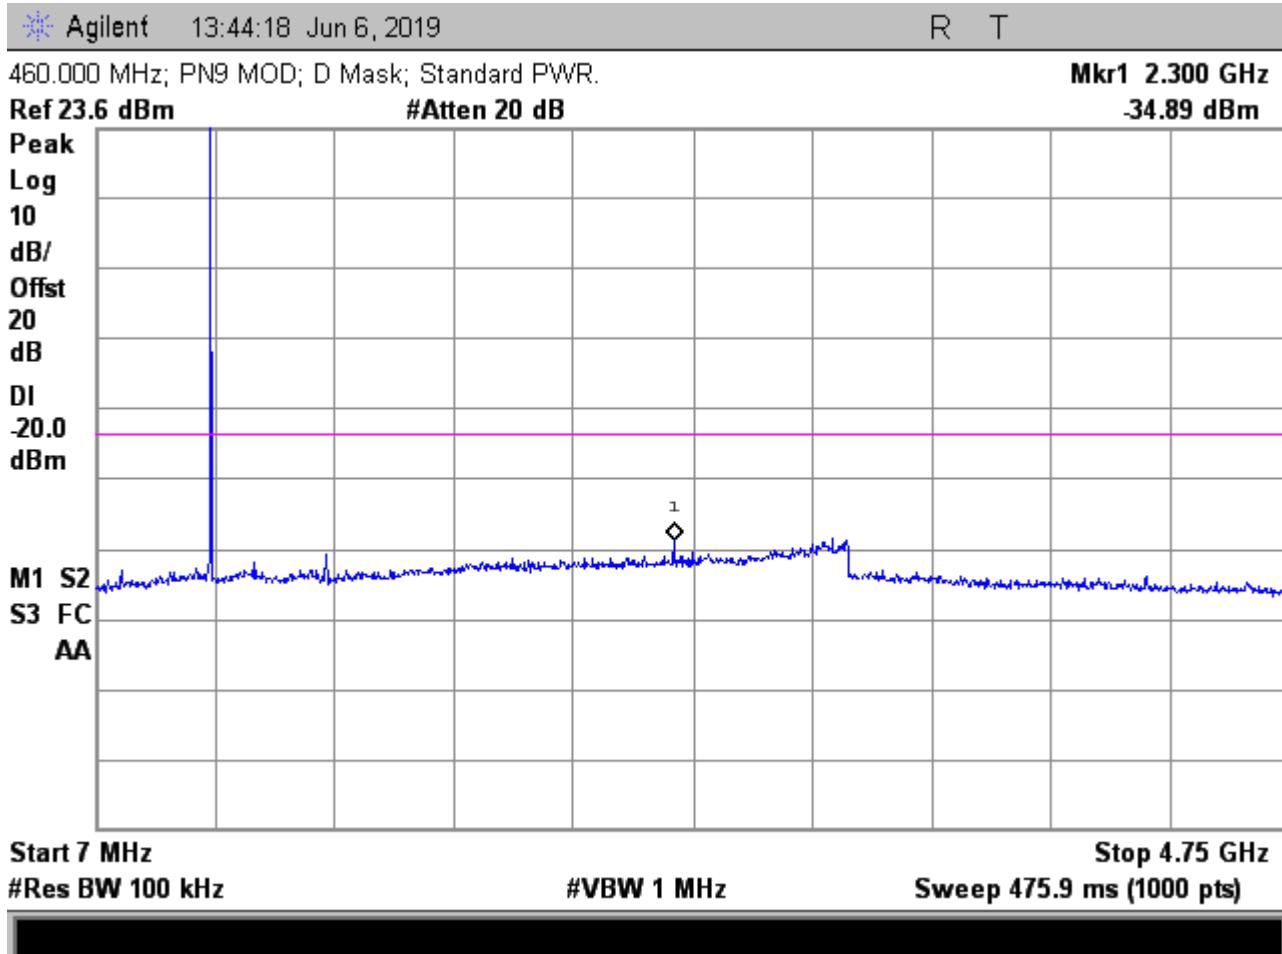

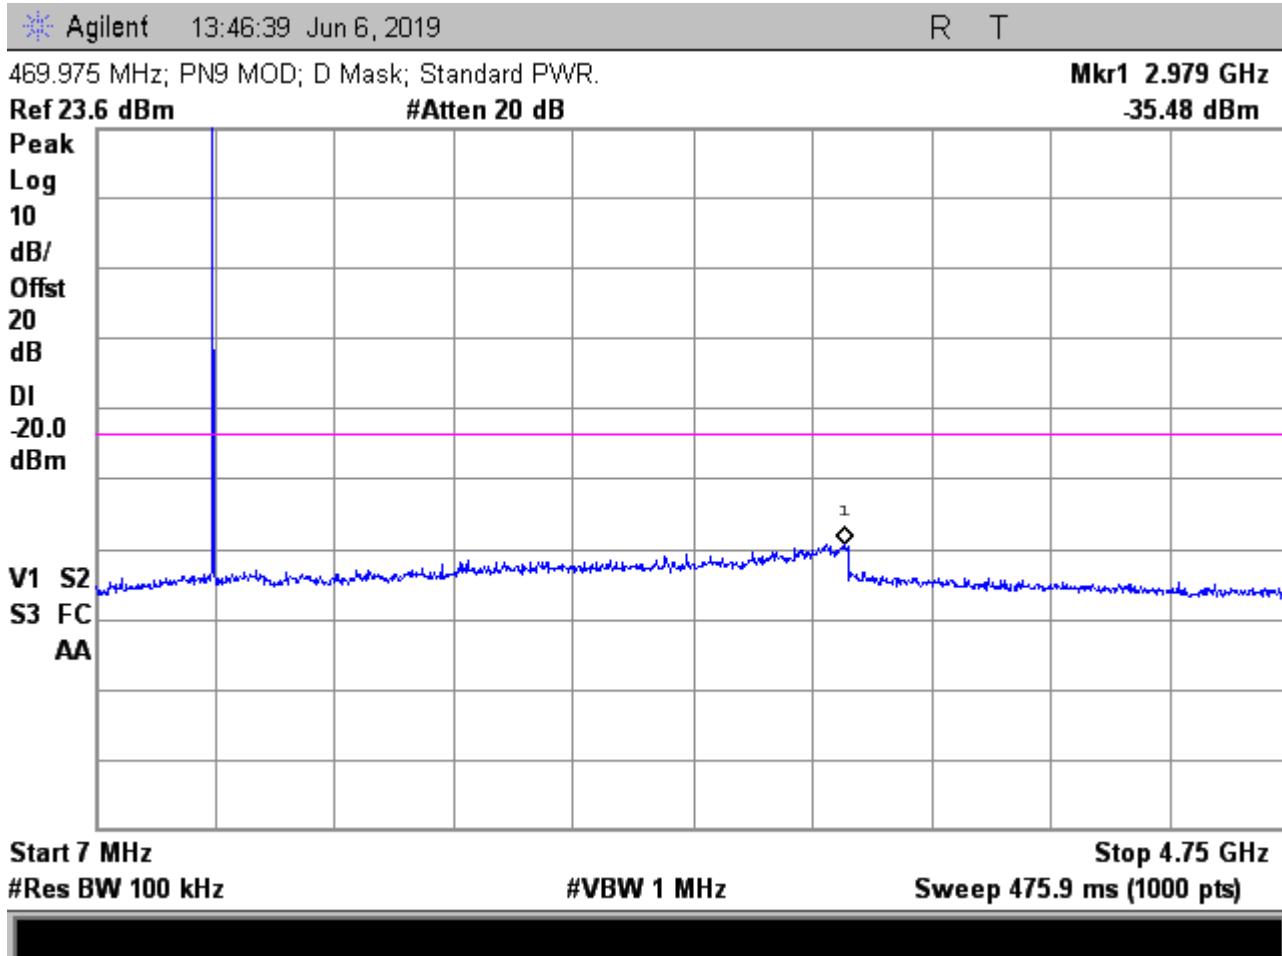

Judgement: Pass



### 10.3.1 Conducted Spurious Emissions

Model	101-2017-025	Specification	FCC Part 90.210 RSS-119 Section 5.5
Serial Number	0028	Test Date	06/07/2019
Test Personnel	Richard Tichgelaar	Test Location	Chamber B
Test Equipment	EMI Receiver (REC-21)		

This is a direct measurement from the Antenna port to the EMI Receiver

#### Conducted Spurious Emissions: Standard Power Mode

Freq. Tx	Harm	Tested Freq.	Rec Reading	HPF-09 Attn. Factor	Ext. Atten. Factor	Cable Loss	Total Power	Power Limit	Margin Under Limit
MHz	#	MHz	dBm	dB	dB	dB	dBm	dBm	dB
450.0250	1	450.0250	3.5	0.0	19.8	0.3	23.6	50.0	26.4
450.0250	2	900.0500	-50.3	0.4	19.9	0.4	-29.6	-20.0	9.6
450.0250	3	1350.0750	-70.0	0.4	20.0	0.4	-49.2	-20.0	29.2
450.0250	4	1800.1000	-69.0	0.4	20.0	0.5	-48.1	-20.0	28.1
450.0250	5	2250.1250	-62.4	0.5	20.0	0.6	-41.3	-20.0	21.3
450.0250	6	2700.1500	-72.0	0.6	20.0	0.6	-50.8	-20.0	30.8
450.0250	7	3150.1750	-72.0	0.5	20.1	0.7	-50.7	-20.0	30.7
450.0250	8	3600.2000	-72.0	0.8	20.1	0.8	-50.3	-20.0	30.3
450.0250	9	4050.2250	-72.0	1.0	20.2	0.8	-50.0	-20.0	30.0
450.0250	10	4500.2500	-72.0	1.0	20.2	0.8	-50.0	-20.0	30.0
460.0000	1	460.0000	3.6	0.0	19.8	0.3	23.7	50.0	26.3
460.0000	2	920.0000	-57.2	0.4	19.9	0.4	-36.5	-20.0	16.5
460.0000	3	1380.0000	-69.9	0.4	20.0	0.4	-49.1	-20.0	29.1
460.0000	4	1840.0000	-67.8	0.4	20.0	0.5	-46.9	-20.0	26.9
460.0000	5	2300.0000	-61.6	0.5	20.0	0.6	-40.5	-20.0	20.5
460.0000	6	2760.0000	-72.0	0.6	20.0	0.6	-50.8	-20.0	30.8
460.0000	7	3220.0000	-72.0	0.5	20.1	0.7	-50.7	-20.0	30.7
460.0000	8	3680.0000	-72.0	0.8	20.1	0.8	-50.3	-20.0	30.3
460.0000	9	4140.0000	-72.0	1.0	20.2	0.8	-50.0	-20.0	30.0
460.0000	10	4600.0000	-72.0	1.0	20.2	0.8	-50.0	-20.0	30.0
469.9750	1	469.9750	4.2	0.0	19.8	0.3	24.3	50.0	25.7
469.9750	2	939.9500	-66.5	0.4	19.9	0.4	-45.8	-20.0	25.8
469.9750	3	1409.9250	-69.6	0.4	20.0	0.4	-48.8	-20.0	28.8
469.9750	4	1879.9000	-67.2	0.4	20.0	0.5	-46.3	-20.0	26.3
469.9750	5	2349.8750	-64.1	0.5	20.0	0.6	-43.0	-20.0	23.0
469.9750	6	2819.8500	-72.0	0.6	20.0	0.6	-50.8	-20.0	30.8
469.9750	7	3289.8250	-72.0	0.5	20.1	0.7	-50.7	-20.0	30.7
469.9750	8	3759.8000	-71.0	0.8	20.1	0.8	-49.3	-20.0	29.3
469.9750	9	4229.7750	-72.0	1.0	20.2	0.8	-50.0	-20.0	30.0
469.9750	10	4699.7500	-72.0	1.0	20.2	0.8	-50.0	-20.0	30.0

The fundamental emission ERP limit is 100 watts (50 dBm) for an 8 km service area radius.

Judgment: Passed by 9.6 dB.



## Conducted Spurious Emissions: Extended Power Mode

Freq. Tx	Harm	Tested Freq.	Rec Reading	HPF-09 Attn. Factor	Ext. Atten. Factor	Cable Loss	Total Power	Power Limit	Margin Under Limit
MHz	#	MHz	dBm	dB	dB	dB	dBm	dBm	dB
450.0250	1	450.0250	8.9	0.0	19.8	0.3	29.0	50.0	21.0
450.0250	2	900.0500	-49.4	0.4	19.9	0.4	-28.7	-20.0	8.7
450.0250	3	1350.0750	-62.2	0.4	20.0	0.4	-41.4	-20.0	21.4
450.0250	4	1800.1000	-65.2	0.4	20.0	0.5	-44.3	-20.0	24.3
450.0250	5	2250.1250	-54.9	0.5	20.0	0.6	-33.8	-20.0	13.8
450.0250	6	2700.1500	-72.0	0.6	20.0	0.6	-50.8	-20.0	30.8
450.0250	7	3150.1750	-72.0	0.5	20.1	0.7	-50.7	-20.0	30.7
450.0250	8	3600.2000	-71.0	0.8	20.1	0.8	-49.3	-20.0	29.3
450.0250	9	4050.2250	-69.0	1.0	20.2	0.8	-47.0	-20.0	27.0
450.0250	10	4500.2500	-72.0	1.0	20.2	0.8	-50.0	-20.0	30.0
460.0000	1	460.0000	8.6	0.0	19.8	0.3	28.7	50.0	21.3
460.0000	2	920.0000	-56.8	0.4	19.9	0.4	-36.1	-20.0	16.1
460.0000	3	1380.0000	-64.7	0.4	20.0	0.4	-43.9	-20.0	23.9
460.0000	4	1840.0000	-63.6	0.4	20.0	0.5	-42.7	-20.0	22.7
460.0000	5	2300.0000	-54.9	0.5	20.0	0.6	-33.8	-20.0	13.8
460.0000	6	2760.0000	-72.0	0.6	20.0	0.6	-50.8	-20.0	30.8
460.0000	7	3220.0000	-72.0	0.5	20.1	0.7	-50.7	-20.0	30.7
460.0000	8	3680.0000	-68.0	0.8	20.1	0.8	-46.3	-20.0	26.3
460.0000	9	4140.0000	-69.1	1.0	20.2	0.8	-47.1	-20.0	27.1
460.0000	10	4600.0000	-70.2	1.0	20.2	0.8	-48.2	-20.0	28.2
469.9750	1	469.9750	8.9	0.0	19.8	0.3	29.0	50.0	21.0
469.9750	2	939.9500	-63.4	0.4	19.9	0.4	-42.7	-20.0	22.7
469.9750	3	1409.9250	-61.9	0.4	20.0	0.4	-41.1	-20.0	21.1
469.9750	4	1879.9000	-57.7	0.4	20.0	0.5	-36.8	-20.0	16.8
469.9750	5	2349.8750	-57.5	0.5	20.0	0.6	-36.4	-20.0	16.4
469.9750	6	2819.8500	-72.0	0.6	20.0	0.6	-50.8	-20.0	30.8
469.9750	7	3289.8250	-71.0	0.5	20.1	0.7	-49.7	-20.0	29.7
469.9750	8	3759.8000	-71.0	0.8	20.1	0.8	-49.3	-20.0	29.3
469.9750	9	4229.7750	-72.0	1.0	20.2	0.8	-50.0	-20.0	30.0
469.9750	10	4699.7500	-72.0	1.0	20.2	0.8	-50.0	-20.0	30.0

The fundamental emission ERP limit is 100 watts (50 dBm) for an 8 km service area radius.

Judgment: Passed by 8.7 dB.



## Conducted Spurious Emissions: Maximum Power Mode

Freq. Tx	Harm	Tested Freq.	Rec Reading	HPF-09 Attn. Factor	Ext. Atten. Factor	Cable Loss	Total Power	Power Limit	Margin Under Limit
MHz	#	MHz	dBm	dB	dB	dB	dBm	dBm	dB
450.0250	1	450.0250	10.0	0.0	19.8	0.3	30.1	50.0	19.9
450.0250	2	900.0500	-45.2	0.4	19.9	0.4	-24.5	-20.0	4.5
450.0250	3	1350.0750	-59.6	0.4	20.0	0.4	-38.8	-20.0	18.8
450.0250	4	1800.1000	-64.5	0.4	20.0	0.5	-43.6	-20.0	23.6
450.0250	5	2250.1250	-55.8	0.5	20.0	0.6	-34.7	-20.0	14.7
450.0250	6	2700.1500	-72.0	0.6	20.0	0.6	-50.8	-20.0	30.8
450.0250	7	3150.1750	-72.0	0.5	20.1	0.7	-50.7	-20.0	30.7
450.0250	8	3600.2000	-70.0	0.8	20.1	0.8	-48.3	-20.0	28.3
450.0250	9	4050.2250	-69.3	1.0	20.2	0.8	-47.3	-20.0	27.3
450.0250	10	4500.2500	-72.0	1.0	20.2	0.8	-50.0	-20.0	30.0
460.0000	1	460.0000	9.9	0.0	19.8	0.3	30.0	50.0	20.0
460.0000	2	920.0000	-52.7	0.4	19.9	0.4	-32.0	-20.0	12.0
460.0000	3	1380.0000	-61.3	0.4	20.0	0.4	-40.5	-20.0	20.5
460.0000	4	1840.0000	-63.6	0.4	20.0	0.5	-42.7	-20.0	22.7
460.0000	5	2300.0000	-55.4	0.5	20.0	0.6	-34.3	-20.0	14.3
460.0000	6	2760.0000	-55.7	0.6	20.0	0.6	-34.5	-20.0	14.5
460.0000	7	3220.0000	-72.0	0.5	20.1	0.7	-50.7	-20.0	30.7
460.0000	8	3680.0000	-66.8	0.8	20.1	0.8	-45.1	-20.0	25.1
460.0000	9	4140.0000	-70.0	1.0	20.2	0.8	-48.0	-20.0	28.0
460.0000	10	4600.0000	-69.5	1.0	20.2	0.8	-47.5	-20.0	27.5
469.9750	1	469.9750	10.1	0.0	19.8	0.3	30.2	50.0	19.8
469.9750	2	939.9500	-60.3	0.4	19.9	0.4	-39.6	-20.0	19.6
469.9750	3	1409.9250	-61.6	0.4	20.0	0.4	-40.8	-20.0	20.8
469.9750	4	1879.9000	-61.4	0.4	20.0	0.5	-40.5	-20.0	20.5
469.9750	5	2349.8750	-58.0	0.5	20.0	0.6	-36.9	-20.0	16.9
469.9750	6	2819.8500	-72.0	0.6	20.0	0.6	-50.8	-20.0	30.8
469.9750	7	3289.8250	-71.0	0.5	20.1	0.7	-49.7	-20.0	29.7
469.9750	8	3759.8000	-69.0	0.8	20.1	0.8	-47.3	-20.0	27.3
469.9750	9	4229.7750	-69.7	1.0	20.2	0.8	-47.7	-20.0	27.7
469.9750	10	4699.7500	-70.3	1.0	20.2	0.8	-48.3	-20.0	28.3


The fundamental emission ERP limit is 100 watts (50 dBm) for an 8 km service area radius.

Judgment: Passed by 4.5 dB.



## 10.4 Occupied Bandwidth


Channel	99% OBW (kHz)		
MHz	Max Power	Extended Range	Standard Range
450.0250	7.816	7.695	7.735
460.0000	7.816	7.735	7.695
469.9750	7.655	7.735	7.776

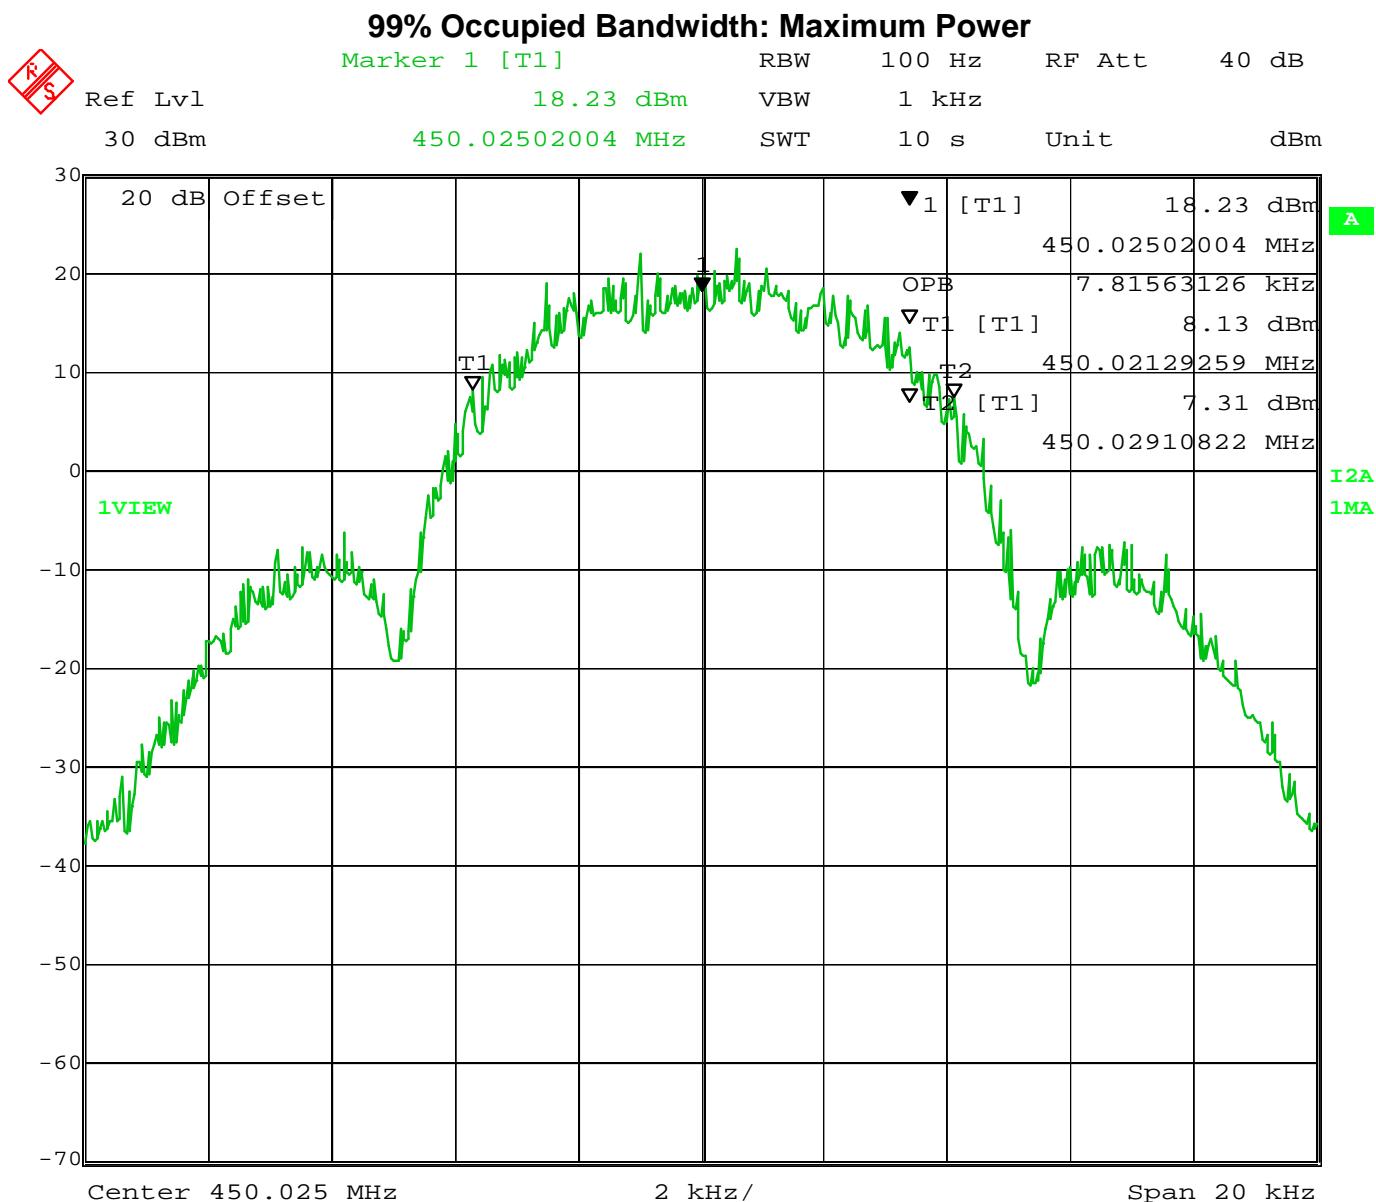

Title: 99% OBW at 450.025 MHz ; Maximum PWR

Date: 7.JUN.2019 10:33:35


99% OBW = 7.816 kHz

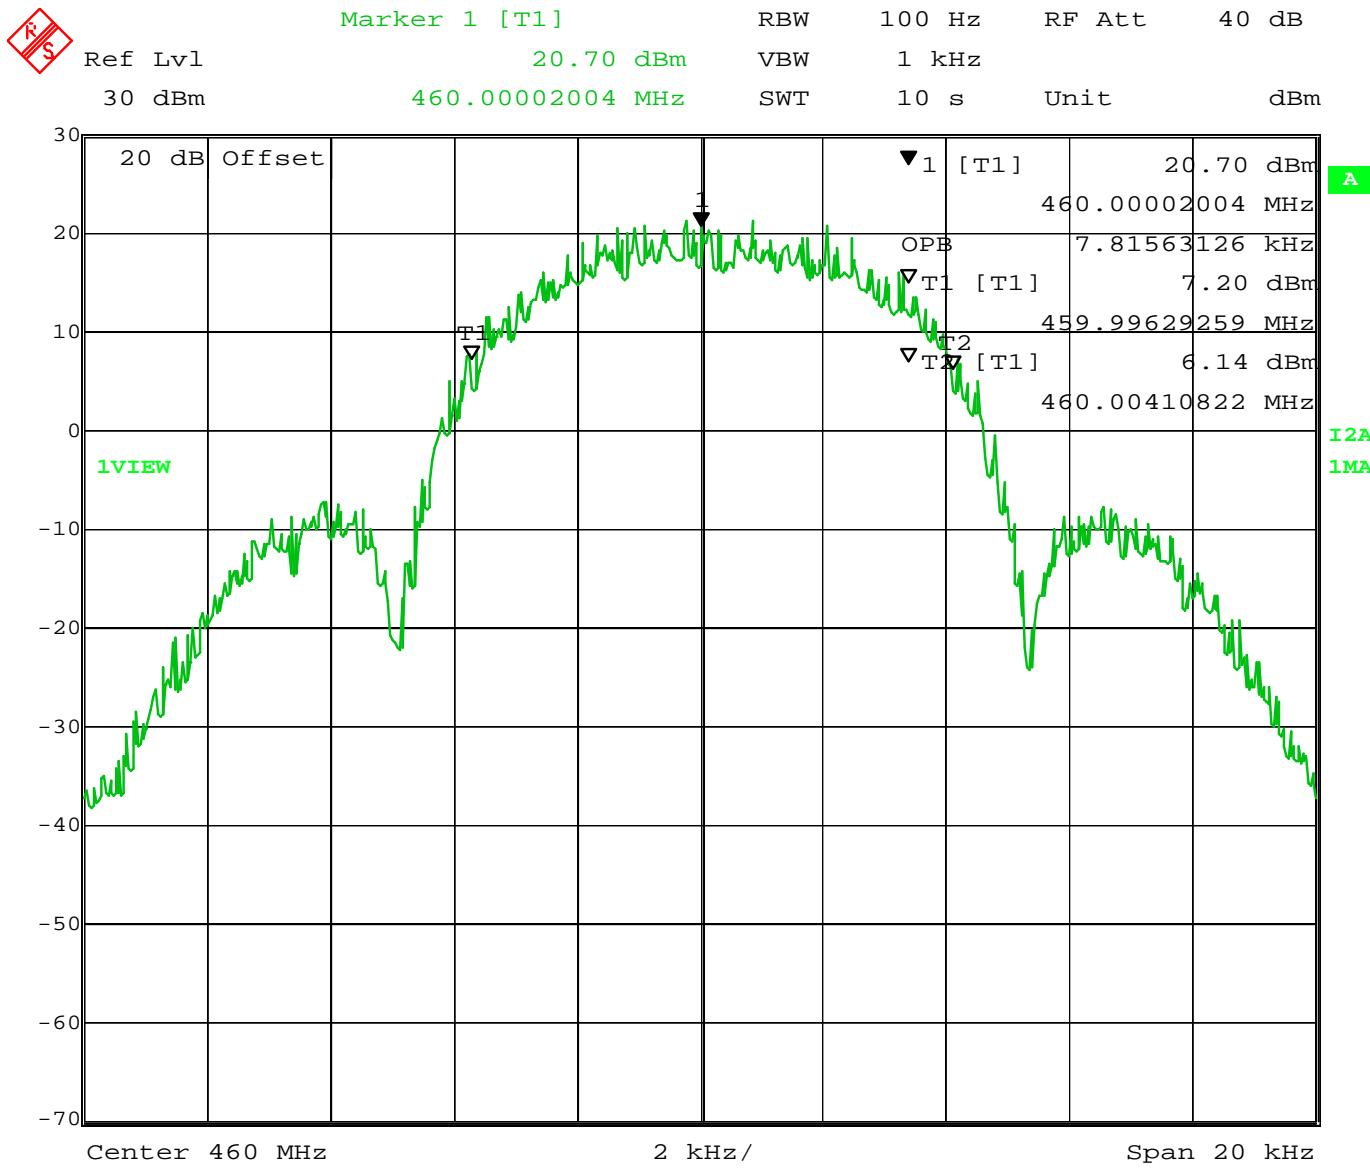

Title: 99% OBW at 460.000 MHz ; Maximum PWR

Date: 7.JUN.2019 10:38:27

99% OBW = 7.816 kHz

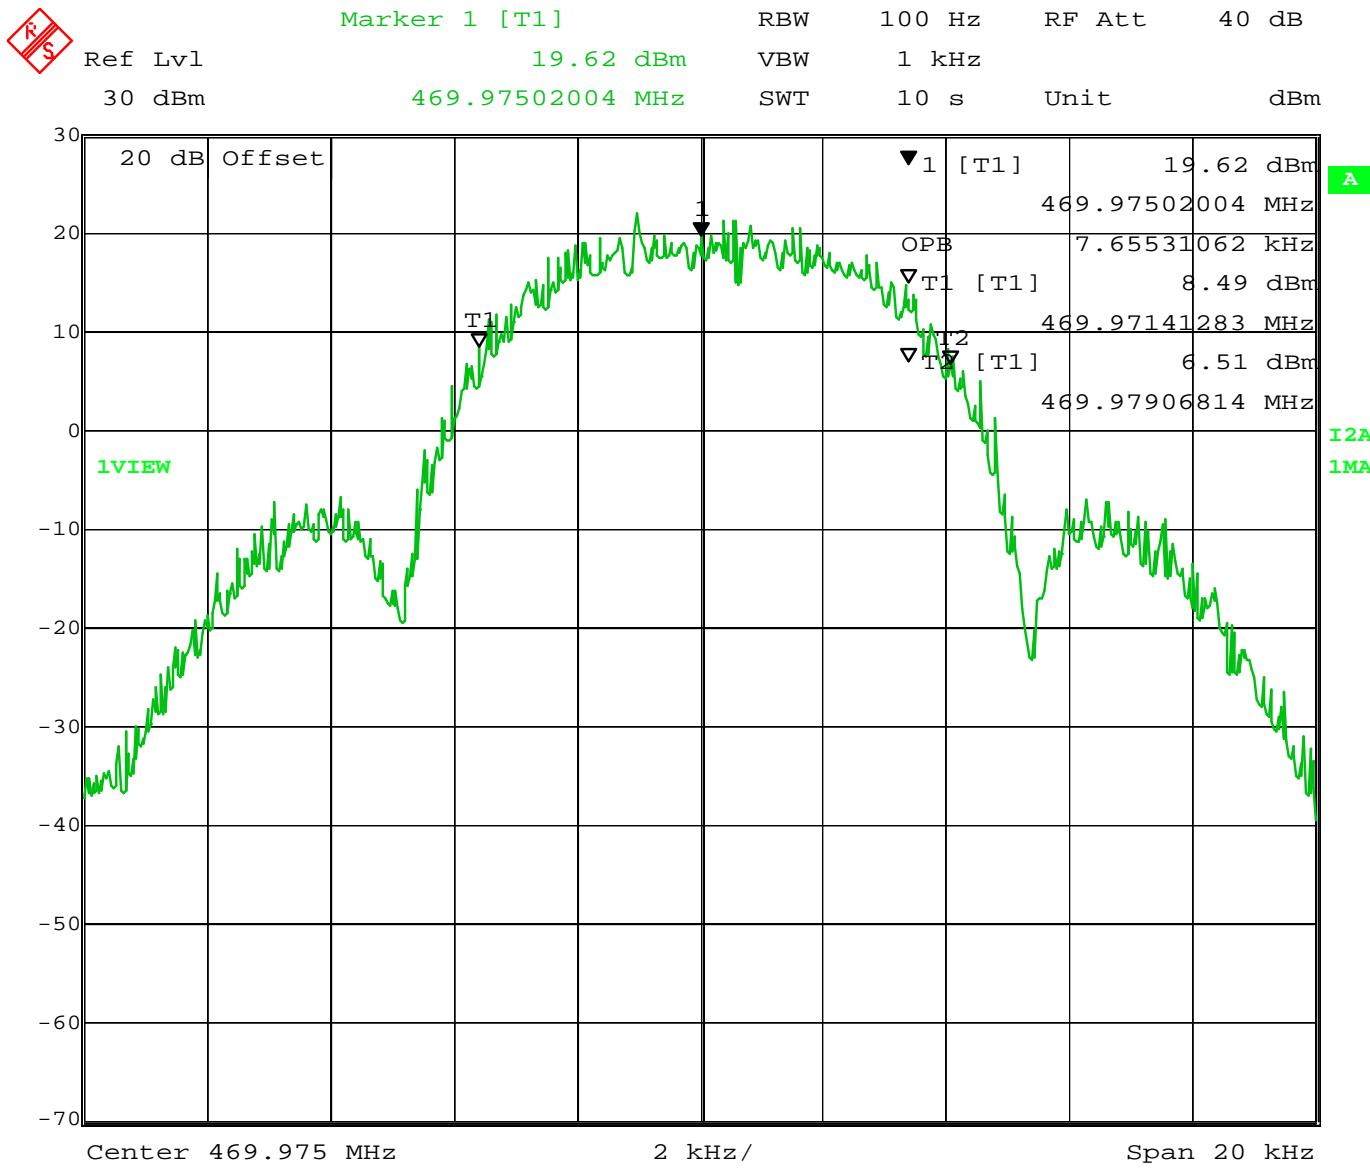


Title: 99% OBW at 469.975 MHz ; Maximum PWR

Date: 7.JUN.2019 10:43:11

99% OBW = 7.655 kHz




## 99% Occupied Bandwidth: Extended Power

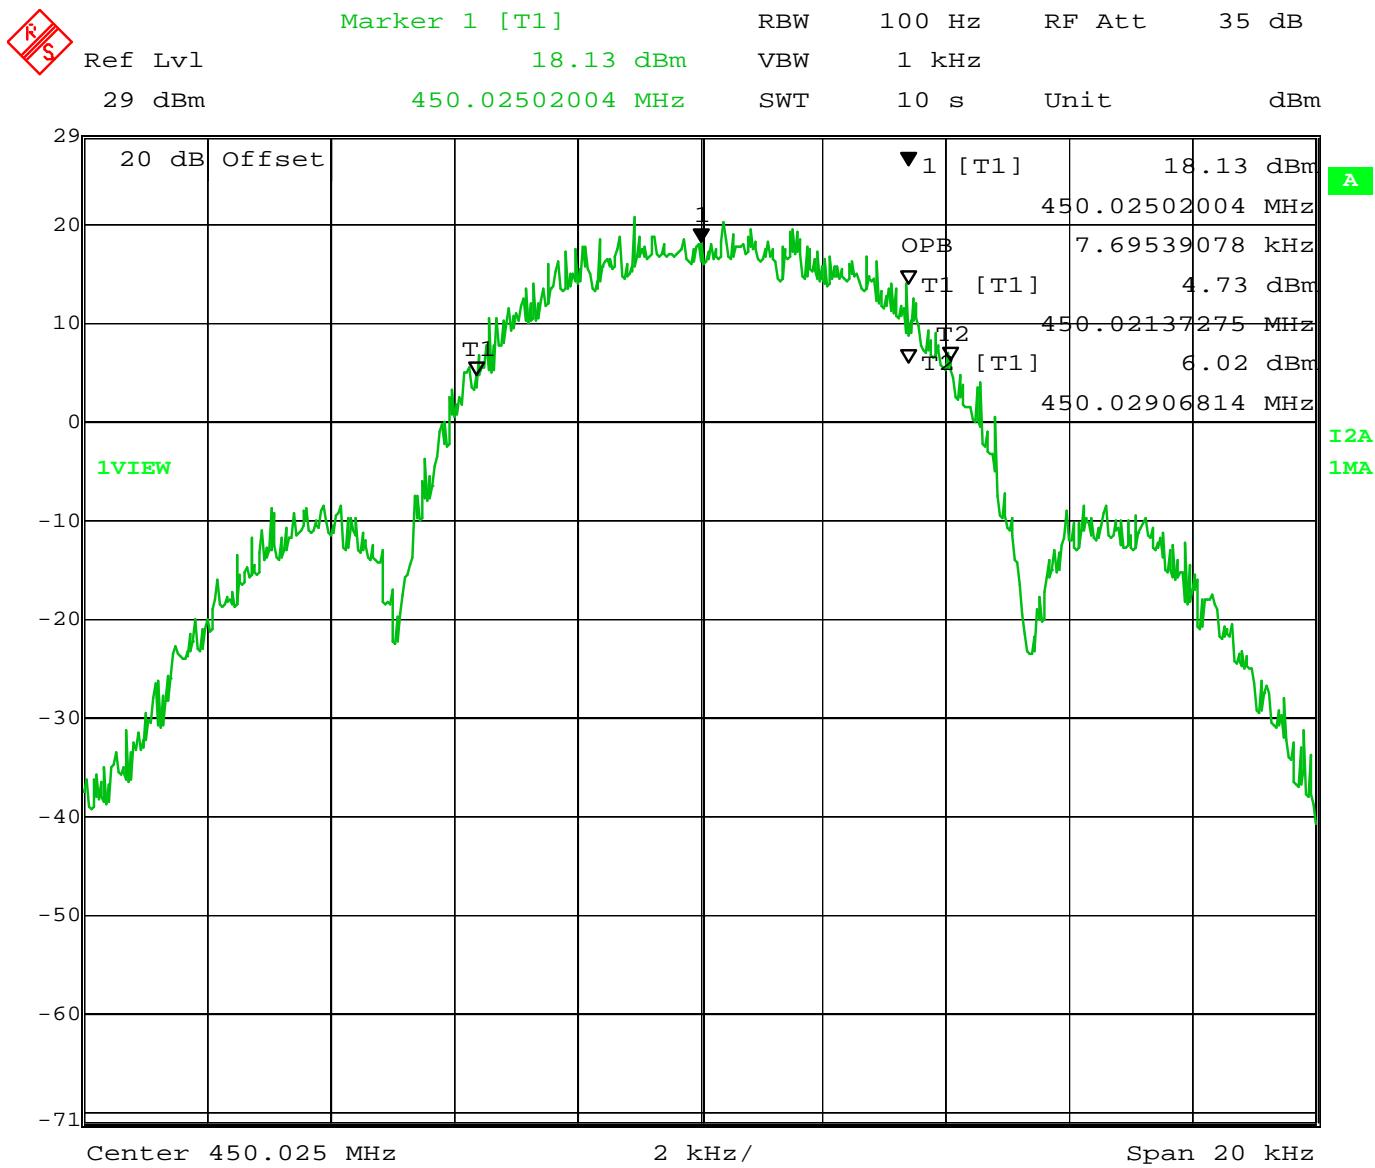

Title: 99% OBW at 450.025 MHz ; Extended PWR


Date: 7.JUN.2019 10:07:06

99% OBW = 7.695 kHz

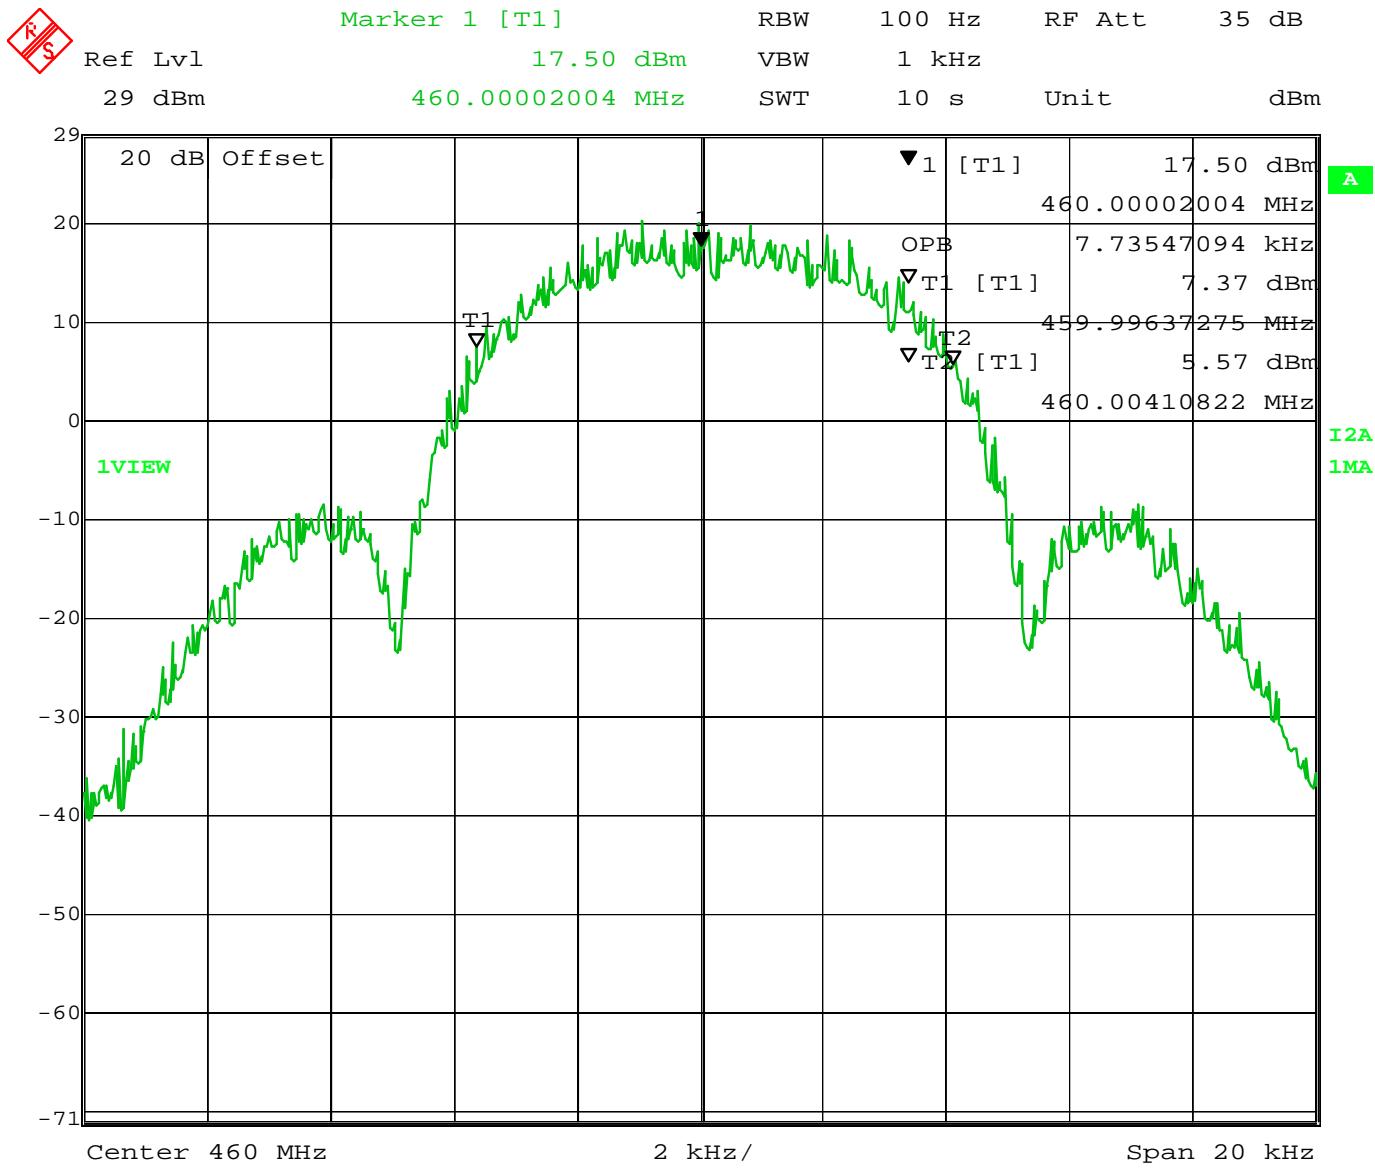

Title: 99% OBW at 460.000 MHz ; Extended PWR  
Date: 7.JUN.2019 10:13:36

99% OBW = 7.735 kHz

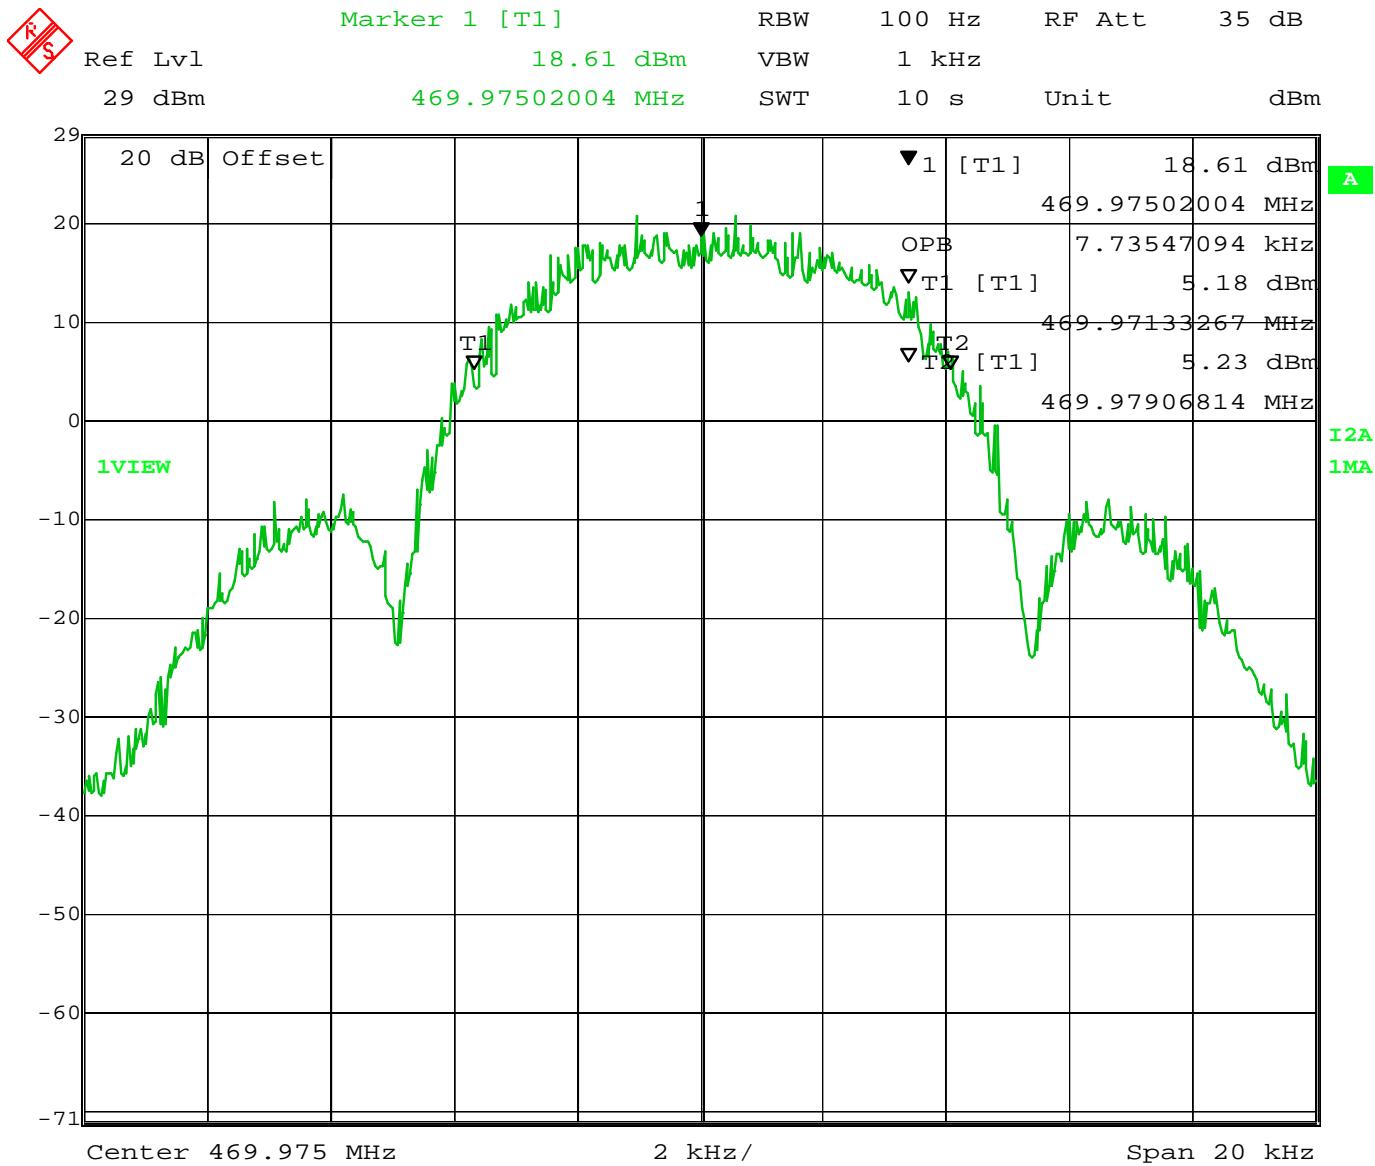


Title: 99% OBW at 469.975 MHz ; Extended PWR

Date: 7.JUN.2019 10:20:11

99% OBW = 7.735 kHz




## 99% Occupied Bandwidth: Standard Power

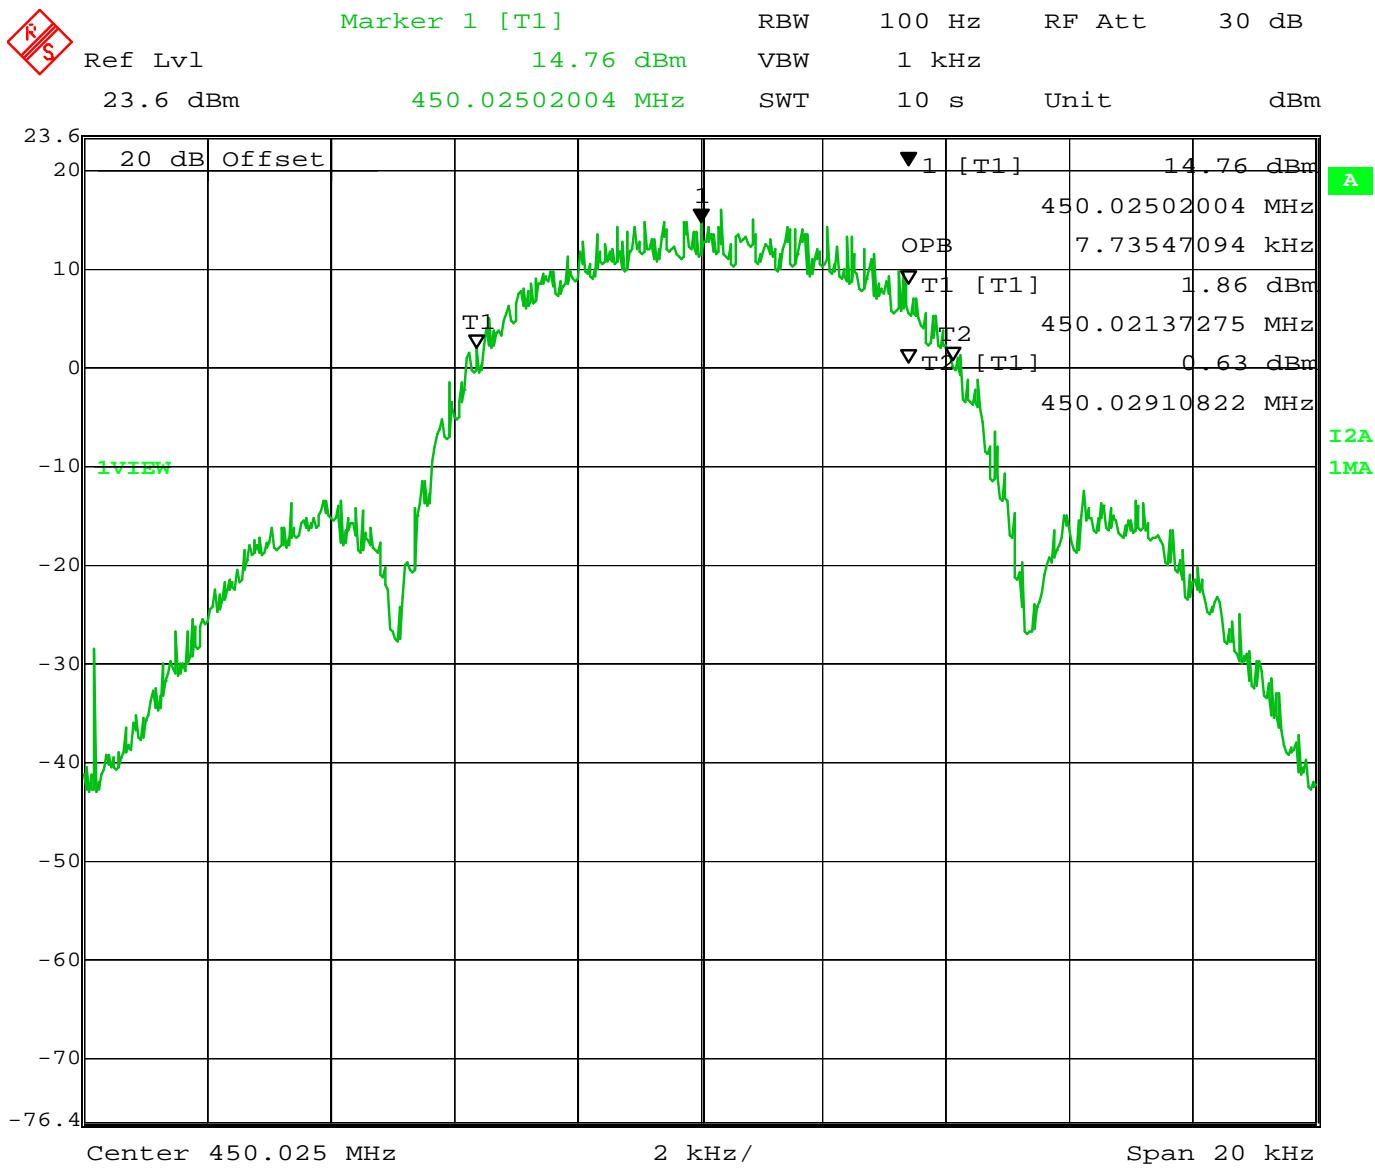

Title: 99% OBW at 450.025 MHz ; Standard PWR


Date: 7.JUN.2019 09:35:56

99% OBW = 7.735 kHz

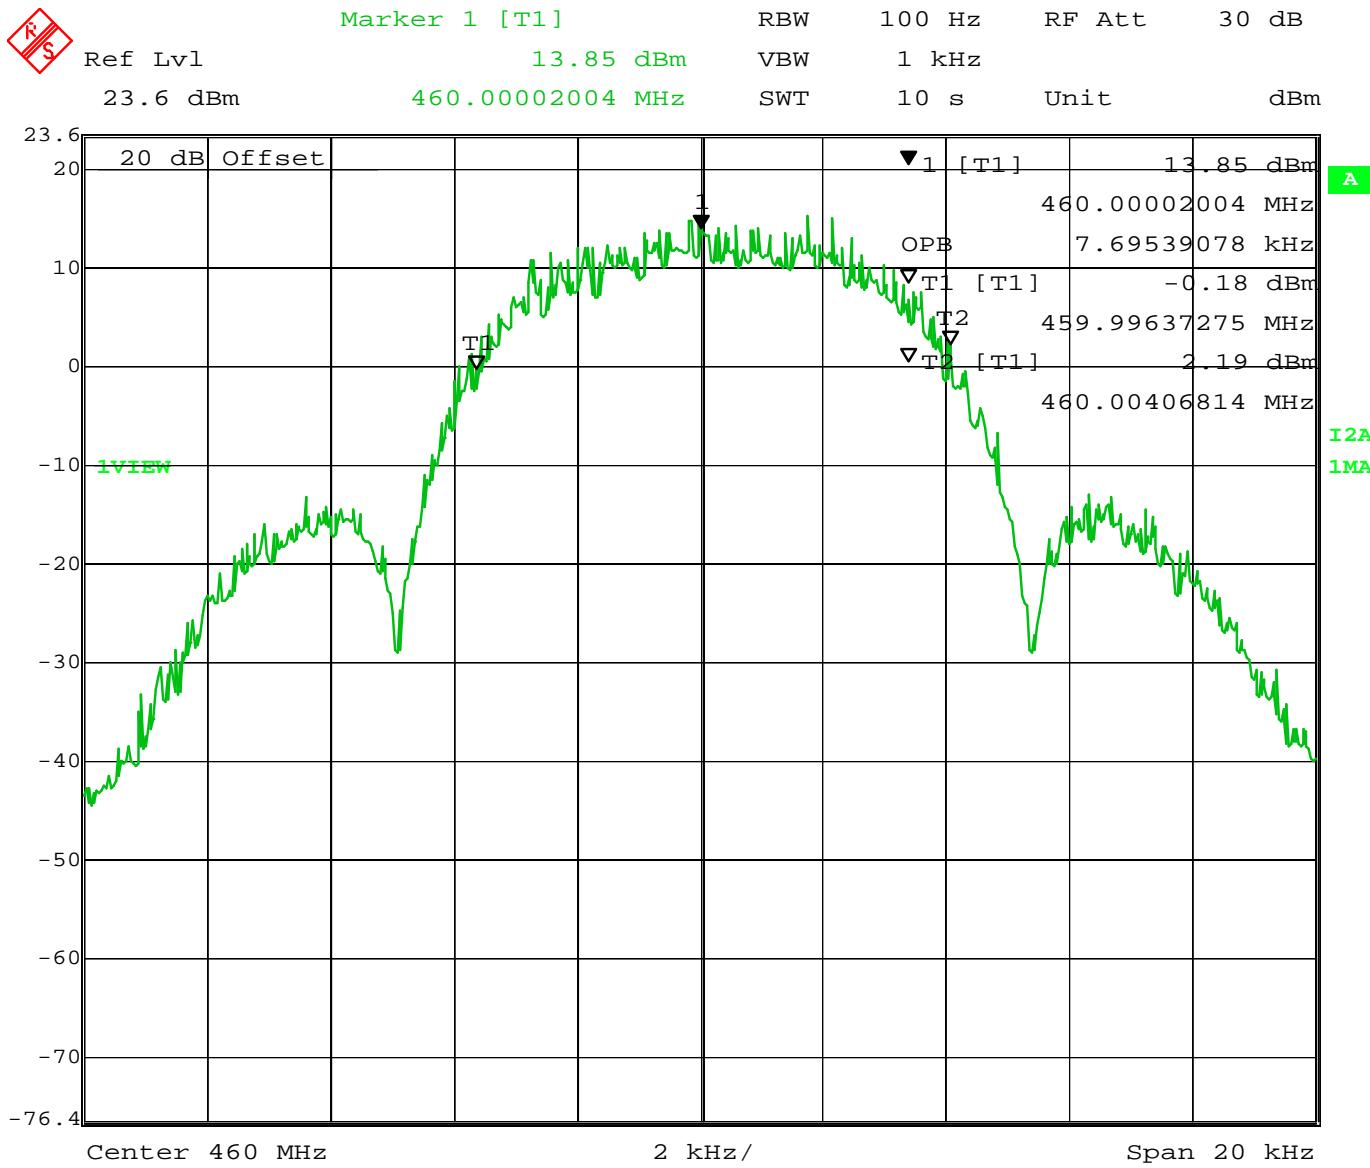

Title: 99% OBW at 460.000 MHz ; Standard PWR  
Date: 7.JUN.2019 09:45:48

99% OBW = 7.695 kHz

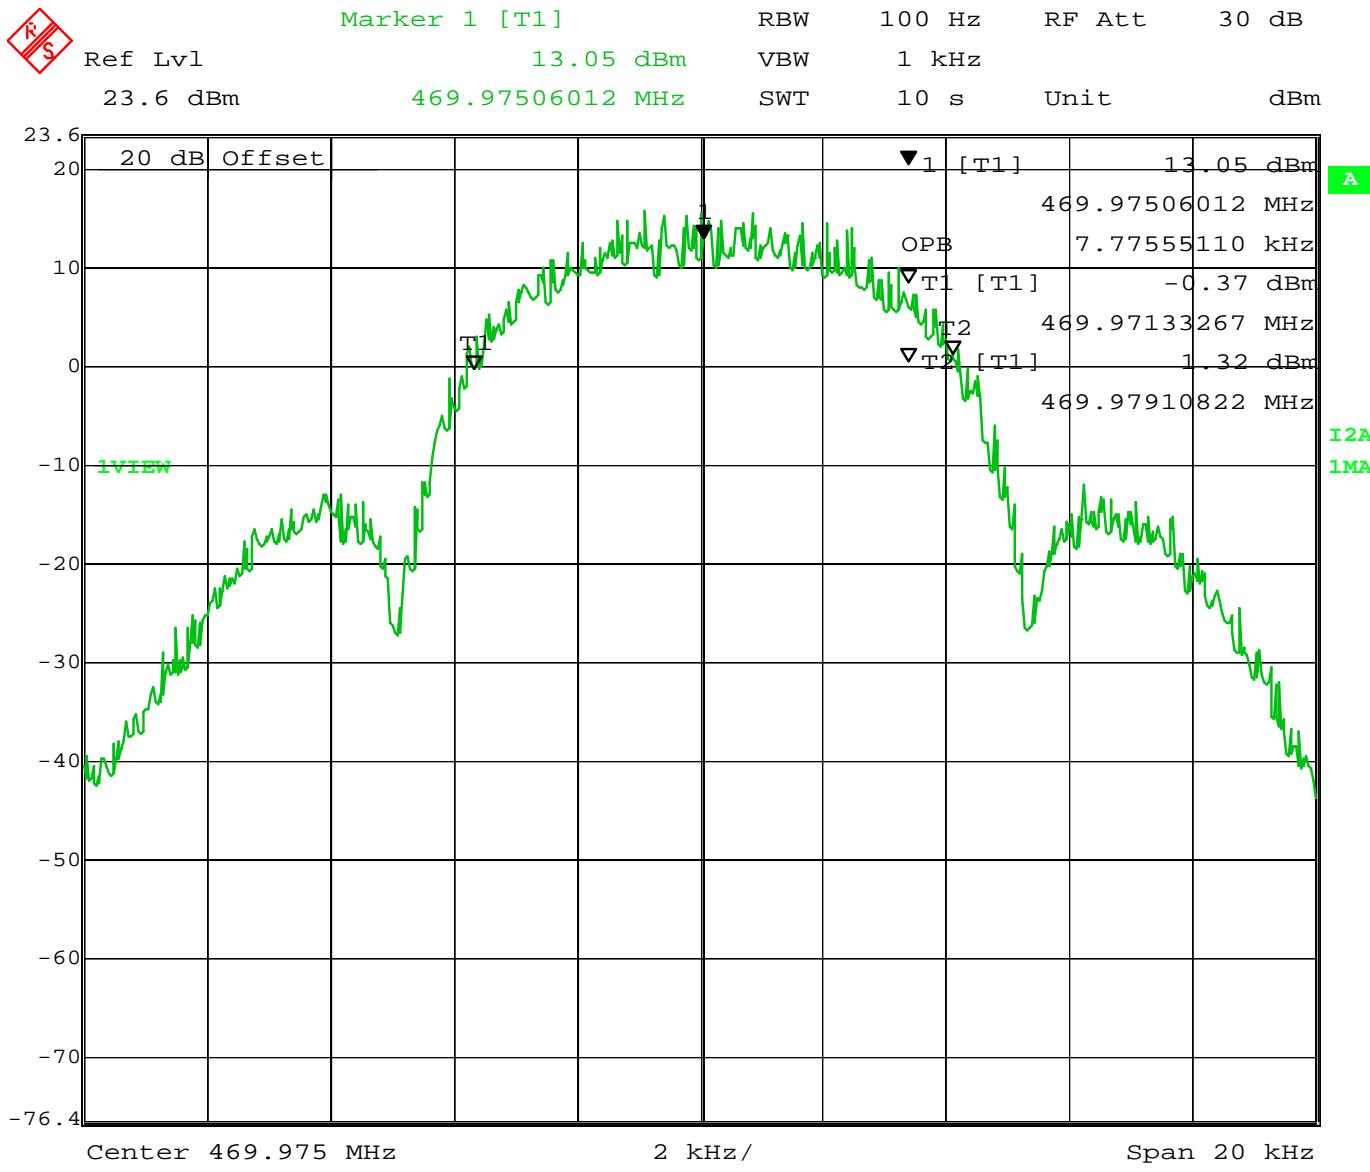

Title: 99% OBW at 469.975 MHz ; Standard PWR  
Date: 7.JUN.2019 09:58:57

99% OBW = 7.776 kHz

Judgement: Pass



## 10.5 Field Strength of Unwanted Spurious Radiation

### 10.5.1 Test Procedures

Radiated emission measurements in the Restricted bands were performed with linearly polarized broadband antennas. The results obtained with these antennas can be correlated with results obtained with a tuned dipole antenna. A 10 dB linearity check is performed prior to start of testing in order to determine if an overload condition exists. From 30 to 4700 MHz, a spectrum analyzer with a preselector was used for measurement. Radiated emissions measurements were performed at the anechoic chamber at a test distance of 3 meters. The entire frequency range from 30 to 4700 MHz was slowly scanned and the emissions in the restricted frequency bands were recorded. Measurements were performed using the peak detector function.

The spectrum analyzer was adjusted for the following settings:

- 1) Resolution Bandwidth = 100 kHz for spurious emissions below 1 GHz, and 1 MHz for spurious emissions above 1GHz.
- 2) Video Bandwidth = 300 kHz for spurious emissions below 1 GHz, and 3 MHz for spurious emissions above 1 GHz.
- 3) Sweep Speed slow enough to maintain measurement calibration.
- 4) Detector Mode = Positive Peak.


The transmitter to be tested was placed on the turntable in the standard test site, or an FCC listed site compliant with ANSI C63.4. The transmitter is transmitting into a non-radiating load that is placed on the turntable. Measurements were made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier. The transmitter was keyed during the tests.

For each spurious frequency, the test antenna was raised and lowered from 1 m to 4m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Then the turntable was rotated 360° to determine the maximum reading. This procedure was repeated to obtain the highest possible reading. This maximum reading was recorded.

Each measurement was repeated for each spurious frequency with the test antenna polarized vertically.



Figure 1. Drawing of Radiated Emissions Setup

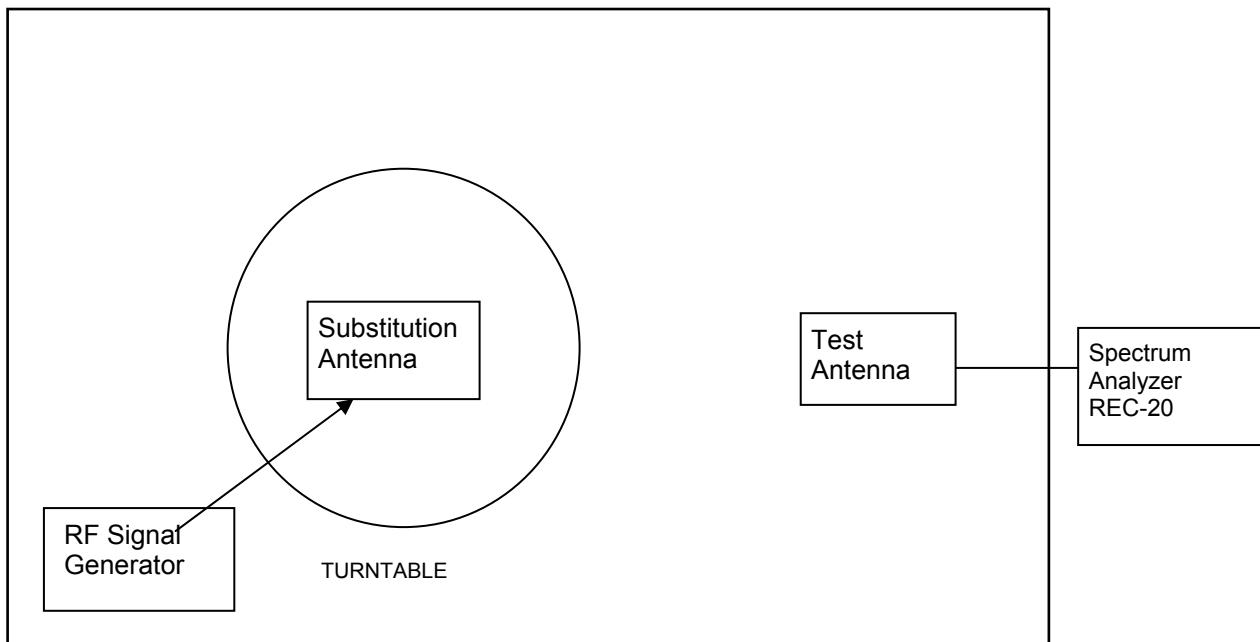

ANSI C63.4 Listed Test Site

**Notes:**

- Test Antenna height varied from 1 to 4 meters
- Distance from antenna to tested system is 3 meters
- Not to Scale

Frequency MHz	Test Antenna	Substitution Antenna	Receiver to Coupler	Signal Generator
30 - 200	ANT-80	ANT-79	REC-20	SIG-31
200 - 1000	ANT-68	ANT-06	REC-20	SIG-31
1000-5000	ANT-36	ANT-13	REC-20	SIG-31

The transmitter was removed and replaced with a broadband substitution antenna. The substitution antenna is calibrated so that the gain relative to a dipole is known. The center of the substitution antenna was approximately at the same location as the center of the transmitter.

The substitution antenna was fed at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, the test antenna was raised and lowered to obtain a maximum reading at the spectrum analyzer. The level of the signal generator output was adjusted until the previously recorded maximum reading for this set of conditions was obtained.

The measurements were repeated with both antennas horizontally and vertically polarized for each spurious frequency.



The power in dBm into a reference ideal half-wave dipole antenna was calculated by reducing the readings by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

where:

$P_d$  is the dipole equivalent power and

$P_g$  is the generator output power into the substitution antenna.

The  $P_d$  levels are the absolute levels of radiated spurious emissions in dBm.

Any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P)$  dB.

Since by mathematical definition,  $P(\text{dBm}) - (50 + 10 \log P(\text{W})) = -20 \text{ dBm}$ , the limit for spurious emissions was set to -20 dBm equivalent radiated power.



### 10.5.2 Spurious Radiated Emissions Test Results

Model	101-2017-025	Specification	FCC Part 90.210 RSS-119 Section 5.8
Serial Number	0028	Test Date	06/11/2019 & 06/12/2019
Test Distance	3 Meters	Notes	Transmit Mode Max Power
Test Personnel	Richard Tichgelaar		

Three axis of rotation were tested. The following shows the worst case emissions of the three rotations for each antenna polarization.

Harmonic	Tx	Measured	Equivalent Radiated power into Dipole		Limit	Margin Under Limit	
			Freq	Freq		Vertical	Horizontal
#	MHz	MHz	dBm	dBm	dBm	Vertical	Horizontal
2	450.0250	900.05	-50.0	-49.9	-20.0	30.0	29.9
3	450.0250	1350.08	-43.9	-45.6	-20.0	23.9	25.6
4	450.0250	1800.10	-51.0	-51.7	-20.0	31.0	31.7
5	450.0250	2250.13	-52.4	-52.2	-20.0	32.4	32.2
6	450.0250	2700.15	-51.9	-51.8	-20.0	31.9	31.8
7	450.0250	3150.18	-51.3	-49.2	-20.0	31.3	29.2
8	450.0250	3600.20	-46.0	-47.4	-20.0	26.0	27.4
9	450.0250	4050.23	-47.6	-47.4	-20.0	27.6	27.4
10	450.0250	4500.25	-39.6	-34.7	-20.0	19.6	14.7
2	460.0000	920.00	-51.7	-53.8	-20.0	31.7	33.8
3	460.0000	1380.00	-44.3	-43.7	-20.0	24.3	23.7
4	460.0000	1840.00	-50.5	-50.3	-20.0	30.5	30.3
5	460.0000	2300.00	-51.9	-51.1	-20.0	31.9	31.1
6	460.0000	2760.00	-51.6	-51.1	-20.0	31.6	31.1
7	460.0000	3220.00	-49.3	-50.4	-20.0	29.3	30.4
8	460.0000	3680.00	-43.4	-42.2	-20.0	23.4	22.2
9	460.0000	4140.00	-48.4	-48.1	-20.0	28.4	28.1
10	460.0000	4600.00	-38.3	-35.1	-20.0	18.3	15.1
2	469.9750	939.95	-50.1	-52.7	-20.0	30.1	32.7
3	469.9750	1409.93	-42.6	-43.7	-20.0	22.6	23.7
4	469.9750	1879.90	-47.9	-48.7	-20.0	27.9	28.7
5	469.9750	2349.88	-51.4	-51.3	-20.0	31.4	31.3
6	469.9750	2819.85	-51.7	-51.9	-20.0	31.7	31.9
7	469.9750	3289.83	-48.7	-49.4	-20.0	28.7	29.4
8	469.9750	3759.80	-42.3	-41.5	-20.0	22.3	21.5
9	469.9750	4229.78	-47.7	-47.5	-20.0	27.7	27.5
10	469.9750	4699.75	-41.9	-41.5	-20.0	21.9	21.5

Judgment: Passed by at least 14.7 dB.

No other radiated emissions were detected within 15 dB of the limits from 30 MHz to 4.7 GHz.



## 10.6 Frequency Stability

### 10.6.1 Frequency Stability Vs Temperature

The chamber was then set to the lowest temperature. The transmitter was in the chamber and allowed to stabilize for 15 minutes. The transmitter was then keyed, and the frequency was recorded. The chamber was then incremented in 10°C steps with a minimum of 15-minute stabilization period for each temperature measurement. The transmitter was off during the temperature transitions.

### 10.6.2 Frequency Stability Vs Supply Voltage

The EUT was allowed to stabilize with the nominal primary power supply voltage applied. The primary input voltage was varied from the lowest to the highest rated levels specified by the manufacturer. Frequency readings were taken at increments of 0.5 VDC.

### 10.6.3 Test Results for Frequency Stability

Model	101-2017-025	Specification	FCC Part 90.213 RSS-119 Section 5.3
Serial Number	0028	Test Date	06/07/2019 and 06/13/2019
Test Personnel	Richard Tichgelaar	Test Location	Chamber F
Test Equipment	Spectrum Analyzer (REC-20); Freq. Counter(CNT-01); Temperature Chamber TC-01; Digital Multimeter (DMM-11)		
Notes	15 minutes at each Temperature; 1 min at each voltage		
Nominal Frequency	460.000216 MHz		

Volts	Freq.	Nominal Freq:	Deviation	
VDC	(MHz)	MHz	Hz	PPM
3.8	460.000233	460.000216	17.0	0.037
3.6	460.000219	460.000216	3.0	0.007
3.4	460.000207	460.000216	-9.0	-0.020
3.2	460.000217	460.000216	1.0	0.002
3.0	460.000220	460.000216	4.0	0.009
2.8	460.000221	460.000216	5.0	0.011
2.6	460.000212	460.000216	-4.0	-0.009
2.4	460.000215	460.000216	-1.0	-0.002

Tested to Battery End point.

Temp	Measured Freq	Nominal Freq:	Deviation	
Deg C	(MHz)	MHz	Hz	PPM
50	460.000205	460.000216	-11.0	-0.024
40	460.000194	460.000216	-22.0	-0.048
30	460.000201	460.000216	-15.0	-0.033
20	460.000216	460.000216	0.0	0.000
10	460.000206	460.000216	-10.0	-0.022
0	460.000208	460.000216	-8.0	-0.017
-10	460.000225	460.000216	9.0	0.020
-20	460.000173	460.000216	-43.0	-0.093
-30	460.000121	460.000216	-95.0	-0.207

Test Requirements: Limit is 2.5 ppm


Judgement: Pass



## 10.7 Transient Frequency Behavior

### 10.7.1 Test method

The test was performed in accordance to TIA-603-D Section 2.2.19.3 Alternate Method of Measurement (Using a Test Receiver). The equipment was connected as shown below.

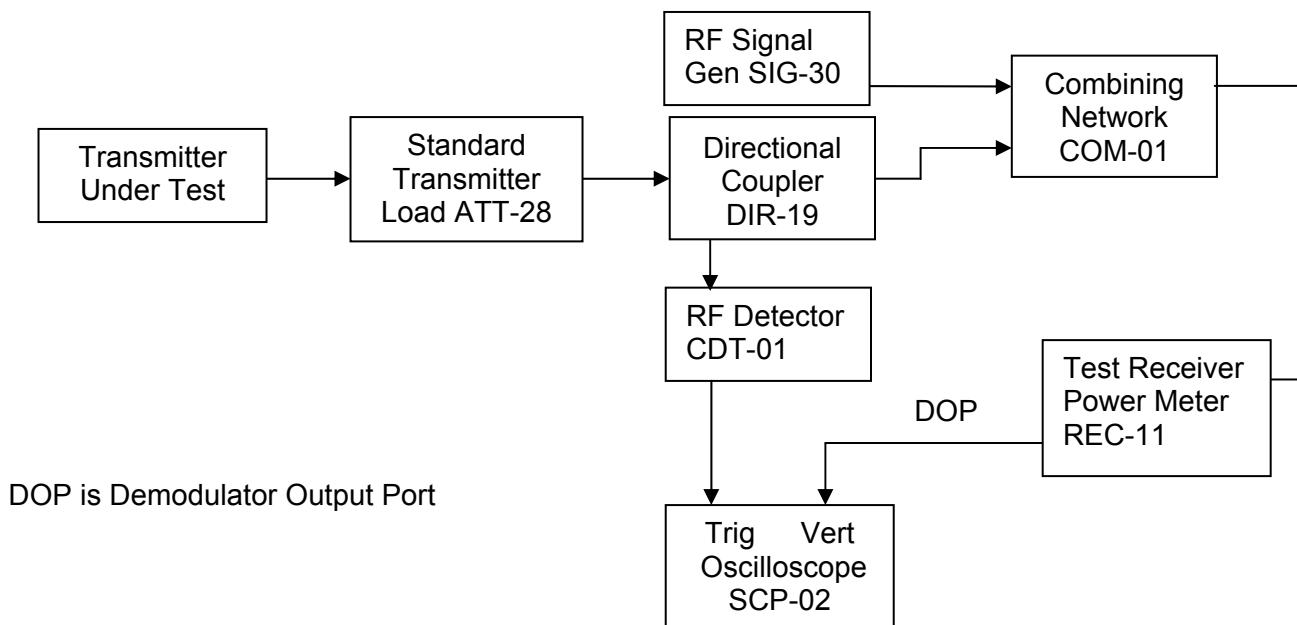

### 10.7.2 Limits of transient frequency

Time intervals <sup>1,2</sup>	Maximum Frequency Difference <sup>3</sup>	421 to 512 MHz Equipment Operating on 12.5 kHz Channels
$t_1$ <sup>4</sup>	$\pm 12.5$ kHz	10.0 mSec
$t_2$	$\pm 6.25$ kHz	25.0 mSec
$t_3$ <sup>4</sup>	$\pm 12.5$ kHz	10.0 mSec

<sup>1</sup> $t_{on}$  is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

<sup>2</sup> $t_1$  is the time period immediately following  $t_{on}$ .

<sup>3</sup> $t_2$  is the time period immediately following  $t_1$ .

<sup>4</sup> $t_3$  is the time period from the instant when the transmitter is turned off until  $t_{off}$ .

$t_{off}$  is the instant when the 1 kHz test signal starts to rise.

<sup>2</sup> During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in § 90.213.

<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.

<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.



### 10.7.3 Test Results

Model	101-2017-025	Specification	FCC part 90.214 RSS-119 Section 5.9
Serial Number	0028	Test Date	
Test Personnel	Joseph Strzelecki; Rich Tichgelaar	Test Location	Chamber C


Freq MHz	Channel BW	Limits for Time interval/Freq difference						Test Result	
		t <sub>1</sub>		t <sub>2</sub>		t <sub>3</sub>			
		mSec	kHz	mSec	kHz	mSec	kHz		
450.025	12.5	10	12.5	25	6.25	10	12.5*	Pass	
460.000	12.5	10	12.5	25	6.25	10	12.5*	Pass	
469.975	12.5	10	12.5	25	6.25	10	12.5*	Pass	



Judgement: Pass

\*Since the transmitter carrier output power is less than 6 watts, the frequency difference during the t3 time period may exceed the maximum frequency difference for this time period.

### 10.7.4 Results for Time Periods t1 and t2

The EUT passed the 6.25 kHz limit so the 12.5 limit is not shown.

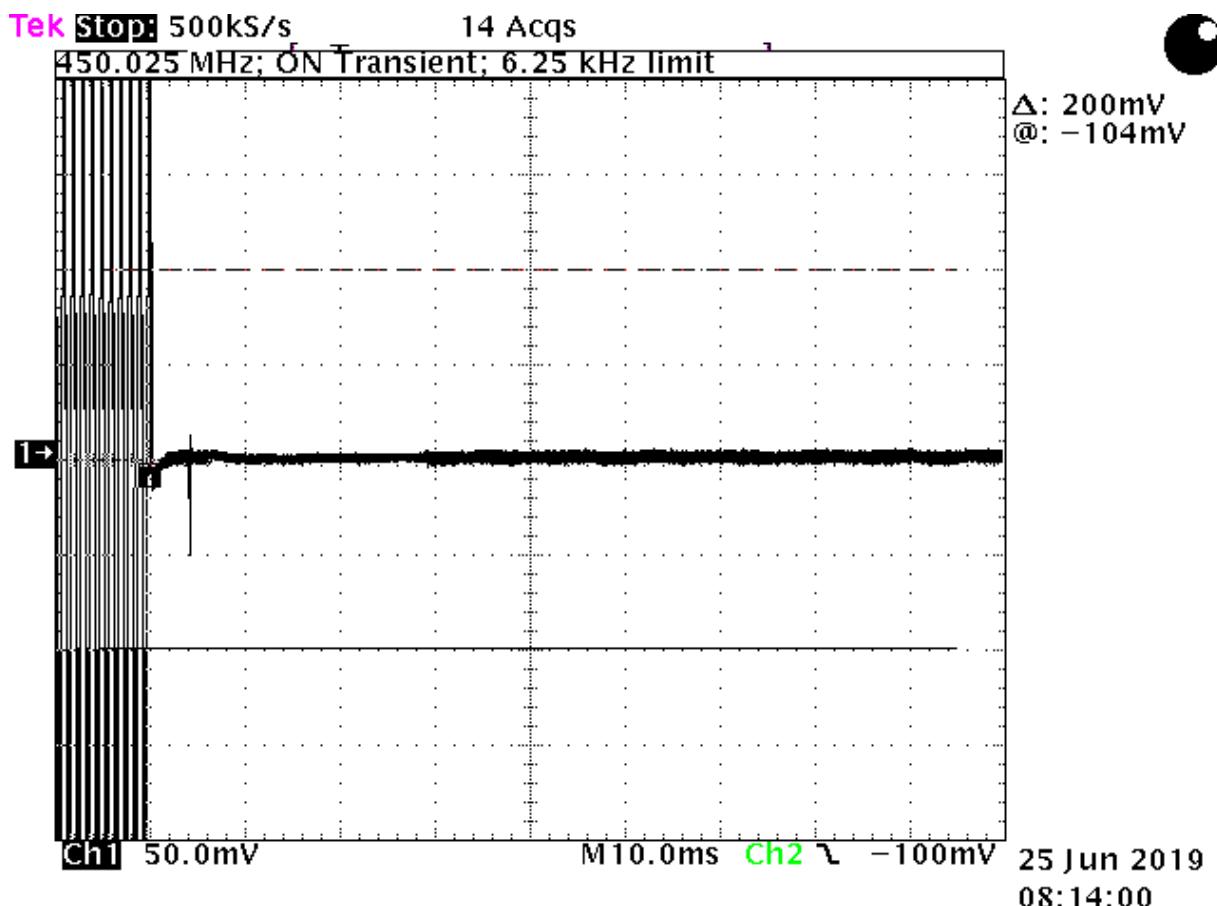


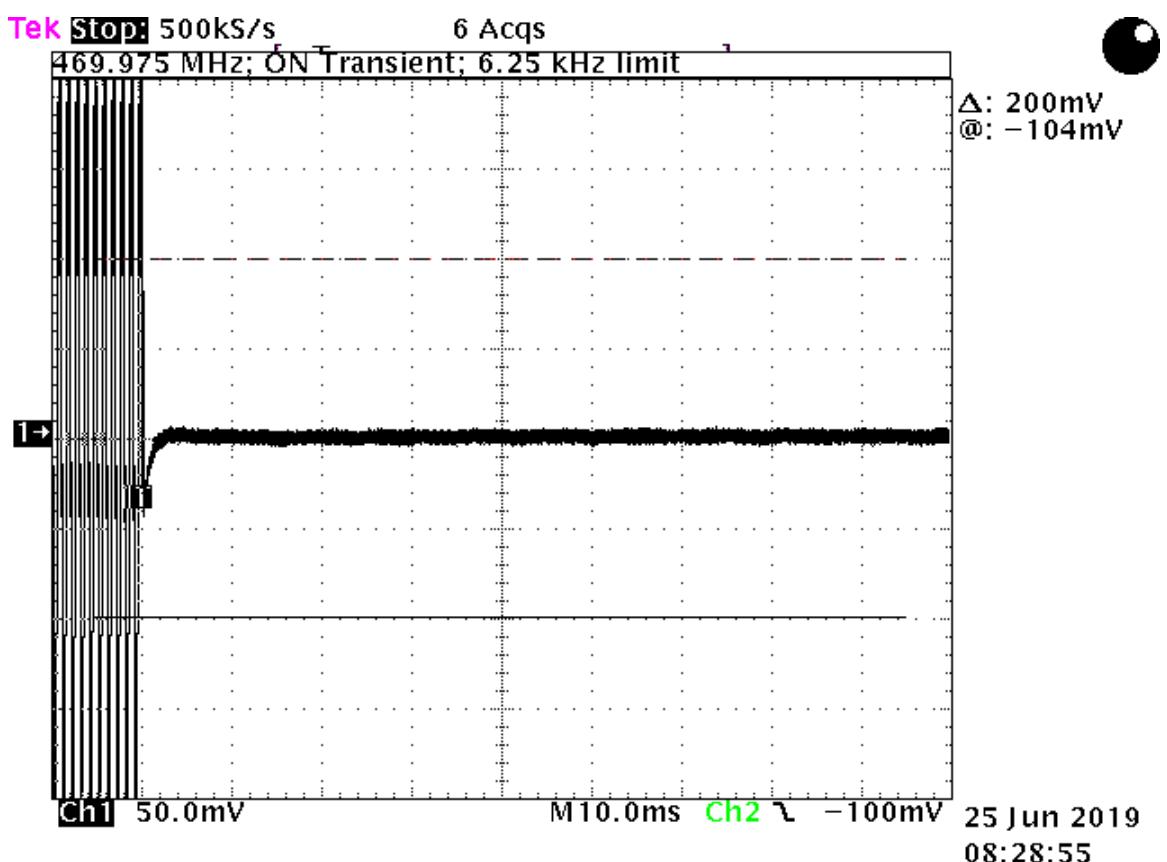
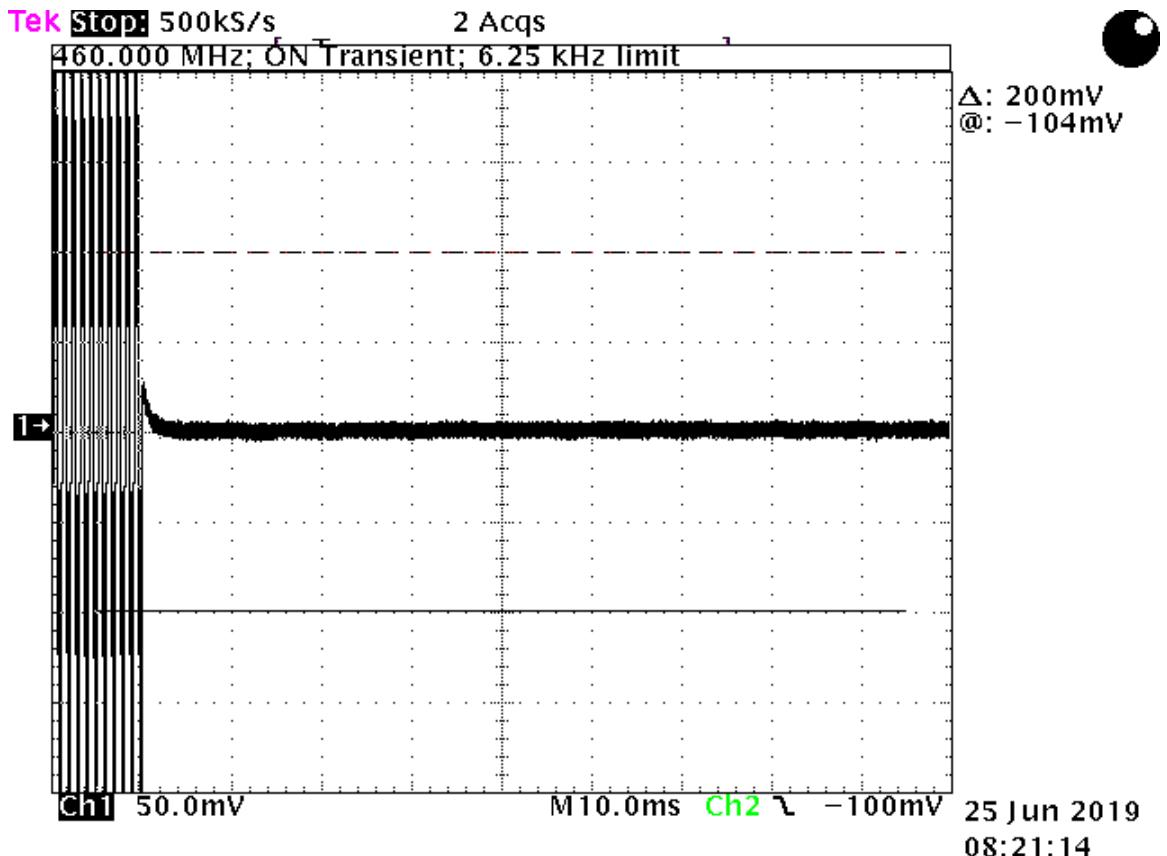




### 10.7.5 Results for Time Period between t2 and t3

The limit between t2 and t3 on all the scope traces are calculated for the 450 MHz Channel since this is the lowest limit. This limit is 450 MHz \* 2.5 ppm or 1125 Hz.

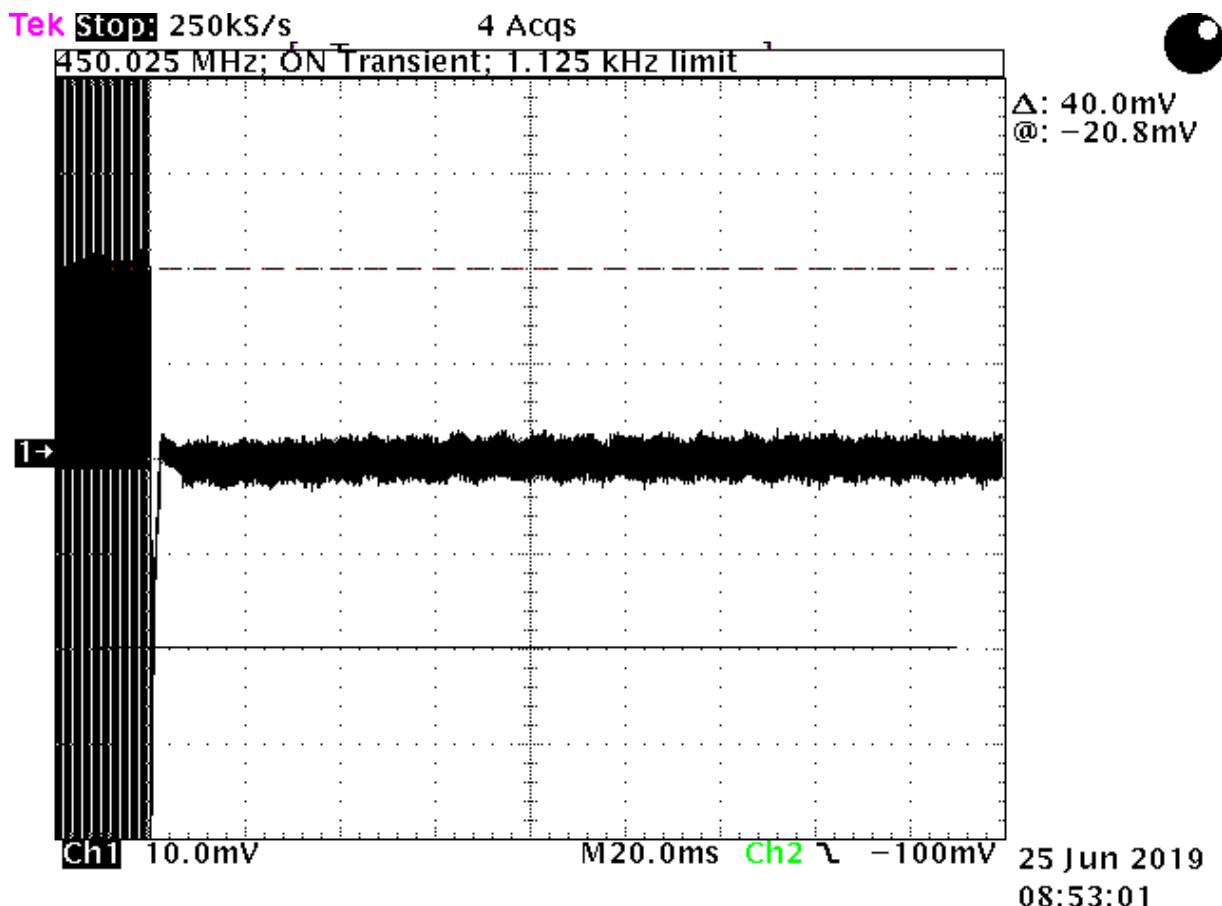


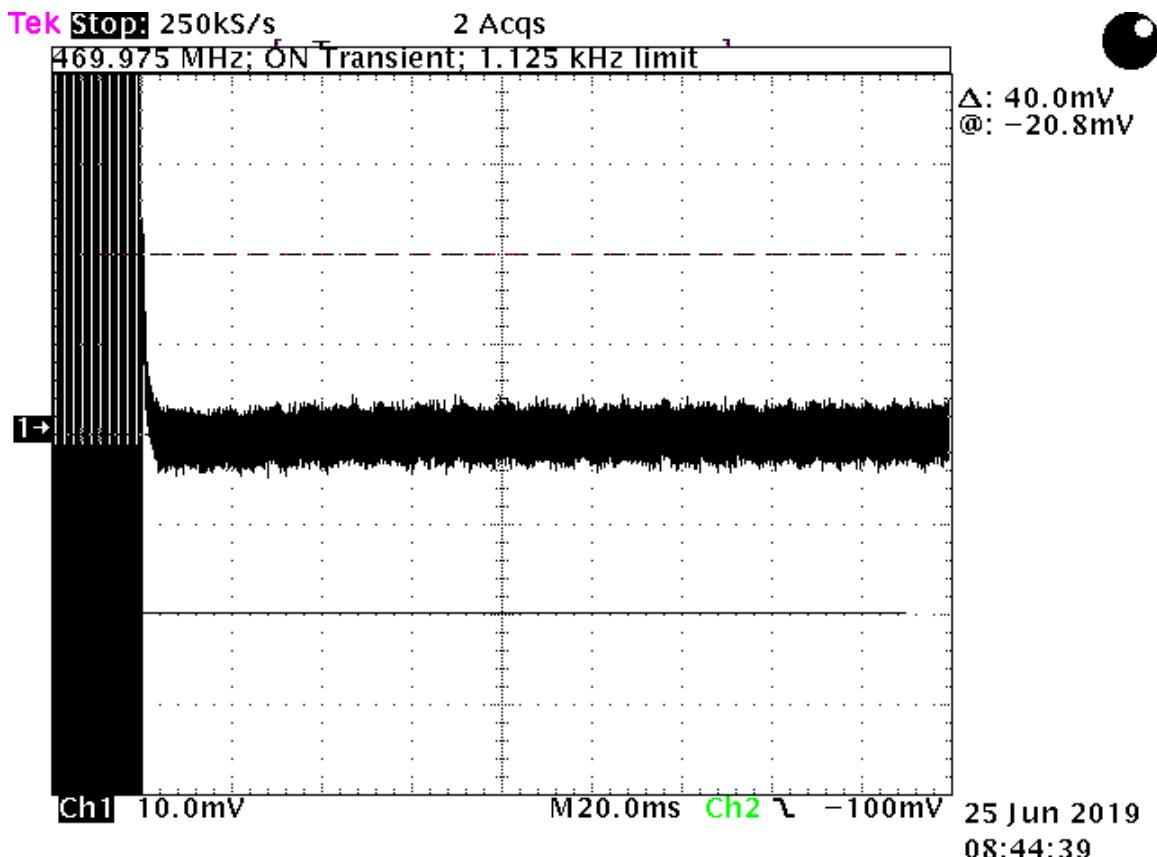
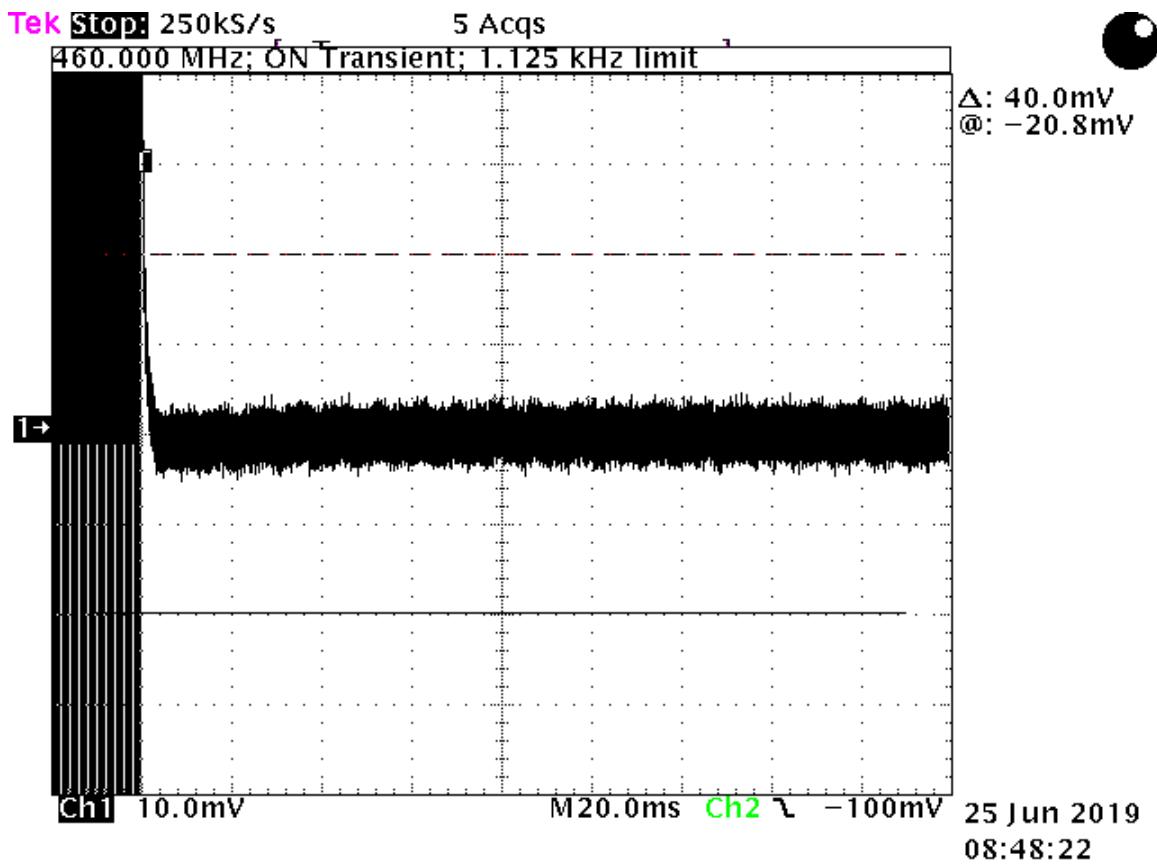




### 10.7.6 Results for Time Period t3

Since the transmitter carrier output power is less than 6 watts, the frequency difference during the t3 time period may exceed the maximum frequency difference for this time period.

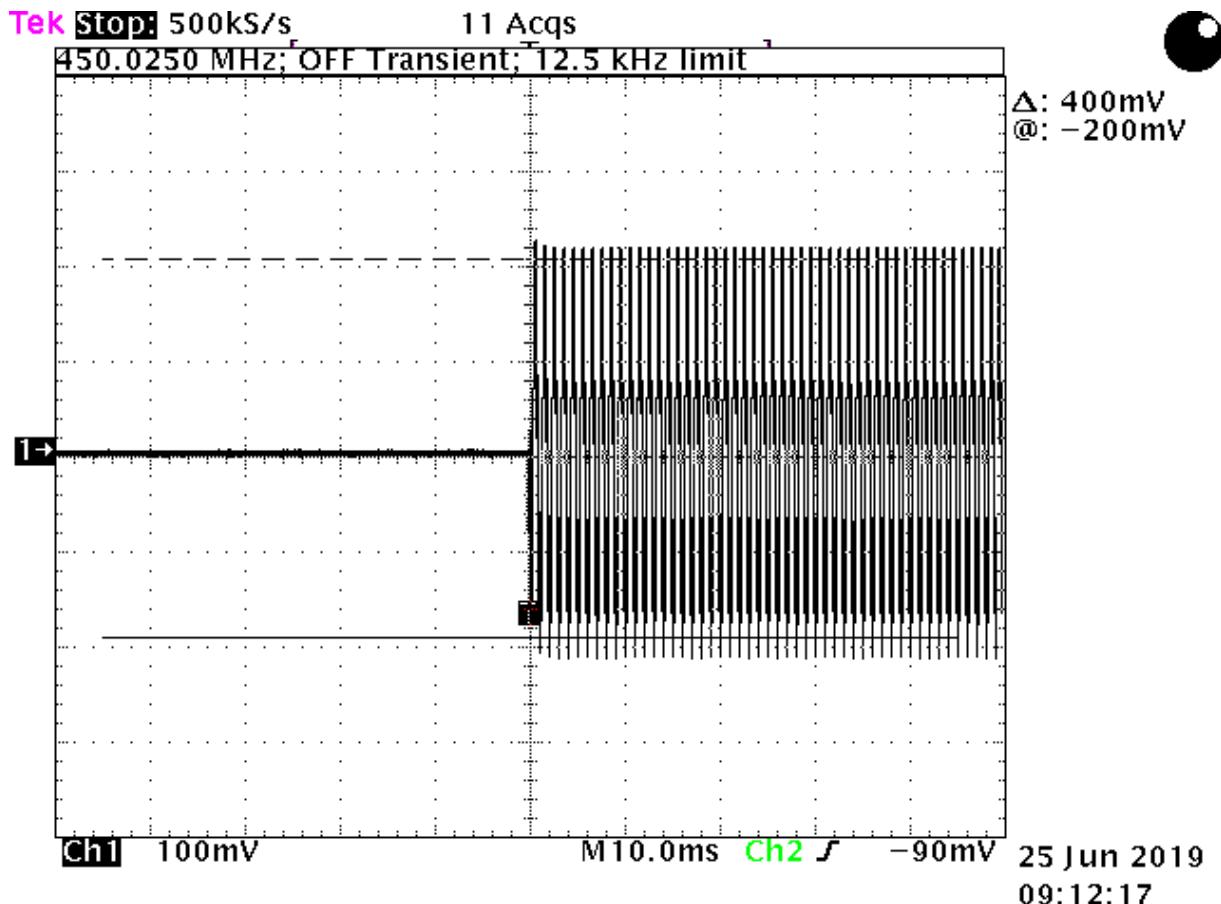

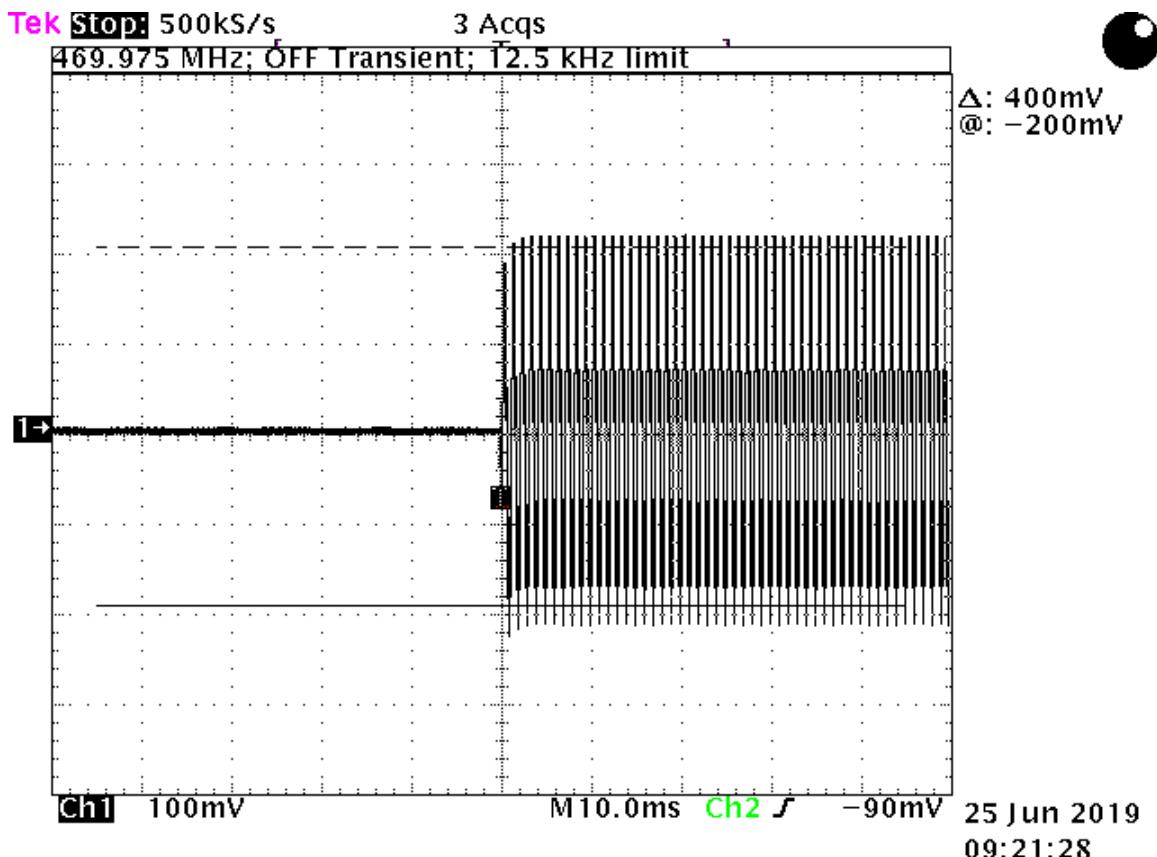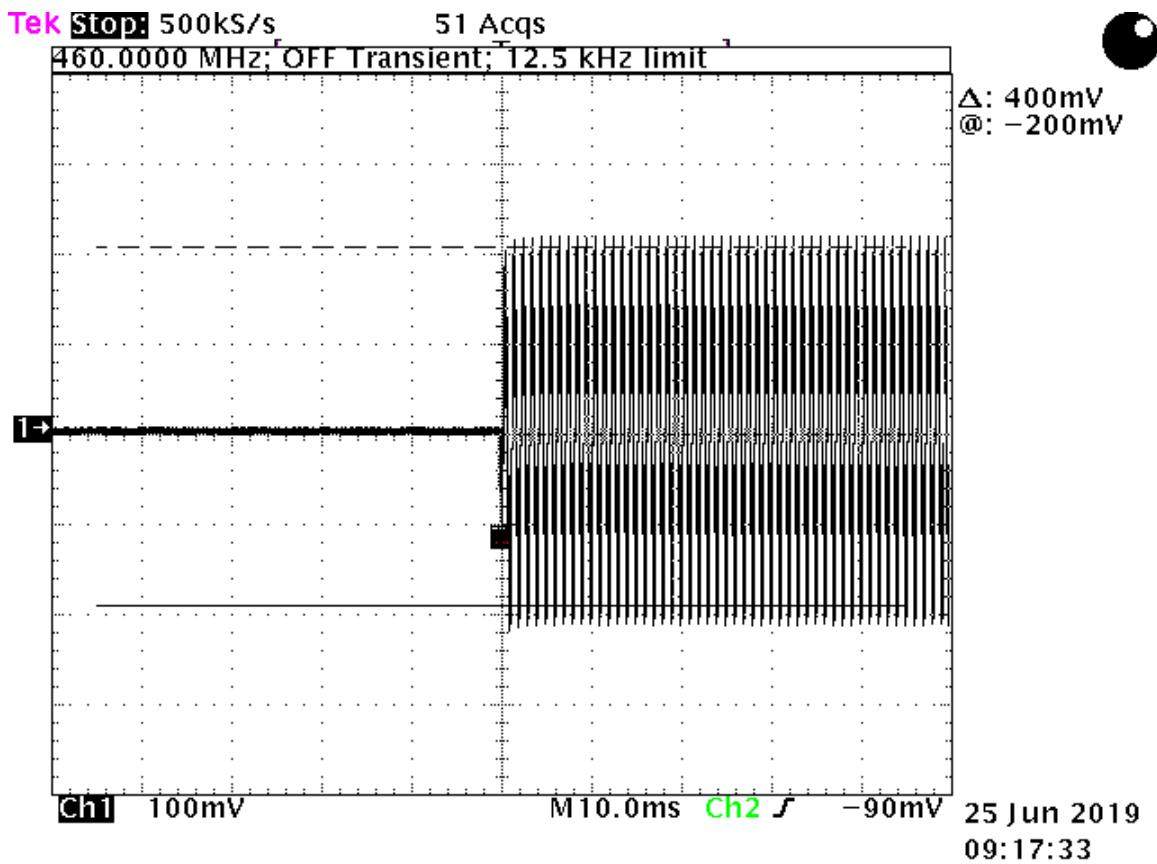



## 10.8 Radiated Emissions (Receive Mode)

Radiated emission measurements were performed with linearly polarized broadband antennas. The results obtained with these antennas can be correlated with results obtained with a tuned dipole antenna. The radiated emission measurements were performed with a spectrum analyzer. The bandwidth used from 30 MHz to 1000 MHz is 100 or 120 kHz. Above 1 GHz, a 1 MHz bandwidth is used. A 10-dB linearity check is performed prior to start of testing in order to determine if an overload condition exists.

From 30 to 2000 MHz, an Agilent spectrum analyzer was used. Final radiated emissions measurements were performed inside of an anechoic chamber at a test distance of 3 meters. The anechoic chamber is designated as Chamber E. This Chamber meets the Site Attenuation requirements of ANSI C63.4 and CISPR 16-1. Chamber E is located at 12 East Devonwood Ave. Romeoville, Illinois EMI test lab.

The entire frequency range from 30 to 2000 MHz was slowly scanned with attention paid to those frequency ranges which appeared high. Measurements were performed using two antenna polarizations, (vertical and horizontal). The worst-case emissions were recorded. All measurements may be performed using either the peak, average or quasi-peak detector functions. If the peak detector data exceeds or is marginally close to the limits, the measurements are repeated using a quasi-peak detector or average function as required by the specification for final determination of compliance.

The detected emission levels were maximized by rotating the EUT, adjusting the positions of all cables, and by scanning the measurement antenna from 1 to 4 meters above the ground.

### 10.8.1 Radiated Emissions Field Strength Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and by subtracting the Amplifier Gain from the measured reading. The basic equation is as follows:

$$FS = RA + AF + CF - AG$$

Where: FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

### 10.8.2 Spurious Radiated Emissions Test Results (Receive Mode)

Model	101-2017-025	Specification	FCC Part 15 Subpart B & RSS-Gen
Serial Number	0028	Test Date	06/12/2019
Tested by	Richard Tichgelaar Chris E. Dalessio	Test Distance	3 Meters
Abbreviations	Pol = Antenna Polarization; V = Vertical; H = Horizontal; P = peak; Q = QP		
Configuration	Receive Mode		


Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist. Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
30.0	7.6	P	H	13.8	0.4	0.0	21.8	40.0	18.2	
30.6	7.2	P	H	13.6	0.4	0.0	21.2	40.0	18.8	
37.2	10.8	P	H	11.7	0.4	0.0	22.9	40.0	17.1	
95.7	9.2	P	H	10.0	0.7	0.0	19.9	43.5	23.6	
100.7	8.6	P	H	10.3	0.7	0.0	19.7	43.5	23.8	
138.3	8.5	P	H	12.5	0.9	0.0	21.8	43.5	21.7	
167.0	9.9	P	H	13.0	1.0	0.0	23.9	43.5	19.6	



Freq. MHz	Meter Reading dBuV	Dect.	Ant. Pol.	Ant Factor	Cable & Amp Factors	Dist. Fact dB	EUT dBuV/m	Limit dBuV/m	Margin Under Limit dB	Note
181.9	9.4	P	H	13.5	1.0	0.0	24.0	43.5	19.5	
238.3	8.8	P	H	15.2	1.2	0.0	25.2	46.0	20.8	
251.0	9.1	P	H	15.5	1.2	0.0	25.8	46.0	20.2	
337.4	10.2	P	H	13.9	1.4	0.0	25.5	46.0	20.5	
342.7	8.9	P	H	13.9	1.5	0.0	24.3	46.0	21.7	
463.5	9.7	P	H	16.7	1.7	0.0	28.1	46.0	17.9	
487.7	10.6	P	H	17.3	1.8	0.0	29.7	46.0	16.3	
502.0	10.3	P	H	17.6	1.8	0.0	29.7	46.0	16.3	
518.8	10.7	P	H	18.1	1.9	0.0	30.7	46.0	15.3	
530.0	7.7	P	H	17.6	1.9	0.0	27.1	46.0	18.9	
747.5	7.5	P	H	21.5	2.2	0.0	31.2	46.0	14.8	
813.8	10.2	P	H	20.8	2.4	0.0	33.4	46.0	12.6	
903.8	8.6	P	H	21.6	2.5	0.0	32.7	46.0	13.3	
1000.0	8.3	P	H	23.5	2.6	0.0	34.4	54.0	19.6	
1325.0	41.8	P	H	25.0	-32.6	0.0	34.2	74.0	39.8	1
1415.0	42.2	P	H	25.1	-32.6	0.0	34.7	74.0	39.3	1
1482.5	42.7	P	H	25.1	-32.6	0.0	35.2	74.0	38.8	1
1647.5	44.0	P	H	25.5	-32.4	0.0	37.0	74.0	37.0	1
1750.0	43.7	P	H	26.8	-32.3	0.0	38.2	74.0	35.8	1
1832.5	42.2	P	H	26.8	-32.1	0.0	36.9	74.0	37.1	1
2000.0	42.8	P	H	27.4	-31.9	0.0	38.3	74.0	35.7	1
30.0	8.0	P	V	13.8	0.4	0.0	22.1	40.0	17.9	
36.6	12.1	P	V	11.9	0.4	0.0	24.4	40.0	15.6	
37.2	12.4	P	V	11.7	0.4	0.0	24.6	40.0	15.4	
47.7	11.4	P	V	9.8	0.5	0.0	21.7	40.0	18.3	
51.0	11.9	P	V	9.4	0.5	0.0	21.8	40.0	18.2	
72.0	10.1	P	V	9.3	0.6	0.0	20.0	40.0	20.0	
85.3	11.7	P	V	9.4	0.7	0.0	21.8	40.0	18.2	
160.9	8.2	P	V	12.9	1.0	0.0	22.1	43.5	21.4	
167.6	9.2	P	V	13.0	1.0	0.0	23.2	43.5	20.3	
200.0	7.8	P	V	10.6	1.1	0.0	19.4	43.5	24.1	
238.3	13.4	P	V	15.2	1.2	0.0	29.8	46.0	16.2	
251.0	9.1	P	V	15.5	1.2	0.0	25.8	46.0	20.2	
257.4	11.6	P	V	12.1	1.2	0.0	25.0	46.0	21.0	
294.4	12.6	P	V	13.4	1.3	0.0	27.3	46.0	18.7	
308.0	9.6	P	V	15.0	1.4	0.0	25.9	46.0	20.1	
375.9	9.3	P	V	14.7	1.5	0.0	25.6	46.0	20.4	
428.8	9.9	P	V	16.4	1.6	0.0	27.9	46.0	18.1	
500.0	8.3	P	V	17.5	1.8	0.0	27.6	46.0	18.4	
502.0	10.7	P	V	17.6	1.8	0.0	30.1	46.0	15.9	
563.8	9.8	P	V	18.9	1.9	0.0	30.6	46.0	15.4	
675.0	9.9	P	V	20.7	2.1	0.0	32.8	46.0	13.2	
806.3	7.9	P	V	20.2	2.4	0.0	30.4	46.0	15.6	
877.5	8.7	P	V	22.2	2.4	0.0	33.3	46.0	12.7	
1000.0	10.2	P	V	23.5	2.6	0.0	36.3	54.0	17.7	
1015.0	41.8	P	V	24.1	-32.6	0.0	33.3	74.0	40.7	1
1410.0	42.6	P	V	25.1	-32.6	0.0	35.1	74.0	38.9	1
1552.5	43.4	P	V	25.2	-32.5	0.0	36.1	74.0	37.9	1
1732.5	42.9	P	V	26.6	-32.3	0.0	37.1	74.0	36.9	1
1995.0	42.6	P	V	27.4	-31.9	0.0	38.1	74.0	35.9	1
2000.0	42.6	P	V	27.4	-31.9	0.0	38.1	74.0	35.9	1

Note 1; Peak reading meeting the average limit, so the average reading is not required.

Judgment: Pass by 12.6 dB

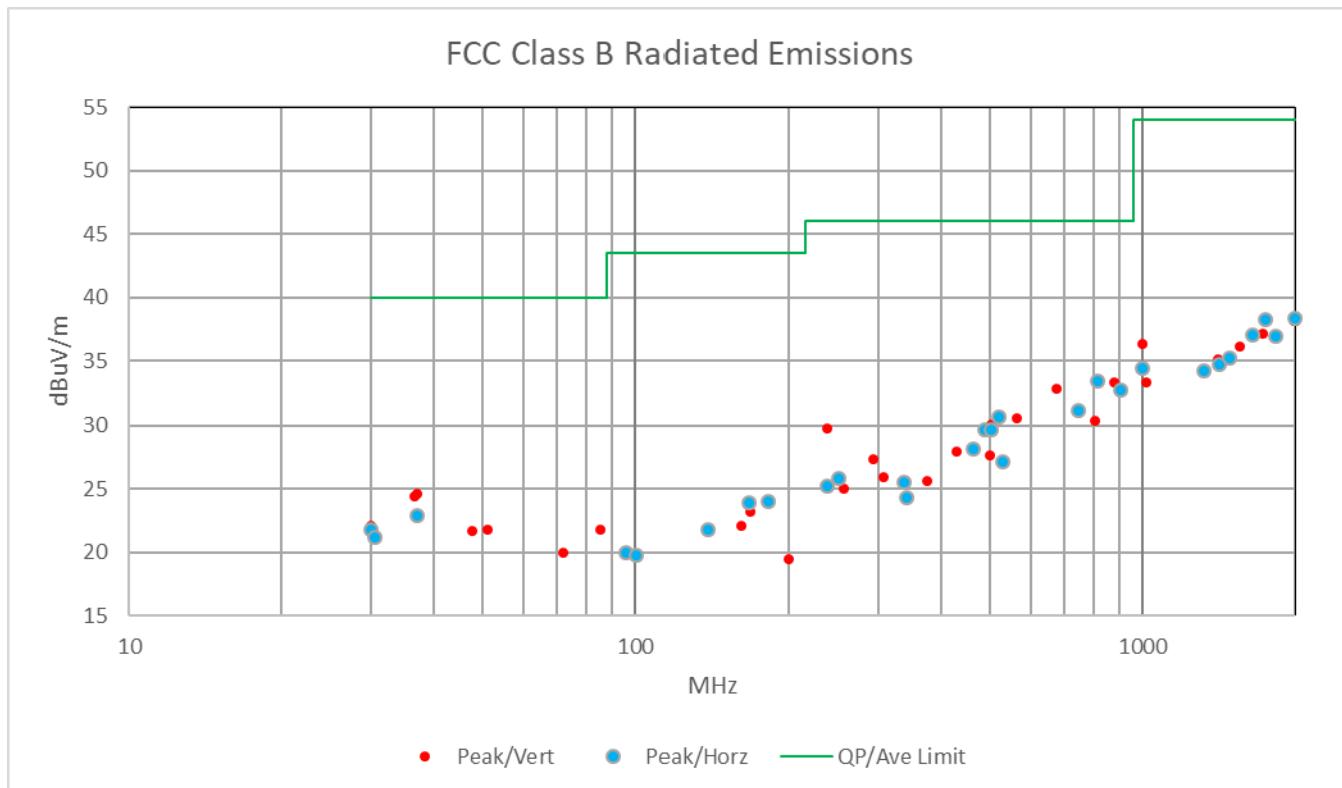

Radiated emissions in a graphical format. The above chart is the same data as the previous table. The peak limit is not shown, since the peak readings meet the lower average limit.

## 11.0 MEASUREMENT INSTRUMENTATION UNCERTAINTY

Measurement	Uncertainty
Radiated Emissions, E-field, 3 meters, 30 to 200 MHz	3.3 dB
Radiated Emissions, E-field, 3 meters, 200 to 1000 MHz	4.9 dB
Radiated Emissions, E-field, 3 meters, 1 to 18 GHz	4.8 dB
99% Occupied Bandwidth using REC-43	1% of frequency span
Conducted power PWM-01 at 460 MHz	0.14 dB
Amplitude measurement 1-5000 MHz	1.5 dB
Temperature THM-02	0.6 Deg. C

The uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2 in accordance with CISPR 16-4-2.