

Report No.: 0000132

Tested By: Hong, Report No.: 0000132

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB


Final Measurement: x QP

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
3	9k	30M	EI078

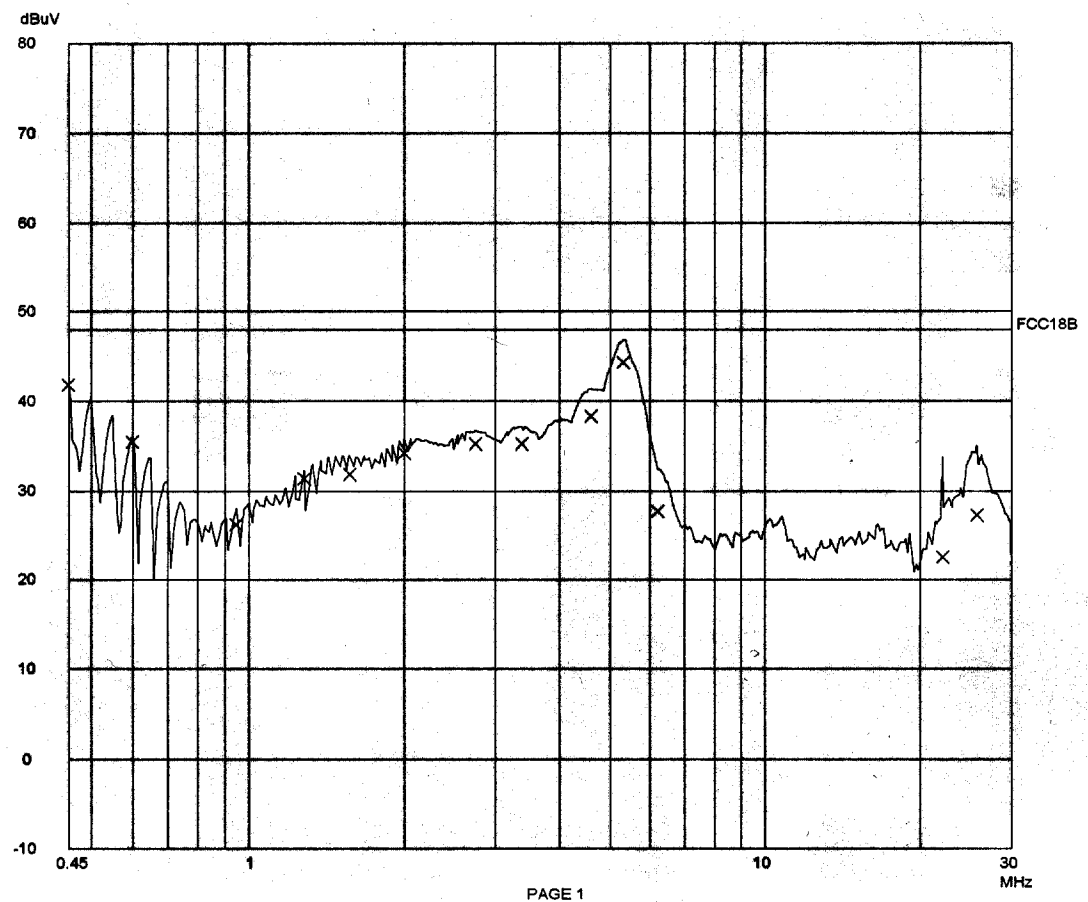

Ctrl No.: N/A



Intertek Testing Services

ETL SEMKO

Report No.: 0000132

Tested By: Hong, Report No.: 0000132

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV
0.45000	41.8	48.0
0.60000	35.4	48.0
0.95000	26.2	48.0
1.28000	31.3	48.0
1.57000	31.7	48.0
2.00500	34.2	48.0
2.74500	35.2	48.0
3.37500	35.2	48.0
4.62000	38.2	48.0
5.31500	44.3	48.0
6.22500	27.7	48.0
22.10500	22.5	48.0
25.72500	27.2	48.0

* limit exceeded

Ctrl No.: N/A