

F C C - TEST REPORT

REPORT NO.: 48419A

FCC – Test Report**No. 48419A**Date: 2007-09-17

Page 2 of 18

FCC listed testlab
acc. to Section 2.948 of the FCC - Rules
in compliance with the requirements of
ANSI C63.4 - 2003

Product : Wireless Head Phone

Product Class : Low Power Communication
Device Transmitter

Brand Name : -

Model : 50117

Applicant : KIN SUN ELECTRONICS LTD.

**FCC – Test Report****No. 48419A**Date: 2007-09-17

Page 3 of 18

TABLE OF CONTENTS

1. **Cover sheet**
2. **Introduction**
3. **Table of Contents**
4. **Laboratory Report**
5. **Test Location and Summary of Test Results**
6. **Test Equipment List**
7. **Radiated Emission Test Setup**
8. **Conducted Emission Test Setup**
9. **Test Procedure**
10. **Test Results**
- 11-17. **Measurement Data**
18. **Photo of sample**

FCC – Test ReportDate: 2007-09-17**No. 48419A**

Page 4 of 18

LABORATORY - REPORT**APPLICANT:** KIN SUN ELECTRONICS LIMITED**ADDRESS:** Unit P, 4/F., Haribest Ind. Building
45-47 Au Pui Wan Street
Fo Tan, Shatin, N.T.
Hong Kong**DATE OF SAMPLE RECEIVED:** 2007-07-09**DATE OF TESTING:** 2007-09-12 to 2007-09-17**DESCRIPTION OF SAMPLE:**


Product: Wireless Head Phone
Product class: Low Power Communication Device Transmitter
Model number: 50117
Rating: AC/DC Adaptor, Input : AC120V, 60Hz; Output : DC12V

CONDITION OF TEST SAMPLE: The received sample was under good condition. Modification was performed on the sample to improve the sample to pass the radiated emission test. Refer to the modification report for details.

INVESTIGATIONS REQUESTED: Measurements to the relevant clauses of F.C.C. Rules and Regulations Part 15 Subpart C - Intentional Radiators.

RESULTS: See the attached sheets.

CONCLUSIONS: From the measurement data obtained, the tested sample was considered to have **COMPLIED** with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.



Authorized Signature

FCC – Test Report

No. 48419A

Date: 2007-09-17

Page 5 of 18

Test Location

International Electrical Certification Centre Ltd.
Unit 602-605, 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong
Tel : +852 23052570
Fax : +852 27564480
Email : info@iecc.com.hk

Summary of Test Results

Radiated Emission:

Test result: O.K.
Test data: See attached data sheet

Conducted Emission:

Test result: O.K.
Test data: See attached data sheet

Measurement of Emissions within Band Edges

Test result: O.K.
Test data: See attached data sheet

FCC – Test ReportDate: 2007-09-17**No. 48419A**


Page 6 of 18

TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Date
Test Receiver	Rohde & Schwarz	ESCS 30	100388	12/4/2007	11/4/2008
Test Receiver	Rohde & Schwarz	ESHS 30	839667/002	14/11/2006	13/11/2007
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127	8127312	20/12/2006	19/12/2007
Antenna	Schaffner	CBL6111C	2791	25/05/2005	24/05/2008
Antenna Mast System	Schwarzbeck	AM9104	--	--	--
Turntable with Controller	Drehtisch	DT312	--	--	--
Spectrum Analyzer with Q. Peak	Advantest	R3132	140101852	16/11/2005	15/11/2007

FCC – Test Report**No. 48419A**Date: 2007-09-17

Page 7 of 18

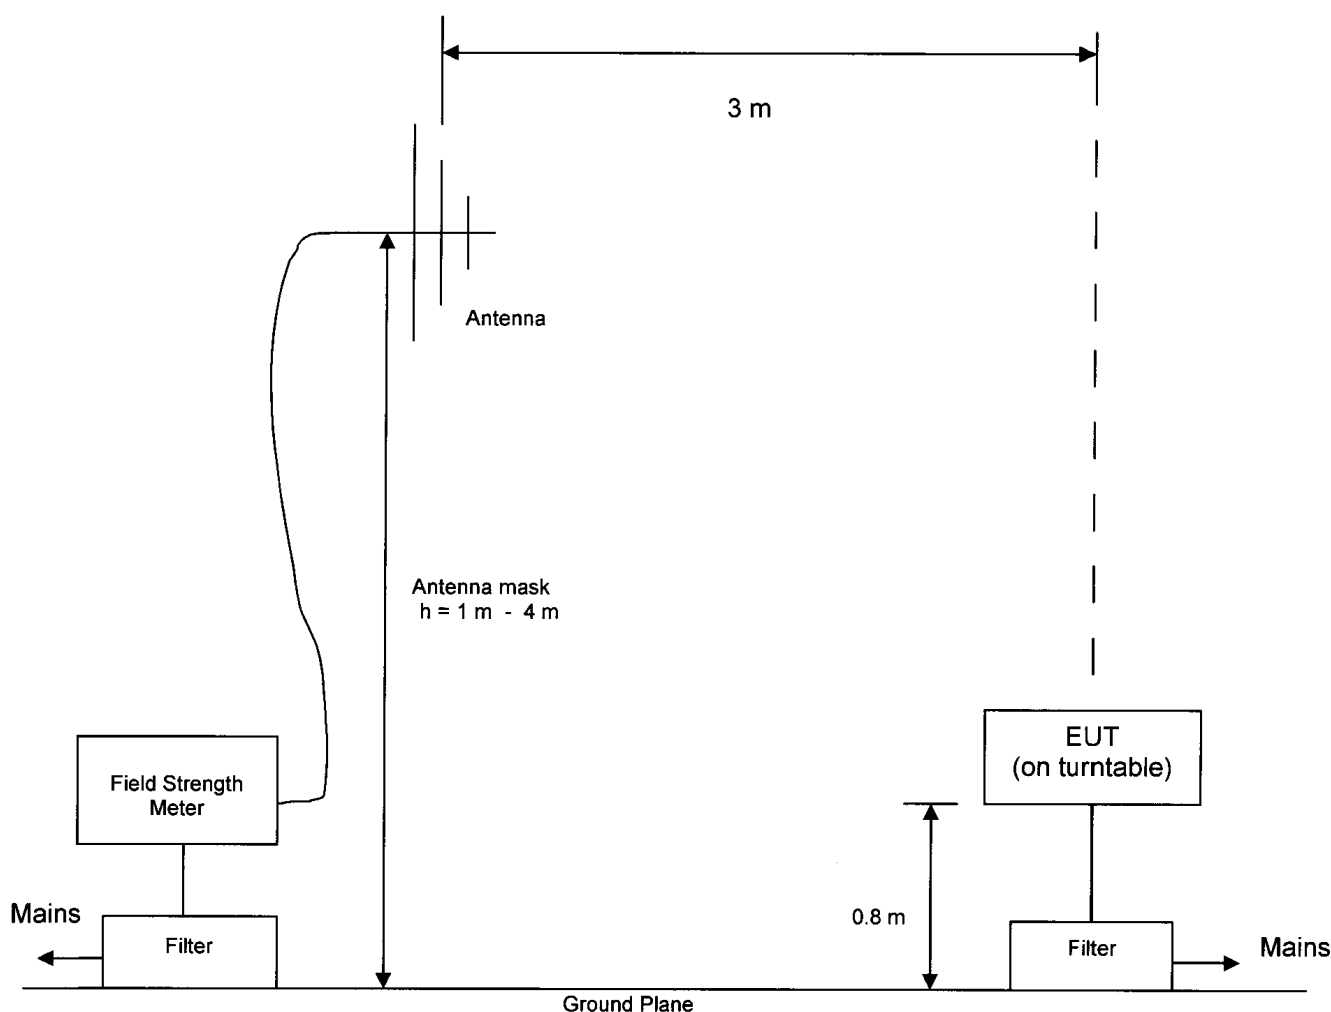Radiated Emission Test Setup (3 m distance) (> 30MHz)


FCC – Test Report

No. 48419A

Date: 2007-09-17

Page 8 of 18

Conducted Emission Test Setup

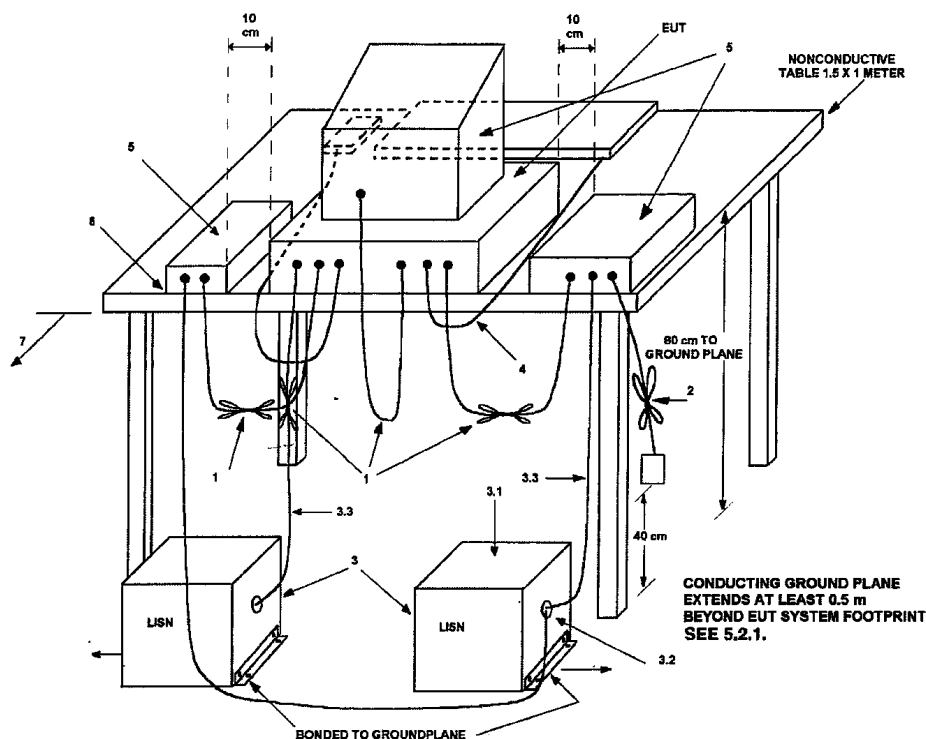

LEGEND:

- 1) Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long (see 6.1.4 and 11.2.4).
- 2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.1.4).
- 3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference groundplane (see 5.2.3 and 7.2.1).
 - 3.1) All other equipment powered from additional LISN(s).
 - 3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3) LISN at least 80 cm from nearest part of EUT chassis.
- 4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use (See 6.2.1.3 and 11.2.4).
- 5) Non-EUT components of EUT system being tested (see also Figure 13).
- 6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.1.1 and 6.2.1.2).
- 7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the groundplane (see 5.2.2 for options).

FCC – Test Report**No. 48419A**Date: 2007-09-17

Page 9 of 18

Test Procedure**Radiated Emission :**

The EUT was tested according to ANSI 63.4-2003 for the requirements of FCC Part 15 Subpart C Section 15.209 and 15.235.

During the test, the sample was placed on a turn table and operated with supply at rated AC voltage (i.e AC120V 60Hz) to the host adaptor. The table is 0.8 meter above the reference ground plane on the Open Area Test Site and can rotate 360 degrees to determine the position of the maximum emission level. A broad-band antenna for the frequency range 30 - 1000 MHz, connected with 10 meters coaxial cable to the test receiver was used for measurement. The antenna is capable of measuring both horizontal and vertical polarizations. The antenna was raised from 1 to 4 meters to find out the maximum emission level from the EUT.

An initial pre-scan was performed to find out the maximum emission level of the sample placed at 3 orthogonal planes. Final measurement (30 MHz –1000 MHz) was then performed to record the data for the emissions under worst-case condition for combination of the antenna orientation / height and turn table position.

Note : The Open Area Test Site located at IECC was placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules (FCC Registration No. : 97774).

Conducted Emission :

The EUT was tested according to ANSI 63.4-2003 for the requirements of FCC Part 15 Subpart B Section 15.207.

During the test, the sample was placed on a wooden table and operated under different modes with supply at rated AC voltage (i.e AC120V 60Hz) via the LISN to the host adaptor. The table is 0.8 meter above the floor. The LISN was connected to the test receiver for conducted emission measurement (150kHz – 30MHz).

FCC – Test Report

No. 48419A

Date: 2007-09-17

Page 10 of 18

Test Results

Radiated Emission :

Test Requirement:	FCC Part 15 Subpart B Section 15.209 and 15.235
Test Method:	ANSI C63.4 : 2003
Deviations from Standard Test Method:	Nil
Frequency Range:	30MHz – 1000MHz
Measurement Distance:	3 m
Detector:	Peak / Average (for fundamental frequency) Quasi-Peak (for frequencies outside the operation band)

Refer to page 11- 13 for measurement data.

Conducted Emission :

Test Requirement:	FCC Part 15 Subpart B Section 15.207
Test Method:	ANSI C63.4 : 2003
Deviations from Standard Test Method:	Nil
Frequency Range:	150kHz – 30MHz
Detector:	Quasi-Peak / Average

Refer to page 14 - 17 for measurement data.

Interference Radiation

Date : 2007-09-17

Measurement of Radiated Emissions
Acc: FCC Part 15 Subpart C (15.235 & 15.209)

Page 11 of 18

IECC Ref: 48419A
Model: 50117
Applicant: KIN SUN ELECTRONICS LIMITED

Test Equipment
Receiver: Rohde & Schwarz ESCS 30
Antenna: Schaffner CBL6111C

Ser.Nr.: --

Set under test: Wireless Head Phone
Connected sets: -
Operating mode: Operated with an audio signal from
a host MP3 player (maximum volume)

	Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Corr. Factor (dB)	Horiz. Test Result dB(μV/m)	Vert. Test Result dB(μV/m)	Limit dB(μV/m)
Peak	49.86	34	56	8.3	42.3	64.3	100.0
Av.	49.86	31	54	8.3	39.3	62.3	80.0
Harm. 2	99.72	< 16	< 16	10.1	< 26.1	< 26.1	43.5
Harm. 3	149.58	< 16	< 16	10.8	< 26.8	< 26.8	43.5
Harm. 4	199.44	< 16	< 16	8.6	< 24.6	< 24.6	43.5
Harm. 5	249.3	< 16	< 16	12.6	< 28.6	< 28.6	46.0
Harm. 6	299.16	24	< 16	13.9	37.9	< 29.9	46.0
Harm. 7	349.02	< 16	< 16	15.4	< 31.4	< 31.4	46.0
Harm. 8	398.88	< 16	< 16	16.8	< 32.8	< 32.8	46.0
Harm. 9	448.74	20	< 16	18.2	38.2	< 34.2	46.0
Harm. 10	498.6	< 16	< 16	19.1	< 35.1	< 35.1	46.0
Harm. 11	548.46	< 16	< 16	20.9	< 36.9	< 36.9	46.0
Harm. 12	598.32	< 16	< 16	20.7	< 36.7	< 36.7	46.0
Harm. 13	648.18	< 16	< 16	21.6	< 37.6	< 37.6	46.0
Harm. 14	698.04	< 16	< 16	22.4	< 38.4	< 38.4	46.0
Harm. 15	747.9	< 16	< 16	24.2	< 40.2	< 40.2	46.0
Harm. 16	797.76	< 16	< 16	24.0	< 40.0	< 40.0	46.0
Harm. 17	847.62	< 16	< 16	25.5	< 41.5	< 41.5	46.0
Harm. 18	897.48	< 16	< 16	25.4	< 41.4	< 41.4	46.0
Harm. 19	947.34	< 16	< 16	27.5	< 43.5	< 43.5	46.0

Note : 1. Unless otherwise indicated, the recorded readings are in quasi-peak values.

2. The above results were the worst case results with the sample positioned in all 3 axis during the test.

The worst case data were recorded with the antenna of the sample pointing vertical upward for vertical measurement and pointing horizontal for horizontal measurement.

3. Due to the transmitted signal is not in pulse waveform, the average value of the radiation at the fundamental frequency is recorded by direct measurement. Calculation from time domain plots is not applicable.

Operator : KS

Interference Radiation

Date : 2007-09-17

Measurement of Radiated Emissions
Acc: FCC Part 15 Subpart C (15.209)

Page 12 of 18

IECC Ref: 48419A
Model: 50117
Applicant: KIN SUN ELECTRONICS LIMITED
Ser.Nr.: --
Set under test: Wireless Head Phone
Connected sets: -
Operating mode: Charging the internal battery of the receiver

Test Equipment
Receiver: Rohde & Schwarz ESCS 30
Antenna: Schaffner CBL61111C

Frequency (MHz)	Horz. Reading dB(μV)	Vert. Reading dB(μV)	Corr. Factor (dB)	Horiz. Test Result dB(μV/m)	Vert. Test Result dB(μV/m)	Limit dB(μV/m)
30	< 16	< 16	17.6	< 33.6	< 33.6	40.0
60	< 16	< 16	5.0	< 21.0	< 21.0	40.0
80	< 16	< 16	7.2	< 23.2	< 23.2	40.0
100	< 16	< 16	10.1	< 26.1	< 26.1	43.5
200	< 16	< 16	8.6	< 24.6	< 24.6	43.5
250	< 16	< 16	12.7	< 28.7	< 28.7	46.0
299.1	28	21	13.8	41.8	34.8	46.0
349	20	< 16	15.3	35.3	< 31.3	46.0
448.7	21	22	18.2	39.2	40.2	46.0
500	< 16	< 16	19.1	< 35.1	< 35.1	46.0
700	< 16	< 16	22.4	< 38.4	< 38.4	46.0
1000	< 16	< 16	27.3	< 43.3	< 43.3	54.0

Note : 1. All the recorded readings are in quasi-peak values.

2. The above results were the worst case results with the sample positioned in all 3 axis during the test.

The worst case data were recorded with the antenna of the sample pointing vertical upward for vertical measurement and pointing horizontal for horizontal measurement.

Operator : KS



U 5/6

Interference voltage 150kHz – 30MHz
Acc. FCC Part 15 Subpart C Section 15.207

Cabin 1

Model: 50117

Spl./ Ser. No.: 01/--

Client: KIN SUN

Product: WIRELESS HEADPHONE

IECC-No.: 48419A

Date: 12.9.2007

Test equipment:

Rohde & Schwarz ESHS-30

Schwarzbeck NSLK8127

Connected sets:

--

Operating mode:

OPERATE
(L)

--

RFI suppression parts:


--

* two dB safety margin for
type approval necessary

Operator: KS

Result: *OK*

IECC

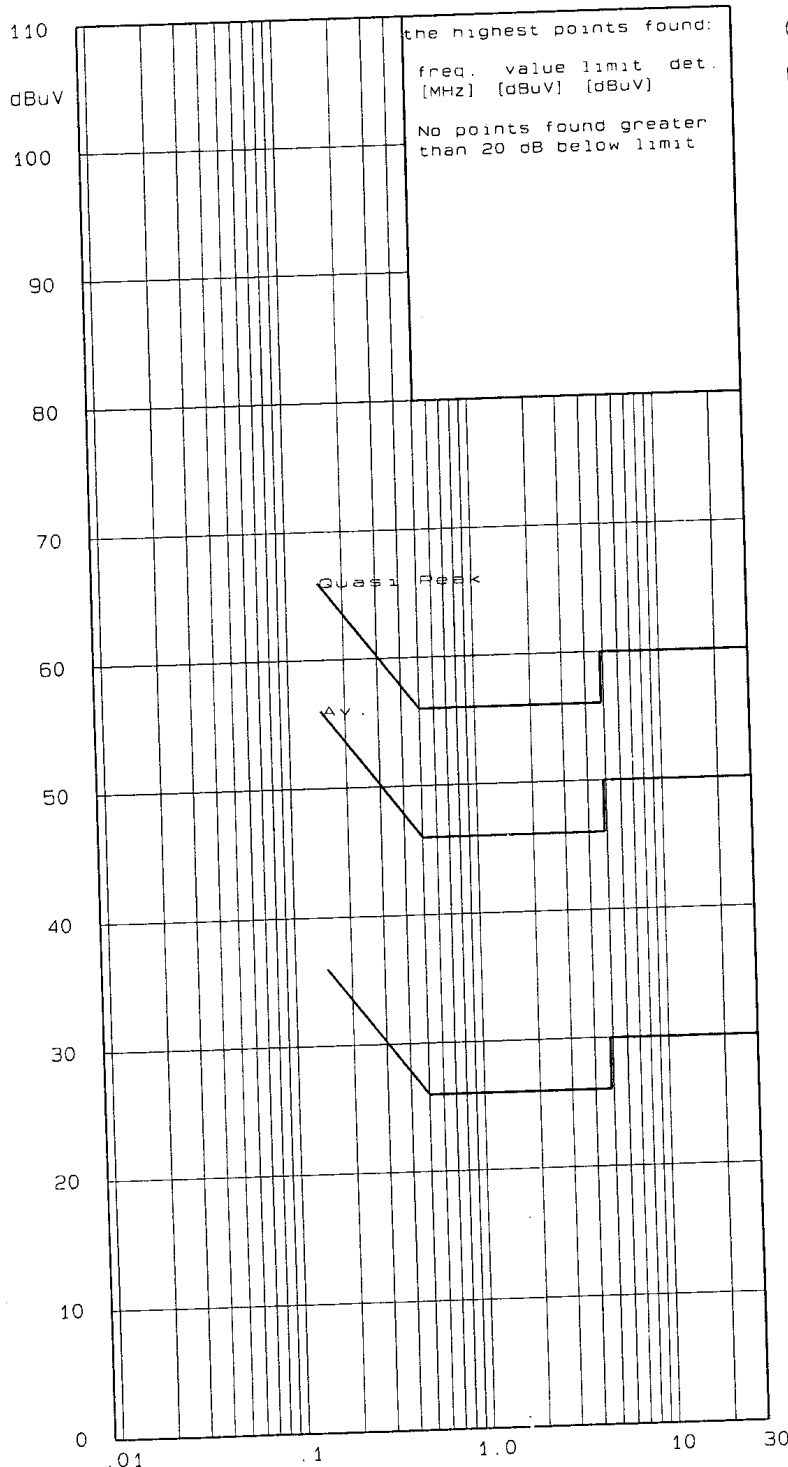



U 5/6

Interference voltage 150kHz – 30MHz
Acc. FCC Part 15 Subpart C Section 15.207

Cabin 1

Model: 50117

Spl./ Ser. No.: 01/--

Client : KIN SUN

Product: WIRELESS HEADPHONE

IECC-No.: 48419A

Date: 12.9.2007

Test equipment:

Rohde & Schwarz ESHS-30

Schwarzbeck NSLK8127

Connected sets:

--

Operating mode:

OPERATE
(N)

--

RFI suppression parts:


--

* two dB safety margin for
type approval necessary

Operator: KS

Result: *OK*

IECC

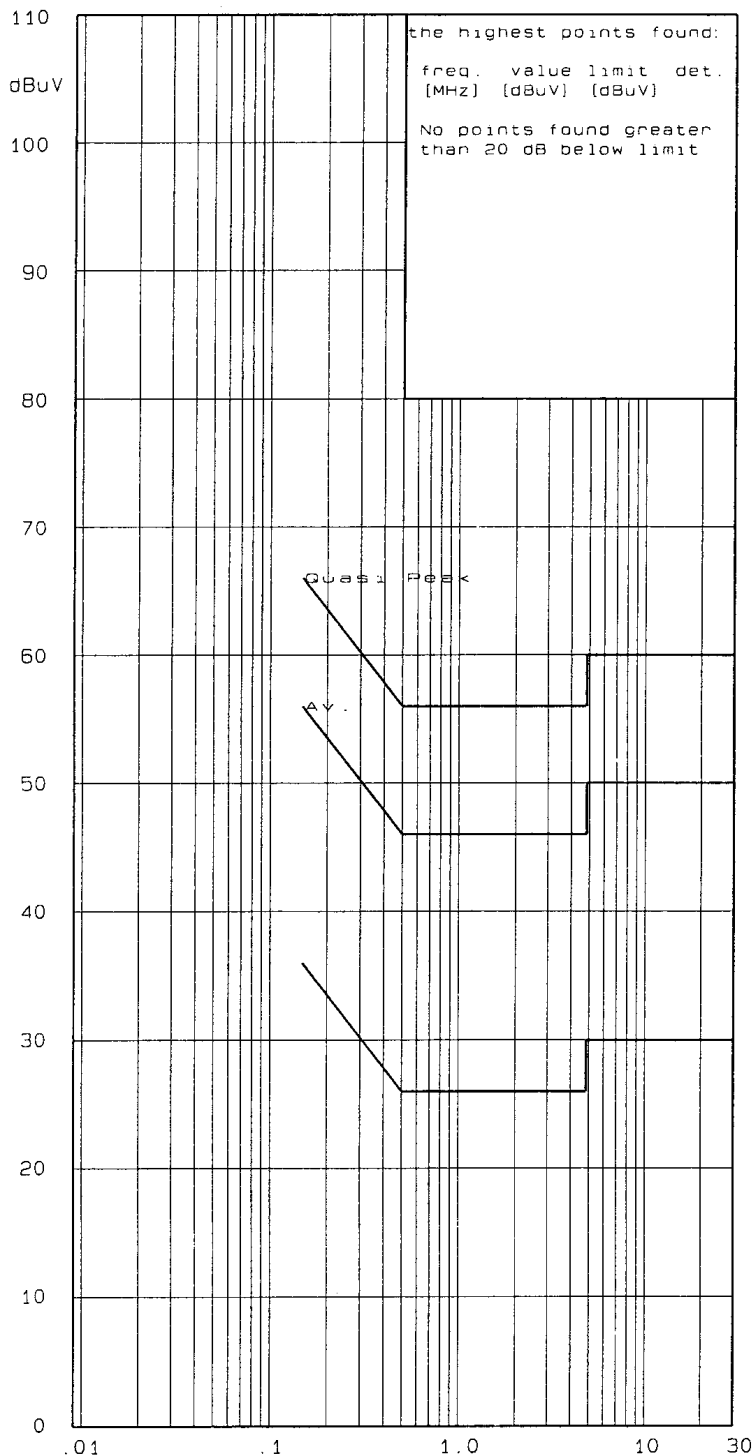




U 5/6

Interference voltage 150kHz – 30MHz
Acc. FCC Part 15 Subpart C Section 15.207

Cabin 1

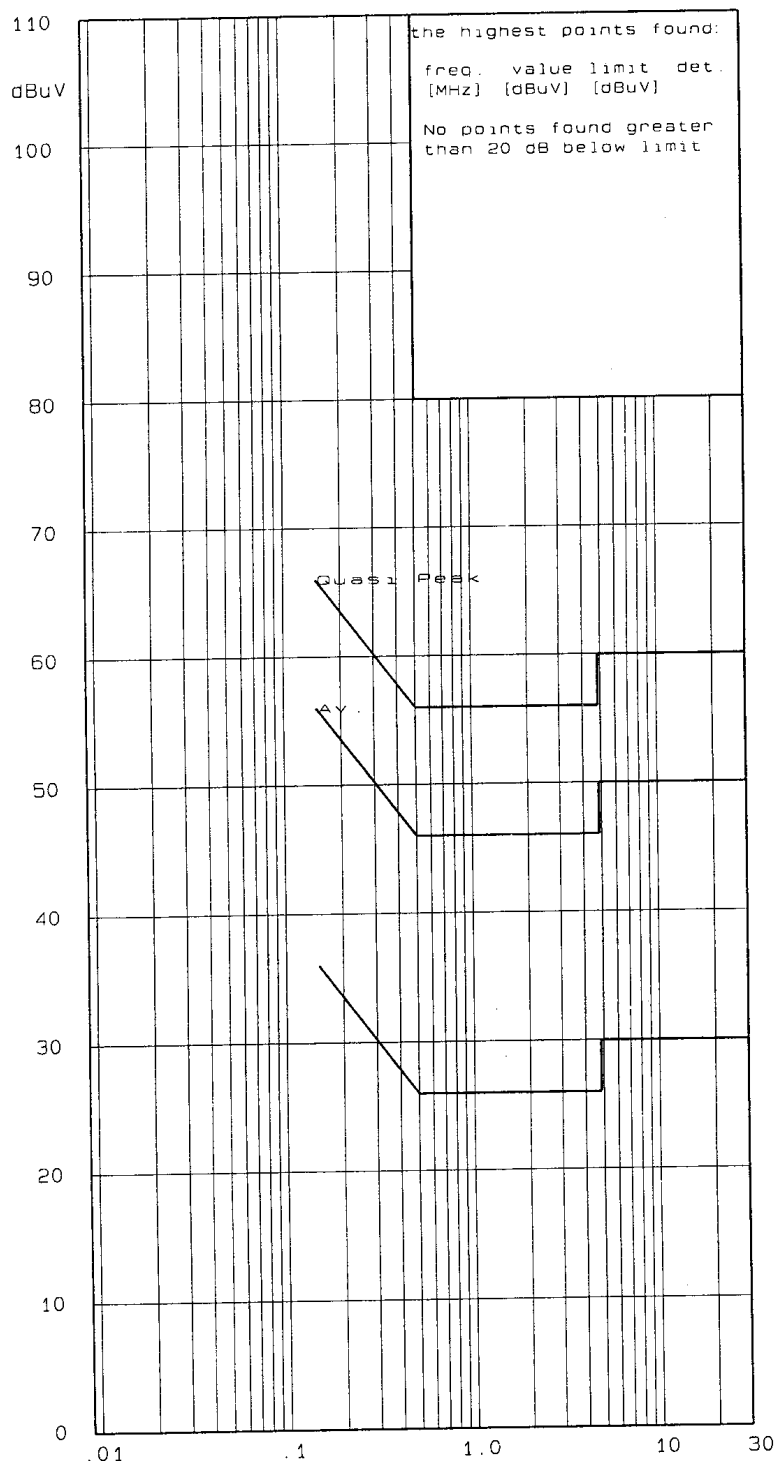

Model: 50117

Spl./ Ser. No.: 01/--

Client: KIN SUN

Product: WIRELESS HEADPHONE

IECC-No.: 48419A

Date: 12.9.2007

Test equipment:

Rohde & Schwarz ESHS-30

Schwarzbeck NSLK8127

Connected sets:

--

Operating mode:

BATTERY CHARGING
(L)

--

RFI suppression parts:

--

* two dB safety margin for
type approval necessary

Operator: KS

Result: *OK*

IECC

f [MHz]



U 5/6

Interference voltage 150kHz – 30MHz
Acc. FCC Part 15 Subpart C Section 15.207

Cabin 1

Model: 50117

Sp1./ Ser. No.: 01/--

Client : KIN SUN

Product: WIRELESS HEADPHONE

IECC-No.: 48419A

Date: 12.9.2007

Test equipment:

Rohde & Schwarz ESHS-30

Schwarzbeck NSLK8127

Connected sets:

--

Operating mode:

BATTERY CHARGING
(N)

--

RFI suppression parts:


--

* two dB safety margin for
type approval necessary

Operator: KS

Result: OK

IECC

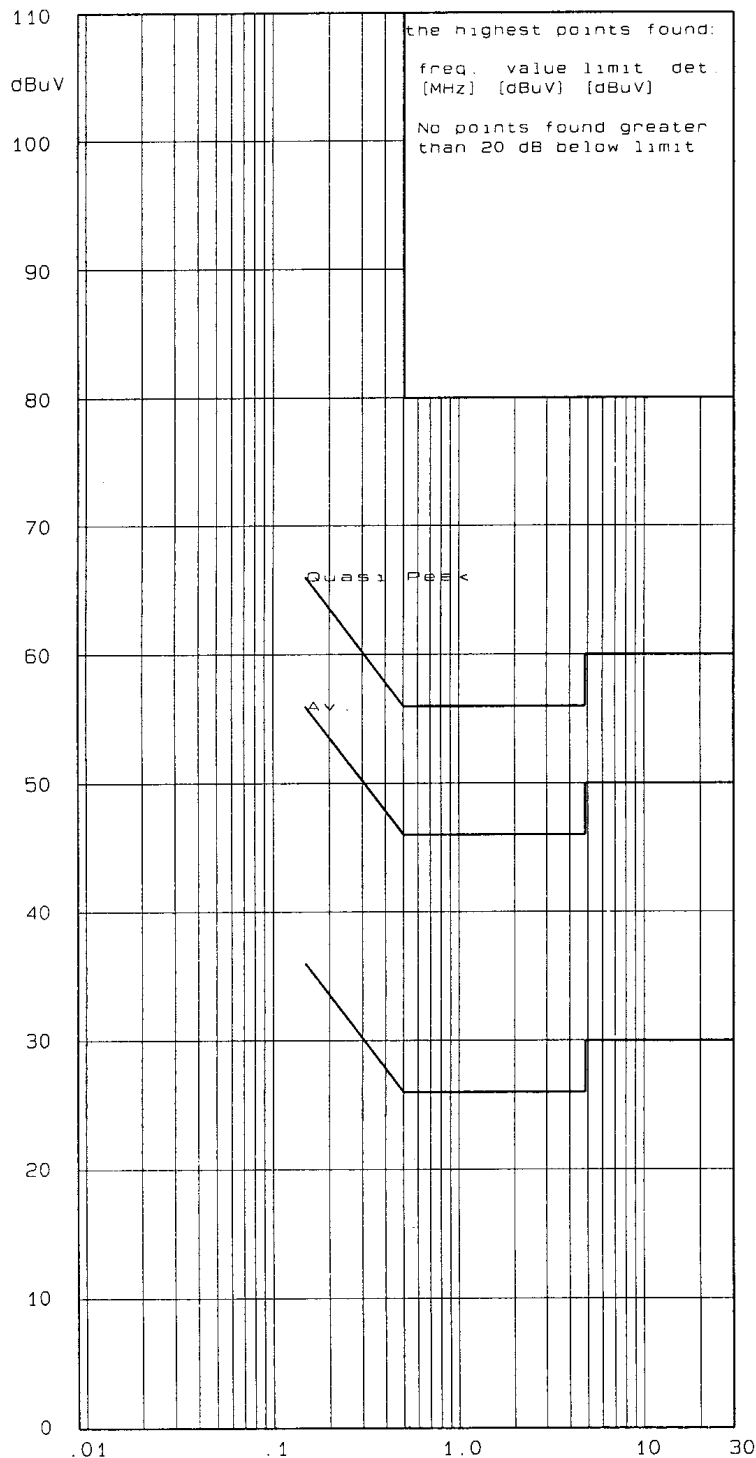


FCC – Test Report

No. 48419A

Date: 2007-09-17

Page 17 of 18

Measurement Data of Emissions within Band Edges

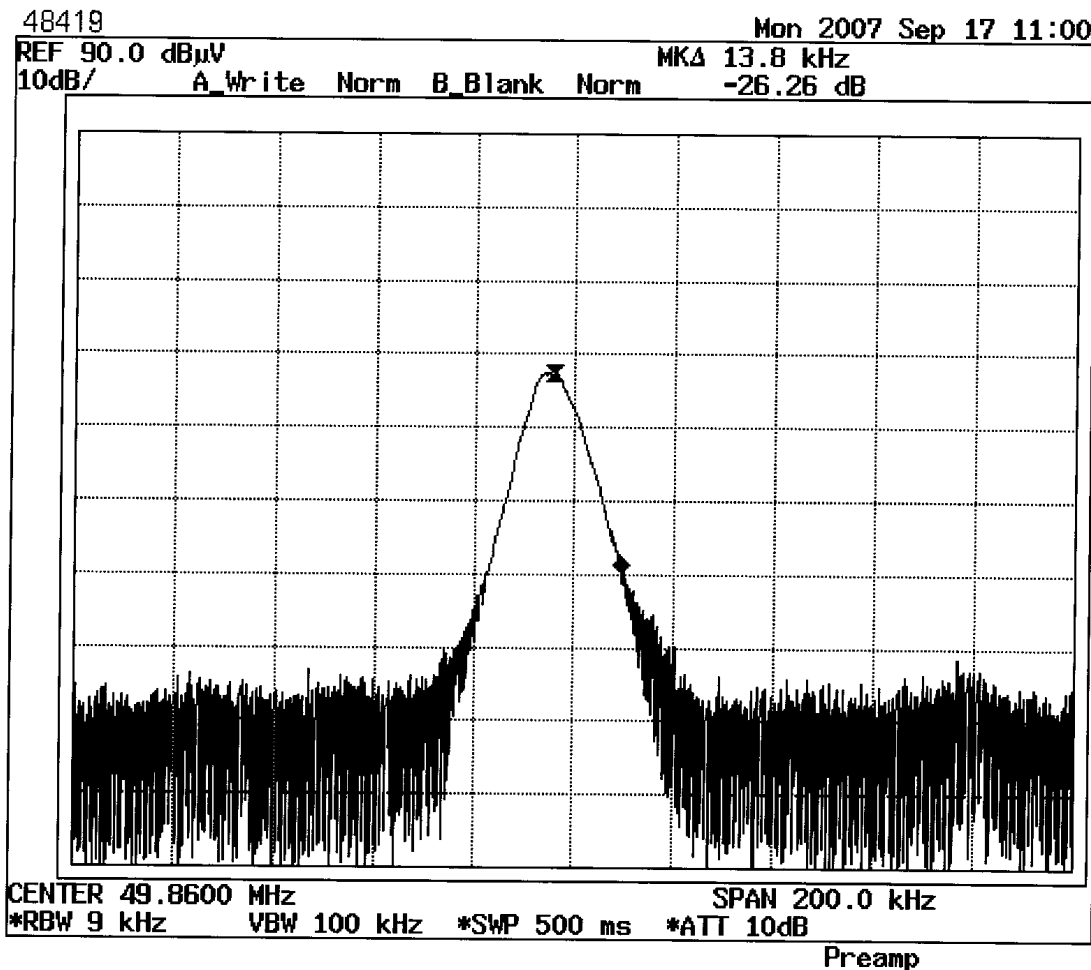

Result : The field strength of any emission within the operation band did not exceed 80 dB(μV/m) for average value or 100 dB(μV/m) for peak value. Refer to page 11 for the recorded value for the emission at the fundamental frequency.

FCC – Test Report**No. 48419A**Date: 2007-09-17

Page 18 of 18

Photo of Sample**48419**