

FCC RF Test Report

APPLICANT : ASUSTeK COMPUTER INC.
EQUIPMENT : ASUS Phone(Mobile Phone)
BRAND NAME : ASUS
MODEL NAME : ASUS_AI2401_E
FCC ID : MSQAI2401
STANDARD : 47 CFR Part 2, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Nov. 01, 2023 ~ Nov. 22, 2023

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China**

TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Maximum EIRP and Emission Designator	7
1.7 Testing Site	7
1.8 Test Software.....	7
1.9 Applied Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example.....	10
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST ITEMS	12
3.1 Measuring Instruments	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test	12
3.4 Conducted Output Power Measurement	13
3.5 Peak-to-Average Ratio	14
3.6 EIRP	15
3.7 Occupied Bandwidth.....	16
3.8 Conducted Band Edge Measurement	17
3.9 Conducted Spurious Emission Measurement	18
3.10 Frequency Stability Measurement.....	19
4 RADIATED TEST ITEMS	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test	21
4.4 Radiated Spurious Emission Measurement	22
5 LIST OF MEASURING EQUIPMENT	23
6 UNCERTAINTY OF EVALUATION	24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG391308K	Rev. 01	Initial issue of report	Jan. 18, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	-	Peak-to-Average Ratio	—	Report Only	
3.6	§27.50 (a)(3)	EIRP	EIRP < 250mW/5MHz	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement	Refer standard	PASS	-
3.9	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission	< 70+10log ₁₀ (P[Watts])	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission	< 70+10log ₁₀ (P[Watts])	PASS	Under limit 1.34 dB at 6916.410 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

ASUSTeK COMPUTER INC.

1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.2 Manufacturer

ASUSTeK COMPUTER INC.

1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	ASUS Phone(Mobile Phone)
Brand Name	ASUS
Model Name	ASUS_AI2401_E
FCC ID	MSQAI2401
IMEI Code	Conducted: 356313810100690/356313810100708 Radiation: 356313810100674/356313810100682 for Sample 1 350619900100671/350619900100689 for Sample 2
HW Version	R2.0
SW Version	Android 14
EUT Stage	Identical Prototype

Remark: There are four SKUs of EUT for this project. The differences between them are summary below, According to the difference, we evaluate SKU1 to perform full test and SKU2 is verified worse case for RSE testing.

Sample list				
	SKU1	SKU2	SKU3	SKU4
Model	ASUS_AI2401_E	ASUS_AI2401_E	ASUS_AI2401_E	ASUS_AI2401_E
Config.	US(Pro)	US(Enrty)	US(Pro)	US(Enrty)
RF module board	US(Pro)	US(Enrty)	US(Pro)	US(Enrty)
LCD+Touch front frame module	AI2401 FRONT CASE ASSY	AI2401 FRONT CASE ASSY	AI2401 FRONT CASE ASSY	AI2401 FRONT CASE ASSY
DDR	16G(HYNIX) HYNIX / H58G76BK8HX095	16G(Micron) Micron / MT62F2G64D8ZA-023 WT:C	16G(HYNIX) HYNIX / H58G76BK8HX095	16G(Micron) Micron / MT62F2G64D8ZA-023 WT:C
UFS	1TB(Samsung) Samsung / KLUGGARHHD-B0G1	512G(HYNIX) (UFS4.0) HYNIX / HN8T274EJKX130	1TB(Samsung) Samsung / KLUGGARHHD-B0G1	512G(HYNIX) (UFS4.0) HYNIX / HN8T274EJKX130
MB	AI2401_MB	AI2401_MB	AI2401_MB	AI2401_MB
Back cover SKU	WW Pro(Mini LED)	WW Entry(LGF)	WW Pro(Mini LED)	WW Entry(LGF)
Battery	SCUD / C21P2301	SCUD / C21P2301	SCUD / C21P2301	SCUD / C21P2301
Main 50+13M	SHINETECH /	RAYPRUS /	RAYPRUS /	SHINETECH /

	DDN03B	CASDJ-000A	CASDJ-000A	DDN03B
Tele 32M	Kunshan Q-TECH / C3HS01	SHINETECH / DHG01B	SHINETECH / DHG01B	Kunshan Q-TECH / C3HS01
Front 32M	TSPRECISION / TVHF3046	RAYPRUS / CASG-000A	RAYPRUS / CASG-000A	TSPRECISION / TVHF3046
PCB	COMPEQ	COMPEQ	COMPEQ	COMPEQ
CPU	QUALCOMM SM-8650 MPSP1629	QUALCOMM SM-8650 MPSP1629	QUALCOMM SM-8650 MPSP1629	QUALCOMM SM-8650 MPSP1629
WPC antenna	ASAP	INPAQ	INPAQ	ASAP
NFC antenna	ASAP	INPAQ	INPAQ	ASAP
WWAN/WLAN /BT/GPS antenna	INPAQ	ASAP	ASAP	INPAQ

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx Frequency	5G NR n30 : 2305 MHz ~ 2315 MHz
Rx Frequency	5G NR n30 : 2350 MHz ~ 2360 MHz
Bandwidth	5MHz / 10MHz
SCS	15kHz
Antenna Gain	<Ant. 1> : -3.4 dBi <Ant. 2> : -0.1 dBi <Ant. 7> : -7.5 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of Ant.2 are shown in the report.
2. 5G NR n30 support two PAs, both the PA are full tested, only the worst results are shown in the report.
3. 5G NR n30 supports SA and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode for conducted test items.
4. For NSA mode of all EN-DC combination, we only show the combination of the maximum power among all NSA combinations in the report.
5. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP and Emission Designator

5G NR n30		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2307.5 ~ 2312.5	0.0450	4M47G7D	0.0377	4M49W7D
10	2310.0	0.0465	9M30G7D	0.0385	9M31W7D

Note: All modulations have been tested, and only the worst test results are shown in the report.

1.7 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27(D)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (Y-Plane)

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation					RB #			Test Channel		
		1.4	3	5	10	15	20	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	n30	-	-	v		-	-	v	v	v	v	v	v		v	v	v	v
		-	-		v	-	-	v	v	v	v	v	v		v		v	
Peak-to-Average Ratio	n30	-	-		v	-	-	v	v				v		v		v	
E.I.R.P	n30	-	-	v		-	-	v	v	v	v	v	v		v	v	v	v
		-	-		v	-	-	v	v	v	v	v	v		v		v	
26dB and 99% Bandwidth	n30	-	-	v		-	-	v	v	v	v	v			v		v	
		-	-		v	-	-	v	v	v	v	v			v		v	
Conducted Band Edge	n30	-	-	v		-	-	v	v				v		v	v		v
		-	-		v	-	-	v	v				v		v		v	
Conducted Spurious Emission	n30	-	-	v		-	-	v	v				v			v	v	v
		-	-		v	-	-	v	v				v				v	
Frequency Stability	n30	-	-		v	-	-		v						v		v	
Radiated Spurious Emission	n30	Worst Case															v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 7.78V ; Low Voltage =7.3V. ; High Voltage =8.7V																	

2.2 Connection Diagram of Test System

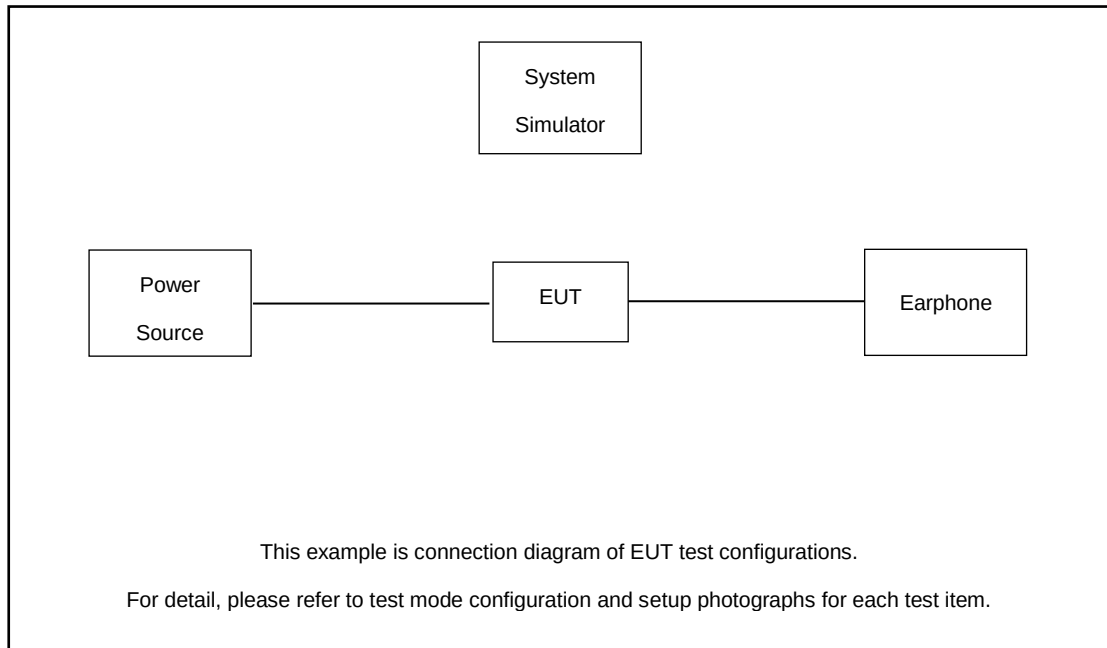

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
3.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
4.	Earphone	N/A	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.60 dB.

Example :

Offset(dB) = RF cable loss(dB).

= 8.60 (dB)

2.5 Frequency List of Low/Middle/High Channels

5G NR n30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

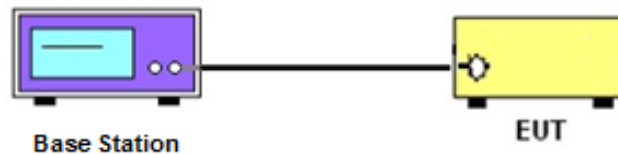

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

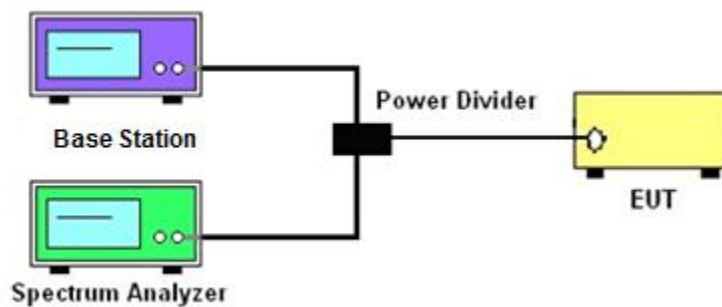

3.2.3 Frequency Stability

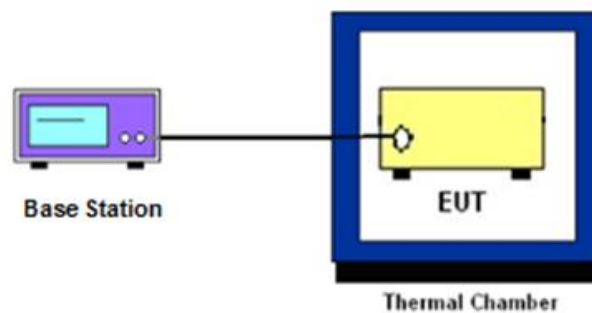

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

27.53 (a)(4)

For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

- (i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;
- (iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [70 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [70 + 10\log(P)] \text{ (dB)}$
 $= -40\text{dBm}$

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

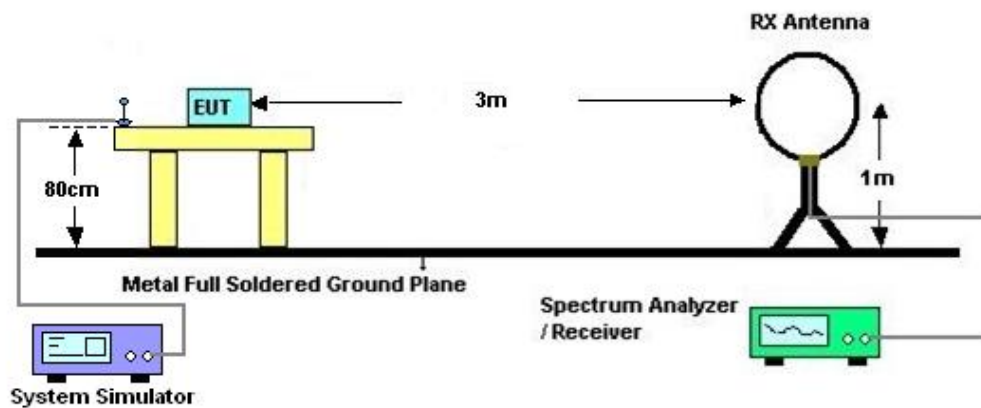

4.2.2 For radiated test from 30MHz to 1GHz

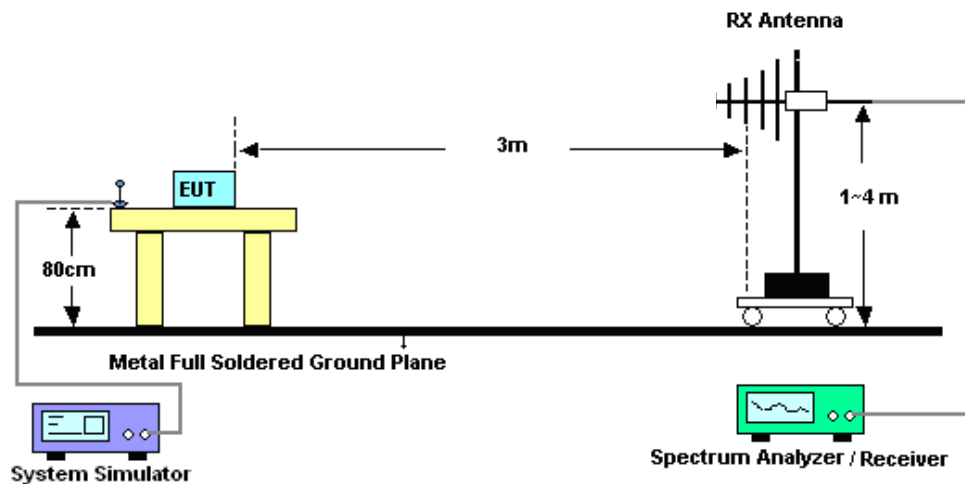

4.2.3 For radiated test above 1GHz

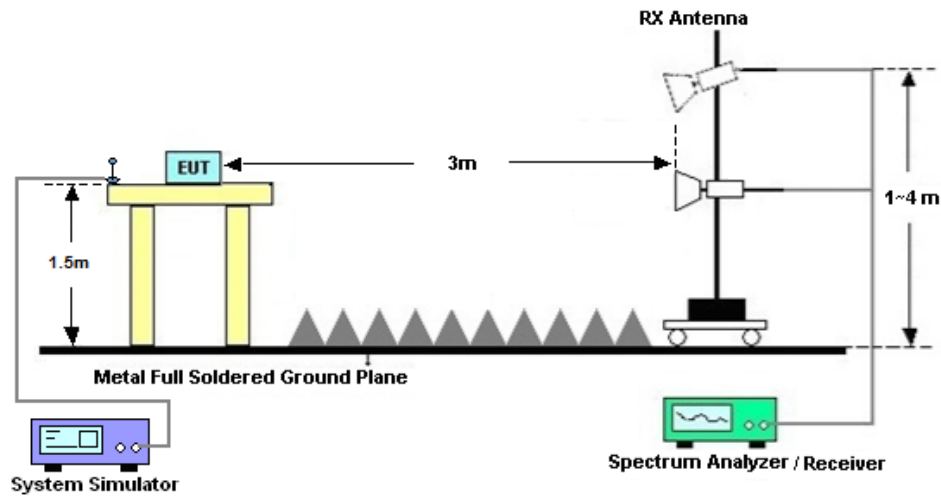

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)
$$= P(W) - [70 + 10\log(P)] \text{ (dB)}$$
$$= [30 + 10\log(P)] \text{ (dBm)} - [70 + 10\log(P)] \text{ (dB)}$$
$$= -40\text{dBm}.$$

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Nov. 22, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04265	60.06.020.0077	0.4GHz~26.5GHz	Dec. 25, 2022	Nov. 22, 2023	Dec. 24, 2023	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 05, 2023	Nov. 22, 2023	Jul. 04, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 04, 2023	Nov. 01, 2023~Nov. 06, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 04, 2023	Nov. 01, 2023~Nov. 06, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Nov. 01, 2023~Nov. 06, 2023	Jun. 27, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Nov. 01, 2023~Nov. 06, 2023	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2023	Nov. 01, 2023~Nov. 06, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2023	Nov. 01, 2023~Nov. 06, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2023	Nov. 01, 2023~Nov. 06, 2023	Oct. 17, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Nov. 01, 2023~Nov. 06, 2023	Jul.06, 2024	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 26, 2022	Nov. 01, 2023~Nov. 06, 2023	Dec. 25, 2023	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2023	Nov. 01, 2023~Nov. 06, 2023	Oct. 17, 2024	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Nov. 01, 2023~Nov. 06, 2023	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Nov. 01, 2023~Nov. 06, 2023	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.6dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.8dB
---	-------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Fly Liang	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N30(Main PA)-ANT2

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-0.1dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
30	15	5	461500	2307.5	DFT-s-OFDM QPSK	1@1	16.63	16.53	0.0450
30	15	5	461500	2307.5	DFT-s-OFDM 16 QAM	1@1	15.86	15.76	0.0377
30	15	5	462000	2310.0	DFT-s-OFDM QPSK	1@1	16.21	16.11	0.0408
30	15	5	462000	2310.0	DFT-s-OFDM 16 QAM	1@1	15.45	15.35	0.0343
30	15	5	462500	2312.5	DFT-s-OFDM QPSK	1@1	16.44	16.34	0.0431
30	15	5	462500	2312.5	DFT-s-OFDM 16 QAM	1@1	15.71	15.61	0.0364
30	15	10	462000	2310.0	DFT-s-OFDM PI/2 BPSK	25@12	16.13	16.03	0.0401
30	15	10	462000	2310.0	DFT-s-OFDM PI/2 BPSK	1@1	16.77	16.67	0.0465
30	15	10	462000	2310.0	DFT-s-OFDM PI/2 BPSK	1@50	16.48	16.38	0.0435
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	25@12	16.58	16.48	0.0445
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@1	16.55	16.45	0.0442
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@50	16.49	16.39	0.0436
30	15	10	462000	2310.0	DFT-s-OFDM 16 QAM	25@12	15.07	14.97	0.0314
30	15	10	462000	2310.0	DFT-s-OFDM 16 QAM	1@1	15.96	15.86	0.0385
30	15	10	462000	2310.0	DFT-s-OFDM 16 QAM	1@50	14.3	14.2	0.0263
30	15	10	462000	2310.0	DFT-s-OFDM 64 QAM	25@12	13.95	13.85	0.0243
30	15	10	462000	2310.0	DFT-s-OFDM 64 QAM	1@1	14.7	14.6	0.0288
30	15	10	462000	2310.0	DFT-s-OFDM 64 QAM	1@50	13.17	13.07	0.0203
30	15	10	462000	2310.0	DFT-s-OFDM 256 QAM	25@12	13.05	12.95	0.0197
30	15	10	462000	2310.0	DFT-s-OFDM 256 QAM	1@1	12.92	12.82	0.0191
30	15	10	462000	2310.0	DFT-s-OFDM 256 QAM	1@50	12.24	12.14	0.0164
30	15	10	462000	2310.0	CP-OFDM QPSK	26@13	14.96	14.86	0.0306
30	15	10	462000	2310.0	CP-OFDM QPSK	1@1	15.7	15.6	0.0363
30	15	10	462000	2310.0	CP-OFDM QPSK	1@50	15.54	15.44	0.0350

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0026	PASS	NV
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0027	PASS	LV
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0042	PASS	HV
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0042	PASS	-10°C
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0056	PASS	0°C
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0053	PASS	10°C
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0026	PASS	20°C
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0036	PASS	30°C
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0043	PASS	40°C
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0050	PASS	50°C


Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
30	15	10	462000	2310.0	DFT-s-OFDM PI/2 BPSK	50@0	4.15	13	PASS
30	15	10	462000	2310.0	DFT-s-OFDM PI/2 BPSK	1@0	4.62	13	PASS
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	4.53	13	PASS
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@0	5.06	13	PASS

N30(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH



N30(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

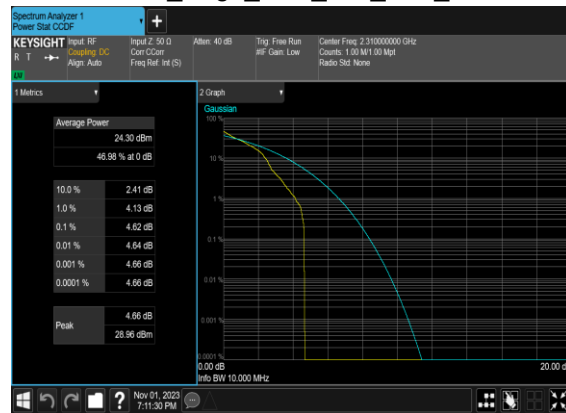

N30(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH



N30(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH



Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
30	15	5	462000	2310.0	CP-OFDM QPSK	25@0	4.4713	5.015
30	15	5	462000	2310.0	CP-OFDM 16 QAM	25@0	4.485	5.13
30	15	5	462000	2310.0	CP-OFDM 64 QAM	25@0	4.4672	5.112
30	15	5	462000	2310.0	CP-OFDM 256 QAM	25@0	4.4751	5.019
30	15	10	462000	2310.0	CP-OFDM QPSK	52@0	9.2996	10.05
30	15	10	462000	2310.0	CP-OFDM 16 QAM	52@0	9.3089	10.13
30	15	10	462000	2310.0	CP-OFDM 64 QAM	52@0	9.2878	10.03
30	15	10	462000	2310.0	CP-OFDM 256 QAM	52@0	9.2916	10.07

N30(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N30(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH




N30(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH




N30(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

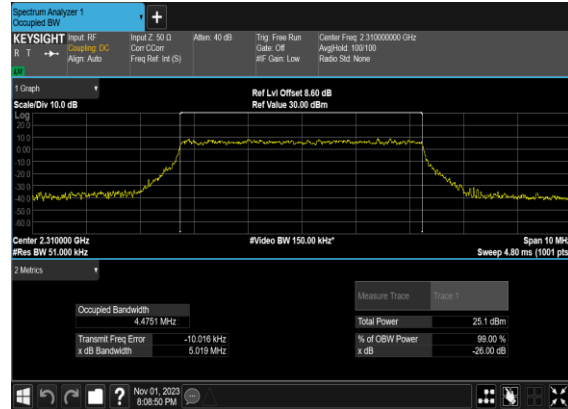


N30(10M)_CP-
OFDM_QPSK_Outer_Full_Low_CH

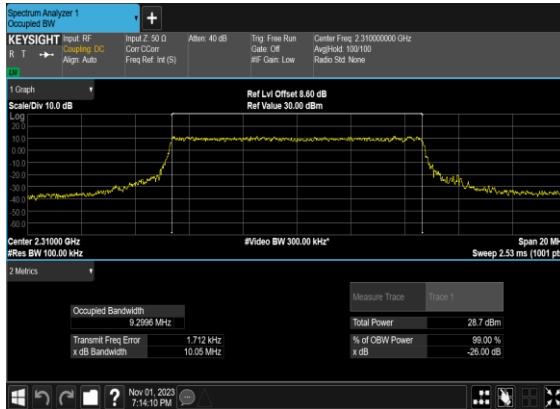


N30(10M)_CP-OFDM_16
QAM_Outer_Full_Low_CH

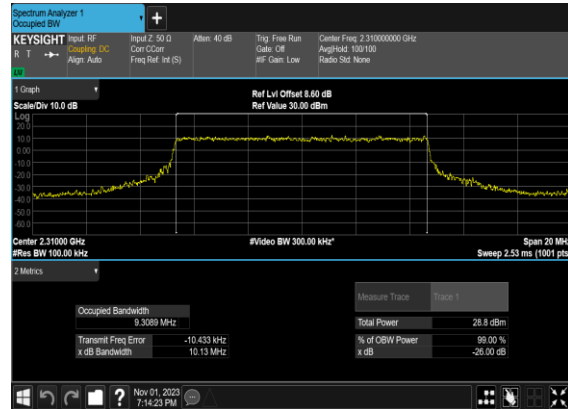

N30(10M)_CP-OFDM_64
QAM_Outer_Full_Low_CH

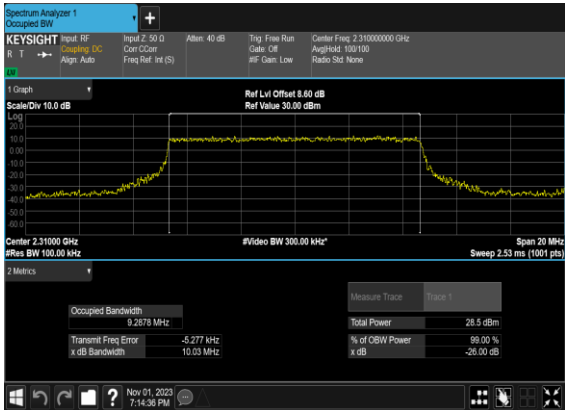


N30(10M)_CP-OFDM_256
QAM_Outer_Full_Low_CH

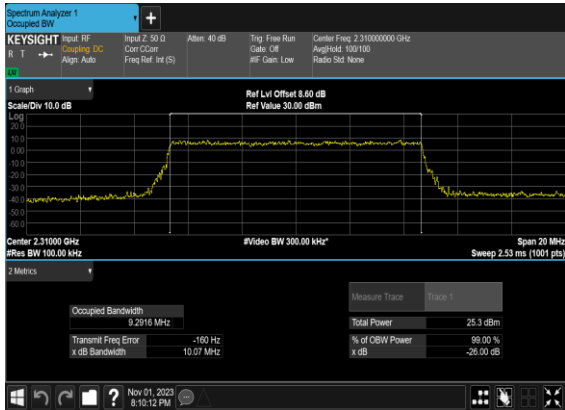


Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
30	15	5	461500	2307.5	DFT-s-OFDM BPSK	1@0	see graph	---
30	15	5	461500	2307.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	461500	2307.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	461500	2307.5	DFT-s-OFDM QPSK	1@0	see graph	---
30	15	5	461500	2307.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	461500	2307.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	---
30	15	5	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	---
30	15	5	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	462500	2312.5	DFT-s-OFDM BPSK	1@0	see graph	---
30	15	5	462500	2312.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	462500	2312.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	462500	2312.5	DFT-s-OFDM QPSK	1@0	see graph	---
30	15	5	462500	2312.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	462500	2312.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	---
30	15	10	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	---
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS


N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

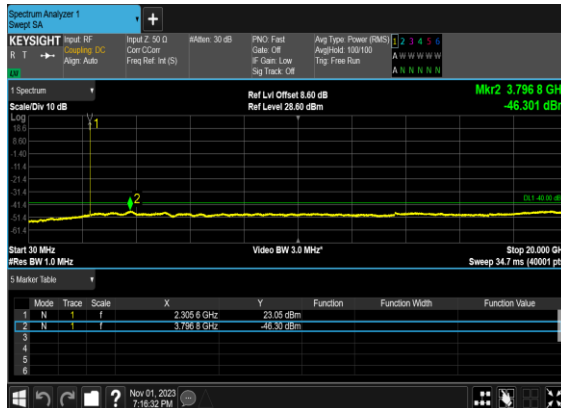


N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

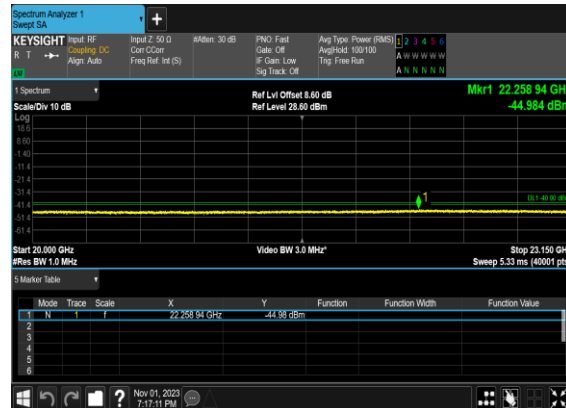

N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

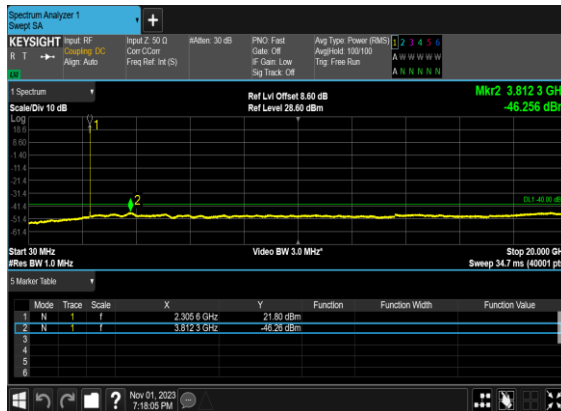

N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

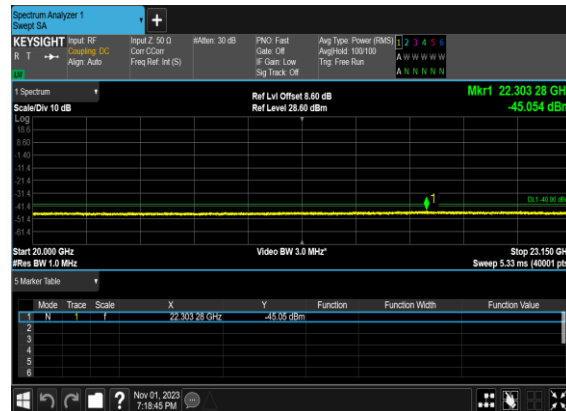


N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH



N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH




N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

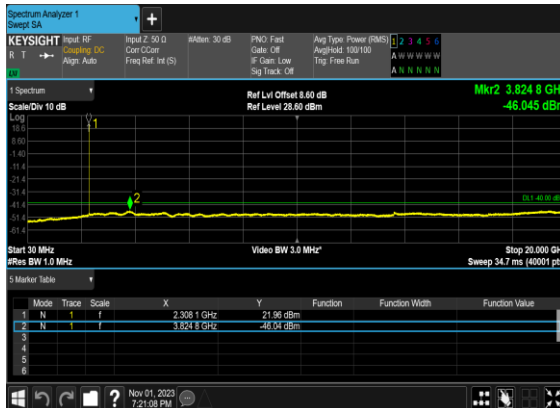


N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH



N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

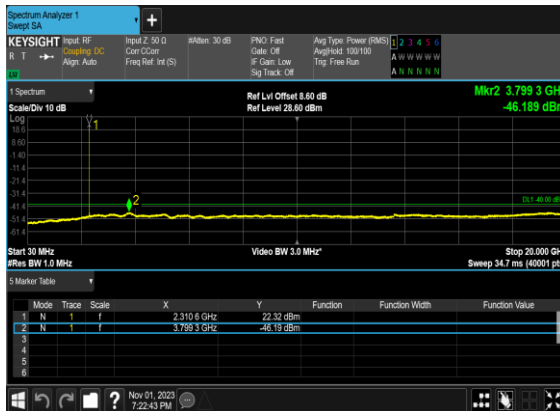

N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

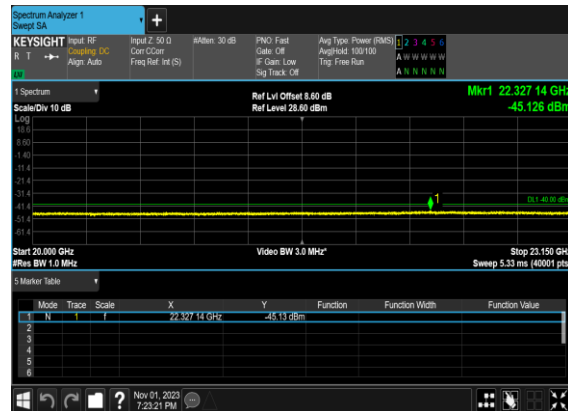


N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH




N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH




N30(10M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

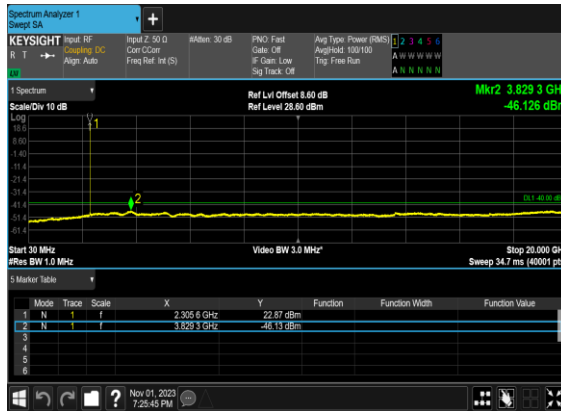

N30(10M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

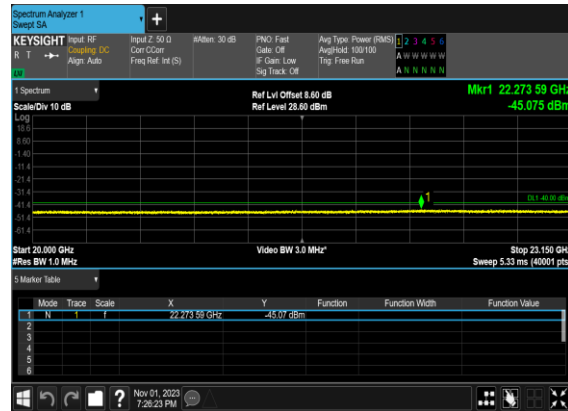

N30(10M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

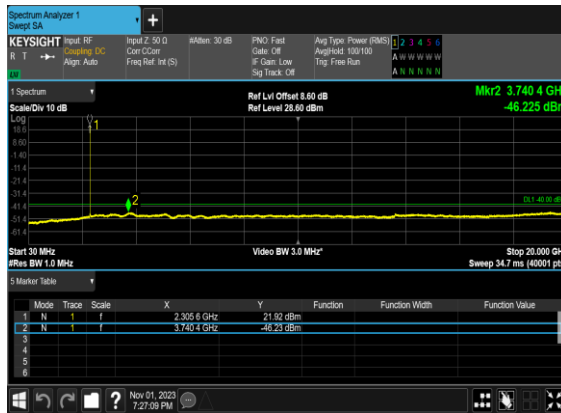


N30(10M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH




Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
30	15	5	461500	2307.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	461500	2307.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	461500	2307.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
30	15	5	461500	2307.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
30	15	5	462500	2312.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
30	15	5	462500	2312.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
30	15	5	462500	2312.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
30	15	5	462500	2312.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	see graph	PASS


N30(5M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

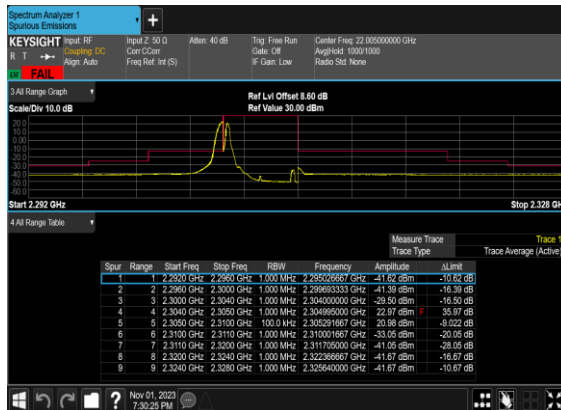


N30(5M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH _CHP_PASS

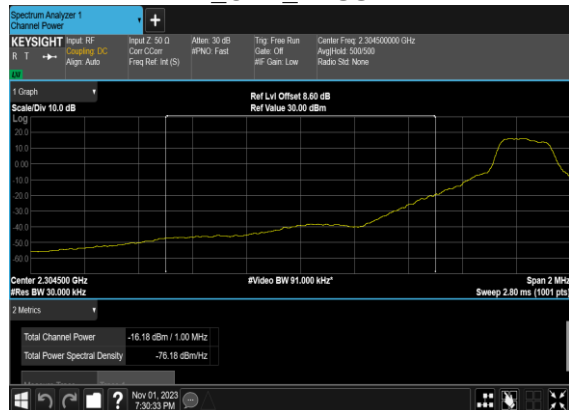


N30(5M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

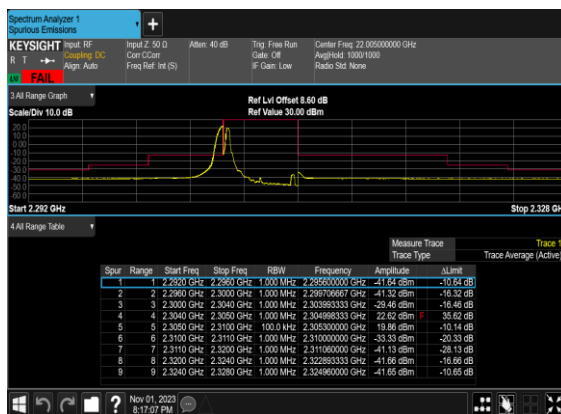


N30(5M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH _CHP_PASS

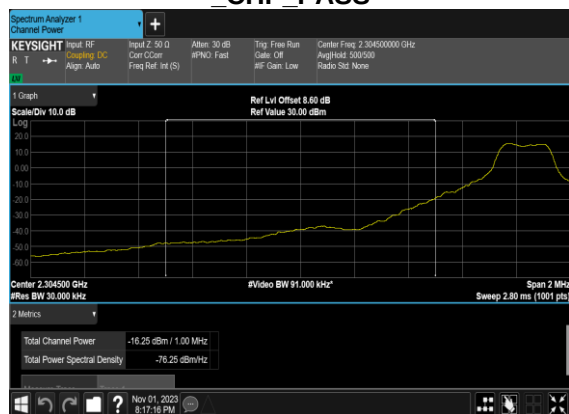


N30(5M)_DFT-s- OFDM_BPSK_Outer_Full_Low_CH

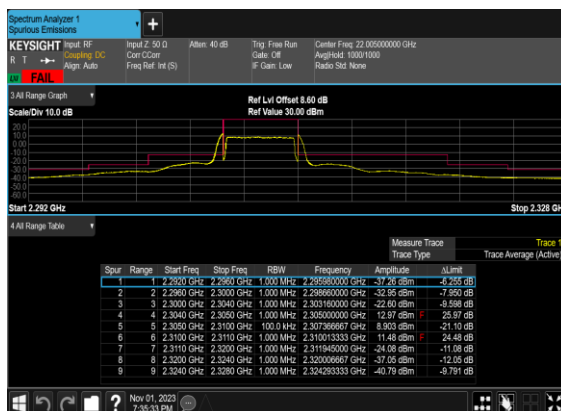


N30(5M)_DFT-s- OFDM_BPSK_Outer_Full_Low_CH _CHP_PASS

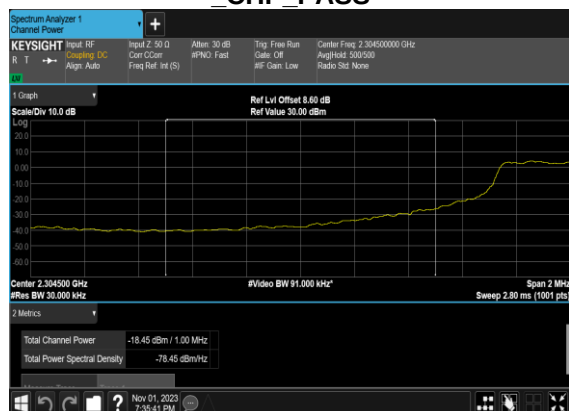


N30(5M)_DFT-s- OFDM_BPSK_Outer_Full_Low_CH _CHP_PASS

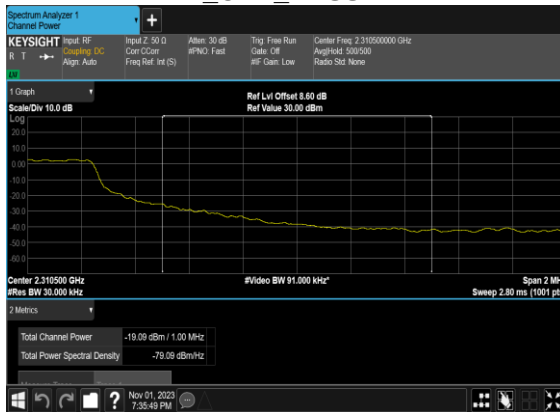


N30(5M)_DFT-s- OFDM_QPSK_Outer_Full_Low_CH

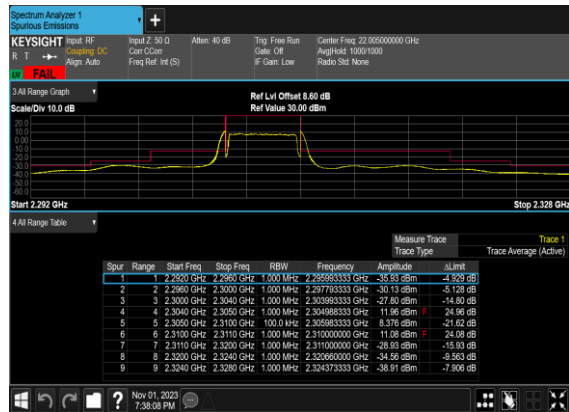


N30(5M)_DFT-s- OFDM_QPSK_Outer_Full_Low_CH _CHP_PASS

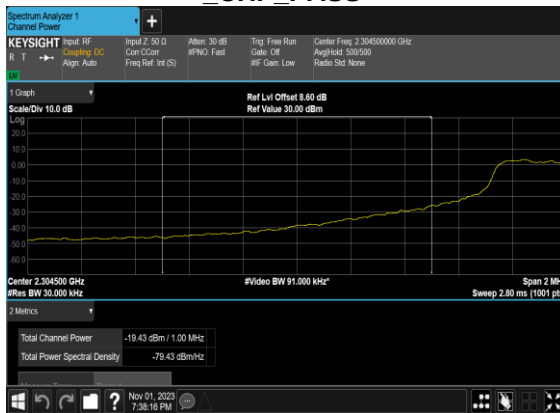

N30(5M)_DFT-s- OFDM_QPSK_Outer_Full_Low_CH _CHP_PASS

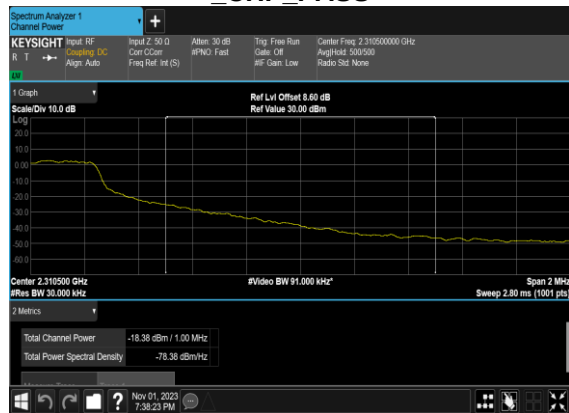


N30(5M)_DFT-s- OFDM_BPSK_Edge_1RB_Right_High_CH

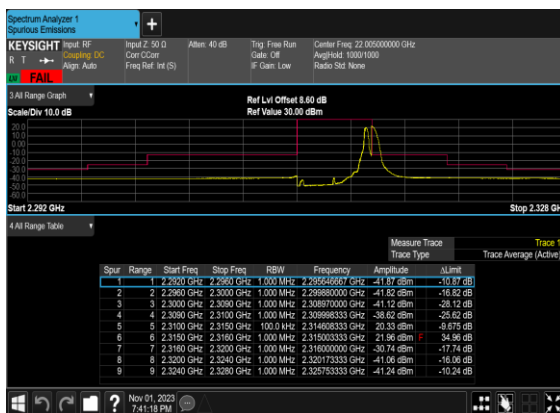

N30(5M)_DFT-s- OFDM_BPSK_Edge_1RB_Right_High_CH _CHP_PASS




N30(5M)_DFT-s- OFDM_QPSK_Edge_1RB_Right_High_CH

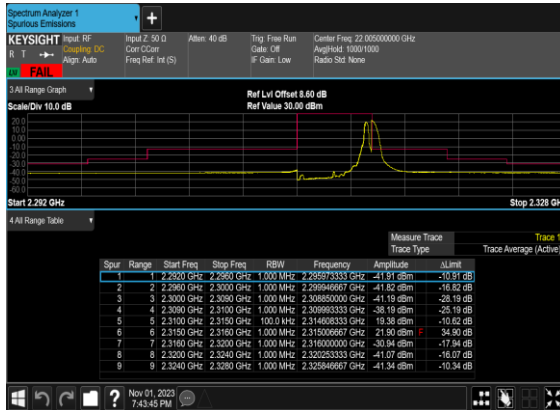


N30(5M)_DFT-s- OFDM_QPSK_Edge_1RB_Right_High_CH _CHP_PASS




N30(5M)_DFT-s- OFDM_BPSK_Outer_Full_High_CH

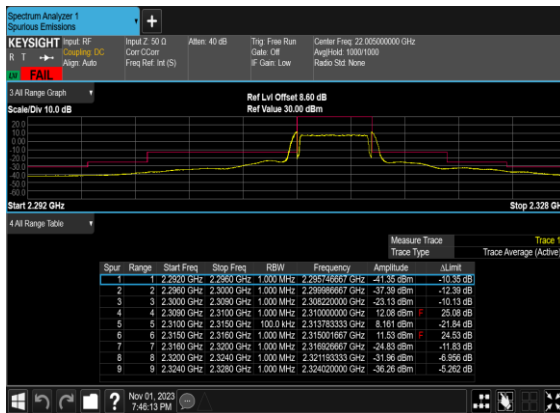


N30(5M)_DFT-s- OFDM_BPSK_Outer_Full_High_CH _CHP_PASS

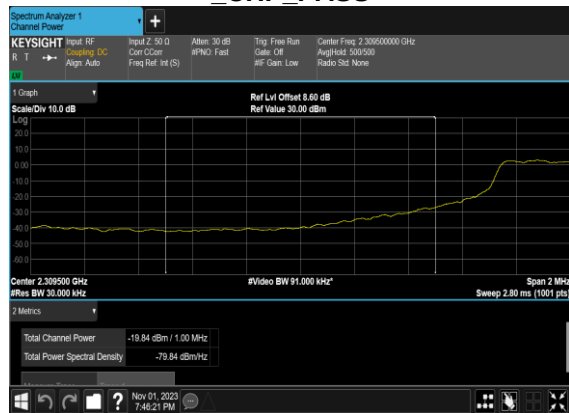


N30(5M)_DFT-s- OFDM_BPSK_Outer_Full_High_CH _CHP_PASS

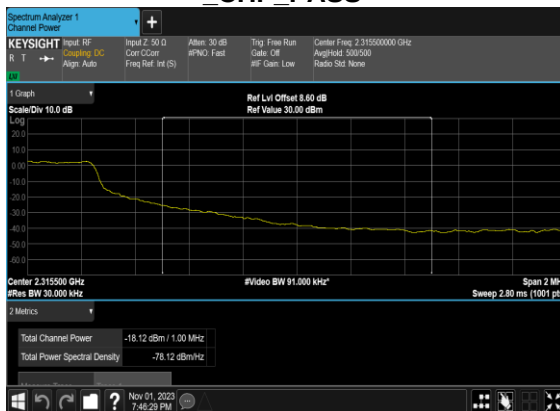


N30(5M)_DFT-s- OFDM_QPSK_Outer_Full_High_CH

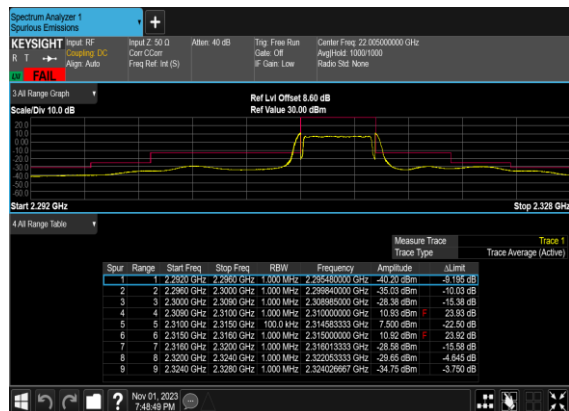


N30(5M)_DFT-s- OFDM_QPSK_Outer_Full_High_CH _CHP_PASS

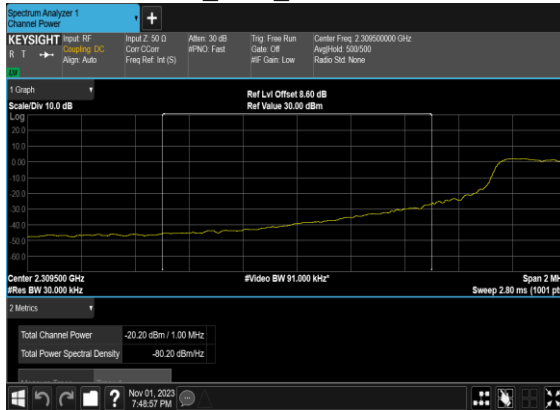


N30(5M)_DFT-s- OFDM_QPSK_Outer_Full_High_CH _CHP_PASS

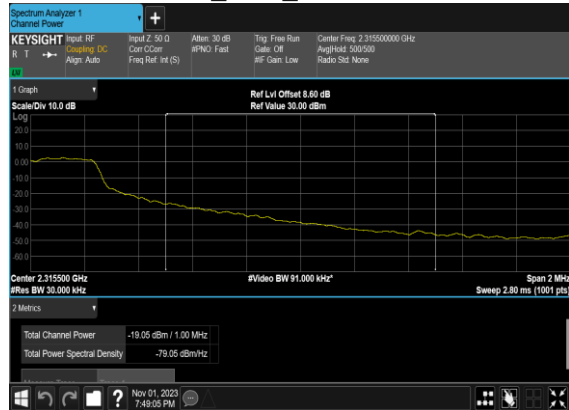


N30(10M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH

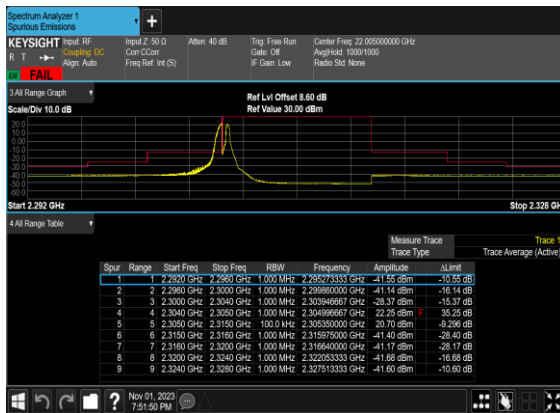


N30(10M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH _CHP_PASS

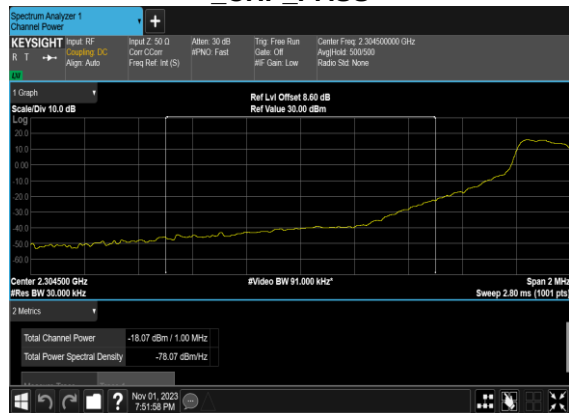


N30(10M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

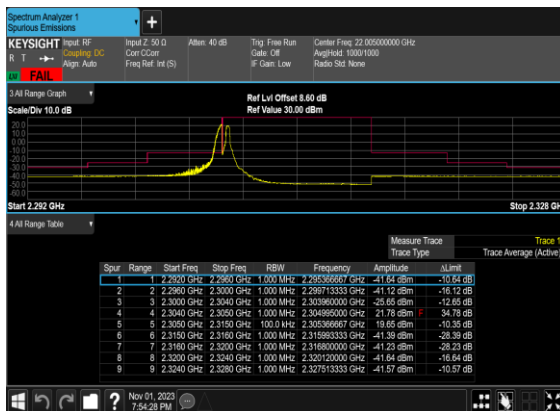


N30(10M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH _CHP_PASS

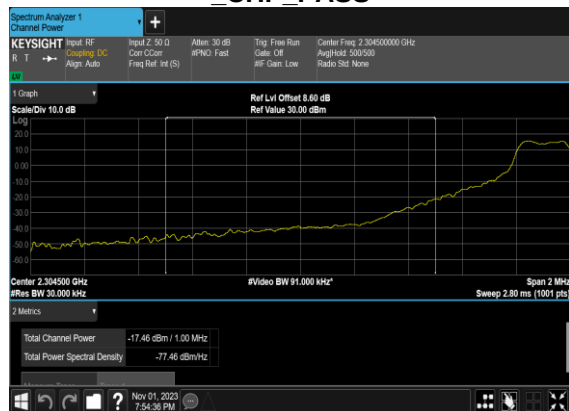

N30(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_Low_CH

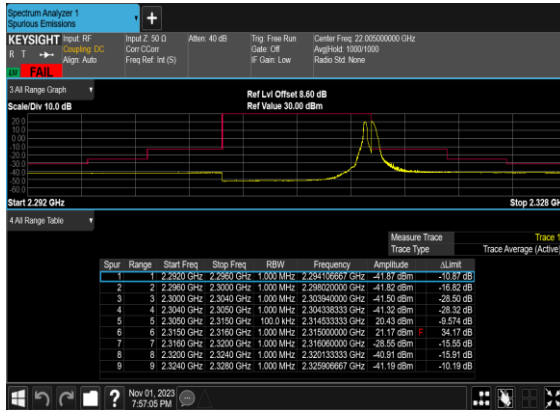


N30(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_Low_CH _CHP_PASS

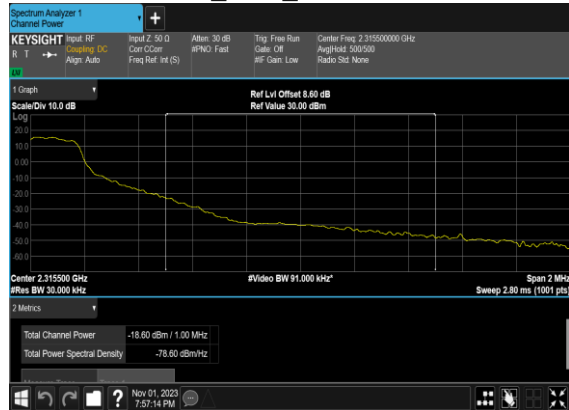


N30(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH




N30(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH _CHP_PASS

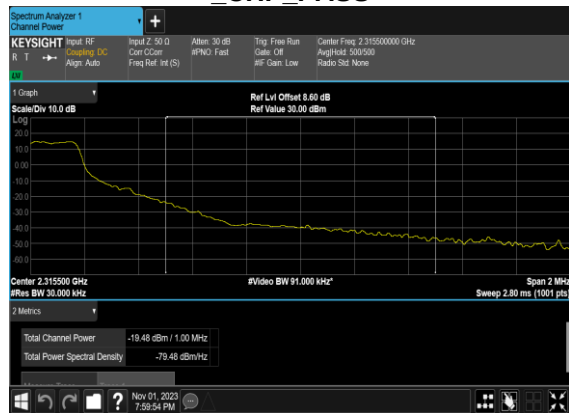


N30(10M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

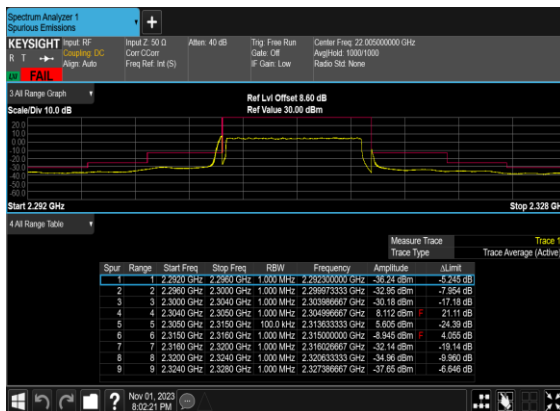


N30(10M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH _CHP_PASS

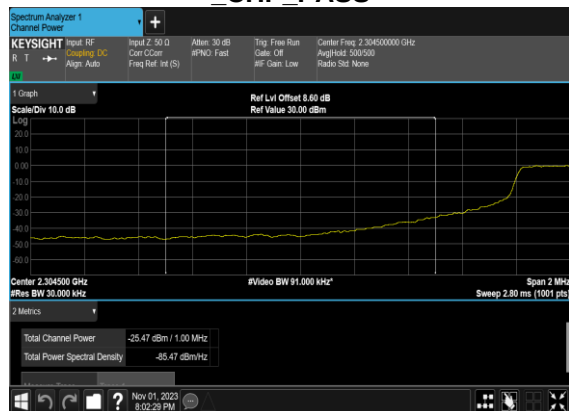


N30(10M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH
_CHP_PASS

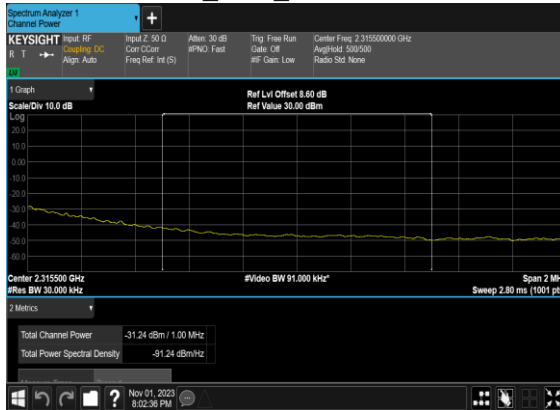


N30(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

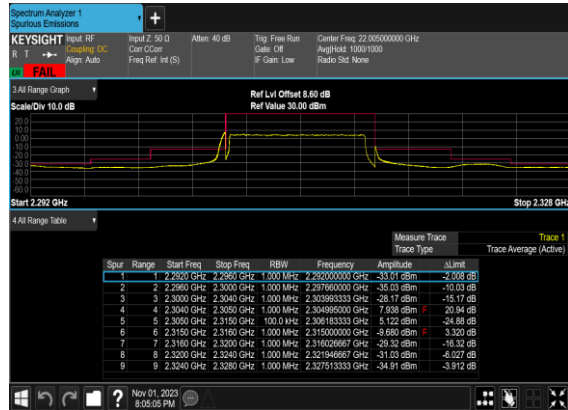


N30(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH
_CHP_PASS

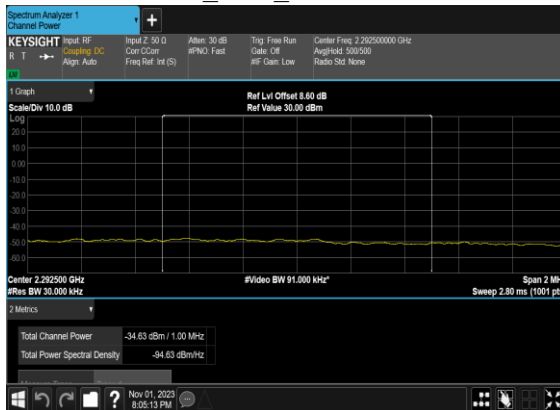

N30(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH
_CHP_PASS

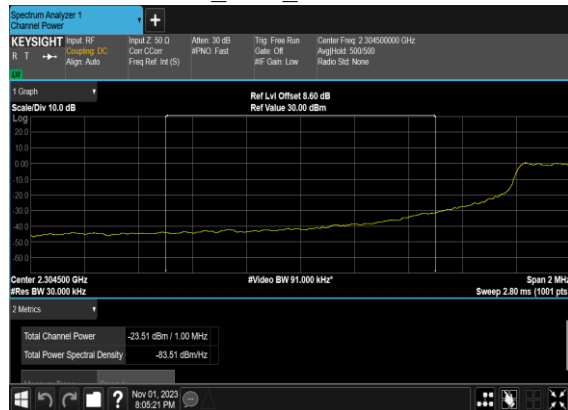

N30(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH
_CHP_PASS

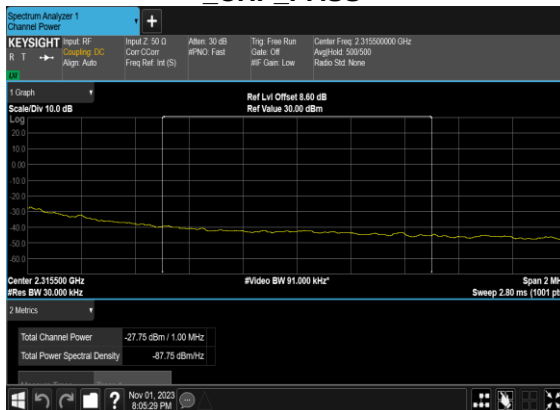

Note “CHP” means channel power integration method.

FR1 N30(Other PA)-ANT7

Transmitter Conducted Output Power and EIRP, ($G_T - L_C$)=-7.5dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
30	15	5	461500	2307.5	DFT-s-OFDM QPSK	1@1	22.43	14.93	0.0311
30	15	5	461500	2307.5	DFT-s-OFDM 16 QAM	1@1	21.61	14.11	0.0258
30	15	5	462000	2310.0	DFT-s-OFDM QPSK	1@1	22.14	14.64	0.0291
30	15	5	462000	2310.0	DFT-s-OFDM 16 QAM	1@1	21.35	13.85	0.0243
30	15	5	462500	2312.5	DFT-s-OFDM QPSK	1@1	21.86	14.36	0.0273
30	15	5	462500	2312.5	DFT-s-OFDM 16 QAM	1@1	21.02	13.52	0.0225
30	15	10	462000	2310.0	DFT-s-OFDM PI/2 BPSK	25@12	22.18	14.68	0.0294
30	15	10	462000	2310.0	DFT-s-OFDM PI/2 BPSK	1@1	22.56	15.06	0.0321
30	15	10	462000	2310.0	DFT-s-OFDM PI/2 BPSK	1@50	21.58	14.08	0.0256
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	25@12	22.13	14.63	0.0290
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@1	22.52	15.02	0.0318
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@50	21.16	13.66	0.0232
30	15	10	462000	2310.0	DFT-s-OFDM 16 QAM	25@12	21.03	13.53	0.0225
30	15	10	462000	2310.0	DFT-s-OFDM 16 QAM	1@1	21.63	14.13	0.0259
30	15	10	462000	2310.0	DFT-s-OFDM 16 QAM	1@50	20.4	12.9	0.0195
30	15	10	462000	2310.0	DFT-s-OFDM 64 QAM	25@12	19.66	12.16	0.0164
30	15	10	462000	2310.0	DFT-s-OFDM 64 QAM	1@1	20.02	12.52	0.0179
30	15	10	462000	2310.0	DFT-s-OFDM 64 QAM	1@50	18.99	11.49	0.0141
30	15	10	462000	2310.0	DFT-s-OFDM 256 QAM	25@12	17.33	9.83	0.0096
30	15	10	462000	2310.0	DFT-s-OFDM 256 QAM	1@1	17.78	10.28	0.0107
30	15	10	462000	2310.0	DFT-s-OFDM 256 QAM	1@50	16.74	9.24	0.0084
30	15	10	462000	2310.0	CP-OFDM QPSK	26@13	20.56	13.06	0.0202
30	15	10	462000	2310.0	CP-OFDM QPSK	1@1	21.26	13.76	0.0238
30	15	10	462000	2310.0	CP-OFDM QPSK	1@50	19.95	12.45	0.0176

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0025	PASS	NV
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0067	PASS	LV
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0059	PASS	HV
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0024	PASS	-10°C
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0047	PASS	0°C
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0063	PASS	10°C
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0025	PASS	20°C
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0043	PASS	30°C
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0055	PASS	40°C
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	0.0044	PASS	50°C

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
30	15	10	462000	2310.0	DFT-s-OFDM PI/2 BPSK	50@0	4.45	13	PASS
30	15	10	462000	2310.0	DFT-s-OFDM PI/2 BPSK	1@0	4.08	13	PASS
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	50@0	5.86	13	PASS
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@0	5.44	13	PASS

N30(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH



N30(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH



N30(10M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH




N30(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH




Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
30	15	5	462000	2310.0	CP-OFDM QPSK	25@0	4.4682	5.11
30	15	5	462000	2310.0	CP-OFDM 16 QAM	25@0	4.4886	5.12
30	15	5	462000	2310.0	CP-OFDM 64 QAM	25@0	4.4588	4.994
30	15	5	462000	2310.0	CP-OFDM 256 QAM	25@0	4.4744	4.966
30	15	10	462000	2310.0	CP-OFDM QPSK	52@0	9.2749	10.08
30	15	10	462000	2310.0	CP-OFDM 16 QAM	52@0	9.3086	10.01
30	15	10	462000	2310.0	CP-OFDM 64 QAM	52@0	9.281	9.864
30	15	10	462000	2310.0	CP-OFDM 256 QAM	52@0	9.2849	10.01

N30(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

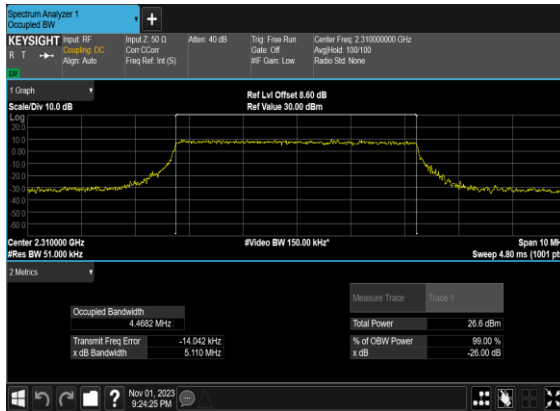


N30(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

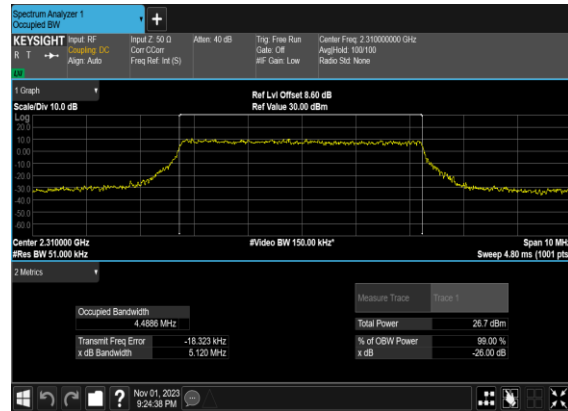


N30(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH




N30(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

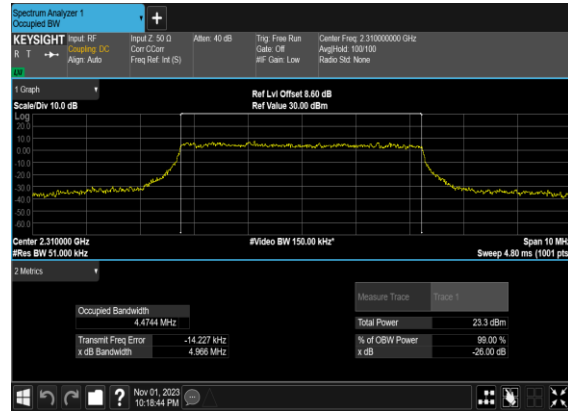


N30(10M)_CP-
OFDM_QPSK_Outer_Full_Low_CH

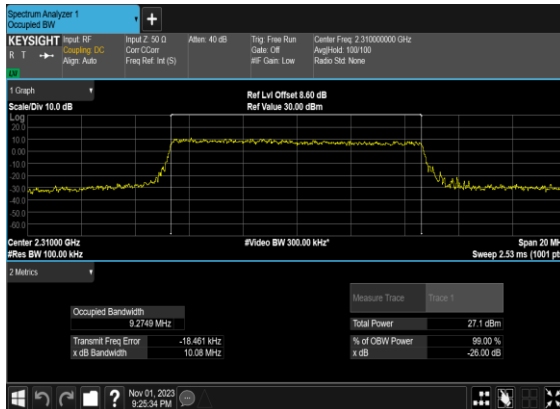


N30(10M)_CP-OFDM_16
QAM_Outer_Full_Low_CH

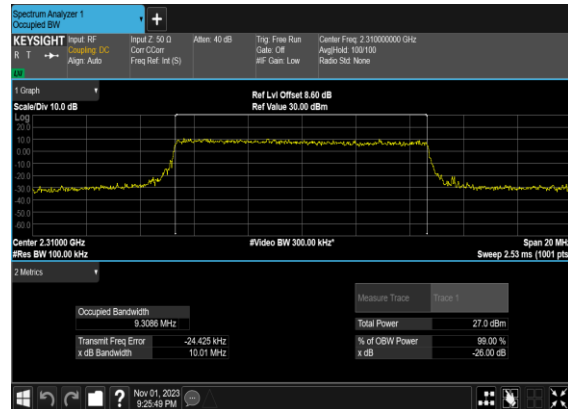

N30(10M)_CP-OFDM_64 QAM_Outer_Full_Low_CH

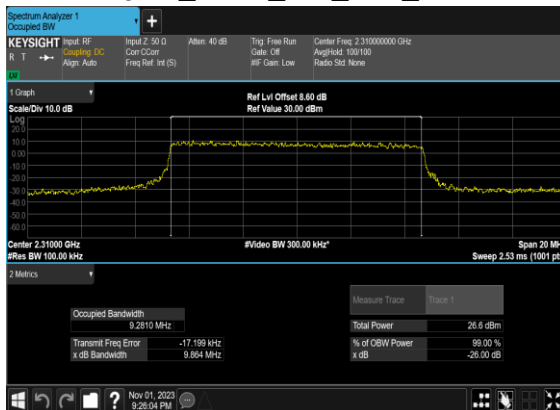


N30(10M)_CP-OFDM_256 QAM_Outer_Full_Low_CH

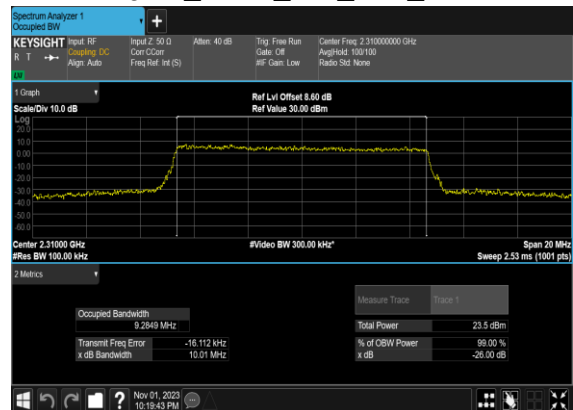

Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
30	15	5	461500	2307.5	DFT-s-OFDM BPSK	1@0	see graph	---
30	15	5	461500	2307.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	461500	2307.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	461500	2307.5	DFT-s-OFDM QPSK	1@0	see graph	---
30	15	5	461500	2307.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	461500	2307.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	---
30	15	5	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	---
30	15	5	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	462500	2312.5	DFT-s-OFDM BPSK	1@0	see graph	---
30	15	5	462500	2312.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	462500	2312.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	5	462500	2312.5	DFT-s-OFDM QPSK	1@0	see graph	---
30	15	5	462500	2312.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	5	462500	2312.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	---
30	15	10	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	---
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
30	15	10	462000	2310.0	DFT-s-OFDM QPSK	1@0	see graph	PASS


N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

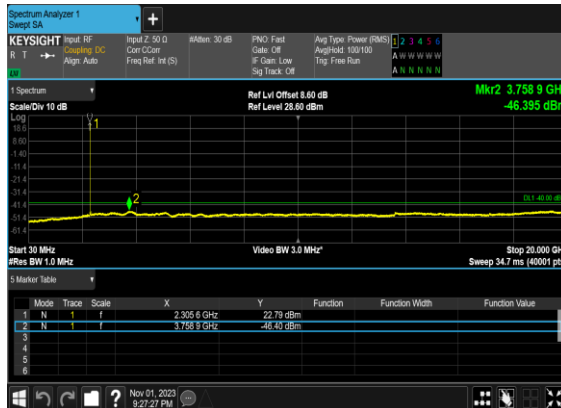


N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH



N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

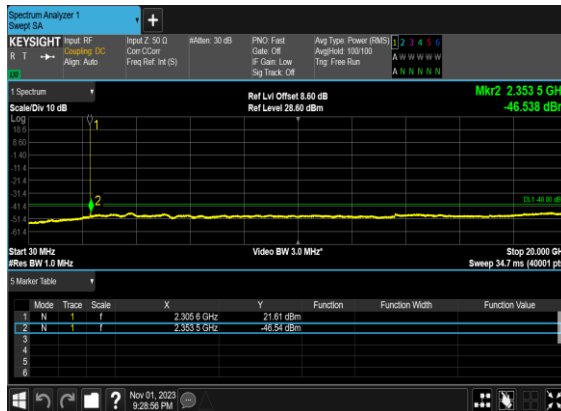

N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

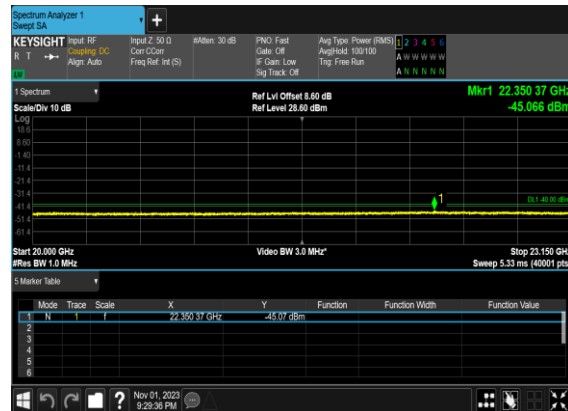


N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH



N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH




N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

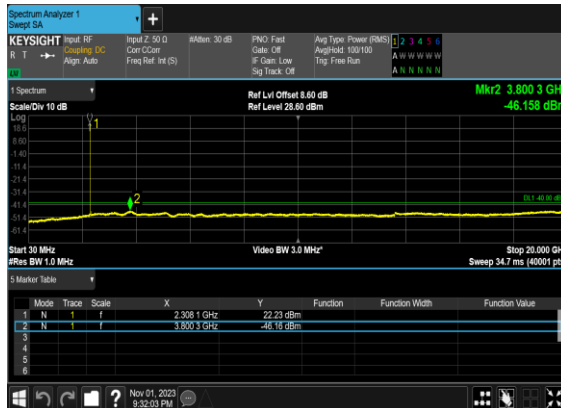


N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH



N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

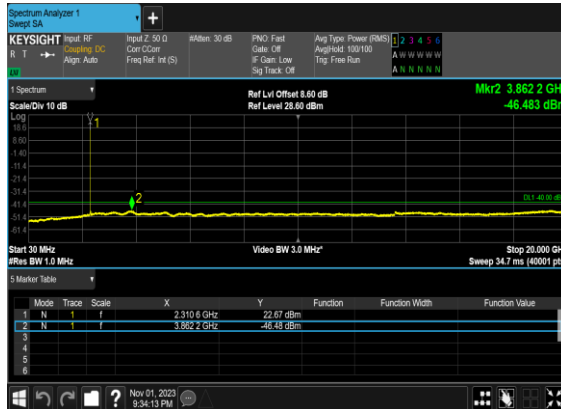

N30(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

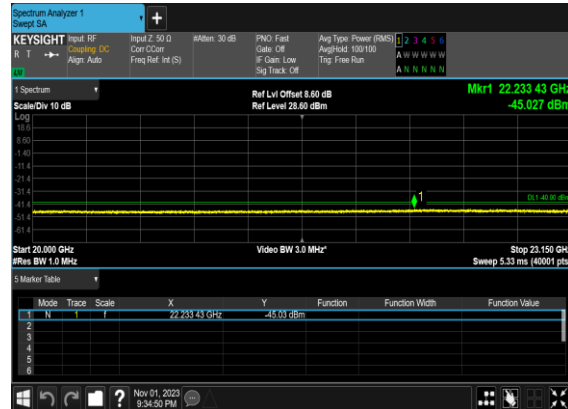

N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH



N30(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

