

FCC Part 15B

Measurement and Test Report

For

MAG DIGITAL LIMITED

**Rm918, East Baihuo Plaza No3020, ShenNan East Road, Luohu District,
Shenzhen City, Guangdong Province, China 518000**

FCC ID: N80-B26T

Test Rule(s): FCC Part 15 Subpart B

Product Description: MID

Tested Model: B26T

Report No.: STR14048407I-4

Tested Date: 2014-05-26 to 2014-06-11

Issued Date: 2014-06-11

Tested By: Seven Song / Engineer

Seven Song

Reviewed By: Lahm Peng / EMC Manager

Lahm peng

Approved & Authorized By: Jandy so / PSQ Manager

Jandyso

Prepared By:

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND OPERATION MODE	5
2. SUMMARY OF TEST RESULTS	6
3. CONDUCTED EMISSIONS	7
3.1 MEASUREMENT UNCERTAINTY	7
3.2 TEST EQUIPMENT LIST AND DETAILS	7
3.3 TEST PROCEDURE.....	7
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....	7
3.5 ENVIRONMENTAL CONDITIONS	8
3.6 SUMMARY OF TEST RESULTS/PLOTS	8
3.7 CONDUCTED EMISSIONS TEST DATA.....	8
4. RADIATED EMISSIONS.....	11
4.1 MEASUREMENT UNCERTAINTY	11
4.2 TEST EQUIPMENT LIST AND DETAILS	11
4.3 TEST PROCEDURE.....	11
4.4 TEST RECEIVER SETUP	12
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.6 ENVIRONMENTAL CONDITIONS	12
4.7 SUMMARY OF TEST RESULTS/PLOTS	12

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: MAG DIGITAL LIMITED
Address of applicant: Rm918, East Baihuo Plaza No3020, ShenNan East Road,
Luohu District, Shenzhen City, Guangdong Province,
China 518000
Manufacturer: EA Excelsior Hangtong Computer Technology Co., Ltd
Address of manufacturer: Rm. 1901B, International Culture Building, Futian
Road, Futian district, Shenzhen, P.R.China

General Description of EUT

Product Name:	MID
Trade Name:	N/A
Model No.:	B26T

Note: The test data is gathered from a production sample provided by the manufacturer.

Technical Characteristics of EUT

Rated Voltage:	Battery: DC 3.7V
Battery Capacity	8500mAh
Rated Power:	/
Lowest Internal Frequency:	32.768kHz
Highest Internal Frequency:	1.2GHz
Classification of ITE:	Class B

1.2 Test Standards

The following report is prepared on behalf of the MAG DIGITAL LIMITED in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

- **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

- **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging & Playing	Connected to HDMI Display

EUT Cable List and Details

Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Power Cable	1.2	Unshielded	Without Ferrite

Special Cable List and Details

Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
HDMI Cable	1.0	Shielded	With Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Display	DELL	U2410f	50642P246601H(B) ZL

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

3. Conducted Emissions

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.


3.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2014-05-28	2015-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2014-05-28	2015-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2014-05-28	2015-05-27

3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.4 Basic Test Setup Block Diagram

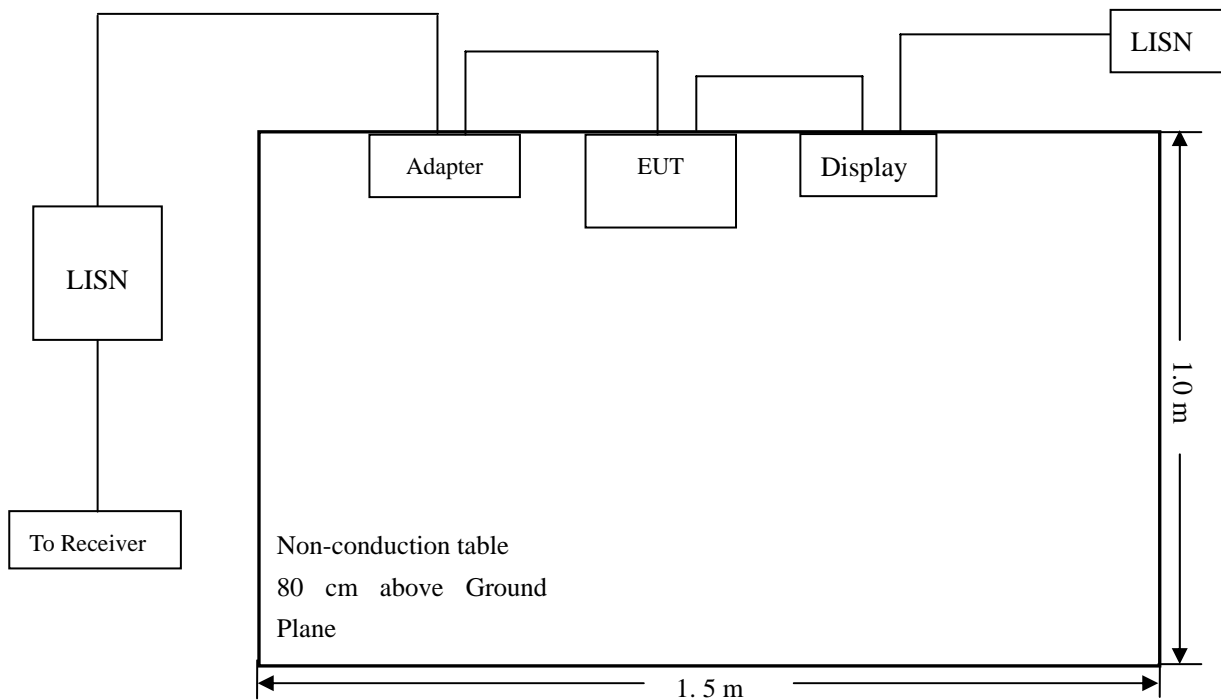

3.5 Environmental Conditions


Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:


-6.92 dB at 0.1820 MHz in the **Neutral** mode, **Peak** detector, **0.15-30MHz**

3.7 Conducted Emissions Test Data

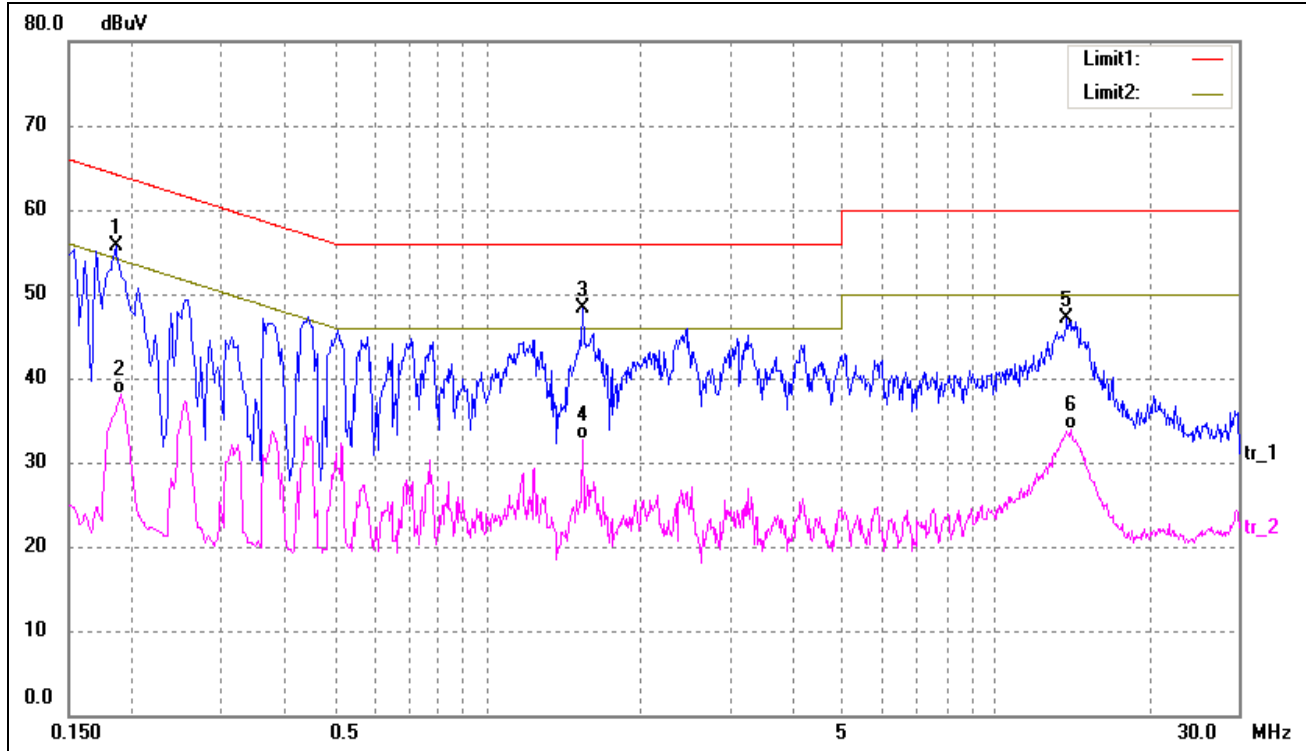Plot of Conducted Emissions Test Data*EUT:* MID*Tested Model:* B26T*Operating Condition:* TM1*Comment:* AC 120V/60Hz; Adapter DC 5V*Test Specification:* Line

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.1860	46.12	9.50	55.62	64.21	-8.59	peak
2	0.1900	28.69	9.50	38.19	54.04	-15.85	AVG
3*	1.5380	38.39	10.00	48.39	56.00	-7.61	peak
4	1.5380	22.76	10.00	32.76	46.00	-13.24	AVG
5	13.8020	36.41	10.76	47.17	60.00	-12.83	peak
6	14.0460	23.00	10.81	33.81	50.00	-16.19	AVG

Test Specification: Neutral

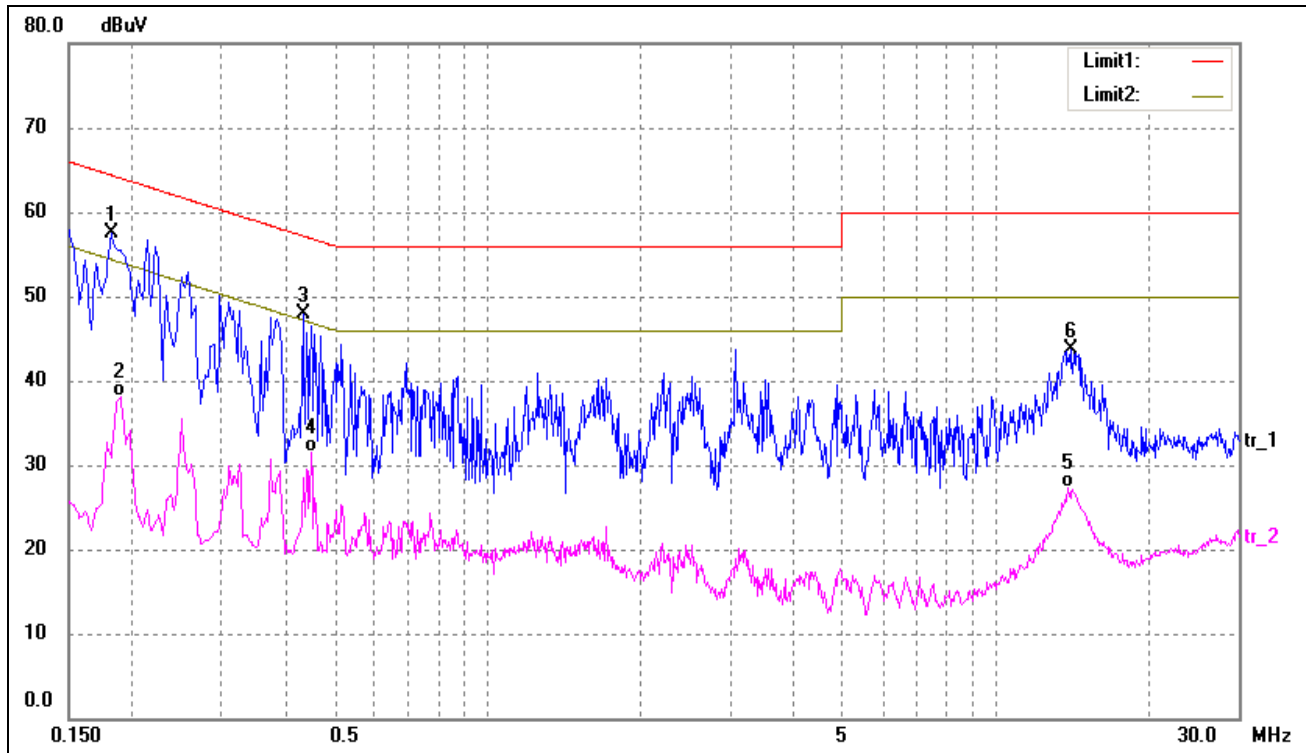

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1820	47.97	9.50	57.47	64.39	-6.92	peak
2	0.1900	28.57	9.50	38.07	54.04	-15.97	AVG
3	0.4340	38.44	9.50	47.94	57.18	-9.24	peak
4	0.4500	21.94	9.50	31.44	46.88	-15.44	AVG
5	13.9140	16.61	10.78	27.39	50.00	-22.61	AVG
6	14.0980	32.88	10.82	43.70	60.00	-16.30	peak

4. Radiated Emissions

4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.

4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-05-24	2015-05-23

4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

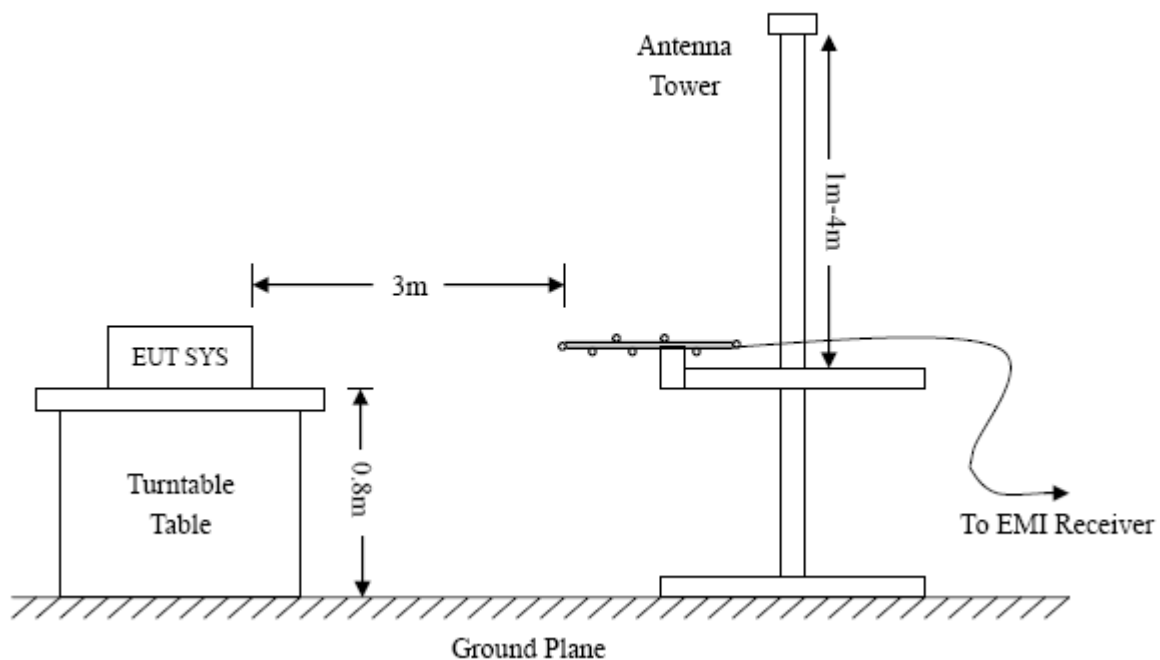

4.4 Test Receiver Setup

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$


4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.7 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-6.31 dB at 178.1327 MHz in the Vertical polarization, TM1 Mode, 9 kHz to 6GHz, 3Meters

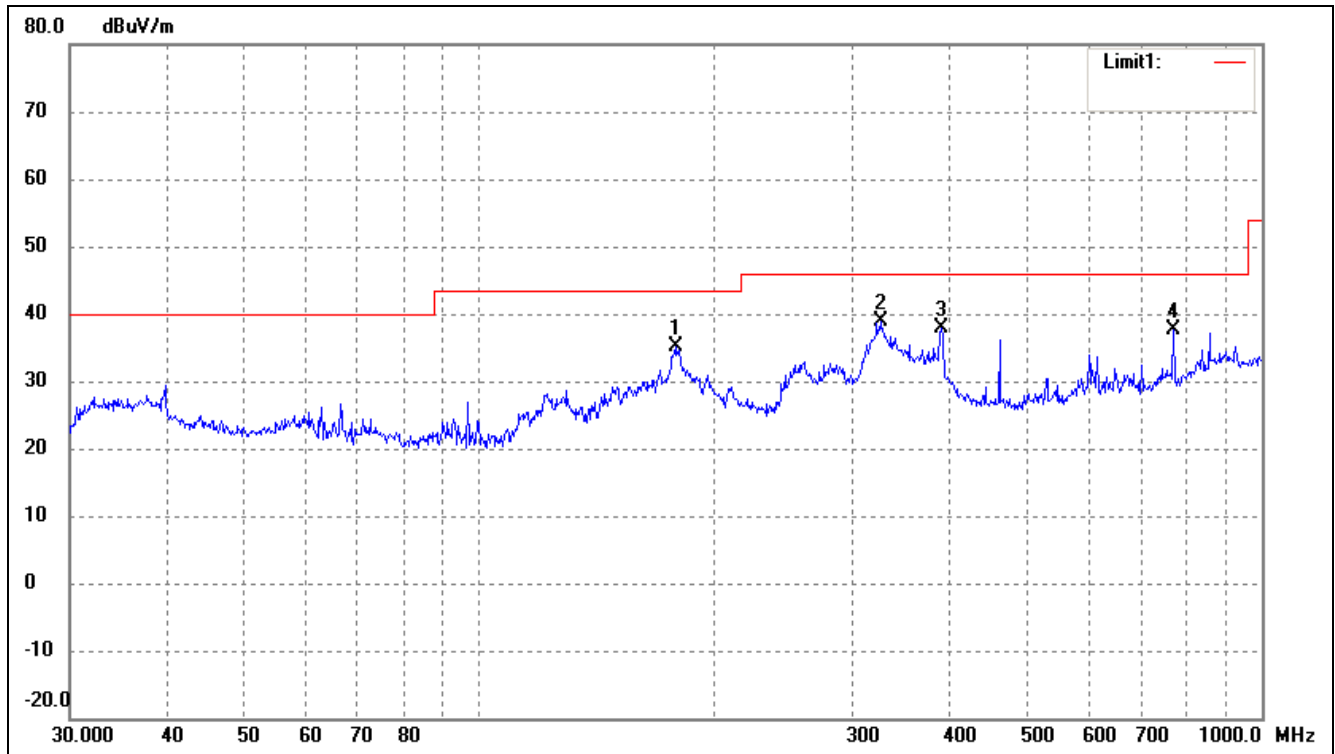Plot of Radiated Emissions Test Data (Below 1GHz)*EUT:* MID*Tested Model:* B26T*Operating Condition:* TM1*Comment:* AC 120V/60Hz; Adapter DC 5V*Test Specification:* Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	178.1327	32.46	2.73	35.19	43.50	-8.31	360	100	peak
2*	325.5958	29.62	9.14	38.76	46.00	-7.24	272	100	peak
3	389.3549	28.13	9.63	37.76	46.00	-8.24	336	100	peak
4	771.4486	23.57	13.97	37.54	46.00	-8.46	330	100	peak

Test Specification: Vertical

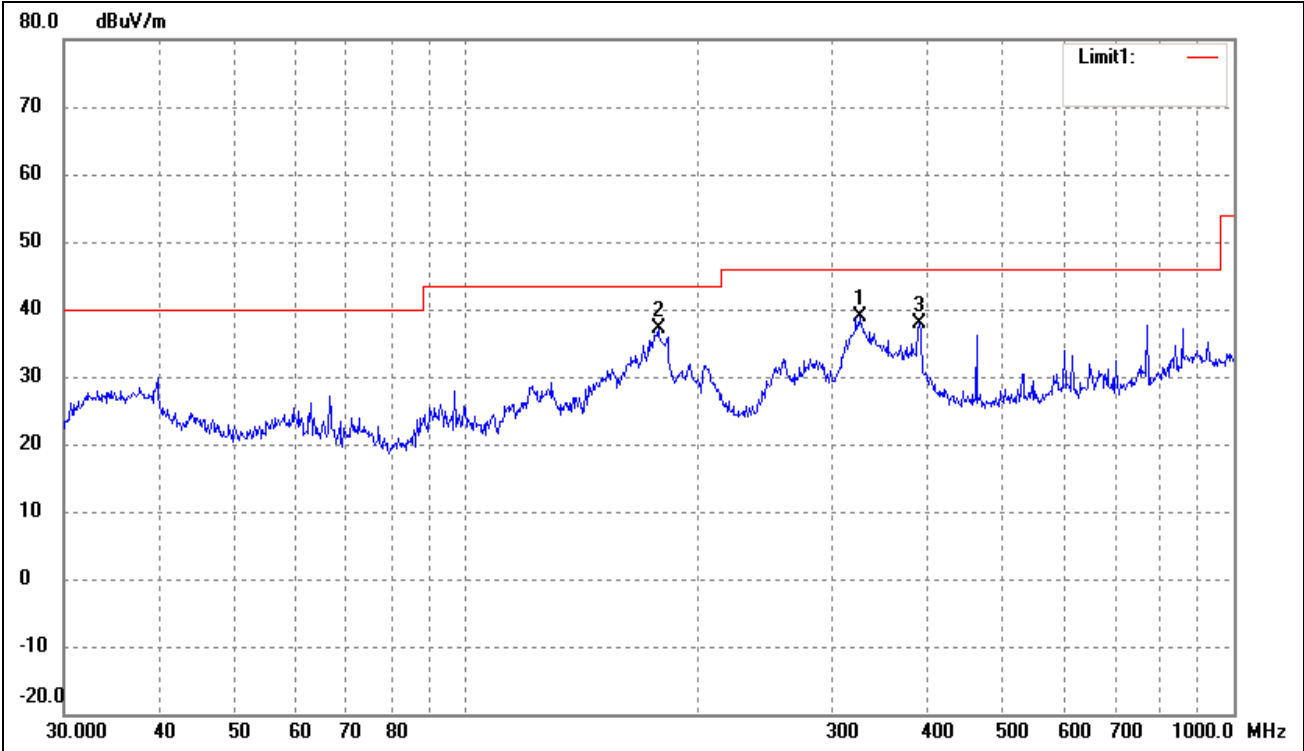

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	167	100	
1	325.5958	29.62	9.14	38.76	46.00	-7.24	214	100	peak
2*	178.1327	34.46	2.73	37.19	43.50	-6.31	36	100	peak
3	389.3549	28.13	9.63	37.76	46.00	-8.24	167	100	peak

The measurements greater than 20dB below the limit from 9kHz to 6GHz. and test data are not provided.

***** END OF REPORT *****