

FCC Test Report

Product Name	LV55
Model No.	LVSKIHP
FCC ID.	NKR-LVSK-IHP

Applicant	Wistron NeWeb Corporation
Address	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan

Date of Receipt	May 29, 2020
Issued Date	Jun. 23, 2020
Report No.	2050962R-E3032110108
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issued Date: Jun. 23, 2020

Report No.: 2050962R-E3032110108




Product Name	LV55
Applicant	Wistron NeWeb Corporation
Address	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan
Manufacturer	Wistron NeWeb Corporation
Model No.	LVSKIHP
FCC ID.	NKR-LVSK-IHP
EUT Adapter Rated Voltage	AC 100-240V / 50-60Hz
EUT Adapter Test Voltage	AC 120V / 60Hz
Trade Name	WNC
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Jinn Chen)

Tested By :



(Senior Engineer / Ivan Chuang)

Approved By :



(Director / Vincent Lin)

Revision History

Report No.	Version	Description	Issued Date
2050962R-E3032110108	V1.0	Initial issue of report.	2020-06-23

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description	5
1.2. Operational Description	7
1.3. Tested System Details	8
1.4. Configuration of Tested System	9
1.5. EUT Exercise Software	10
1.6. Test Facility	11
1.7. List of Test Equipment	12
1.8. Uncertainty	13
2. CONDUCTED EMISSION	14
2.1. Test Setup	14
2.2. Limits	14
2.3. Test Procedure	15
2.4. Test Result of Conducted Emission	16
3. PEAK POWER OUTPUT	20
3.1. Test Setup	20
3.2. Limit	20
3.3. Test Procedure	20
3.4. Test Result of Peak Power Output	21
4. RADIATED EMISSION	23
4.1. Test Setup	23
4.2. Limits	24
4.3. Test Procedure	25
4.4. Test Result of Radiated Emission	27
5. RF ANTENNA CONDUCTED TEST	45
5.1. Test Setup	45
5.2. Limits	45
5.3. Test Procedure	45
5.4. Test Result of RF Antenna Conducted Test	46
6. BAND EDGE	48
6.1. Test Setup	48
6.2. Limit	49
6.3. Test Procedure	49
6.4. Test Result of Band Edge	51
7. 6DB BANDWIDTH	71
7.1. Test Setup	71
7.2. Limits	71
7.3. Test Procedure	71
7.4. Test Result of 6dB Bandwidth	72
8. POWER DENSITY	78
8.1. Test Setup	78
8.2. Limits	78
8.3. Test Procedure	78
8.4. Test Result of Power Density	79
9. DUTY CYCLE	85
9.1. Test Setup	85
9.2. Test Procedure	85
9.3. Test Result of Duty Cycle	86
10. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	88

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	LV55
Trade Name	WNC
Model No.	LVSKIHP
FCC ID.	NKR-LVSK-IHP
Frequency Range	2402 – 2480MHz
Channel Number	Bluetooth V5.0: 40CH
Type of Modulation	Bluetooth V5.0: GFSK(1Mbps, 2Mbps)
Antenna Type	PIFA Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
Power Adapter(1)	MFR: Delta, M/N: ADP-120VH D Input: AC 100-240V~2.5A, 50-60Hz Output: DC 20V, 6A Cable Out: Non-shielded, 3.0m Power Cord: Non-shielded, 2.0m
Power Adapter(2)	MFR: Delta, M/N: ADH-90AR B Input: AC 100-240V~2.0A, 50-60Hz Output: 56V, 1.61A Power Cord: Non-shielded, 1.8m
PoE Surge Protective Device	MFR: Citel, M/N: CRMJ8-PoE-C6
Hardware Version	0.0.2
Software Version	0.23.9.1dbg

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	WNC	95XKAC15.GE5VZ	PIFA antenna	2.21dBi for 2.4GHz

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel: (For Bluetooth V5.0)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 01:	2404 MHz	Channel 02:	2406 MHz	Channel 03:	2408 MHz
Channel 04:	2410 MHz	Channel 05:	2412 MHz	Channel 06:	2414 MHz	Channel 07:	2416 MHz
Channel 08:	2418 MHz	Channel 09:	2420 MHz	Channel 10:	2422 MHz	Channel 11:	2424 MHz
Channel 12:	2426 MHz	Channel 13:	2428 MHz	Channel 14:	2430 MHz	Channel 15:	2432 MHz
Channel 16:	2434 MHz	Channel 17:	2436 MHz	Channel 18:	2438 MHz	Channel 19:	2440 MHz
Channel 20:	2442 MHz	Channel 21:	2444 MHz	Channel 22:	2446 MHz	Channel 23:	2448 MHz
Channel 24:	2450 MHz	Channel 25:	2452 MHz	Channel 26:	2454 MHz	Channel 27:	2456 MHz
Channel 28:	2458 MHz	Channel 29:	2460 MHz	Channel 30:	2462 MHz	Channel 31:	2464 MHz
Channel 32:	2466 MHz	Channel 33:	2468 MHz	Channel 34:	2470 MHz	Channel 35:	2472 MHz
Channel 36:	2474 MHz	Channel 37:	2476 MHz	Channel 38:	2478 MHz	Channel 39:	2480 MHz

Note:

1. The EUT is a LV55 with built-in WLAN (802.11a/b/g/n/ac/ax) with Bluetooth V5.0 transceiver, this report for Bluetooth V5.0.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The adapter mode and the PoE mode pre-scanning radiation has determined by the adapter mode is the worst case.

Test Mode	Mode 1: Transmit - BLE_1Mbps Mode 2: Transmit - BLE_2Mbps
-----------	--

1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Power Adapter	Delta	ADP-120VH D	N/A	N/A
2	Notebook PC	DELL	Latitude 5501	9V4JL13	N/A
3	Test Fixture	WNC	N/A	N/A	N/A
4	Test Fixture	WNC	N/A	N/A	N/A


Signal Cable Type		Signal cable Description
A	Power Cable	Non-shielded, 3m
B	LAN Cable	Non-shielded, 2m
C	Signal Cable	Non-shielded, 0.2m
D	USB Cable	Non-shielded, 0.8m
E	Signal Cable	Non-shielded, 0.2m
F	RS232 to USB Cable	Shielded, 1.4m
G	Power Cable	Non-shielded, 1.8m

PoE Mode:


Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Power Adapter	Delta	ADH-90AR B	N/A	N/A
2	PoE Surge Protective Device	Citel	CRMJ8-PoE-C6	N/A	N/A
3	Notebook PC	DELL	Latitude 5501	9V4JL13	N/A
4	Test Fixture	WNC	N/A	N/A	N/A
5	Test Fixture	WNC	N/A	N/A	N/A

Signal Cable Type		Signal cable Description
A	LAN Cable	Shielded, 2m
B	LAN Cable	Shielded, 2m
C	Signal Cable	Non-shielded, 0.2m
D	USB Cable	Non-shielded, 0.8m
E	Signal Cable	Non-shielded, 0.2m
F	RS232 to USB Cable	Shielded, 1.4m
G	LAN Cable	Non-shielded, 2m
H	Power Cable	Non-shielded, 1.8m

1.4. Configuration of Tested System

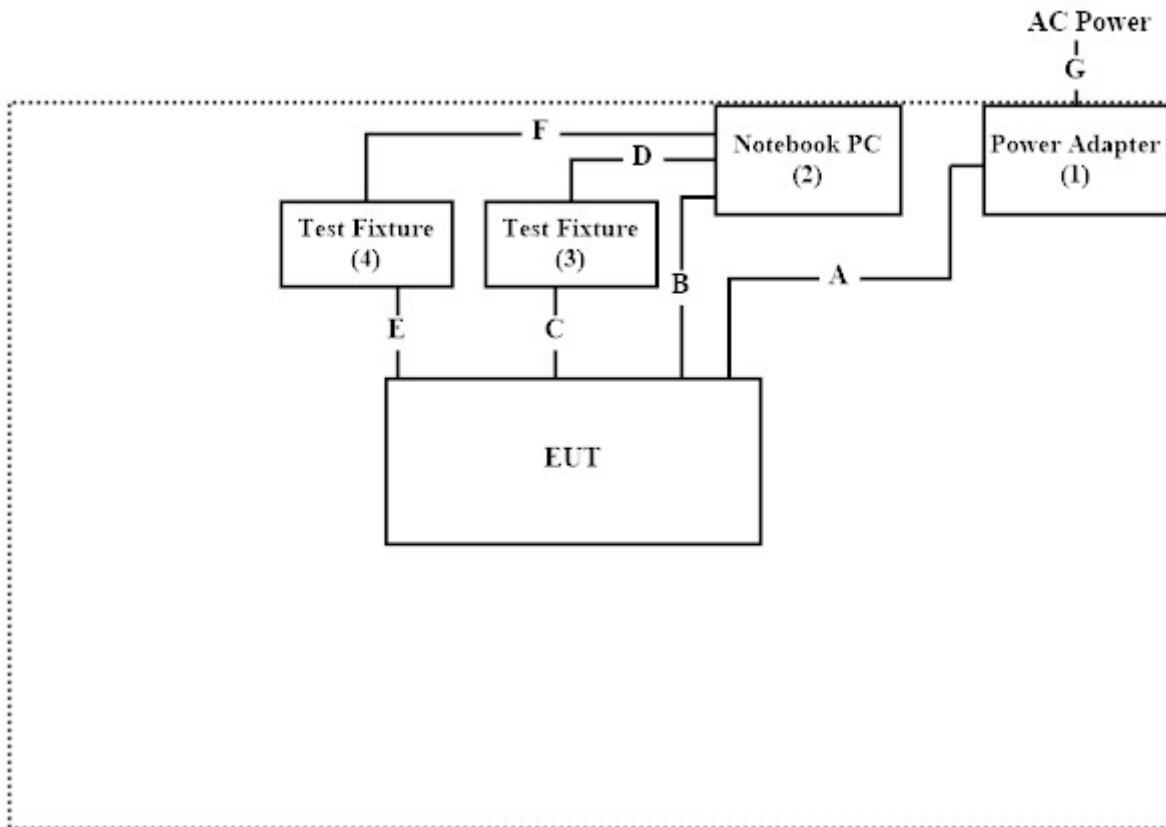

PoE Mode:

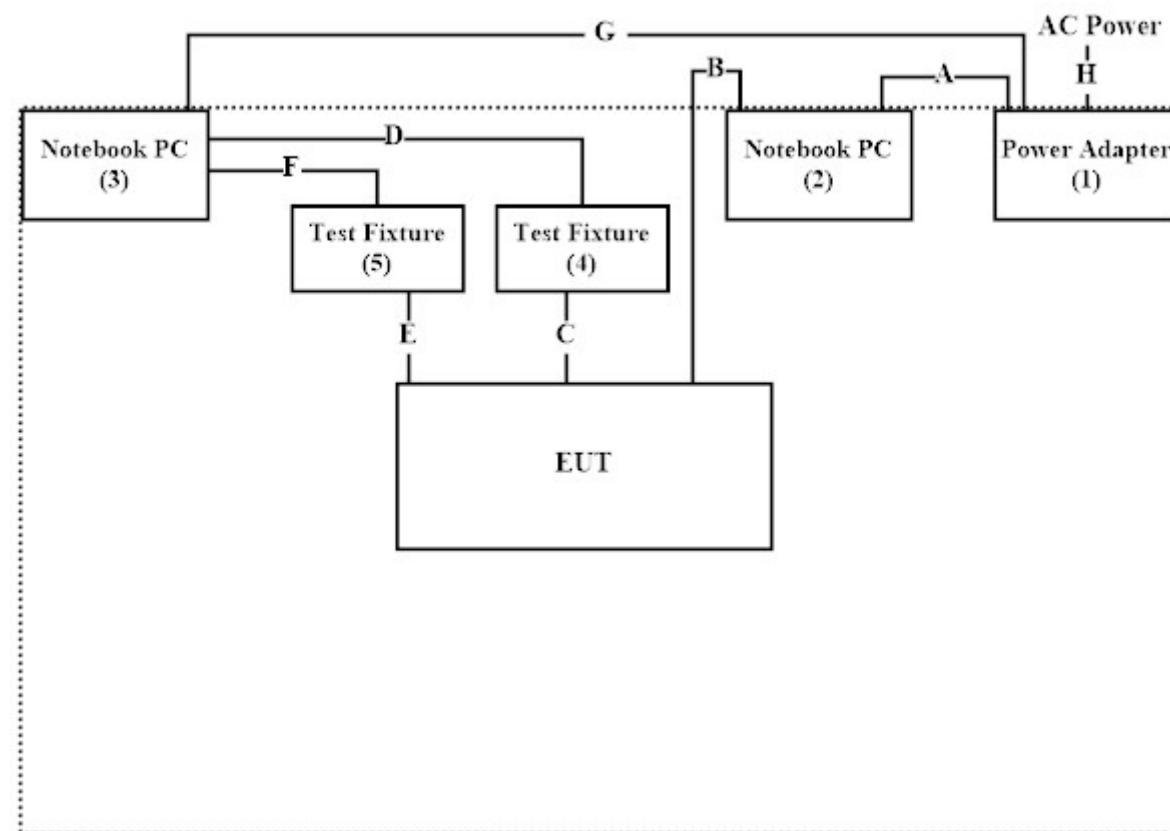

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute software “Qualcomm Radio Control Tool v4.0.00093” on the EUT.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	21.3 °C
	Humidity (%RH)	10~90 %	55.6 %
Radiated Emission	Temperature (°C)	10~40 °C	23.8 °C
	Humidity (%RH)	10~90 %	67.8 %
Conductive	Temperature (°C)	10~40 °C	23 °C
	Humidity (%RH)	10~90 %	51 %

USA : FCC Registration Number: TW0023

Canada : IC Registration Number: 25880

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,
New Taipei City 24457, Taiwan, R.O.C.
Phone number : 886-2-2602-7968
Fax number : 866-2-2602-3286
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.7. List of Test Equipment

For Conduction measurements /ASR1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	EMI Test Receiver	R&S	ESR7	101601	2020.05.28	2021.05.27
X	Two-Line V-Network	R&S	ENV216	101306	2020.03.25	2021.03.24
X	Two-Line V-Network	R&S	ENV216	101307	2020.04.17	2021.04.16
X	Coaxial Cable	DEKRA	RG400_BNC	RF001	2020.05.24	2021.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V1.2.

For Conducted measurements /ASR2

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103466	2019.12.16	2020.12.15
X	Peak Power Analyzer	KEYSIGHT	8900B	MY51000539	2020.05.13	2021.05.12
X	Power Sensor	KEYSIGHT	N1923A	MY59240002	2020.05.22	2021.05.21
X	Power Sensor	KEYSIGHT	N1923A	MY59240003	2020.05.22	2021.05.21
	Bluetooth Tester	R&S	CBT	101238	2020.02.10	2021.02.11

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5.

For Radiated measurements /ACB1


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	AMETEK	HLA6121	49611	2020.03.16	2021.03.15
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2019.07.01	2020.06.30
X	Horn Antenna	ETS-Lindgren	3117	00203761	2019.10.31	2020.10.30
X	Horn Antenna	Com-Power	AH-840	101088	2019.08.29	2020.08.28
X	Pre-Amplifier	EMCI	EMC001330	980301	2020.06.04	2021.06.03
X	Pre-Amplifier	EMCI	EMC051835SE	980313	2019.09.17	2020.09.16
X	Pre-Amplifier	EMCI	EMC05820SE	980308	2019.09.02	2020.09.01
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2020.06.10	2021.06.09
X	Filter	MICRO TRONICS	BRM50702	G251	2019.09.03	2020.09.02
	Filter	MICRO TRONICS	BRM50716	G188	2019.09.03	2020.09.02
X	EMI Test Receiver	R&S	ESR7	101602	2019.12.16	2020.12.15
X	Spectrum Analyzer	R&S	FSV40	101148	2020.03.16	2021.03.15
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2019.07.03	2020.07.02
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2020.06.10	2021.06.09

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V1.2.

2. Conducted Emission

2.1. Test Setup

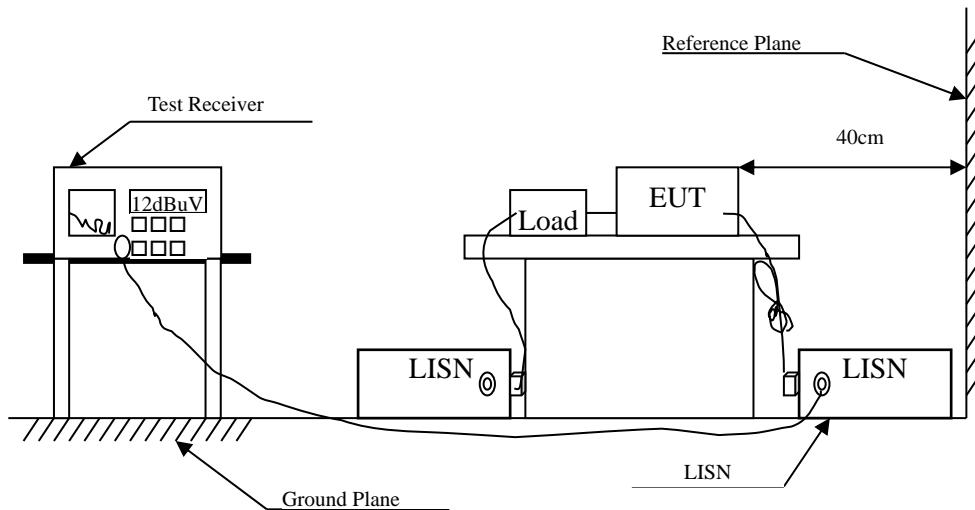

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to DTS test procedure of FCC KDB-558074 for compliance to FCC 47CFR Subpart C requirements.

2.4. Test Result of Conducted Emission

Product : LV55
 Test Item : Conducted Emission Test
 Power Line : L 1
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2440MHz)
 Test Date : 2020/06/10




No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.158	33.95	65.57	-31.62	24.31	9.64	QP
2	0.158	23.27	55.57	-32.30	13.63	9.64	AV
3	0.467	24.82	56.57	-31.75	15.17	9.65	QP
4	0.467	18.34	46.57	-28.23	8.69	9.65	AV
5	0.995	13.95	56.00	-42.05	4.28	9.67	QP
6	0.995	4.56	46.00	-41.44	-5.11	9.67	AV
7	1.964	21.57	56.00	-34.43	11.86	9.71	QP
*8	1.964	17.89	46.00	-28.11	8.18	9.71	AV
9	5.291	10.90	60.00	-49.10	1.12	9.78	QP
10	5.291	-0.92	50.00	-50.92	-10.71	9.78	AV
11	11.153	9.65	60.00	-50.35	-0.25	9.89	QP
12	11.153	2.29	50.00	-47.71	-7.60	9.89	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “*” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : LV55
 Test Item : Conducted Emission Test
 Power Line : N
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2440MHz)
 Test Date : 2020/06/10

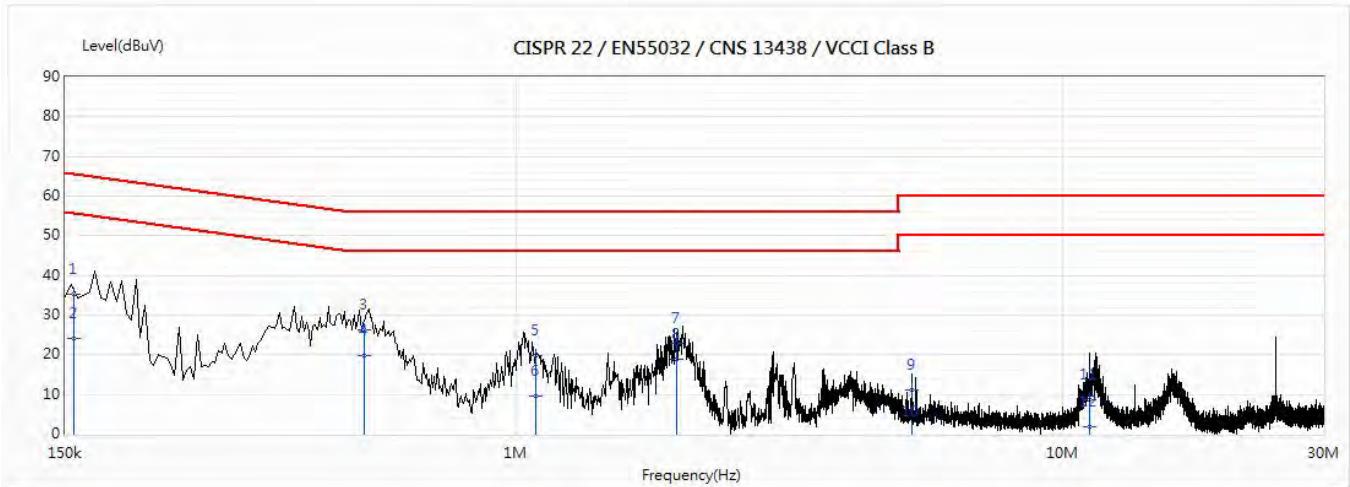


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.155	35.18	65.70	-30.52	25.53	9.65	QP
2	0.155	24.17	55.70	-31.53	14.52	9.65	AV
3	0.527	26.29	56.00	-29.71	16.63	9.66	QP
*4	0.527	19.94	46.00	-26.06	10.28	9.66	AV
5	1.088	19.75	56.00	-36.25	10.07	9.67	QP
6	1.088	9.58	46.00	-36.42	-0.10	9.67	AV
7	1.965	22.93	56.00	-33.07	13.21	9.72	QP
8	1.965	18.79	46.00	-27.21	9.07	9.72	AV
9	5.291	11.19	60.00	-48.81	1.39	9.79	QP
10	5.291	-0.75	50.00	-50.75	-10.55	9.79	AV
11	11.225	8.53	60.00	-51.47	-1.40	9.92	QP
12	11.225	1.71	50.00	-48.29	-8.21	9.92	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “*” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : LV55
 Test Item : Conducted Emission Test
 Power Line : L 1
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2440MHz) (POE Mode)
 Test Date : 2020/06/10

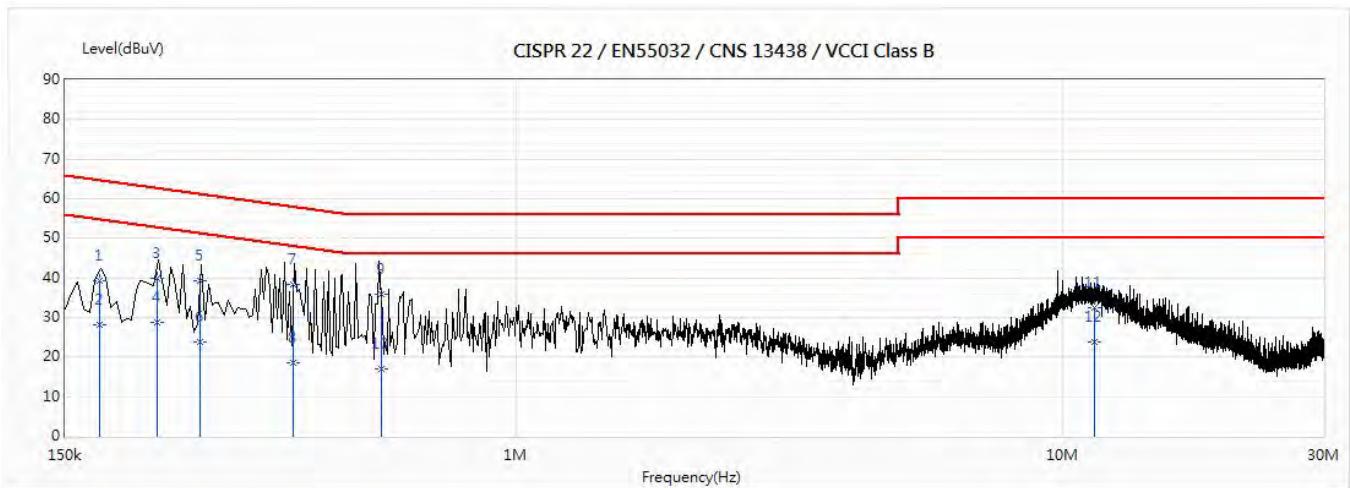


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.173	39.35	64.81	-25.46	29.69	9.66	QP
2	0.173	28.20	54.81	-26.61	18.54	9.66	AV
3	0.22	39.83	62.80	-22.98	30.17	9.65	QP
4	0.22	28.77	52.80	-24.03	19.12	9.65	AV
5	0.265	39.38	61.27	-21.89	29.73	9.65	QP
6	0.265	23.66	51.27	-27.62	14.00	9.65	AV
*7	0.391	38.22	58.04	-19.82	28.56	9.66	QP
8	0.391	18.44	48.04	-29.60	8.78	9.66	AV
9	0.566	35.81	56.00	-20.19	26.14	9.66	QP
10	0.566	17.05	46.00	-28.95	7.38	9.66	AV
11	11.441	32.42	60.00	-27.58	22.52	9.91	QP
12	11.441	23.70	50.00	-26.30	13.79	9.91	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “*” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : LV55
 Test Item : Conducted Emission Test
 Power Line : N
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2440MHz) (POE Mode)
 Test Date : 2020/06/10

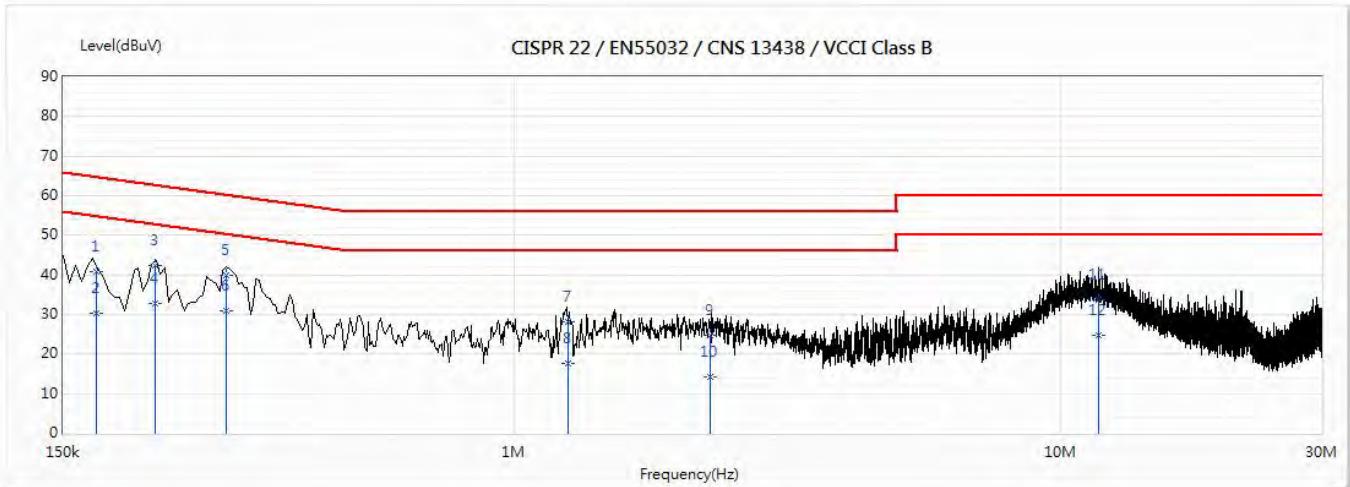


No	Frequency (MHz)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	0.172	40.83	64.86	-24.03	31.16	9.67	QP
2	0.172	30.20	54.86	-24.66	20.53	9.67	AV
3	0.221	42.44	62.78	-20.34	32.77	9.67	QP
4	0.221	32.81	52.78	-19.97	23.14	9.67	AV
5	0.298	40.04	60.30	-20.27	30.37	9.67	QP
*6	0.298	30.78	50.30	-19.52	21.11	9.67	AV
7	1.256	28.23	56.00	-27.77	18.52	9.70	QP
8	1.256	17.66	46.00	-28.34	7.96	9.70	AV
9	2.287	24.67	56.00	-31.33	14.93	9.74	QP
10	2.287	14.28	46.00	-31.72	4.55	9.74	AV
11	11.743	33.71	60.00	-26.29	23.77	9.94	QP
12	11.743	24.72	50.00	-25.28	14.78	9.94	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “*” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

3.1. Test Setup

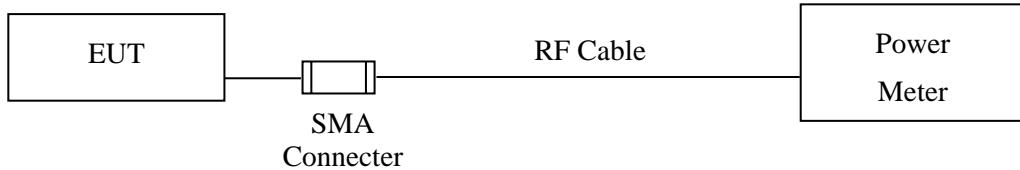

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method.

3.4. Test Result of Peak Power Output

Product : LV55
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit - BLE_1Mbps
Test Date : 2020/06/10

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	2.74	1 Watt= 30 dBm	Pass
Channel 19	2440.00	3.35	1 Watt= 30 dBm	Pass
Channel 39	2480.00	1.57	1 Watt= 30 dBm	Pass


Product : LV55
Test Item : Peak Power Output
Test Mode : Mode 2: Transmit - BLE_2Mbps
Test Date : 2020/06/10

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	2.74	1 Watt= 30 dBm	Pass
Channel 19	2440.00	3.19	1 Watt= 30 dBm	Pass
Channel 39	2480.00	1.84	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

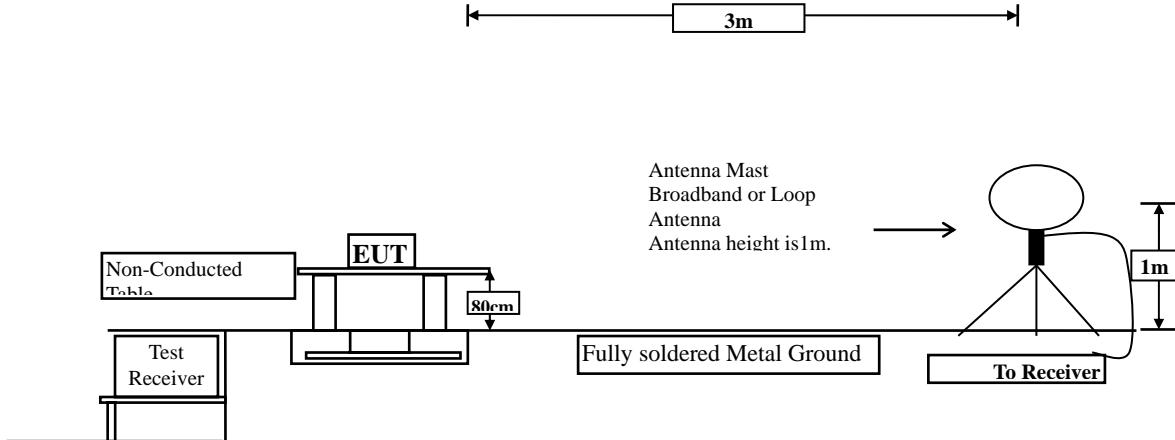

Radiated Emission Below 1GHz

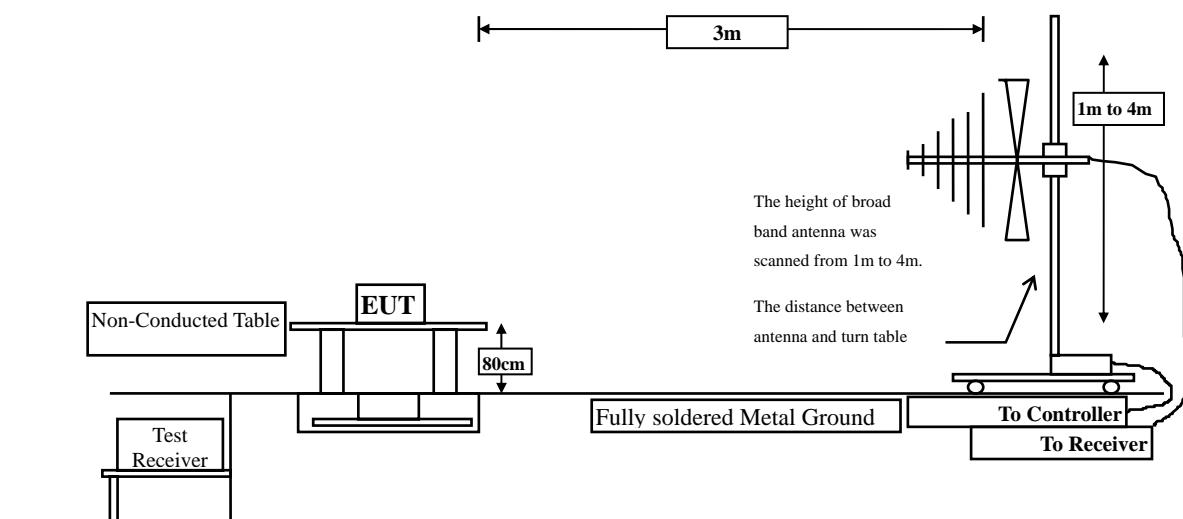

Radiated Emission Above 1GHz

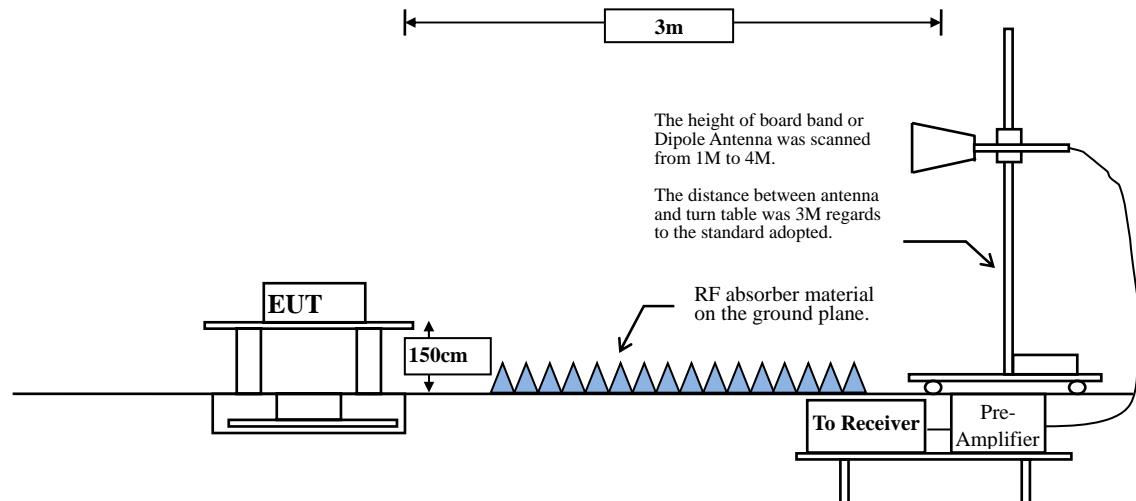

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks:

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

VBW $\geq 3 \times$ RBW.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$

VBW $\geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE_1Mbps	87.86	2.2029	454	500
BLE_2Mbps	60.07	1.1231	890	1k

Note: Duty Cycle Refer to Section 9

4.4. Test Result of Radiated Emission

Product : LV55
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - BLE_1Mbps(2402MHz)
 Test Date : 2020/06/12

Horizontal

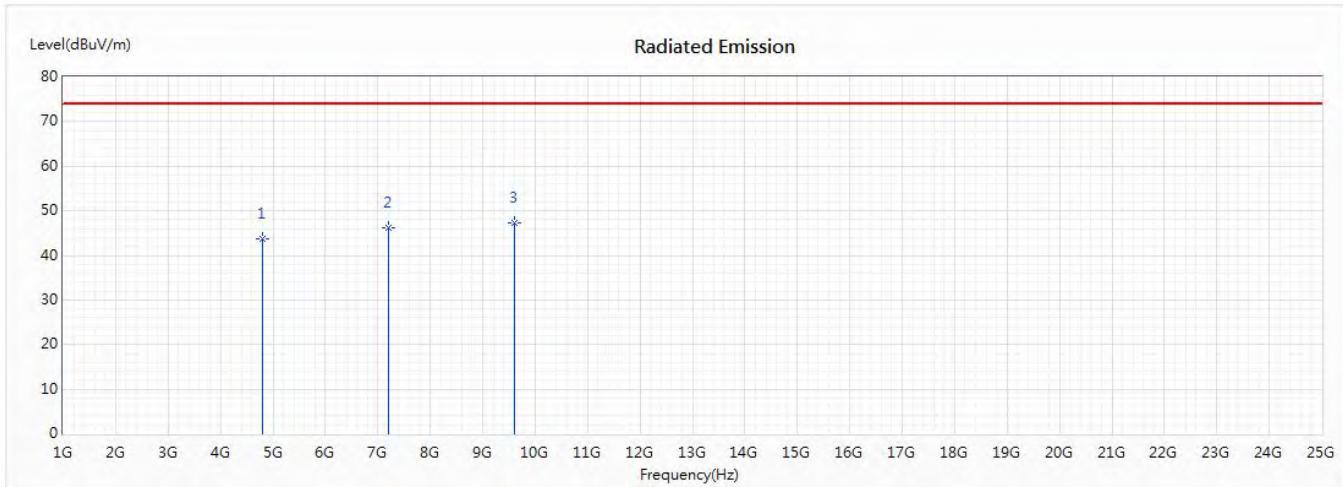


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - BLE_1Mbps(2402MHz)
 Test Date : 2020/06/12

Vertical

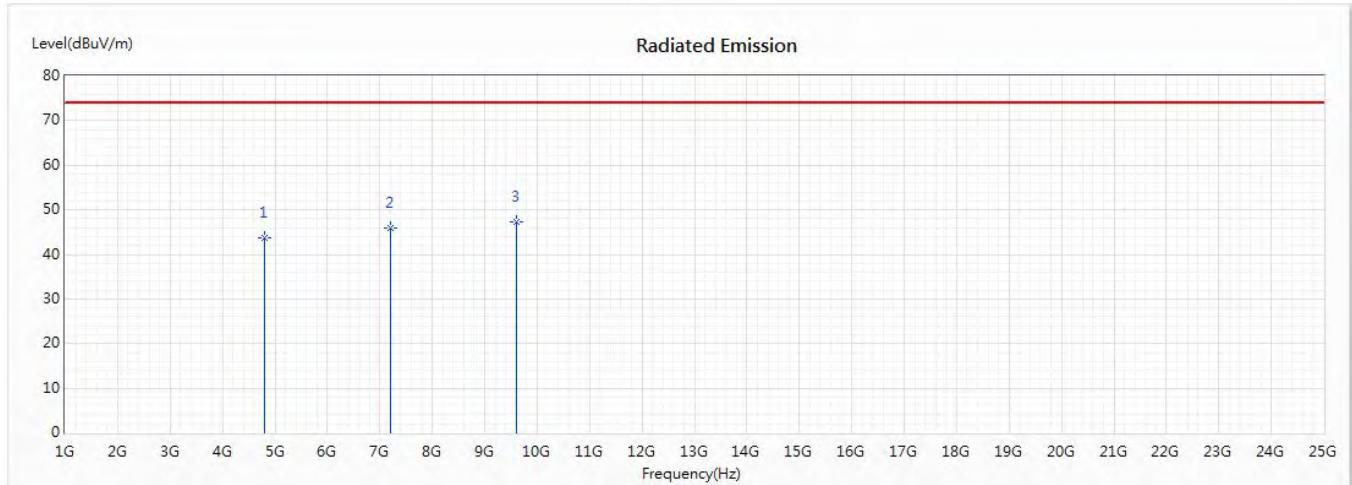


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4804	43.78	74.00	-30.22	45.49	-1.71	PK
2	7206	45.95	74.00	-28.05	44.09	1.86	PK
* 3	9608	47.40	74.00	-26.60	42.68	4.72	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2440MHz)
 Test Date : 2020/06/12

Horizontal

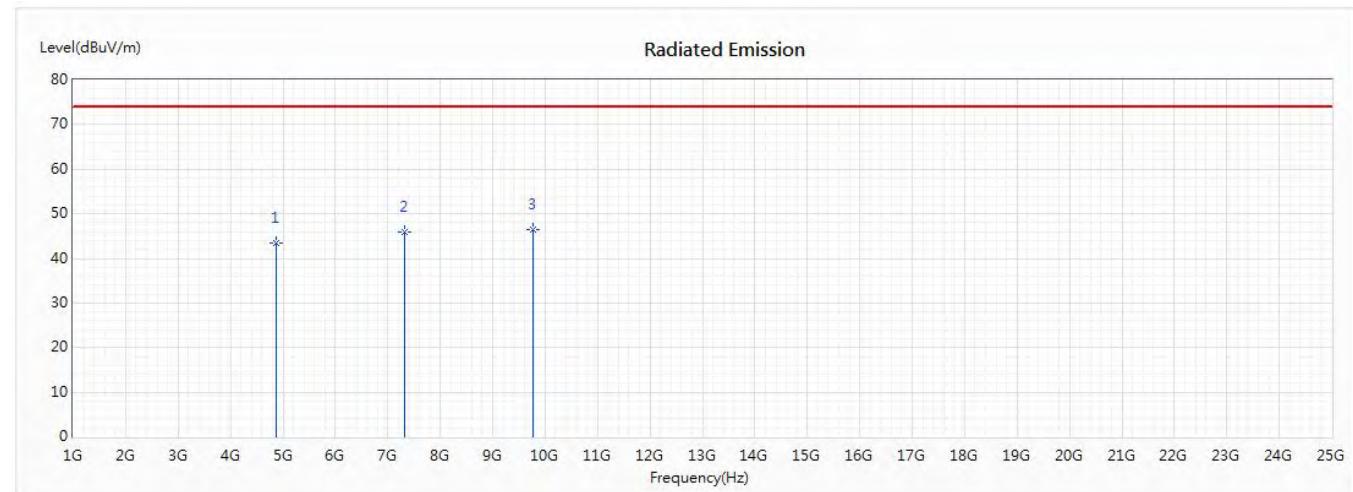


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4880	43.39	74.00	-30.61	45.14	-1.75	PK
2	7320	45.80	74.00	-28.20	43.95	1.85	PK
* 3	9760	46.36	74.00	-27.64	41.50	4.86	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2440MHz)
 Test Date : 2020/06/12

Vertical

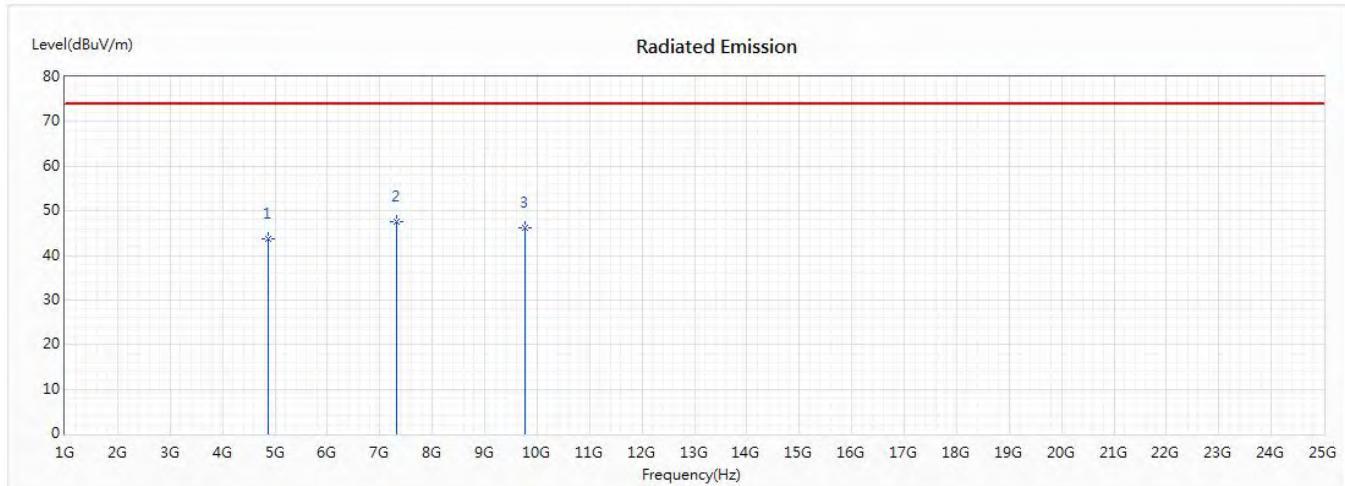


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4880	43.60	74.00	-30.40	45.35	-1.75	PK
* 2	7320	47.66	74.00	-26.34	45.81	1.85	PK
3	9760	46.27	74.00	-27.73	41.41	4.86	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2480MHz)
 Test Date : 2020/06/12

Horizontal

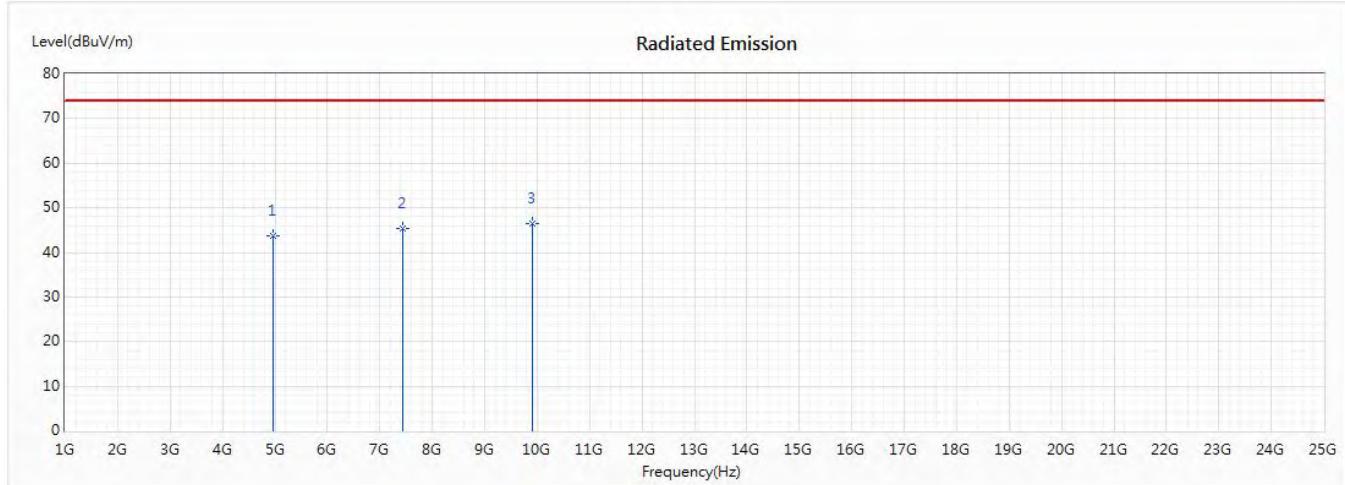


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4960	43.70	74.00	-30.30	45.18	-1.48	PK
2	7440	45.24	74.00	-28.76	43.36	1.88	PK
* 3	9920	46.57	74.00	-27.43	41.48	5.09	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2480MHz)
 Test Date : 2020/06/12

Vertical

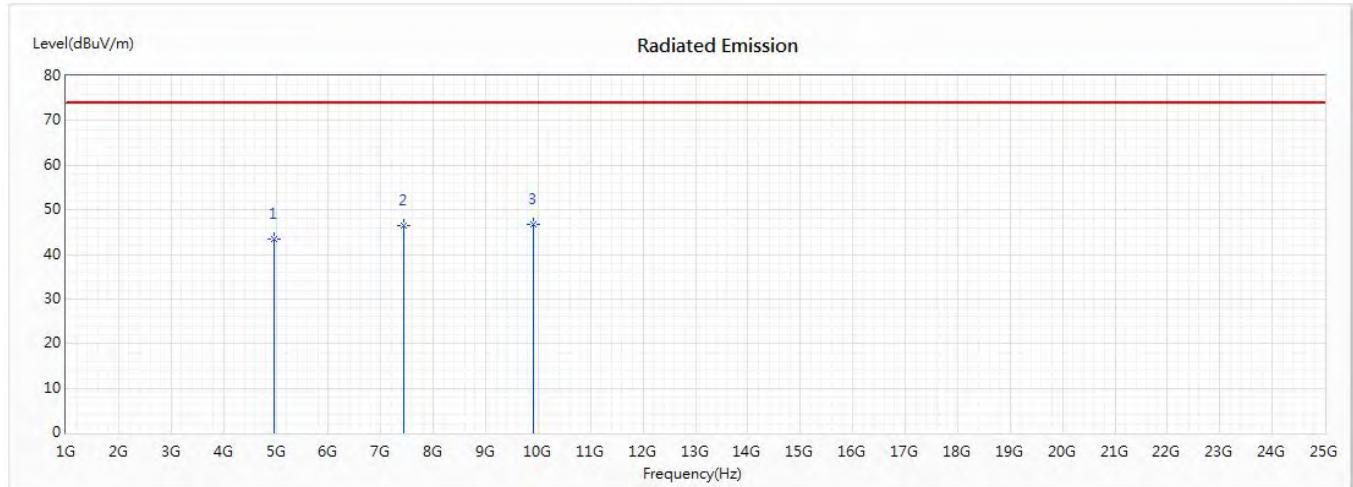


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4960	43.32	74.00	-30.68	44.80	-1.48	PK
2	7440	46.56	74.00	-27.44	44.68	1.88	PK
* 3	9920	46.84	74.00	-27.16	41.75	5.09	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - BLE_2Mbps(2402MHz)
 Test Date : 2020/06/12

Horizontal

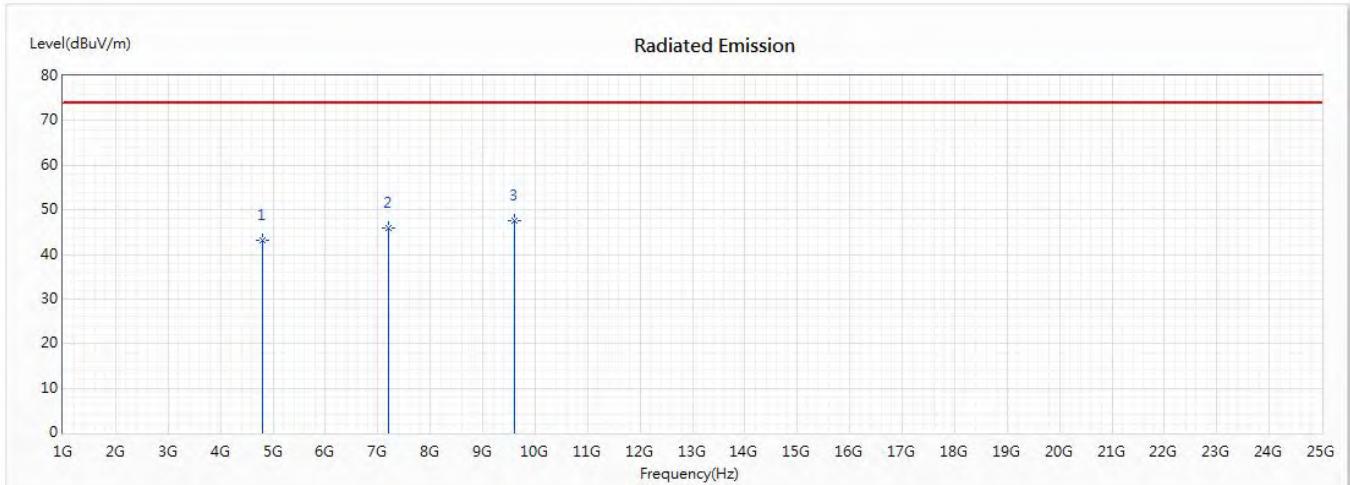


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4804	43.21	74.00	-30.79	44.92	-1.71	PK
2	7206	46.04	74.00	-27.96	44.18	1.86	PK
* 3	9608	47.43	74.00	-26.57	42.71	4.72	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - BLE_2Mbps(2402MHz)
 Test Date : 2020/06/12

Vertical

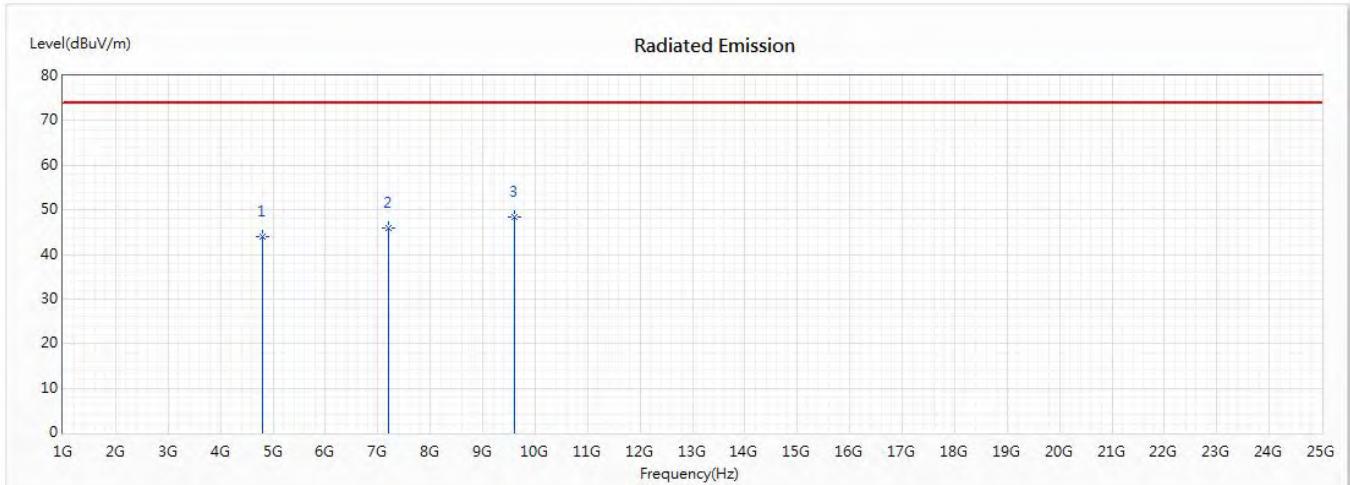


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4804	43.90	74.00	-30.10	45.61	-1.71	PK
2	7206	45.89	74.00	-28.11	44.03	1.86	PK
* 3	9608	48.27	74.00	-25.73	43.55	4.72	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2440MHz)
 Test Date : 2020/06/12

Horizontal

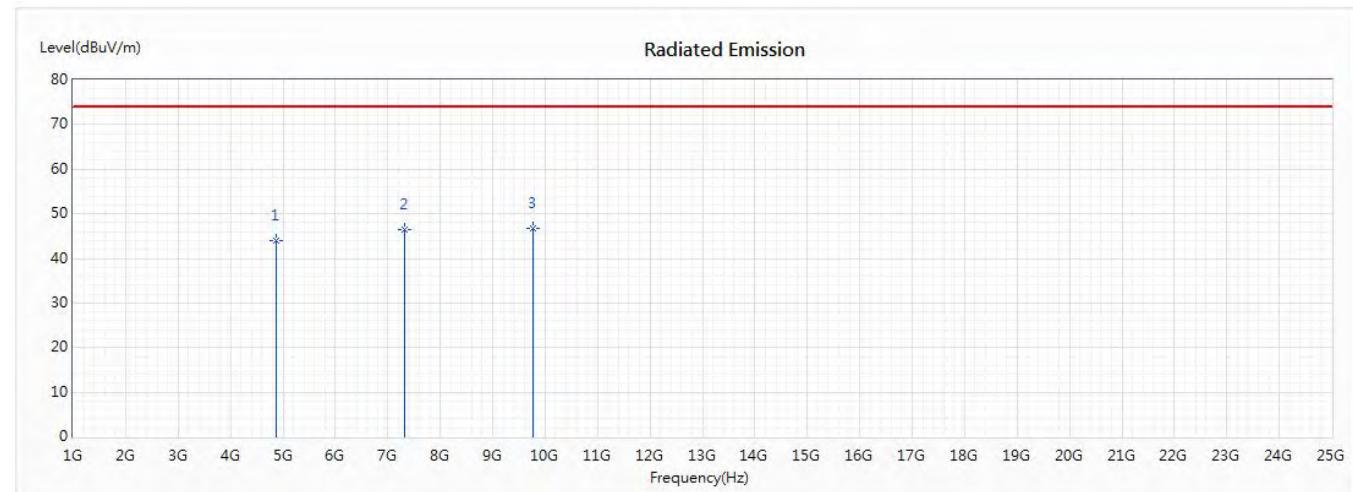


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2440MHz)
 Test Date : 2020/06/12

Vertical

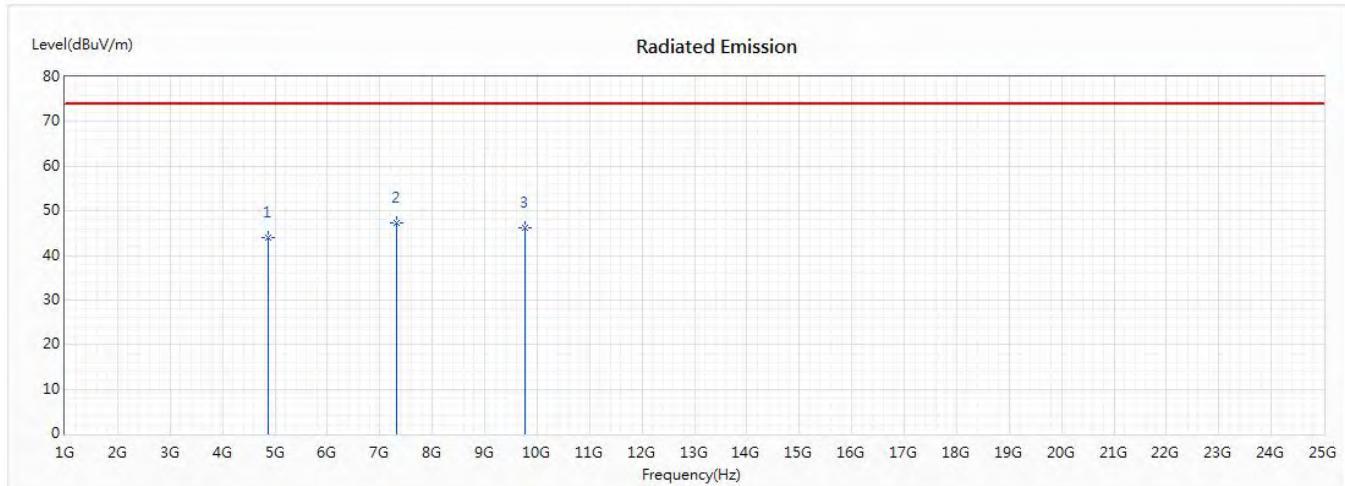


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4880	44.12	74.00	-29.88	45.87	-1.75	PK
* 2	7320	47.33	74.00	-26.67	45.48	1.85	PK
3	9760	46.26	74.00	-27.74	41.40	4.86	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2480MHz)
 Test Date : 2020/06/12

Horizontal

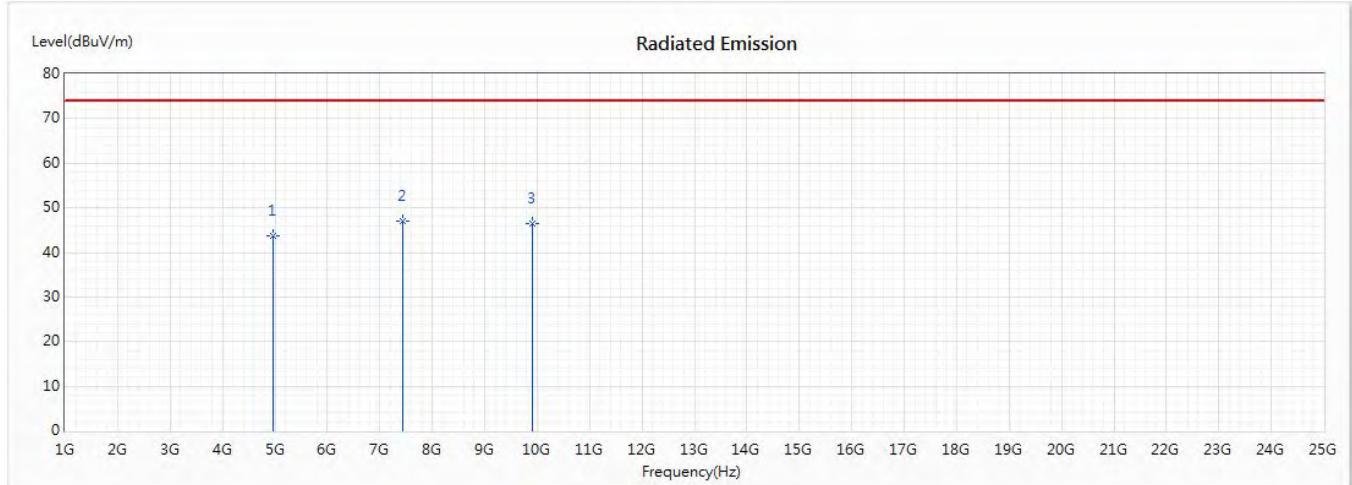


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4960	43.76	74.00	-30.24	45.24	-1.48	PK
* 2	7440	47.12	74.00	-26.88	45.24	1.88	PK
3	9920	46.54	74.00	-27.46	41.45	5.09	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2480MHz)
 Test Date : 2020/06/12

Vertical

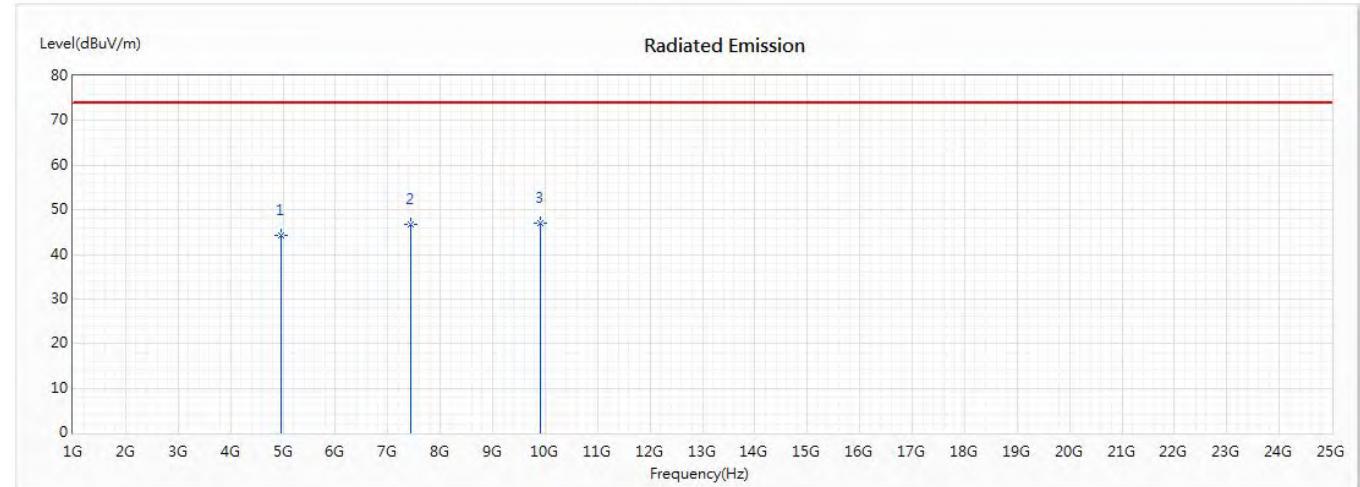


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	4960	44.31	74.00	-29.69	45.79	-1.48	PK
2	7440	46.84	74.00	-27.16	44.96	1.88	PK
* 3	9920	47.08	74.00	-26.92	41.99	5.09	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2440MHz)
 Test Date : 2020/06/12

Horizontal

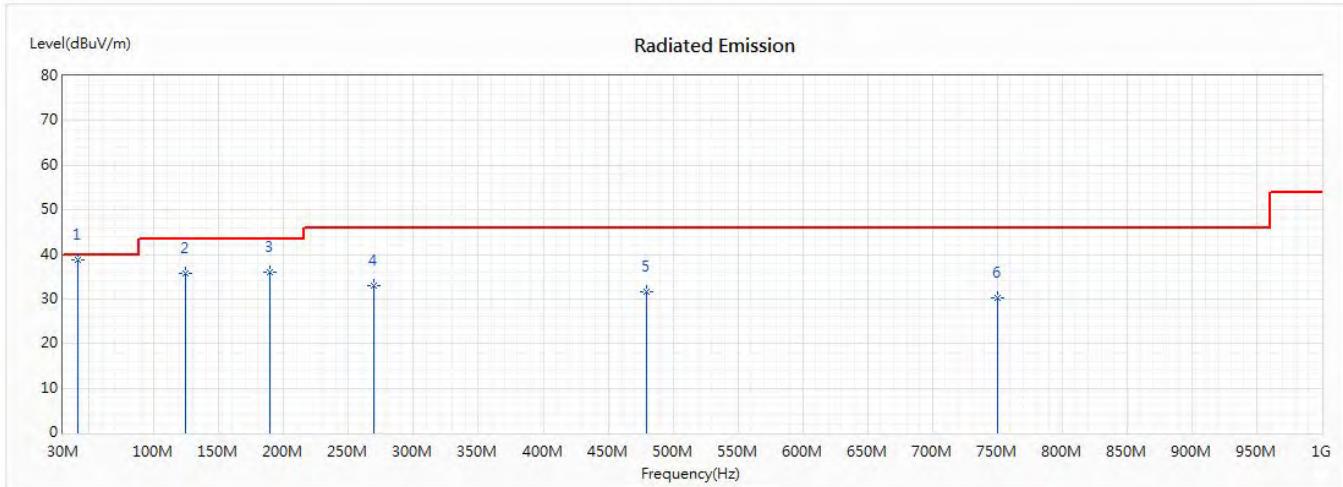


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	41.246	38.67	40.00	-1.33	42.04	-3.37	QP
2	124.188	35.85	43.50	-7.65	39.10	-3.25	QP
3	188.855	36.00	43.50	-7.50	39.12	-3.12	QP
4	268.986	32.92	46.00	-13.08	35.92	-3.00	QP
5	479.855	31.66	46.00	-14.34	34.56	-2.90	QP
6	749.768	30.35	46.00	-15.65	33.45	-3.10	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2440MHz)
 Test Date : 2020/06/12

Vertical

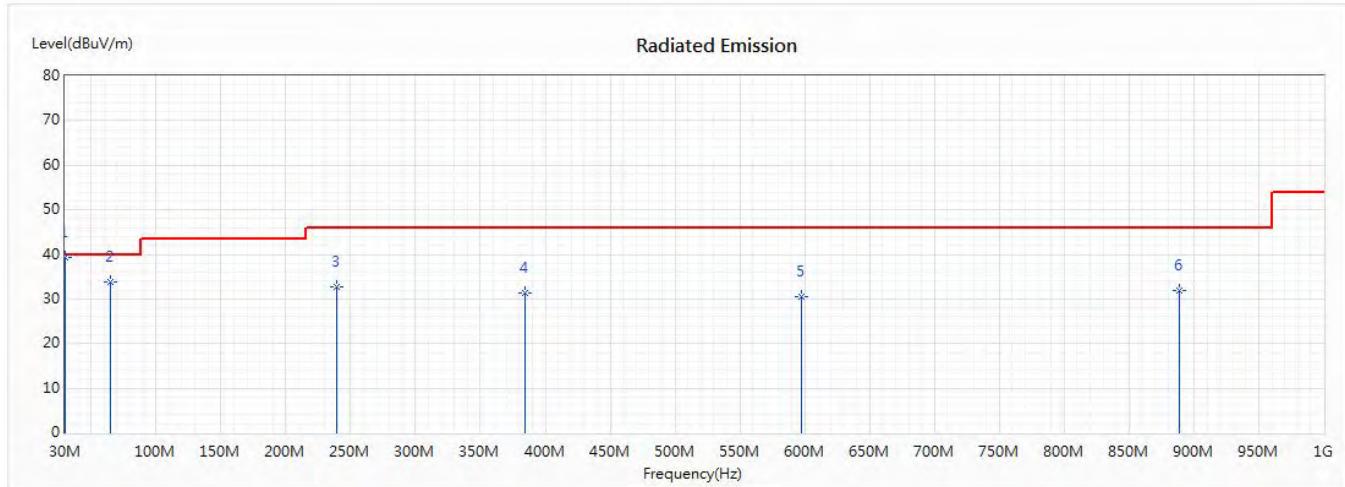


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	30	39.34	40.00	-0.66	42.68	-3.34	QP
2	65.145	33.74	40.00	-6.26	37.11	-3.37	QP
3	239.464	32.76	46.00	-13.24	35.80	-3.04	QP
4	384.261	31.26	46.00	-14.74	34.25	-2.99	QP
5	597.942	30.40	46.00	-15.60	33.39	-2.99	QP
6	888.942	31.95	46.00	-14.05	35.02	-3.07	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2440MHz)
 Test Date : 2020/06/12

Horizontal

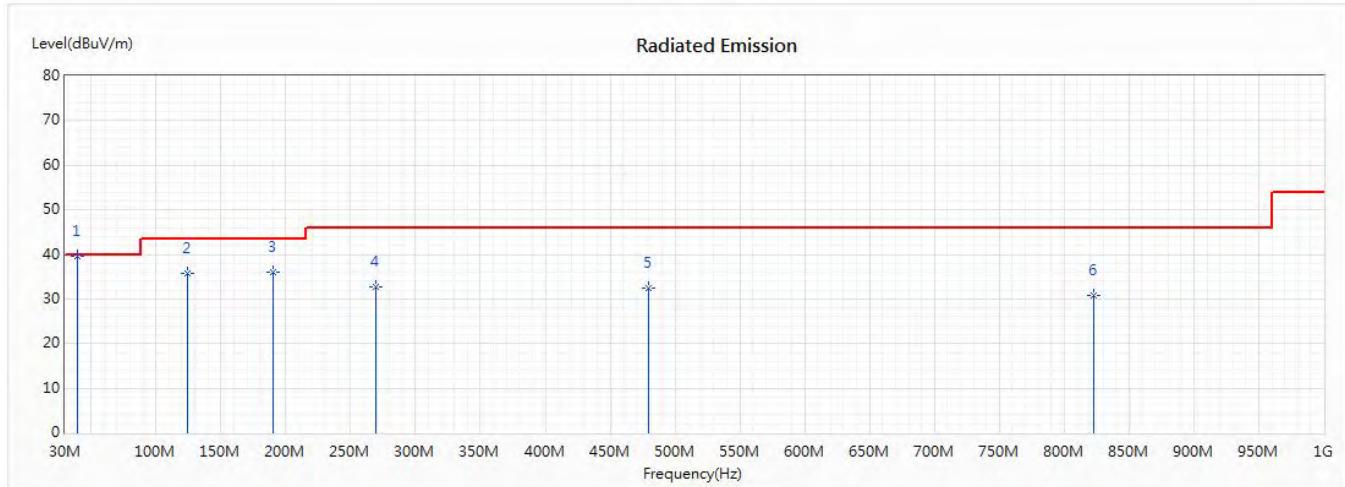


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	39.841	39.72	40.00	-0.28	43.09	-3.37	QP
2	124.188	35.69	43.50	-7.81	38.94	-3.25	QP
3	190.261	36.09	43.50	-7.41	39.21	-3.12	QP
4	268.986	32.75	46.00	-13.25	35.75	-3.00	QP
5	479.855	32.40	46.00	-13.60	35.30	-2.90	QP
6	822.87	30.84	46.00	-15.16	33.94	-3.10	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2440MHz)
 Test Date : 2020/06/12

Vertical

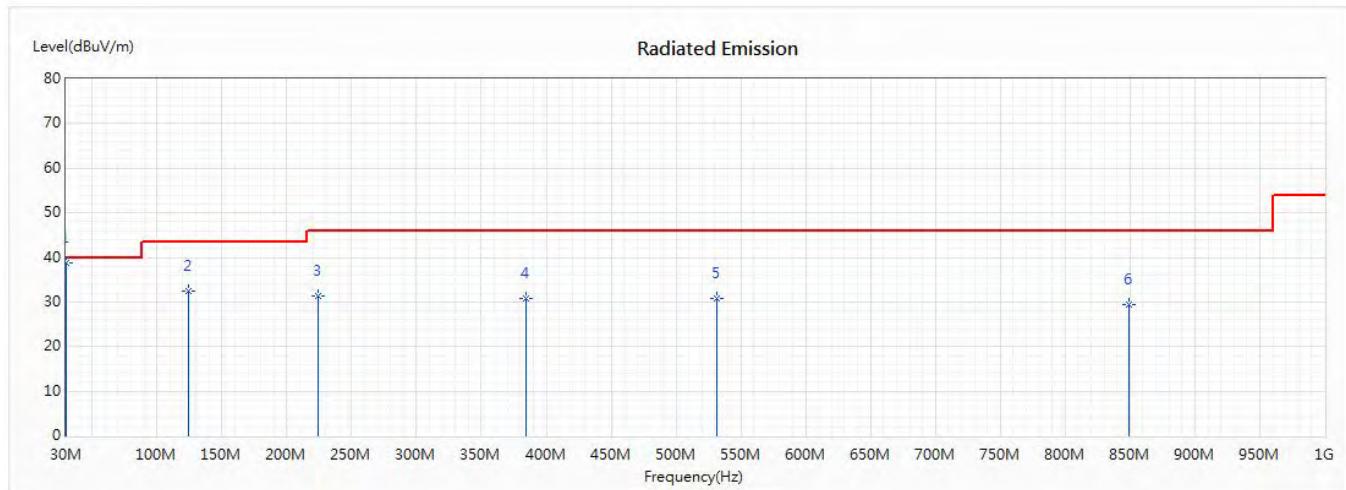


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	30	38.84	40.00	-1.16	42.18	-3.34	QP
2	124.188	32.50	43.50	-11.00	35.75	-3.25	QP
3	224	31.39	46.00	-14.61	34.46	-3.07	QP
4	384.261	30.81	46.00	-15.19	33.80	-2.99	QP
5	531.87	30.84	46.00	-15.16	33.76	-2.92	QP
6	849.58	29.53	46.00	-16.47	32.62	-3.09	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2440MHz) (POE Mode)
 Test Date : 2020/06/12

Horizontal

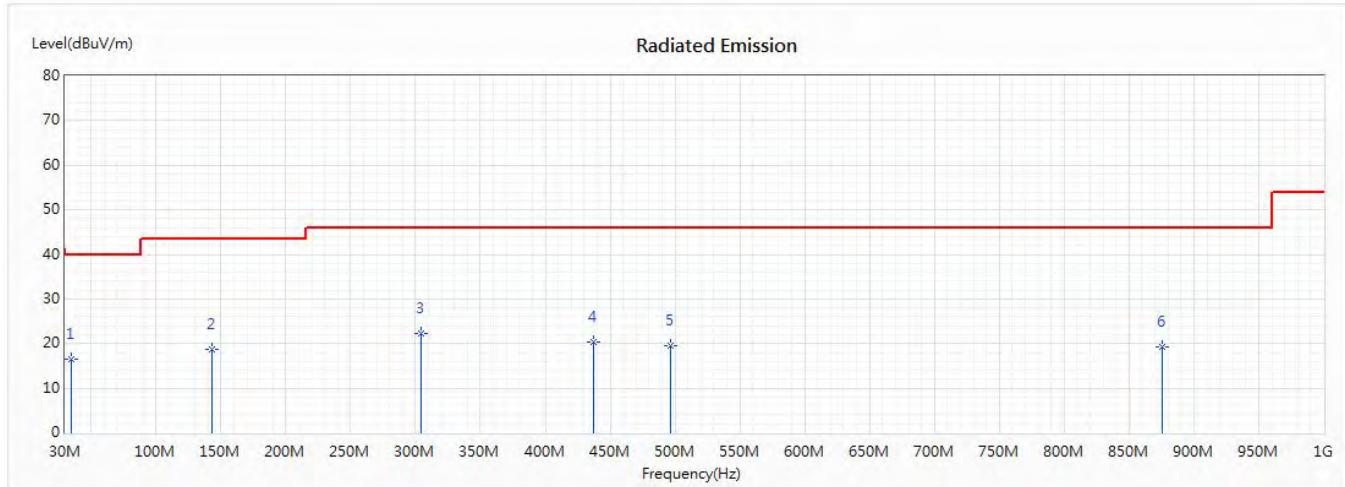


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	34.85	16.47	40.00	-23.53	28.02	-11.55	QP
2	143.49	18.72	43.50	-24.78	29.60	-10.88	QP
3	304.51	22.40	46.00	-23.60	31.57	-9.17	QP
4	437.4	20.29	46.00	-25.71	26.25	-5.96	QP
5	496.57	19.41	46.00	-26.59	23.88	-4.47	QP
6	875.84	19.29	46.00	-26.71	18.47	0.82	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2440MHz) (POE Mode)
 Test Date : 2020/06/12

Vertical

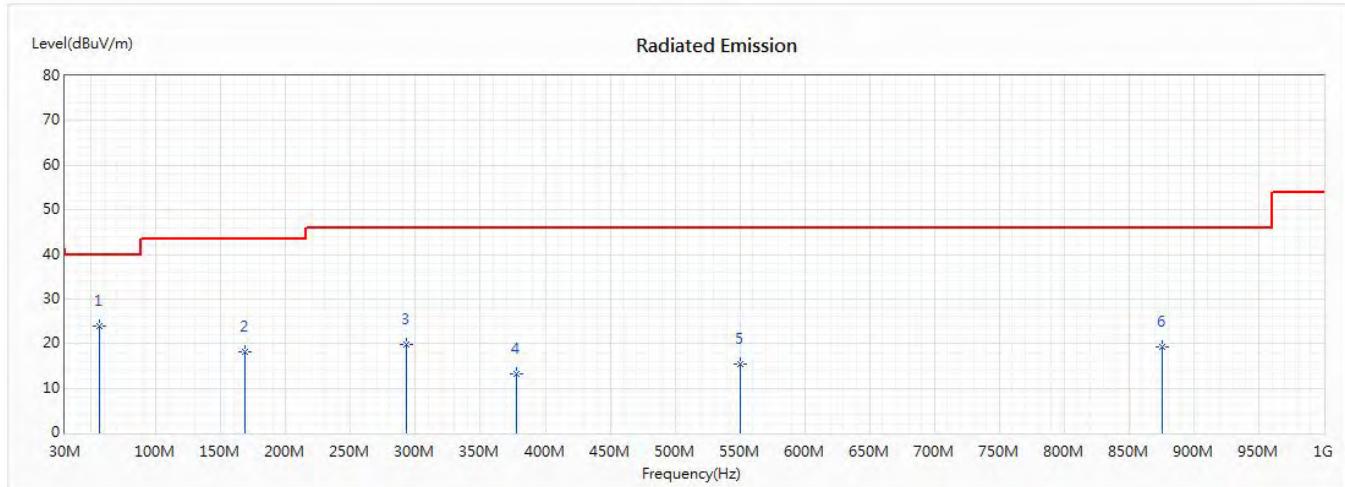


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	56.19	23.80	40.00	-16.20	34.39	-10.59	QP
2	168.71	18.04	43.50	-25.46	28.57	-10.53	QP
3	292.87	19.83	46.00	-26.17	29.42	-9.59	QP
4	378.23	13.21	46.00	-32.79	20.52	-7.31	QP
5	549.92	15.38	46.00	-30.62	19.12	-3.74	QP
6	875.84	19.17	46.00	-26.83	18.35	0.82	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna Conducted Test

5.1. Test Setup

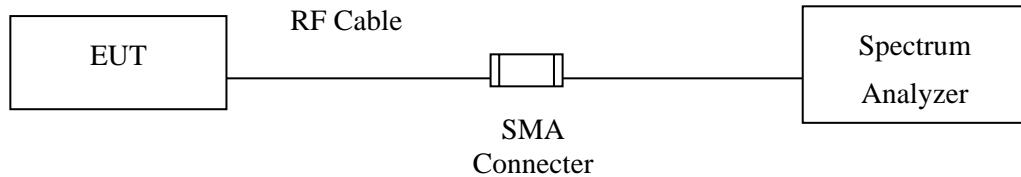

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

The EUT was tested according to C63.10:2013 Section 11.11 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.4. Test Result of RF Antenna Conducted Test

Product : LV55
 Test Item : RF Antenna Conducted Test
 Test Mode : Mode 1: Transmit - BLE_1Mbps
 Test Date : 2020/06/10

Figure Channel 00:

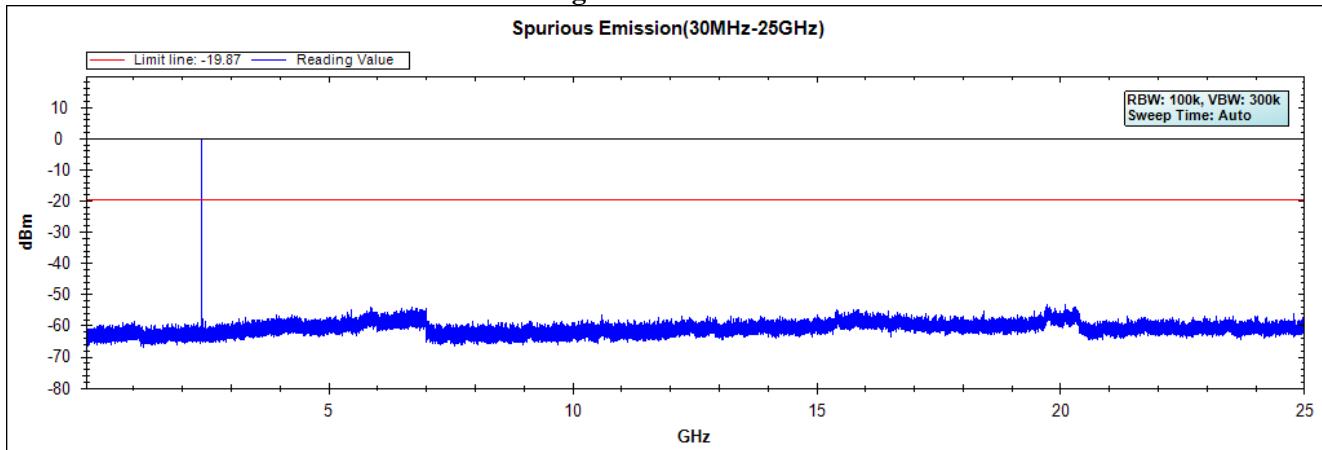


Figure Channel 19:


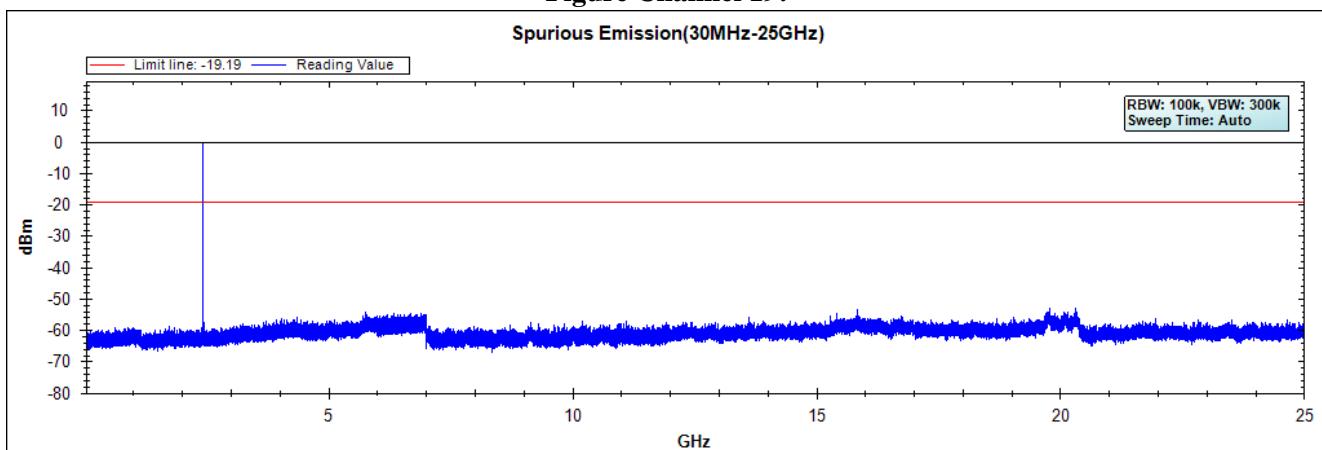


Figure Channel 39:

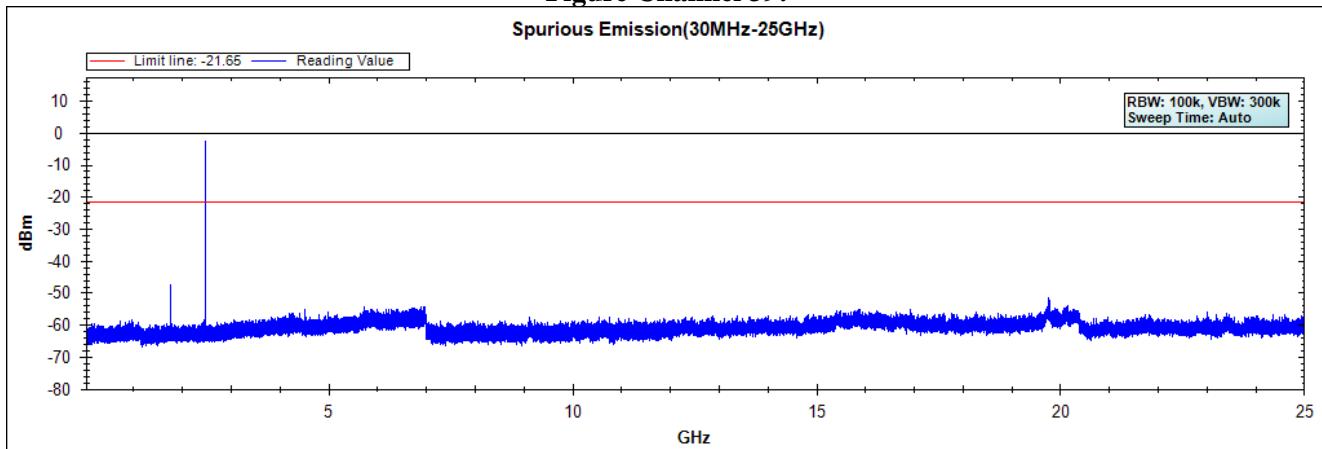

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : LV55
Test Item : RF Antenna Conducted Test
Test Mode : Mode 2: Transmit - BLE_2Mbps
Test Date : 2020/06/10

Figure Channel 00:

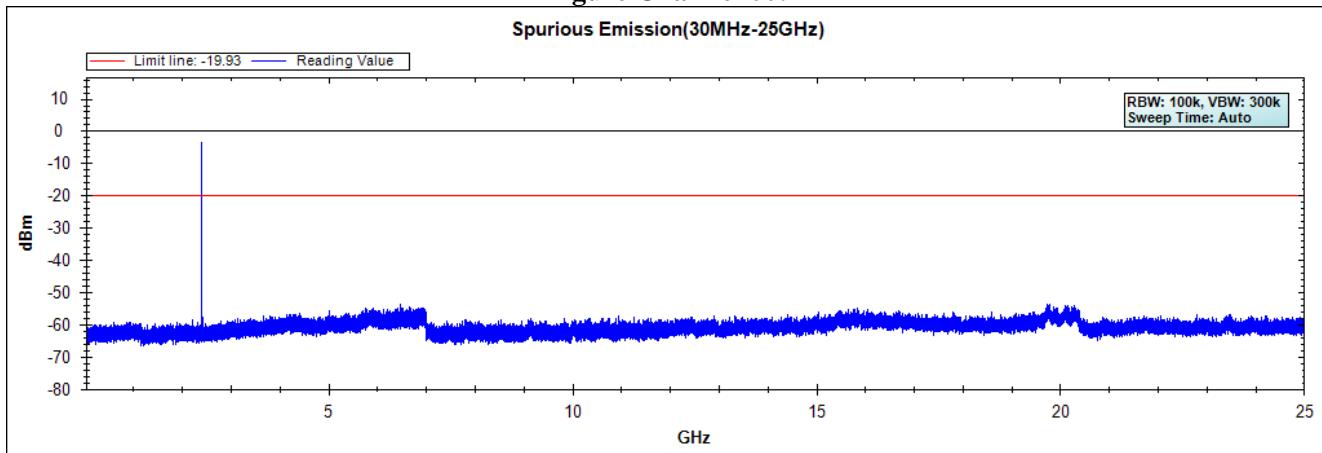


Figure Channel 19:


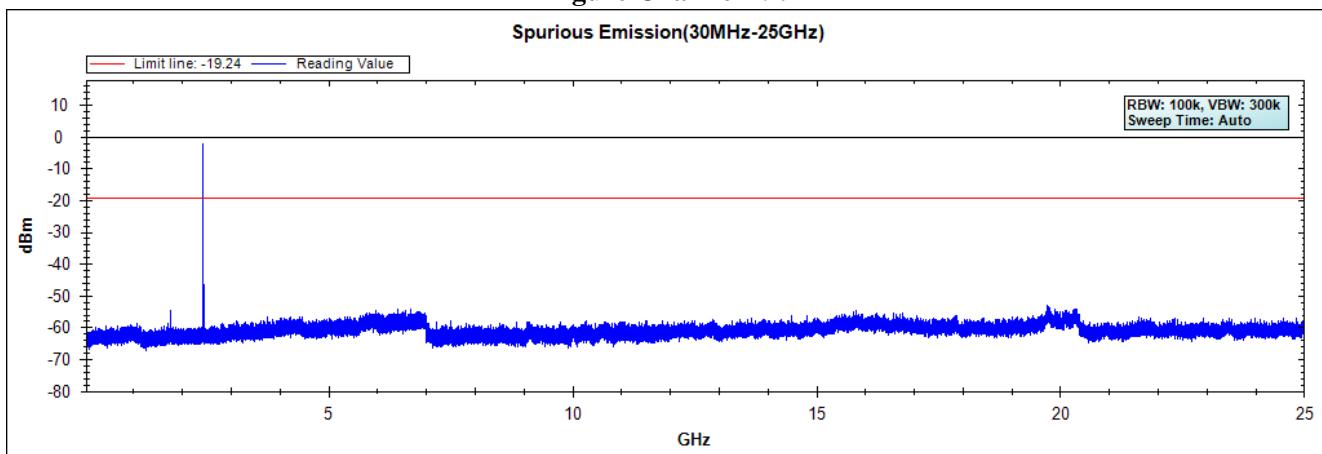


Figure Channel 39:

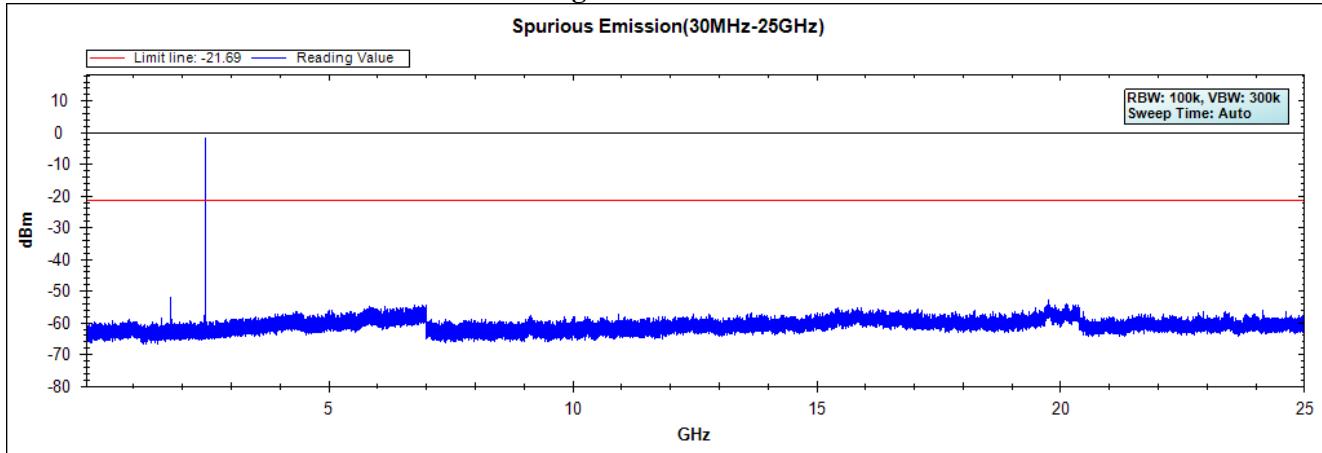


Note: The above test pattern is synthesized by multiple of the frequency range.


6. Band Edge

6.1. Test Setup

RF Conducted Measurement

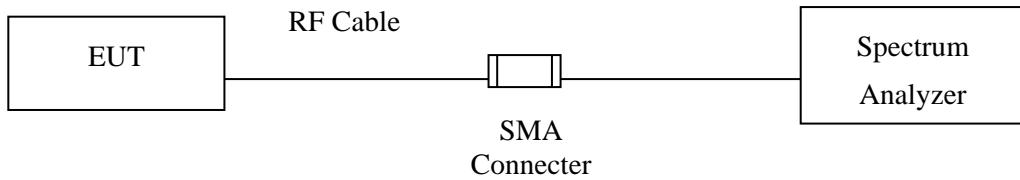

RF Radiated Measurement:

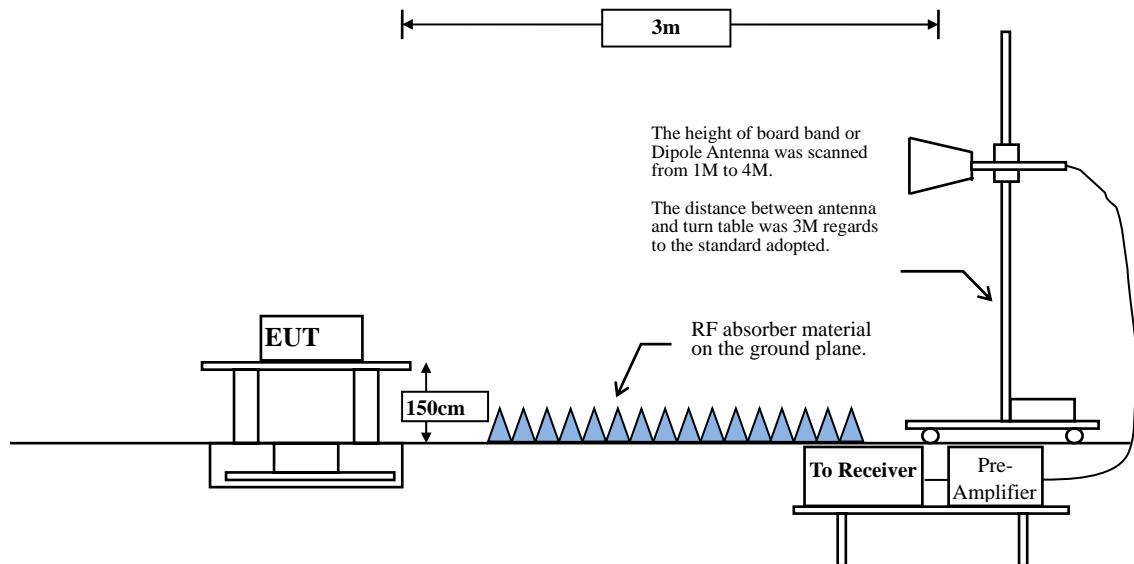

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

VBW $\geq 3 \times$ RBW.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$

VBW $\geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE_1Mbps	87.86	2.2029	454	500
BLE_2Mbps	60.07	1.1231	890	1k

Note: Duty Cycle Refer to Section 9

6.4. Test Result of Band Edge

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2402MHz)
 Test Date : 2020/06/12

Horizontal

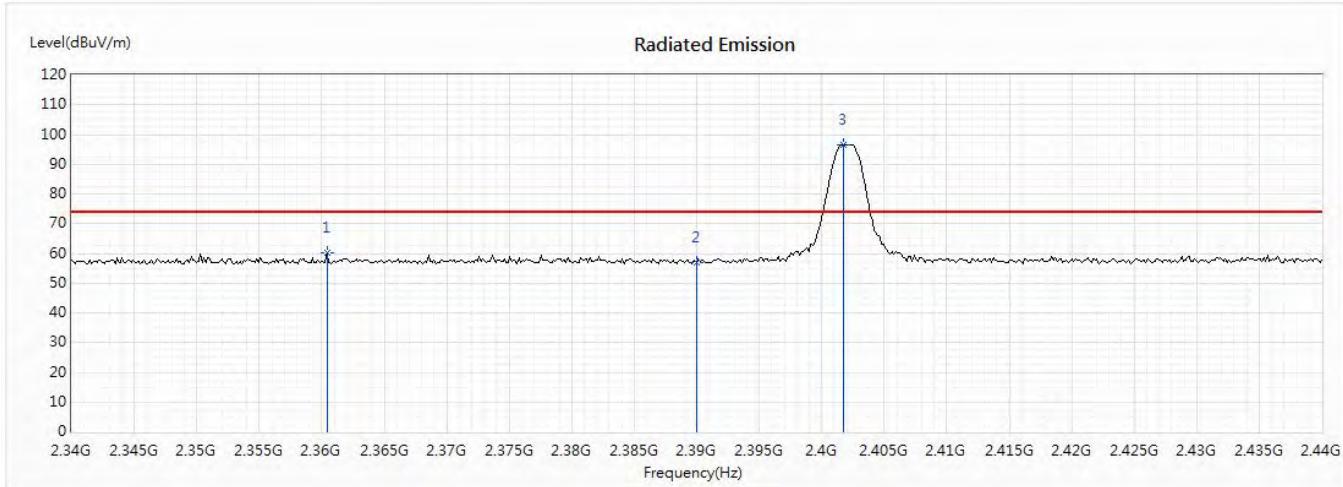


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2360.435	60.17	74.00	-13.83	49.35	10.82	PK
2	2390	56.94	74.00	-17.06	45.95	10.99	PK
3	2401.739	96.58	--	--	85.53	11.05	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2402MHz)
 Test Date : 2020/06/12

Horizontal

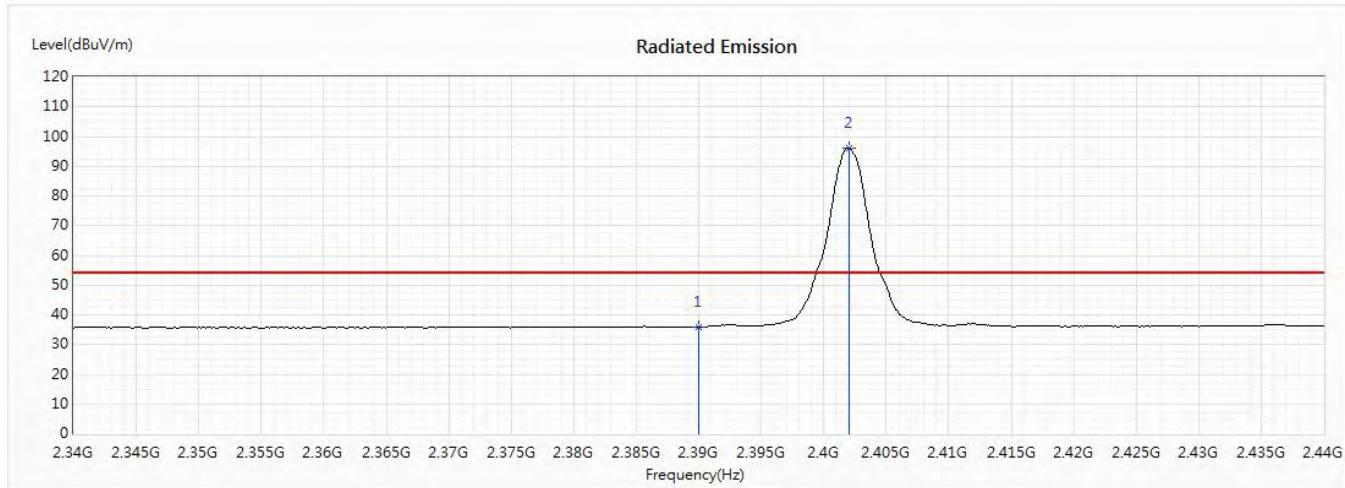


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2390	35.91	54.00	-18.09	24.92	10.99	AV
2	2402.029	96.09	--	--	85.03	11.06	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2402MHz)
 Test Date : 2020/06/12

Vertical

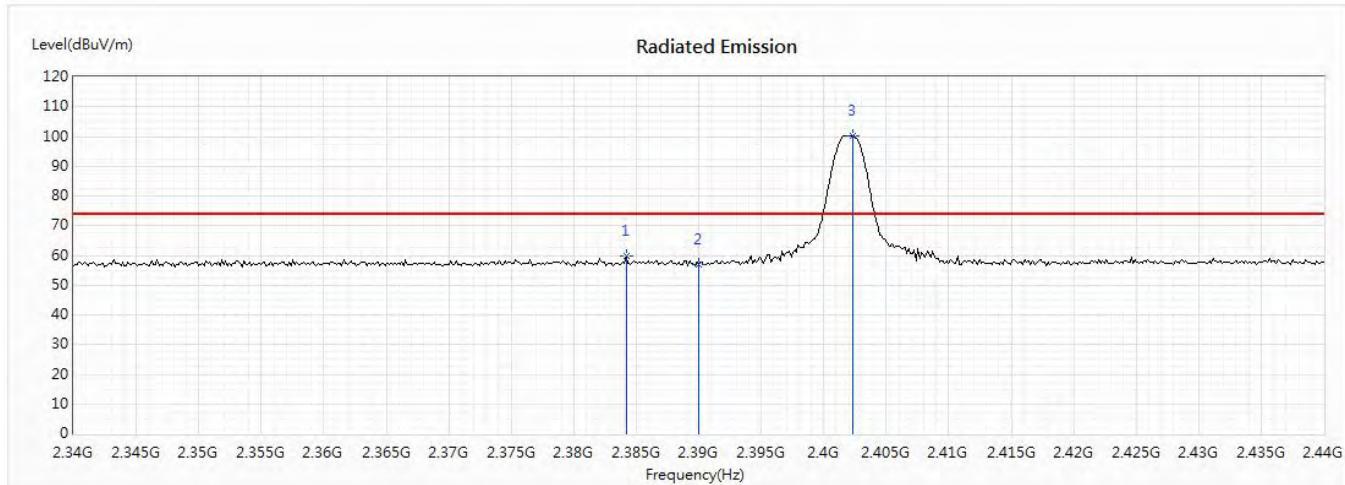


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2384.203	59.89	74.00	-14.11	48.92	10.97	PK
2	2390	56.87	74.00	-17.13	45.88	10.99	PK
3	2402.319	100.24	--	--	89.18	11.06	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2402MHz)
 Test Date : 2020/06/12

Vertical

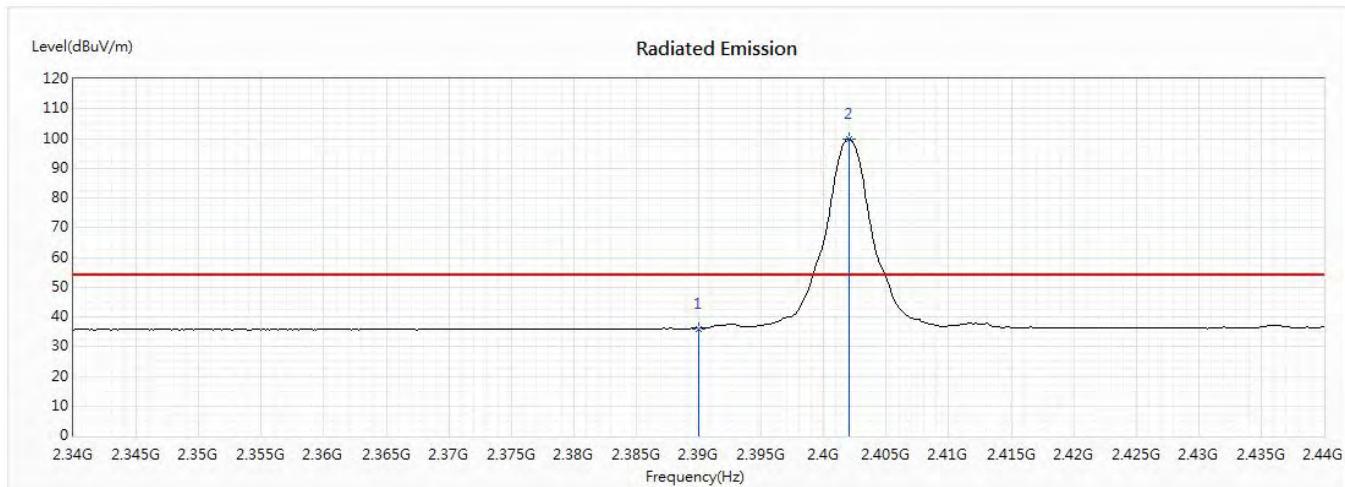


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2390	36.05	54.00	-17.95	25.06	10.99	AV
2	2402.029	99.70	--	--	88.64	11.06	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2480MHz)
 Test Date : 2020/06/12

Horizontal

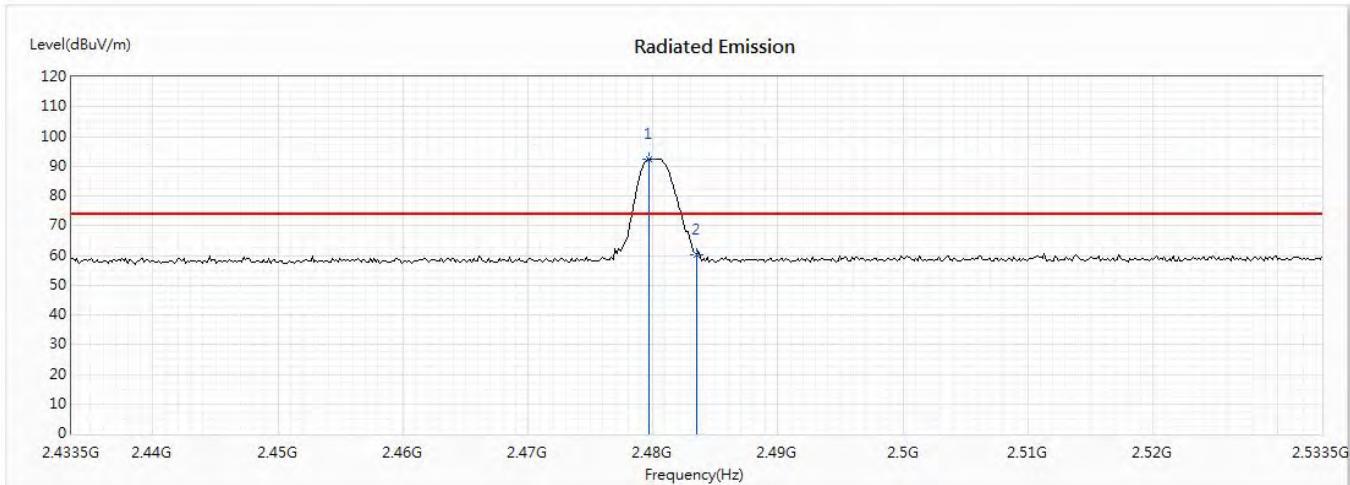


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2479.732	92.53	--	--	80.84	11.69	PK
2	2483.5	60.32	74.00	-13.68	48.61	11.71	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2480MHz)
 Test Date : 2020/06/12

Horizontal

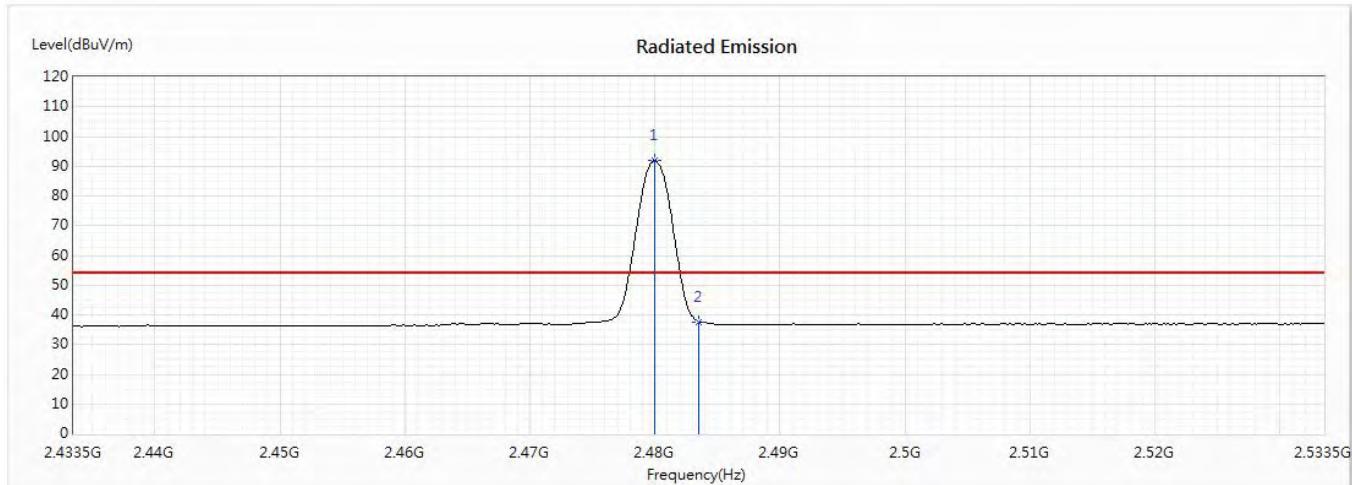


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2480.022	91.79	--	--	80.10	11.69	AV
2	2483.5	37.72	54.00	-16.28	26.01	11.71	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2480MHz)
 Test Date : 2020/06/12

Vertical

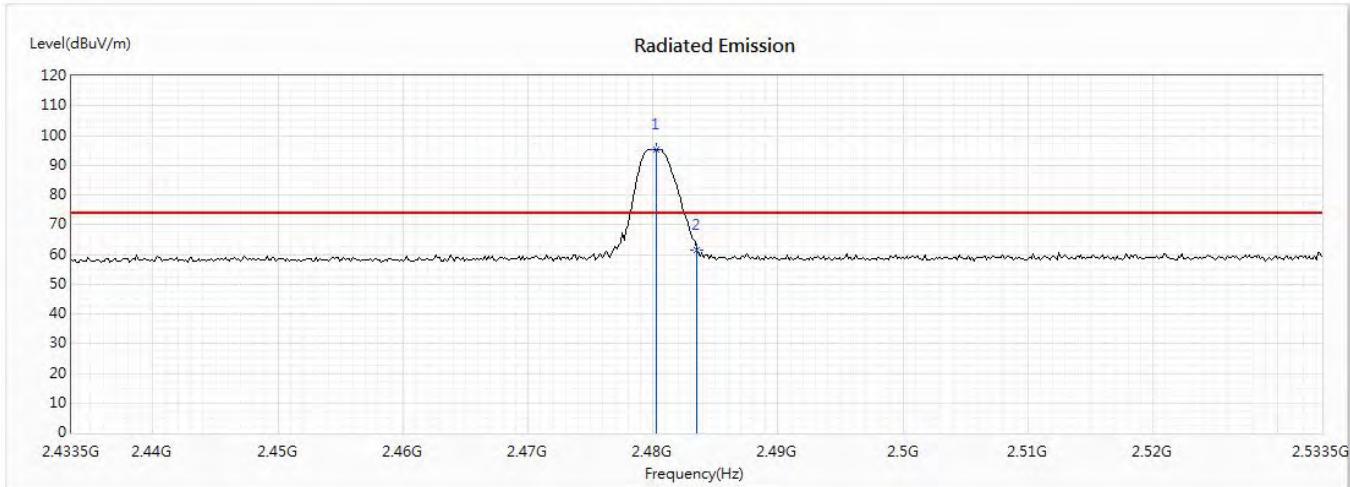


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2480.312	95.29	--	--	83.60	11.69	PK
2	2483.5	61.59	74.00	-12.41	49.88	11.71	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2480MHz)
 Test Date : 2020/06/12

Vertical

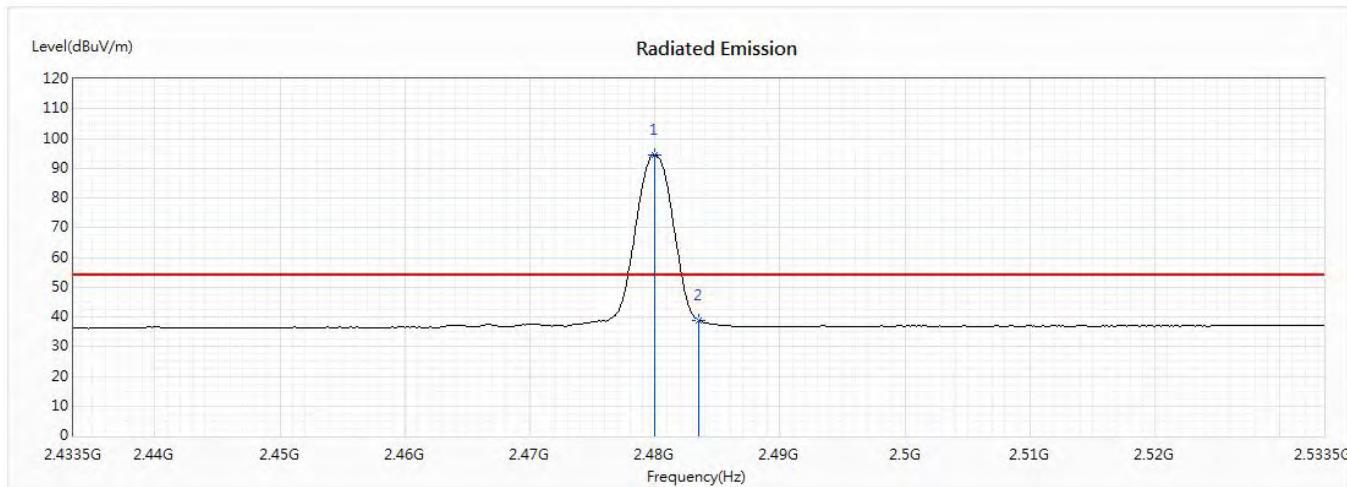


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2480.022	94.58	--	--	82.89	11.69	AV
2	2483.5	38.80	54.00	-15.20	27.09	11.71	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2402MHz)
 Test Date : 2020/06/12

Horizontal

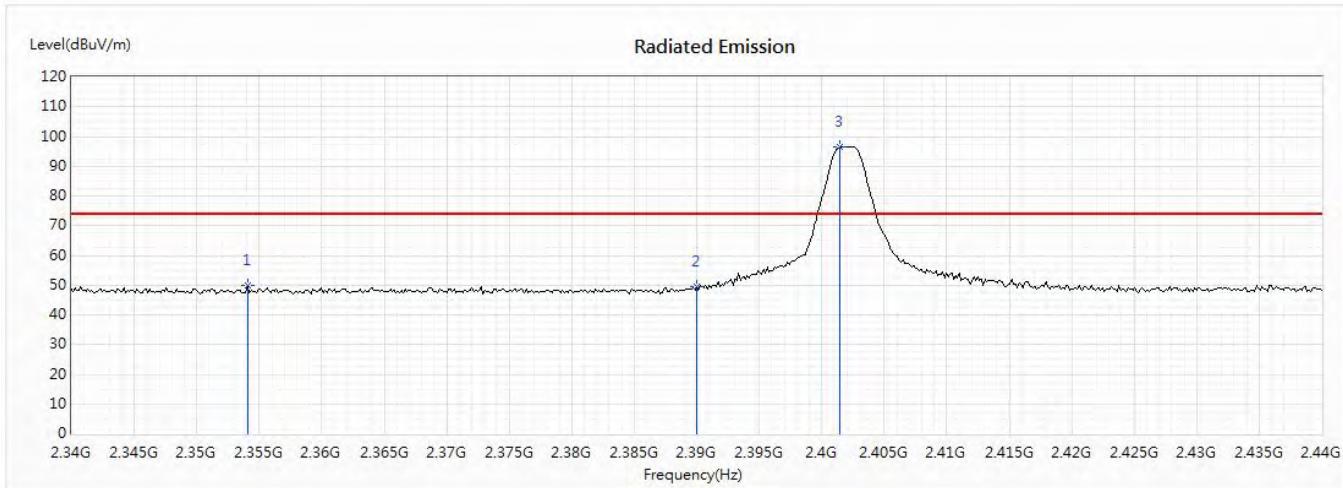


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2354.058	49.79	74.00	-24.21	38.99	10.80	PK
2	2390	49.58	74.00	-24.42	38.59	10.99	PK
3	2401.449	96.46	--	--	85.41	11.05	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2402MHz)
 Test Date : 2020/06/12

Horizontal

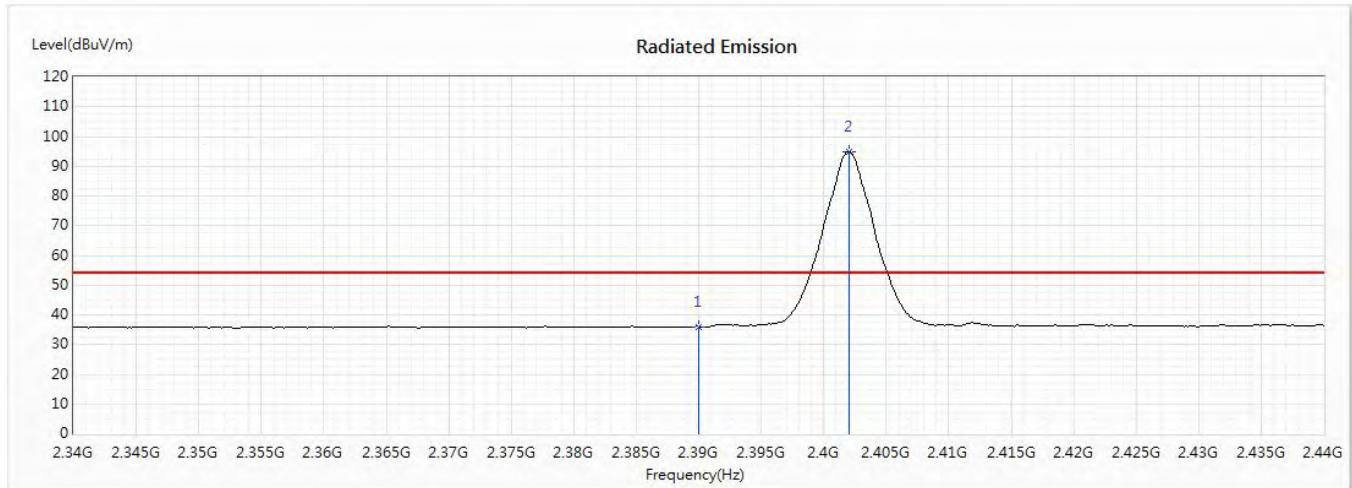


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2390	36.07	54.00	-17.93	25.08	10.99	AV
2	2402.029	94.76	--	--	83.70	11.06	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2402MHz)
 Test Date : 2020/06/12

Vertical

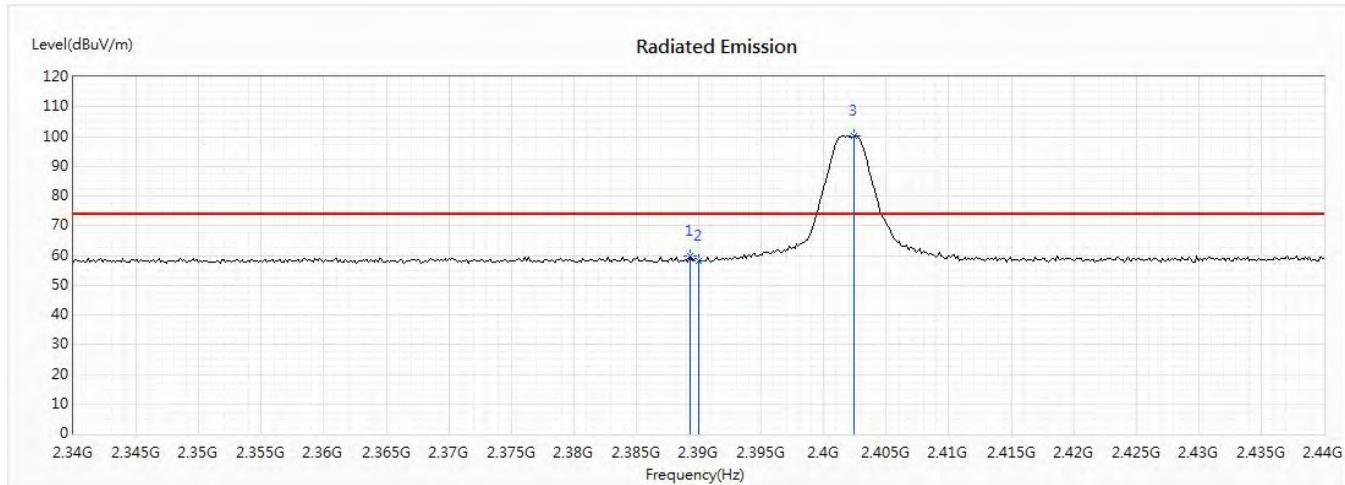


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2389.275	59.70	74.00	-14.30	48.71	10.99	PK
2	2390	58.32	74.00	-15.68	47.33	10.99	PK
3	2402.464	100.10	--	--	89.04	11.06	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2402MHz)
 Test Date : 2020/06/12

Vertical

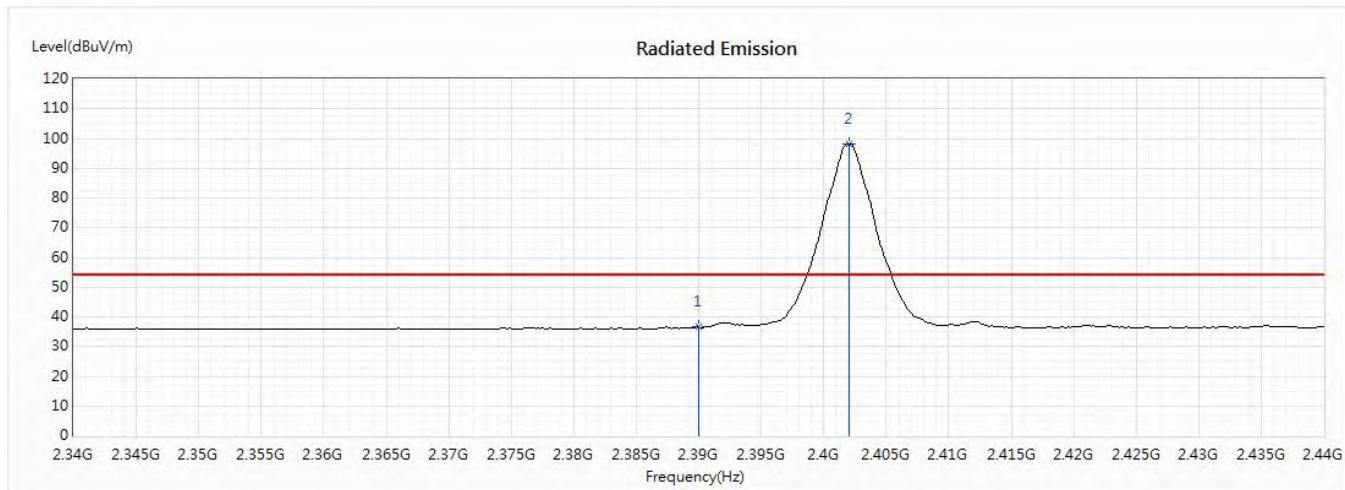


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2390	36.59	54.00	-17.41	25.60	10.99	AV
2	2402.029	98.29	--	--	87.23	11.06	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2480MHz)
 Test Date : 2020/06/12

Horizontal

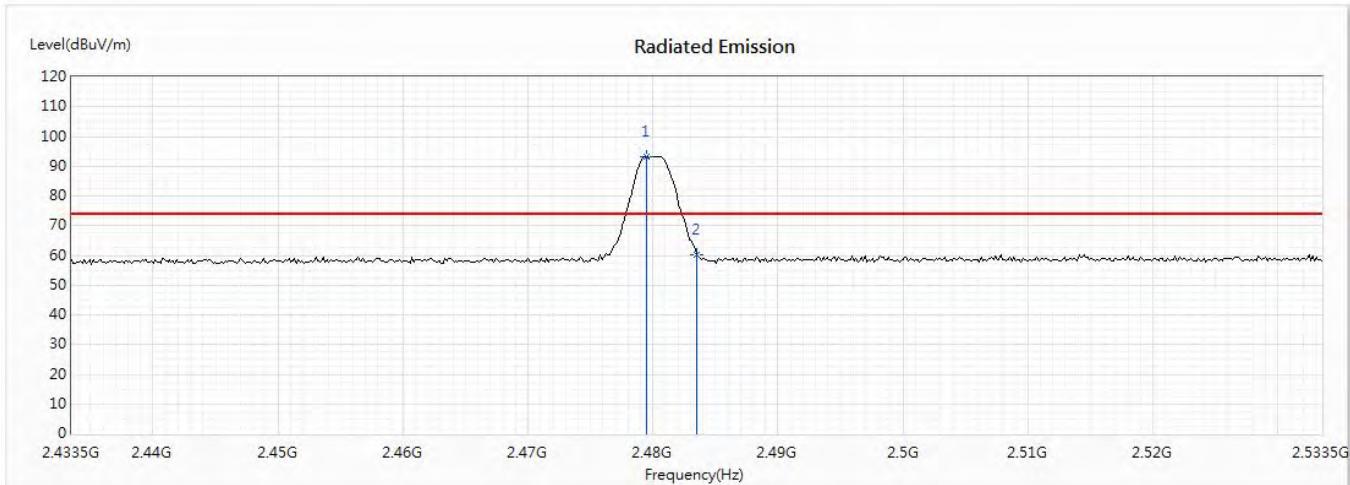


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2479.442	93.24	--	--	81.55	11.69	PK
2	2483.5	60.18	74.00	-13.82	48.47	11.71	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2480MHz)
 Test Date : 2020/06/12

Horizontal

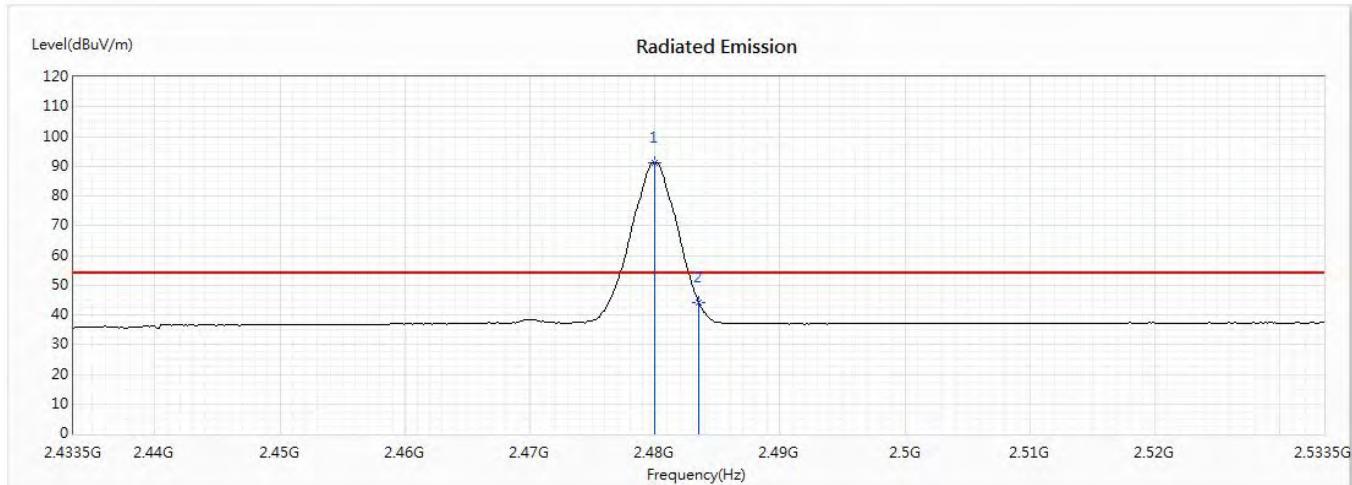


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2480.022	91.31	--	--	79.62	11.69	AV
2	2483.5	44.30	54.00	-9.70	32.59	11.71	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2480MHz)
 Test Date : 2020/06/12

Vertical

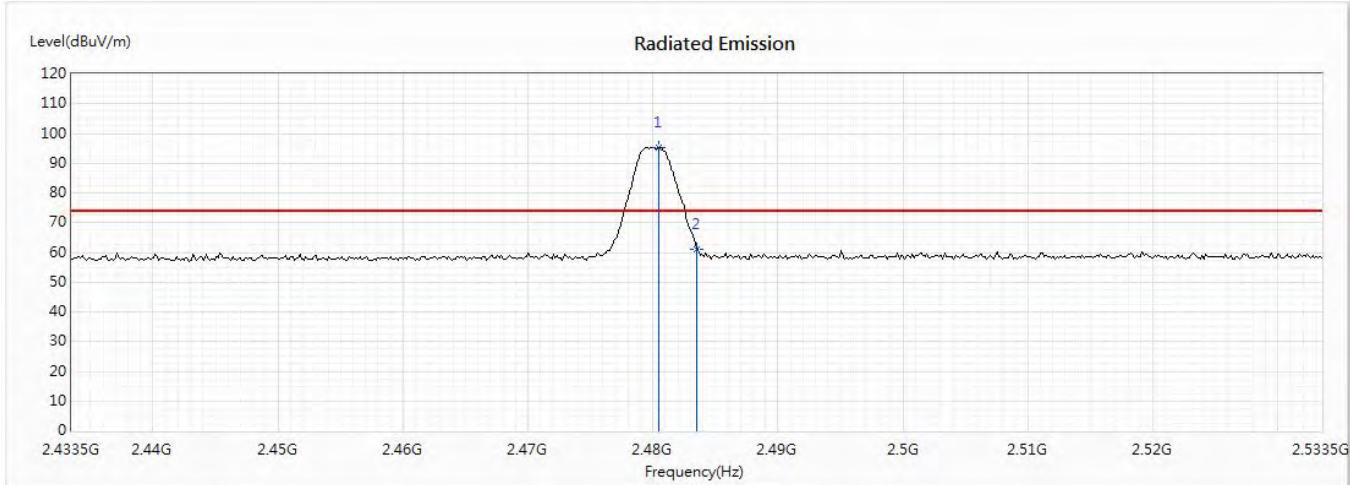


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2480.457	95.14	--	--	83.45	11.69	PK
2	2483.5	61.07	74.00	-12.93	49.36	11.71	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2480MHz)
 Test Date : 2020/06/12

Vertical

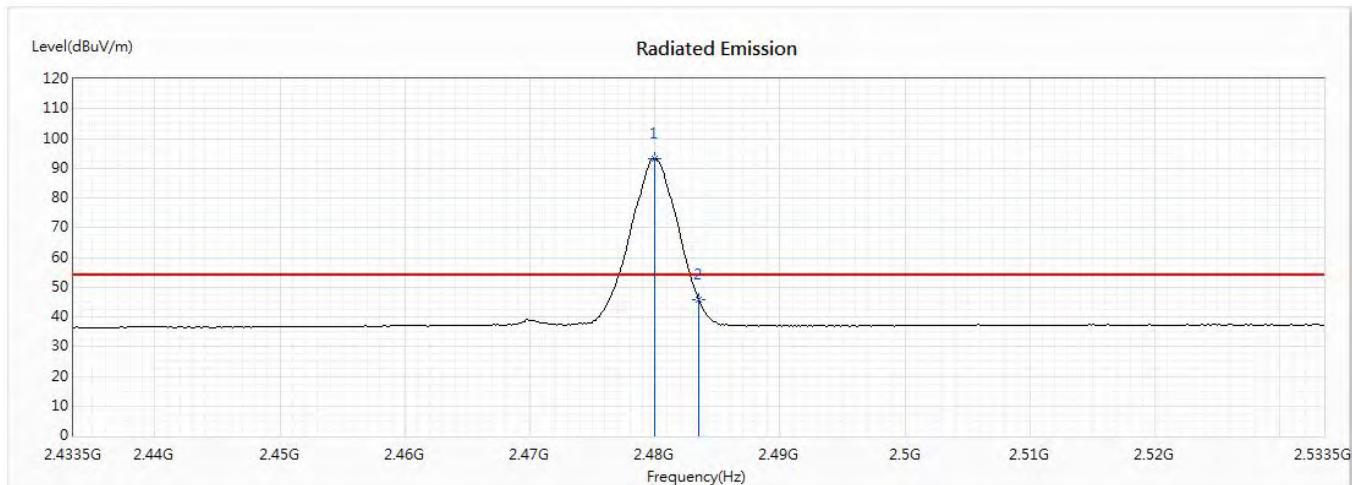


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2480.022	93.21	--	--	81.52	11.69	AV
2	2483.5	45.85	54.00	-8.15	34.14	11.71	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
Test Item : Band Edge
Test Mode : Mode 1: Transmit - BLE_1Mbps (2402MHz)


Measurement Level	Result
Δ (dB)	
> 20	PASS

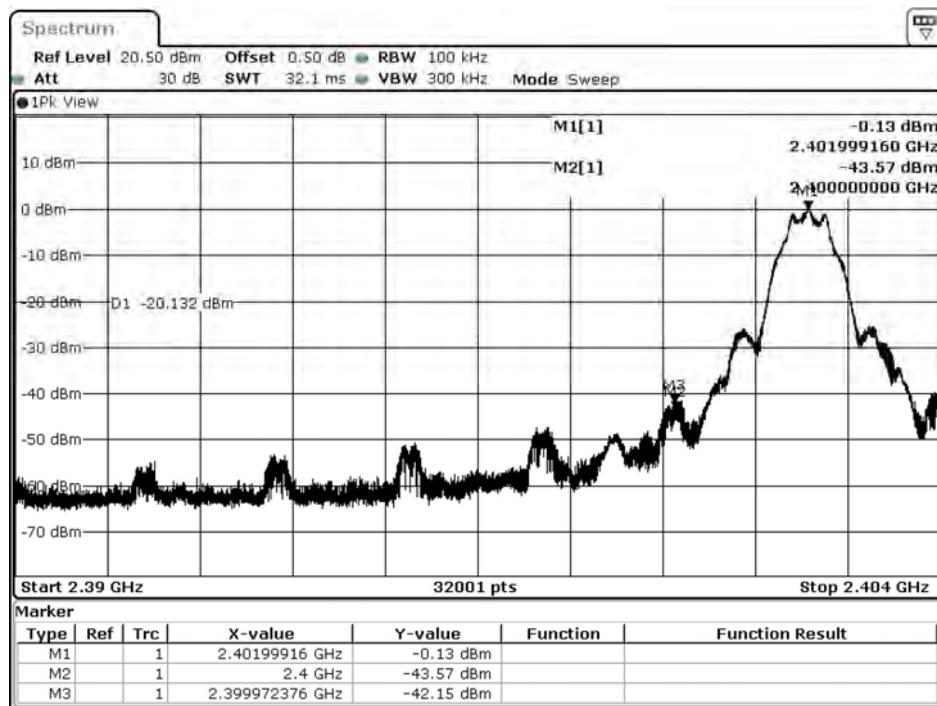

Date: 16.JUN.2020 11:08:52

Product : LV55
Test Item : Band Edge
Test Mode : Mode 1: Transmit - BLE_1Mbps (2480MHz)

Measurement Level	Result
Δ (dB)	
> 20	PASS

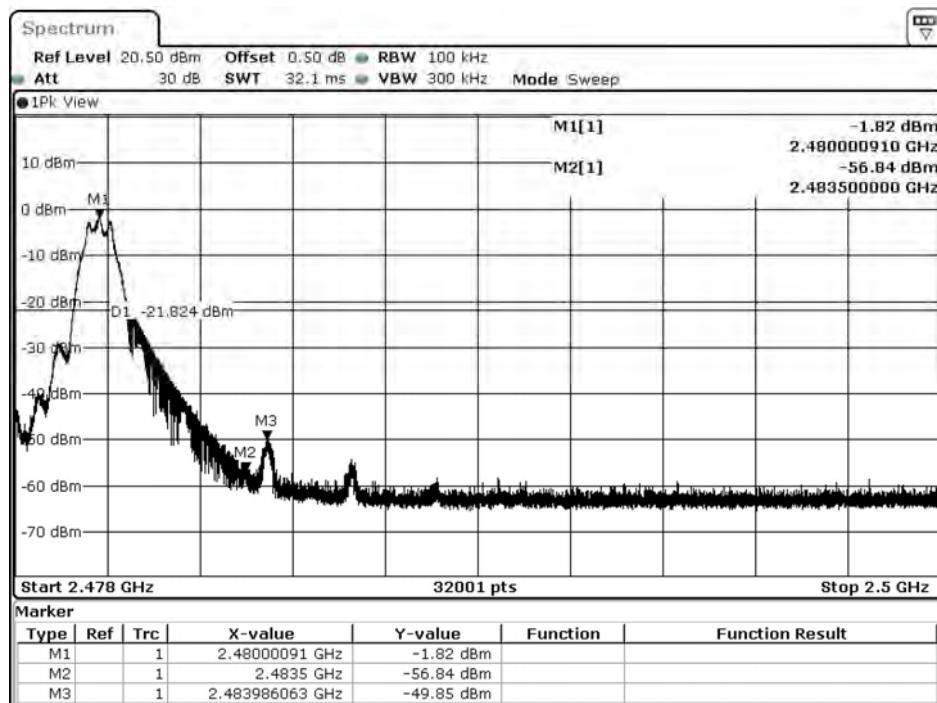

Date: 16.JUN.2020 11:12:12

Product : LV55
Test Item : Band Edge
Test Mode : Mode 2: Transmit - BLE_2Mbps (2402MHz)


Measurement Level	Result
Δ (dB)	
> 20	PASS



Date: 16.JUN.2020 11:11:02

Product : LV55
Test Item : Band Edge
Test Mode : Mode 2: Transmit - BLE_2Mbps (2480MHz)


Measurement Level	Result
Δ (dB)	
> 20	PASS

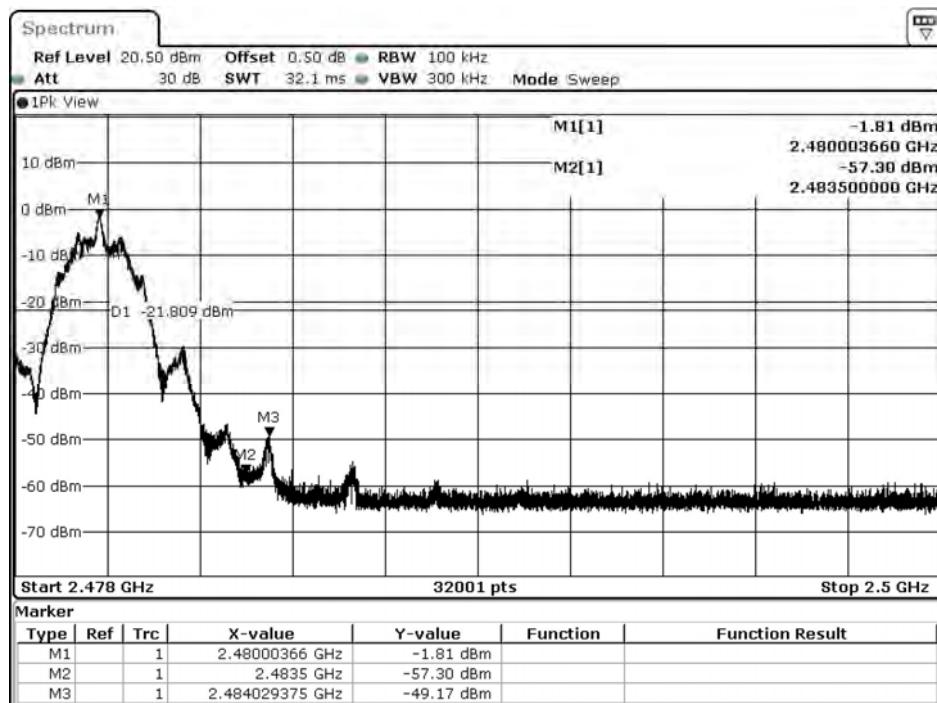

Date: 16.JUN.2020 11:14:58

7. 6dB Bandwidth

7.1. Test Setup

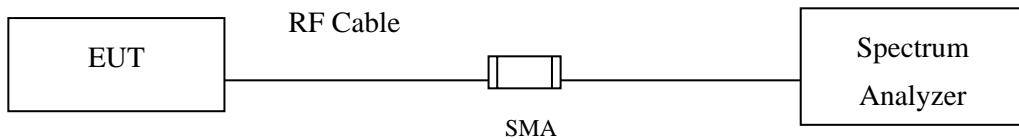

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure


The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 11.8 for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Result of 6dB Bandwidth

Product : LV55
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	710	>500	Pass

Figure Channel 00:

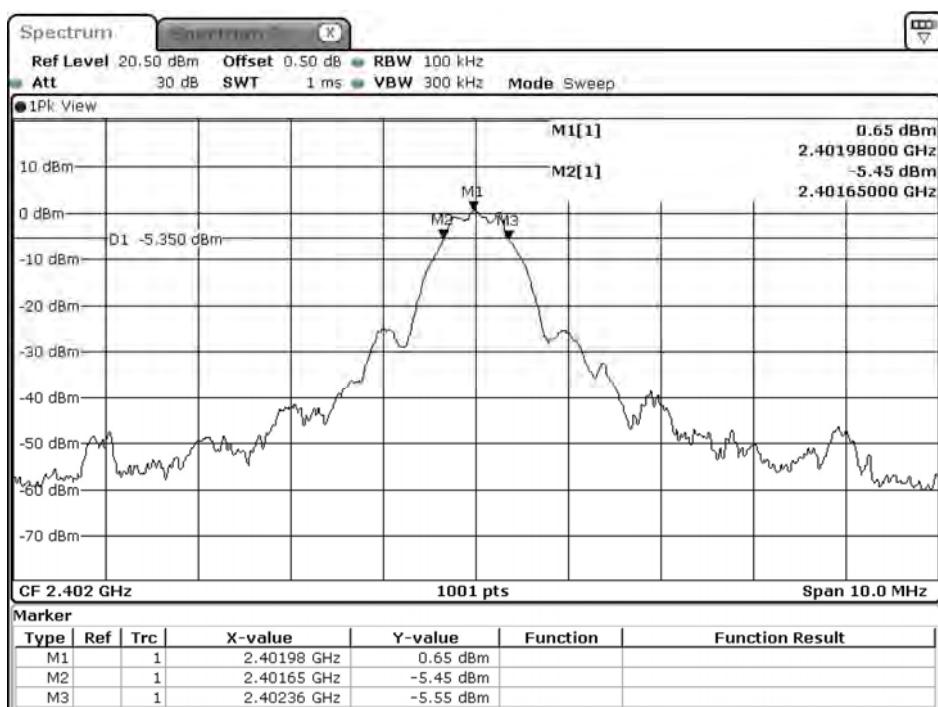


Date: 10.JUN.2020 15:14:18

Product : LV55
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
19	2440	750	>500	Pass

Figure Channel 19:

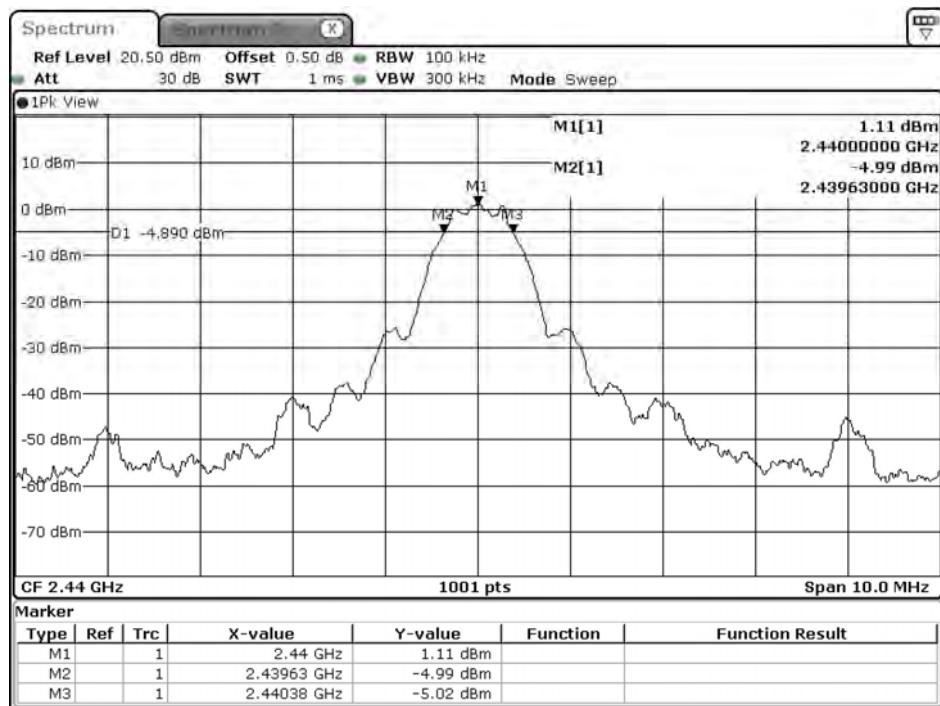


Date: 10.JUN.2020 15:16:43

Product : LV55
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 1: Transmit - BLE_1Mbps (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2480	750	>500	Pass

Figure Channel 39:

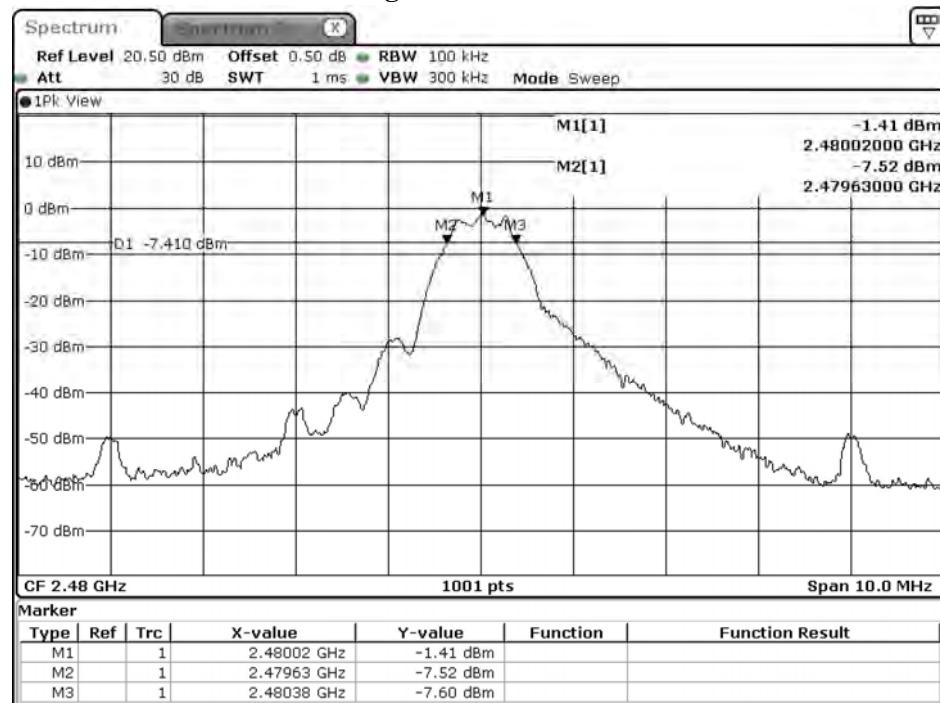

Date: 10.JUN.2020 15:19:06

Product : LV55
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1160	>500	Pass

Figure Channel 00:




Date: 10.JUN.2020 15:25:16

Product : LV55
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
19	2440	1180	>500	Pass

Figure Channel 19:

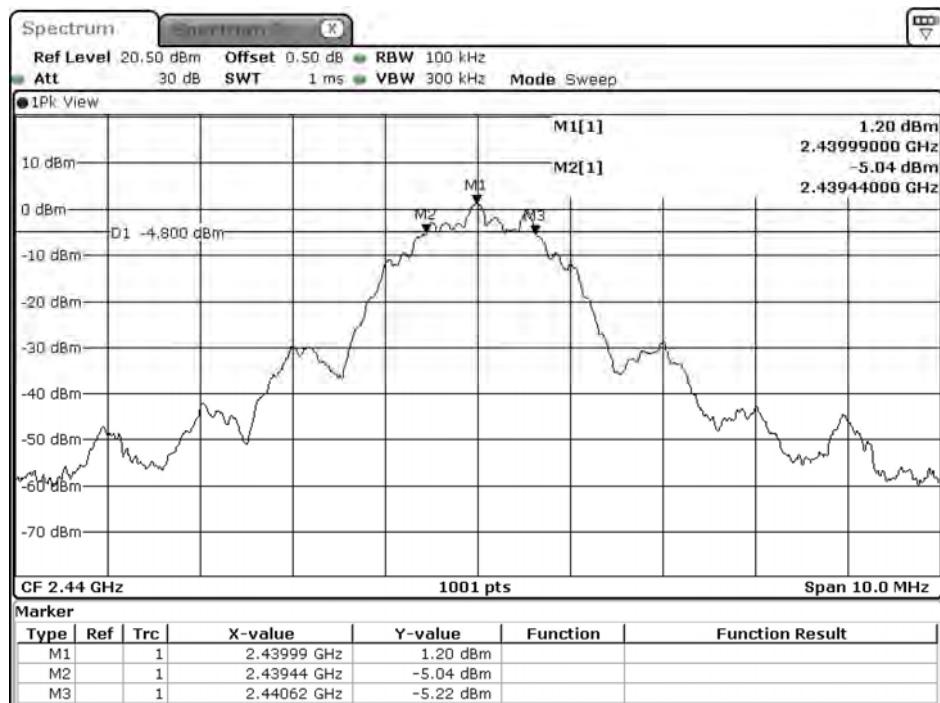


Date: 10.JUN.2020 15:27:25

Product : LV55
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 2: Transmit - BLE_2Mbps (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2480	1210	>500	Pass


Figure Channel 39:

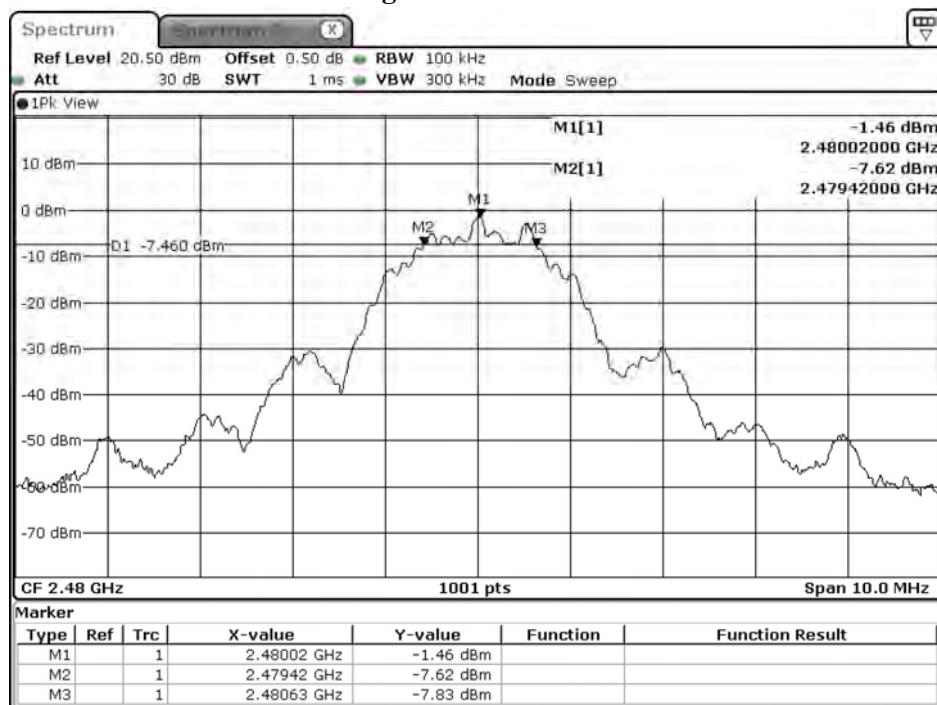

Date: 10.JUN.2020 15:29:43

8. Power Density

8.1. Test Setup

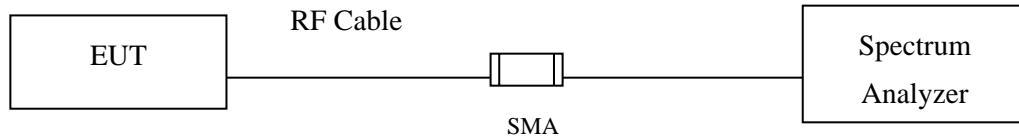

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


The maximum power spectral density using C63.10 Section 11.10.2 Method PKPSD (peak PSD)

8.4. Test Result of Power Density

Product : LV55
Test Item : Power Density Data
Test Mode : Mode 1: Transmit - BLE_1Mbps (2402MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
00	2402	0.13	≤8dBm	Pass

Figure Channel 00:

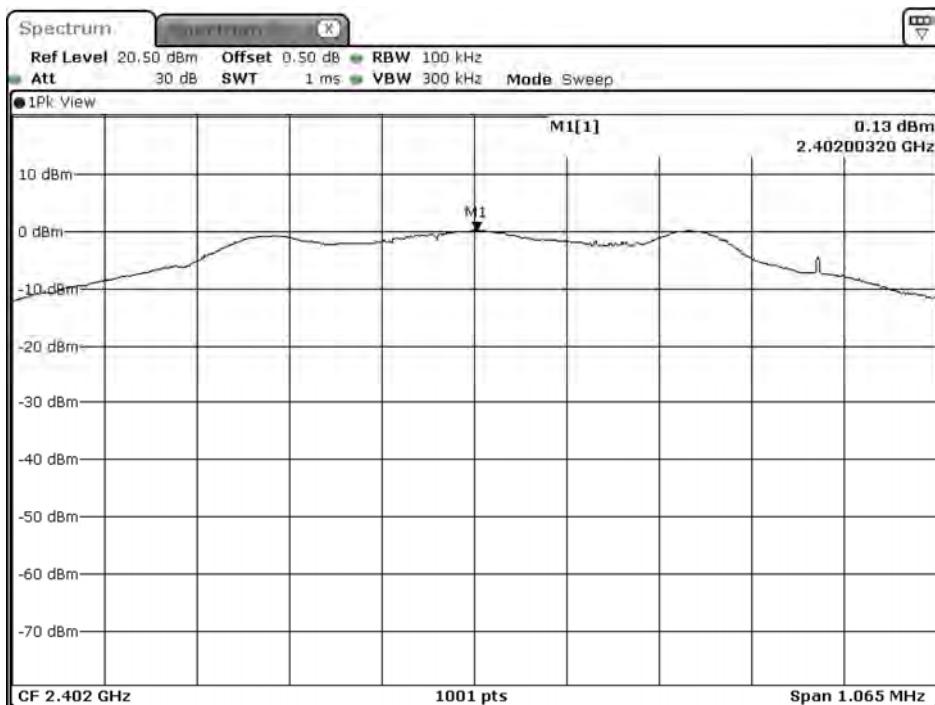


Date: 10.JUN.2020 15:14:40

Product : LV55
Test Item : Power Density Data
Test Mode : Mode 1: Transmit - BLE_1Mbps (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
19	2440	0.81	≤8dBm	Pass


Figure Channel 19:

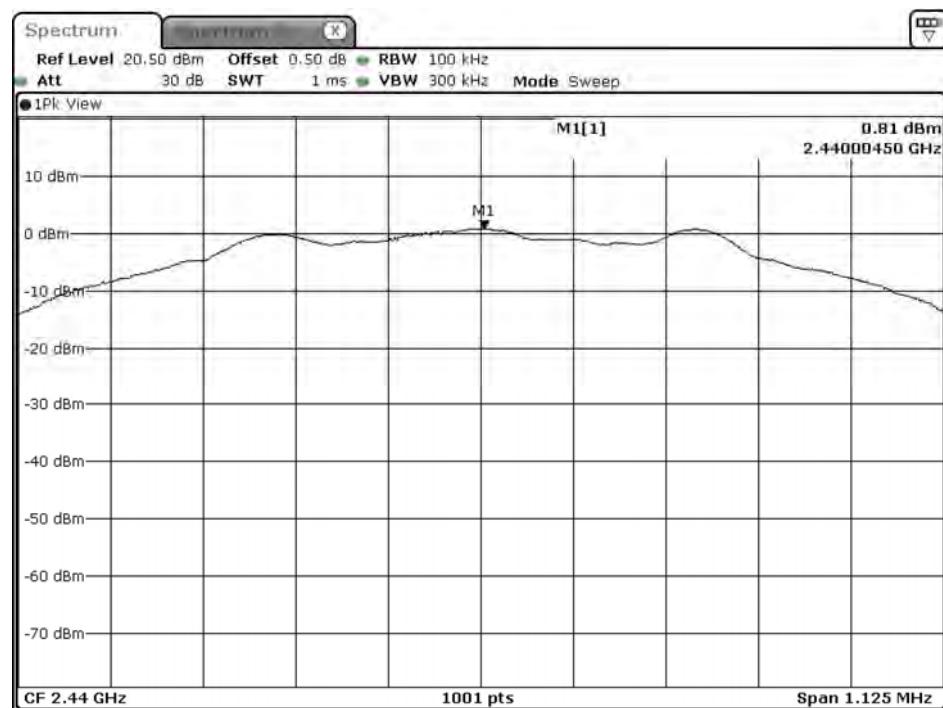

Product : LV55
Test Item : Power Density Data
Test Mode : Mode 1: Transmit - BLE_1Mbps (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
39	2480	-1.65	≤8dBm	Pass


Figure Channel 39:

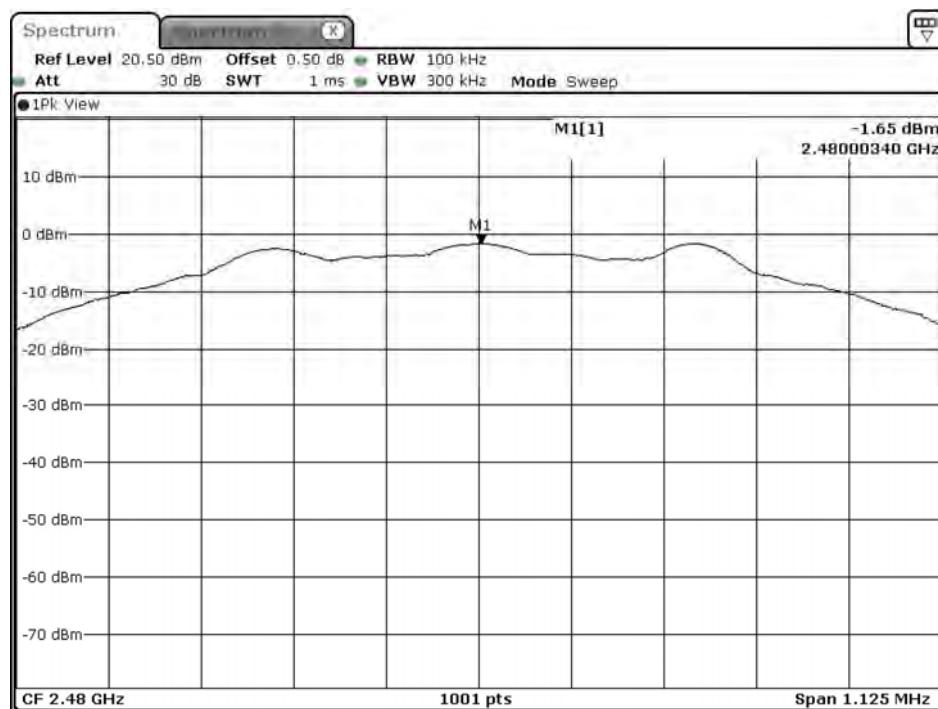

Product : LV55
Test Item : Power Density Data
Test Mode : Mode 2: Transmit - BLE_2Mbps (2402MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
00	2402	0.07	≤8dBm	Pass


Figure Channel 00:

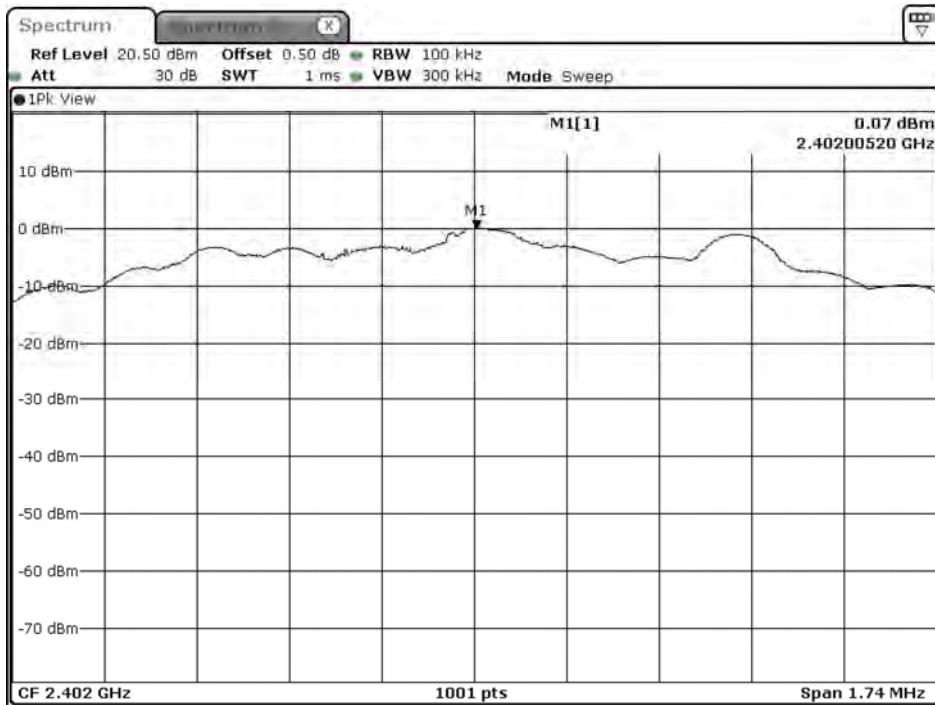

Product : LV55
Test Item : Power Density Data
Test Mode : Mode 2: Transmit - BLE_2Mbps (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
19	2440	0.76	≤8dBm	Pass

Figure Channel 19:

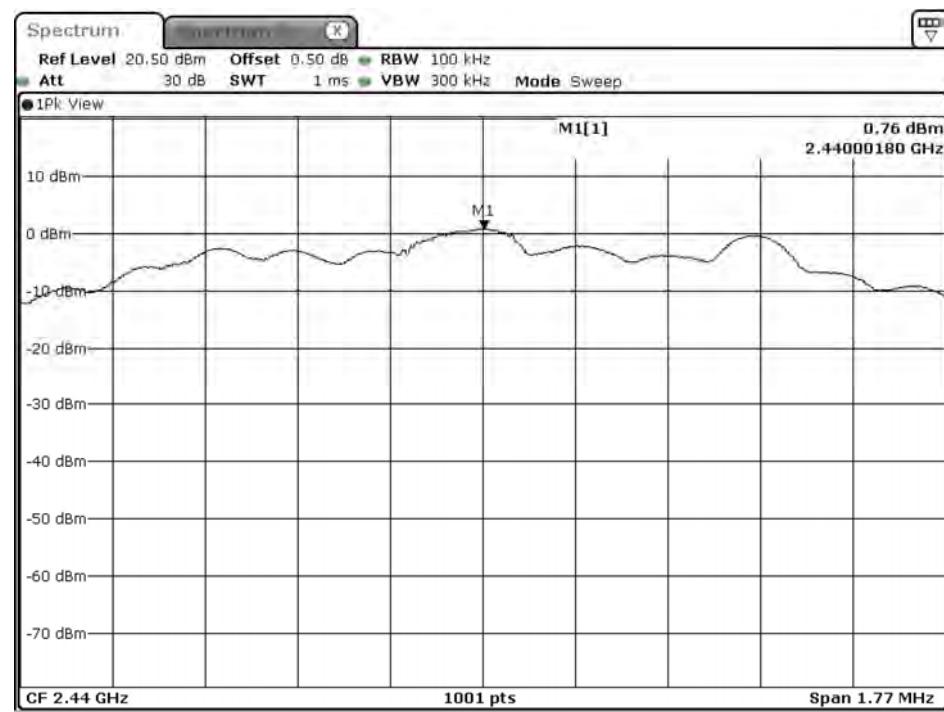


Date: 10.JUN.2020 15:27:48

Product : LV55
Test Item : Power Density Data
Test Mode : Mode 2: Transmit - BLE_2Mbps (2480MHz)


Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
39	2480	-1.69	≤8dBm	Pass

Figure Channel 39:

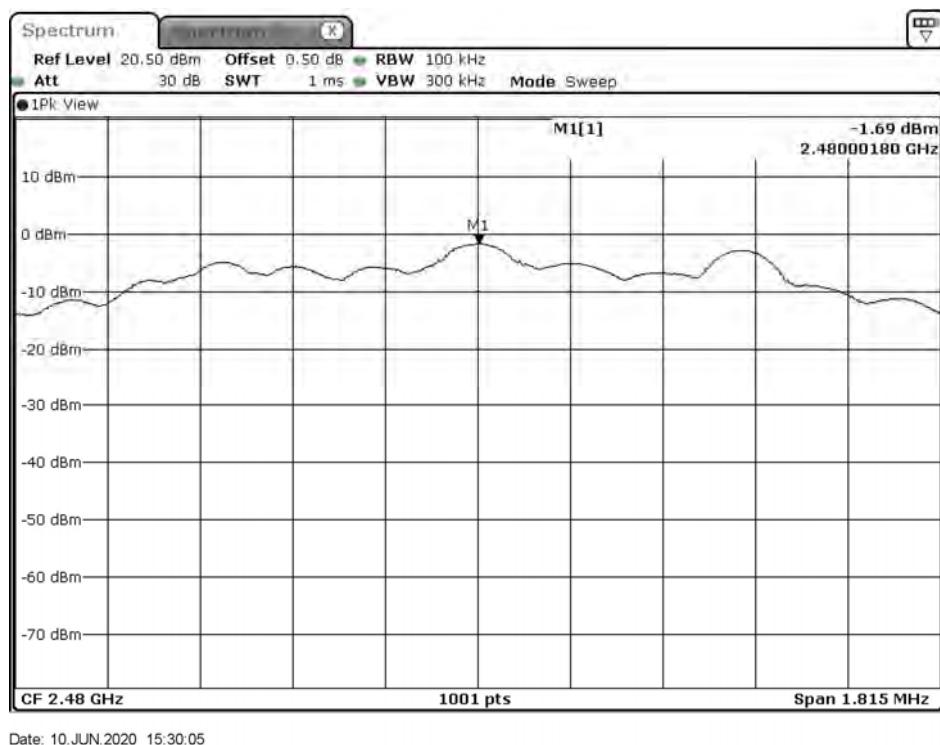

9. Duty Cycle

9.1. Test Setup

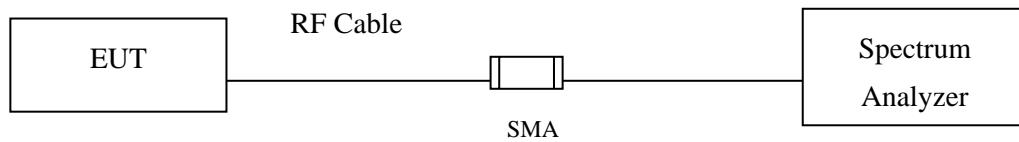

9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

9.3. Test Result of Duty Cycle

Product : LV55
 Test Item : Duty Cycle
 Test Mode : Mode 1: Transmit - BLE_1Mbps
 Test Date : 2020/06/12


Duty Cycle Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \log (1/\text{Duty Cycle})$$

Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE_1Mbps	2.2029	2.5072	87.86	0.56

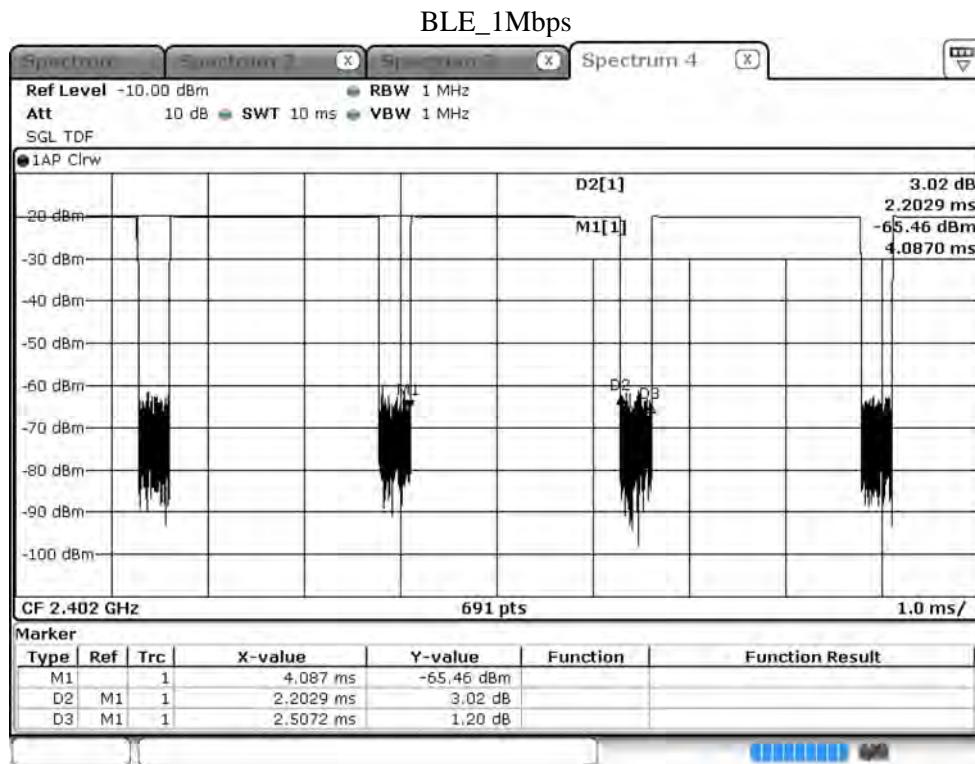

Product : LV55
 Test Item : Duty Cycle
 Test Mode : Mode 2: Transmit - BLE_2Mbps
 Test Date : 2020/06/12


Duty Cycle Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \log (1/\text{Duty Cycle})$$

Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE_2Mbps	1.1231	1.8695	60.07	2.21

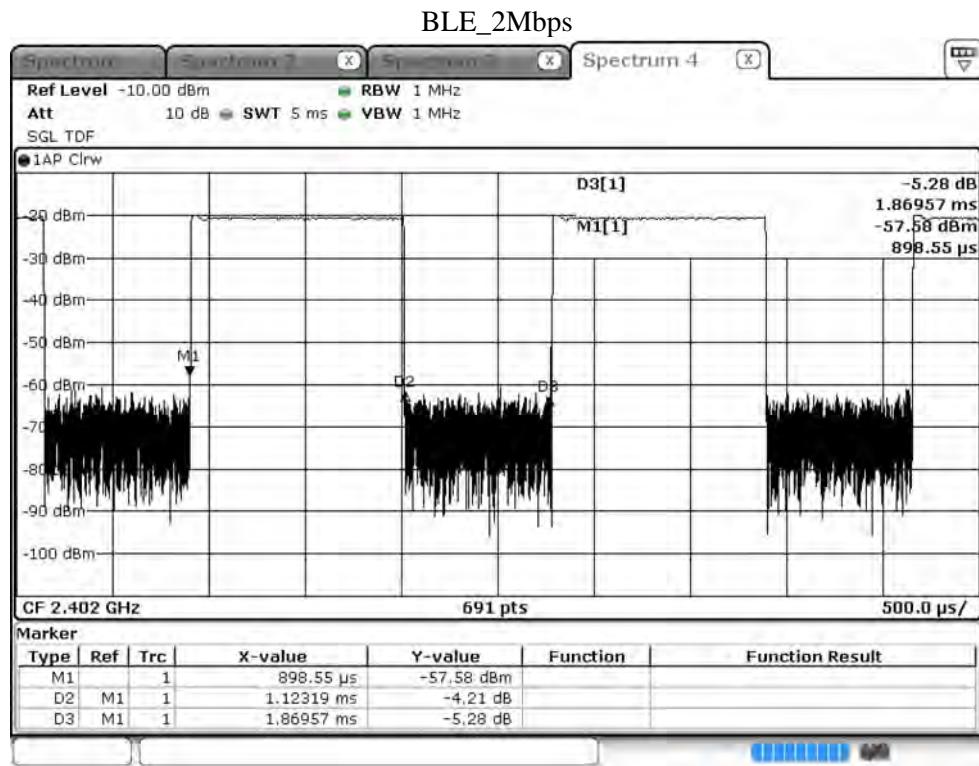

10. EMI Reduction Method During Compliance Testing

No modification was made during testing.