

PANASONIC FCC ID:NWJ10A002A -- PCS TDMA Head SAR

Generic Twin Phantom; Right Hand Section; Probe: ET3DV5 - SN1370 -- Probe Cal Date 02/00

Med. Parameters 1900 MHz Brain: $\sigma = 1.82$ mho/m $\epsilon_r = 40.4$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 3.0


SAR (1g): 1.47 mW/g, SAR (10g): 0.819 mW/g

Panasonic Tri-mode Model:EBTX-210


TDMA PCS Mode, Ch.0002 [1851MHz]

Conducted Power = 26.2dBm [Level: PL2]; S/N: 8.2-1, standard battery

Test Date - 10/25/2000

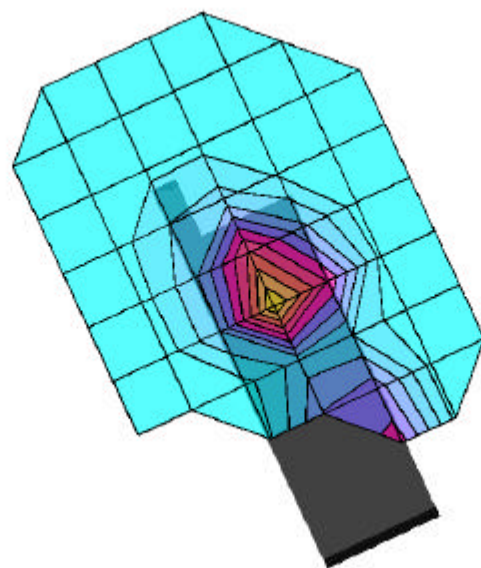

SAR_{Tot} [mW/g]



PANASONIC FCC ID:NWJ10A002A -- PCS TDMA Head SAR

Generic Twin Phantom; Right Hand Section; Probe: ET3DV5 - SN1370 -- Probe Cal Date 02/00

Med. Parameters 1900 MHz Brain: $\sigma = 1.82$ mho/m $\epsilon_r = 40.4$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 3.0


SAR (1g): 1.45 mW/g, SAR (10g): 0.807 mW/g

Panasonic Tri-mode Model:EBTX-210


TDMA PCS Mode, Ch.1000 [1880MHz]

Conducted Power = 26.2dBm [Level: PL2]; S/N: 8.2-1, standard battery

Test Date - 10/25/2000

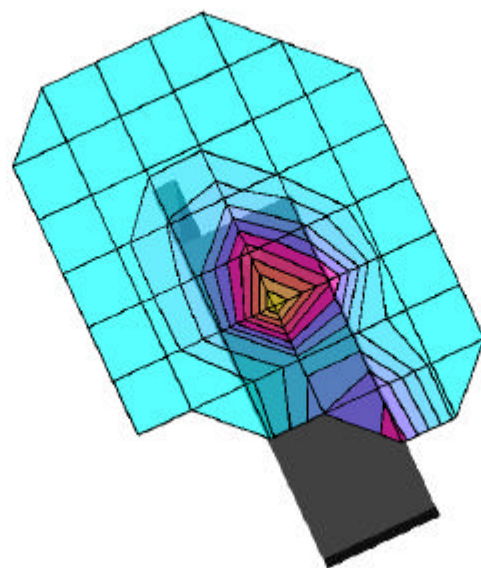

SAR_{Tot} [mW/g]

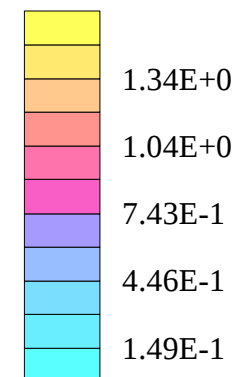

PANASONIC FCC ID:NWJ10A002A -- PCS TDMA Head SAR

Generic Twin Phantom; Right Hand Section; Probe: ET3DV5 - SN1370 -- Probe Cal Date 02/00

Med. Parameters 1900 MHz Brain: $\sigma = 1.82$ mho/m $\epsilon_r = 40.4$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 3.0


SAR (1g): 1.26 mW/g, SAR (10g): 0.699 mW/g

Panasonic Tri-mode Model:EBTX-210


TDMA PCS Mode, Ch.1998 [1910MHz]

Conducted Power = 26.2dBm [Level: PL2]; S/N: 8.2-1, standard battery

Test Date - 10/25/2000

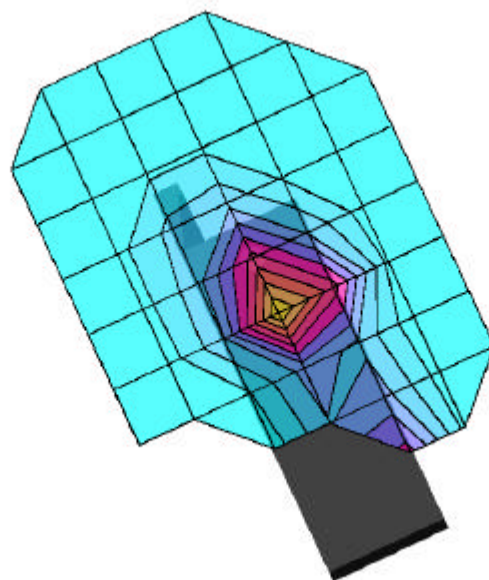

SAR_{Tot} [mW/g]

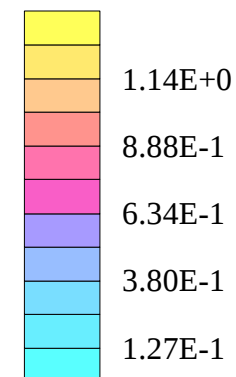

PANASONIC FCC ID:NWJ10A002A -- PCS TDMA Head SAR

Generic Twin Phantom; Right Hand Section; Probe: ET3DV5 - SN1370 -- Probe Cal Date 02/00

Med. Parameters 1900 MHz Brain: $\sigma = 1.82$ mho/m $\epsilon_r = 40.4$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 3.0


SAR (1g): 1.38 mW/g, SAR (10g): 0.700 mW/g

Panasonic Tri-mode Model:EBTX-210

TDMA PCS Mode, Ch.0002 [1851MHz]

Conducted Power = 26.2dBm [Level: PL2]; S/N: 8.2-1, extended battery

Test Date - 10/25/2000

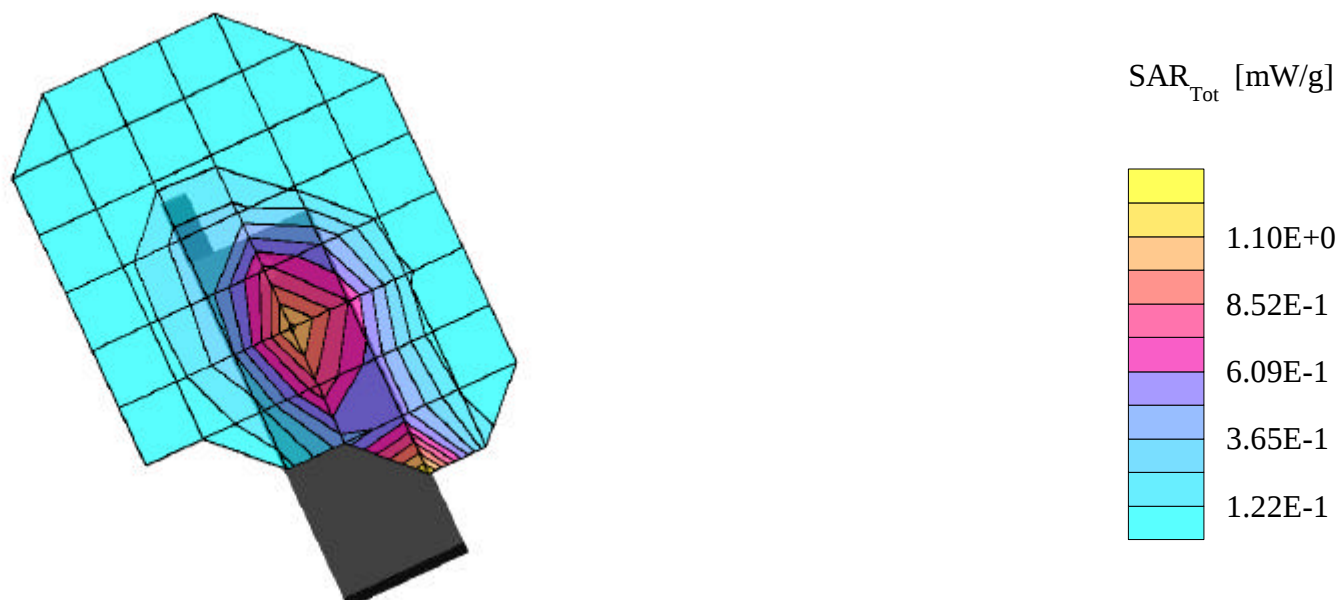

PANASONIC FCC ID:NWJ10A002A -- PCS TDMA Head SAR

Generic Twin Phantom; Right Hand Section; Probe: ET3DV5 - SN1370 -- Probe Cal Date 02/00

Med. Parameters 1900 MHz Brain: $\sigma = 1.82$ mho/m $\epsilon_r = 40.4$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 3.0


SAR (1g): 1.31 mW/g, SAR (10g): 0.739 mW/g

Panasonic Tri-mode Model:EBTX-210


TDMA PCS Mode, Ch.1000 [1880MHz]

Conducted Power = 26.2dBm [Level: PL2]; S/N: 8.2-1, extended battery

Test Date - 10/25/2000

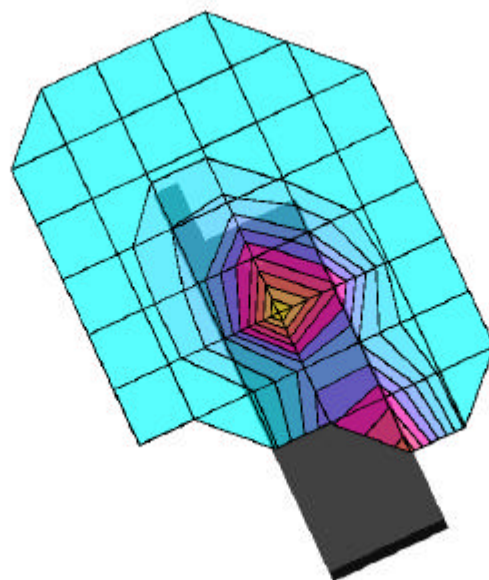

SAR_{Tot} [mW/g]

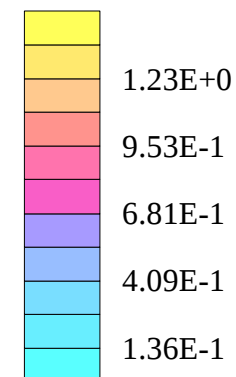

PANASONIC FCC ID:NWJ10A002A -- PCS TDMA Head SAR

Generic Twin Phantom; Right Hand Section; Probe: ET3DV5 - SN1370 -- Probe Cal Date 02/00

Med. Parameters 1900 MHz Brain: $\sigma = 1.82$ mho/m $\epsilon_r = 40.4$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 3.0


SAR (1g): 1.18 mW/g, SAR (10g): 0.661 mW/g

Panasonic Tri-mode Model:EBTX-210

TDMA PCS Mode, Ch.1998 [1910MHz]

Conducted Power = 26.2dBm [Level: PL2]; S/N: 8.2-1, extended battery

Test Date - 10/25/2000

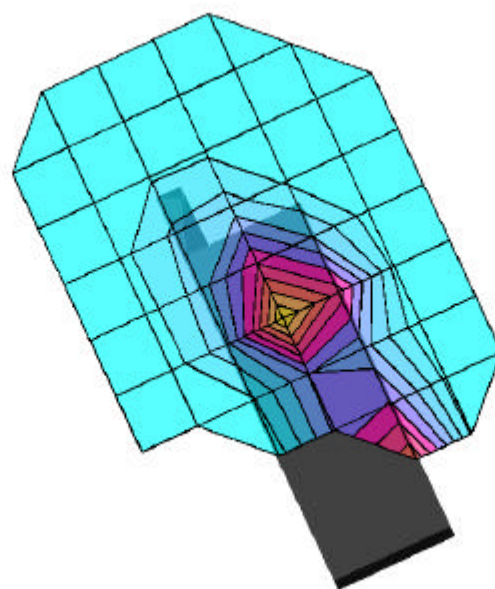

SAR_{Tot} [mW/g]

