

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.225

**Equipment** : Android Smart Phone  
**Brand Name** : Intel  
**Model No.** : Black Bay/XOLO  
**Marketing Name** : AZ510  
**Filing Type** : Existing Change  
**Applicant** : Intel Corp.  
SC1-20, 2200 Mission College Blvd, Santa Clara, CA 95054,  
USA  
**FCC ID** : O2Z-AZ510  
**Manufacturer** : Chi Mei Communication Systems, Inc.  
No. 4, Mingsheng Street, Tucheng City, New Taipei City  
23678, Taiwan  
**Received Date** : Sep. 26, 2012  
**Final Test Date** : Oct. 11, 2012

## Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.4-2003 and ANSI C63.10-2009 and 47 CFR FCC Part 15 Subpart C.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



**SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.**

## Table of Contents

<b>1. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>2. GENERAL INFORMATION.....</b>	<b>3</b>
2.1    Product Details.....	3
2.2    Accessories .....	3
2.3    Table for Test Modes .....	4
2.4    Table for Testing Locations .....	4
2.5    Table for Supporting Units .....	4
2.6    Test Configurations.....	5
<b>3. TEST RESULT .....</b>	<b>6</b>
3.1    AC Power Line Conducted Emissions Measurement .....	6
3.2    Field Strength of Fundamental Emissions and Mask Measurement .....	14
3.3    20dB Spectrum Bandwidth Measurement .....	18
3.4    Radiated Emissions Measurement.....	20
3.5    Frequency Stability Measurement.....	27
3.6    Antenna Requirements.....	30
<b>4. LIST OF MEASURING EQUIPMENT.....</b>	<b>31</b>
<b>5. TEST LOCATION.....</b>	<b>32</b>
<b>6. TAF CERTIFICATE OF ACCREDITATION.....</b>	<b>33</b>

### APPENDIX A. PHOTOGRAPHS OF EUT

### APPENDIX B. SETUP PHOTOGRAPHS

## REVISION HISTORY

# CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.225

**Equipment** : **Android Smart Phone**

**Brand Name** : **Intel**

**Model No.** : **Black Bay/XOLO**

**Marketing Name** : **AZ510**

**Applicant** : **Intel Corp.**

SC1-20, 2200 Mission College Blvd, Santa Clara, CA 95054,  
USA

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 26, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



**Jones Tsai / Manager**

***SPORTON INTERNATIONAL INC.***

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.**



## 1. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C					
Part	FCC Rule	IC Rule	Description of Test	Result	Under Limit
3.1	15.207	Gen 7.2.2	AC Power Line Conducted Emissions	Complies	5.50dB at 13.558MHz
3.2	15.225(a)(b)(c)	A2.6	Field Strength of Fundamental Emissions	Complies	78.17dB at 13.56MHz
3.3	2.1049	-	20dB Spectrum Bandwidth	Complies	
3.4	15.225(d) 15.209	A2.6	Radiated Emissions	Complies	9.06dB at 40.530MHz
3.5	15.225(e)	A2.6	Frequency Stability	Complies	
3.6	15.203	-	Antenna Requirements	Complies	

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Field Strength of Fundamental Emissions	±0.8dB	Confidence levels of 95%
20dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated / Band Edge Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%



## 2. GENERAL INFORMATION

### 2.1 Product Details

For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	5Vdc from Adapter 3.7Vdc from Li-ion Battery
Modulation	ASK
Channel Number	1
Channel Band Width (99%)	2.240kHz
Max. Field Strength	45.82dBuV/m
Test Freq. Range	13.553 ~ 13.567MHz
Carrier Frequencies	13.56 MHz (Ch. 1)
Antenna	FPC Antenna (Without any antenna connector)

### 2.2 Accessories

Specification of Accessory		
<b>Adapter</b>	<b>Brand Name</b>	PCH
	<b>Model Name</b>	KSUFB0500100W1US
<b>Battery</b>	<b>Brand Name</b>	UER
	<b>Model Name</b>	UP110004
<b>Earphone</b>	<b>Brand Name</b>	PCH
	<b>Model Name</b>	ME – 828
<b>USB Cable</b>	<b>Brand Name</b>	PCH
	<b>Model Name</b>	PKBB20508B01



## 2.3 Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	CTX	-
Field Strength of Fundamental Emissions	CTX	1
20dB Spectrum Bandwidth	CTX	1
Radiated Emissions 9kHz~30MHz	CTX	1
Radiated Emissions 9kHz~10 <sup>th</sup> Harmonic Band Edge Emissions	CTX	1
Frequency Stability	Un-modulation	1

Note:

1, CTX=continuously transmitting.

2, The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.

## 2.4 Table for Testing Locations

Test Site No.	Site Category	Location
CO05-HY	Conduction	Hwa Ya
TH02-HY	OVEN Room	Hwa Ya
03CH07-HY	SAC	Hwa Ya


Semi Anechoic Chamber (SAC).

## 2.5 Table for Supporting Units

Support Unit	Manufacturer	Model	FCC ID
WLAN AP	D-Link	DIR-628	KA2DIR628A2
System Simulator	R&S	CMU 200	N/A
Bluetooth Earphone	Sony Ericsson	MW600	PY70DA2029
Notebook	DELL	Latitude E6320	FCC DoC
LCD Monitor	Dell	U2410	FCC DoC

## 2.6 Test Configurations

### <AC Conducted Emissions>

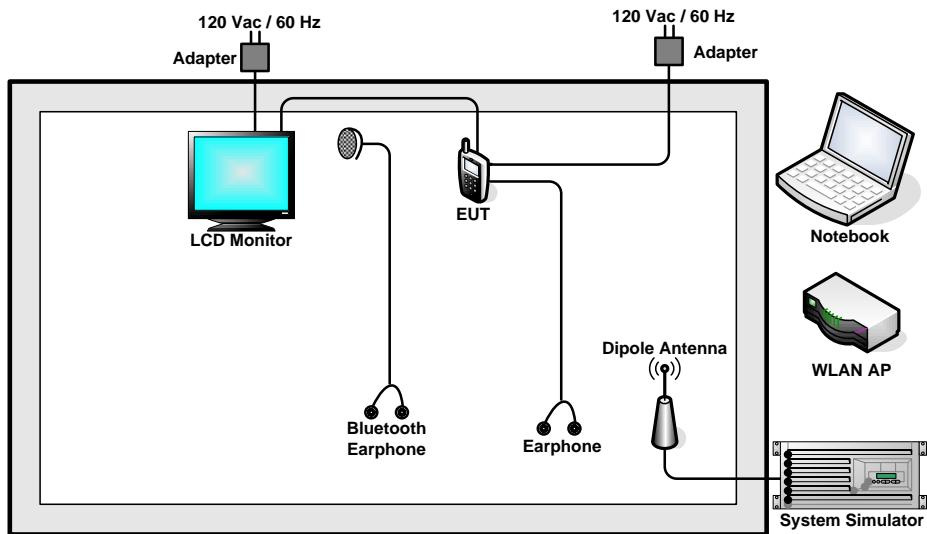

### Fundamental Emissions and Mask Measurement

For radiated emissions 9kHz~30MHz/

For radiated emissions 30MHz~1GHz





### 3. TEST RESULT

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit

For a Low-power Radio-frequency device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### 3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

##### 3.1.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

### 3.1.4 Test Setup Layout

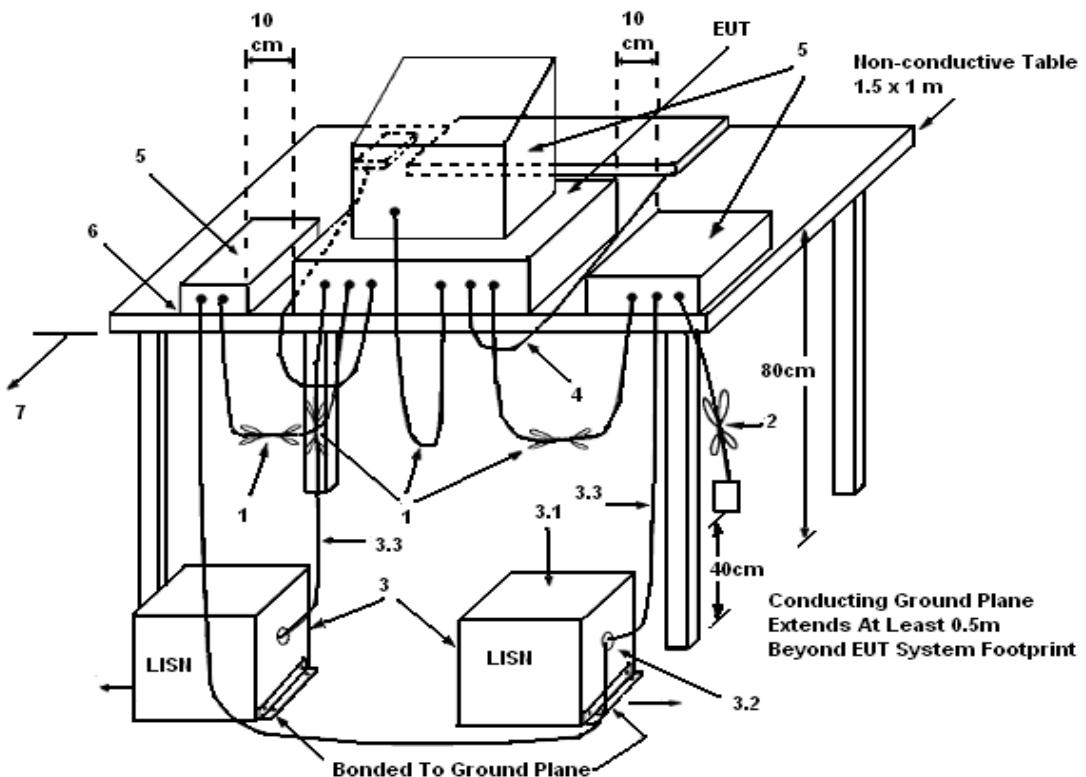

## LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50\ \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.



### **3.1.5 Test Deviation**

There is no deviation with the original standard.


### **3.1.6 EUT Operation during Test**

The EUT was placed on the test table and programmed in transmitting function.

### 3.1.7 Results of AC Power Line Conducted Emissions Measurement

<b>Final Test Date</b>	Oct. 07, 2012	<b>Test Site No.</b>	CO05-HY
<b>Temperature</b>	20~22°C	<b>Humidity</b>	45~47%
<b>Test Engineer</b>	Slash Huang	<b>Configuration</b>	Transmitting Mode (13.56MHz)
<b>Mode</b>	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + HDMI Cable + NFC Tx + USB Cable (Charging from Adapter)		


#### Line

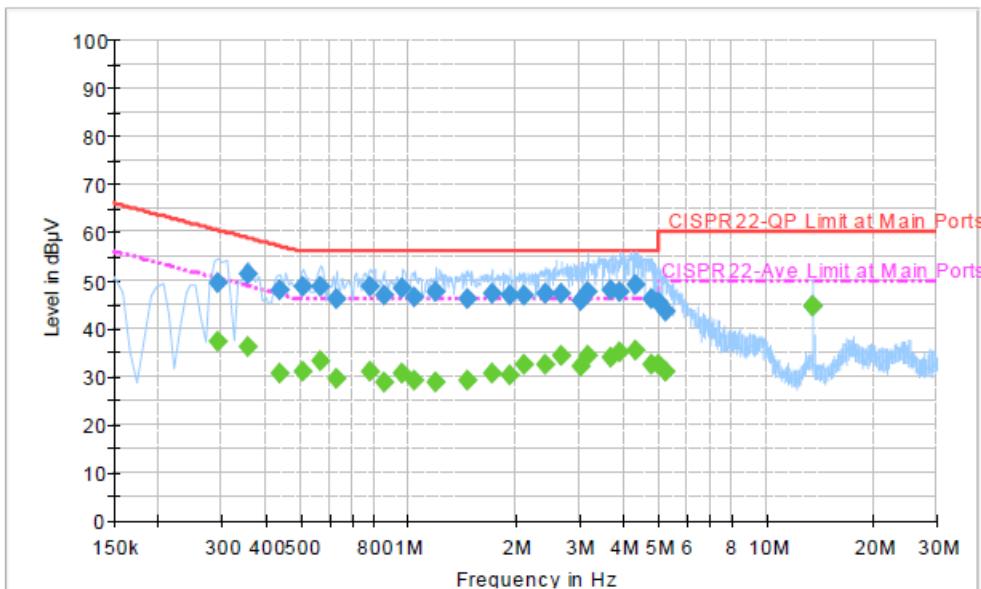

#### Final Result: Quasi-Peak


Frequency (MHz)	Quasi-Peak (dB $\mu$ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.294000	49.3	Off	L1	19.4	11.1	60.4
0.358000	51.2	Off	L1	19.4	7.6	58.8
0.438000	47.8	Off	L1	19.4	9.3	57.1
0.510000	48.8	Off	L1	19.4	7.2	56.0
0.566000	48.7	Off	L1	19.4	7.3	56.0
0.630000	46.2	Off	L1	19.4	9.8	56.0
0.782000	48.7	Off	L1	19.5	7.3	56.0
0.854000	46.7	Off	L1	19.5	9.3	56.0
0.966000	48.2	Off	L1	19.4	7.8	56.0
1.046000	46.4	Off	L1	19.4	9.6	56.0
1.198000	47.7	Off	L1	19.5	8.3	56.0
1.470000	45.9	Off	L1	19.5	10.1	56.0
1.710000	47.3	Off	L1	19.5	8.7	56.0
1.926000	46.8	Off	L1	19.5	9.2	56.0
2.118000	46.8	Off	L1	19.5	9.2	56.0
2.422000	47.2	Off	L1	19.6	8.8	56.0
2.678000	47.3	Off	L1	19.6	8.7	56.0
3.030000	45.9	Off	L1	19.6	10.1	56.0

**Line**

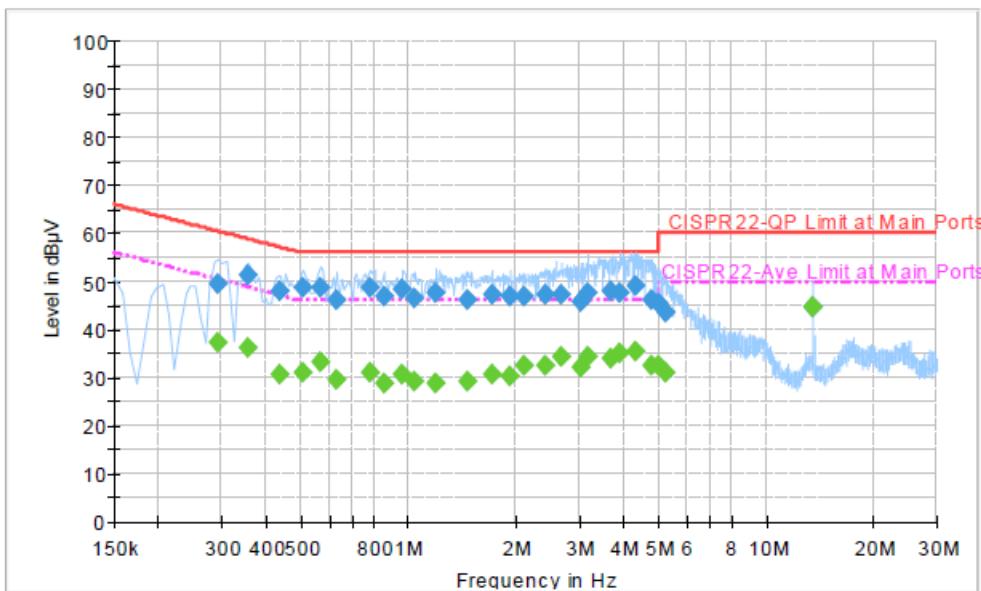


**Final Result: Quasi-Peak**


Frequency (MHz)	Quasi-Peak (dB $\mu$ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
3.174000	47.5	Off	L1	19.6	8.5	56.0
3.702000	47.8	Off	L1	19.6	8.2	56.0
3.894000	47.8	Off	L1	19.6	8.2	56.0
4.302000	49.2	Off	L1	19.6	6.8	56.0
4.766000	46.0	Off	L1	19.6	10.0	56.0
5.006000	45.2	Off	L1	19.6	14.8	60.0
5.222000	43.6	Off	L1	19.5	16.4	60.0
13.558000	44.6	Off	L1	19.8	15.4	60.0

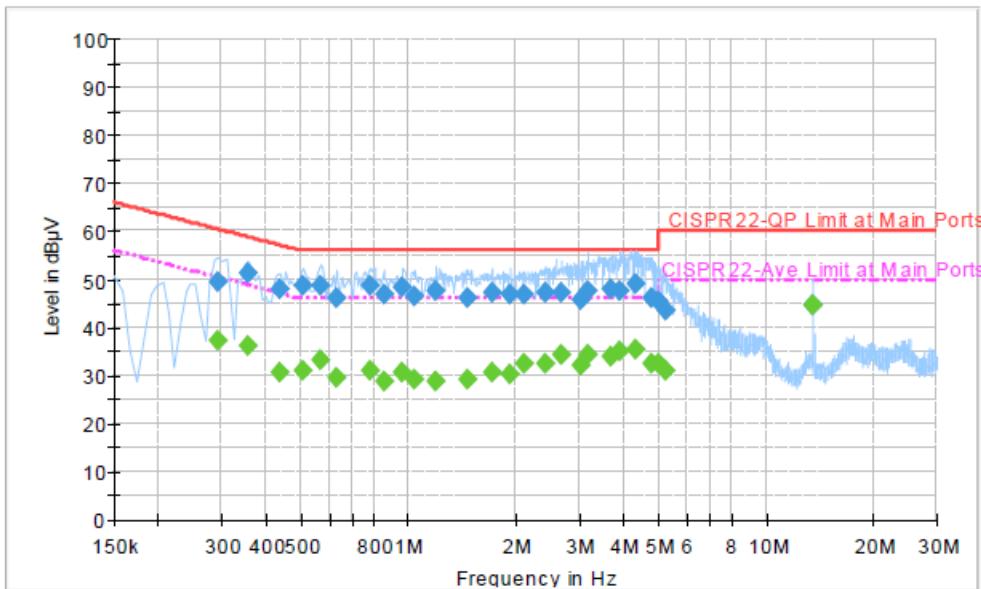**Line**

**Final Result: Average**

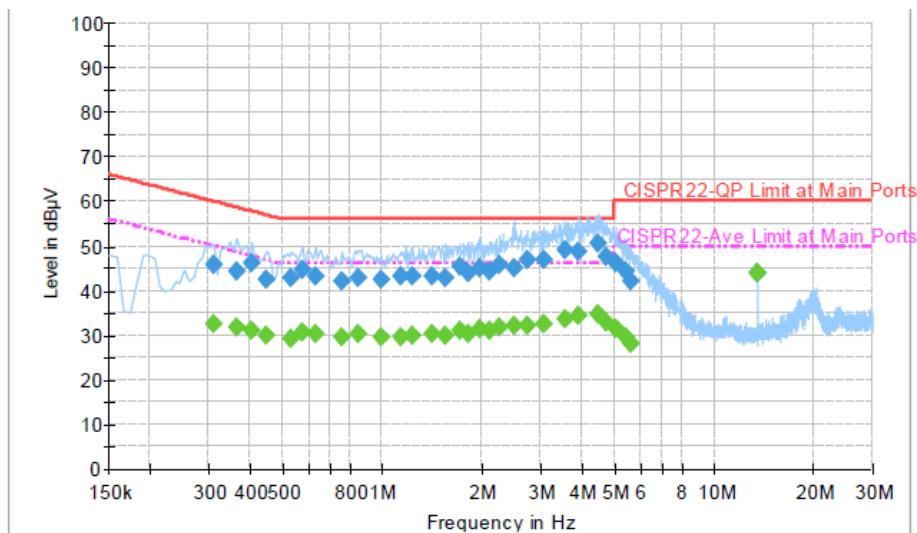Frequency (MHz)	Average (dB $\mu$ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.294000	37.2	Off	L1	19.4	13.2	50.4
0.358000	36.1	Off	L1	19.4	12.7	48.8
0.438000	30.6	Off	L1	19.4	16.5	47.1
0.510000	31.2	Off	L1	19.4	14.8	46.0
0.566000	33.3	Off	L1	19.4	12.7	46.0
0.630000	29.5	Off	L1	19.4	16.5	46.0
0.782000	30.9	Off	L1	19.5	15.1	46.0
0.854000	28.8	Off	L1	19.5	17.2	46.0
0.966000	30.7	Off	L1	19.4	15.3	46.0
1.046000	29.3	Off	L1	19.4	16.7	46.0
1.198000	28.8	Off	L1	19.5	17.2	46.0
1.470000	29.2	Off	L1	19.5	16.8	46.0
1.710000	30.5	Off	L1	19.5	15.5	46.0
1.926000	30.4	Off	L1	19.5	15.6	46.0
2.118000	32.3	Off	L1	19.5	13.7	46.0
2.422000	32.5	Off	L1	19.6	13.5	46.0
2.678000	34.4	Off	L1	19.6	11.6	46.0
3.030000	32.2	Off	L1	19.6	13.8	46.0
3.174000	34.3	Off	L1	19.6	11.7	46.0
3.702000	34.1	Off	L1	19.6	11.9	46.0
3.894000	35.0	Off	L1	19.6	11.0	46.0
4.302000	35.6	Off	L1	19.6	10.4	46.0
4.766000	32.3	Off	L1	19.6	13.7	46.0
5.006000	32.5	Off	L1	19.6	17.5	50.0
5.222000	30.9	Off	L1	19.5	19.1	50.0
13.558000	44.5	Off	L1	19.8	5.5	50.0

**Neutral**

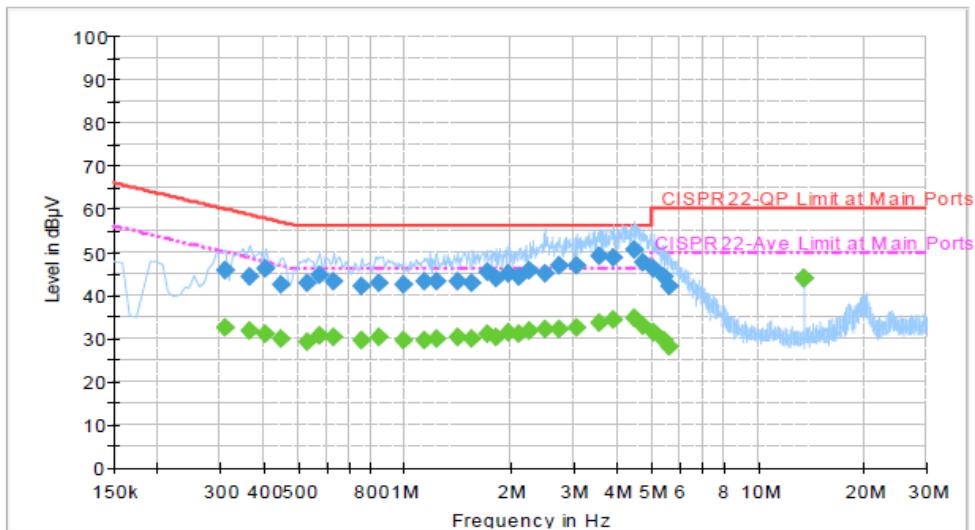**Final Result: Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dB $\mu$ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.310000	45.7	Off	N	19.4	14.3	60.0
0.366000	44.4	Off	N	19.4	14.2	58.6
0.406000	46.3	Off	N	19.4	11.4	57.7
0.446000	42.4	Off	N	19.3	14.5	56.9
0.534000	42.9	Off	N	19.4	13.1	56.0
0.574000	44.6	Off	N	19.4	11.4	56.0
0.630000	43.3	Off	N	19.4	12.7	56.0
0.758000	42.1	Off	N	19.5	13.9	56.0
0.846000	42.6	Off	N	19.6	13.4	56.0
0.990000	42.4	Off	N	19.4	13.6	56.0
1.134000	43.2	Off	N	19.5	12.8	56.0
1.230000	43.2	Off	N	19.5	12.8	56.0
1.414000	43.2	Off	N	19.4	12.8	56.0
1.558000	43.0	Off	N	19.4	13.0	56.0
1.718000	45.5	Off	N	19.5	10.5	56.0
1.814000	44.1	Off	N	19.5	11.9	56.0
1.974000	44.8	Off	N	19.5	11.2	56.0
2.118000	44.4	Off	N	19.6	11.6	56.0
2.262000	45.6	Off	N	19.6	10.4	56.0
2.494000	45.1	Off	N	19.6	10.9	56.0
2.726000	46.8	Off	N	19.6	9.2	56.0
3.070000	46.9	Off	N	19.6	9.1	56.0
3.582000	49.1	Off	N	19.6	6.9	56.0
3.894000	48.8	Off	N	19.6	7.2	56.0
4.454000	50.4	Off	N	19.6	5.6	56.0
4.726000	47.5	Off	N	19.6	8.5	56.0
5.086000	46.1	Off	N	19.6	13.9	60.0
5.438000	44.2	Off	N	19.7	15.8	60.0
5.630000	42.2	Off	N	19.7	17.8	60.0
13.558000	44.0	Off	N	19.9	16.0	60.0

**Neutral**

**Final Result: Average**

Frequency (MHz)	Average (dB $\mu$ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.310000	32.3	Off	N	19.4	17.7	50.0
0.366000	31.6	Off	N	19.4	17.0	48.6
0.406000	31.0	Off	N	19.4	16.7	47.7
0.446000	29.9	Off	N	19.3	17.0	46.9
0.534000	29.0	Off	N	19.4	17.0	46.0
0.574000	30.6	Off	N	19.4	15.4	46.0
0.630000	30.2	Off	N	19.4	15.8	46.0
0.758000	29.5	Off	N	19.5	16.5	46.0
0.846000	30.4	Off	N	19.6	15.6	46.0
0.990000	29.4	Off	N	19.4	16.6	46.0
1.134000	29.5	Off	N	19.5	16.5	46.0
1.230000	29.9	Off	N	19.5	16.1	46.0
1.414000	30.2	Off	N	19.4	15.8	46.0
1.558000	29.8	Off	N	19.4	16.2	46.0
1.718000	31.1	Off	N	19.5	14.9	46.0
1.814000	30.1	Off	N	19.5	15.9	46.0
1.974000	31.2	Off	N	19.5	14.8	46.0
2.118000	30.9	Off	N	19.6	15.1	46.0
2.262000	31.7	Off	N	19.6	14.3	46.0
2.494000	32.0	Off	N	19.6	14.0	46.0
2.726000	32.1	Off	N	19.6	13.9	46.0
3.070000	32.5	Off	N	19.6	13.5	46.0
3.582000	33.6	Off	N	19.6	12.4	46.0
3.894000	34.3	Off	N	19.6	11.7	46.0
4.454000	34.6	Off	N	19.6	11.4	46.0
4.726000	32.9	Off	N	19.6	13.1	46.0
5.086000	31.2	Off	N	19.6	18.8	50.0
5.438000	29.5	Off	N	19.7	20.5	50.0
5.630000	27.9	Off	N	19.7	22.1	50.0
13.558000	43.8	Off	N	19.9	6.2	50.0

Note: Level = Read Level + LISN Factor + Cable Loss.



### 3.2 Field Strength of Fundamental Emissions and Mask Measurement

#### 3.2.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 microvolts/meter at 30 meters.

The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (microvolts/meter)	Field Strength (dB $\mu$ V/m) at 10m	Field Strength (dB $\mu$ V/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103.08 (QP)	124 (QP)

Mask limit:

Rules and specifications	CFR 47 Part 15 section 15.225(a)-(d)				
Description	Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz				
Limit	Freq. of Emission (MHz)	Field Strength ( $\mu$ V/m) at 30m	Field Strength (dB $\mu$ V/m) at 30m	Field Strength (dB $\mu$ V/m) at 10m	Field Strength (dB $\mu$ V/m) at 3m
	1.705~13.110	30	29.5	48.58	69.5
	13.110~13.410	106	40.5	59.58	80.5
	13.410~13.553	334	50.5	69.58	90.5
	13.553~13.567	15848	84.0	103.08	124.0
	13.567~13.710	334	50.5	69.58	90.5
	13.710~14.010	106	40.5	59.58	80.5
	14.010~30.000	30	29.5	48.58	69.5

#### 3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	Auto
Center Frequency	Fundamental Frequency
RB	9 kHz
Detector	QP

### 3.2.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested using a spectrum analyzer with RB set to a 1kHz for the band 13.553~13.567MHz.

### 3.2.4 Test Setup Layout

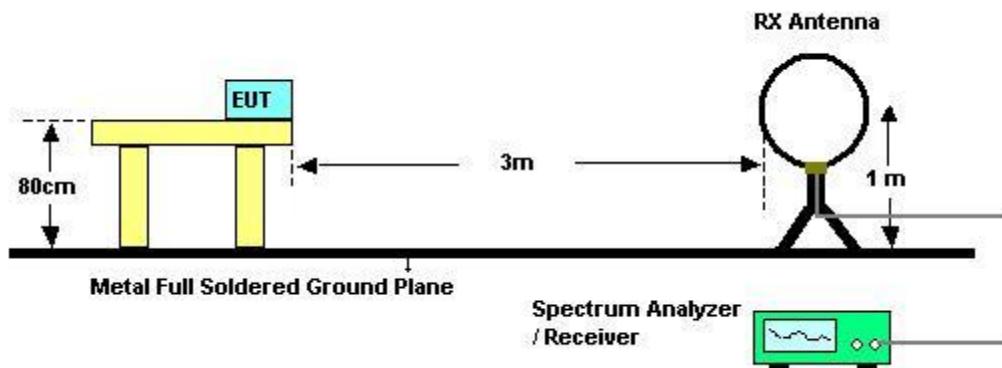

### 3.2.5 Test Deviation


There is no deviation with the original standard.

### 3.2.6 EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

**3.2.7 Test Result of Field Strength of Fundamental Emissions**

<b>Final Test Date</b>	Oct. 06, 2012	<b>Test Site No.</b>	03CH07-HY
<b>Temperature</b>	22~24°C	<b>Humidity</b>	50~52%
<b>Test Engineer</b>	Kyle Jhuang	<b>Configurations</b>	Ch. 1

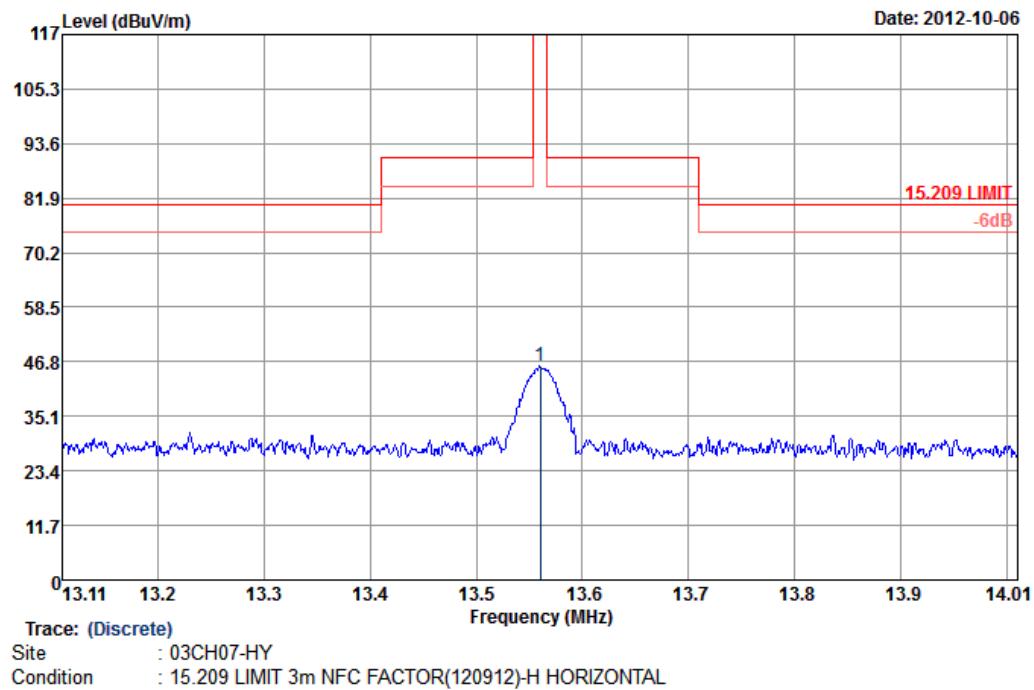

	Freq	Level	Over Limit	Line	ReadAntenna	Cable	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg
1	13.56	45.82	-78.17	123.99	25.67	19.75	0.40	100	0 QP

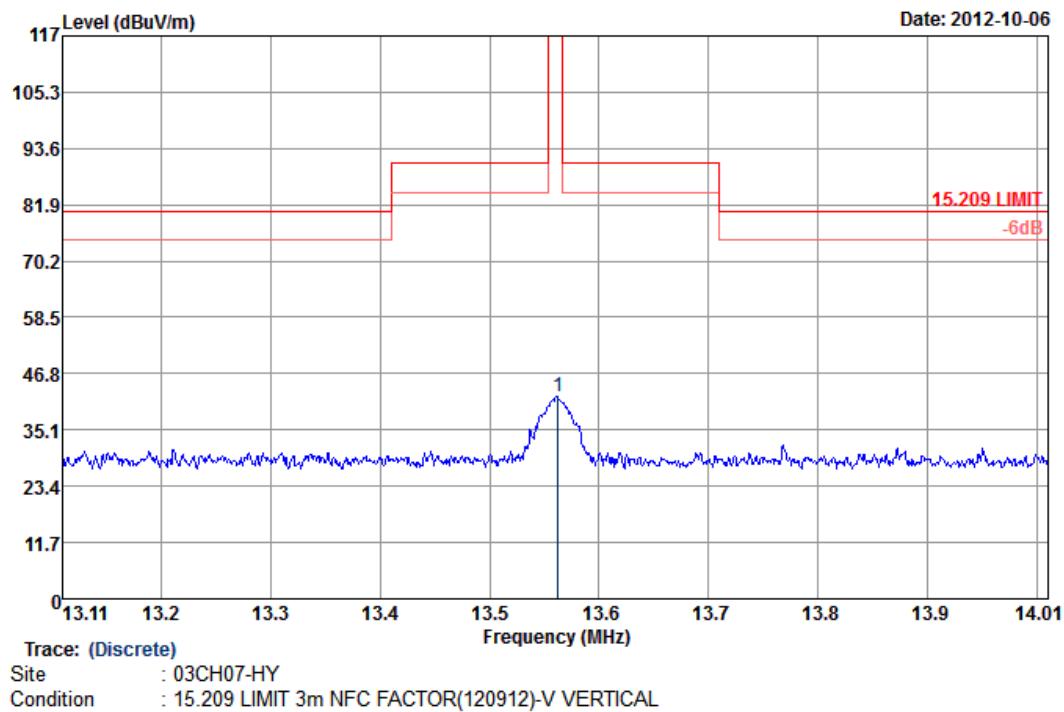

	Freq	Level	Over Limit	Limit Line	Read	Antenna Level	Cable Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	13.56	42.09	-81.90	123.99	21.94	19.75	0.40	100	258	QP

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Measured distance is 3m.

All emissions emit from non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.

### 3.3 20dB Spectrum Bandwidth Measurement

#### 3.3.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

#### 3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	1 kHz
VB	1 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 1 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

#### 3.3.4 Test Setup Layout

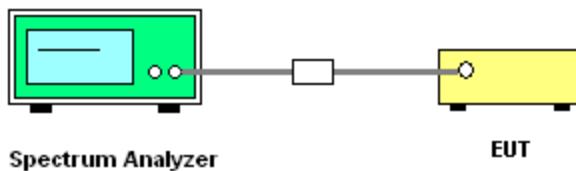

#### 3.3.5 Test Deviation

There is no deviation with the original standard.

#### 3.3.6 EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.3.7 Test Result of 20dB Spectrum Bandwidth


<b>Final Test Date</b>	Oct. 11, 2012	<b>Test Site No.</b>	TH02-HY
<b>Temperature</b>	22~24°C	<b>Humidity</b>	53~55%
<b>Test Engineer</b>	Rover Lee	<b>Configurations</b>	Ch. 1

<b>Frequency</b>	<b>20dB BW (kHz)</b>	<b>99% OBW (kHz)</b>	<b>Frequency range (MHz)</b> $f_L > 13.553\text{MHz}$	<b>Frequency range (MHz)</b> $f_H < 13.567\text{MHz}$	<b>Test Result</b>
13.56 MHz	2.640	2.240	13.55852	13.56116	Complies

#### 20 dB / 99% Bandwidth Plot on 13.56 MHz

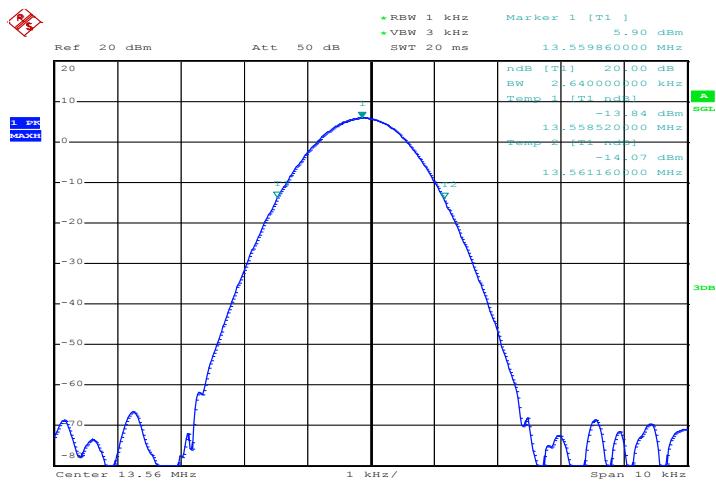

Date: 11.OCT.2012 09:30:57

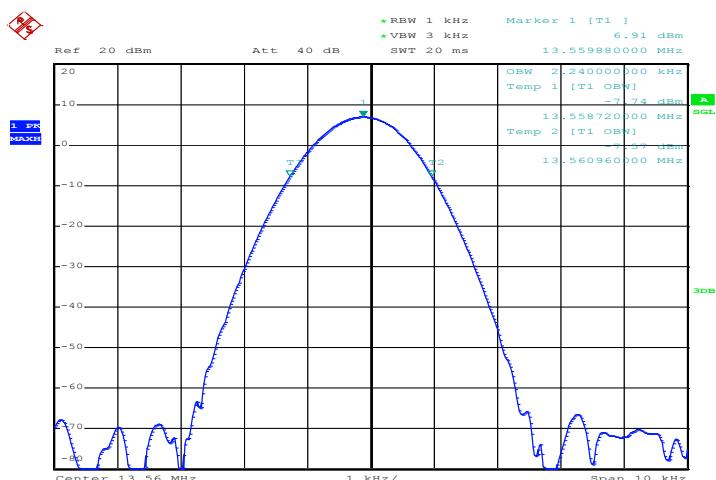

Date: 11.OCT.2012 09:28:04



### 3.4 Radiated Emissions Measurement

#### 3.4.1 Limit

The field strength of any emissions which appear outside of 13.553 ~ 13.567MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.4.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions,




and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.


7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

### 3.4.4 Test Setup Layout

For radiated emissions below 30MHz

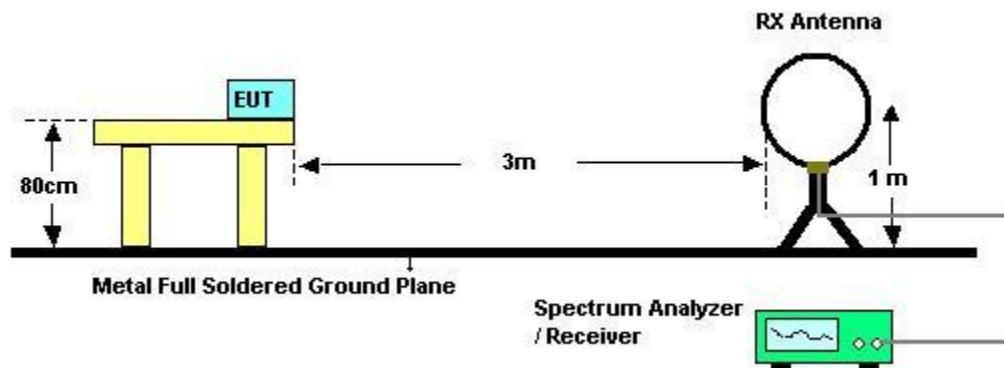

For radiated emissions above 30MHz

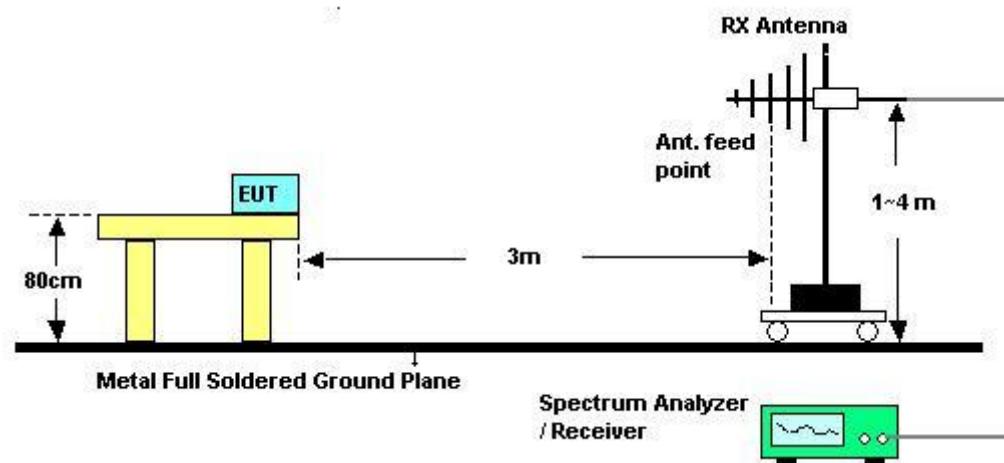

### 3.4.5 Test Deviation

There is no deviation with the original standard.


### 3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



## 3.4.7 Results of Radiated Emissions (9 kHz~30MHz)


Final Test Date	Oct. 06, 2012	Test Site No.	03CH07-HY
Temperature	22~24°C	Humidity	50~52%
Test Engineer	Kyle Jhuang	Configurations	Ch. 1

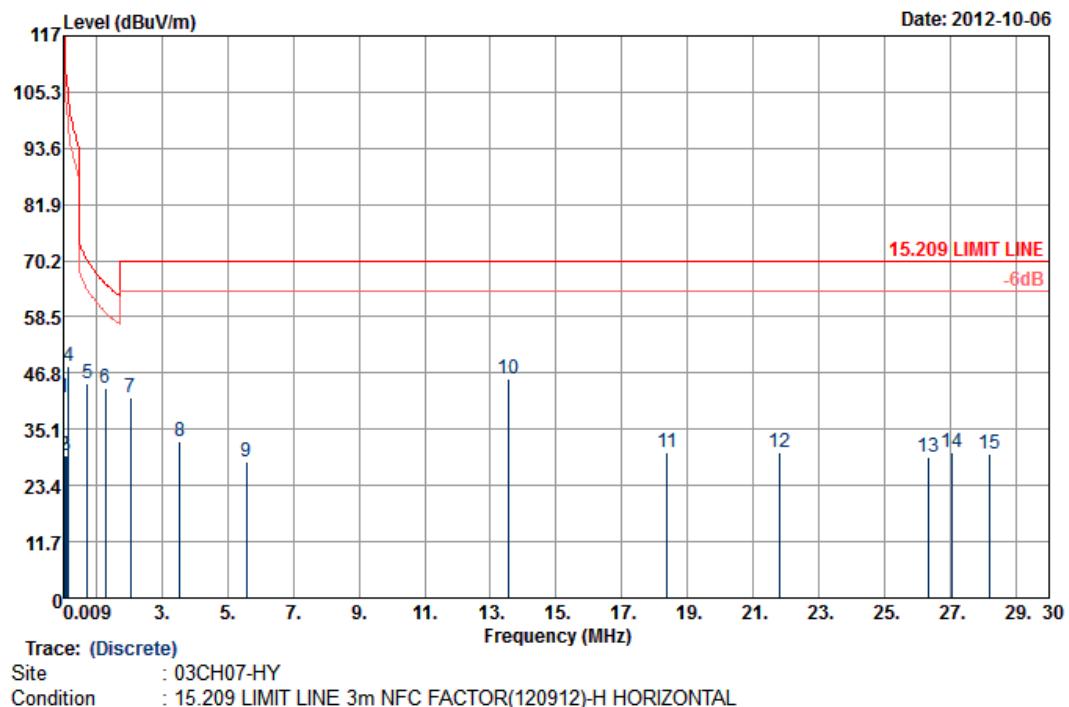**Horizontal**

Freq	Level	Over	Limit	Read	Antenna	Cable	A/Pos	T/Pos	Remark
		Limit	Line	Level	Factor	Loss	cm	deg	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	0.01	41.71	-86.81	128.52	21.16	20.26	0.29	---	--- QP
2	0.04	29.50	-85.55	115.05	9.04	20.17	0.29	---	--- QP
3	0.10	29.76	-77.58	107.34	9.40	20.07	0.29	---	--- QP
4	0.16	48.09	-55.27	103.36	27.76	20.04	0.29	---	--- QP
5	0.74	44.55	-25.65	70.20	24.24	20.00	0.31	---	--- QP
6	1.29	43.65	-21.76	65.41	23.33	20.01	0.31	---	--- QP
7	2.05	41.81	-28.19	70.00	21.46	20.02	0.33	---	--- QP
8	3.56	32.50	-37.50	70.00	12.13	20.02	0.35	---	--- QP
9	5.56	28.33	-41.67	70.00	8.04	19.93	0.36	---	--- QP
10	13.56	45.55	-24.45	70.00	25.40	19.75	0.40	---	--- QP
11	18.37	30.37	-39.63	70.00	10.00	19.95	0.42	---	--- QP
12	21.82	30.35	-39.65	70.00	9.62	20.29	0.44	---	--- QP
13	26.32	29.43	-40.57	70.00	8.56	20.40	0.47	---	--- QP
14	27.03	30.36	-39.64	70.00	9.50	20.38	0.48	---	--- QP
15	28.18	30.08	-39.92	70.00	9.26	20.32	0.50	---	--- QP



## Vertical

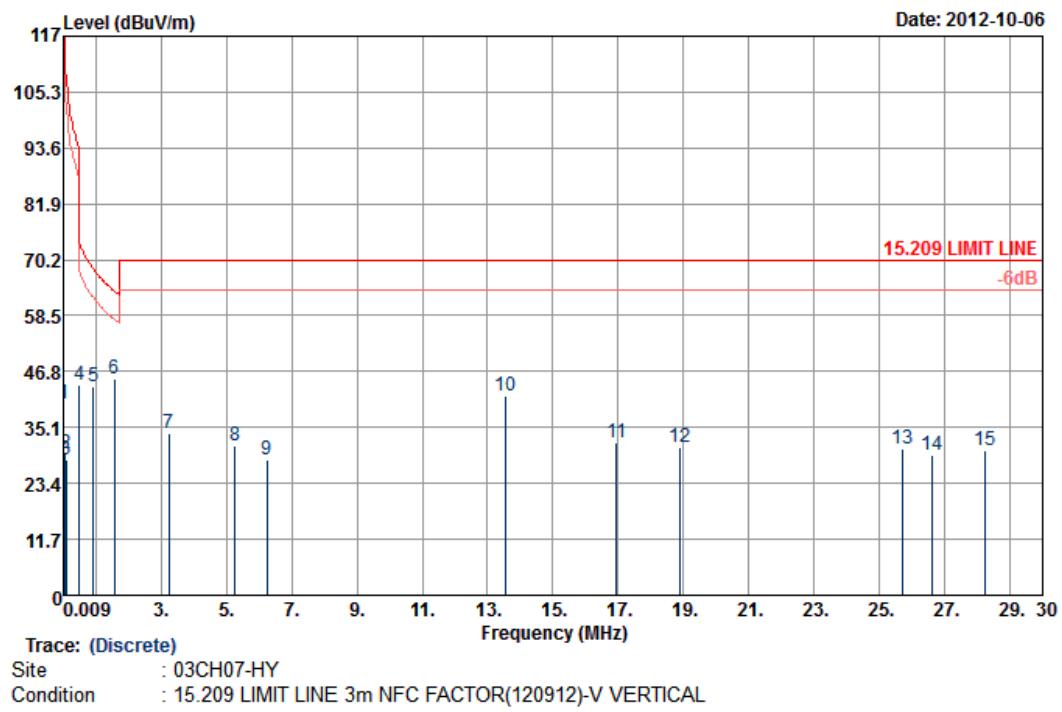

Freq	Level	Over	Limit	Read	Antenna	Cable	A/Pos	T/Pos	Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	
1	0.01	40.13	-86.56	126.69	19.58	20.26	0.29	---	--- QP
2	0.06	29.59	-82.16	111.75	9.19	20.11	0.29	---	--- QP
3	0.10	28.33	-79.39	107.72	7.97	20.07	0.29	---	--- QP
4	0.50	44.16	-29.50	73.66	23.87	20.00	0.29	---	--- QP
5	0.92	43.72	-24.63	68.35	23.41	20.00	0.31	---	--- QP
6	1.56	45.35	-18.39	63.74	25.01	20.01	0.33	---	--- QP
7	3.24	33.92	-36.08	70.00	13.55	20.03	0.34	---	--- QP
8	5.26	31.20	-38.80	70.00	10.89	19.95	0.36	---	--- QP
9	6.25	28.33	-41.67	70.00	8.08	19.89	0.36	---	--- QP
10	13.56	41.65	-28.35	70.00	21.50	19.75	0.40	---	--- QP
11	16.96	31.92	-38.08	70.00	11.67	19.83	0.42	---	--- QP
12	18.88	30.86	-39.14	70.00	10.43	20.00	0.43	---	--- QP
13	25.70	30.69	-39.31	70.00	9.83	20.39	0.47	---	--- QP
14	26.60	29.20	-40.80	70.00	8.33	20.39	0.48	---	--- QP
15	28.26	30.19	-39.81	70.00	9.37	20.32	0.50	---	--- QP

## Note:

1. Remark 10 is transmitter's fundamental signal.
2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



## 3.4.8 Results for Radiated Emissions (30MHz~1GHz)


Final Test Date	Oct. 06, 2012	Test Site No.	03CH07-HY
Temperature	22~24°C	Humidity	50~52%
Test Engineer	Kyle Jhuang	Configurations	Ch.1

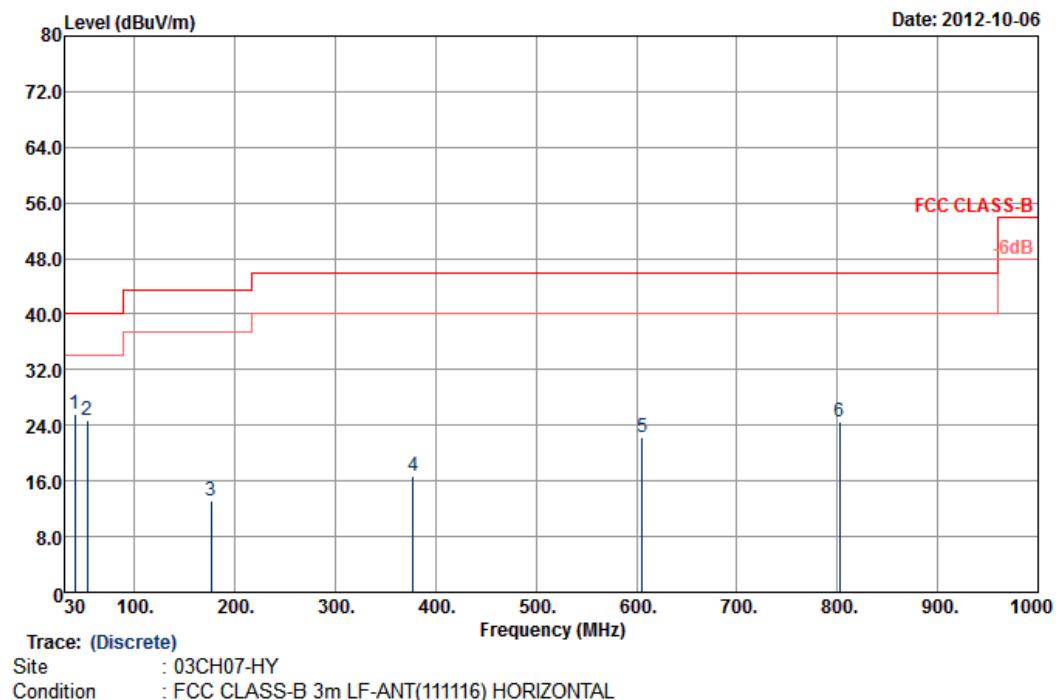**Horizontal**

Freq	Level	Over	Limit	Read	Antenna	Cable	A/Pos	T/Pos	Remark
		Limit	Line	Level	Factor	Loss	cm	deg	
1	40.53	25.62	-14.38	40.00	43.87	12.90	0.63	100	26 QP
2	52.95	24.85	-15.15	40.00	48.30	7.50	0.72	---	--- QP
3	176.34	13.07	-30.43	43.50	34.02	9.03	1.24	---	--- QP
4	377.70	16.62	-29.38	46.00	30.44	15.40	2.09	---	--- QP
5	605.90	22.20	-23.80	46.00	30.16	19.85	2.71	---	--- QP
6	802.60	24.60	-21.40	46.00	29.51	22.12	3.15	---	--- QP



## Vertical

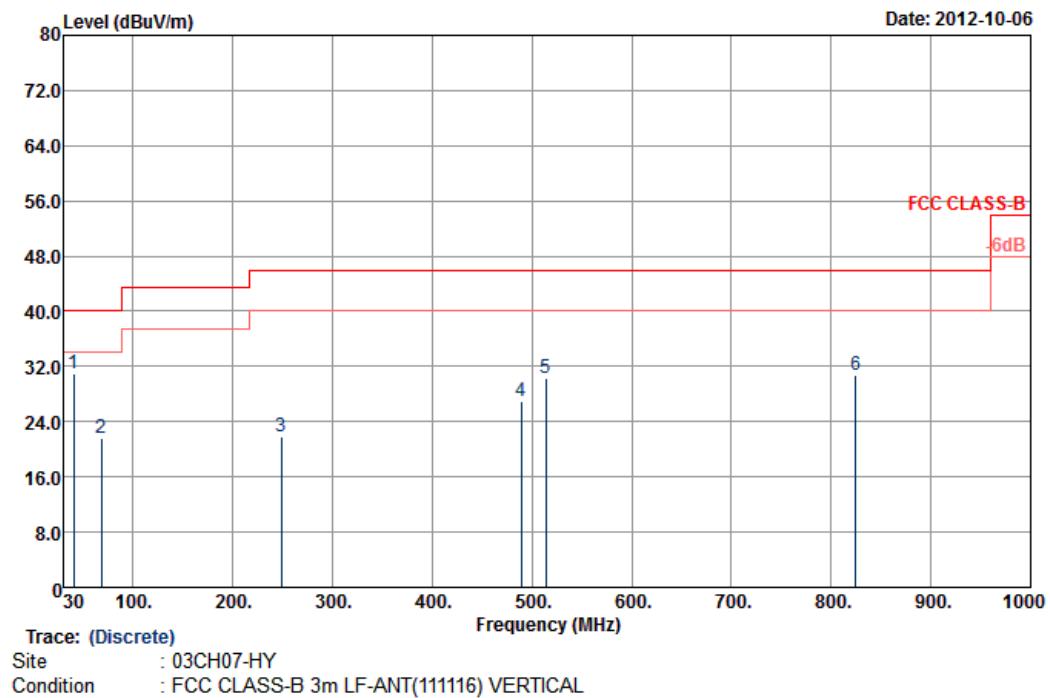

Freq MHz	Level dBuV/m	Over Limit dB	Limit dBuV/m	Read Line dBuV	Antenna Factor	Cable Loss dB	A/Pos cm	T/Pos deg	Remark	
									dB	dBuV/m
1	40.53	30.94	-9.06	40.00	49.19	12.90	0.63	100	50	QP
2	67.80	21.64	-18.36	40.00	46.34	6.26	0.82	---	---	QP
3	248.70	21.84	-24.16	46.00	39.00	12.47	1.53	---	---	QP
4	489.00	26.88	-19.12	46.00	37.53	17.86	2.41	---	---	QP
5	514.20	30.30	-15.70	46.00	40.48	18.33	2.48	---	---	QP
6	824.30	30.72	-15.28	46.00	35.52	22.34	3.20	---	---	QP

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.



### 3.5 Frequency Stability Measurement

#### 3.5.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

#### 3.5.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	1 kHz
VB	1 kHz
Sweep Time	Auto

#### 3.5.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 1 kHz with peak detector and maxhold settings.
5. fc is declaring of channel frequency. Then the frequency error formula is  $(fc-f)/fc \times 10^6$  ppm and the limit is less than +/-100ppm.
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is -20°C~50°C.

### 3.5.4 Test Setup Layout

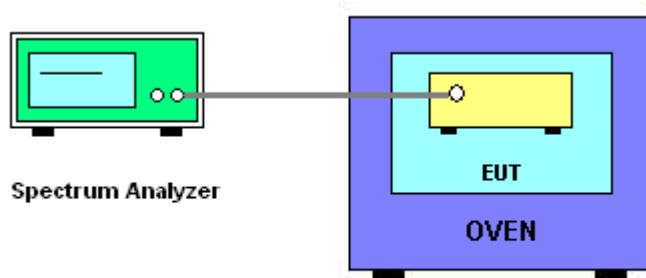

### 3.5.5 Test Deviation

There is no deviation with the original standard.

### 3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.



## 3.5.7 Test Result of Frequency Stability

Final Test Date	Oct. 11, 2012	Test Site No.	TH02-HY
Temperature	22~24°C	Humidity	53~55%
Test Engineer	Rover Lee	Configurations	Ch. 1

## Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)
120	13.55984
102	13.55984
138	13.55984
Max. Deviation (MHz)	13.55984
Max. Deviation (ppm)	-11.7994

## Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-20	13.5599
-10	13.55992
0	13.5599
10	13.55988
20	13.55984
30	13.55981
40	13.5598
50	13.5598
Max. Deviation (MHz)	13.55992
Max. Deviation (ppm)	-5.8997



## 3.6 Antenna Requirements

### 3.6.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

### 3.6.2 Antenna Connector Construction

Enbedded in Antenna.



#### 4. LIST OF MEASURING EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESCS 30	100356	9KHz ~ 2.75GHz	Oct. 27, 2011	Oct. 07, 2012	Oct. 26, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz ~ 30MHz	Dec. 09, 2011	Oct. 07, 2012	Dec. 08, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz ~ 30MHz	Dec. 06, 2011	Oct. 07, 2012	Dec. 05, 2012	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Oct. 07, 2012	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	117997	N/A	Aug. 22, 2011	Oct. 07, 2012	Aug. 21, 2013	Conduction (CO05-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Oct. 11, 2012	Jun. 05, 2013	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 23, 2012	Oct. 11, 2012	Jul. 22, 2013	Conducted (TH02-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 22, 2011	Oct. 06, 2012	Oct. 21, 2012	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP30	101067	9KHz ~ 30GHz	Dec. 06, 2011	Oct. 06, 2012	Dec. 05, 2012	Radiation (03CH07-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz ~ 18GHz	Aug. 01, 2012	Oct. 06, 2012	Jul. 31, 2013	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz ~ 26.5GHz	Dec. 05, 2011	Oct. 06, 2012	Dec. 04, 2012	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10 ~ 1000MHz 32dB GAIN	Feb. 27, 2012	Oct. 06, 2012	Feb. 26, 2013	Radiation (03CH07-HY)
Signal Analyzer	Rohde & Schwarz	FSQ	200578/026	20Hz-26.5GHz	Feb. 06, 2012	Oct. 06, 2012	Feb. 05, 2013	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Oct. 06, 2012	Jul. 02, 2014	Radiation (03CH07-HY)



## 5. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085
KUNSHAN	ADD : No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL : +86-0512-5790-0158 FAX : +86-0512-5790-0958



## 6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-110111

財團法人全國認證基金會  
Taiwan Accreditation Foundation

## Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

**Accreditation Criteria** : ISO/IEC 17025:2005  
**Accreditation Number** : 1190  
**Originally Accredited** : December 15, 2003  
**Effective Period** : January 10, 2010 to January 09, 2013  
**Accredited Scope** : Testing Field, see described in the Appendix  
**Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory  
for Commodities Inspection  
Accreditation Program for Telecommunication Equipment  
Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition  
Arrangment with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 11, 2011

P1, total 24 pages



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP232306-04 as below.