
FCC Test Report

Report No.: AGCX0M120701F2C

FCC ID : ONGANDROID53
PRODUCT DESIGNATION : WCDMA MOBILE PHONE
BRAND NAME : MAXWEST
MODEL NAME : ANDROID 5100
CLIENT : MAXWEST TELECOM
DATE OF ISSUE : July 20, 2012
STANDARD(S) : FCC Part 15 Rules
REPORT VERSION : V1.0

Attestation of **Global Compliance (Shenzhen) Co., Ltd**

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

VERIFICATION OF COMPLIANCE

Applicant:	MAXWEST TELECOM 11037 warner ave #201 fountain valley, ca, 92708 USA
Manufacturer:	MAXWEST TELECOM 11037 warner ave #201 fountain valley, ca, 92708 USA
Product Designation:	WCDMA MOBILE PHONE
Brand name:	MAXWEST
Test Model:	ANDROID 5100
FCC ID:	ONGANDROID53
Report Number:	AGCX0M120701F2C
Date of Test:	July 07, 2012 to July 17, 2012

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules and RSS-210 requirement.

Tested By:



Leo Lee

July 20,2012

Reviewed By:



Forrest Lei

July 20,2012

Approved By:



Solger Zhang

July 20,2012

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2 TABLE OF CARRIER FREQUENCIES	4
1.3 IEEE 802.11N MODULATION SCHEME	5
1.4 RELATED SUBMITTAL(S) / GRANT (S).....	5
1.5 TEST METHODOLOGY	5
1.6 TEST FACILITY	5
1.7 SPECIAL ACCESSORIES	5
1.8 EQUIPMENT MODIFICATIONS.....	5
2. SYSTEM TEST CONFIGURATION	6
2.1 CONFIGURATION OF EUT SYSTEM.....	6
2.2 EQUIPMENT USED IN EUT SYSTEM.....	6
3. SUMMARY OF TEST RESULTS.....	7
4. DESCRIPTION OF TEST MODES	7
5 PEAK OUTPUT POWER.....	8
5.1 MEASUREMENT PROCEDURE	8
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	8
5.3 MEASUREMENT EQUIPMENT USED.....	8
5.4 LIMITS AND MEASUREMENT RESULT	9
6 6 DB BANDWIDTH.....	11
6.1 MEASUREMENT PROCEDURE	11
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
6.3 MEASUREMENT EQUIPMENT USED.....	11
6.4 LIMITS AND MEASUREMENT RESULTS.....	11
7. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY.....	21
7.1 MEASUREMENT PROCEDURE	21
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	21
7.3 MEASUREMENT EQUIPMENT USED.....	21
7.4 LIMITS AND MEASUREMENT RESULT	21
8. RADIATED EMISSION MEASUREMENT	26
8.1 MEASUREMENT PROCEDURE	26
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	26
8.3 MEASUREMENT EQUIPMENT USED.....	27
8.4 LIMITS AND MEASUREMENT RESULT	28
9 BAND EDGE EMISSION.....	33
9.1 MEASUREMENT PROCEDURE	33
9.2 TEST SET-UP	33
9.3 TEST RESULT	33
10 FCC LINE CONDUCTED EMISSION TEST	42
10.1 LIMITS OF LINE CONDUCTED EMISSION TEST	42
10.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	42
10.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	43
10.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	43
10.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST.....	44

APPENDIX I.....	46
PHOTOGRAPHS OF THE EUT.....	46
APPENDIX II.....	54
PHOTOGRAPHS OF THE TEST SETUP	54

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a WCDMA MOBILE PHONE designed as an "Wifi Device". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.412 GHz to 2.462GHz
Max. Output Power	11b:10.31dBm,11g:10.57dBm,11n(20):7.21dBm,11n(40):4.41dBm
Modulation	CCK/OFDM: BPSK,GPSK,16-QAM,64-QAM
Data Rate	DSSS(1/2/5.5/11),OFDM(6/9/12/18/24/36/48/54) See section 1.3 for 802.11n
Number of channels	11
Antenna Designation	Integrated Antenna
Antenna Gain(WIFI)	0.8dBi
Power Supply	DC 3.7V by battery

1.2 TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	1	2412MHZ
	2	2417MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462MHZ

*****Note:** For 20MHZ bandwidth system use Channel 1 to Channel 11

For 40MHZ bandwidth system use Channel 3 to Channel 9

1.3 IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps)	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

1.4 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: ONGANDROID53**, filing to comply with the FCC Part 15 and RSS-210 requirements.

1.5 TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.6 TEST FACILITY

The test site used to collect the radiated data is located on the address of
Attestation of Global Compliance (Shenzhen) Co., Ltd.

2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and IC requirements in documents RS212.

FCC register No.: 259865

1.7 SPECIAL ACCESSORIES

Refer to section 2.2.


1.8 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 CONFIGURATION OF EUT SYSTEM

Configure :



2.2 EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Note
1	WCDMA MOBILE PHONE	ANDROID 5100	FCC ID: ONGANDROID53	EUT
2	Adapter	ANDROID 5100	N/A	Accessory
3	Battery	ANDROID 5100	N/A	Accessory
4	Earphone	N/A	N/A	Accessory
5	USB Cable	N/A	N/A	Accessory

***Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant

4. DESCRIPTION OF TEST MODES

TEST MODES
Transmit by 802.11b with Date rate(1/2/5.5/11)
Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)
Transmit by 802.11n (20MHz) with Date rate(6.5/13/19.5/26/39/52/58.5/65)
Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)
Normal (Wi-Fi)

Note: 1 The EUT has been set to operate continuously on the lowest, middle and highest operation frequency individually.

2 All modes under which configure applicable have been tested and the worst mode test data recording in the test report.


3 For Radiated Emission, 3 axis were chosen for testing for each applicable modes.

5. PEAK OUTPUT POWER

5.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Connect EUT RF output port to power meter through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set the RBW greater than 6DB bandwidth of emission.
5. Record the maximum power from the power meter.

5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

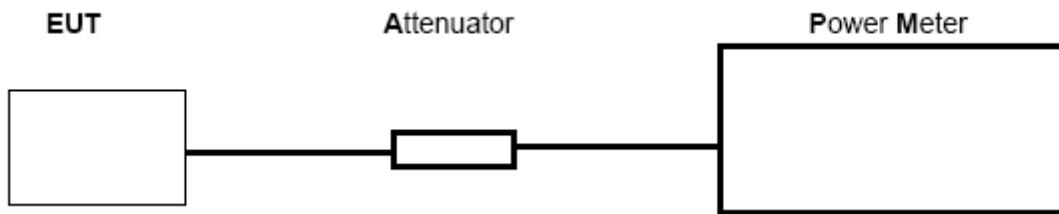

5.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Power meter	Agilent	N1911A	N/A	07/18/2012	07/17/2013
Power sensor	Agilent	N192XA	N/A	07/18/2012	07/17/2013
RF attenuator	N/A	RFA20db	N/A	N/A	N/A
AGILENT	Agilent	E4440A	N/A	07/18/2012	07/17/2013

5.4 LIMITS AND MEASUREMENT RESULT

TEST ITEM	PEAK POWER
TEST MODE	802.11b with data rate 1

LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	9.87	10.31	30	Pass
2.437	9.83	10.27	30	Pass
2.462	9.77	9.93	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11g with data rate 6

LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	9.93	10.57	30	Pass
2.437	9.89	10.51	30	Pass
2.462	9.85	10.46	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11n 20 with data rate 6.5

LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	6.47	7.21	30	Pass
2.437	6.39	7.14	30	Pass
2.462	6.23	6.93	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11n 40 with data rate 13.5


LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.422	3.96	4.41	30	Pass
2.437	3.91	4.36	30	Pass
2.452	3.87	4.27	30	Pass

6. 6 DB BANDWIDTH

6.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz,
VBW= 100 KHz.
4. Set SPA Trace 1 Max hold, then View.

6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

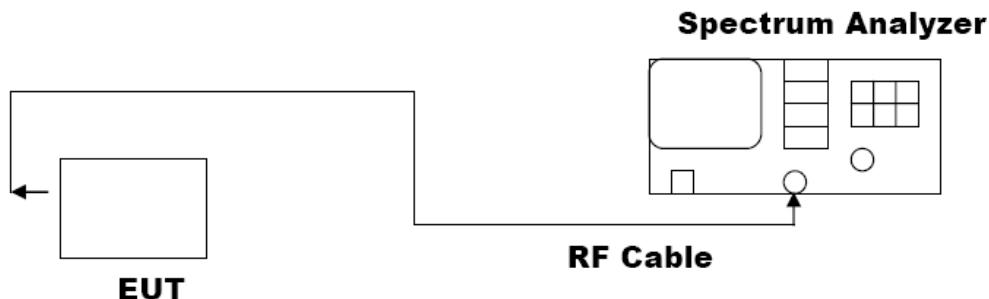

6.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	07/18/2012	07/17/2013
RF attenuator	N/A	RFA20db	N/A	N/A	N/A

6.4 LIMITS AND MEASUREMENT RESULTS

TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11b with data rate 11

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
>500KHZ	Low Channel	10.39	PASS
	Middle Channel	9.97	PASS
	High Channel	10.37	PASS

TEST ITEM	6DB BANDWIDTH		
TEST MODE	802.11g with data rate 54		

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
>500KHZ	Low Channel	16.62	PASS
	Middle Channel	16.62	PASS
	High Channel	16.64	PASS

TEST ITEM	6DB BANDWIDTH		
TEST MODE	802.11n 20 with data rate 65		

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
>500KHZ	Low Channel	17.88	PASS
	Middle Channel	17.89	PASS
	High Channel	17.88	PASS

TEST ITEM	6DB BANDWIDTH		
TEST MODE	802.11n 40 with data rate 135		

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
>500KHZ	Low Channel	36.52	PASS
	Middle Channel	36.54	PASS
	High Channel	36.51	PASS

TEST ITEM	99% OBW		
TEST MODE	802.11b with data rate 11		

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
>500KHZ	Low Channel	14.17	PASS
	Middle Channel	14.20	PASS
	High Channel	14.18	PASS

TEST ITEM	99% OBW		
TEST MODE	802.11g with data rate 54		

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
>500KHZ	Low Channel	16.57	PASS
	Middle Channel	16.56	PASS
	High Channel	16.58	PASS

TEST ITEM	99% OBW		
TEST MODE	802.11n 20 with data rate 65		


LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
>500KHZ	Low Channel	17.72	PASS
	Middle Channel	17.73	PASS
	High Channel	17.73	PASS

TEST ITEM	99% OBW
TEST MODE	802.11n 40 with data rate 135


LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)	Criteria	
>500KHZ	Low Channel	36.22	PASS
	Middle Channel	36.23	PASS
	High Channel	36.22	PASS

802.11b TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

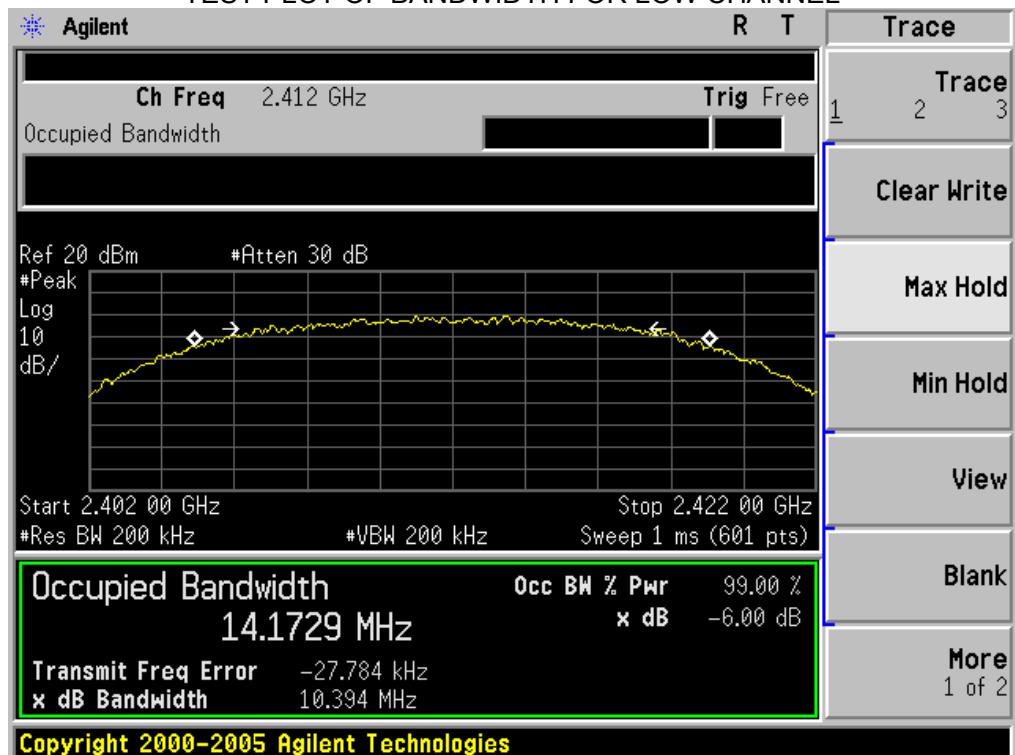

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

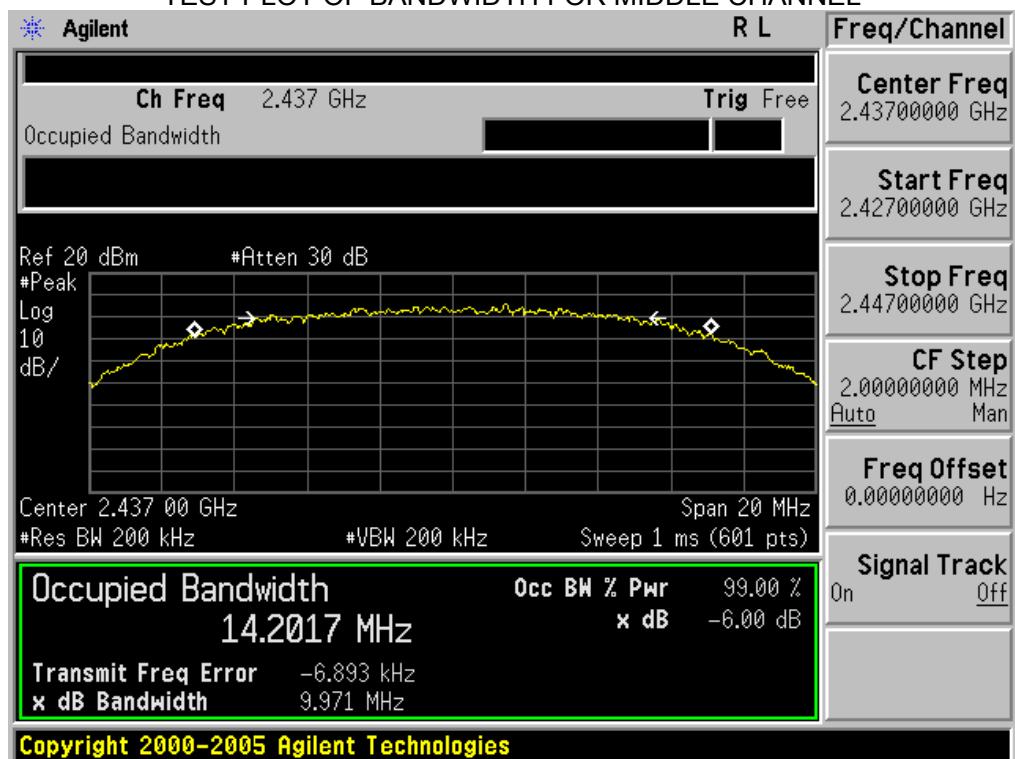


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

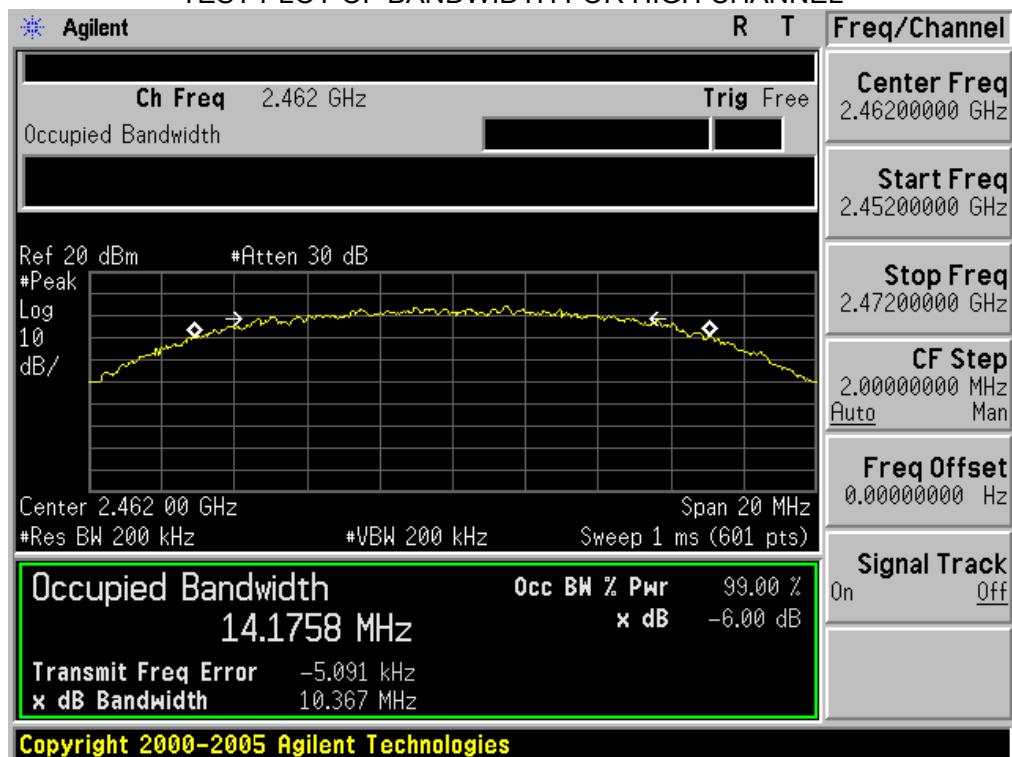


802.11g TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

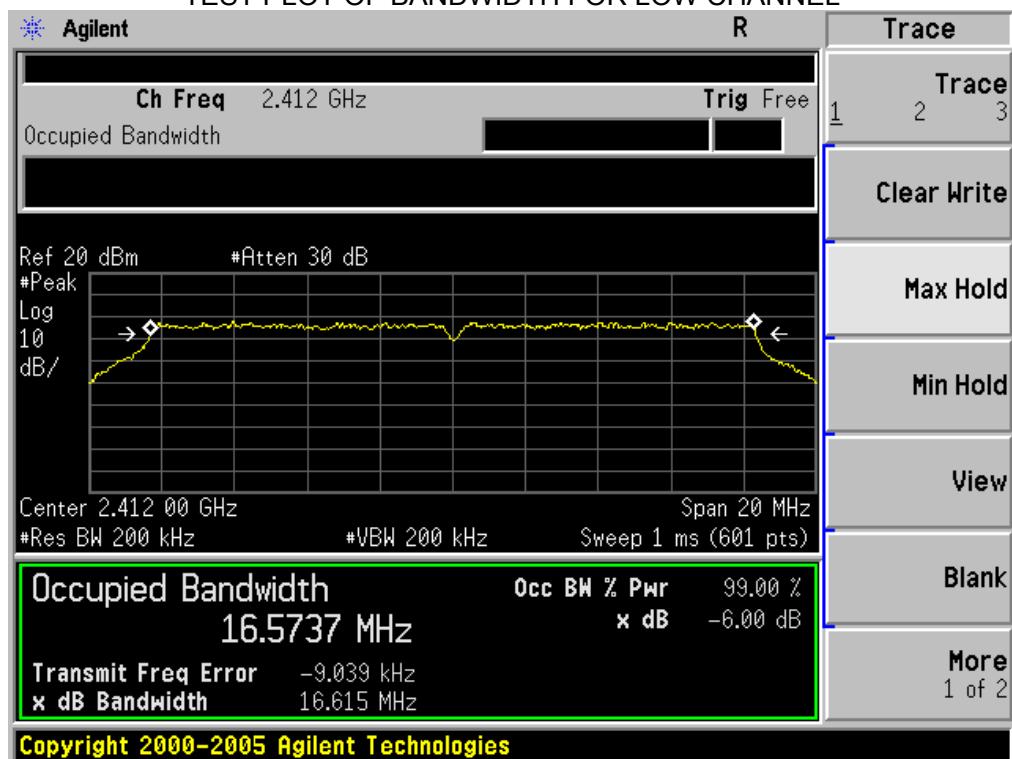

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

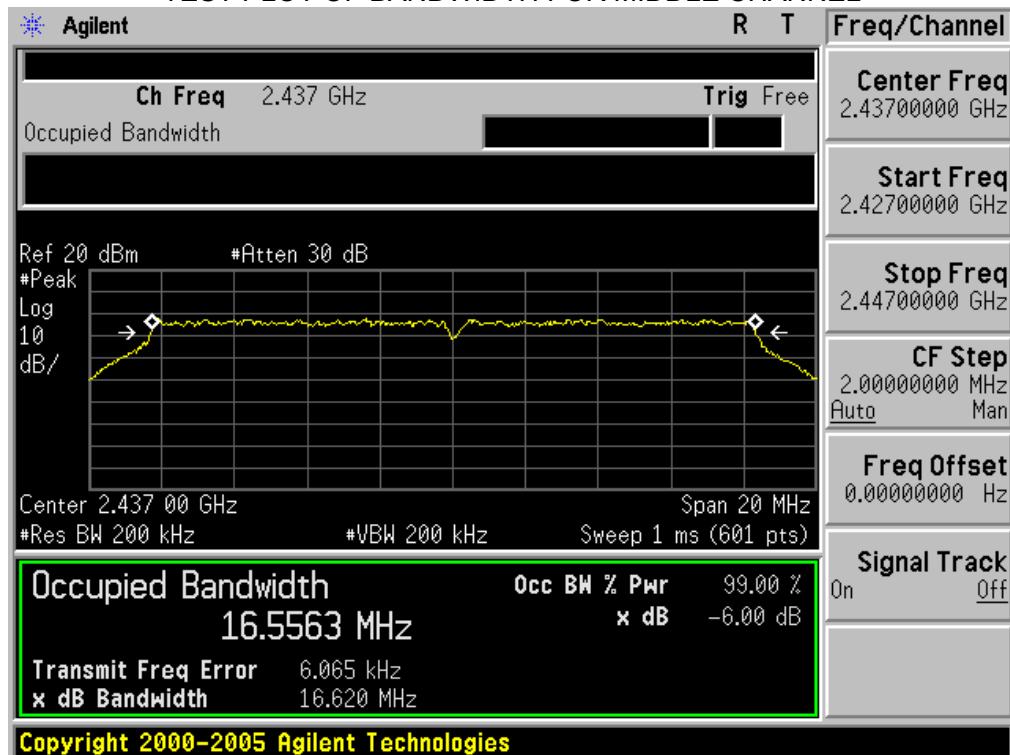


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

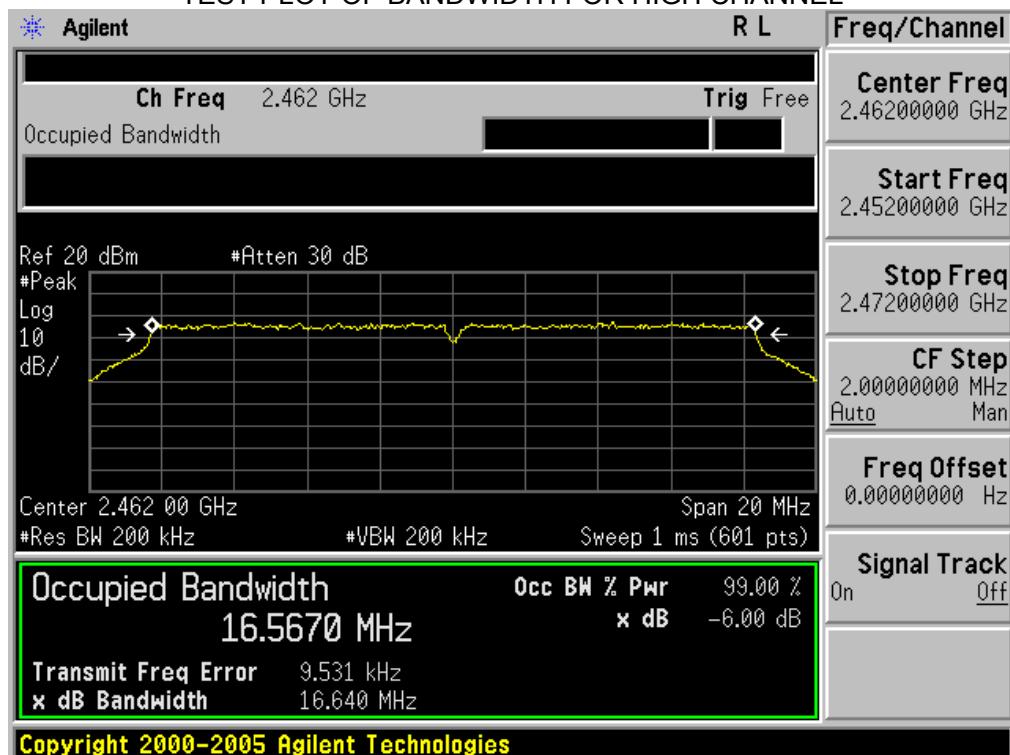


802.11n(20) TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

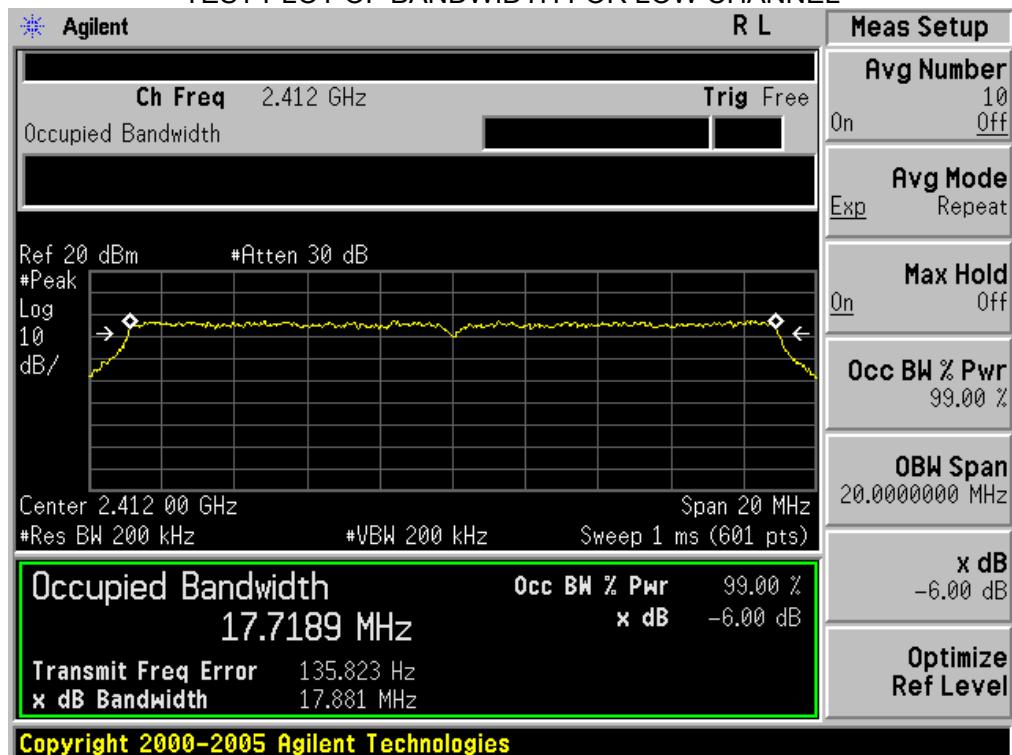

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

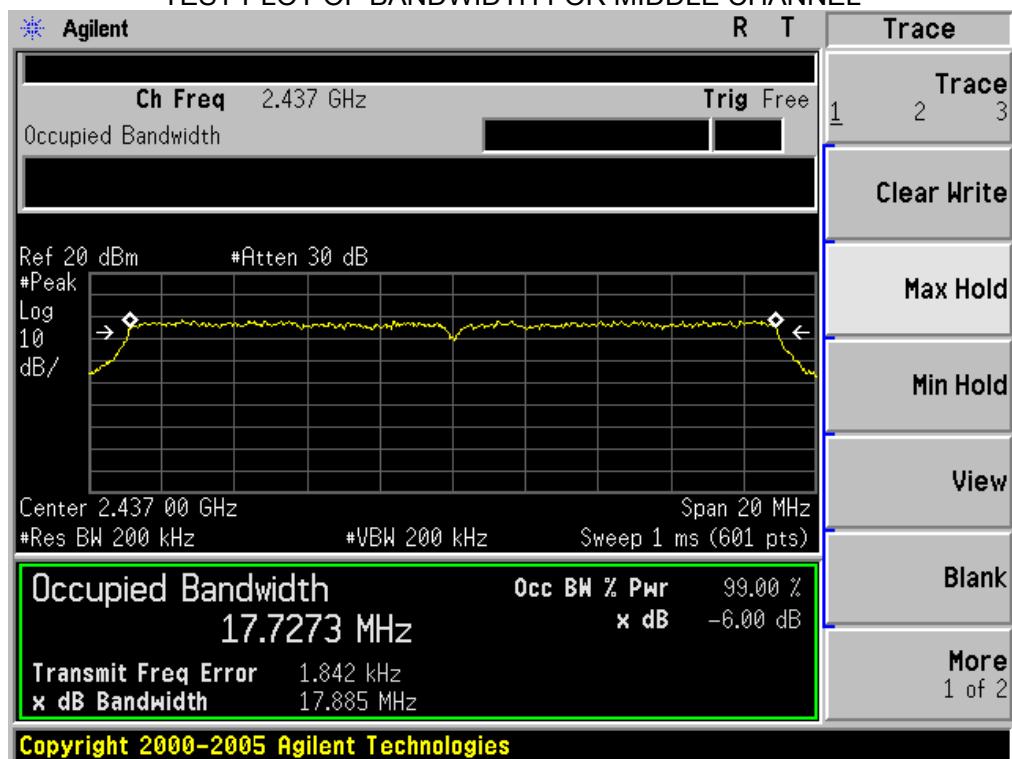


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

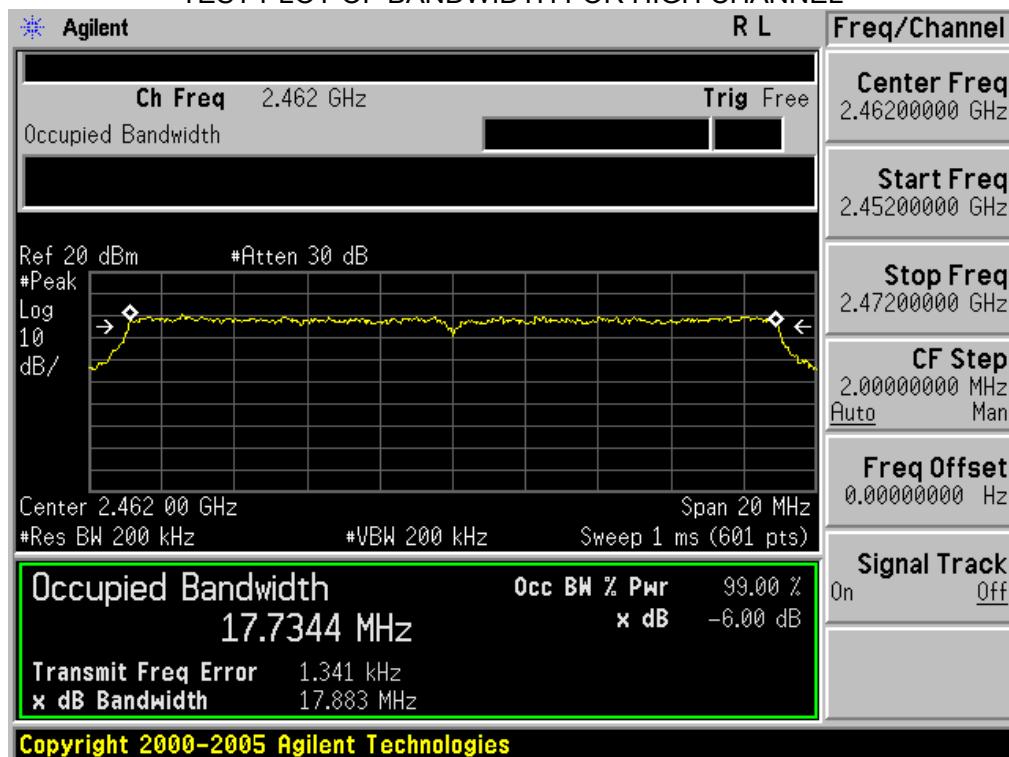


802.11n(40) TEST RESULT


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

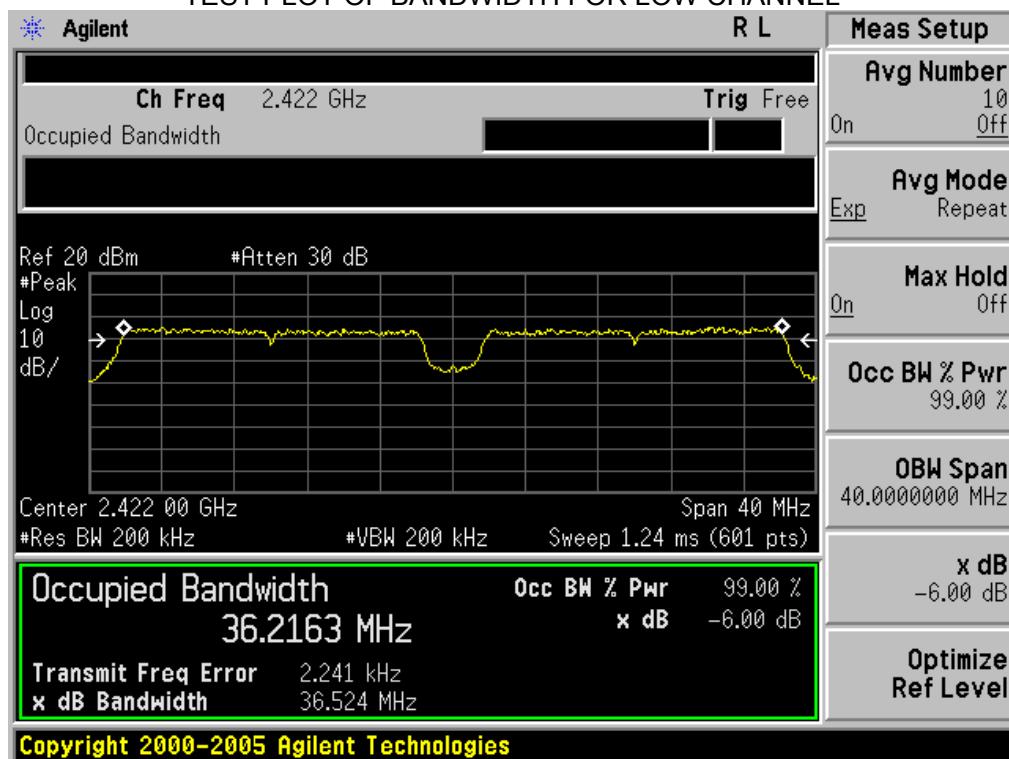

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

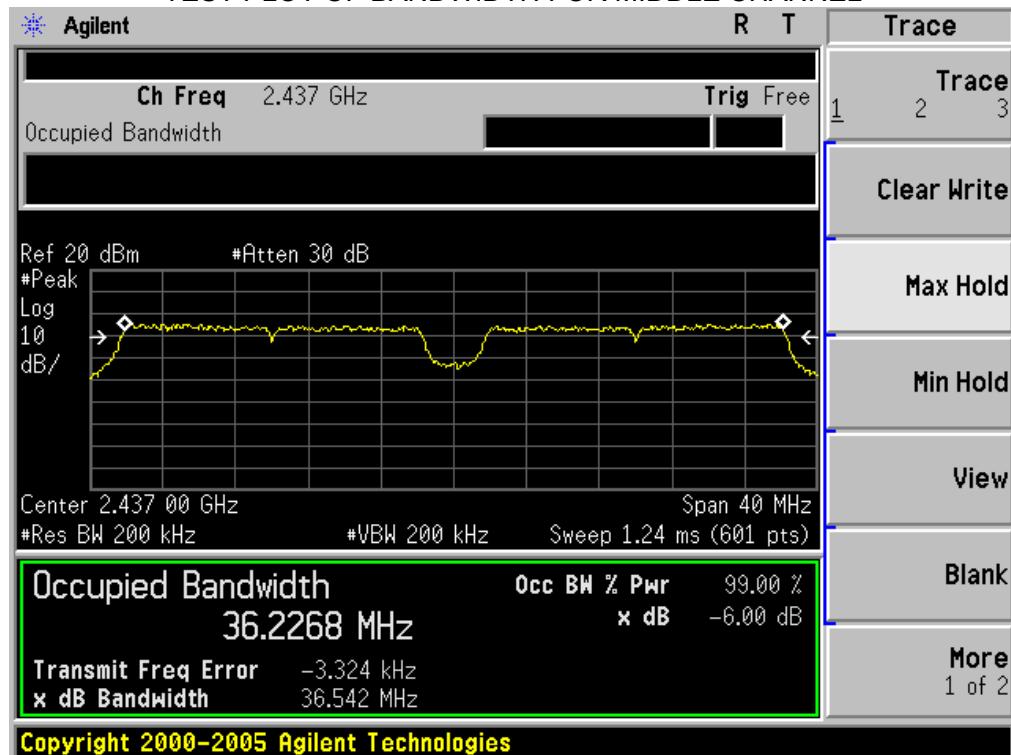

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

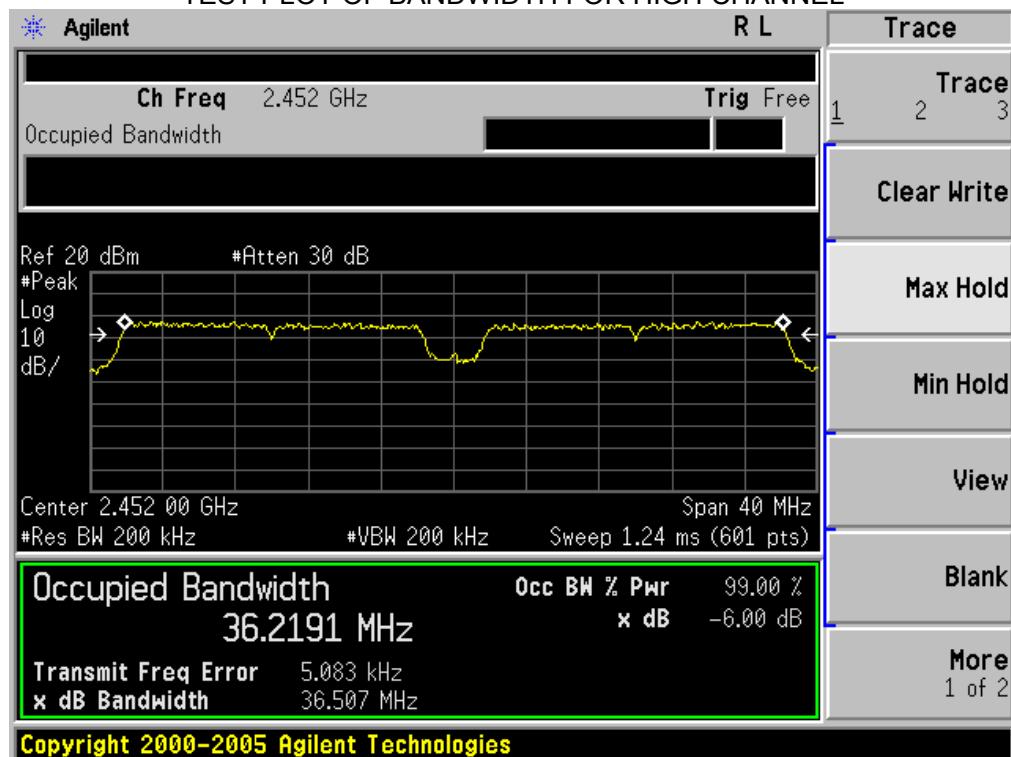

7. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

7.1 MEASUREMENT PROCEDURE

- (1). The EUT was placed on a turn table which is 0.8m above ground plane.
- (2). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (3). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (4). Set SPA Centre Frequency = Operation Frequency, RBW= 3 KHz,
VBW= 3 KHz., Sweep time= AUTO
- (5). Set SPA Trace 1 Max hold, then View.

7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 6.2

7.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.3


7.4 LIMITS AND MEASUREMENT RESULT

TEST ITEM	POWER PECTRAL DENSITY	
TEST MODE	802.11b with data rate 1	


LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (dBm/3KHz)	Criteria	
8 dBm / 3KHz	Low Channel	-16.79	Pass
	Middle Channel	-19.72	Pass
	High Channel	-17.32	Pass

TEST ITEM	POWER PECTRAL DENSITY	
TEST MODE	802.11n 20 with data rate 13.5	


LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (dBm/3KHz)	Criteria	
8 dBm / 3KHz	Low channel	-26.69	Pass
	Middle Channel	-26.08	Pass
	High channel	-25.70	Pass

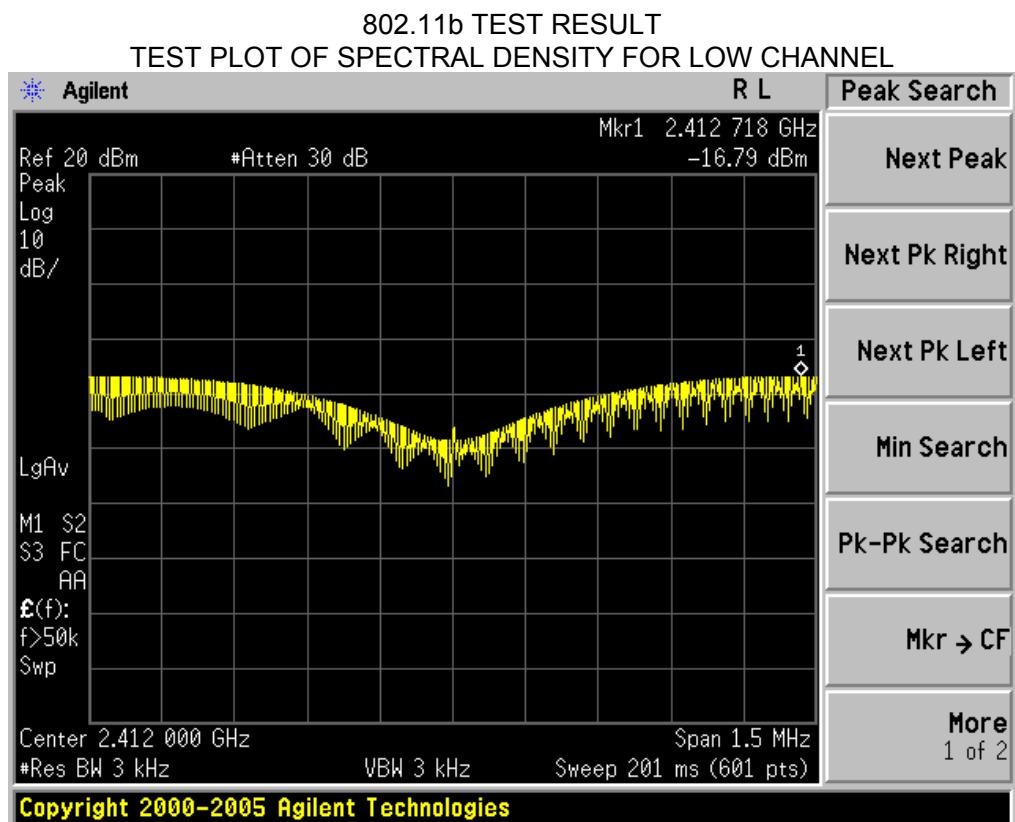

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

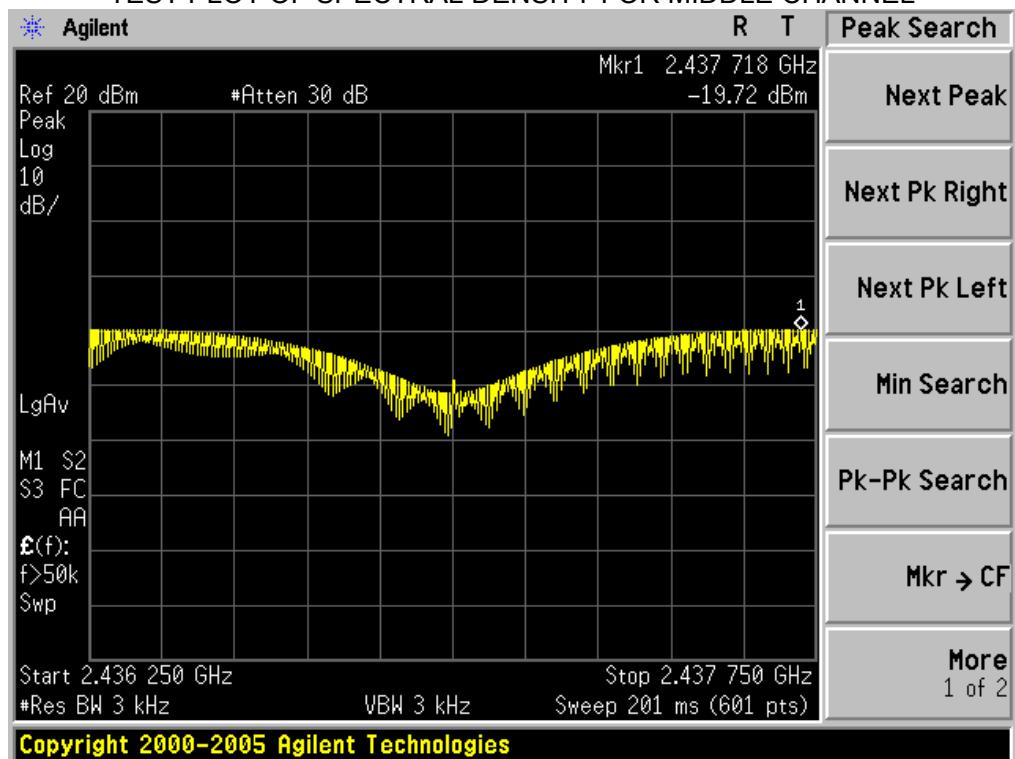


TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

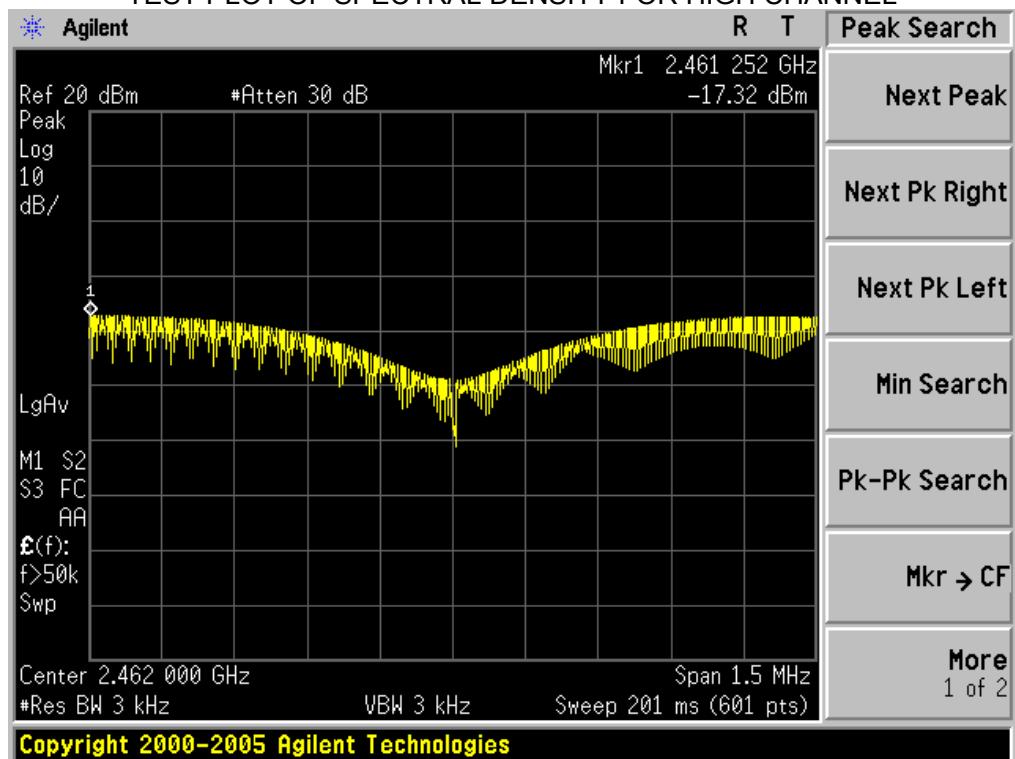



802.11n(40) TEST RESULT

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

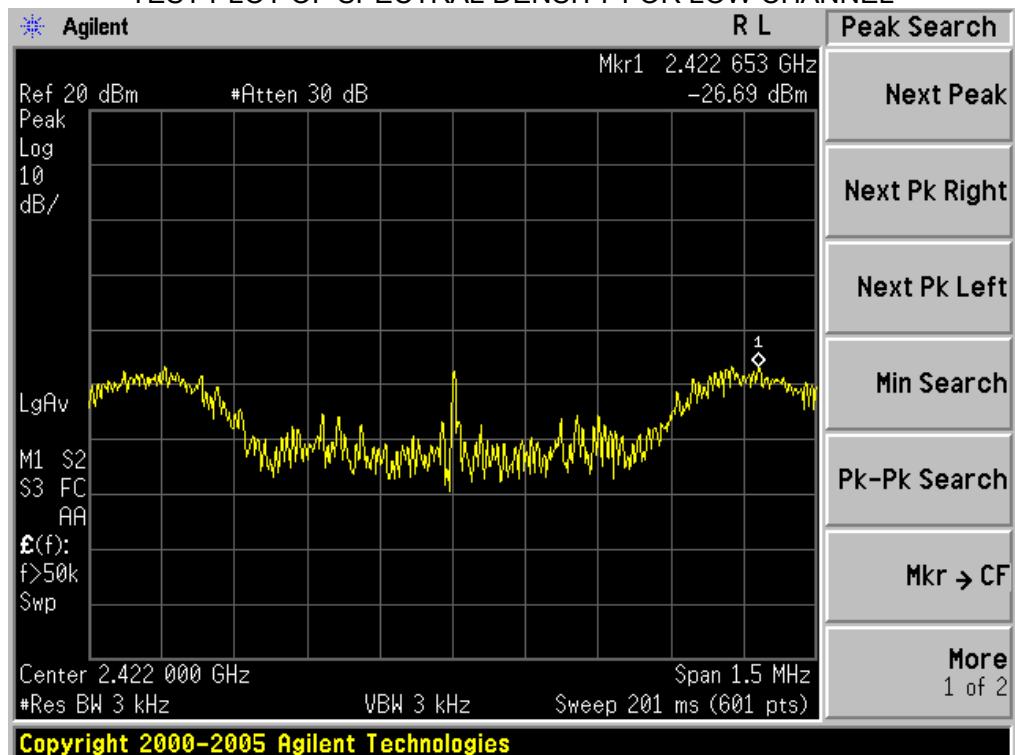

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

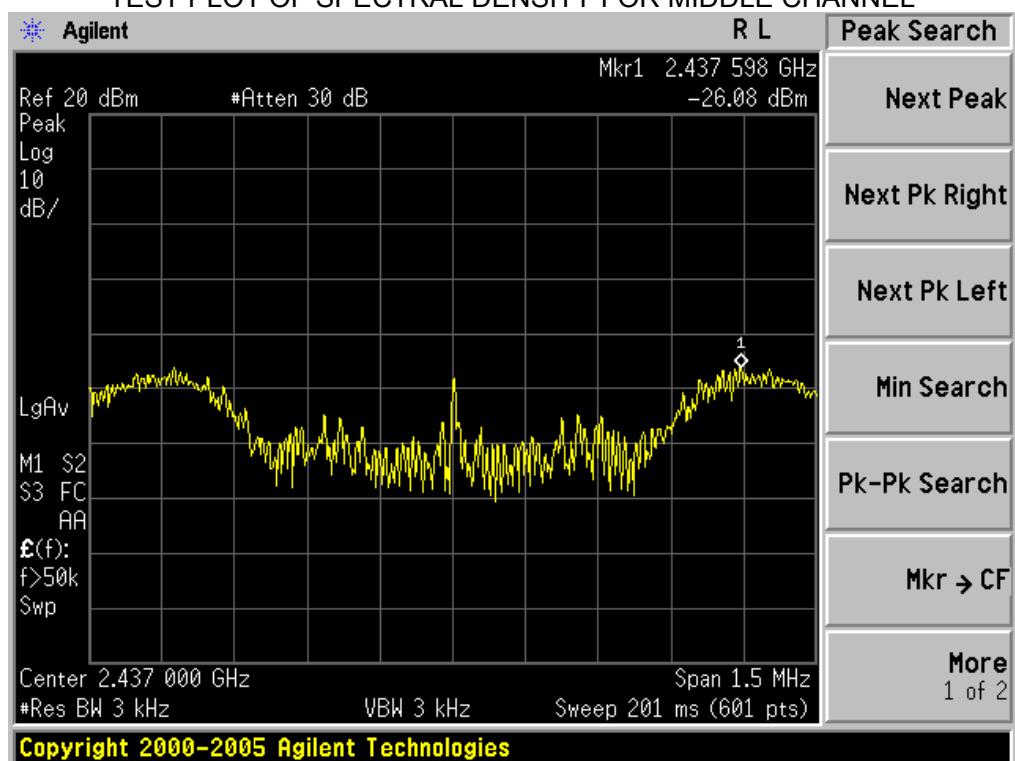

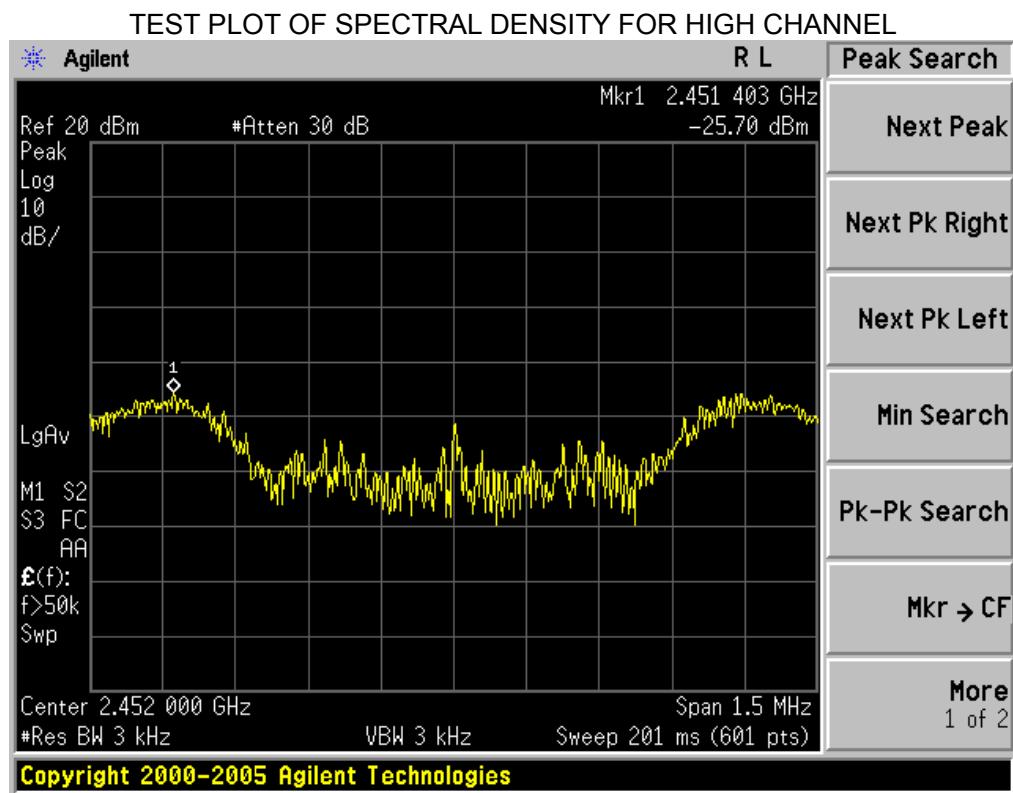


8. RADIATED EMISSION MEASUREMENT

8.1 MEASUREMENT PROCEDURE


- 1 Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2 Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3 The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4 For each suspected emissions, the antenna tower was scan (from 1M to 4M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5 Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode
- 6 For emission above 1GHZ, use 1MHZ VBW and RBW for peak reading. Then 1MHZ RBW and 10Hz VBW for average reading in spectrum analyzer.
- 7 When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one Complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the Pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 seconds interval during which the field strength is at its maximum value.
- 8 If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9 For testing above 1GHZ, the emissions level of the EUT in peak mode was lower than average limit (that Means the emissions level in peak mode also complies with the limit in average mode) then testing will be Stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average Mode again and reported.
- 10 in case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded Data should be QP measured by receiver. High-Low scan is not required in this case.

8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP BELOW 30MHz

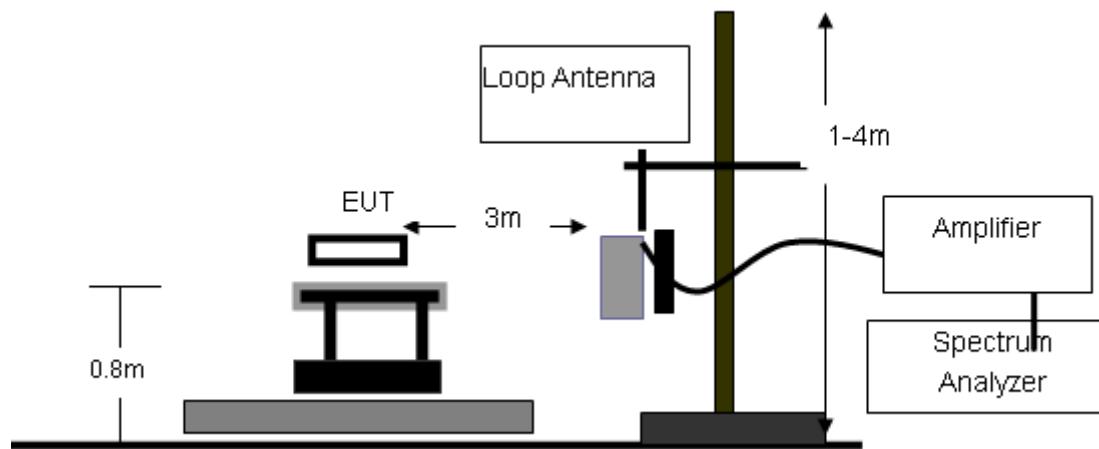

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

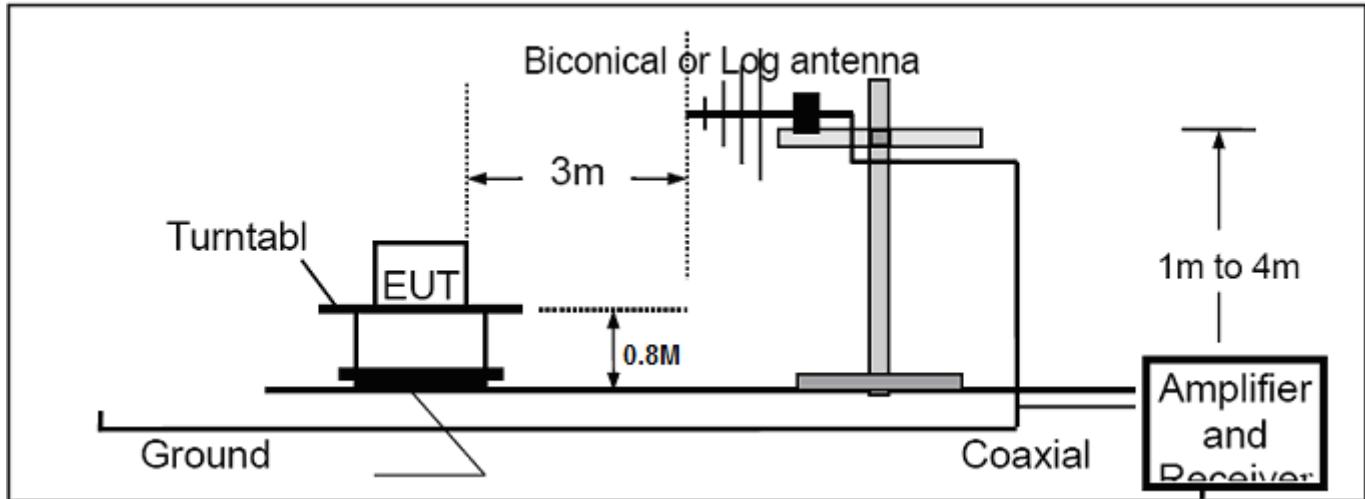

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

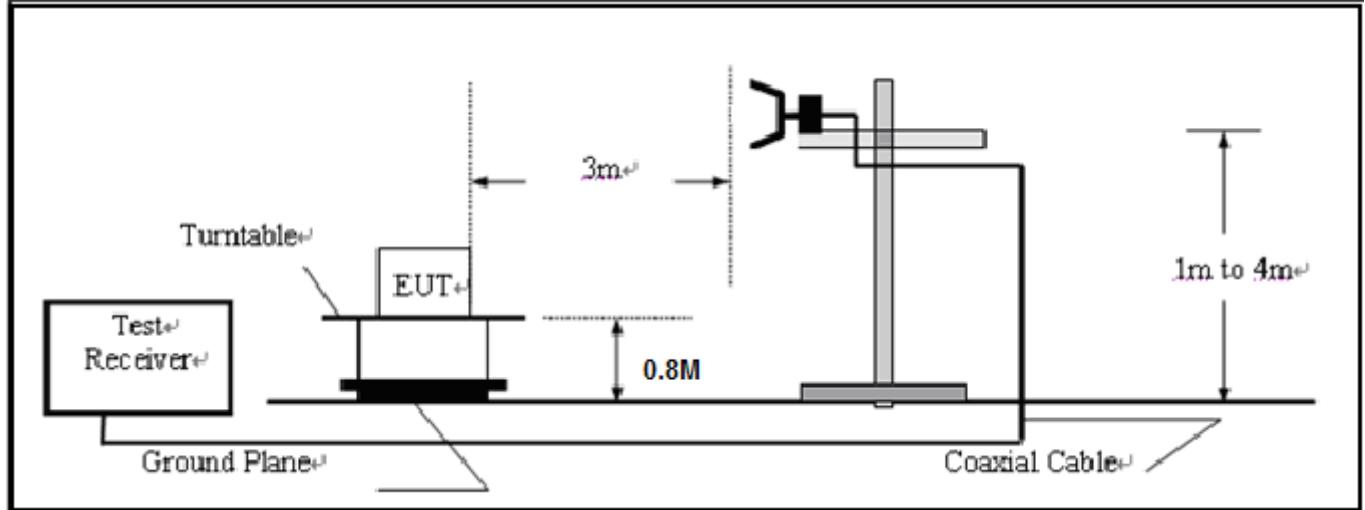

8.3 MEASUREMENT EQUIPMENT USED

Description	Manufacturer	Model	SERIAL NUMBER	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	07/18/2012	07/17/2013
Amplifier	EM	EM30180	0607030	07/18/2012	07/17/2013
Horn Antenna	EM	EM-AH-10180	N/A	07/18/2012	07/17/2013
Horn Antenna	A.H. Systems Inc.	SAS-574	--	07/18/2012	07/17/2013
EMI Test Receiver	Rohde & Schwarz	ESCI	N/A	07/18/2012	07/17/2013
Amplifier	EM	EM30180	N/A	07/18/2012	07/17/2013
Biological Antenna	A.H. Systems Inc.	SAS-521-4	N/A	07/18/2012	07/17/2013
Loop Antenna	A.H.	SAS-526B	264	07/18/2012	07/17/2013
Isolation Transformer	LETEAC	LTBK	--	07/18/2012	07/17/2013

8.4 LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed


Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,
the test records reported below are the worst result compared to other modes.

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequency to 30MHz.

RADIATED EMISSION BELOW 1GHZ

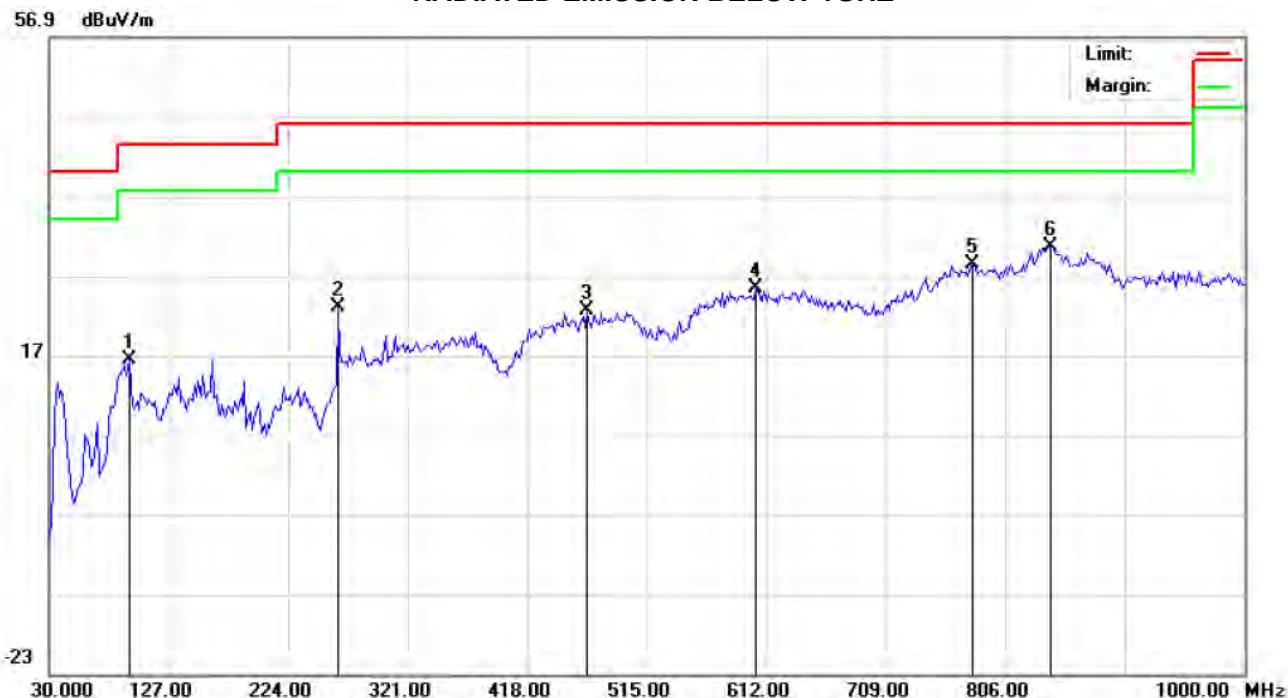

Site: site #1

Limit: FCC Class B 3M Radiation

EUT: WCDMA MOBILE PHONE

M/N: ANDROID 5100

Mode: 802.11B-Low CH-TX with rate 1

Note:

Polarization: Horizontal

Power: AC 120V/60Hz

Temperature: 26

Humidity: 60 %

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		94.6667	1.43	15.06	16.49	43.50	-27.01	peak			
2		264.4166	8.27	14.71	22.98	46.00	-23.02	peak			
3		466.5000	1.08	21.57	22.65	46.00	-23.35	peak			
4		603.9167	0.40	24.95	25.35	46.00	-20.65	peak			
5		780.1332	0.25	28.13	28.38	46.00	-17.62	peak			
6	*	843.1833	-0.31	30.99	30.68	46.00	-15.32	peak			



Site: site #1

Polarization: *Vertical*

Temperature: 26

Limit: FCC Class B 3M Radiation

Power: AC 120V/60Hz

Humidity: 60 %

FUT: WCDMA MOBILE PHONE

Distance: 3m

M/N: ANDROID 5100


Mode: 802.11B-1 gw CH-TX with rate 1

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	30.0000	24.01	3.67	27.68	40.00	-12.32	peak			
2		104.3667	10.82	9.00	19.82	43.50	-23.68	peak			
3		185.2000	10.85	8.64	19.49	43.50	-24.01	peak			
4		264.4166	5.80	14.67	20.47	46.00	-25.53	peak			
5		770.4333	2.12	27.33	29.45	46.00	-16.55	peak			
6		867.4333	1.47	29.60	31.07	46.00	-14.93	peak			

*****Note:** Measurement= Reading + Factor, Over=Measure-Limit.

RADIATED EMISSION ABOVE 1GHZ

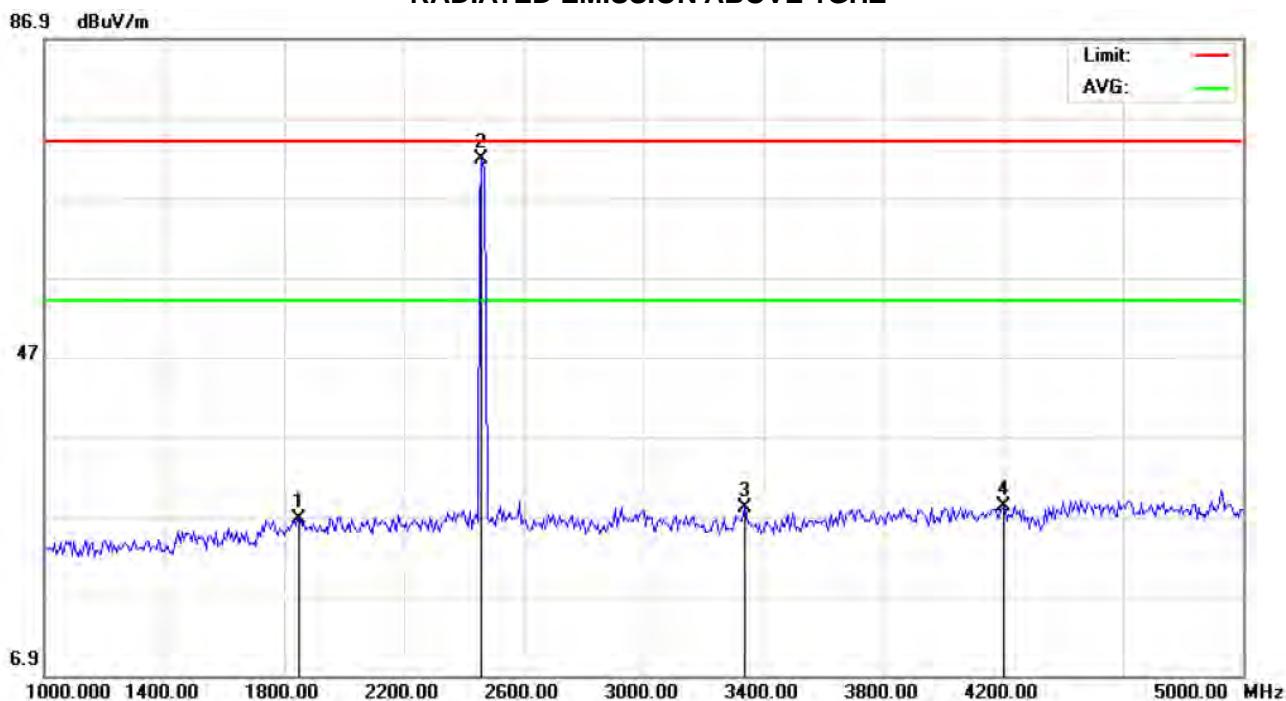

Site: site #1 Polarization: **Horizontal** Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: WCDMA MOBILE PHONE Distance: 3m


M/N: ANDROID 5100

Mode: 802.11B-Low CH-TX with rate 1

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1853.333	36.77	-10.14	26.63	74.00	-47.37	peak			
2	*	2460.000	80.02	-8.16	71.86	74.00	-2.14	peak			
3		3340.000	35.89	-7.97	27.92	74.00	-46.08	peak			
4		4200.000	34.27	-6.05	28.22	74.00	-45.78	peak			

86.9 dBuV/m

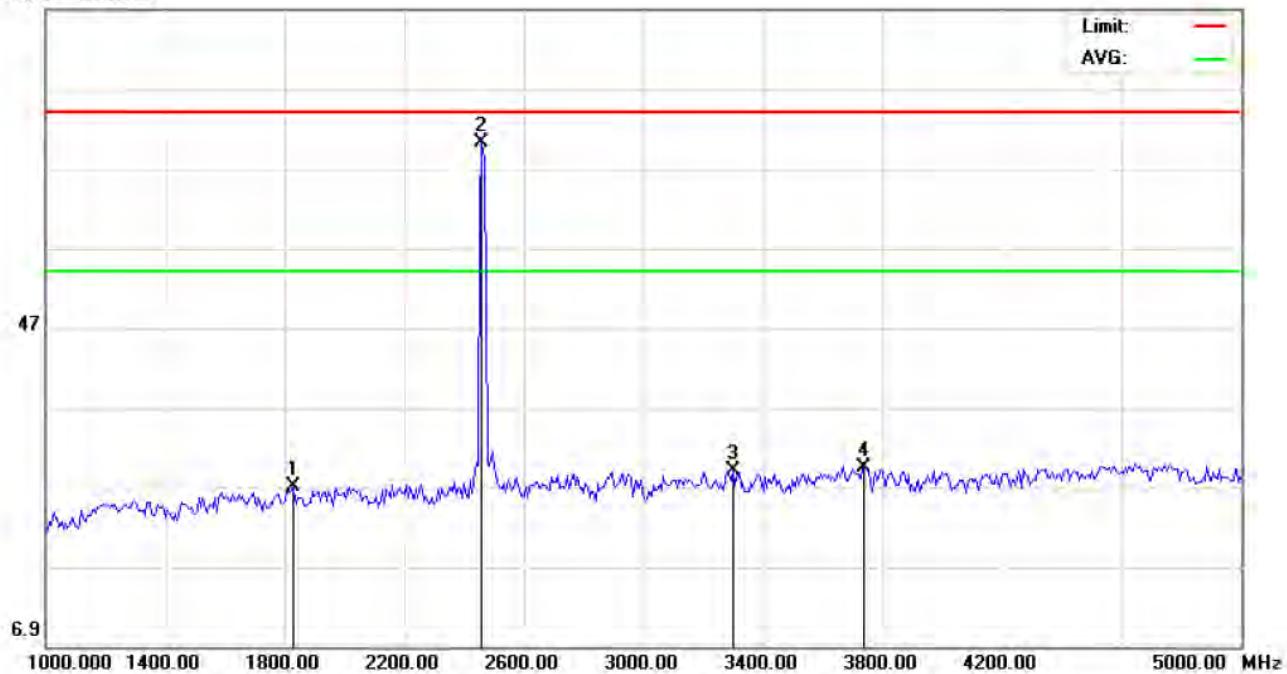

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: WCDMA MOBILE PHONE

Distance: 3m

M/N: ANDROID 5100

Mode: 802.11B-Low CH-TX with rate 1

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1826.667	37.20	-10.17	27.03	74.00	-46.97	peak			
2	*	2460.000	78.43	-8.16	70.27	74.00	-3.73	peak			
3		3300.000	37.03	-8.06	28.97	74.00	-45.03	peak			
4		3740.000	36.76	-7.37	29.39	74.00	-44.61	peak			

***Note: The other modes radiation emissions have more than 20dB margin.

Measurement= Reading + Factor, Over=Measure-Limit.

All modes radiation emission from 5GHz to 25GHz at least have 20dB margin.

9. BAND EDGE EMISSION

9.1 MEASUREMENT PROCEDURE


- 1, Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency = Operation Frequency, RBW= 1MHz,
VBW= 1MHz.
3. The band edges was measured and recorded.

9.2 TEST SET-UP

The same as described in section 8.2

9.3 TEST RESULT

86.9 dBuV/m

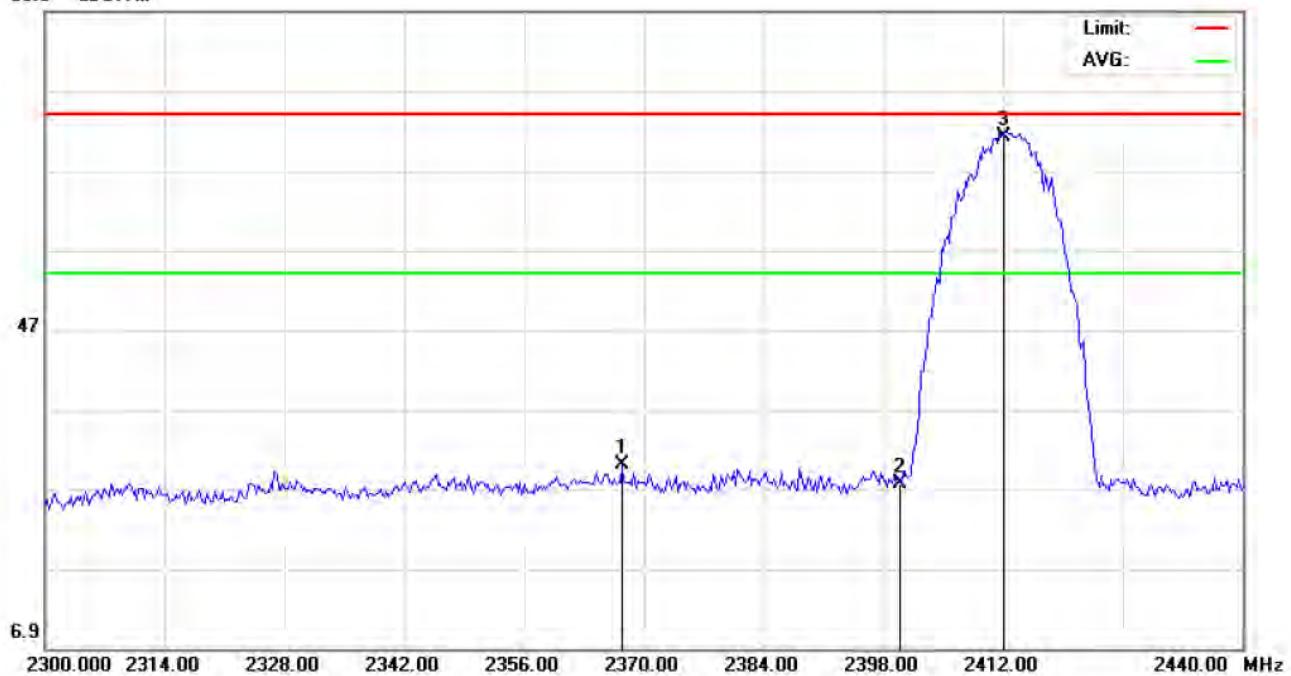

Site: site #1 Polarization: **Horizontal** Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %


EUT: WCDMA MOBILE PHONE Distance: 3m

M/N: ANDROID 5100

Mode: 802.11B-Low CH-TX with rate 11

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2367.433	38.55	-8.53	30.02	74.00	-43.98	peak			
2		2400.000	35.95	-8.40	27.55	74.00	-46.45	peak			
3	*	2412.000	79.60	-8.35	71.25	74.00	-2.75	peak			

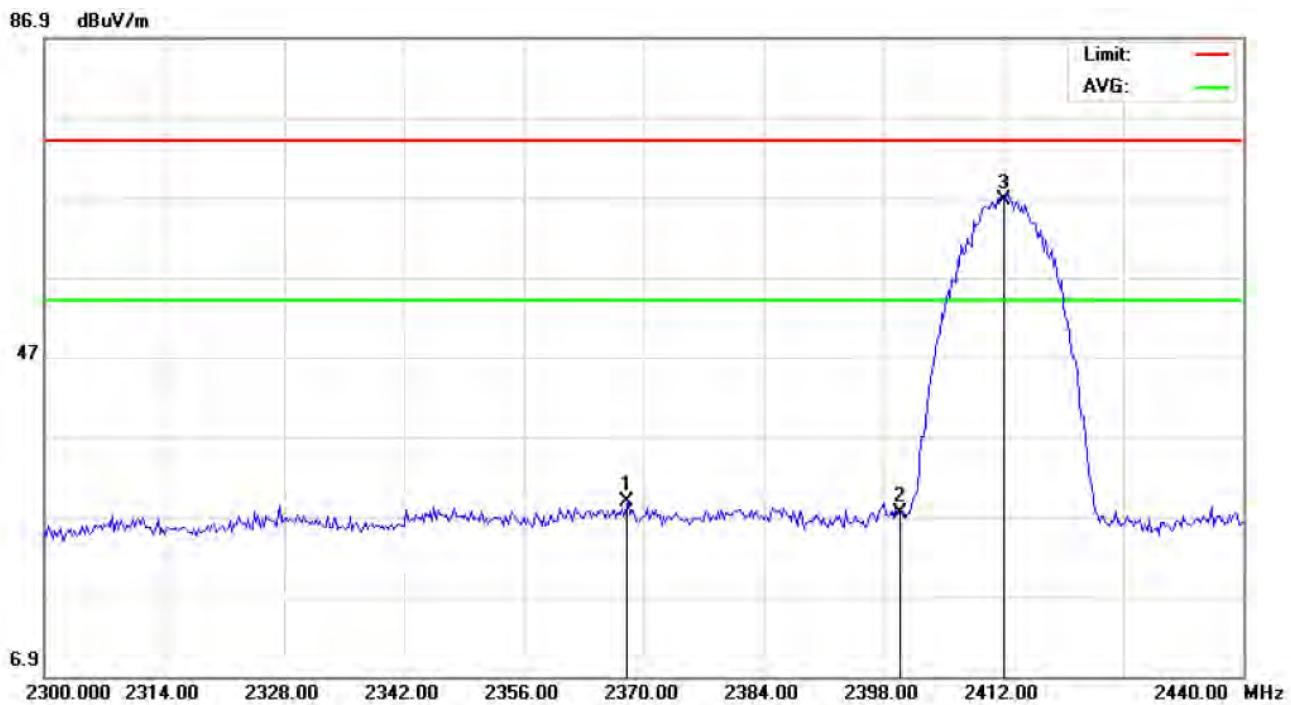

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %
EUT: WCDMA MOBILE PHONE Distance: 3m
M/N: ANDROID 5100
Mode: 802.11B-Low CH-TX with rate 11
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2368.133	37.29	-8.53	28.76	74.00	-45.24	peak			
2		2400.000	35.74	-8.40	27.34	74.00	-46.66	peak			
3	*	2412.000	74.96	-8.35	66.61	74.00	-7.39	peak			

86.9 dBuV/m



Site: site #1 Polarization: *Horizontal* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %
 EUT: WCDMA MOBILE PHONE Distance: 3m
 M/N: ANDROID 5100
 Mode: 802.11B-High CH-TX with rate 11
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	79.71	-8.15	71.56	74.00	-2.44	peak			
2		2483.500	33.45	-8.07	25.38	74.00	-48.62	peak			
3		2554.933	37.39	-8.08	29.31	74.00	-44.69	peak			


86.9 dBuV/m



Site: site #1 Polarization: *Vertical* Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %
 EUT: WCDMA MOBILE PHONE Distance: 3m
 M/N: ANDROID 5100
 Mode: 802.11B-High CH-TX with rate 11
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	76.70	-8.15	68.55	74.00	-5.45	peak			
2		2483.500	33.18	-8.07	25.11	74.00	-48.89	peak			
3		2521.067	36.65	-8.03	28.62	74.00	-45.38	peak			


86.9 dBuV/m

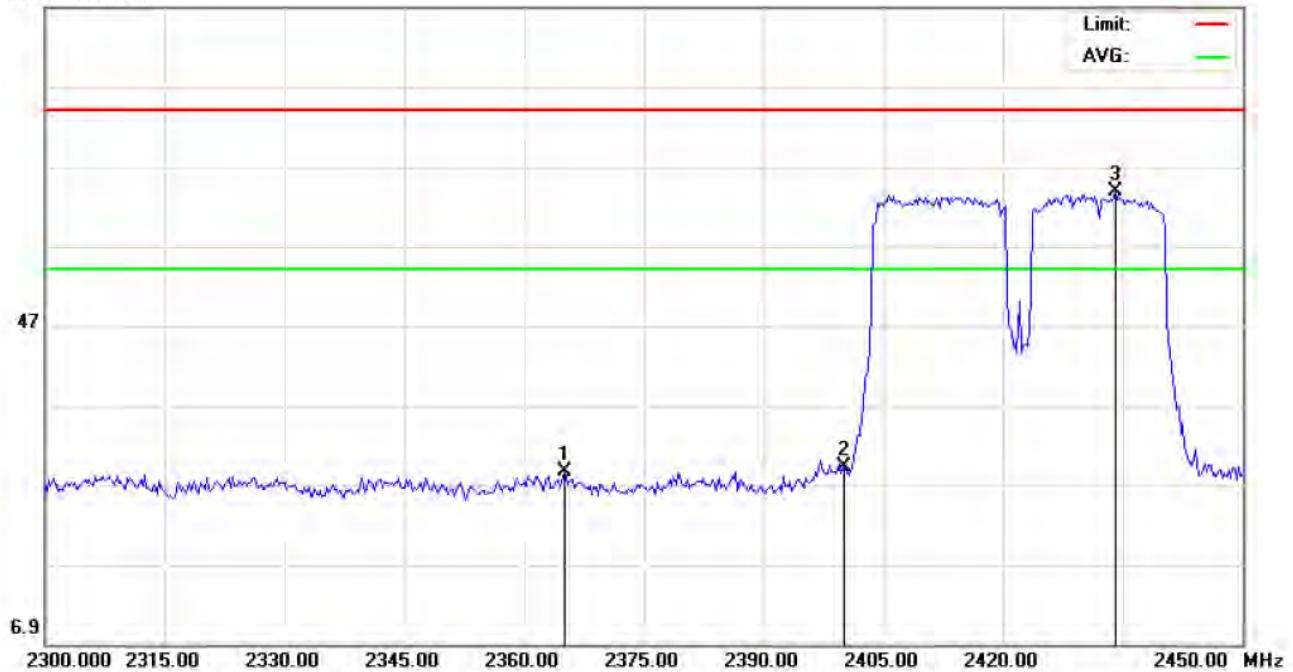

Site: site #1 Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %
EUT: WCDMA MOBILE PHONE Distance: 3m
M/N: ANDROID 5100
Mode: 802.11N(40)-Low CH-TX with rate 135
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2365.000	37.15	-8.54	28.61	74.00	-45.39	peak			
2		2400.000	37.69	-8.40	29.29	74.00	-44.71	peak			
3	*	2434.000	72.02	-8.26	63.76	74.00	-10.24	peak			

86.9 dBuV/m

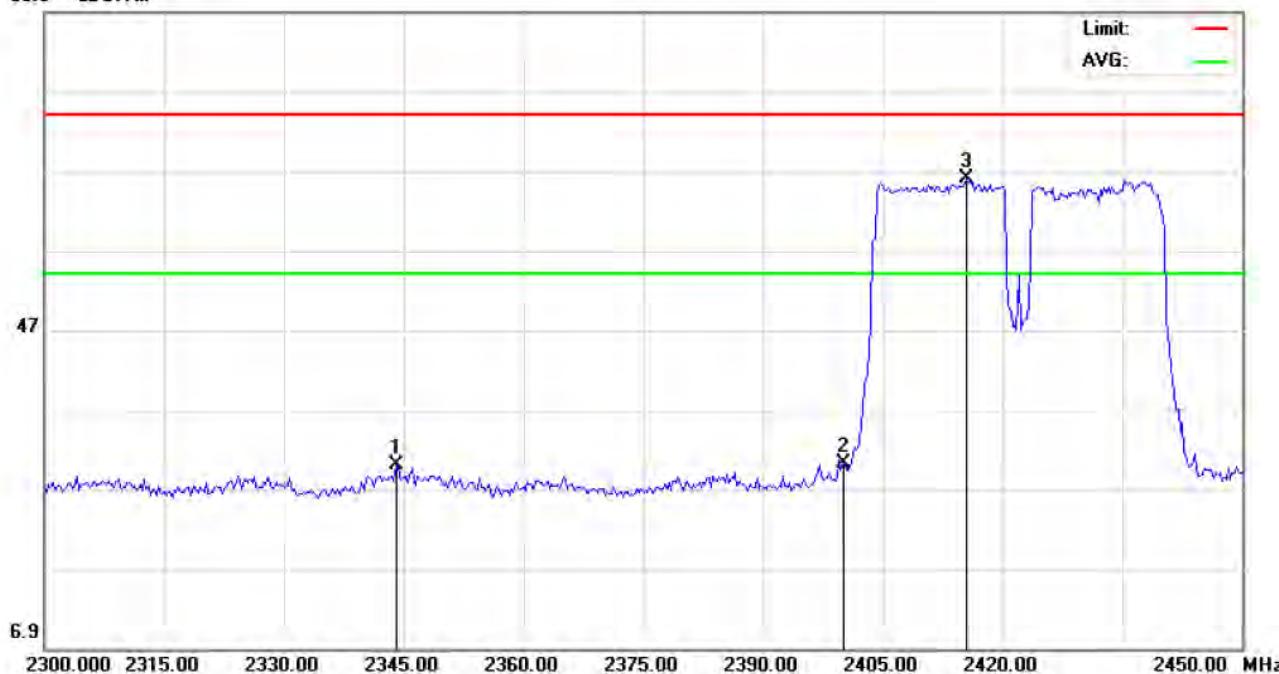

Site: site #1 Polarization: **Vertical** Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz

Humidity: 60 %

EUT: WCDMA MOBILE PHONE

Distance: 3m

M/N: ANDROID 5100

Mode: 802.11N(40)-Low CH-TX with rate 135

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2344.000	38.66	-8.62	30.04	74.00	-43.96	peak			
2		2400.000	38.69	-8.40	30.29	74.00	-43.71	peak			
3	*	2415.500	74.25	-8.34	65.91	74.00	-8.09	peak			

86.9 dBuV/m



Site: site #1 Polarization: *Vertical* Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %

EUT: WCDMA MOBILE PHONE Distance: 3m

M/N: ANDROID 5100

Mode: 802.11N(40)-High CH-TX with rate 135

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2461.450	76.49	-8.15	68.34	74.00	-5.66	peak			
2		2483.500	40.18	-8.07	32.11	74.00	-41.89	peak			
3		2518.967	38.56	-8.03	30.53	74.00	-43.47	peak			



Site: site #1 Polarization: **Horizontal** Temperature: 26
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: AC 120V/60Hz Humidity: 60 %
 EUT: WCDMA MOBILE PHONE Distance: 3m
 M/N: ANDROID 5100
 Mode: 802.11N(40)-High CH-TX with rate 135
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2468.250	77.96	-8.13	69.83	74.00	-4.17	peak			
2		2483.500	41.41	-8.07	33.34	74.00	-40.66	peak			
3		2502.817	43.09	-8.00	35.09	74.00	-38.91	peak			

***Note: The other modes radiation emission have enough 20dB margin.
 Measurement= Reading + Factor, Over=Measure-Limit.

10. FCC LINE CONDUCTED EMISSION TEST


10.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average (dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

**Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

10.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

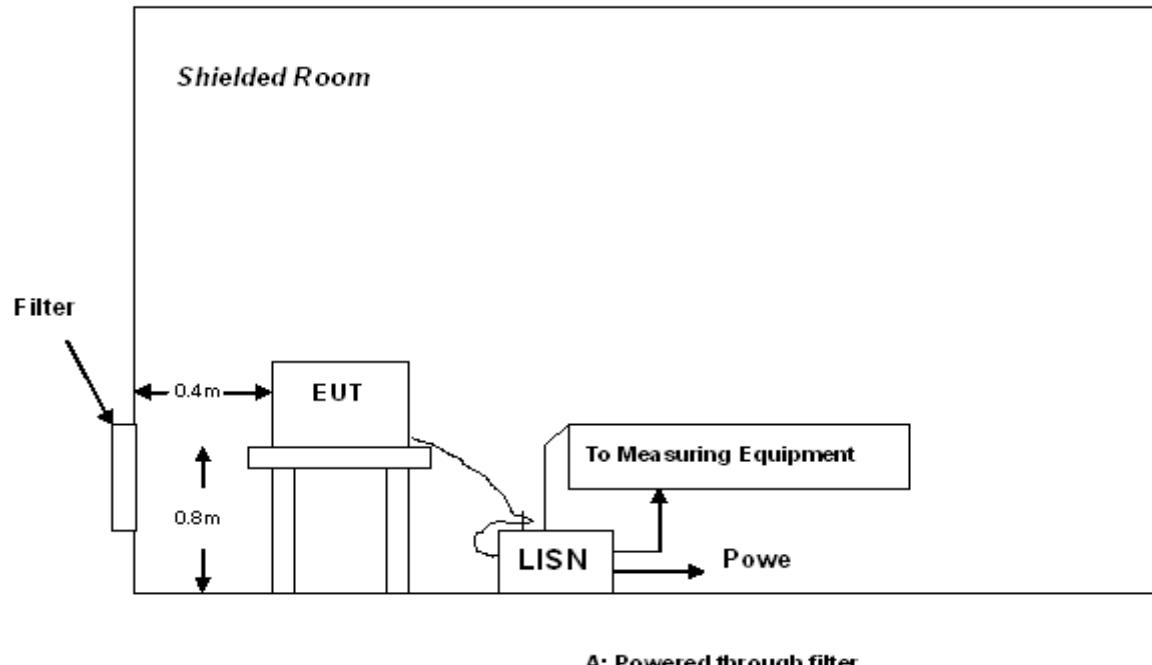

10.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V power from a LISN, if any.
- 5) The EUT received DC 5V charged voltage by adapter which received 120V/60Hz power from a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) All test mode(s) were scanned during the preliminary test.

10.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

10.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST


TEST RESULT OF L LINE

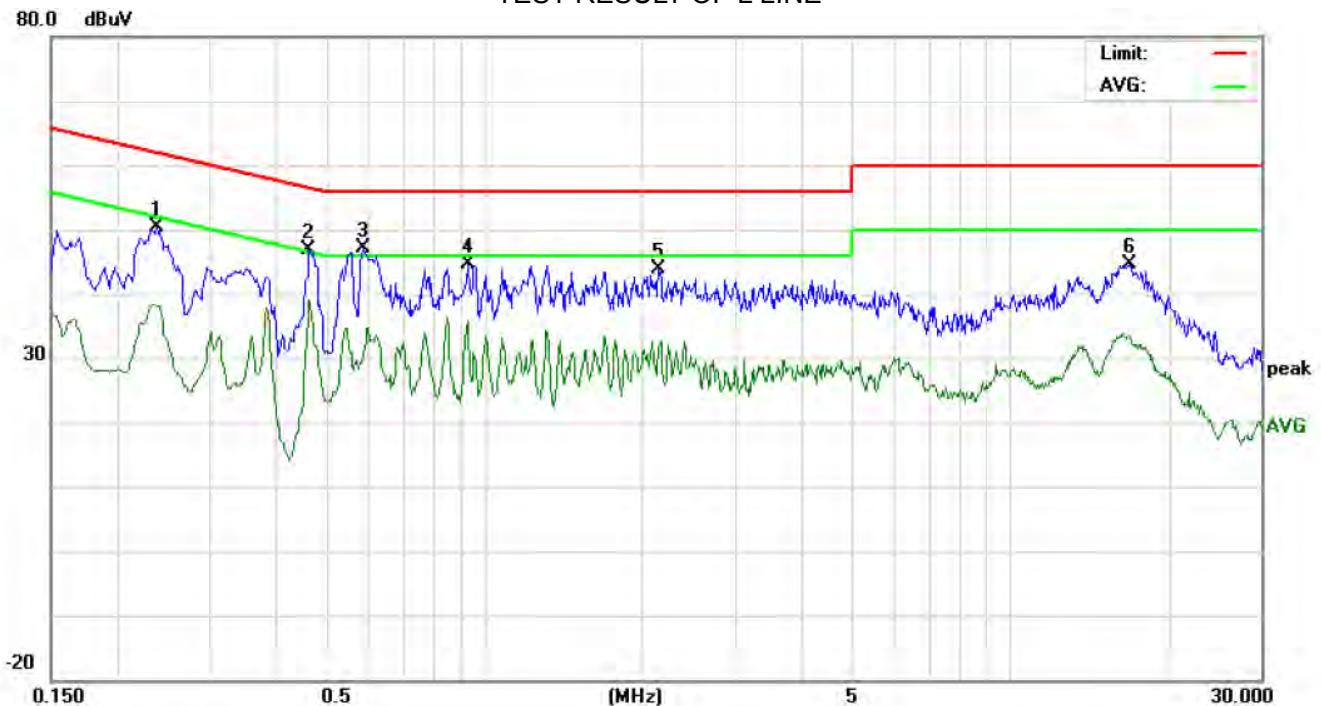

Site: Conduction Phase: **L1** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: WCDMA MOBILE PHONE
 M/N: ANDROID 5100
 Mode: Normal (WIFI)
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2379	39.99		27.98	10.26	50.25		38.24	62.17	52.17	-11.92	-13.93	P	
2	0.4660	36.55		28.67	10.38	46.93		39.05	56.58	46.58	-9.65	-7.53	P	
3	0.5899	36.85		20.24	10.32	47.17		30.56	56.00	46.00	-8.83	-15.44	P	
4	0.9300	34.11		25.36	10.40	44.51		35.76	56.00	46.00	-11.49	-10.24	P	
5	2.1538	33.49		21.10	10.28	43.77		31.38	56.00	46.00	-12.23	-14.62	P	
6	16.8699	34.55		23.13	10.13	44.68		33.26	60.00	50.00	-15.32	-16.74	P	

TEST RESULT OF N LINE

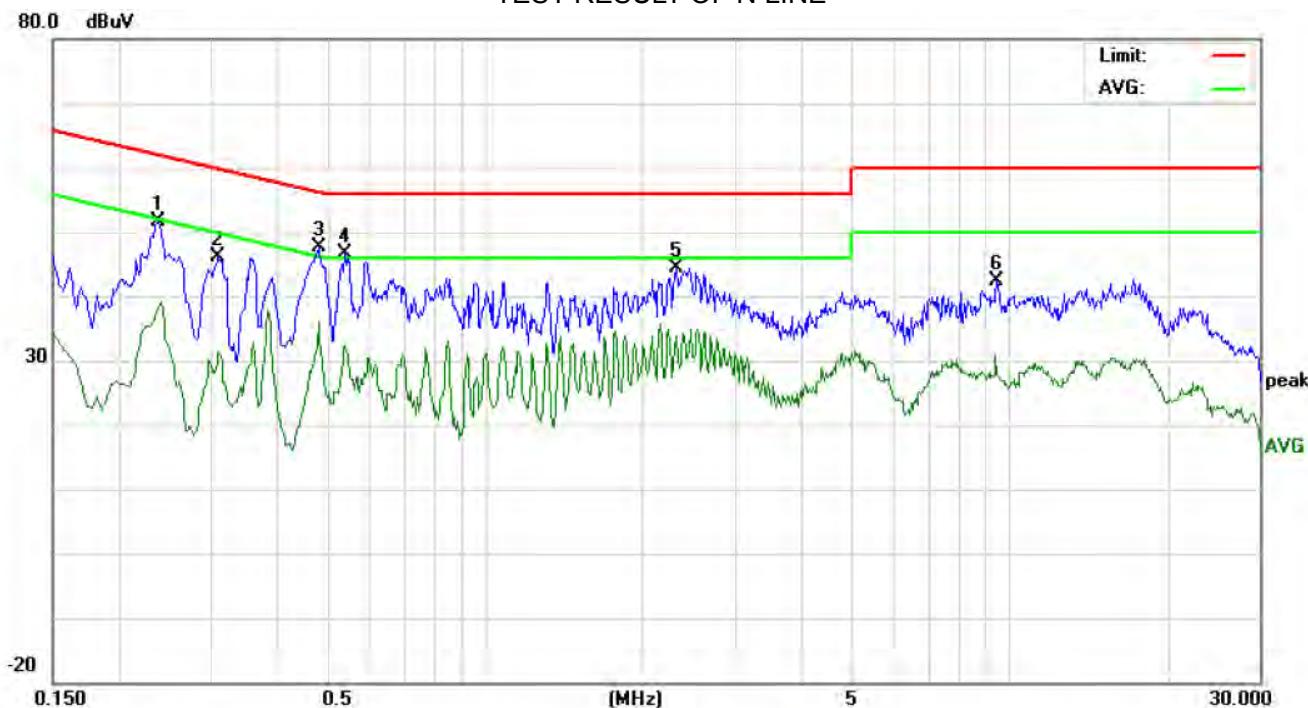

Site: Conduction Phase: **N** Temperature: 26

Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

EUT: WCDMA MOBILE PHONE

M/N: ANDROID 5100

Mode: Normal (WIFI)

Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		dB	Peak	QP	AVG	QP	AVG	QP	AVG	
1	0.2379	41.25		28.06	10.26	51.51		38.32	62.17	52.17	-10.66	-13.85	P	
2	0.3099	35.84		21.06	10.29	46.13		31.35	59.97	49.97	-13.84	-18.62	P	
3	0.4819	37.15		25.64	10.39	47.54		36.03	56.31	46.31	-8.77	-10.28	P	
4	0.5420	36.22		21.90	10.36	46.58		32.26	56.00	46.00	-9.42	-13.74	P	
5	2.3220	34.02		23.40	10.36	44.38		33.76	56.00	46.00	-11.62	-12.24	P	
6	9.4539	32.06		17.57	10.36	42.42		27.93	60.00	50.00	-17.58	-22.07	P	

APPENDIX I
PHOTOGRAPHS OF THE EUT
TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



OPEN VIEW OF EUT-1



INTERNAL VIEW OF EUT-1




BT&
WIFI
Antenna

GSM&
WCDMA
Antenna

INTERNAL VIEW OF EUT-2




INTERNAL VIEW OF EUT-3

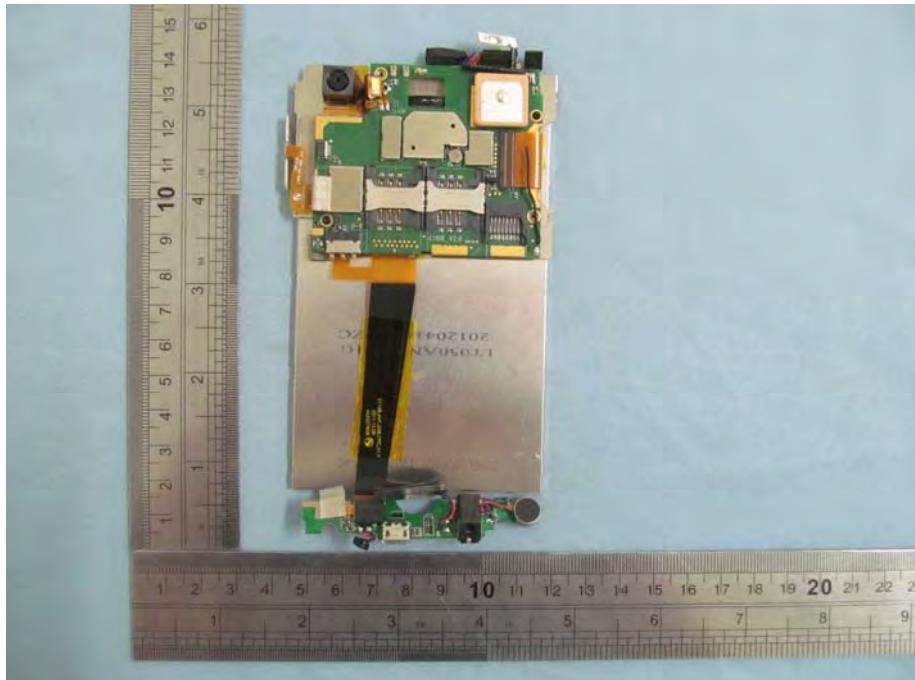


INTERNAL VIEW OF EUT-4




INTERNAL VIEW OF EUT-5

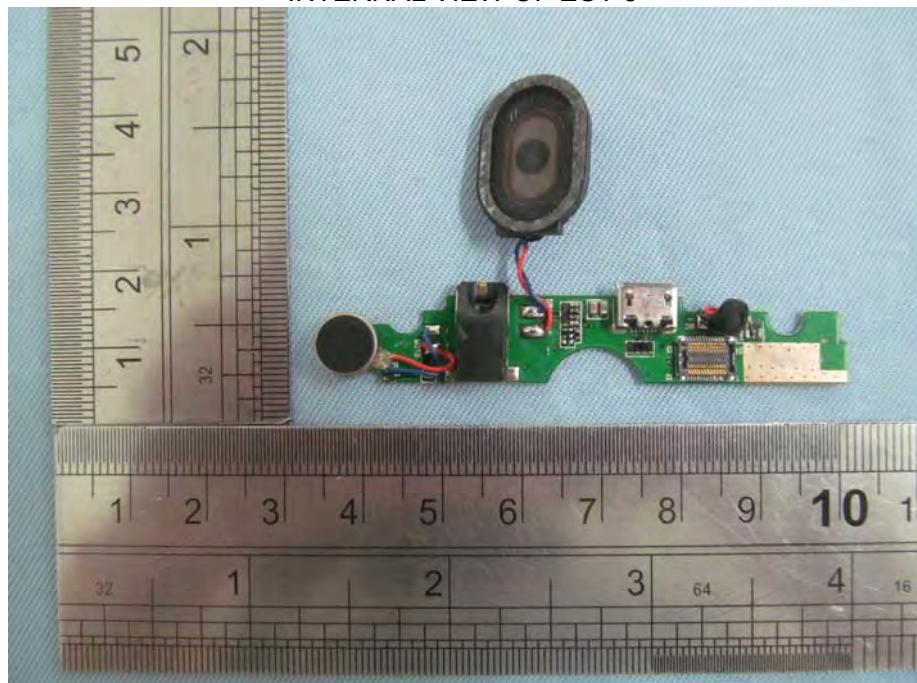


INTERNAL VIEW OF EUT-6

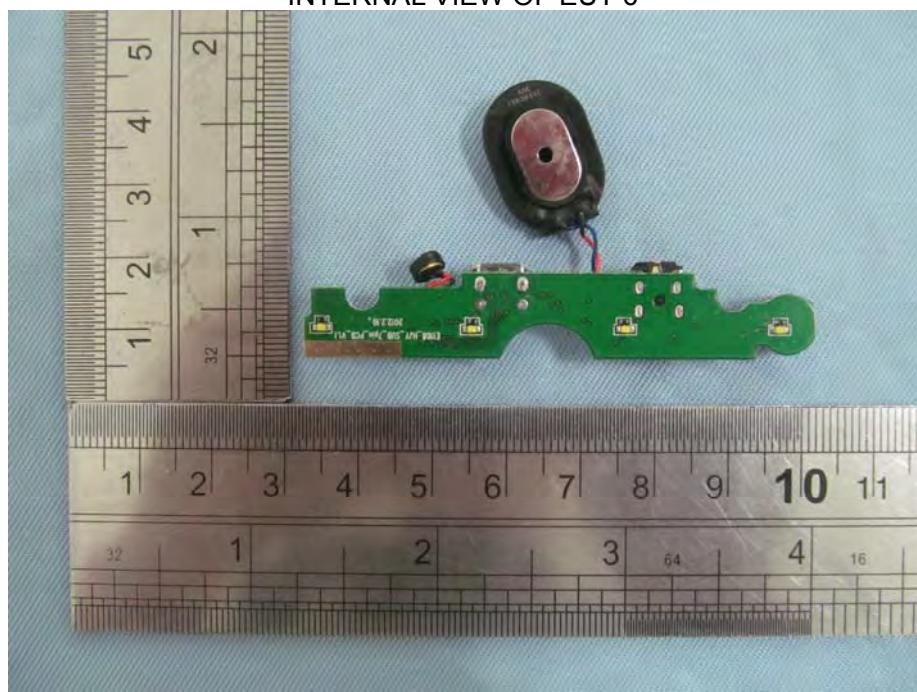

INTERNAL VIEW OF EUT-7

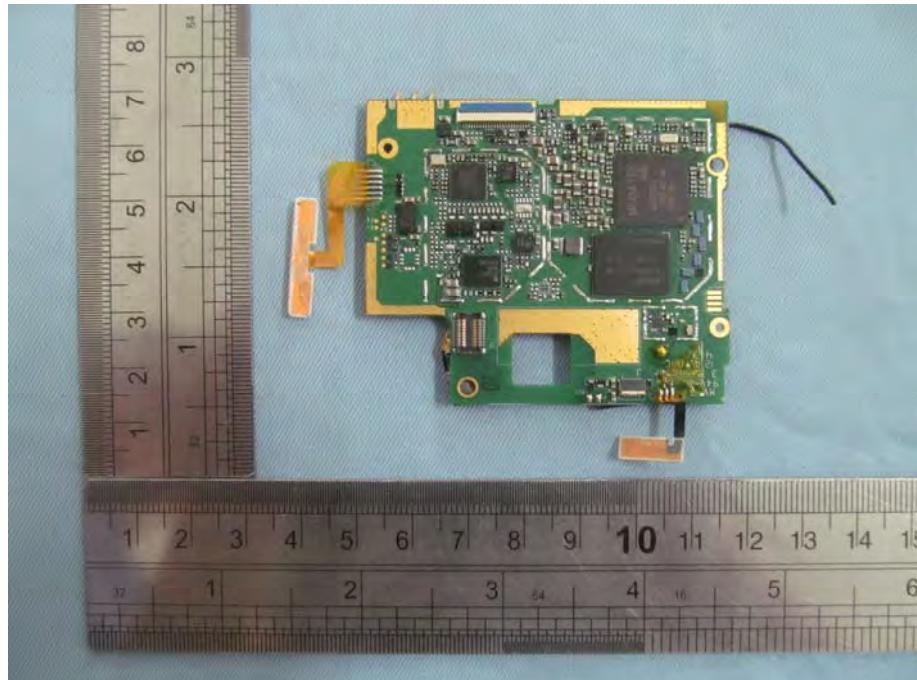

INTERNAL VIEW OF EUT-8

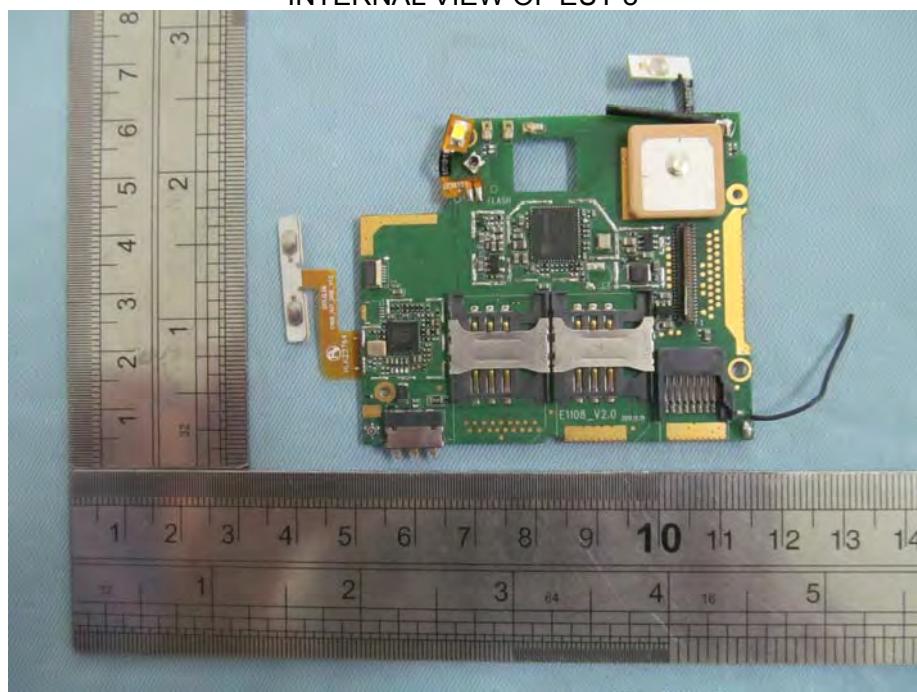


APPENDIX II
PHOTOGRAPHS OF THE TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

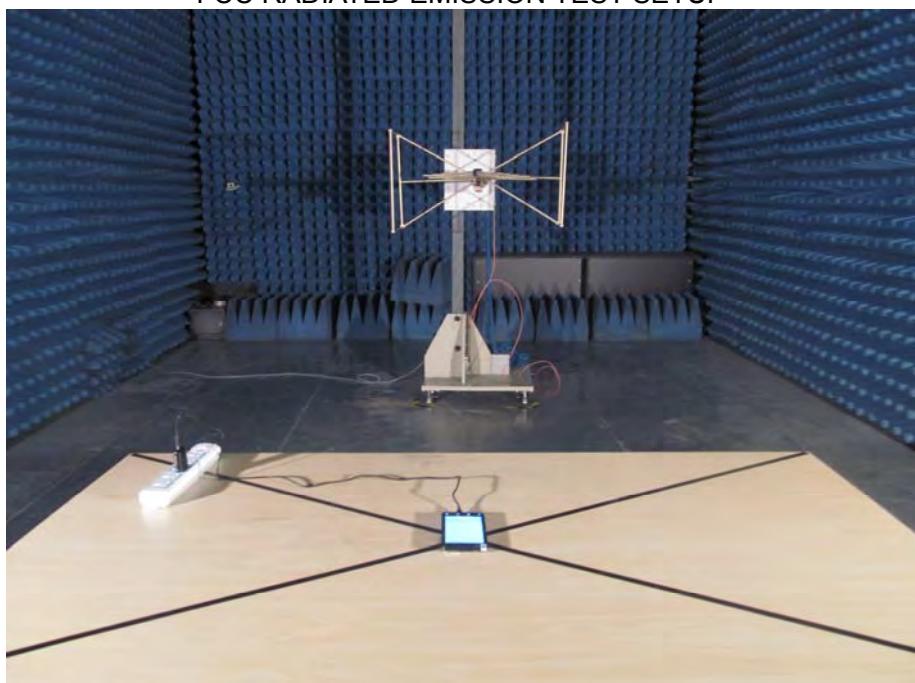

----END OF REPORT----