



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

# TEST REPORT

**According to : FCC 47CFR part 15 subpart C § 15.247**

Test Report No. : CTK-2013-00047  
Date of Issue : January 14, 2013  
FCC ID : ORI-HR150  
Model/Type No. : HT150-A3S50xxx  
Kind of Product : LED STREET LIGHT  
Applicant : KMW INC.  
Applicant Address : 183-6 Youngchun-ro, Dongtan-myun, Hwasung-si, Kyungki-do, Republic of Korea  
Manufacturer : KMW INC.  
Manufacturer Address : 183-6 Youngchun-ro, Dongtan-myun, Hwasung-si, Kyungki-do, Republic of Korea  
Contact Person : Sung Seok / Principal Research Engineer  
Telephone : +82-31-370-8621  
Received Date : December 4, 2012  
Test period : Start : December 17, 2012 End : January 8, 2013  
Test Results : ☒ In Compliance ☐ Not in Compliance

The test results presented in this report relate only to the object tested.

Tested by

Y. T. Lee

Young-taek Lee  
Test Engineer  
Date: January 14, 2013

Reviewed by

Y. J. Park

Young-Joon, Park  
Technical Manager  
Date: January 14, 2013



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

### REPORT REVISION HISTORY

Date	Revision	Page No
January 14, 2013	Issued (CTK-2013-00047)	All

***This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.***



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

### TABLE OF CONTENTS

REPORT REVISION HISTORY .....	2
1.0 General Product Description .....	4
1.1 Tested Frequency.....	4
1.2 Model Differences .....	4
1.3 Device Modifications.....	5
1.4 Peripheral Devices .....	5
1.5 Calibration Details of Equipment Used for Measurement .....	5
1.6 Test Facility.....	5
1.7 Laboratory Accreditations and Listings.....	6
2.0 Summary of tests .....	7
2.1 Technical Characteristic Test .....	8
2.1.1 6dB Bandwidth .....	8
2.1.2 Maximum peak Conducted Output Power .....	11
2.1.3 Power Spectral Density .....	14
2.1.4 Band - edge .....	17
2.1.5 Field Strength of Emissions .....	22
2.1.6 AC Conducted Emissions.....	29
APPENDIX A – Test Equipment Used For Tests .....	32



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

## 1.0 General Product Description

Equipment model name : HR150-A3S50xxx

Serial number : Prototype

EUT condition : Pre-production, not damaged

Antenna type : Planar Inverted F antenna Gain 2.13 dBi

Frequency Range : 2405 MHz – 2480 MHz (DSSS)

RF output power : -0.80 dBm Peak Conducted

Number of channels : 16

Type of Modulation : OQPSK

Rated Channel spacing : 5 MHz

Power Source : AC 100 - 270 V

### 1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2405	2445	2480

### 1.2 Model Differences

Not applicable



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

### 1.3 Device Modifications

The following modifications were necessary for compliance:

Not applicable

### 1.4 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.	FCC ID or DoC
-	-	-	-	-

### 1.5 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

### 1.6 Test Facility

The measurement facility is located at 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.







CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

### 1.7 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 m & 10 m SAC and Conducted Test Site to perform FCC Part 15/18 measurements	 805871
JAPAN	VCCI	3 m & 10 m SAC and Conducted Test Site	 R-948, C-986, T-1843
KOREA	KCC	EMI (3 m & 10 m SAC and Conducted Test Site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and Interruptions)	 No. 51, KR0025
International	KOLAS	EMC	



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## 2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Maximum Output Power	< 1 Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.247(e)	Transmitter Power Spectral Density	< 8 dBm @ 3 kHz		C
				C
15.209	Field Strength of Harmonics	15.209(a)	Radiated	C
15.207	AC Conducted Emissions	15.207(a)	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:  
- FCC Part 15.247, ANSI C63.4-2003

The tests were performed according to the method of measurements prescribed in  
558074 D01 DTS Meas Guidance.



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

## 2.1 Technical Characteristic Test

### 2.1.1 6dB Bandwidth

#### Procedure:

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ( as close as possible to ) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 10 MHz

VBW = 100 kHz (VBW ≥ RBW)

Sweep = auto

Trace = Max hold

Detector function = peak

#### Measurement Data:

##### Test mode : Continuous modulated carrier

Frequency (MHz)	Channel No.	Test Results	
		Measured Bandwidth (MHz)	Result
2405	11	1.525	Complies
2445	19	1.425	Complies
2480	26	1.530	Complies

#### Minimum Standard:

6 dB Bandwidth > 500kHz

See next pages for actual measured spectrum plots.





CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.


386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970


Fax: +82-31-339-9855

www.e-ctk.com

### CH 11 (2405 MHz)

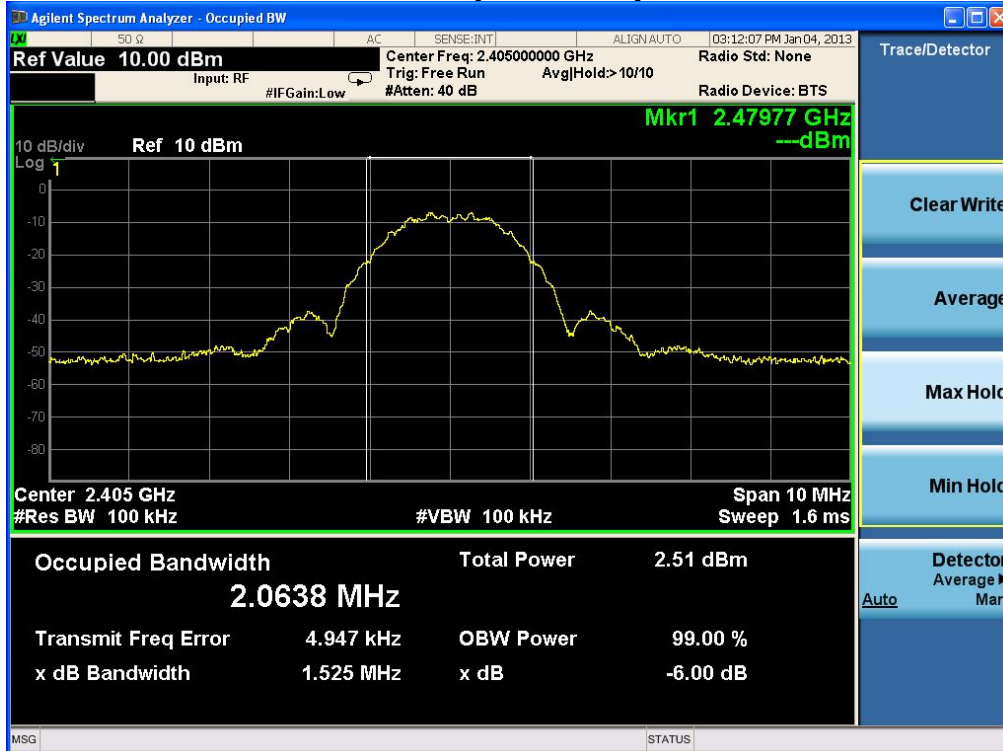

### CH 19 (2445 MHz)

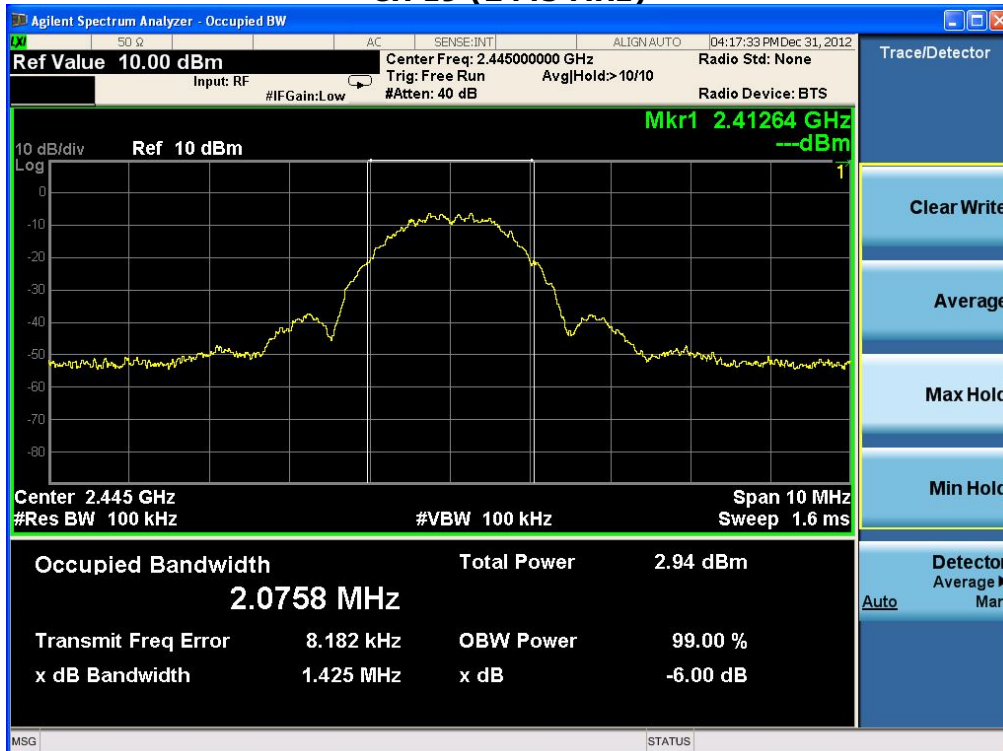




CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

### CH 26 (2480 MHz)

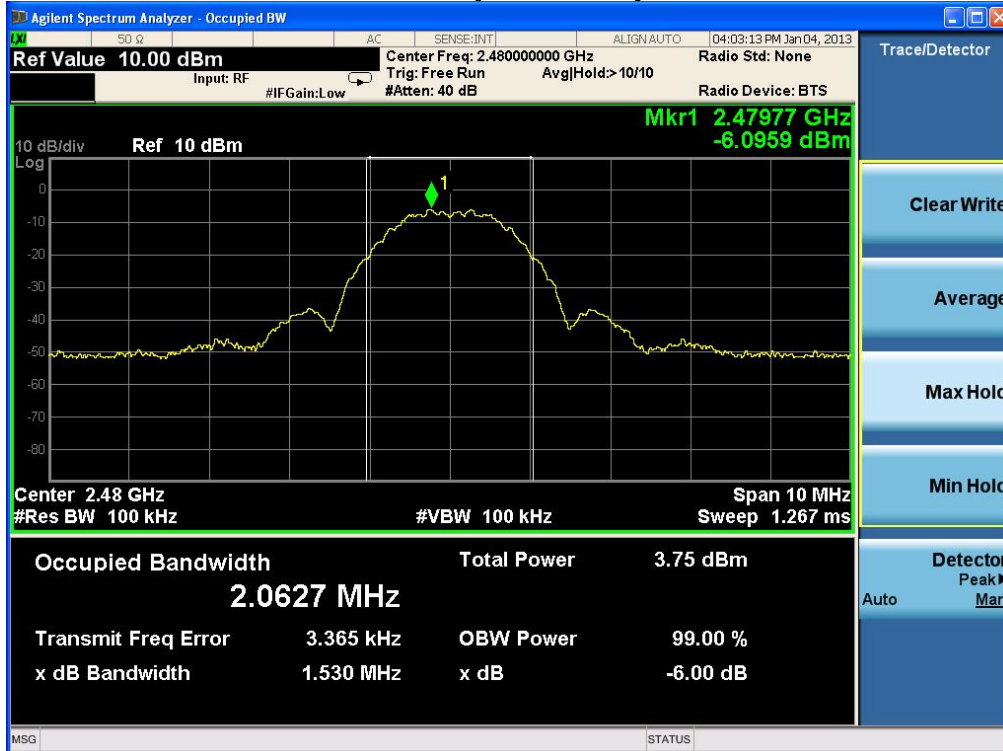


## 2.1.2 Maximum peak Conducted Output Power

### Test Location

RF Test Room

### Test Procedures

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

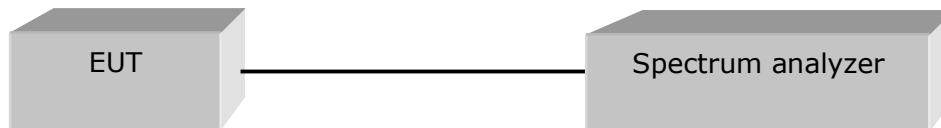

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 1 MHz

Span = fully encompass the DTS bandwidth

VBW = 1 MHz (VBW ≥ RBW)

Sweep = auto

Trace = Max hold

Detector function = peak

### Limit

< 1 W (30 dBm)

### Test Results

#### Test mode : Continuous modulated carrier

Frequency (MHz)	Channel No.	Reading power(dBm)	Cable loss (dB)	Test results	
				Peak output power (dBm)	Result
2405	11	-2.21	0.63	-1.58	Complies
2445	19	-1.46	0.66	-0.80	Complies
2480	26	-1.70	0.68	-1.02	Complies

See next pages for actual measured spectrum plots.




CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance


## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

### CH 11 (2405 MHz)

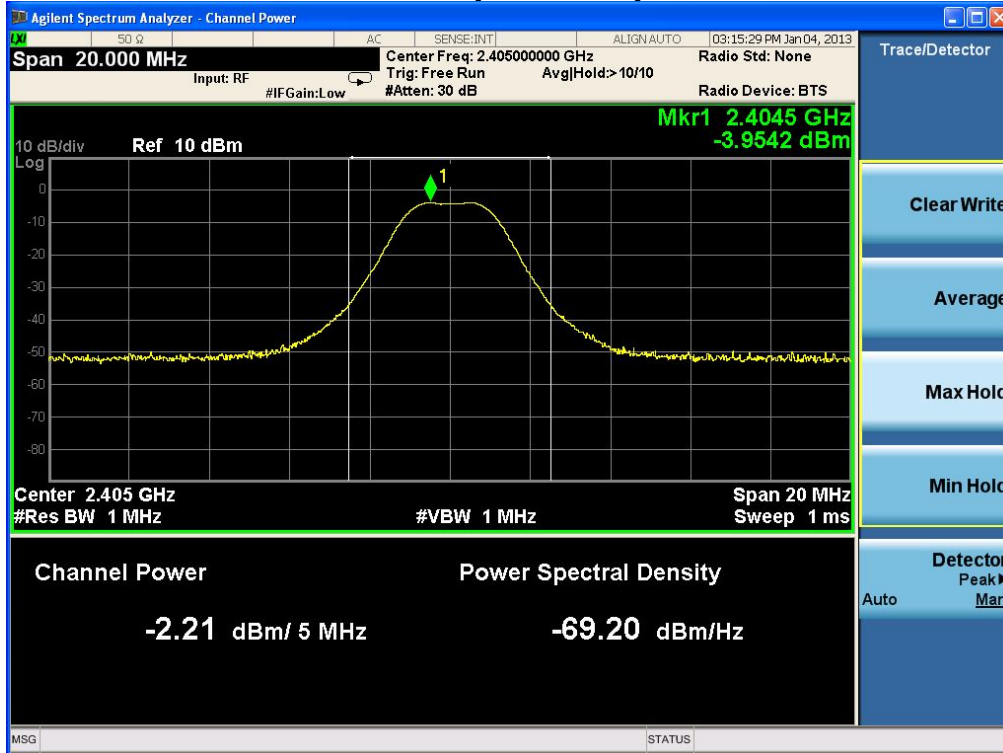

### CH 19 (2445 MHz)

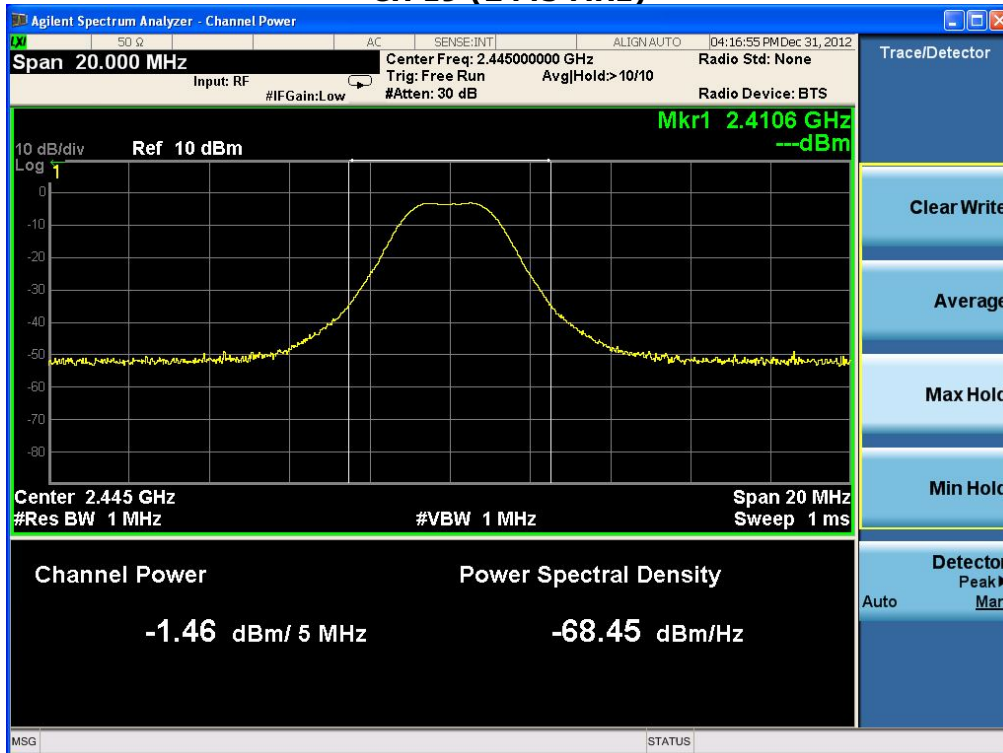




CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

### CH 26 (2480 MHz)

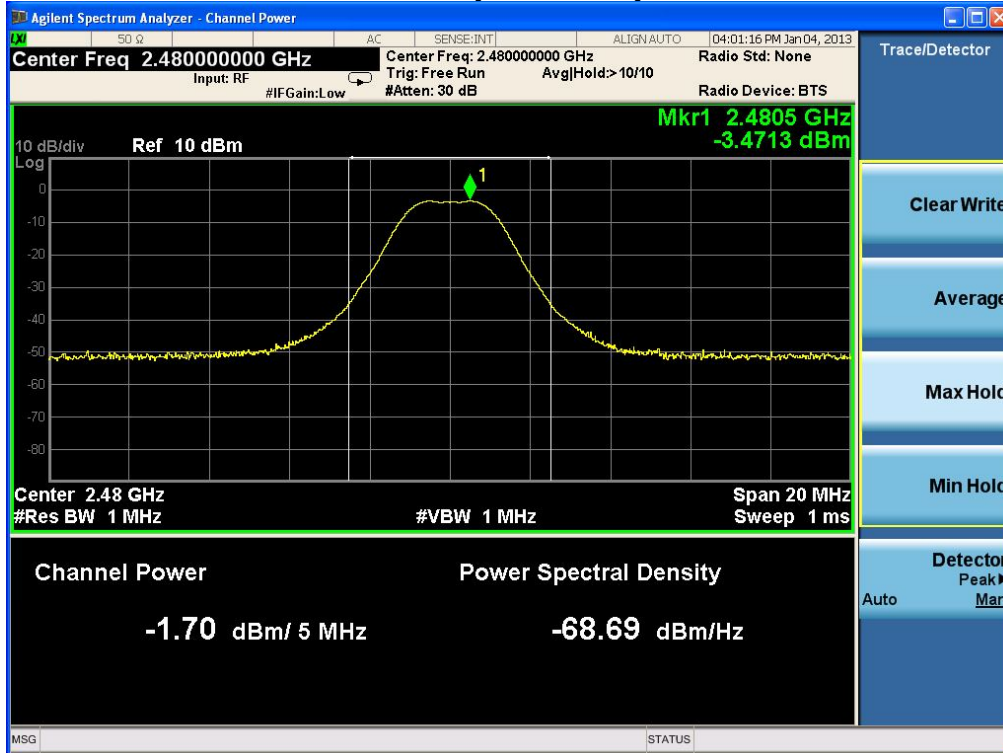



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

### 2.1.3 Power Spectral Density

#### Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz

VBW = (VBW  $\geq$  RBW)

Sweep = 100 s (Span/3 kHz)

Span = 300 kHz

Detector function = peak

Trace = Max hold

#### Test mode : Continuous modulated carrier

Frequency (MHz)	Ch.	Test Results	
		dBm	Result
2405	11	-13.819	Complies
2445	19	-12.779	Complies
2480	26	-13.774	Complies

#### Minimum Standard:

Power Spectral Density	< 8dBm @ 3 kHz BW
------------------------	-------------------

See next pages for actual measured spectrum plots.



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

### Power Density Measurement

#### CH 11 (2405 MHz)



#### CH 19 (2445 MHz)







CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

### CH 26 (2480 MHz)







CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

### 2.1.4 Band - edge

#### Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 20 MHz

Detector function = peak

Trace = Max hold

Sweep = auto

#### Measurement Data: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.

<b>Minimum Standard:</b>	> 20 dBc
--------------------------	----------

See next pages for actual measured spectrum plots.



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.



386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

### Band-edge Measurements

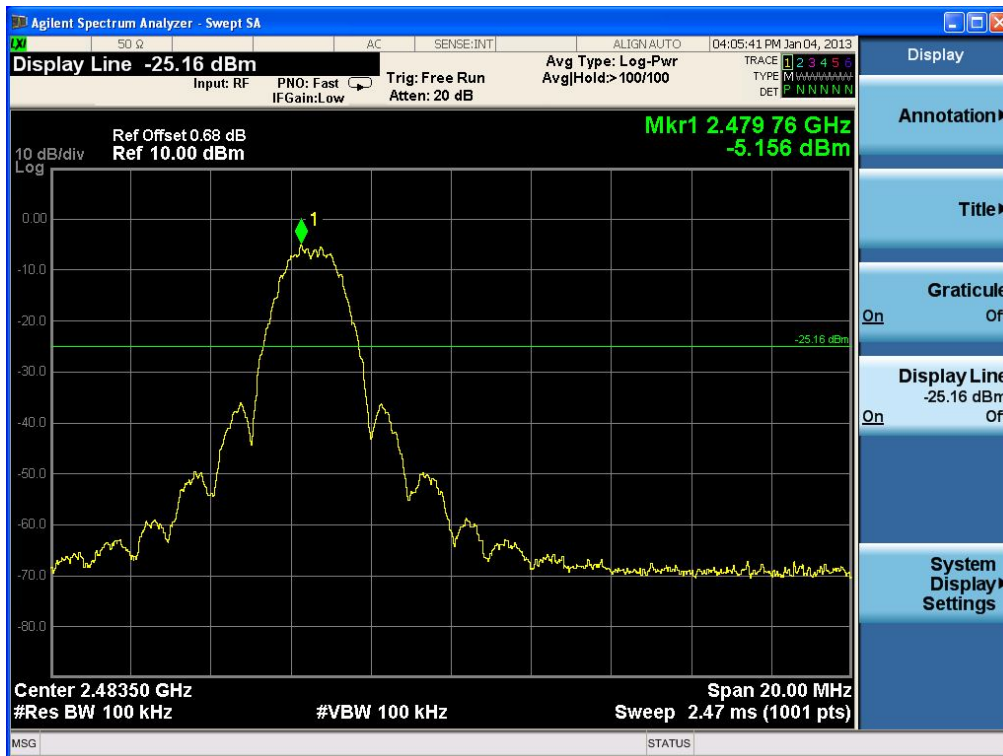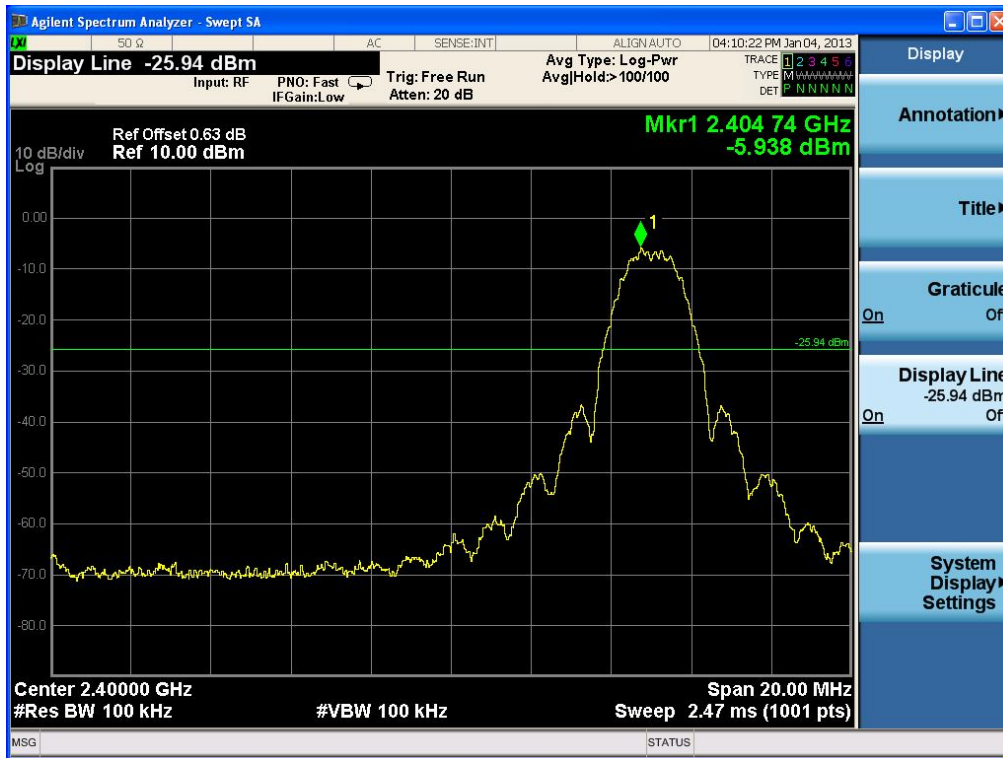




CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

### Band – edge (at 20 dB blow) – Low channel(11) Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic

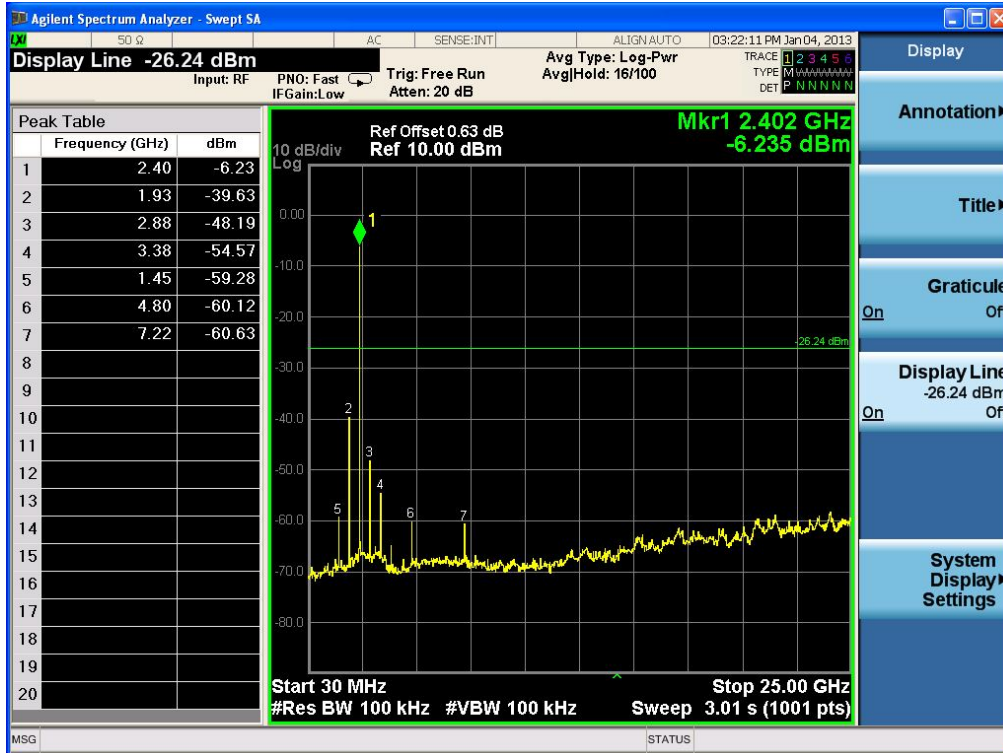




CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

### Band – edge (at 20 dB blow) – Mid channel(19) Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic

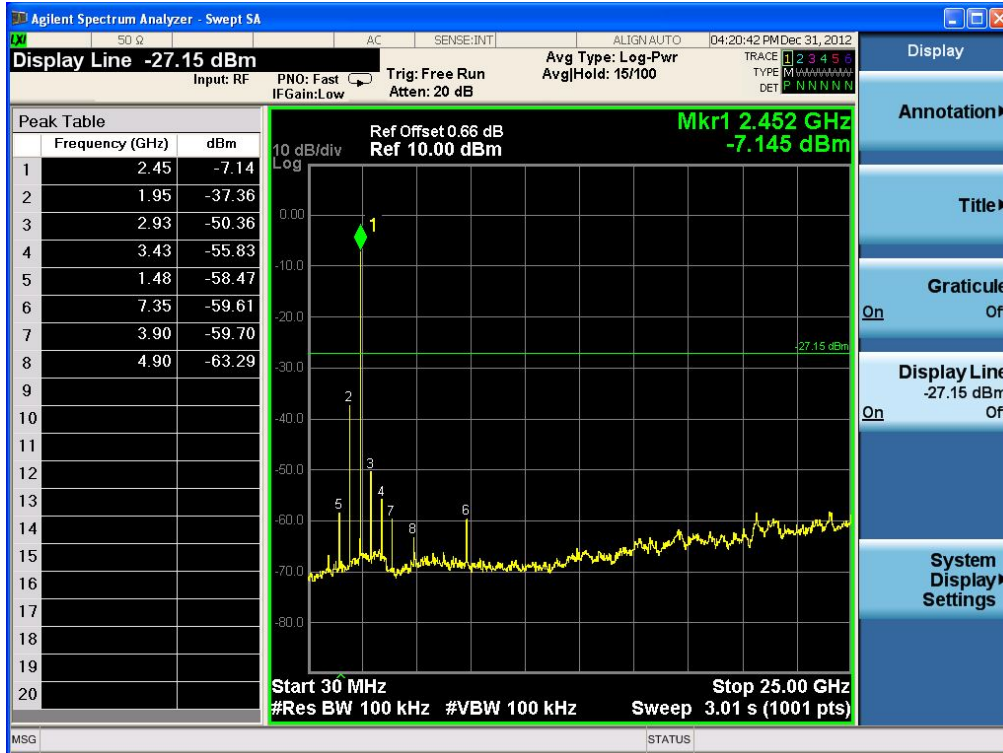



**www.e-ctk.com**

Agilent Spectrum Analyzer - Swept SA

50 Ω AC SENSE:INT ALIGN AUTO 03:59:44 PM Jan 04, 2013

Display Line -27.26 dBm Input: RF PNO: Fast IF Gain: Low Trig: Free Run Atten: 20 dB Avg Type: Log-Pwr Avg/Hold: 7/100 TRACE 1 2 3 4 5 6 TYPE M M M M M M M M P N N N N N N DET

Peak Table		
	Frequency (GHz)	dBm
1	2.48	-7.26
2	1.98	-35.83
3	2.98	-54.09
4	1.48	-57.35
5	3.48	-57.48
6	3.98	-57.75
7	7.45	-59.15
8	0.98	-65.20
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		

Ref Offset 0.68 dB Ref 10.00 dBm

Mkr1 2.477 GHz -7.261 dBm

10 dB/div Log

Start 30 MHz #Res BW 100 kHz #VBW 100 kHz Stop 25.00 GHz Sweep 3.01 s (1001 pts)

MSG STATUS



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

### 2.1.5 Field Strength of Emissions

#### Test Location

- ☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)  
☒ 3 m SAC (test distance : 3 m)

#### Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz

VBW  $\geq$  RBW

Sweep = auto

#### Limit

##### - 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

### Test Setup:

- 1) For field strength of emissions from 9 kHz to 30 MHz

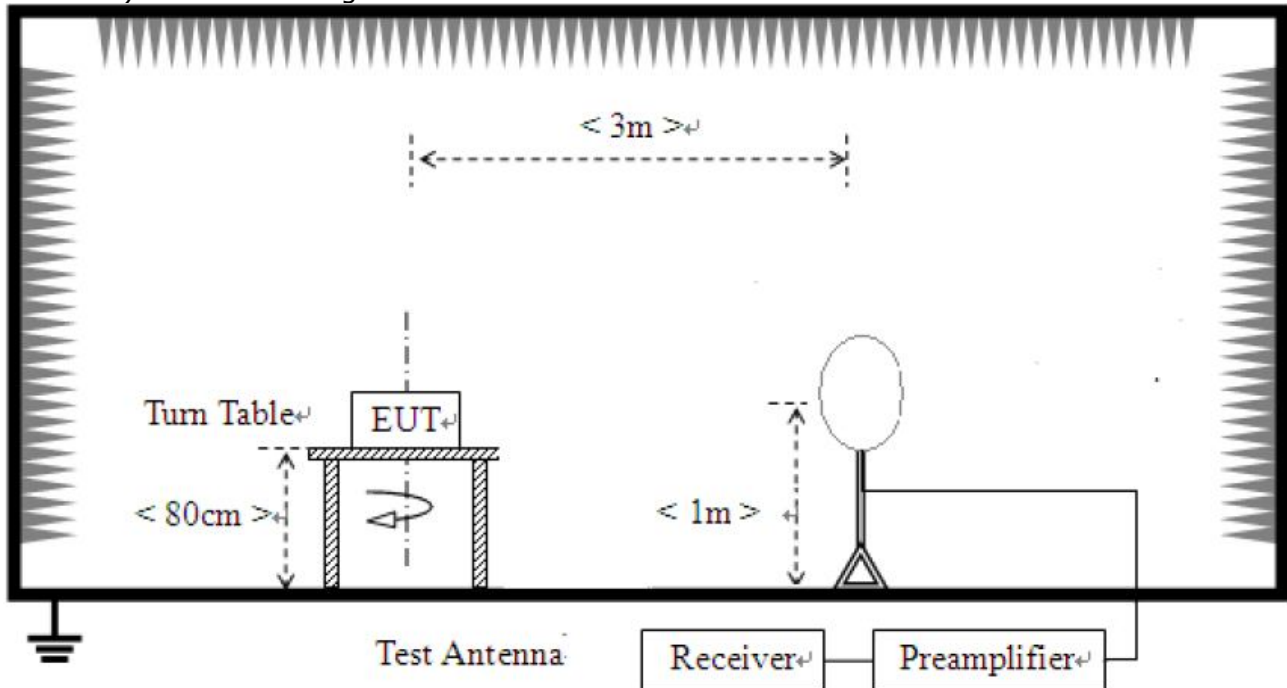


- 2) For field strength of emissions from 30 MHz to 1 GHz

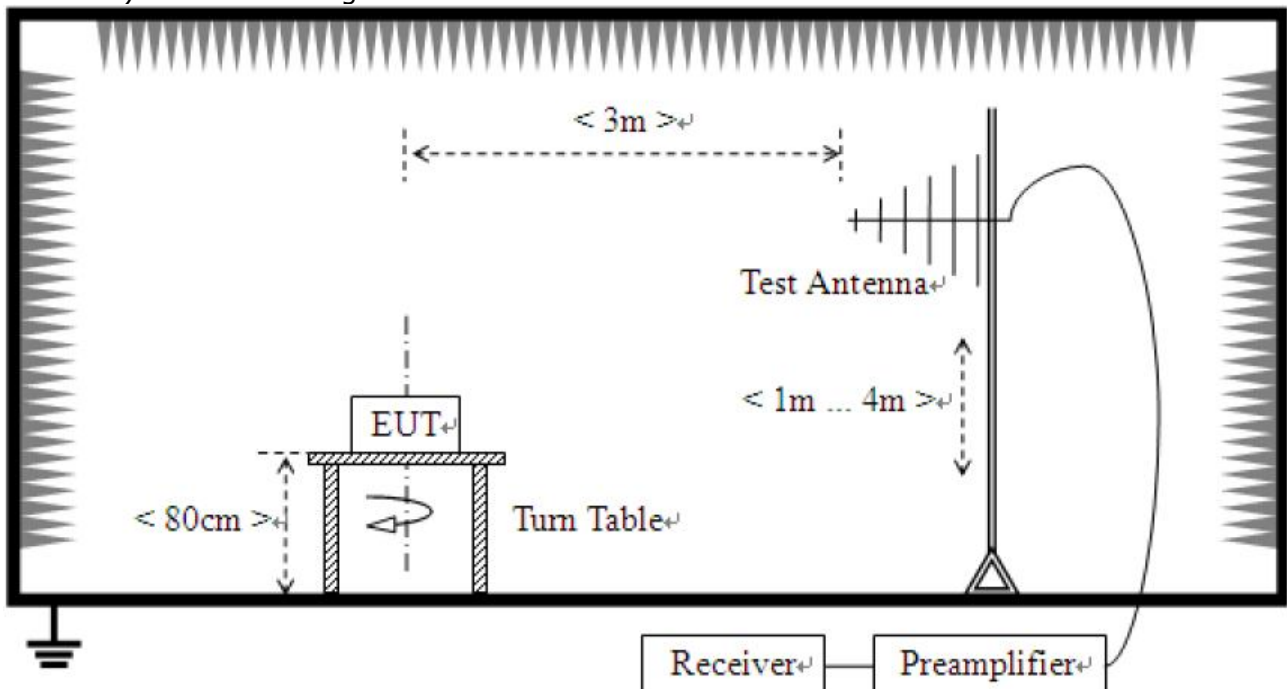



3) For field strength of emissions above 1 GHz

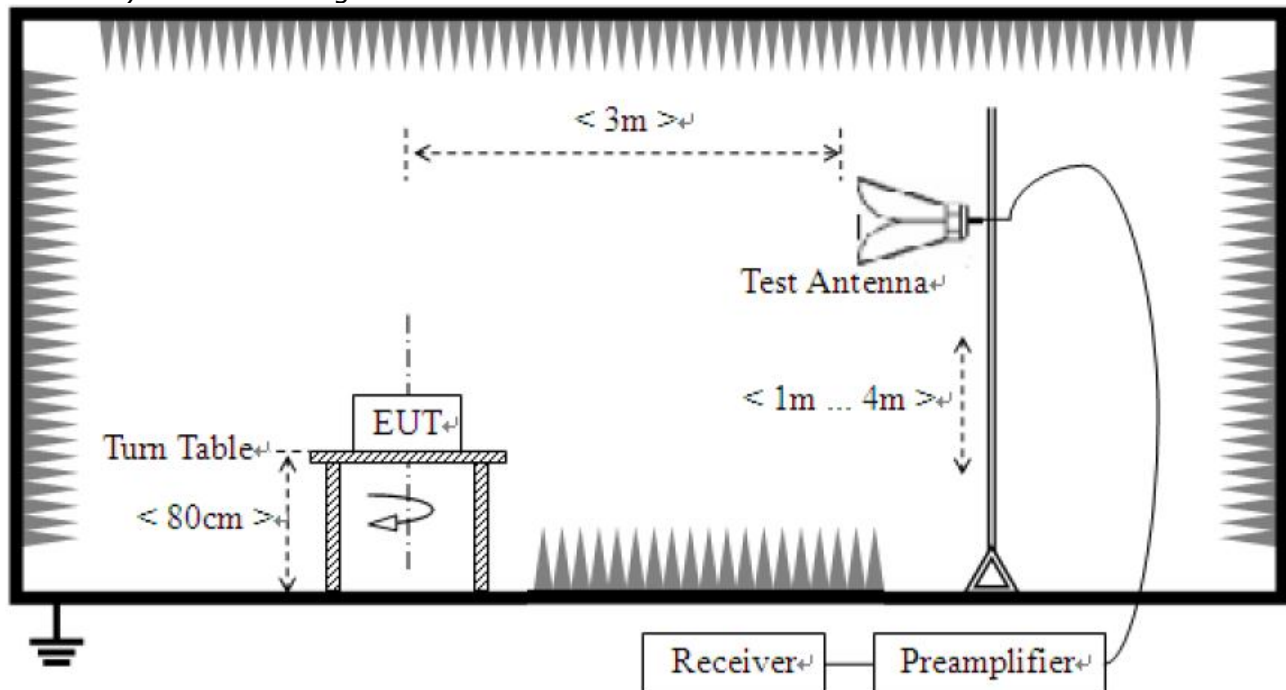

**Test Results**

**1) 9 kHz to 30 MHz**

EUT	LED STREET LIGHT	Measurement Detail	
Model	HR150-A3S50xxx	Frequency Range	9 kHz – 30 MHz
Test mode	Continuous modulated carrier	Detector function	Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

**Note :**

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)





## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

CTK Co., Ltd.

The Prime Leader of Global Regulatory Compliance

### 2) 30 MHz to 1 GHz

#### Test mode : Continuous modulated carrier


EUT	LED STREET LIGHT	Measurement Detail	
Model	HR150-A3S50xxx	Frequency Range	Below 1000MHz
Mode	Continuous modulated carrier	Detector function	Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
54.371	32.5	7.5	Quasi-peak

#### Test Data

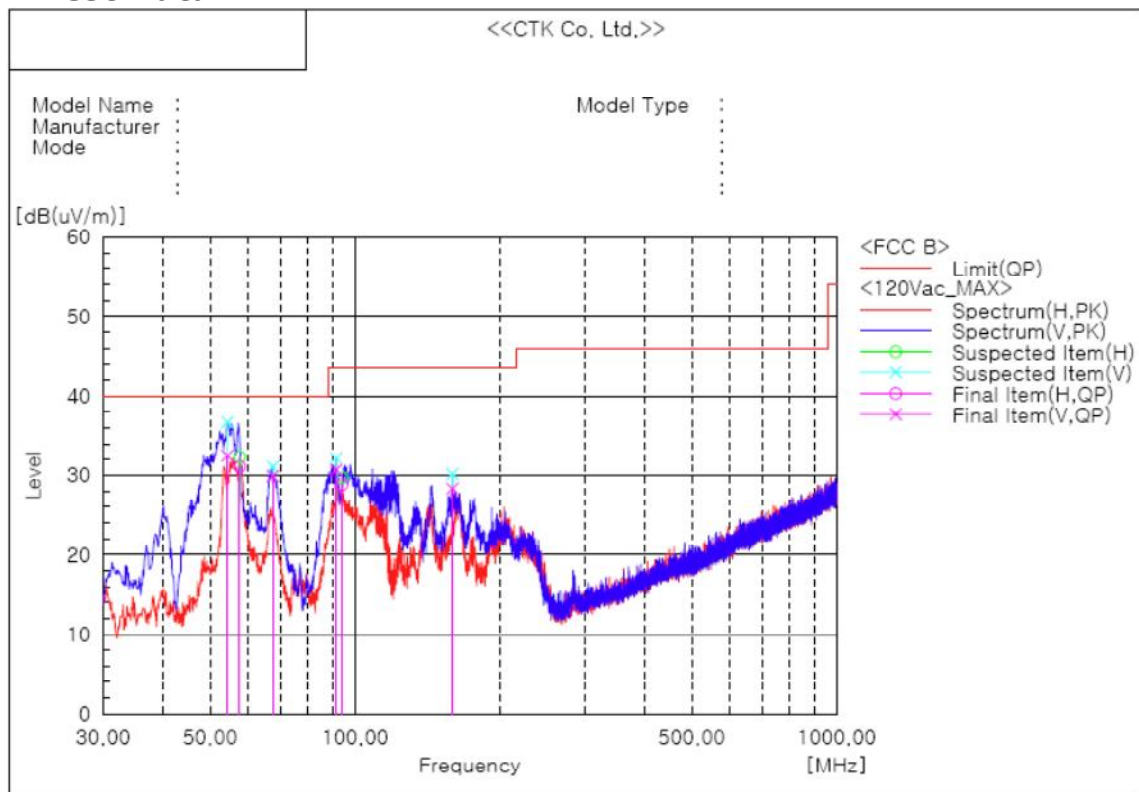

#### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	54.371	V	47.8	-15.3	32.5	40.0	7.5	100.0	144.0
2	57.645	H	44.9	-13.8	31.1	40.0	8.9	100.0	8.0
3	67.588	V	45.5	-15.6	29.9	40.0	10.1	100.0	70.0
4	91.474	V	45.3	-14.6	30.7	43.5	12.8	100.0	219.0
5	94.020	H	43.0	-14.2	28.8	43.5	14.7	209.0	144.0
6	159.374	V	34.4	-6.1	28.3	43.5	15.2	100.0	181.0



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

### 3) above 1 GHz

EUT	LED STREET LIGHT	Measurement Detail	
Model	HR150-A3S50xxx	Frequency Range	1-25GHz
Channel	Channel 11 (2405 MHz)	Detector function	Peak

#### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
1924	45.0	9.0	Average

#### Test Data

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor			Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
					Antenna	Amp. Gain	Cable						
1924.00	48.6	52.6	V	1.1	25.4	35.6	6.6	54.0	74.0	45.0	49.0	9.0	25.0
2886.00	40.3	44.6	V	1.0	28.5	35.4	8.1	54.0	74.0	41.5	45.8	12.5	28.2
4810.00	32.3	41.4	V	1.0	32.7	34.9	11.4	54.0	74.0	41.5	50.6	12.5	23.4

#### Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor			Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

EUT	LED STREET LIGHT	Measurement Detail	
Model	HR150-A3S50xxx	Frequency Range	1-25GHz
Channel	Channel 19 (2445 MHz)	Detector function	Peak

### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
1956	47.1	6.9	Average

### Test Data

Frequency [MHz]	Reading [dBuV/m]		Pol.	Height [m]	Correction Factor			Limits [dBuV/m]		Result [dBuV/m]		Margin [dB]	
	AV / Peak				Antenna	Amp. Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
1956.00	50.7	53.2	V	1.0	25.4	35.6	6.6	54.0	74.0	47.1	49.6	6.9	24.4
2934.00	34.1	43.4	V	1.0	28.5	35.4	8.1	54.0	74.0	35.3	44.6	18.7	29.4
4890.00	28.5	37.8	V	1.0	32.7	34.9	11.4	54.0	74.0	37.7	47.0	16.3	27.0



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

EUT	LED STREET LIGHT	Measurement Detail	
Model	HR150-A3S50xxx	Frequency Range	1-25GHz
Channel	Channel 26 (2480 MHz)	Detector function	Peak

### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
1984.1	48.3	5.7	Average

### Test Data

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor			Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
					Antenna	Amp. Gain	Cable						
1984.10	51.9	54.5	V	1.0	25.4	35.6	6.6	54.0	74.0	48.3	50.9	5.7	23.1
4960.00	31.4	41.9	V	1.0	32.7	34.9	11.4	54.0	74.0	40.6	51.1	13.4	22.9

### Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor			Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

### 2.1.6 AC Conducted Emissions

#### Test Location

Shielded Room

#### Frequency Range of Measurement

150 kHz to 30 MHz

#### Instrument Settings

IF Band Width: 9 kHz

#### Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

#### Limit

##### - 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency.

#### Test Results

The requirements are:

☒ Complies

#### Test mode : Continuous modulated carrier

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
1.392	36.3	9.7	Average



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea


Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

### Test Data

[L1]

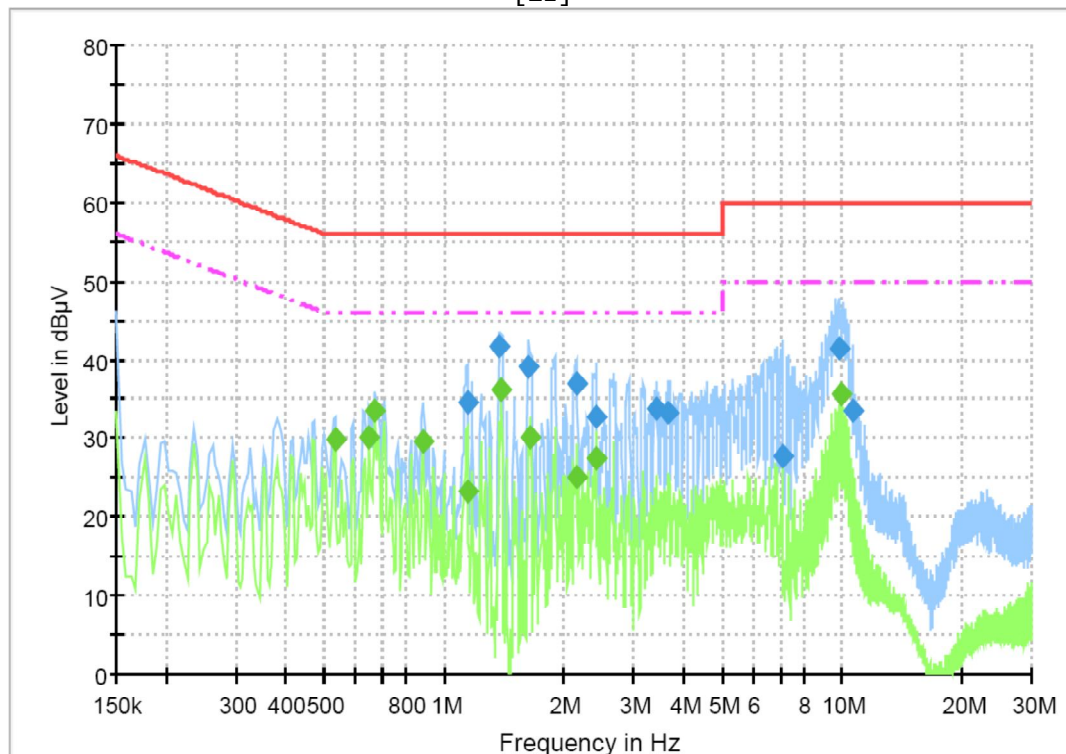

### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.144500	34.7	20.0	9.000	GND	L1	0.2	21.3	56.0
1.374000	41.8	20.0	9.000	GND	L1	0.2	14.2	56.0
1.635000	39.0	20.0	9.000	GND	L1	0.2	17.0	56.0
2.148000	37.1	20.0	9.000	GND	L1	0.2	18.9	56.0
2.413500	32.8	20.0	9.000	GND	L1	0.2	23.2	56.0
3.421500	33.8	20.0	9.000	GND	L1	0.2	22.2	56.0
3.678000	33.2	20.0	9.000	GND	L1	0.2	22.8	56.0
7.116000	27.7	20.0	9.000	GND	L1	0.3	32.3	60.0
9.798000	41.5	20.0	9.000	GND	L1	0.3	18.5	60.0
10.644000	33.6	20.0	9.000	GND	L1	0.3	26.4	60.0

### Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.532500	29.7	20.0	9.000	GND	L1	0.2	16.3	46.0
0.649500	30.1	20.0	9.000	GND	L1	0.2	15.9	46.0
0.672000	33.5	20.0	9.000	GND	L1	0.2	12.5	46.0
0.883500	29.6	20.0	9.000	GND	L1	0.2	16.4	46.0
1.144500	23.1	20.0	9.000	GND	L1	0.2	22.9	46.0
1.392000	36.3	20.0	9.000	GND	L1	0.2	9.7	46.0
1.648500	30.0	20.0	9.000	GND	L1	0.2	16.0	46.0
2.157000	25.2	20.0	9.000	GND	L1	0.2	20.8	46.0
2.413500	27.4	20.0	9.000	GND	L1	0.2	18.6	46.0
9.991500	35.7	20.0	9.000	GND	L1	0.3	14.3	50.0



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.


386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

### [NEUTRAL]

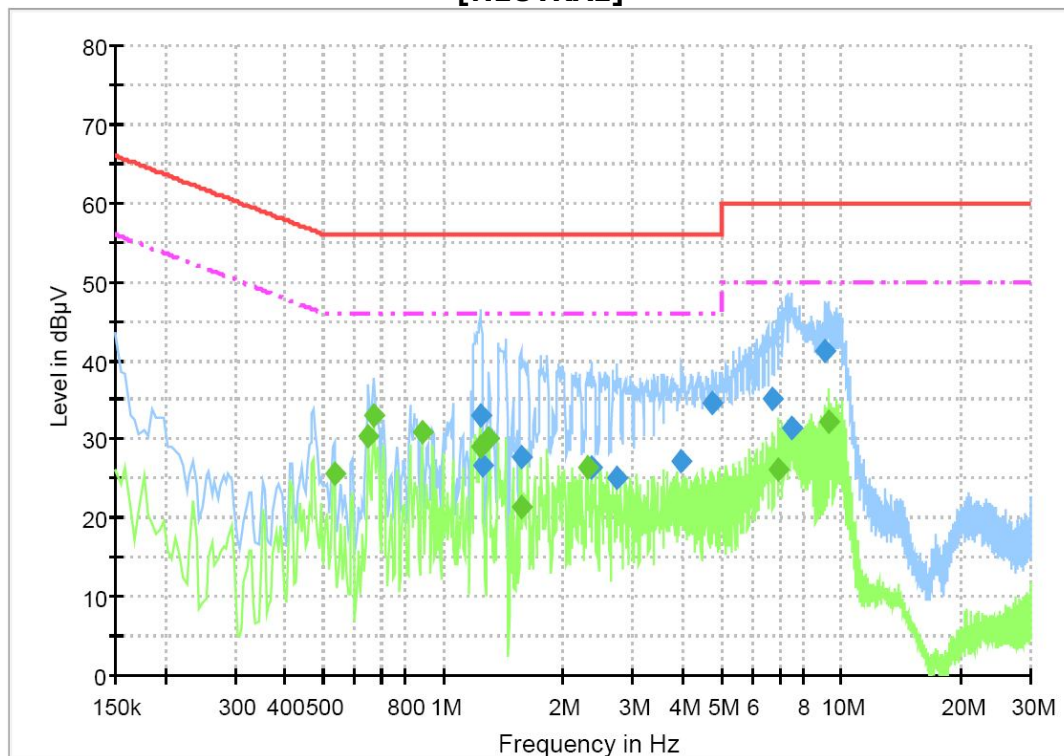

### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.243500	33.1	20.0	9.000	GND	N	0.2	22.9	56.0
1.252500	26.7	20.0	9.000	GND	N	0.2	29.3	56.0
1.567500	27.7	20.0	9.000	GND	N	0.2	28.3	56.0
2.355000	26.5	20.0	9.000	GND	N	0.2	29.5	56.0
2.742000	25.1	20.0	9.000	GND	N	0.2	30.9	56.0
3.979500	27.1	20.0	9.000	GND	N	0.2	28.9	56.0
4.767000	34.5	20.0	9.000	GND	N	0.2	21.5	56.0
6.724500	35.1	20.0	9.000	GND	N	0.3	24.9	60.0
7.512000	31.5	20.0	9.000	GND	N	0.3	28.5	60.0
9.145500	41.3	20.0	9.000	GND	N	0.3	18.7	60.0

### Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.532500	25.6	20.0	9.000	GND	N	0.2	20.4	46.0
0.649500	30.4	20.0	9.000	GND	N	0.2	15.6	46.0
0.672000	33.0	20.0	9.000	GND	N	0.2	13.0	46.0
0.883500	30.8	20.0	9.000	GND	N	0.2	15.2	46.0
1.243500	28.9	20.0	9.000	GND	N	0.2	17.1	46.0
1.306500	30.0	20.0	9.000	GND	N	0.2	16.0	46.0
1.567500	21.4	20.0	9.000	GND	N	0.2	24.6	46.0
2.296500	26.4	20.0	9.000	GND	N	0.2	19.6	46.0
6.922500	26.2	20.0	9.000	GND	N	0.3	23.8	50.0
9.339000	32.2	20.0	9.000	GND	N	0.3	17.8	50.0





CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970

Fax: +82-31-339-9855

www.e-ctk.com

### APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2013-11-08
2	Spectrum Analyzer	Rohde & Schwarz	FSP-30	100994	2013-11-18
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2013-12-15
4	EMI Test Receiver	Rohde & Schwarz	ESCI3	100032	2013-02-09
5	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2013-06-29
6	Trilog Broadband Antenna	SCHWARZBECK	VULB 9161 SE	100203	2014-06-11
7	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2014-06-06
8	Horn Antenna	ETS-Lindgren	3115	00078894	2013-03-22
9	Horn Antenna	ETS-Lindgren	3115	00078895	2013-03-22
10	EPM Series Power Meter	HP	E4418A	GB38272734	2013-11-08
11	Power Sensor	HP	8487A	3318A03524	2013-07-10
12	SYNTHESIZED SWEEPER	HP	8341B	2819A01563	2013-11-08
13	ESG-D Series Signal Generator	Agilent	E4432B	US40054094	2013-11-08
14	6dB Attenuator	Rohde & Schwarz	DNF	272.4110.50	2013-11-09
15	Attenuator	HP	8494A	3308A33351	2013-11-09
16	Attenuator	BIRD	1000-WA-MFN-30	236	2013-11-09
17	OPT H64 AMPLIFIER	HP	8447F	3113A06814	2013-03-27
18	PREAMPLIFIER	Agilent	8449B	3008A02307	2013-11-09
19	AMPLIFIER	Sonoma Instrument Co.	310	291721	2013-03-27
20	LISN	Rohde & Schwarz	ENV216	101235	2013-08-18
21	LISN	Rohde & Schwarz	ENV216	101236	2013-08-06
22	Temp&Humi Chamber	Kunpoong	JT-TH-556-1	9QE5-002	2013-01-12
23	DC POWER SUPPLY	Agilent	E3632A	MY40011638	2013-11-09
24	Band Reject Filter	Wainwright Instruments GmbH	WRCGV 2400/2483- 2375/2505- 50/10EE	2	2013-09-11