



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

2.4GHz Digital Headset

Model: X-Tatic AIR1

Brand: Sharkoon

Test Report Number:

SZ120627B04-RP

Prepared for

Sharkoon Technologies Ltd. Taiwan Branch
3F-1, No. 40, Section 2 Dun Hwa South Road, Taipei 106

Prepared by

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.
No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221

Issued Date: August 30, 2012



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	SZ120627B04-RP	Initial Issue	ALL	Amay Tang



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY.....	6
3.1 DESCRIPTION OF TEST MODES.....	6
4. FACILITIES AND ACCREDITATIONS	7
4.1 FACILITIES.....	7
4.2 ACCREDITATIONS	7
4.3 MEASUREMENT UNCERTAINTY	7
5. SETUP OF EQUIPMENT UNDER TEST	8
5.1 SETUP CONFIGURATION OF EUT	8
5.2 SUPPORT EQUIPMENT	8
6. FCC PART 15.247 REQUIREMENTS	10
6.1 20DB BANDWIDTH.....	10
6.2 PEAK POWER.....	14
6.3 PEAK POWER SPECTRAL DENSITY.....	16
6.4 BAND EDGES MEASUREMENT	17
6.5 FREQUENCY SEPARATION	27
6.6 NUMBER OF HOPPING FREQUENCY	31
6.7 TIME OF OCCUPANCY (DWELL TIME).....	33
6.8 SPURIOUS EMISSIONS	37
6.9 POWERLINE CONDUCTED EMISSIONS	57



1. TEST RESULT CERTIFICATION

Product	2.4GHz Digital Headset
Model	X-Tatic AIR1
Brand	Sharkoon
Tested	June 27~ August 24, 2012
Applicant	Sharkoon Technologies Ltd. Taiwan Branch 3F-1, No. 40, Section 2 Dun Hwa South Road, Taipei 106
Manufacturer	Sharkoon Technologies Ltd. Taiwan Branch 3F-1, No. 40, Section 2 Dun Hwa South Road, Taipei 106

APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Tom Gan
Supervisor of EMC Dept.
Compliance Certification Service Inc.

Reviewed by:

Aven Zhou
Supervisor of Report Dept.
Compliance Certification Service Inc.



2. EUT DESCRIPTION

Product	2.4GHz Digital Headset
Model Number	X-Tatic AIR1
Brand	Sharkoon
Model Discrepancy	N/A
Identify Number	SZ120627B04-RP
Power Supply	DC5V supplied by the adapter
Adapter Manufacturer / Model No.	Adapter1:SIL POWER SUPPLY / SSA-18W-05 EU/US/UK 050150 Input: AC100-240V, 50/60Hz, 0.6A Output: DC5.0V, 1.5A DC output cable: Unshielded, 1.85m Adapter2:ITE POWER SUPPLY / SCE0501500P Input: AC100-240V, 50/60Hz, 0.3A Output: DC5.0V, 1.5A DC output cable: Unshielded, 1.80m
Received Date	June 27, 2012
Frequency Range	2403 ~ 2477 MHz
Transmit Power	Antenna 1: 0.50dBm Antenna 2: -4.11dBm
Modulation Technique	FHSS(GFSK)
Number of Channels	38 Channels
Antenna Specification	Antenna 1:PCB Antenna:-0.67dBi gain (Max) Antenna 2:Doublet Antenna:-0.65dBi gain (Max)
USB Cable	Shielded 2.00m
Audio Cable	Unshielded 2.00m
Temperature Range	0°C ~ +40°C

Note: This submittal(s) (test report) is intended for FCC ID: OUDX-TATICAIR1 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The following test mode(s) were scanned during the preliminary test below 1G:

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1:X-BOX + Charging with adapter1 Mode 2: PC + Charging with adapter 1 Mode 3: X-BOX + Charging with adapter 2 Mode 4: PC + Charging with adapter 2	Mode 1
Radiated Emission	Mode 1: TX	Mode 1

Above 1G, Channel Low (2403MHz) 、Mid (2441MHz) and High (2477MHz) were chosen for full testing for GFSK.



4. FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4:2009, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
Taiwan	TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652)
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	+/- 3.18dB
Radiated emissions	30MHz ~ 200MHz	+/- 3.79dB
	200MHz ~1000MHz	+/- 3.62dB
	Above 1000MHz	+/- 5.04dB
	Band Edges	+/- 0.182 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



5. SETUP OF EQUIPMENT UNDER TEST

5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	PC	Dscmf	805CV2X	N/A	DELL	Unshielded 1.50m	Unshielded 1.80m
2	Monitor	CK15F1	61610051	N/A	SANYO	Unshielded 1.50m	Unshielded 1.50m
3	Keyboard	SK-8115	CN-0DJ313-716 16-82P-0YTB	N/A	DELL	Unshielded 1.20m	N/A
4	Modem	MODEM-1414	9013592	N/A	ACEEX	Unshielded 1.20m	Unshielded 2.00m
5	Printer	P310B	DLRE217030	N/A	EPSON	Unshielded 1.20m	Unshielded 2.00m
6	Mouse	WB365PA#AB2	2HTJMB101178 -317	N/A	DELL	Unshielded 1.45m	N/A
7	X-BOX	XBOX360S250G	40189850470	N/A	SONY	Unshielded 1.80m	Unshielded 2.00m
8	2.4GHz Digital Headset (RX)	X-Tatic AIR2	N/A	OUTX-TATICAIR2	Sharkoon	N/A	N/A
9	PS3 wired controller	PS3 SLIM 320G	CECH-2512B	N/A	SONY	Unshielded 1.50m	N/A

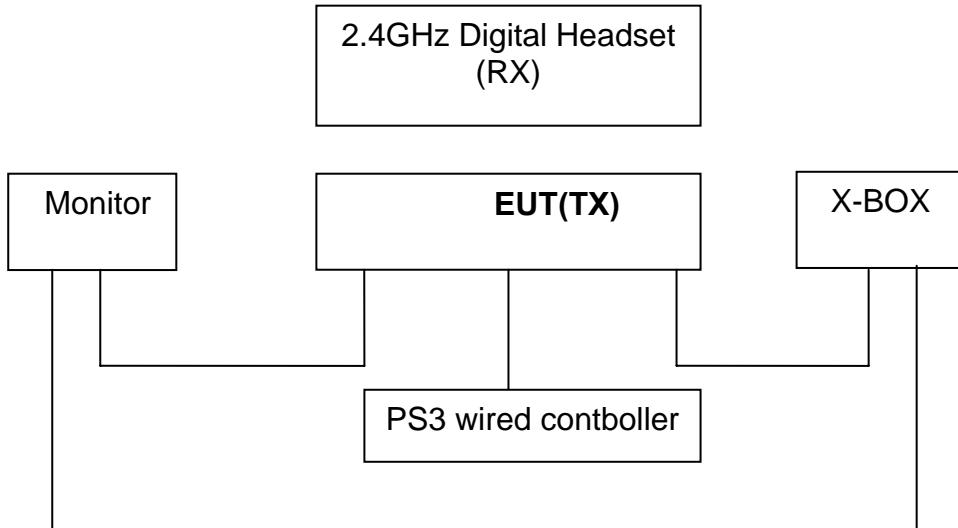
Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

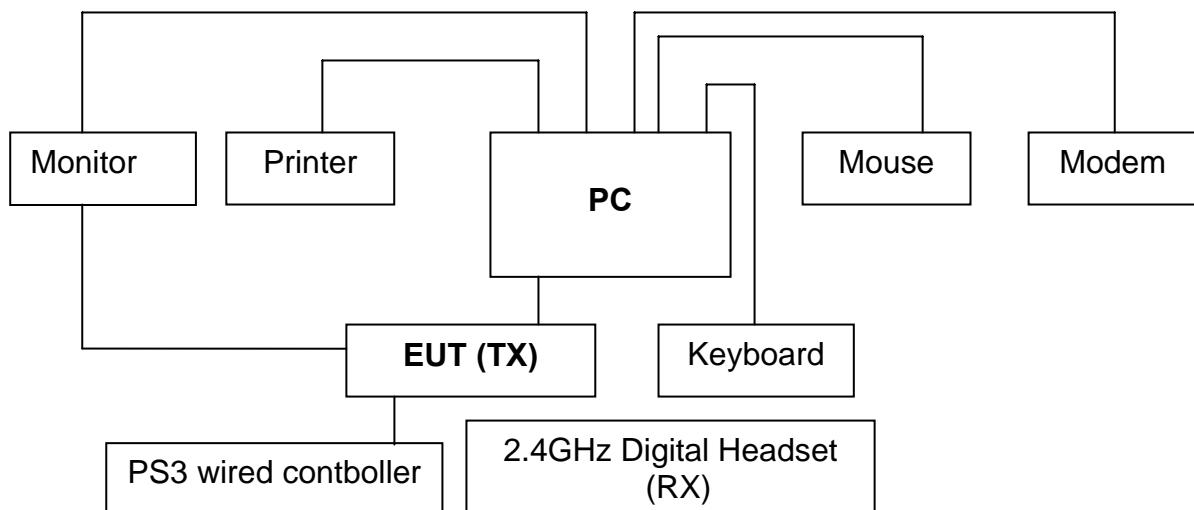


5.3 CONFIGURATION OF SYSTEM UNDER TEST

Setup Diagram



Test Mode: X-BOX + Charging



Test Mode: PC + Charging



6. FCC PART 15.247 REQUIREMENTS

6.1 20DB BANDWIDTH

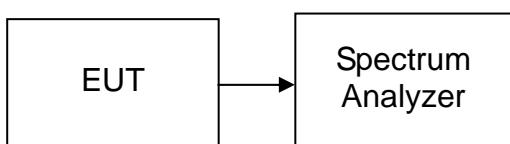
None; for reporting purpose only.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Span=5MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

TEST RESULTS

No non-compliance noted

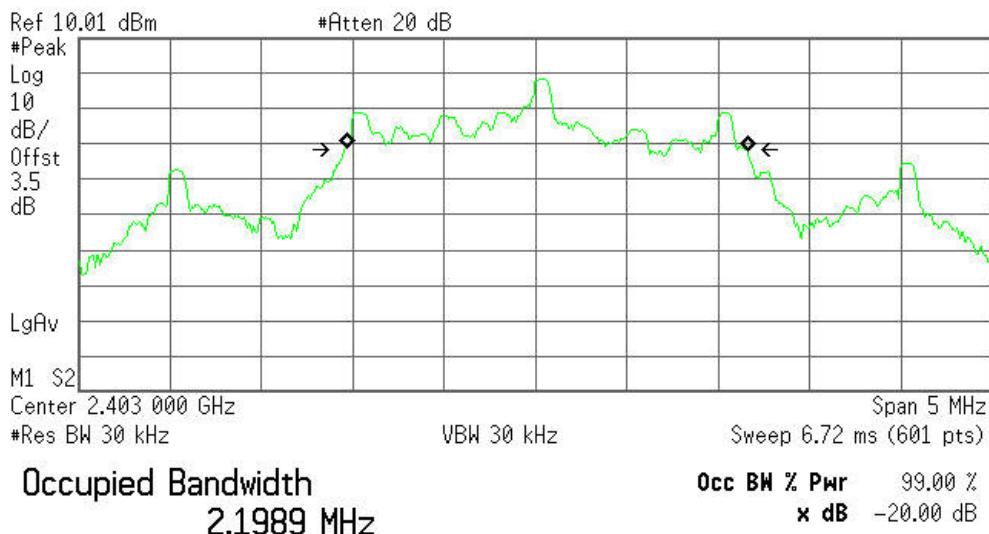


Test plot
Antenna 1

20dB Bandwidth (CH Low)

Agilent

R T

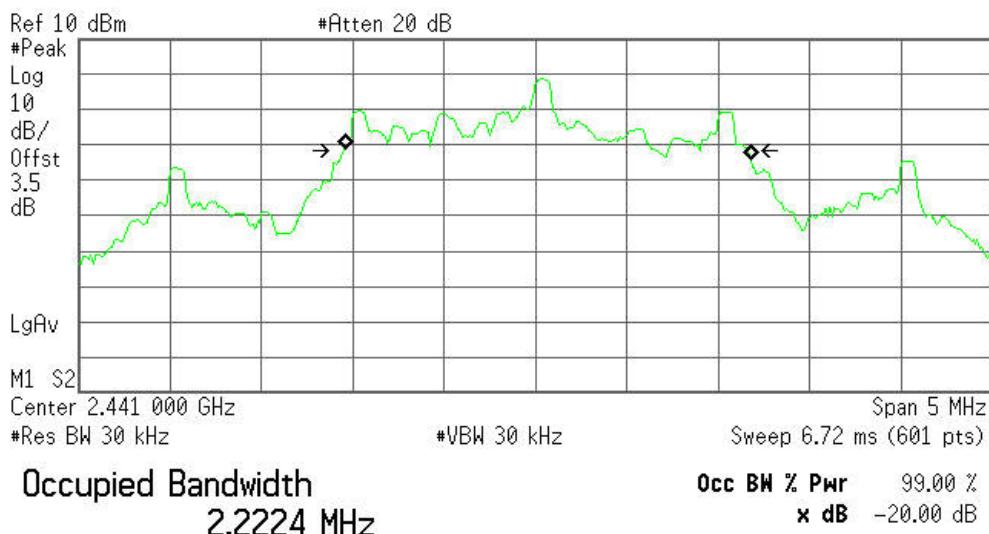


Transmit Freq Error 63.534 kHz
x dB Bandwidth 2.210 MHz

20dB Bandwidth (CH Mid)

Agilent

R T

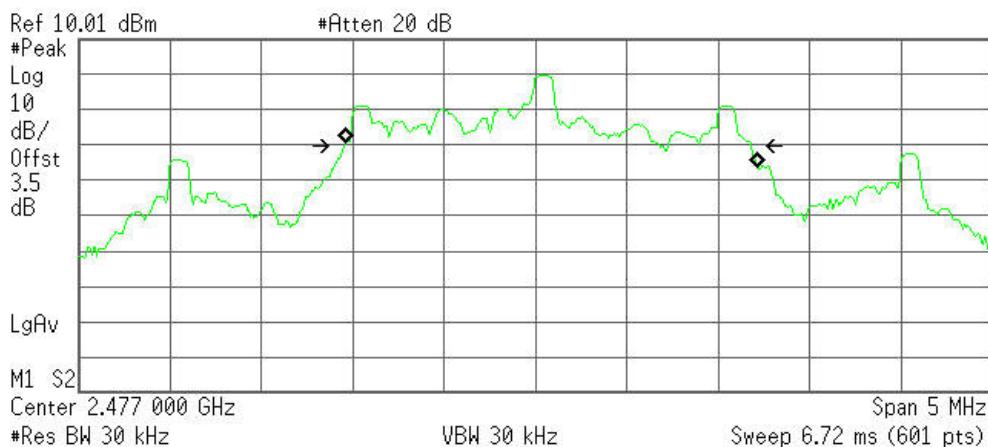


Transmit Freq Error 69.472 kHz
x dB Bandwidth 2.214 MHz

**20dB Bandwidth (CH High)**

Agilent

R T

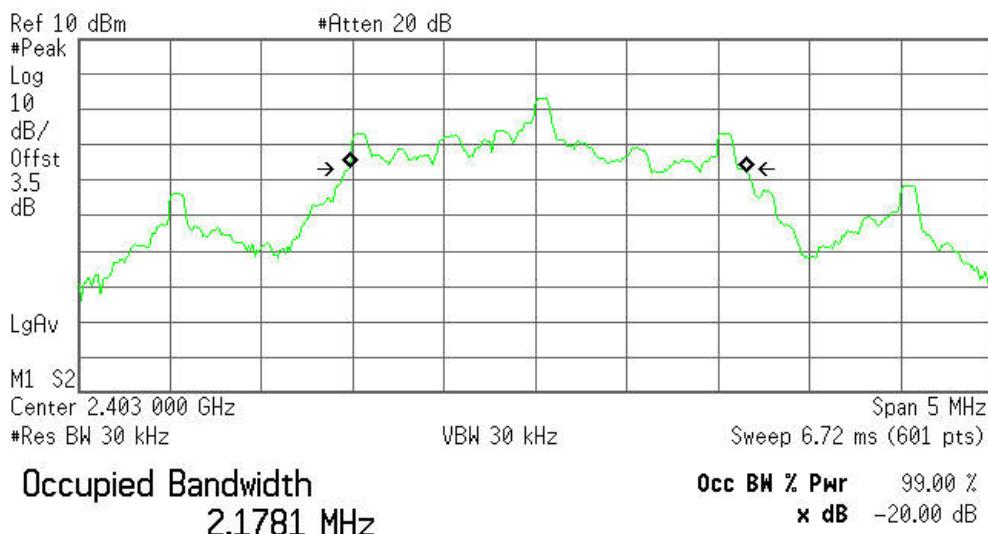


Transmit Freq Error 88.719 kHz
x dB Bandwidth 2.233 MHz

Test plot**Antenna 2****20dB Bandwidth (CH Low)**

Agilent

R T

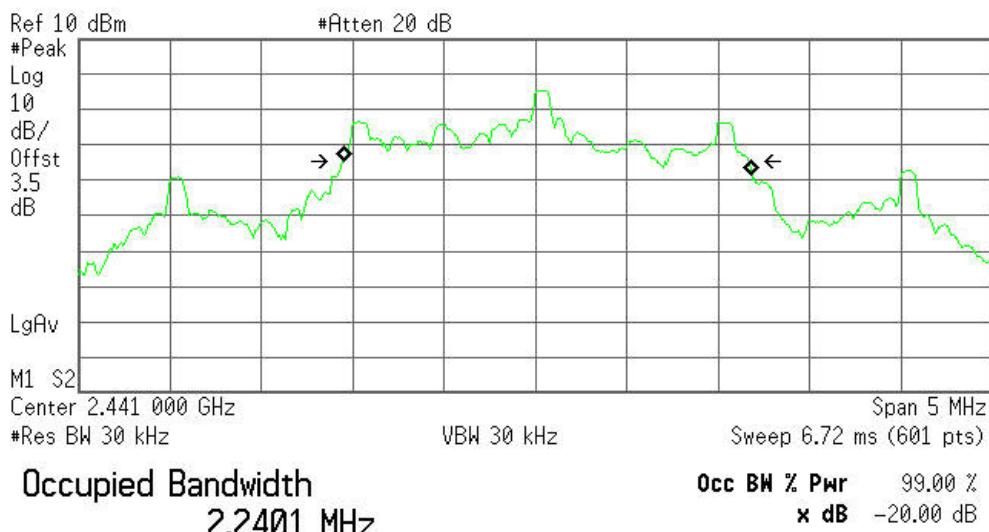


Transmit Freq Error 69.454 kHz
x dB Bandwidth 2.170 MHz

**20dB Bandwidth (CH Mid)**

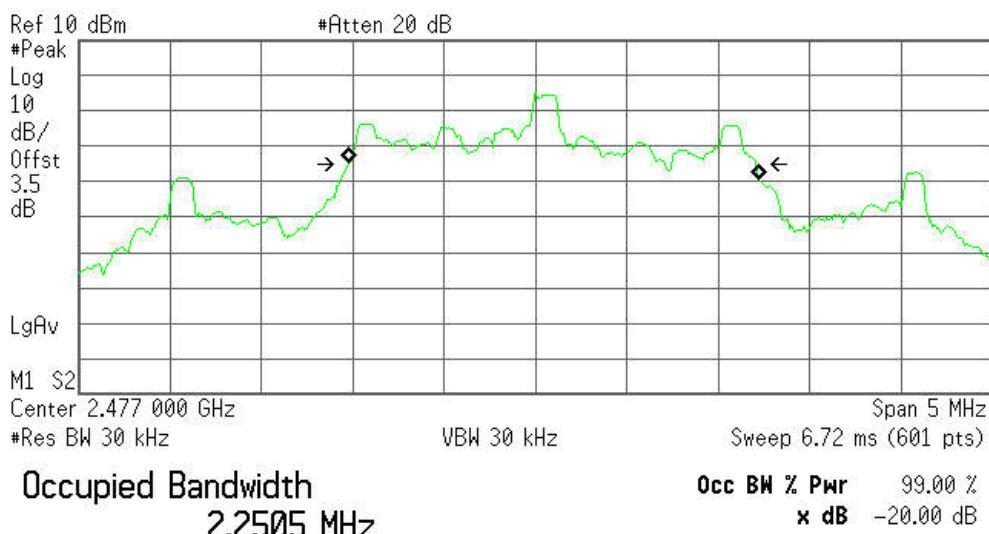
Agilent

R T

Transmit Freq Error 66.949 kHz
x dB Bandwidth 2.231 MHz**20dB Bandwidth (CH High)**

Agilent

R T

Transmit Freq Error 101.973 kHz
x dB Bandwidth 2.240 MHz



6.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

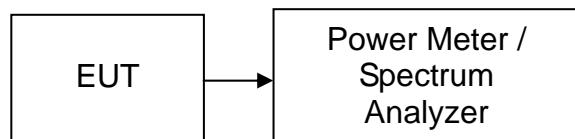
1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2487A	6K00001491	03/19/2012	03/19/2013
Power Sensor	Anritsu	MA2411B	1126150	01/27/2012	01/27/2013
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



TEST RESULTS

No non-compliance noted

Test Data

Antenna 1

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2403	-5.42	3.50	-1.92	0.00064	1	PASS
Mid	2441	-4.24	3.50	-0.74	0.00084		PASS
High	2477	-3.00	3.50	0.50	0.00112		PASS

Antenna 2

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2403	-9.47	3.50	-5.97	0.00025	1	PASS
Mid	2441	-7.61	3.50	-4.11	0.00039		PASS
High	2477	-8.15	3.50	-4.65	0.00034		PASS



6.3 PEAK POWER SPECTRAL DENSITY

LIMIT

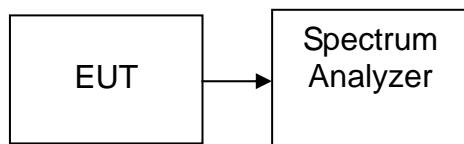
1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

Not applicable. Since EUT belong to frequency-hopping technology.

6.4 BAND EDGES MEASUREMENT

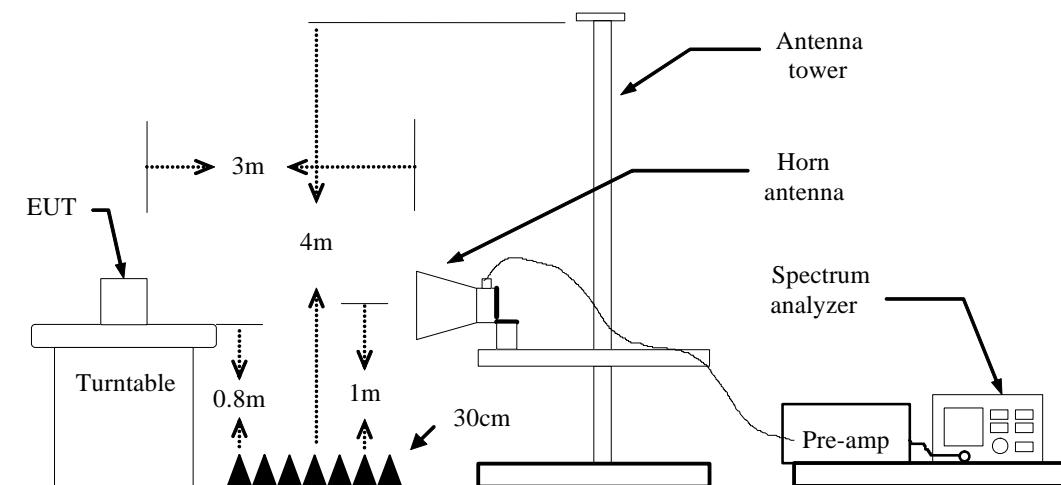
LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/17/2012	03/17/2013
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2012	03/18/2013
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2012	03/18/2013
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/17/2012	03/17/2013
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/17/2012	03/17/2013
Loop Antenna	A. R. A	PLA-1030/B	1029	03/23/2012	03/23/2013
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/19/2012	03/19/2013
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD		LZ-RF / CCS-SZ-3A2		

Test Configuration

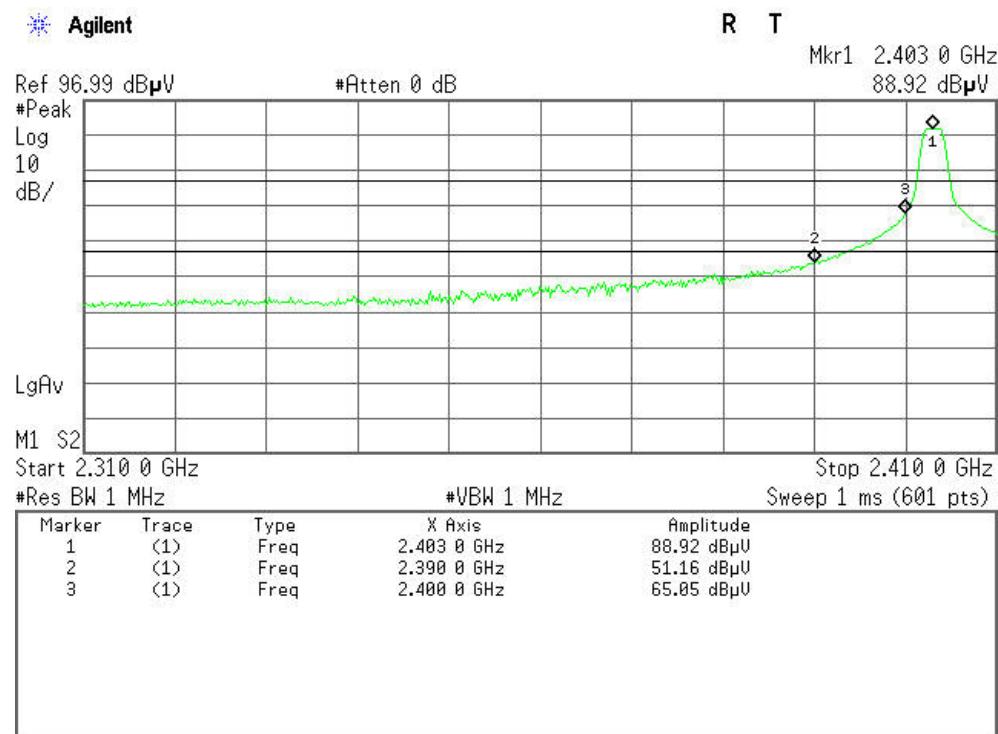
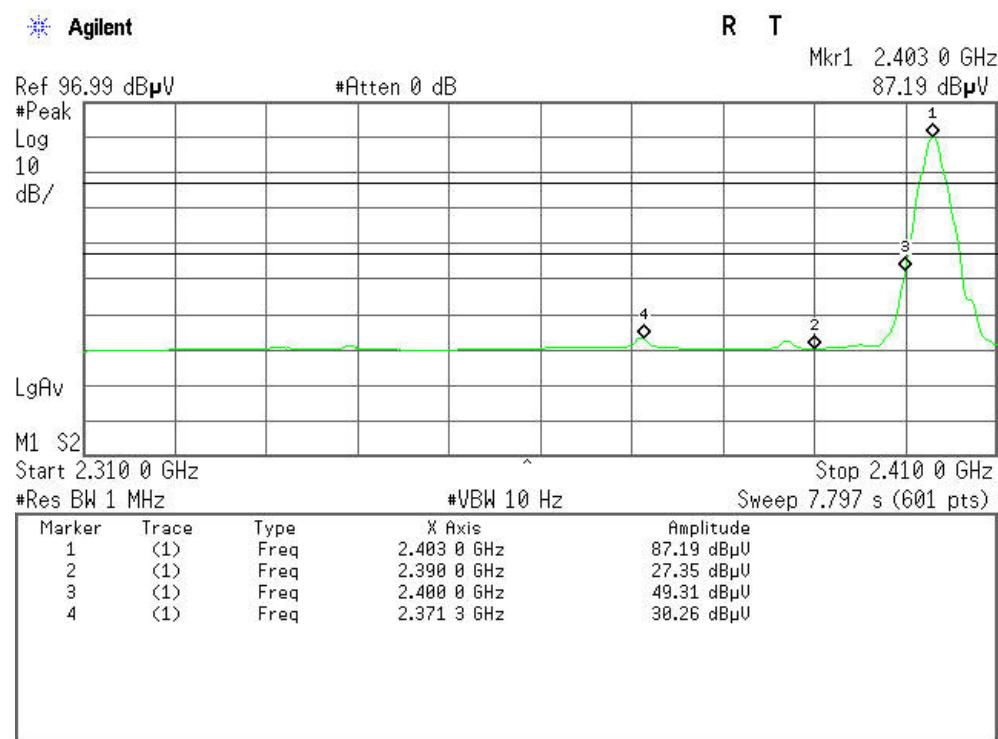


**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz/ Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.

**Test Data****Antenna 1****Band Edges (CH-Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

**Detector mode: Peak****Polarity: Horizontal****Agilent**Ref 96.99 dB μ V

#Atten 0 dB

R T
Mkr1 2.403 7 GHz
86.88 dB μ V

#Peak

Log
10
dB/

LgAv

M1 S2

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.410 0 GHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.403 7 GHz	86.88 dB μ V
2	(1)	Freq	2.390 0 GHz	47.49 dB μ V
3	(1)	Freq	2.400 0 GHz	62.56 dB μ V

Detector mode: Average**Polarity: Horizontal****Agilent**Ref 96.99 dB μ V

#Atten 0 dB

R T
Mkr1 2.403 0 GHz
84.90 dB μ V

#Peak

Log
10
dB/

LgAv

M1 S2

Start 2.310 0 GHz

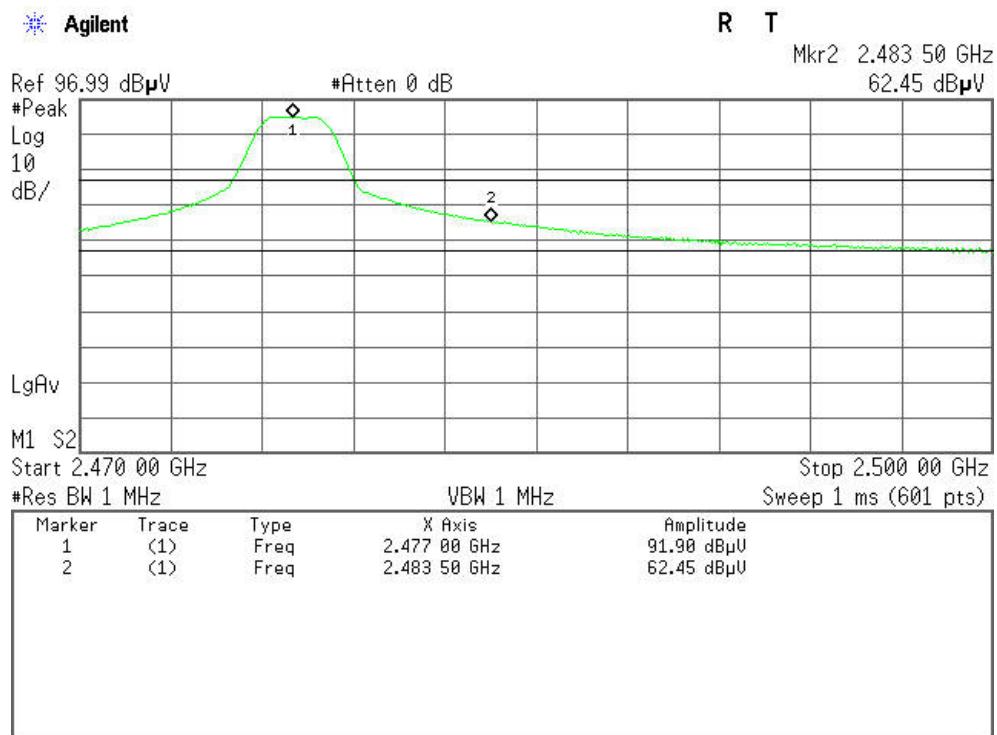
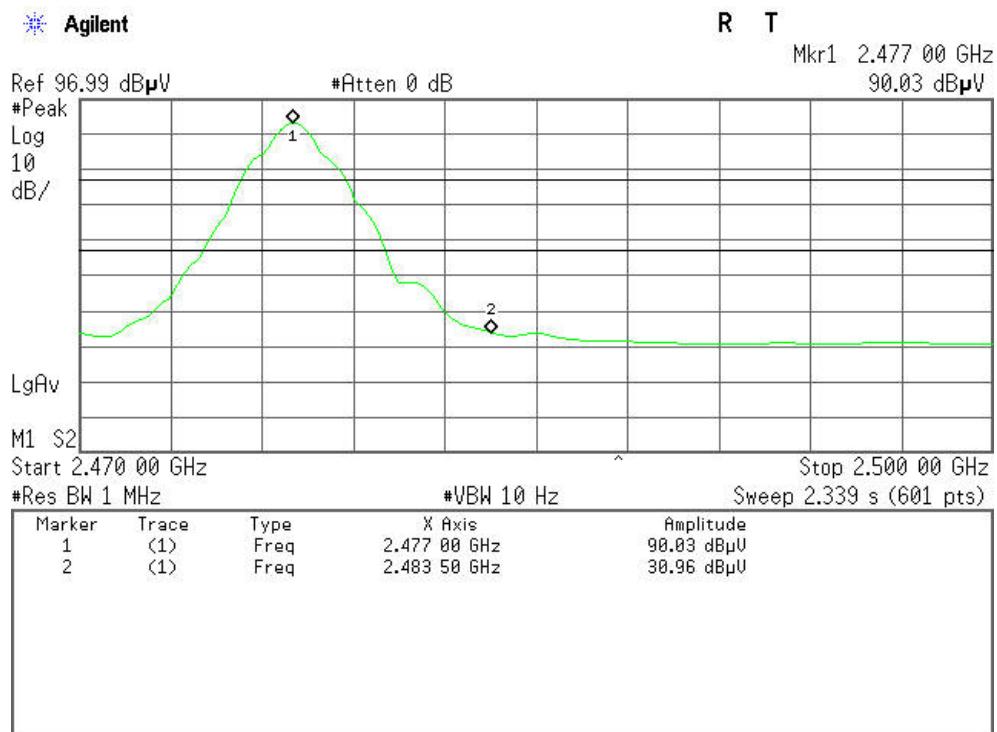
#Res BW 1 MHz

#VBW 10 Hz

Stop 2.410 0 GHz

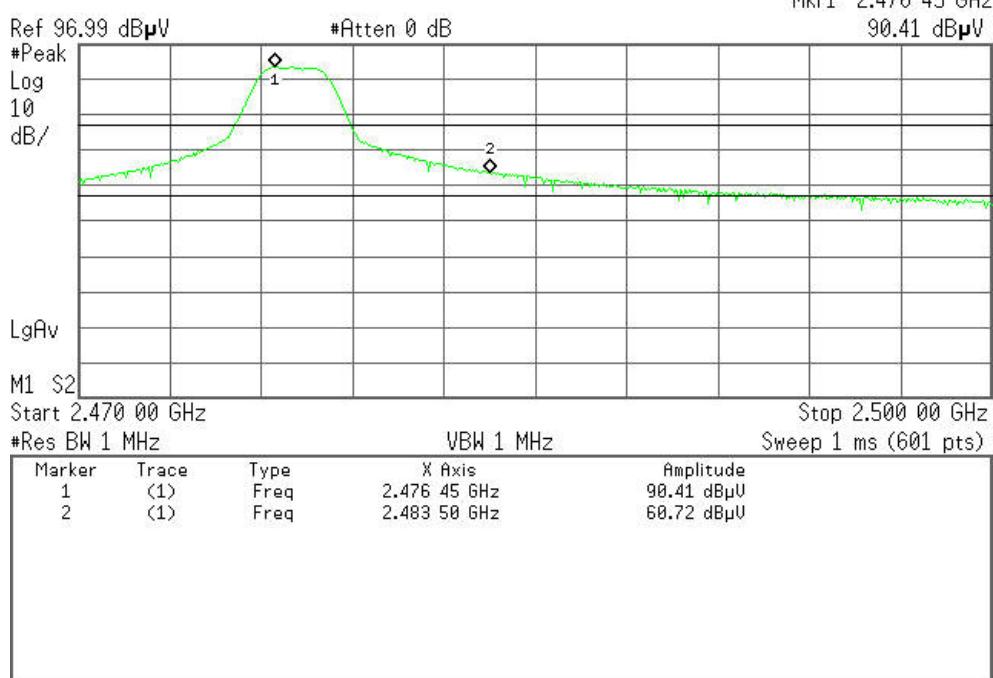
Sweep 7.797 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.403 0 GHz	84.90 dB μ V
2	(1)	Freq	2.390 0 GHz	27.26 dB μ V
3	(1)	Freq	2.400 0 GHz	47.14 dB μ V
4	(1)	Freq	2.371 2 GHz	29.59 dB μ V

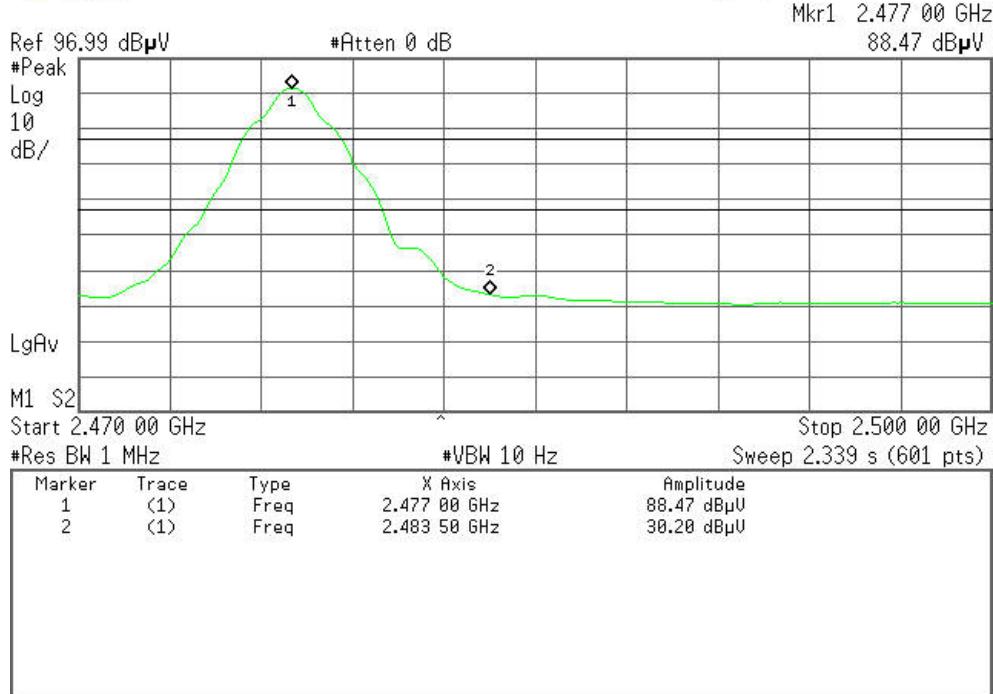
**Band Edges (CH-High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

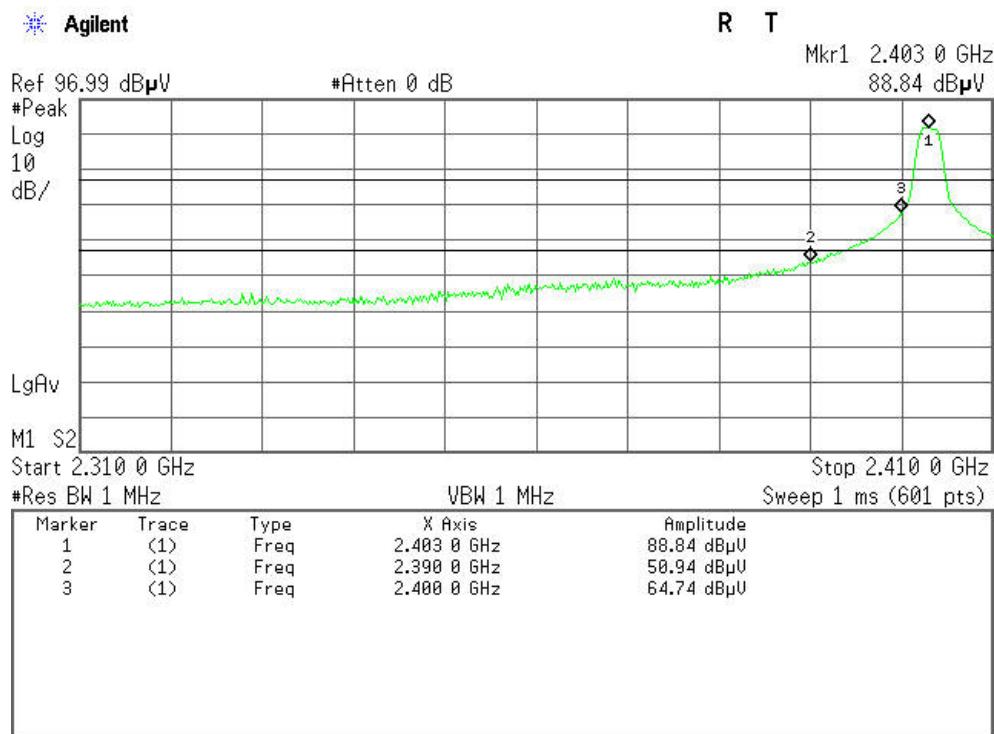
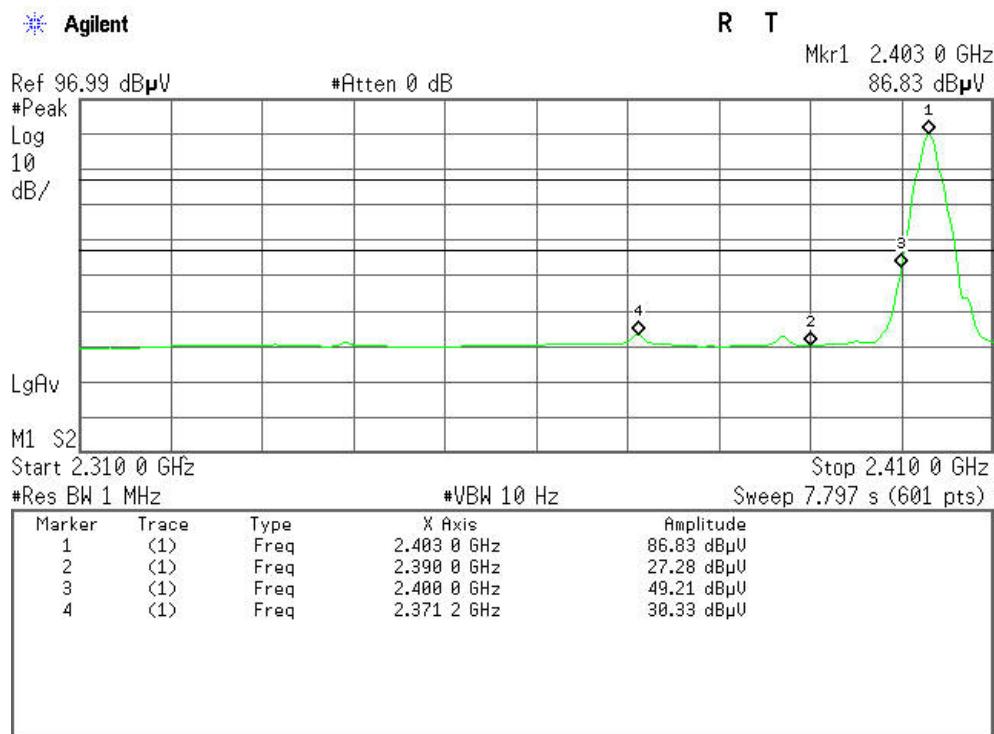
**Detector mode: Peak****Polarity: Horizontal**

Agilent

**Detector mode: Average****Polarity: Horizontal**

Agilent



**Antenna 2****Band Edges (CH-Low)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

**Detector mode: Peak****Polarity: Horizontal**

Agilent

Ref 96.99 dB μ V

#Atten 0 dB

R T
Mkr1 2.403 0 GHz
85.14 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.310 0 GHz

VBW 1 MHz

Stop 2.410 0 GHz

#Res BW 1 MHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.403 0 GHz	85.14 dB μ V
2	(1)	Freq	2.390 0 GHz	48.33 dB μ V
3	(1)	Freq	2.400 0 GHz	62.53 dB μ V

Detector mode: Average**Polarity: Horizontal**

Agilent

Ref 96.99 dB μ V

#Atten 0 dB

R T
Mkr1 2.403 0 GHz
83.44 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.310 0 GHz

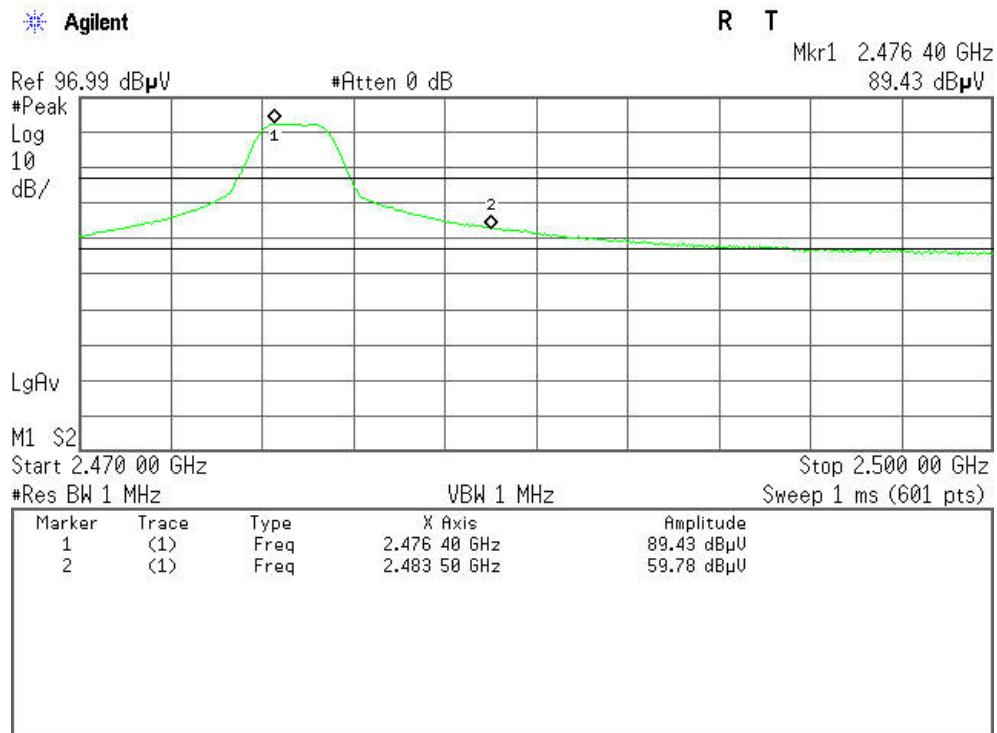
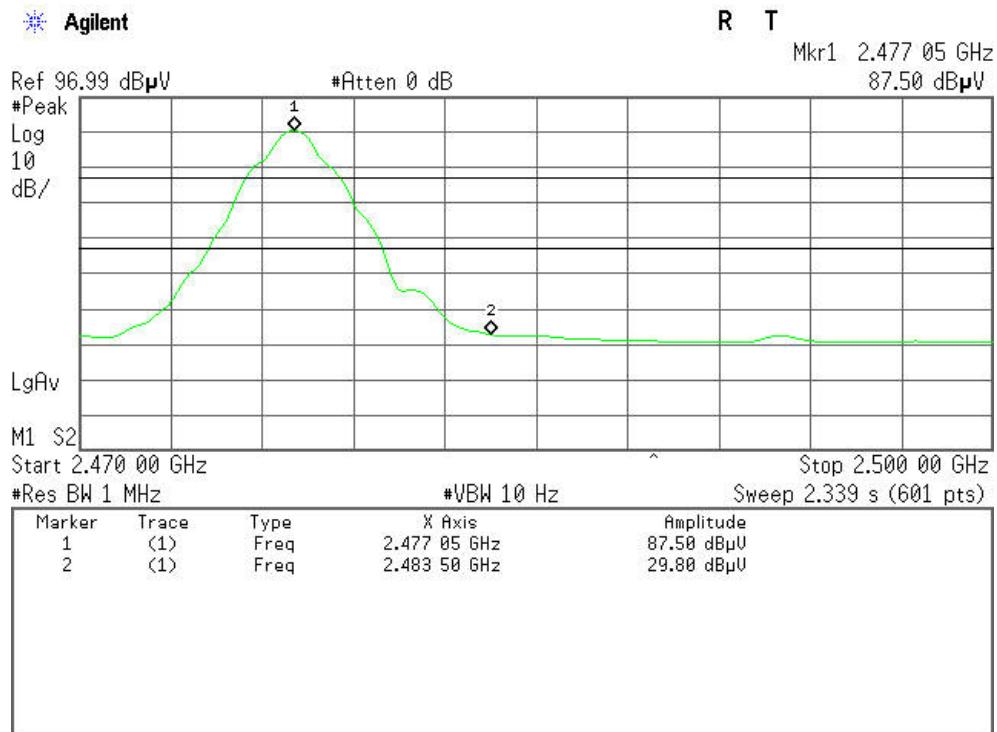
#VBW 10 Hz

Stop 2.410 0 GHz

#Res BW 1 MHz

Sweep 7.797 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.403 0 GHz	83.44 dB μ V
2	(1)	Freq	2.390 0 GHz	27.23 dB μ V
3	(1)	Freq	2.400 0 GHz	45.84 dB μ V
4	(1)	Freq	2.370 8 GHz	29.31 dB μ V

**Band Edges (CH-High)****Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

**Detector mode: Peak****Polarity: Horizontal**Ref 96.99 dB μ V

#Atten 0 dB

R T

Mkr1 2.476 45 GHz

87.85 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.470 00 GHz

#Res BW 1 MHz

VBW 1 MHz

Stop 2.500 00 GHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.476 45 GHz	87.85 dB μ V
2	(1)	Freq	2.483 50 GHz	57.82 dB μ V

Detector mode: Average**Polarity: Horizontal**Ref 96.99 dB μ V

#Atten 0 dB

R T

Mkr1 2.477 05 GHz

85.20 dB μ V

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.470 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 2.339 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.477 05 GHz	85.20 dB μ V
2	(1)	Freq	2.483 50 GHz	29.24 dB μ V



6.5 FREQUENCY SEPARATION

LIMIT

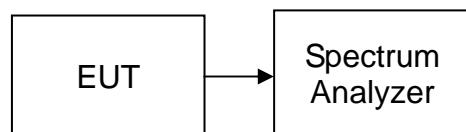
According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 5 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.



TEST RESULTS

No non-compliance noted

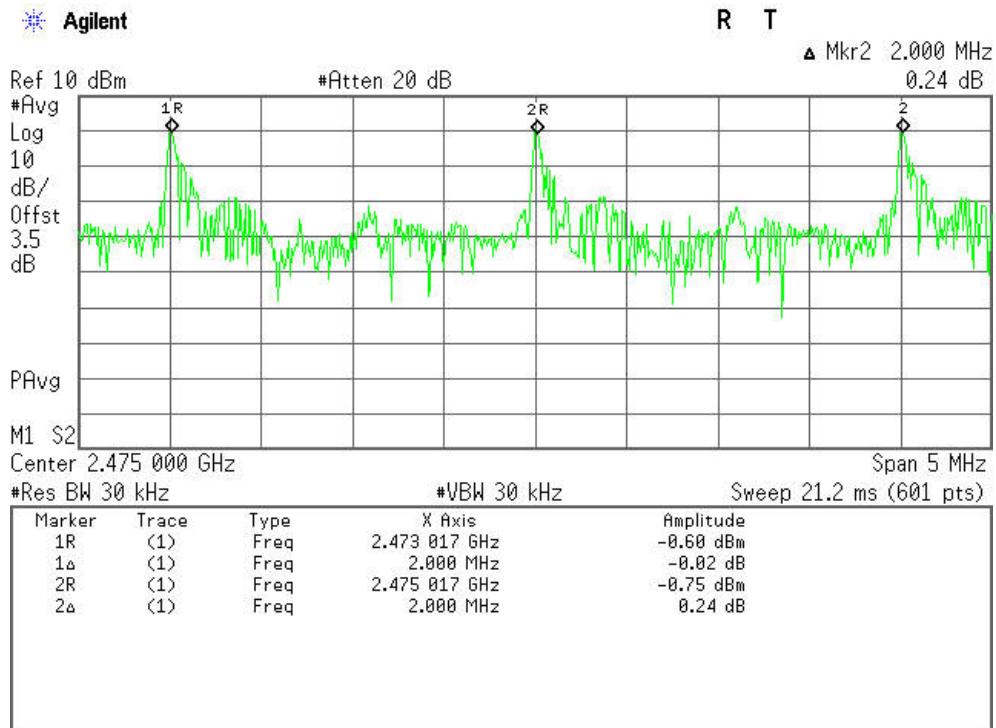
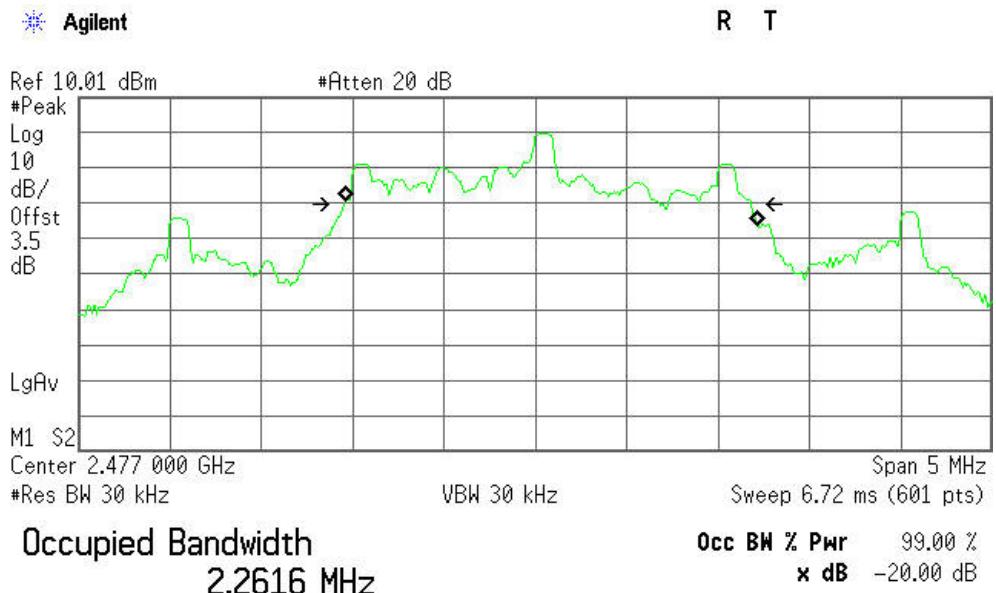
Test Data

Antenna 1

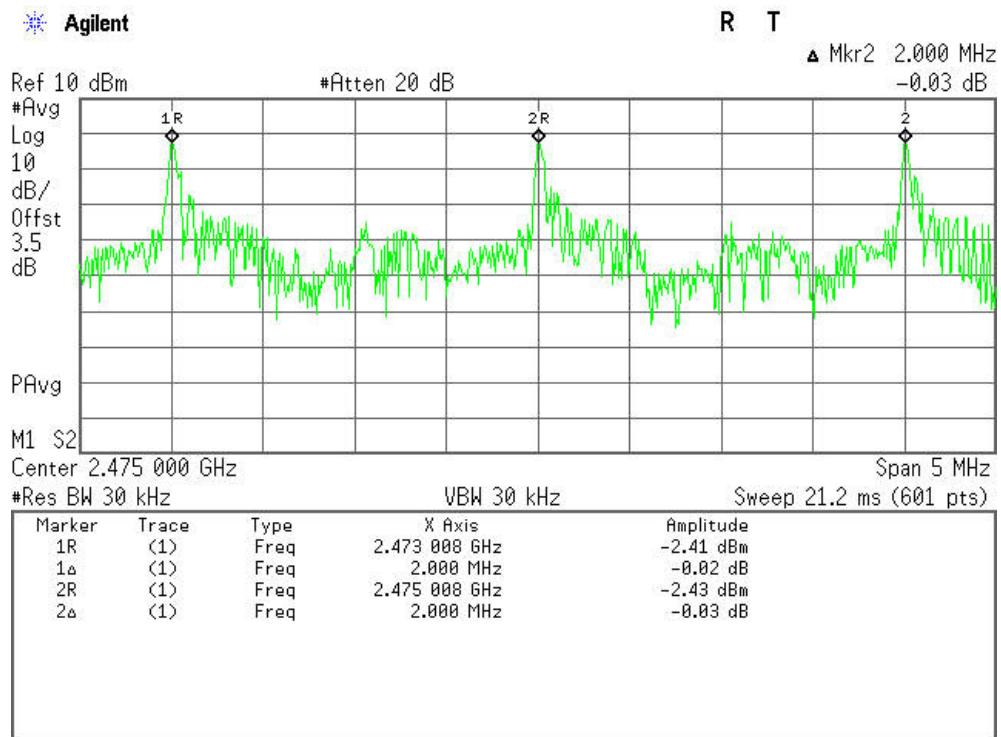
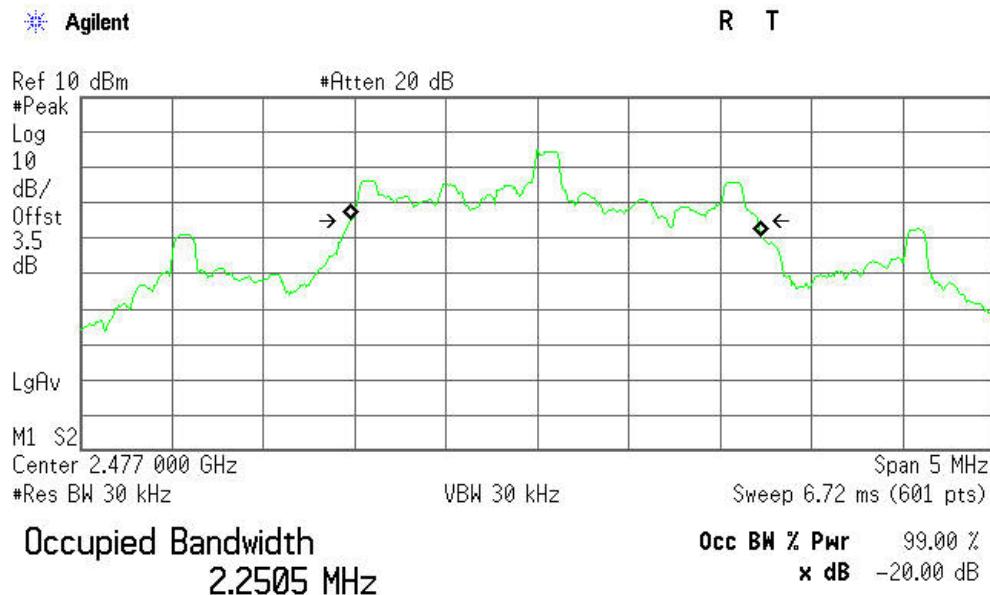
Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
2.000	1488.666	> Two-thirds of the 20 dB Bandwidth	Pass

Antenna 2

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
2.000	1493.333	> Two-thirds of the 20 dB Bandwidth	Pass

**Antenna 1****Test Plot****Measurement of Channel Separation****20 dB bandwidth(CH High)**

Transmit Freq Error 88.719 kHz
x dB Bandwidth 2.233 MHz

Antenna 2Test PlotMeasurement of Channel Separation20 dB bandwidth(CH High)

Transmit Freq Error 101.973 kHz
x dB Bandwidth 2.240 MHz



6.6 NUMBER OF HOPPING FREQUENCY

LIMIT

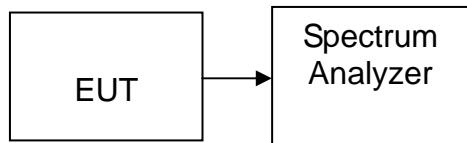
According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

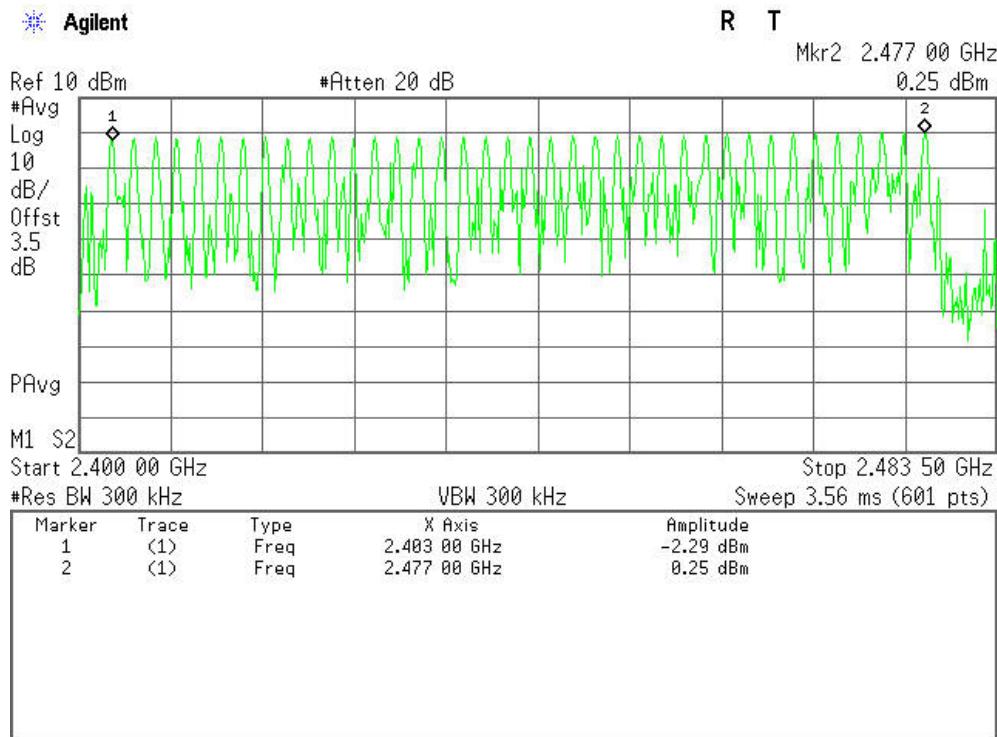
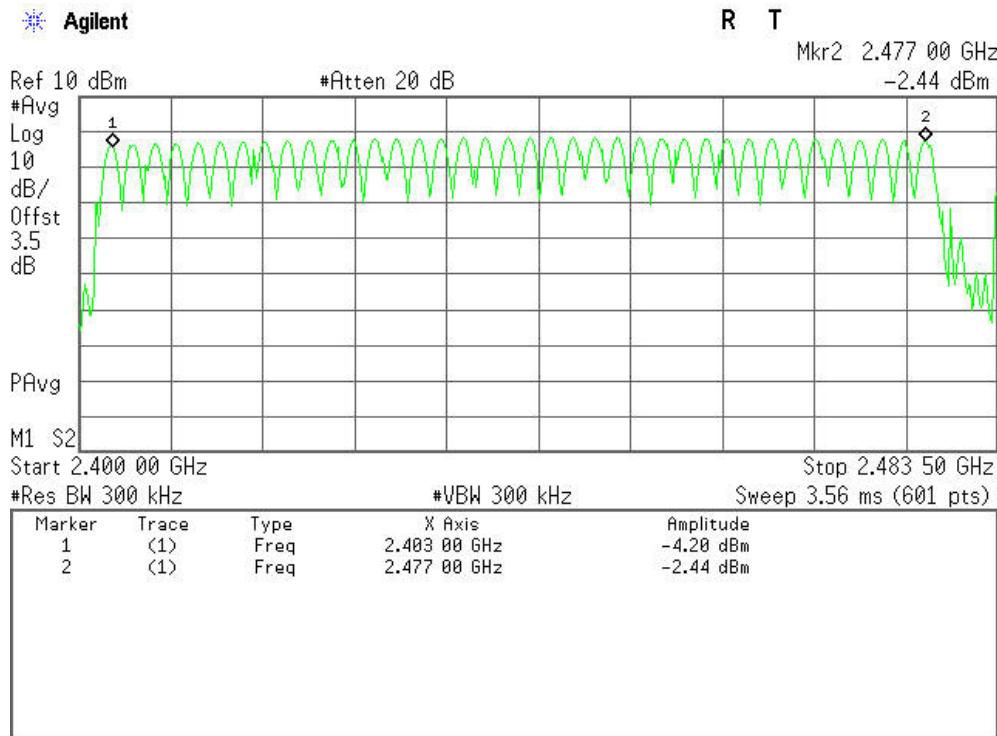
1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

Result (No. of CH)	Limit (No. of CH)	Result
38	>15	PASS

**Test Plot****Channel Number****Antenna 1****2.400 GHz –2.483 GHz****Antenna 2****2.400 GHz –2.483 GHz**



6.7 TIME OF OCCUPANCY (DWELL TIME)

LIMIT

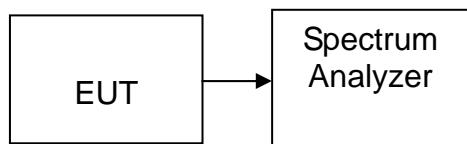
According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Test Data

Antenna 1

CH Mid: $0.516^* (15 / 1.52)^* 15.2 = 77.40(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.516	77.40	15.20	400.00	PASS

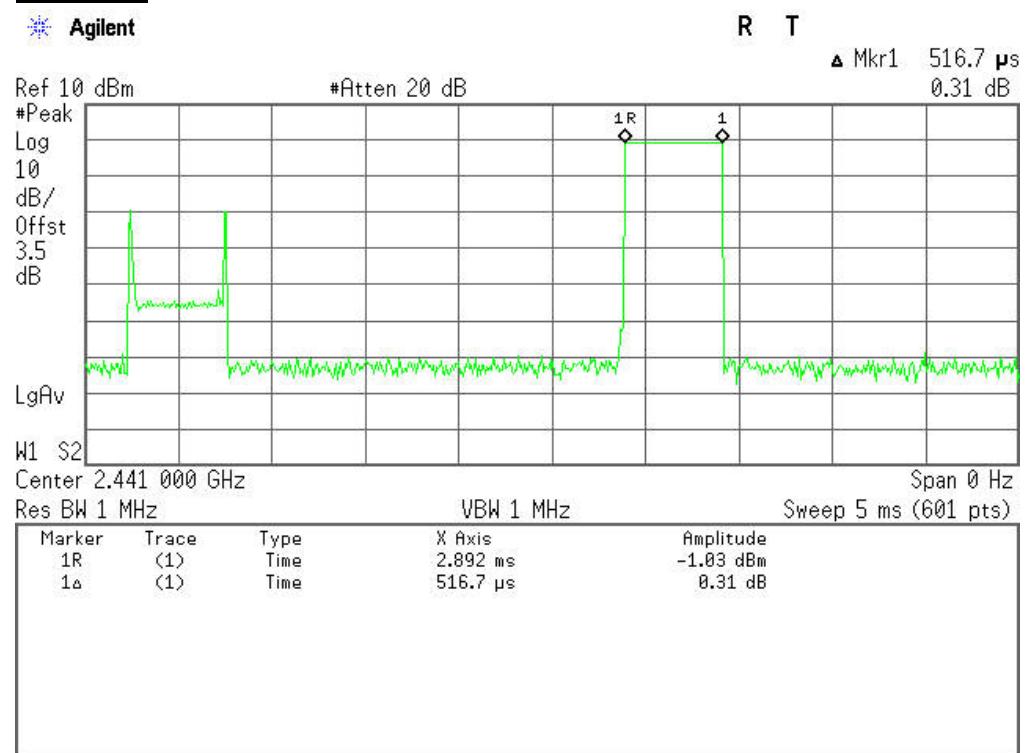
Antenna 2

CH Mid: $0.508^* (15/1.52)^* 15.20 = 76.20(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.508	76.20	15.20	400.00	PASS

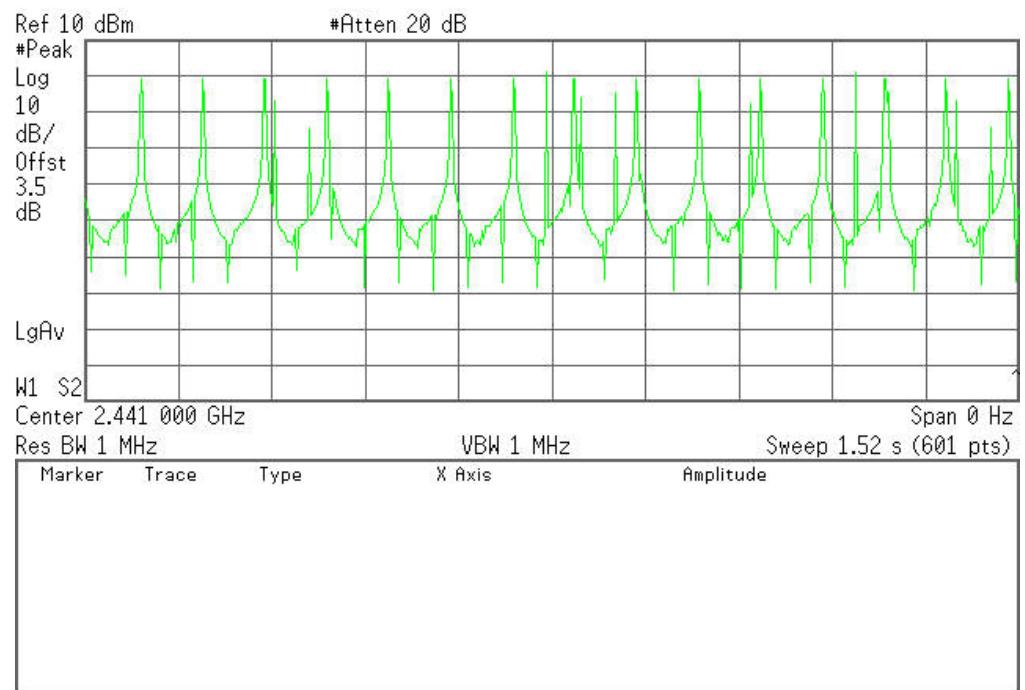
**Test Plot****Antenna 1****(CH Mid)**

Agilent

**(CH Mid)**

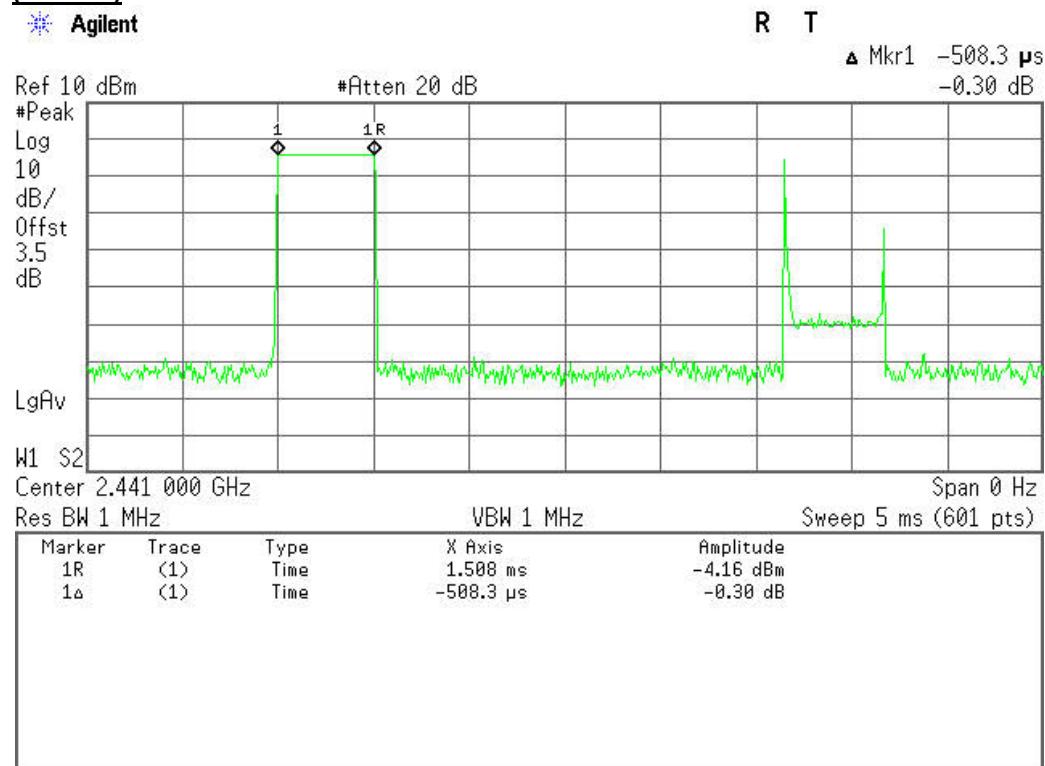
Agilent

R T



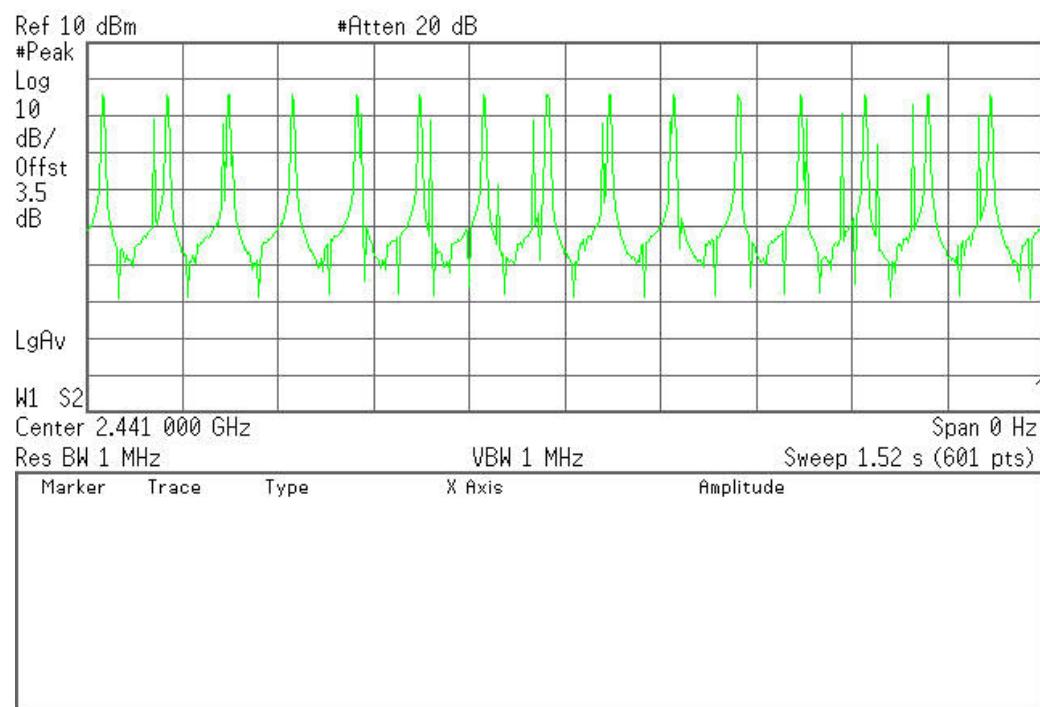
**Antenna 2****(CH Mid)**

Agilent

**(CH Mid)**

Agilent

R T





6.8 SPURIOUS EMISSIONS

6.8.1. Conducted Measurement

LIMIT

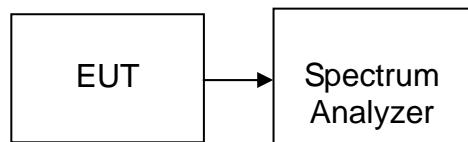
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

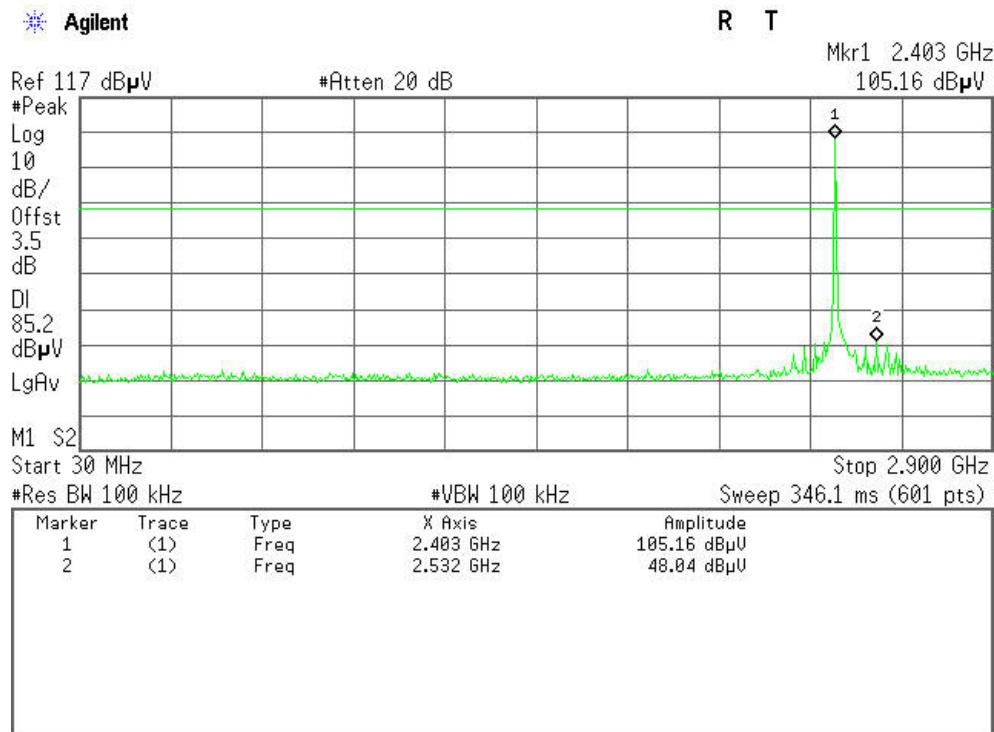
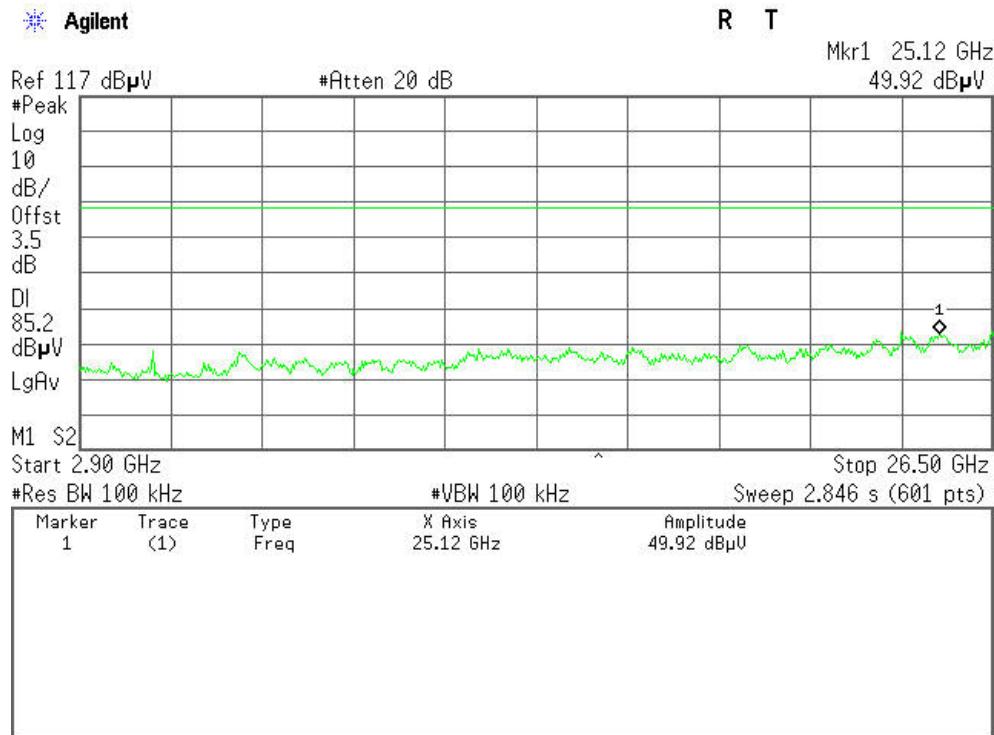
Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

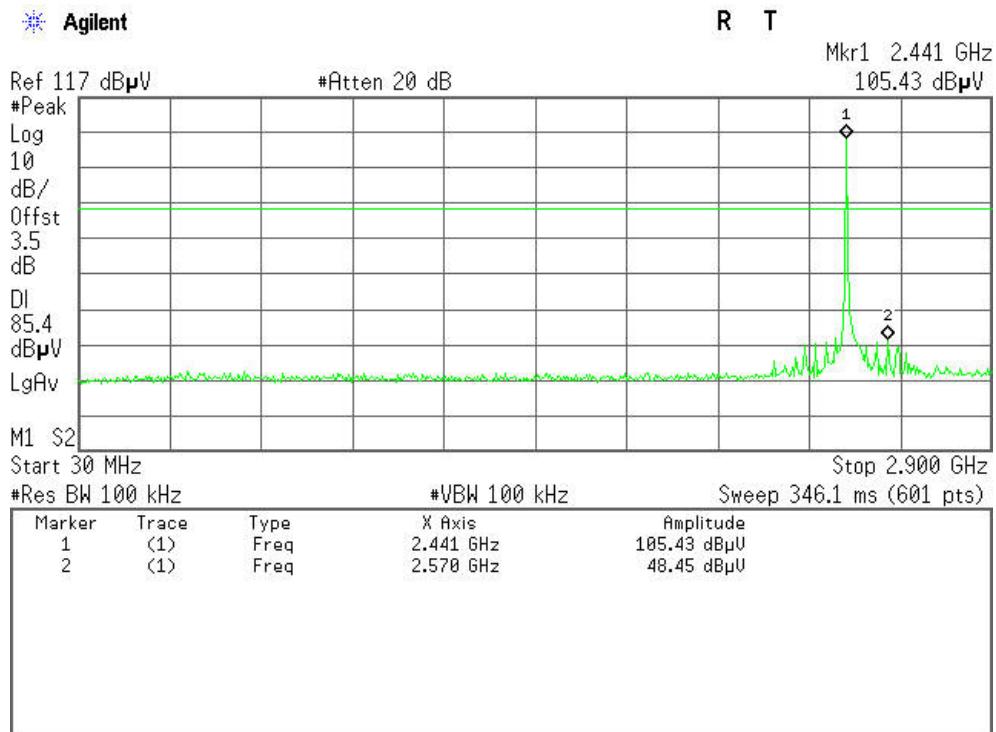
TEST RESULTS

No non-compliance noted

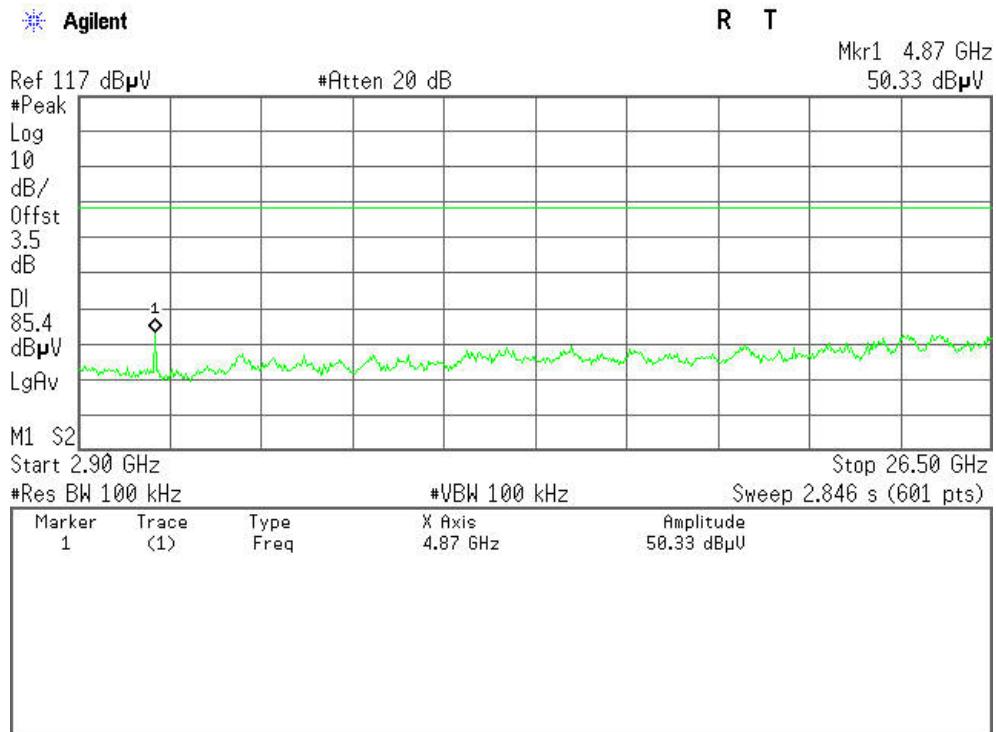
**Test Plot**
Antenna 1**CH Low****30MHz ~2.9GHz****2.9MHz ~26.5GHz**

**CH Mid****30MHz ~ 2.9GHz**

Agilent

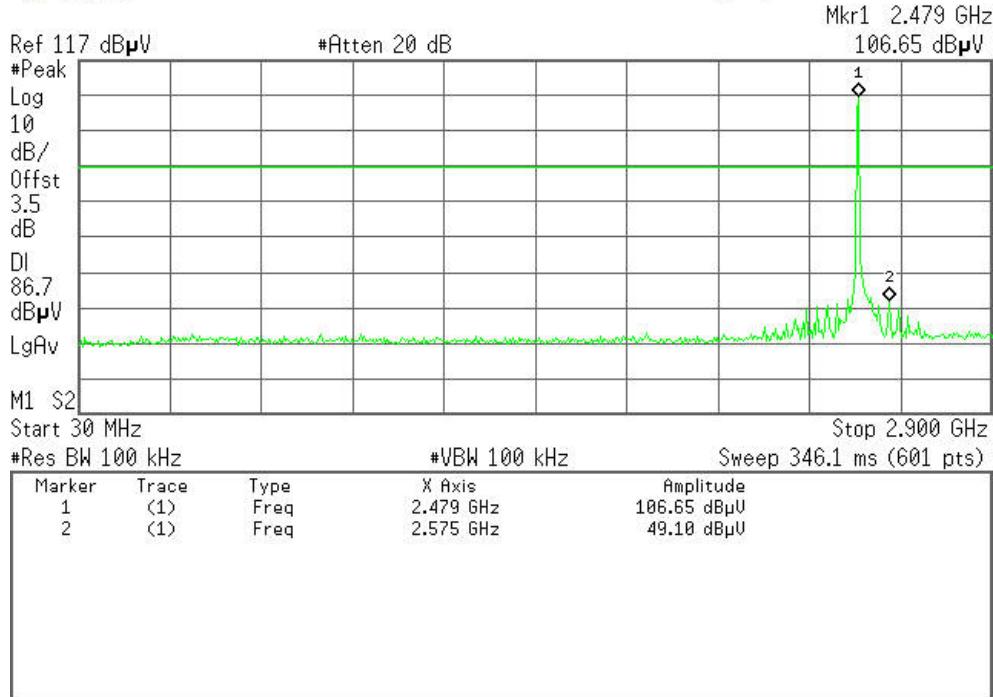
**2.9GHz ~ 26.5GHz**

Agilent

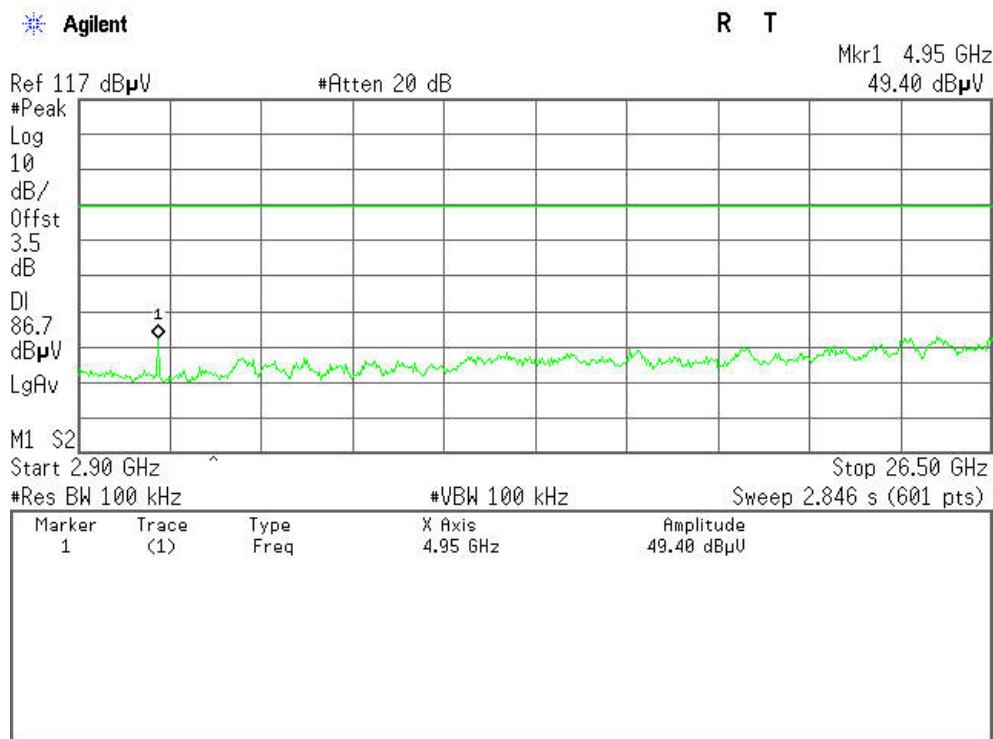


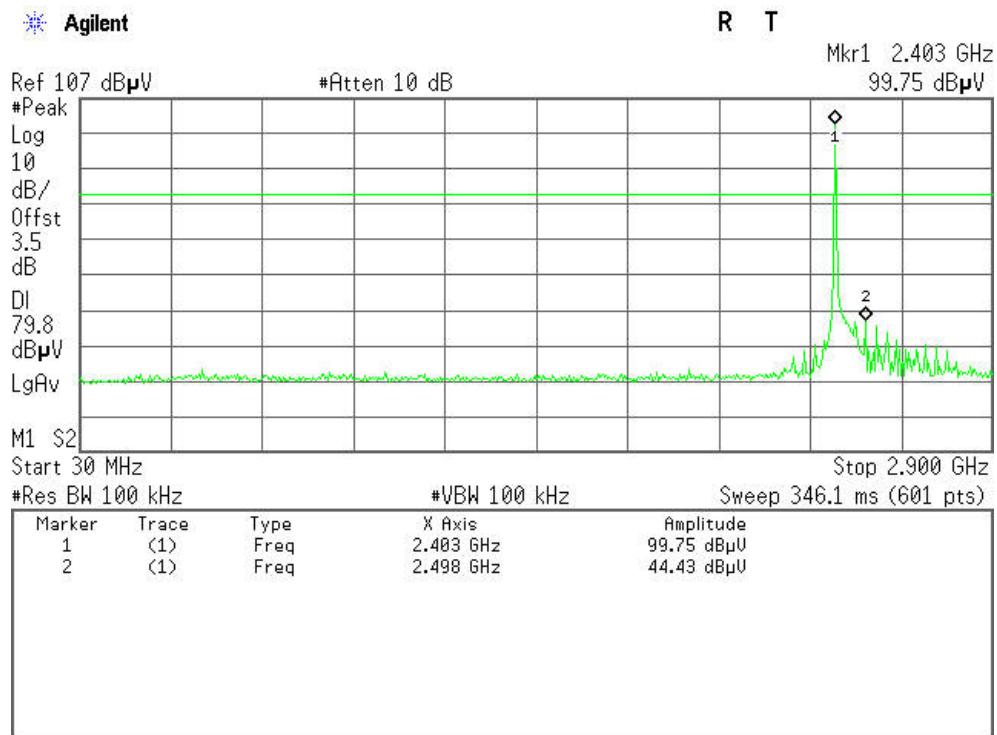
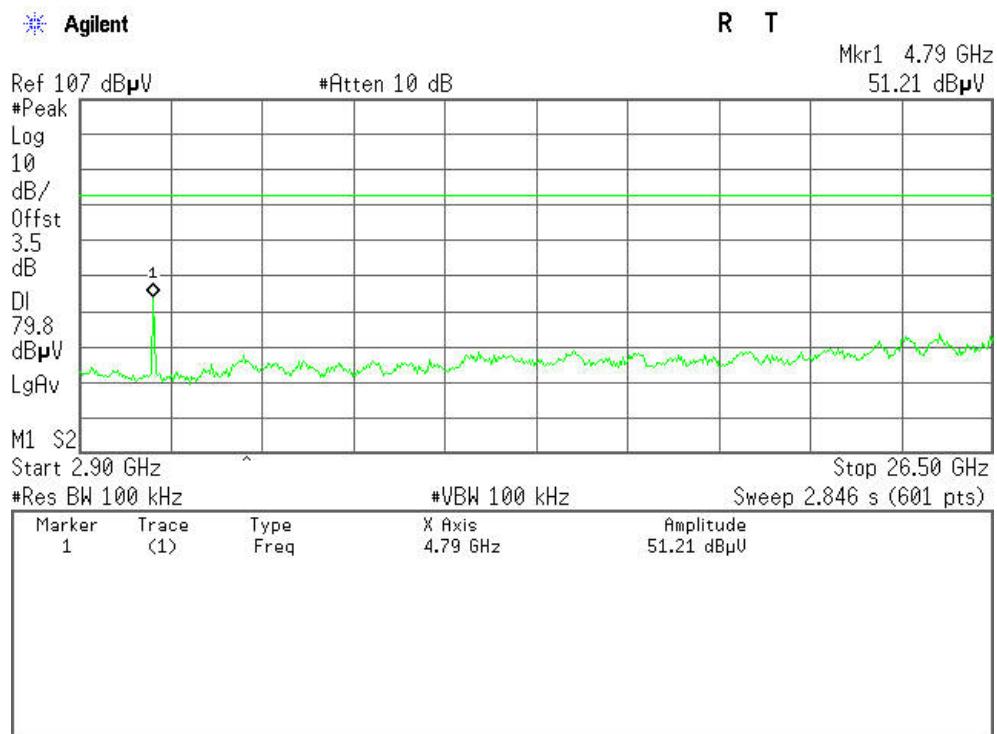
**CH High****30MHz ~ 2.9GHz**

Agilent

**2.9GHz ~ 26.5GHz**

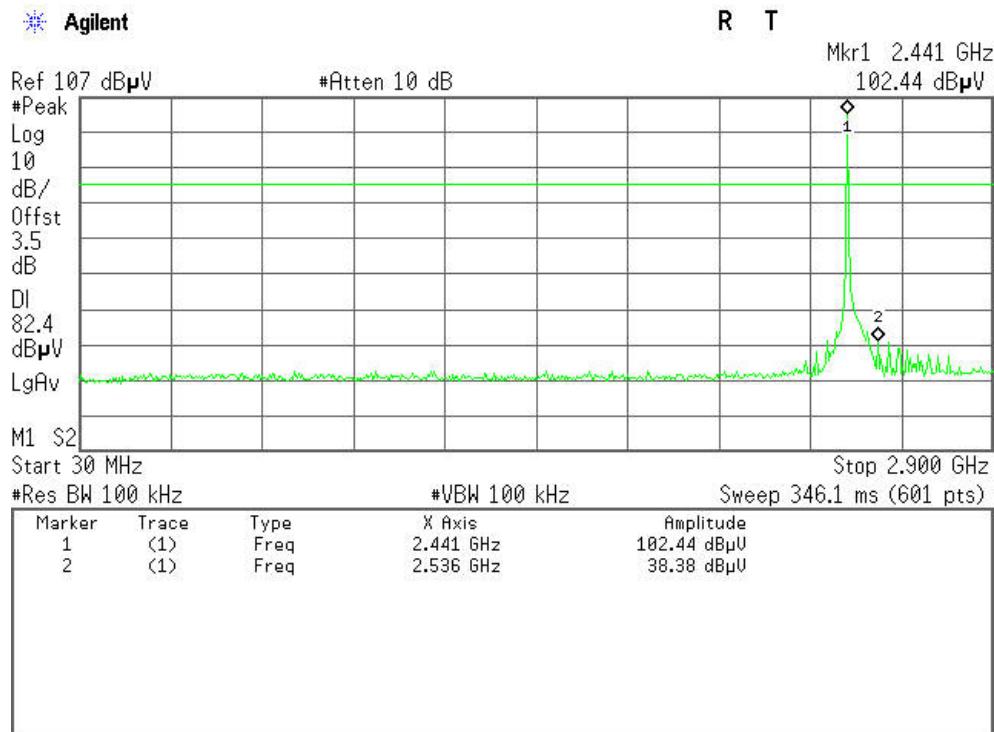
Agilent



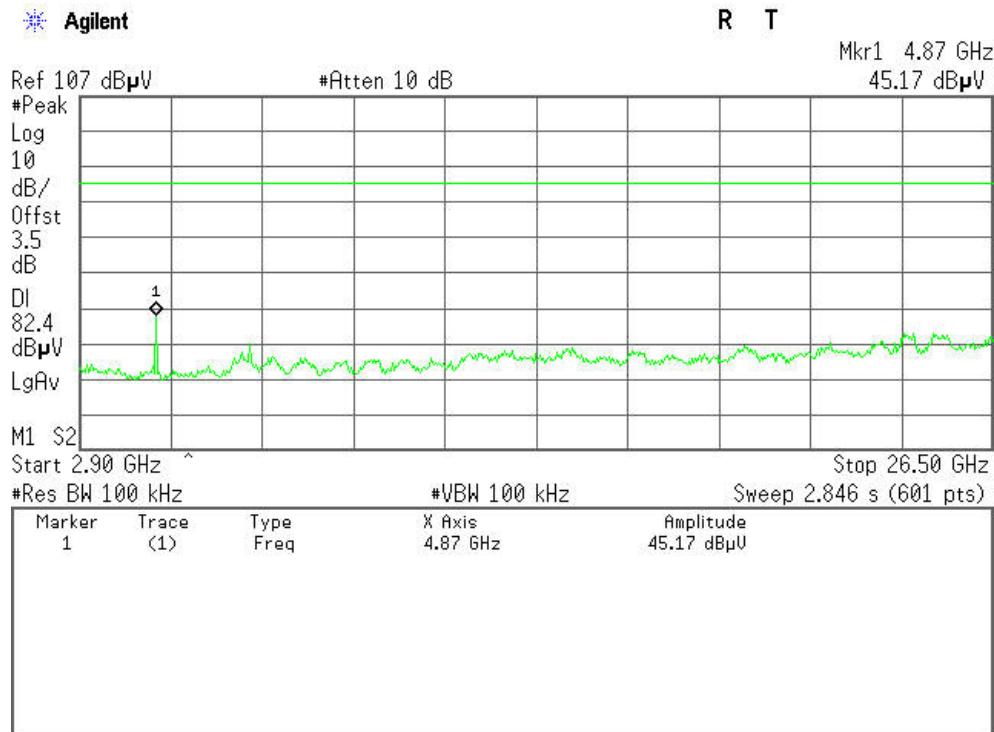
**Antenna 2****CH Low****30MHz ~2.9GHz****2.9MHz ~26.5GHz**

**CH Mid****30MHz ~ 2.9GHz**

Agilent

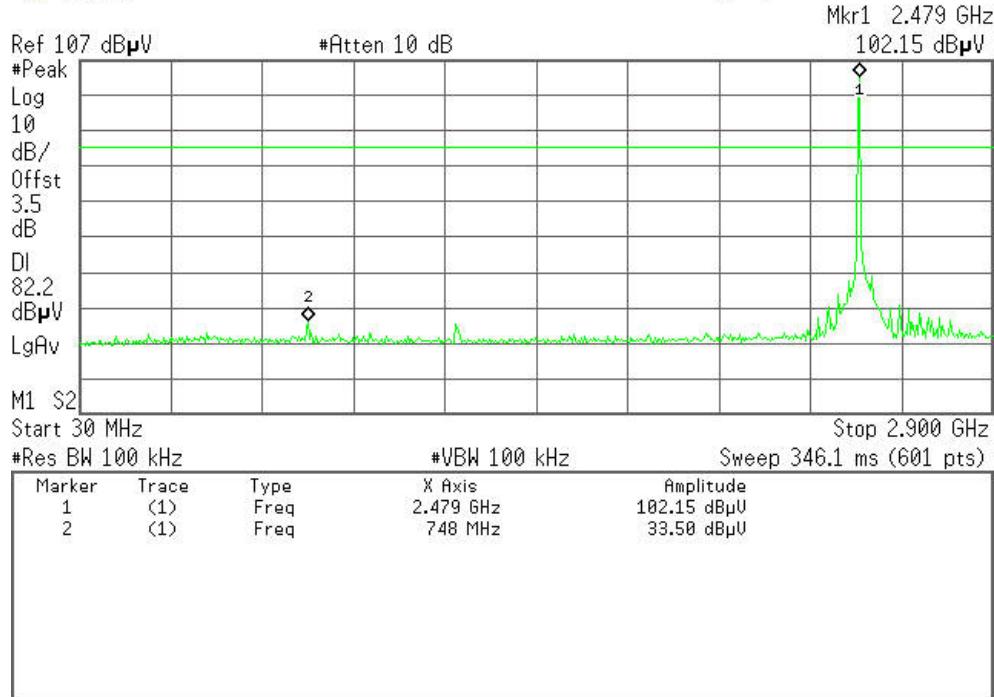
**2.9GHz ~ 26.5GHz**

Agilent

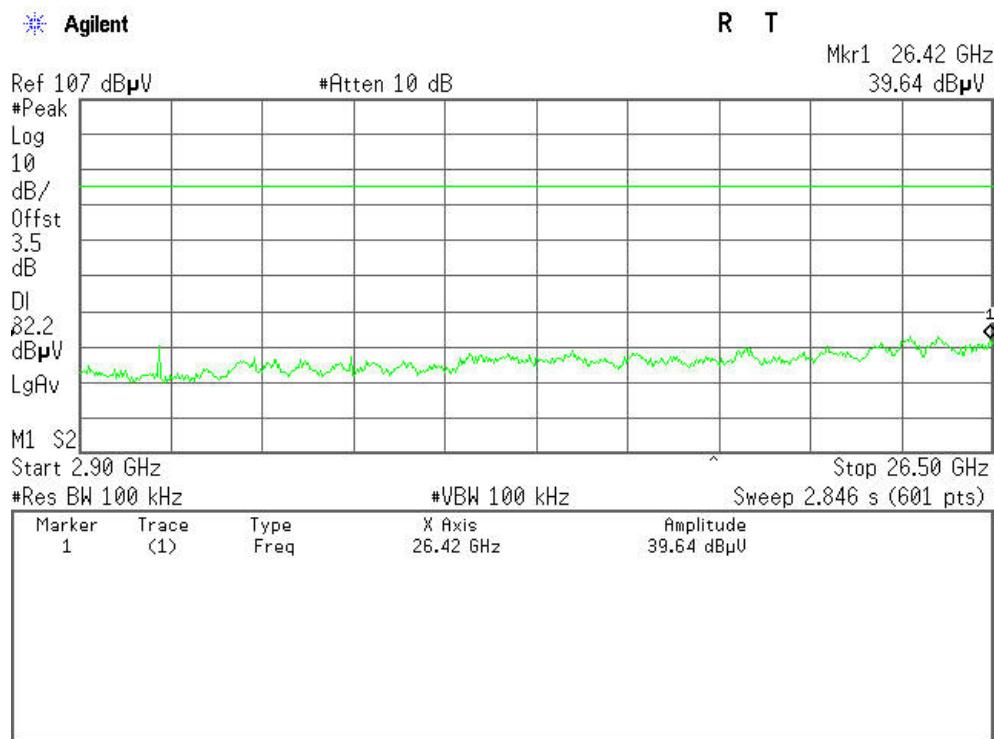


**CH High****30MHz ~ 2.9GHz**

Agilent

**2.9GHz ~ 26.5GHz**

Agilent





6.8.2. Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

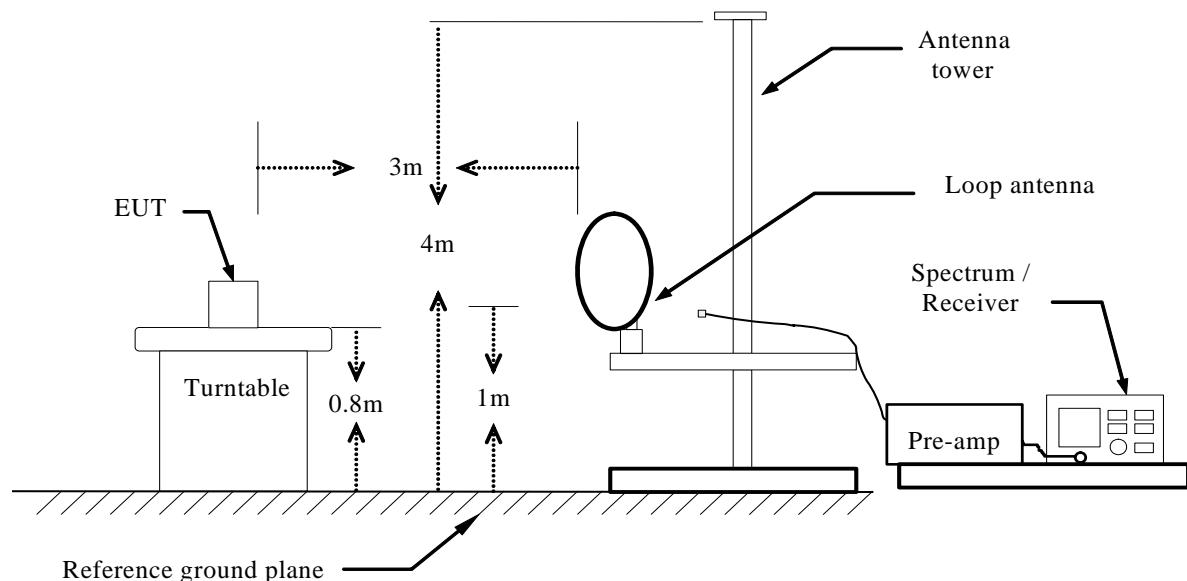
**MEASUREMENT EQUIPMENT USED**

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2012	03/19/2013
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/17/2012	03/17/2013
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2012	03/18/2013
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2012	03/18/2013
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/17/2012	03/17/2013
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/17/2012	03/17/2013
Loop Antenna	A, R, A	PLA-1030/B	1029	03/23/2012	03/23/2013
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/19/2012	03/19/2013
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

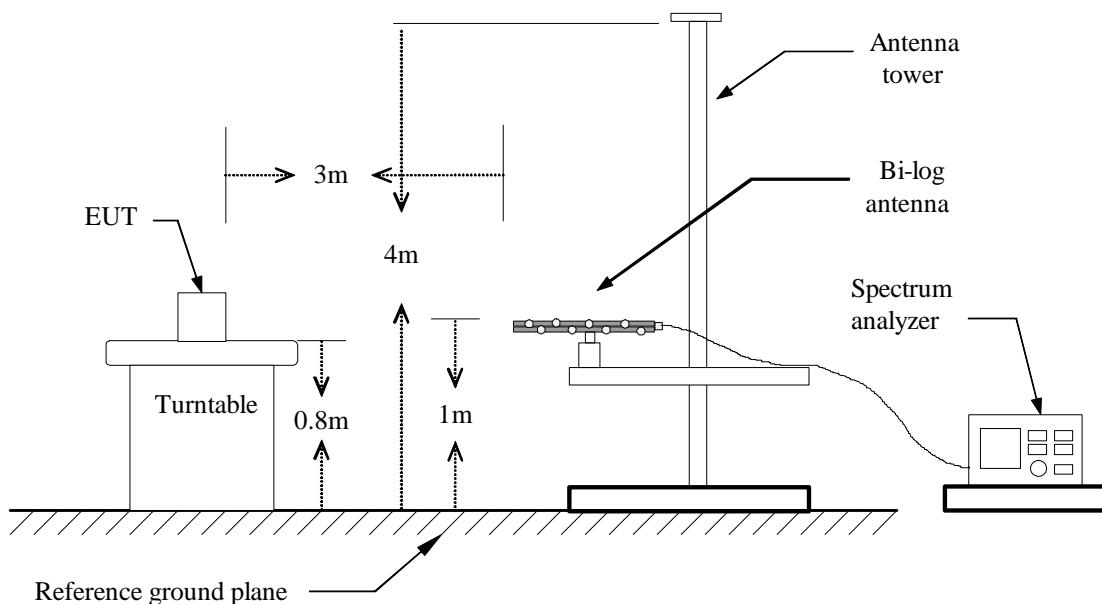
Remark: Each piece of equipment is scheduled for calibration once a year.

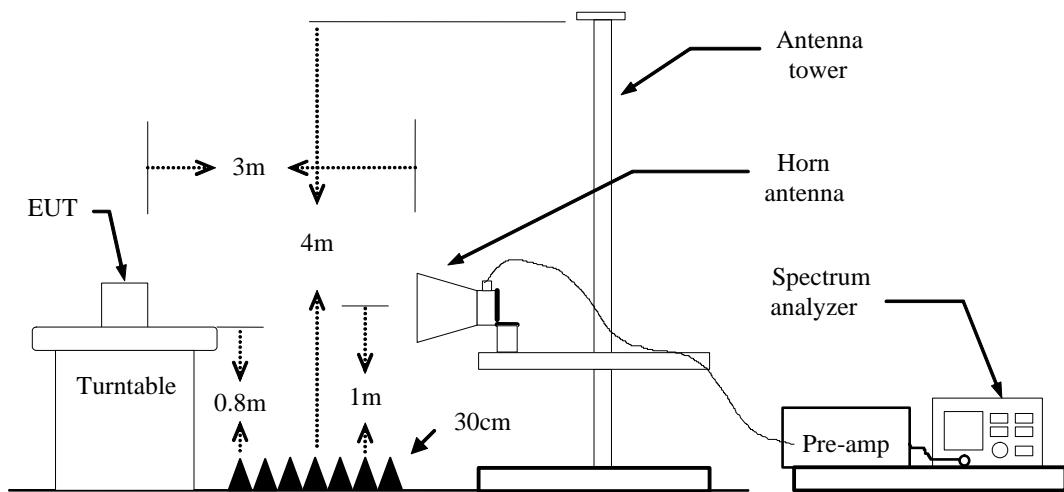
Test Configuration

Below 30MHz



Below 1 GHz



**Above 1 GHz**



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Antenna 1

Operation Mode: TX

Test Date: August 21, 2012

Temperature: 24°C

Tested by: Leevin Li

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
343.6333	41.46	-17.23	24.23	46.00	-21.77	V	QP
479.4333	33.62	-14.40	19.22	46.00	-26.78	V	QP
616.8500	33.69	-12.53	21.16	46.00	-24.84	V	QP
707.3832	33.28	-10.95	22.33	46.00	-23.67	V	QP
736.4833	32.72	-10.75	21.97	46.00	-24.03	V	QP
959.5833	35.05	-8.22	26.83	46.00	-19.17	V	QP
<hr/>							
99.5167	47.91	-22.64	25.27	43.50	-18.23	H	QP
144.7833	44.56	-19.12	25.44	43.50	-18.06	H	QP
196.5167	45.95	-18.54	27.41	43.50	-16.09	H	QP
343.6333	40.00	-17.23	22.77	46.00	-23.23	H	QP
479.4333	33.92	-14.40	19.52	46.00	-26.48	H	QP
959.5833	36.06	-8.22	27.84	46.00	-18.16	H	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

1. Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument using quasi-peak detector mode.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m)

**Antenna 2****Operation Mode:** TX**Test Date:** August 21, 2012**Temperature:** 24°C**Tested by:** Leevin Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
99.5167	49.14	-22.64	26.50	43.50	-17.00	V	QP
144.7833	44.61	-19.12	25.49	43.50	-18.01	V	QP
343.6333	41.95	-17.23	24.72	46.00	-21.28	V	QP
610.3832	32.68	-12.27	20.41	46.00	-25.59	V	QP
704.1500	32.97	-10.67	22.30	46.00	-23.70	V	QP
959.5833	33.83	-8.22	25.61	46.00	-20.39	V	QP
<hr/>							
165.8000	47.10	-18.71	28.39	43.50	-15.11	H	QP
196.5167	44.14	-18.54	25.60	43.50	-17.90	H	QP
295.1333	40.98	-18.76	22.22	46.00	-23.78	H	QP
343.6333	44.50	-17.23	27.27	46.00	-18.73	H	QP
503.6833	35.52	-14.26	21.26	46.00	-24.74	H	QP
959.5833	35.06	-8.22	26.84	46.00	-19.16	H	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.**Notes:**

1. Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument using quasi-peak detector mode.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m)

**Above 1 GHz****Antenna 1****Operation Mode:** TX(CH Low)**Test Date:** August 10, 2012**Temperature:** 24°C**Tested by:** Leevin Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3265.0000	47.03	-4.06	42.97	74.00	-31.03	V	peak
3775.0000	46.28	-2.55	43.73	74.00	-30.27	V	peak
4360.0000	45.44	-0.97	44.47	74.00	-29.53	V	peak
4810.0000	49.66	0.46	50.12	74.00	-23.88	V	peak
5395.0000	46.37	1.52	47.89	74.00	-26.11	V	peak
6145.0000	45.52	3.52	49.04	74.00	-24.96	V	peak
3400.0000	46.22	-4.00	42.22	74.00	-31.78	H	peak
4405.0000	45.09	-0.81	44.28	74.00	-29.72	H	peak
4810.0000	45.78	0.46	46.24	74.00	-27.76	H	peak
5635.0000	45.24	2.08	47.32	74.00	-26.68	H	peak
6145.0000	45.40	3.52	48.92	74.00	-25.08	H	peak
6490.0000	44.40	4.51	48.91	74.00	-25.09	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
Limit (dBuV/m) = Limit stated in standard
Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH Mid)**Test Date:** August 10, 2012**Temperature:** 24°C**Tested by:** Leevin Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3340.0000	46.67	-4.03	42.64	74.00	-31.36	V	peak
3820.0000	46.33	-2.49	43.84	74.00	-30.16	V	peak
4300.0000	46.10	-1.20	44.90	74.00	-29.10	V	peak
4885.0000	51.36	0.80	52.16	74.00	-21.84	V	peak
4885.0000	47.96	0.80	48.76	54.00	-5.24	V	AVG
5350.0000	45.33	1.53	46.86	74.00	-27.14	V	peak
6400.0000	44.28	4.26	48.54	74.00	-25.46	V	peak
<hr/>							
1735.0000	52.31	-9.19	43.12	74.00	-30.88	H	peak
3655.0000	45.88	-2.87	43.01	74.00	-30.99	H	peak
4330.0000	46.40	-1.09	45.31	74.00	-28.69	H	peak
4885.0000	50.65	0.80	51.45	74.00	-22.55	H	peak
6010.0000	44.50	3.12	47.62	74.00	-26.38	H	peak
6955.0000	45.07	6.12	51.19	74.00	-22.81	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
Limit (dBuV/m) = Limit stated in standard
Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH High)**Test Date:** August 10, 2012**Temperature:** 24 °C**Tested by:** Leevin Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2965.0000	47.55	-4.38	43.17	74.00	-30.83	V	peak
3730.0000	46.19	-2.67	43.52	74.00	-30.48	V	peak
4570.0000	45.10	-0.51	44.59	74.00	-29.41	V	peak
4960.0000	53.54	1.14	54.68	74.00	-19.32	V	peak
4960.0000	46.22	1.14	47.36	54.00	-6.64	V	AVG
5875.0000	44.71	2.90	47.61	74.00	-26.39	V	peak
6820.0000	45.14	5.57	50.71	74.00	-23.29	V	peak
<hr/>							
3730.0000	45.37	-2.67	42.70	74.00	-31.30	H	Peak
4360.0000	45.15	-0.97	44.18	74.00	-29.82	H	Peak
4960.0000	50.00	1.14	51.14	74.00	-22.86	H	Peak
5725.0000	45.25	2.46	47.71	74.00	-26.29	H	Peak
6070.0000	44.56	3.30	47.86	74.00	-26.14	H	Peak
6940.0000	44.81	6.04	50.85	74.00	-23.15	H	Peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
Limit (dBuV/m) = Limit stated in standard
Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading

**Antenna 2****Operation Mode:** TX(CH Low)**Test Date:** August 10, 2012**Temperature:** 24°C**Tested by:** Leevin Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2920.0000	46.50	-4.56	41.94	74.00	-32.06	V	peak
3880.0000	46.01	-2.51	43.50	74.00	-30.50	V	peak
4810.0000	48.33	0.46	48.79	74.00	-25.21	V	peak
5275.0000	45.28	1.54	46.82	74.00	-27.18	V	peak
6190.0000	44.56	3.65	48.21	74.00	-25.79	V	peak
6895.0000	45.00	5.82	50.82	74.00	-23.18	V	peak
<hr/>							
3355.0000	47.32	-4.02	43.30	74.00	-30.70	H	peak
3880.0000	46.47	-2.51	43.96	74.00	-30.04	H	peak
4135.0000	46.21	-1.89	44.32	74.00	-29.68	H	peak
4810.0000	47.00	0.46	47.46	74.00	-26.54	H	peak
5710.0000	45.16	2.40	47.56	74.00	-26.44	H	peak
6550.0000	45.58	4.68	50.26	74.00	-23.74	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
Limit (dBuV/m) = Limit stated in standard
Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH Mid)**Test Date:** August 10, 2012**Temperature:** 24°C**Tested by:** Leevin Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2980.0000	46.58	-4.32	42.26	74.00	-31.74	V	peak
3805.0000	46.36	-2.49	43.87	74.00	-30.13	V	peak
4255.0000	46.77	-1.37	45.40	74.00	-28.60	V	peak
4885.0000	51.88	0.80	52.68	74.00	-21.32	V	peak
4885.0000	47.84	0.80	48.64	54.00	-5.36	V	AVG
5755.0000	44.66	2.59	47.25	74.00	-26.75	V	peak
6505.0000	45.23	4.55	49.78	74.00	-24.22	V	peak
<hr/>							
2965.0000	46.68	-4.38	42.30	74.00	-31.70	H	peak
3535.0000	46.09	-3.33	42.76	74.00	-31.24	H	peak
4180.0000	46.58	-1.67	44.91	74.00	-29.09	H	peak
4885.0000	49.05	0.80	49.85	74.00	-24.15	H	peak
5695.0000	44.39	2.33	46.72	74.00	-27.28	H	peak
6655.0000	45.00	5.01	50.01	74.00	-23.99	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
Limit (dBuV/m) = Limit stated in standard
Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH High)**Test Date:** August 10, 2012**Temperature:** 24 °C**Tested by:** Leevin Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3145.0000	46.19	-4.13	42.06	74.00	-31.94	V	peak
3910.0000	46.16	-2.51	43.65	74.00	-30.35	V	peak
4555.0000	44.91	-0.54	44.37	74.00	-29.63	V	peak
4960.0000	55.59	1.14	56.73	74.00	-17.27	V	peak
4960.0000	49.11	1.14	50.25	54.00	-3.75	V	AVG
5755.0000	44.94	2.59	47.53	74.00	-26.47	V	peak
6250.0000	46.68	3.83	50.51	74.00	-23.49	V	peak
<hr/>							
2905.0000	47.20	-4.62	42.58	74.00	-31.42	H	peak
4165.0000	45.14	-1.75	43.39	74.00	-30.61	H	peak
4960.0000	48.08	1.14	49.22	74.00	-24.78	H	peak
5740.0000	45.15	2.52	47.67	74.00	-26.33	H	peak
6700.0000	44.50	5.16	49.66	74.00	-24.34	H	peak
6985.0000	45.46	6.27	51.73	74.00	-22.27	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
Limit (dBuV/m) = Limit stated in standard
Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading



6.9 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

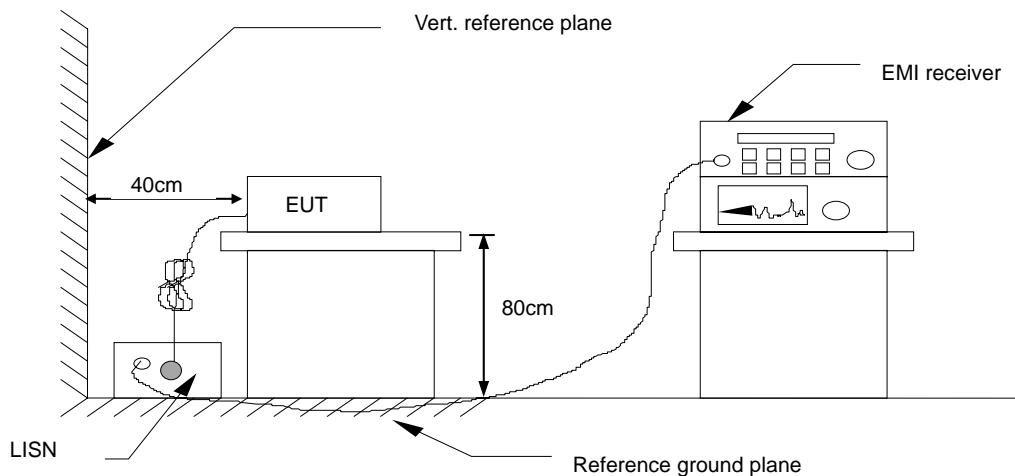
Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
ESCI EMI TEST RECEIVE.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/17/2012	03/17/2013
LISN(EUT)	SCHAFFNER	NNB42	2001/001	03/19/2012	03/19/2013
LISN	EMCO	3825/2	8901-1459	03/19/2012	03/19/2013
Temp. / Humidity Meter	VICTOR	HTC-1	2	03/20/2012	03/20/2013
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data**

Test Mode	Mode 1	Test Date	July 13, 2012
Temperature	22°C	Humidity	45% RH
Tested by	Leevin Li		

(The chart below shows the highest readings taken from the final data.)

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Line (L1/L2)
0.3300	37.11	22.00	10.22	47.33	32.22	59.45	49.45	-12.12	-17.23	L1
0.4340	35.27	14.45	10.23	45.50	24.68	57.18	47.18	-11.68	-22.50	L1
0.8100	35.80	15.64	10.25	46.05	25.89	56.00	46.00	-9.95	-20.11	L1
1.8060	35.09	14.93	10.40	45.49	25.33	56.00	46.00	-10.51	-20.67	L1
2.9140	34.50	15.77	10.40	44.90	26.17	56.00	46.00	-11.10	-19.83	L1
3.8460	33.85	14.14	10.39	44.24	24.53	56.00	46.00	-11.76	-21.47	L1
0.1980	36.95	19.27	10.21	47.16	29.48	63.69	53.69	-16.53	-24.21	L2
0.3820	37.50	17.08	10.23	47.73	27.31	58.23	48.24	-10.50	-20.93	L2
0.8100	35.81	12.70	10.25	46.06	22.95	56.00	46.00	-9.94	-23.05	L2
1.8100	33.83	13.80	10.40	44.23	24.20	56.00	46.00	-11.77	-21.80	L2
2.9820	33.42	12.15	10.40	43.82	22.55	56.00	46.00	-12.18	-23.45	L2
5.1060	33.34	11.13	10.38	43.72	21.51	60.00	50.00	-16.28	-28.49	L2

Note:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
3. “--” denotes the emission level was or more than 2dB below the Average limit.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1= Line One (Live Line)/ L2= Line Two (Neutral Line)



Test Mode	Mode 2	Test Date	July 13, 2012
Temperature	22°C	Humidity	45% RH
Tested by	Leevin Li		

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Line (L1/L2)
0.3940	33.43	17.99	10.23	43.66	28.22	57.98	47.98	-14.32	-19.76	L1
0.5580	28.38	11.90	10.24	38.62	22.14	56.00	46.00	-17.38	-23.86	L1
0.7180	27.31	11.66	10.24	37.55	21.90	56.00	46.00	-18.45	-24.10	L1
1.7220	25.00	9.56	10.39	35.39	19.95	56.00	46.00	-20.61	-26.05	L1
2.5020	24.07	7.02	10.40	34.47	17.42	56.00	46.00	-21.53	-28.58	L1
3.9460	22.53	5.82	10.39	32.92	16.21	56.00	46.00	-23.08	-29.79	L1
0.1660	20.22	1.15	10.17	30.39	11.32	65.15	55.16	-34.76	-43.84	L2
0.2460	19.64	1.60	10.21	29.85	11.81	61.89	51.89	-32.04	-40.08	L2
0.3820	30.53	10.22	10.23	40.76	20.45	58.23	48.24	-17.47	-27.79	L2
0.4220	24.52	6.63	10.23	34.75	16.86	57.41	47.41	-22.66	-30.55	L2
0.5899	21.18	2.11	10.24	31.42	12.35	56.00	46.00	-24.58	-33.65	L2
0.6460	21.93	2.05	10.24	32.17	12.29	56.00	46.00	-23.83	-33.71	L2

Note:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
3. “--” denotes the emission level was or more than 2dB below the Average limit.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1= Line One (Live Line)/ L2= Line Two (Neutral Line)