



document property name.

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test report file number : E022R-020

Applicant : Ki Ryung Electronics Co., Ltd.
Address : 219-6, Gasan-Dong, Kumchun-Ku, Seoul, 153-023, Korea

Manufacturer : Ki Ryung Electronics Co., Ltd.
Address : 219-6, Gasan-Dong, Kumchun-Ku, Seoul, 153-023, Korea

Type of Equipment : Digital Satellite Receiver

FCC ID. : P3H500VA

Model / Type No. : KRD500VA

Multiple Model/ Type No. : N/A

Serial number : N/A

Total page of Report : 18 pages (including this page)

Date of Incoming : November 17, 2001

Date of issue : February 14, 2002

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, SECTION 15.101.**

This test report contains only the result of a single test of the sample supplied for the examination. It is not a generally valid assessment of the features of the respective products of the mass-production

This report shall not be reg

il.

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



ONETECH

Testing & Evaluation Lab.

Page 2 of 18

FCC ID. : **Error! Unknown**

File No. : **Error! Unknown**

document property name.

Prepared by:

G. W. Lee/ Assistant Chief Engineer
EMC & Telecom Div.
ONETECH Corp.

Reviewed by:

Y. K. Kwon/ Chief Engineer
EMC & Telecom Div.
ONETECH Corp.

This report shall not be reproduced except in full without our written approval.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



document property name.

CONTENTS

	Page
<u>1. VERIFICATION OF COMPLIANCE</u>	5
<u>2. GENERAL INFORMATION</u>	6
<u>2.1 PRODUCT DESCRIPTION</u>	6
<u>2.2 RELATED SUBMITTAL(S) / GRANT(S)</u>	6
<u>2.3 TEST SYSTEM DETAILS</u>	6
<u>2.4 TEST METHODOLOGY</u>	6
<u>2.5 TEST FACILITY</u>	8
<u>3. SYSTEM TEST CONFIGURATION</u>	8
<u>3.1 JUSTIFICATION</u>	8
<u>3.2 EUT EXERCISE SOFTWARE</u>	8
<u>3.3 CABLE DESCRIPTION</u>	8
<u>3.4 NOISE SUPPRESSION PARTS ON CABLE</u>	9
<u>3.5 EQUIPMENT MODIFICATIONS</u>	9
<u>3.6 CONFIGURATION OF TEST SYSTEM</u>	10
<u>3.6.1 Line Conducted Test</u>	10
<u>3.6.2 Radiated Emission Test</u>	10
<u>3.6.3 Output Signal Level Test</u>	10
<u>3.6.4 Output Terminal Conducted Spurious Emission test</u>	10
<u>3.6.5 Transfer Switch Isolation Test</u>	11
<u>4. PRELIMINARY TEST</u>	11
<u>4.1 AC POWER LINE CONDUCTED EMISSION TEST</u>	11
<u>4.2 RADIATED EMISSIONS TESTS</u>	11
<u>5. FINAL RESULT OF MEASUREMENT</u>	12
<u>5.1 CONDUCTED EMISSION TEST</u>	12
<u>5.2 RADIATED EMISSION TEST</u>	15
<u>5.3. ANTENNA POWER CONDUCTION DATA</u>	18
<u>5.4 OUTPUT TERMINAL SIGNAL LEVEL TEST</u>	20
<u>5.5 OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSIONS TEST</u>	21
<u>5.6 TRANSFER SWITCH ISOLATION TEST</u>	23
<u>6. FIELD STRENGTH CALCULATION</u>	24

document property name.

<u>7. LIST OF TEST EQUIPMENT</u>	26
---	-----------

document property name.

1. VERIFICATION OF COMPLIANCE

-. APPLICANT : Ki Ryung Electronics Co., Ltd.
 -. ADDRESS : 219-6, Gasan-Dong, Kumchun-Ku, Seoul, 153-023, Korea
 -. CONTACT PERSON : Mr. Il-Chool, Kim / Assistant Manager
 -. TELEPHONE NO : +82-2-3282-2260
 -. MODEL NO/NAME : KRD500VA
 -. SERIAL NUMBER : N/A
 -. DATE : February 14, 2002

DEVICE TYPE	TV INTERFACE DEVICE - UNINTENTIONAL RADIATOR
E.U.T. DESCRIPTION	Digital Satellite Receiver
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	MP-3, ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

document property name.

2. GENERAL INFORMATION

2.1 Product Description

The Ki Ryung Electronics Co., Ltd., Model KRD500VA (referred to as the EUT in this report) is a Digital Satellite Receiver.

Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Metal
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	4 MHz, 27 MHz
POWER REQUIREMENT	AC100-240V, 50/60Hz, Max. 1.0A
NUMBER OF LAYERS	Main Board: 2 Layers, Other Board: 1 Layer
TUNER Type NO. / MFR	TBMU30321IMB / SAMSUNG
RF MODULATOR Type NO. / MFR	RMVP13450FB / SAMSUNG
TYPE OF ANTENNA	75 Ohm Unbalanced Coaxial, F-type connector
INPUT FREQUENCY	950 ~ 1450 MHz
EXTERNAL TERMINALS	LNB-Input, Through Out, RCA Jack (Audio in/out L/R, Video in/out), RF in/out, S-Video, RS-232C

Model Differences:

The difference(s) compared to the EUT is as follows: none

2.2 Related Submittal(s) / Grant(s)

Original submittal only

2.3 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
KRD500VA	Ki Ryung Electronics Co., Ltd.	P3H500VA	Digital Satellite Receiver (EUT)	-
CTV-1010XK	Korea Electronics	N/A	TELEVISION	EUT
GHV-S9990	LG	DOC	VCR	EUT
N/A	-	-	Antenna for TV	EUT

2.4 Test Methodology

The measurement for Radiated Emission, Line Conducted Emission, Output signal levels and Output Terminal Conducted Spurious Emission were performed in accordance with the procedures described in MP-3 and ANSI C63.4/1992. Radiated

document property name.

testing was performed at a distance of 3 meters from EUT to the antenna.

document property name.

2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Ki Ryung Electronics Co., Ltd.	KRD500VA Main Rev. A	N/A
Smart Card Board	Ki Ryung Electronics Co., Ltd.	Smart Card	N/A
S/W Board	Ki Ryung Electronics Co., Ltd.	N/A	N/A
Power Board	Samwon Electronics	SW-0302 Rev. A	N/A

3.2 EUT exercise Software

According to the requirements in Subpart B of Part 15, the measurement is made at each function of the EUT being connected with appropriate cables and peripherals.

This model KRD500VA has video/audio output terminals in RCA-type plugs, LNB antenna input, Through Out, TV antenna input and RF output terminal. Therefore, every measurement was investigated in the operation modes. The LNB input of the EUT was connected to a signal via Asia satellite system directly.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
Digital Satellite Receiver (EUT)	N	Y	1.5(P), 10.0(D)
TELEVISION	N	N	1.5(P), 1.2(D)
VCR	N	N	1.5(P), 1.2(D)
Antenna for TV	N/A	N	0.8(D)

* The marked “(D)” means the Data Cable and “(P)” means the Power Cable.

document property name.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Digital Satellite Receiver (EUT)	N	N/A	-	-
TELEVISION	N	N/A	Y	BOTH END
VCR	N	N/A	Y	BOTH END
Antenna for TV	N	N/A	Y	EUT END

3.5 Equipment Modifications

To achieve compliance to FCC part 15 rules, the following change(s) was made by ONETECH Corp. during compliance testing:

“There was no Modified items during EMI test”



document property name.

3.6 Configuration of Test System

3.6.1 Line Conducted Test

The EUT was connected to LISN, all supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

3.6.2 Radiated Emission Test

Preliminary radiated emission test were conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test were conducted at 3-meter open area test site.

3.6.3 Output Signal Level Test

The output voltage of video carrier frequency at the RF-output terminal of the EUT was measured at 3 and 4 channel connecting directly to a spectrum analyzer with 50ohm input impedance via 75-to-50ohm matching pad. Indicated voltage on screen of measuring instrument was converted to the voltage of 75ohm system.

Data conversion method is as follows.

$$V_{75}[\text{uV}] = 10^{(V_r + CF)/20}[\text{uV}]$$

here, V_{75} : Voltage at the RF-out terminal of 75ohm in uV,
 V_r : Voltage read at analyzer with 50ohm input-impedance in dBuV,
 CF : Conversion Factor of the matching pad in dB.

3.6.4 Output Terminal Conducted Spurious Emission test

Any other spectrum at RF-output terminal appearing on frequencies removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was searched at 3 and 4 channel.

Data conversion method is as follows.

$$V_{75}[\text{uV}] = 10^{(V_r + CF + AT)/20}[\text{uV}]$$

here, V_{75} : Voltage at the RF-out terminal of 75ohm in uV,
 V_r : Voltage read at analyzer with 50ohm input-impedance in dBuV,
 CF : Conversion Factor of the matching pad in dB,
 AT : Attenuation of attenuator in dB.



document property name.

3.6.5 Transfer Switch Isolation Test

As a transfer switch was equipped with EUT as an antenna-in, measurement of isolation were made at RF-input terminal with rated input impedance.

The maximum voltage of video carrier frequency of the EUT at the antenna input (RF-in) terminal of the switch was measured for both channels.

Data conversion method is as follows.

$$V_{75}[\mu V] = 10^{(V_r + CF - PG + AT)/20}[\mu V]$$

here, V_{75} : Voltage at the RF-out terminal of 75ohm in μV ,
 V_r : Voltage read at analyzer with 50ohm input-impedance in dBuV,
 CF : Conversion Factor of the matching pad in dB,
 PG : Gain of pre-amplifier in dB,
 AT: Attenuation of attenuator in dB.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
CH. 3	X
CH. 4	

4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated.

Operation Mode	The Worse operating condition (Please check one only)
CH. 3	X
CH. 4	

document property name.

5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

5.1 Conducted Emission Test

Humidity Level : 49 % Temperature : 19 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.107)
 Type of Test : TV INTERFACE DEVICE
 Result : PASSED BY -3.36 dB at 2.42 MHz

EUT : Digital Satellite Receiver Date: November 15, 2001
 Operating Condition : CH. 3
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Power Line Conducted Emission			FCC CLASS B	
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)
0.45	43.45	HOT	48.00	-4.55
0.62	41.79	HOT	48.00	-6.21
2.42	44.64	HOT	48.00	-3.36
3.56	43.60	HOT	48.00	-4.40
8.83	39.60	NEUTRAL	48.00	-8.40
16.08	39.94	NEUTRAL	48.00	-8.06

Line Conducted Emission Tabulated Data



ONETECH

Testing & Evaluation Lab.

Page 13 of 18

FCC ID. : **Error! Unknown**

File Name : **Error! Unknown**

document property name.

1/1/08

Tested by: Sue-Yong, Lee / Test Engineer

This report shall not be reproduced except in full without our written approval.


FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)


EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



document property name.

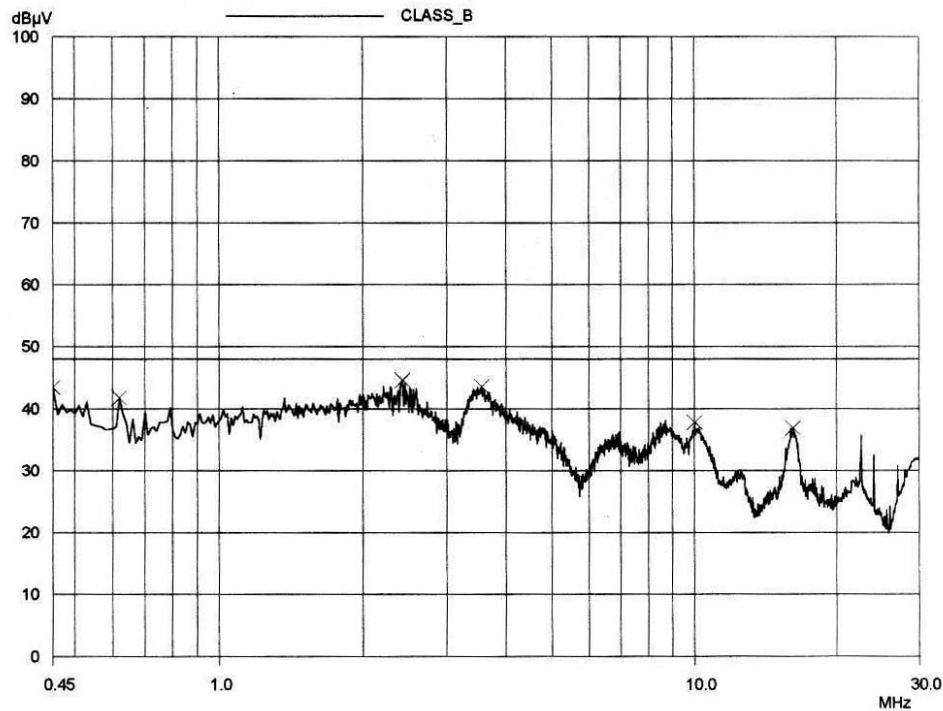

HOT LINE

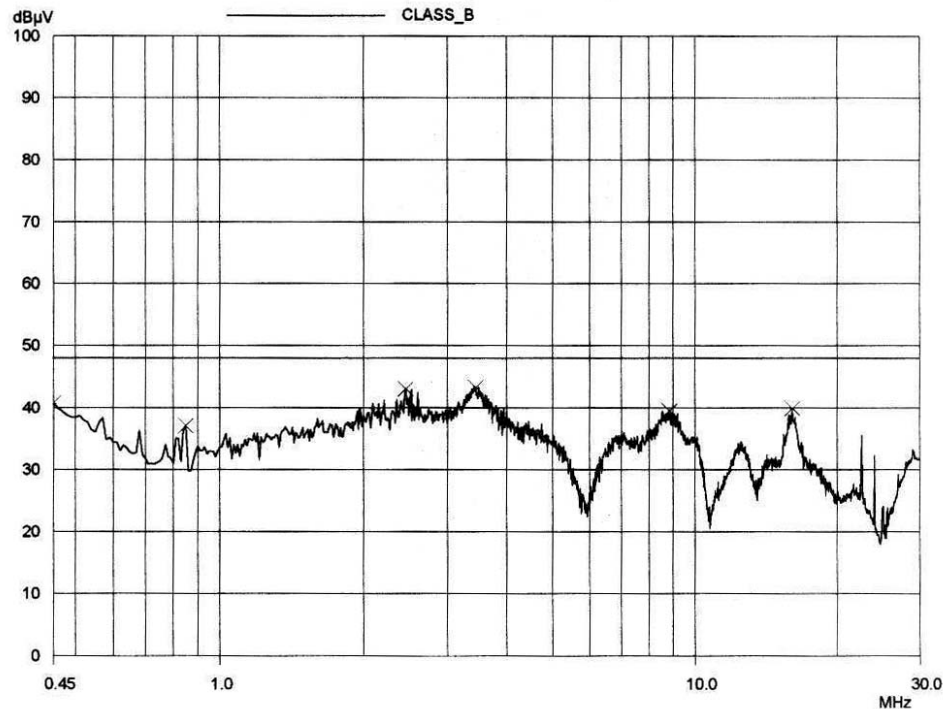

NEUTRAL LINE

This report shall not be reproduced except in full without our written approval.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

document property name.

5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 48 % Temperature : 15 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.109)
 Type of Test : TV INTERFACE DEVICE
 Result : PASSED BY -1.72 dB at 121.52 MHz

EUT : Digital Satellite Receiver Date: December 17, 2001
 Operating Condition : CH. 3
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
54.00	20.60	V	10.70	0.97	32.27	40.00	-7.73
81.00	25.40	V	6.56	1.02	32.98	40.00	-7.02
92.63	25.20	V	9.19	1.12	35.51	43.50	-7.99
94.50	25.00	H	9.84	1.13	35.97	43.50	-7.53
108.00	24.00	V	13.53	1.19	38.72	43.50	-4.78
121.52	27.30	V	13.24	1.24	41.78	43.50	-1.72
135.02	15.90	V	13.03	1.29	30.22	43.50	-13.28
140.78	12.90	V	12.94	1.31	27.15	43.50	-16.35
162.00	12.80	H	15.16	1.39	29.35	43.50	-14.15
202.60	21.90	H	11.24	1.58	34.72	43.50	-8.78
212.20	22.90	H	11.00	1.63	35.53	43.50	-7.97
216.00	23.90	H	10.90	1.65	36.45	43.50	-7.05
239.80	18.80	H	11.35	1.78	31.93	46.00	-14.07
242.80	18.90	H	11.49	1.79	32.18	46.00	-13.82
270.80	20.20	H	12.80	1.88	34.88	46.00	-11.12
298.80	17.30	H	14.51	1.99	33.80	46.00	-12.20
323.00	21.90	H	14.26	2.14	38.30	46.00	-7.70
364.80	19.80	H	14.72	2.35	36.87	46.00	-9.13
540.20	20.10	H	17.95	2.75	40.80	46.00	-5.20
607.45	15.30	H	18.91	2.93	37.14	46.00	-8.86

This report shall not be reproduced except in full without our written approval.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
 (TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

document property name.

659.20	15.50	V	20.22	3.12	38.84	46.00	-7.16
850.45	18.00	V	22.41	3.85	44.26	46.00	-1.74

Radiated Emission Tabulated Data

document property name.

This is the additional radiated emission test due to the local oscillator of the satellite receiver part in the EUT.

The fundamental and 2nd harmonic frequencies of the local oscillator of the satellite receiver part was tested on a near top, middle and bottom tuning frequencies of the EUT according to section 15.31(m) and 15.33(b)(3).

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Freq. to which tuned (MHz)	OSC. Freq (MHz)	Ampl. (dBuV)	Pol.	Ant. (dBuV)	Cable (dB)	Ampl (dBuV/m)	Limit (dBuV/m)	Margin (dB)
950	1429.5	-	H	-	-	-	54.00	-
955	1434.5	-	H	-	-	-	54.00	-
960	1439.4	-	H	-	-	-	54.00	-

***Harmonics RF Radiation**

Radiated Emissions				Ant	Correction Factors		Total	FCC Limit	
Freq. to which tuned (MHz)	Ham.	Freq. (MHz)	Ampl. (dBuV)	Pol.	Ant. (dBuV)	Cable (dB)	Ampl (dBuV/m)	Limit (dBuV/m)	Margin (dB)
950	2	2859.0	-	H	-	-	-	54.00	-
955	2	2869.0	-	H	-	-	-	54.00	-
960	2	2878.8	-	H	-	-	-	54.00	-

Remark: There was no found any emission during the above test.

IF = 479.5MHz.



Tested by: Sue-Yong, Lee / Test Engineer

document property name.

5.3. Antenna Power conduction Data

This test is the power conduction test at the antenna terminal due to the local oscillator of the satellite receiver part in the EUT.

The fundamental and 2nd harmonic frequencies of the local oscillator were tested on a near top, middle and bottom tuned frequencies of the EUT according to section 15.111(a), 15.31(m) and 15.33(b)(3).

The EUT antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in section 15.33 shall not exceed 2.0 nanowatts. (2.0 nW = 50.1dBuV)

Operating Condition : Tuning the selected frequency

Detector : Span : 10 MHz SWP : 2 sec
 RBW : 100 kHz VBW : 300 kHz

Freq. to which tuned (MHz)	OSC. Freq (MHz)	Measured Value (dBuV)	Imp. Mat. +Ca. Loss (dB)	Total (dBuV)	Limit (dBuV)	Margin (dBuV)
950	1429.5	-	6.0	-	50.10	-
955	1434.5	-	6.0	-	50.10	-
960	1439.4	-	6.0	-	50.10	-

*Harmonics RF Radiation

Freq. to which tuned (MHz)	Har.	OSC. Freq (MHz)	Measured Value (dBuV)	Imp. Mat. +Ca. Loss (dB)	Total (dBuV)	Limit (dBuV)	Margin (dBuV)
950	2	2859.0	-	6.0	-	50.10	-
955	2	2869.0	-	6.0	-	50.10	-
960	2	2878.8	-	6.0	-	50.10	-

Remark: There was no found any emission during the above test.

IF = 479.5MHz.





ONETECH

Testing & Evaluation Lab.

Page 19 of 18

FCC ID. : **Error! Unknown**

File No. : **Error! Unknown**

document property name.

Tested by: Sue-Yong, Lee / Test Engineer



document property name.

5.4 Output Terminal Signal Level Test

The following table shows that the all modes of operation and worst-case emissions were investigated

Humidity Level : 48 %

Temperature : 19 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.115)

EUT : DIGITAL SATELLITE RECEIVER

Date: January 08, 2002

Detector : Span : 10MHz SWP : 2 sec

RBW : 100kHz VBW : 300kHz

Output Impedance of RF-Output Terminal: 75ohm

CH	Freq.(MHz)	Reading(dBuV)	M/P Loss(dB)	Signal Level(uV)	Limit(uV)	Margin(dB)
3 (Visual)	61.22	57.3	6.0	1462.2	3000	-6.24
3 (Aural)	65.92	42.8	6.0	275.4	671	-7.73
4 (Visual)	67.23	58.7	6.0	1717.9	3000	-4.84
4 (Aural)	71.89	43.7	6.0	305.5	671	-6.83

MP = Impedance Matching Pad

*Sample Calculation at 61.30MHz = $10^{[(63.3+6.0)/20]} = 1462.2\mu\text{V}$

*Margin [dB] = $20 \log (R/L)$ where, R : Signal Level, [uV] or [uV/m],

L : Corresponding Limit, [uV] or [uV/m].

Tested by: Sue-Yong, Lee / Test Engineer

document property name.

5.5 Output Terminal Conducted Spurious Emissions Test

The following table shows that frequency range of 30MHz to 1000MHz removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was investigated at each channel.

Humidity Level : 48 %

Temperature : 19 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.115)

EUT : DIGITAL SATELLITE RECEIVER

Date: January 08, 2002

Detector : Span : 10MHz SWP : 2 sec

RBW : 100kHz VBW : 300kHz

Output Impedance of RF-Output Terminal: 75ohm

CH.	Freq. (MHz)	Reading (dBuV)	M/P Loss (dB)	Output Level(uV)	Limit (uV)	Margin (dB)
3	122.44	17.70	6.0	15.31	95	-15.85
	183.62	8.90		5.56		-24.65
	244.79	12.00		7.94		-21.56
	306.02	11.90		7.85		-21.66
	367.21	6.70		4.32		-26.84
	428.48	9.40		5.89		-24.15
	489.67	7.50		4.73		-26.06
4	134.41	15.10	6.0	11.35	95	-18.45
	201.62	13.50		9.44		-20.05
	268.90	13.30		9.23		-20.25
	607.70	13.10		9.02		-20.45

* Sample Calculation at 47.70MHz = $10^{[(13.8 + 6.0)/20]} = 15.31\mu\text{V}$

*Margin [dB] = 20 log (R/L) where, R : Output Level, [uV] or [uV/m],

L : Corresponding Limit, [uV] or [uV/m].



document property name.

Tested by: Sue-Yong, Lee / Test Engineer



document property name.

5.6 Transfer Switch Isolation Test

The following table shows that the maximum voltage of video carrier frequency of the EUT at the antenna input (RF-in) terminal of the switch was measured for both channels.

Humidity Level : 48 %

Temperature : 19 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.115)

EUT : DIGITAL SATELLITE RECEIVER

Date: January 08, 2002

Detector : Span : 1 MHz SWP : 30 msec

RBW : 10 kHz VBW : 30 kHz

Output Impedance of RF-Output Terminal: 75ohm

CH.	Freq. (MHz)	Meter Reading (dBuV)	M/P Loss (dB)	Preamp Gain(dB)	Attn. (dB)	Signal Level (uV)	Limit (uV)	Margin (dB)
“There was no found any emission during the above test”								

Note : To clarify the emissions emanated from RF output terminal the EUT, RF pre-amplifier was utilized.

The gain of pre-amplifier at each frequency measured from the EUT was obtained after sufficient warm-up for stabilization of gain.

Tested by: Sue-Yong, Lee / Test Engineer

document property name.

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

$$\begin{aligned}
 &+ \text{ Meter reading} && (\text{dBuV}) \\
 &+ \text{ Cable Loss} && (\text{dB}) \\
 &+ \text{ Antenna Factor (Loss)} && (\text{dB/meter}) \\
 &----- \\
 &= \text{ Corrected Reading} && (\text{dBuV/meter}) \\
 &- \text{ Specification Limit} && (\text{dBuV/meter}) \\
 &= \text{ dB Relative to Spec} && (+/- \text{ dB})
 \end{aligned}$$

document property name.

document property name.

7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	OCT/01	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	APR/01	12MONTH	■
3.	Spectrum analyzer	ADVANTEST	R3265A	45060434	APR/01	12MONTH	■
4.	Spectrum analyzer	HP	8568B	3109A05456	APR/01	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	APR/01	12MONTH	■
6.	Quasi-Peak Adapter	HP	85650A	3107A01542	APR/01	12MONTH	■
7.	Conical Log spiral Antenna	EATON	93491-2	340	FEB/00	12MONTH	■
8.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	APR/01	12MONTH	■
9.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	APR/01	12MONTH	■
11.	LISN	EMCO	3825/2	9109-1867 9109-1869	JUL/01	12MONTH	■
12.	Computer System Hard disk drive	HP	98581C 9153C	98543A CMC762Z9153	N/A N/A	N/A N/A	■ ■
13.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
14.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
15.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■

This report shall not be reproduced except in full without our written approval.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
 (TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)