


FCC SAR Test Report

APPLICANT : VERTU Corporation Limited
EQUIPMENT : GSM/WCDMA Cellular Telephone with BT and WLAN
BRAND NAME : VERTU
MODEL NAME : Constellation V
TYPE : RM-851V
FCC ID : P7QRM-851V
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

The product was completely tested on Jun. 30, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

1. Statement of Compliance	4
2. Administration Data	6
2.1 Testing Laboratory.....	6
2.2 Applicant	6
2.3 Manufacturer	6
2.4 Application Details.....	6
3. General Information	7
3.1 Description of Equipment Under Test (EUT)	7
3.2 Maximum RF output power among production units	8
3.3 Applied Standard.....	9
3.4 Device Category and SAR Limits	9
3.5 Test Conditions.....	9
4. Specific Absorption Rate (SAR).....	10
4.1 Introduction	10
4.2 SAR Definition.....	10
5. SAR Measurement System.....	11
5.1 E-Field Probe	12
5.2 Data Acquisition Electronics (DAE)	13
5.3 Robot	13
5.4 Measurement Server.....	13
5.5 Phantom.....	14
5.6 Device Holder.....	15
5.7 Data Storage and Evaluation	16
5.8 Test Equipment List.....	18
6. Tissue Simulating Liquids.....	19
7. System Verification Procedures	21
7.1 Purpose of System Performance check	21
7.2 System Setup.....	21
7.3 SAR System Verification Results	22
8. EUT Testing Position	23
8.1 Define two imaginary lines on the handset.....	23
8.2 Cheek Position	24
8.3 Tilted Position.....	24
8.4 Body Worn Position.....	25
9. Measurement Procedures	26
9.1 Spatial Peak SAR Evaluation	26
9.2 Power Reference Measurement.....	27
9.3 Area & Zoom Scan Procedures.....	27
9.4 Volume Scan Procedures.....	28
9.5 SAR Averaged Methods.....	28
9.6 Power Drift Monitoring.....	28
10. Conducted RF Output Power (Unit: dBm).....	29
11. Antenna Location	39
12. SAR Test Results	40
12.1 Test Records for Head SAR Test.....	40
12.2 Test Records for Hotspot SAR Test.....	42
12.3 Test Records for Body Worn SAR Test.....	44
12.4 Repeated SAR Measurement	45
12.5 Highest SAR Plot	46
13. Simultaneous Transmission Analysis.....	51
13.1 Head Exposure Conditions	52
13.2 Hotspot Exposure Conditions.....	55
13.3 Body-Worn Exposure Conditions	57
14. Uncertainty Assessment	59
15. References.....	62
Appendix A. Plots of System Performance Check	
Appendix B. Plots of SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA360415	Rev. 01	Initial issue of report	Aug. 01, 2013

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **VERTU Corporation Limited GSM/WCDMA Cellular Telephone with BT and WLAN, VERTU, Constellation V**, are as follows.

<Highest SAR Summary>

Exposure Position	Frequency Band	Reported 1g-SAR (W/kg)	Equipment Class	Highest Reported 1g-SAR (W/kg)
Head	GSM850	0.51	PCE	0.62
	GSM1900	0.61		
	WCDMA Band V	0.34		
	WCDMA Band IV	0.58		
	WCDMA Band II	0.62		
	WLAN 5.2GHz Band	0.05	NII	0.06
	WLAN 5.3GHz Band	0.04		
	WLAN 5.5GHz Band	0.06		
	WLAN 5.8GHz Band	0.04	DTS	0.06
	WLAN 2.4GHz Band	0.06		
Hotspot	GPRS850	0.98	PCE	0.98
	GPRS1900	0.85		
	WCDMA Band V	0.51		
	WCDMA Band IV	0.87		
	WCDMA Band II	0.98		
	WLAN 2.4GHz Band	0.07	DTS	0.07
Body-worn	GPRS850	0.78	PCE	0.98
	GPRS1900	0.87		
	WCDMA Band V	0.51		
	WCDMA Band IV	0.87		
	WCDMA Band II	0.98		
	WLAN 5.2GHz Band	0.17	NII	0.17
	WLAN 5.3GHz Band	0.12		
	WLAN 5.5GHz Band	0.17		
	WLAN 5.8GHz Band	0.10	DTS	0.10
	WLAN 2.4GHz Band	0.07		

**<Highest Simultaneous transmission SAR>**

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
WCMDA II	PCE	Body-worn	1.12
Bluetooth	DSS		

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
WCDMA II	PCE	Body-worn	1.09
WLAN5.8GHz Band	DTS		

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
WCMDA II	PCE	Body-worn	1.15
WLAN5.2GHz Band	NII		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

2.2 Applicant

Company Name	VERTU Corporation Limited
Address	Beacon Hill Road, Church Crookham, Hampshire GU52 8DY, United Kingdom

2.3 Manufacturer

Company Name	VERTU Corporation Limited
Address	Beacon Hill Road, Church Crookham, Hampshire GU52 8DY, United Kingdom

2.4 Application Details

Date of Start during the Test	Jun. 08, 2013
Date of End during the Test	Jun. 30, 2013

3. General Information

3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT	GSM/WCDMA Cellular Telephone with BT and WLAN
Brand Name	VERTU
Model Name	Constellation V
Type	RM-851V
FCC ID	P7QRM-851V
IMEI Code	004402550009678
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56MHz
Mode	• GSM/GPRS/EGPRS • UMTS Rel 99 • HSDPA Rel 7, Cat14 • HSUPA Rel 6, Cat6 • DC-HSDPA Rel 8 Cat24 • 802.11a/b/g/n HT20/HT40 • Bluetooth 3.0 · Bluetooth 4.0
Antenna Type	WWAN: Single feed Monopole with Parasitic element WLAN: PIFA Antenna Bluetooth: PIFA Antenna NFC: Loop Antenna
HW Version	F1.5
SW Version	LA23.4.2.0.B.0.1.19_userdebug_RoW
Dual Transfer Mode Category	Class A – EUT can support Packet Switched and Circuit Switched Network simultaneously.
EUT Stage	Identical Prototype
Remark: 1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description. 2. This device supports DTM operation up to 3Tx multi-slots and GPRS/EGPRS up to 4 Tx multi-slots.	

3.2 Maximum RF output power among production units

Mode		GSM 850	GSM 1900
		Average power(dBm)	
GSM (GMSK, 1 Tx slot)		33.5	30.5
GPRS (GMSK, 1 Tx slot) – CS1		33.5	30.5
GPRS (GMSK, 2 Tx slots) – CS1		31.0	28.0
GPRS (GMSK, 3 Tx slots) – CS1		29.5	27.0
GPRS (GMSK, 4 Tx slots) – CS1		29.5	25.5
EDGE (GMSK, 1 Tx slot) – MCS1		33.5	30.5
EDGE (GMSK, 2 Tx slots) – MCS1		31.0	28.0
EDGE (GMSK, 3 Tx slots) – MCS1		29.5	27.0
EDGE (GMSK, 4 Tx slots) – MCS1		29.5	25.5
EDGE (8PSK, 1 Tx slot) – MCS5		27.5	26.5
EDGE (8PSK, 2 Tx slots) – MCS5		26.5	26.0
EDGE (8PSK, 3 Tx slots) – MCS5		26.5	26.0
EDGE (8PSK, 4 Tx slots) – MCS5		26.5	26.0
DTM 5	GSM (GMSK, 1 Tx slot)	31.0	28.0
	GPRS (GMSK, 1 Tx slot) – CS1	31.0	28.0
DTM 9	GSM (GMSK, 1 Tx slot)	31.0	28.0
	GPRS (GMSK, 1 Tx slot) – CS1	31.0	28.0
DTM 11	GSM (GMSK, 1 Tx slot)	29.5	27.0
	GPRS (GMSK, 2 Tx slots) – CS1	29.5	27.0
DTM 5	GSM (GMSK, 1 Tx slot)	31.0	28.0
	EDGE (8PSK, 1 Tx slot) – MCS5	26.5	26.0
DTM 9	GSM (GMSK, 1 Tx slot)	31.0	28.0
	EDGE (8PSK, 1 Tx slot) – MCS5	26.5	26.0
DTM 11	GSM (GMSK, 1 Tx slot)	29.5	27.0
	EDGE (8PSK, 2 Tx slots) – MCS5	26.5	26.0

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
	Average power(dBm)		
AMR 12.2K	24	24	24
RMC 12.2K	24	24	24
HSDPA Subtest-1	23	23	23
DC-HSDPA Subtest-1	23	23	23
HSUPA Subtest-5	23	23	23

Mode / Band	IEEE 802.11 Average Power (dBm)				
	11a	11b	11g	HT20	HT40
WLAN 2.4GHz		18.5	13.5	13.5	
WLAN5.2GHz Band	13.0			13.0	13.0
WLAN5.3GHz Band	13.0			13.0	13.0
WLAN5.5GHz Band	13.0			13.0	13.0
WLAN5.8GHz Band	13.0			13.0	13.0

Mode / Band	Bluetooth			
	1Mbps	2Mbps	3Mbps	BT4.0-LE
	(GFSK)	$\pi/4$ -DQPSK	(8-DPSK)	(GFSK)
2.4GHz Bluetooth	8	7	7	0

3.3 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 447498 D01 v05r01
- FCC KDB 648474 D04 v01r01
- FCC KDB 248227 D01 v01r02
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D02 v02r02
- FCC KDB 941225 D03 v01
- FCC KDB 941225 D04 v01
- FCC KDB 941225 D06 v01r01

3.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.5 Test Conditions

3.5.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

3.5.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting

Duty factor observed as below:

802.11b, 1Mbps: 97.63%

802.11a, 6Mbps: 87.26%

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement System

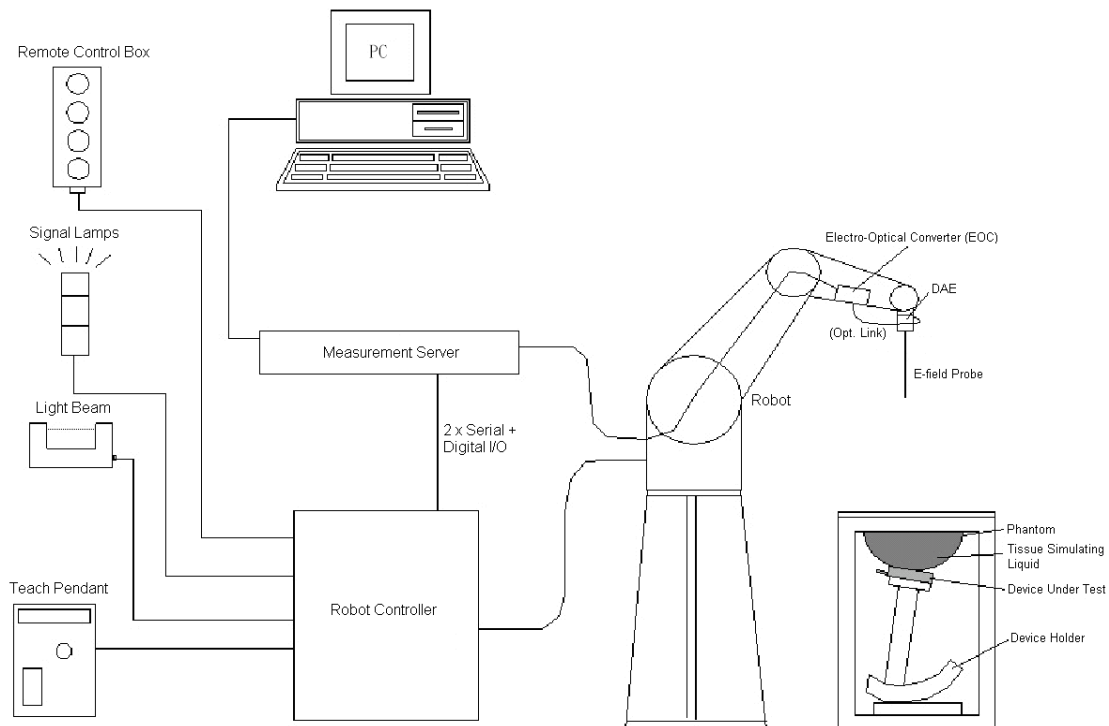


Fig 5.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 E-Field Probe Specification

<ES3DV3 Probe >

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 10 mm) Tip diameter: 4 mm (Body: 10 mm) Distance from probe tip to dipole centers: 3 mm



Fig 5.2 Photo of ES3DV3

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm



Fig 5.3 Photo of EX3DV4/ES3DV4

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.4 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.5 Photo of DASY4

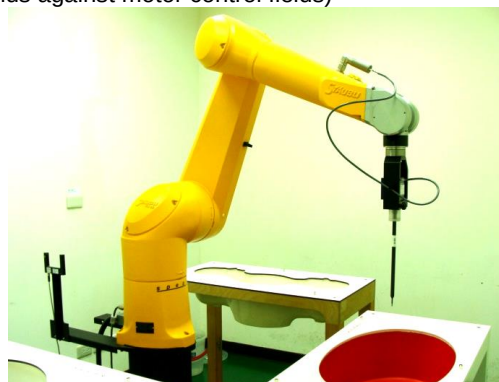


Fig 5.6 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.7 Photo of Server for DASY4



Fig 5.8 Photo of Server for DASY5

5.5 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

Fig 5.9 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

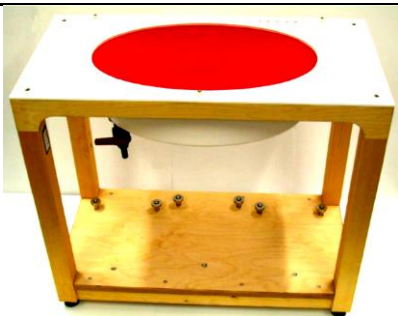
Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

Fig 5.10 Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

5.6 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.11 Device Holder

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

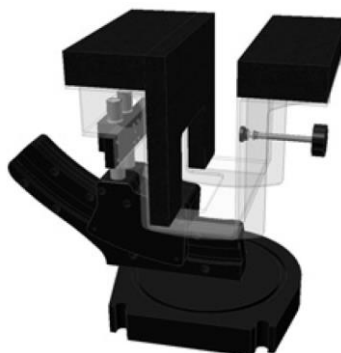


Fig 5.12 Laptop Extension Kit

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-loss media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	dcp_i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 18, 2013	Mar. 19, 2014
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Jun. 20, 2012	Jun. 19, 2014
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 20, 2013	Mar. 19, 2014
SPEAG	2450MHz System Validation Kit	D2450V2	736	Jul. 25, 2011	Jul. 24, 2013
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Dec. 11, 2012	Dec. 10, 2013
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 27, 2012	Aug. 26, 2013
SPEAG	Data Acquisition Electronics	DAE3	495	May. 08, 2013	May. 07, 2014
SPEAG	Data Acquisition Electronics	DAE4	1338	May. 28, 2013	May. 27, 2014
SPEAG	Data Acquisition Electronics	DAE4	679	Jan. 16, 2013	Jan. 15, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3820	Dec. 10, 2012	Dec. 09, 2013
SPEAG	Dosimetric E-Field Probe	EX3DV4	3792	Jun. 04, 2013	Jun. 03, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3661	Jan. 15, 2013	Jan. 14, 2014
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 28, 2012	Sep. 27, 2013
Wisewind	Thermometer	ETP-101	TM560	Nov. 13, 2012	Nov. 12, 2013
Wisewind	Thermometer	ETP-101	TM685	Nov. 13, 2012	Nov. 12, 2013
Wisewind	Thermometer	HTC-1	TM642	Nov. 13, 2012	Nov. 12, 2013
Wisewind	Thermometer	HTC-1	TM281	Nov. 13, 2012	Nov. 12, 2013
Agilent	Wireless Communication Test Set	E5515C	GB46311322	Mar. 25, 2013	Mar. 24, 2015
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 06, 2013	May. 05, 2015
SPEAG	Device Holder	N/A	N/A	NCR	NCR
Agilent	ESG Vector Series Signal Generator	E4438C	MY49070755	Oct. 02, 2012	Oct. 01, 2013
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2013	Feb. 06, 2014
Anritsu	Power Meter	ML2495A	1132003	Aug. 14, 2012	Aug. 13, 2013
Agilent	Dual Directional Coupler	778D	50422	Note 4	
Woken	Attenuator 1	WK0602-XX	N/A	Note 4	
PE	Attenuator 2	PE7005-10	N/A	Note 4	
PE	Attenuator 3	PE7005- 3	N/A	Note 4	
Agilent	Dielectric Probe Kit	85070D	US01440205	Note 5	
AR	Power Amplifier	5S1G4M2	328767	Note 6	
R&S	Spectrum Analyzer	FSP	101131	Jul. 23, 2012	Jul. 22, 2013

Table 5.1 Test Equipment List

Note:

- The calibration certificate of DASY can be referred to appendix C of this report.
- Referring to KDB 865664 D01v01r01, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The justification data of dipole D1750V2, SN: 1068, D2450V2, SN: 736 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.
- The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
- The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
- In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
- Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.

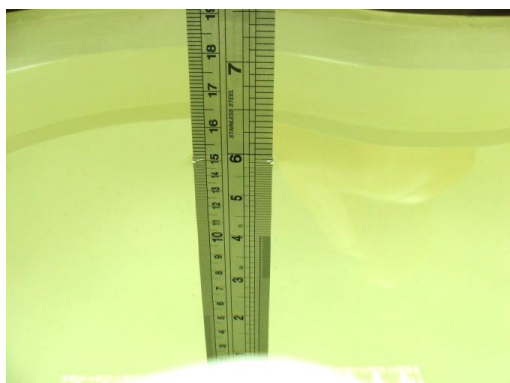

Fig 6.1 Photo of Liquid Height for Head SAR

Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

Simulating Liquid for 5G, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
850	Head	21.4	0.925	43.289	0.9	41.5	2.78	4.31	±5	Jun. 27, 2013
850	Body	21.5	0.963	54.498	0.97	55.2	-0.72	-1.27	±5	Jun. 27, 2013
1750	Head	21.6	1.394	38.51	1.4	40	-0.43	-3.73	±5	Jun. 30, 2013
1750	Body	21.5	1.541	51.611	1.52	53.3	1.38	-3.17	±5	Jun. 30, 2013
1900	Head	21.5	1.429	38.693	1.4	40	2.07	-3.27	±5	Jun. 30, 2013
1900	Body	21.5	1.553	50.771	1.52	53.3	2.17	-4.74	±5	Jun. 29, 2013
2450	Head	21.2	1.82	39.753	1.80	39.2	1.11	1.41	±5	Jun. 08, 2013
2450	Body	21.3	1.939	50.923	1.95	52.7	-0.56	-3.37	±5	Jun. 09, 2013
5200	Head	21.5	4.812	35.445	4.66	36	3.26	-1.54	±5	Jun. 08, 2013
5200	Body	21.1	5.312	47.806	5.3	49	0.23	-2.44	±5	Jun. 09, 2013
5300	Head	21.5	4.848	35.057	4.76	35.9	1.85	-2.35	±5	Jun. 08, 2013
5300	Body	21.1	5.457	47.597	5.4	48.9	1.06	-2.66	±5	Jun. 09, 2013
5600	Head	21.5	5.157	34.464	5.1	35.5	1.12	-2.92	±5	Jun. 08, 2013
5600	Body	21.1	5.888	46.875	5.8	48.5	1.52	-3.35	±5	Jun. 09, 2013
5800	Head	21.5	5.345	34.087	5.27	35.3	1.42	-3.44	±5	Jun. 08, 2013
5800	Body	21.1	6.168	46.453	6	48.2	2.80	-3.62	±5	Jun. 09, 2013

Table 6.2 Measuring Results for Simulating Liquid

7. System Verification Procedures

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

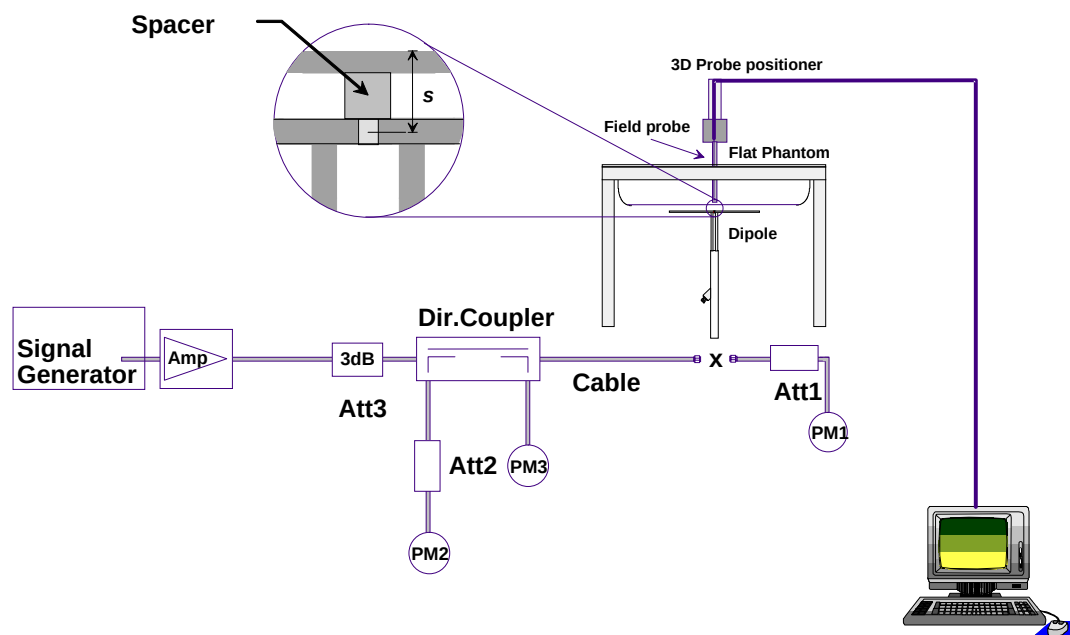


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole


Fig 7.2 Photo of Dipole Setup

7.3 SAR System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Liquid Type	Power fed onto reference dipole (mW)	Targeted SAR (W/kg)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
Jun. 27, 2013	850	Head	250	9.57	2.5	10	4.49
Jun. 27, 2013	850	Body	250	9.63	2.29	9.16	-4.88
Jun. 30, 2013	1750	Head	250	36.1	8.52	34.08	-5.60
Jun. 30, 2013	1750	Body	250	36.8	8.94	35.76	-2.83
Jun. 30, 2013	1900	Head	250	40.60	9.67	38.68	-4.73
Jun. 29, 2013	1900	Body	250	40.6	9.63	38.52	-5.12
Jun. 08, 2013	2450	Head	250	54.8	14.5	58	5.84
Jun. 09, 2013	2450	Body	250	52.3	13.6	54.4	4.02
Jun. 08, 2013	5200	Head	100	79.8	8.52	85.2	6.77
Jun. 09, 2013	5200	Body	100	71.4	7.22	72.2	1.12
Jun. 08, 2013	5300	Head	100	82.6	8.71	87.1	5.45
Jun. 09, 2013	5300	Body	100	73.5	6.93	69.3	-5.71
Jun. 08, 2013	5600	Head	100	83.6	8.16	81.6	-2.39
Jun. 09, 2013	5600	Body	100	76.8	7.41	74.1	-3.52
Jun. 08, 2013	5800	Head	100	78.9	8.18	81.8	3.68
Jun. 09, 2013	5800	Body	100	71.7	7.14	71.4	-0.42

Table 7.1 Target and Measurement SAR after Normalized

8. EUT Testing Position

8.1 Define two imaginary lines on the handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

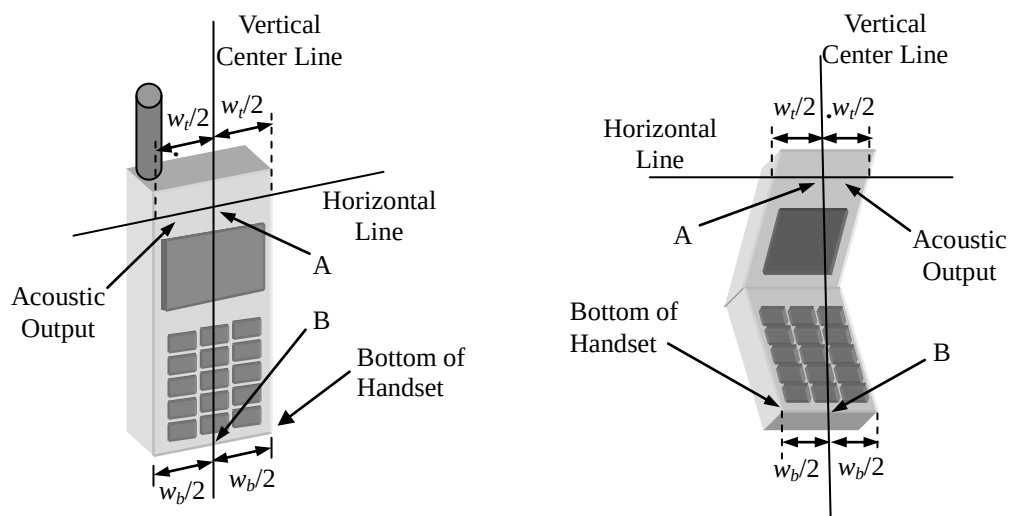


Fig 8.1 Illustration for Handset Vertical and Horizontal Reference Lines

8.2 Cheek Position

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 8.2).

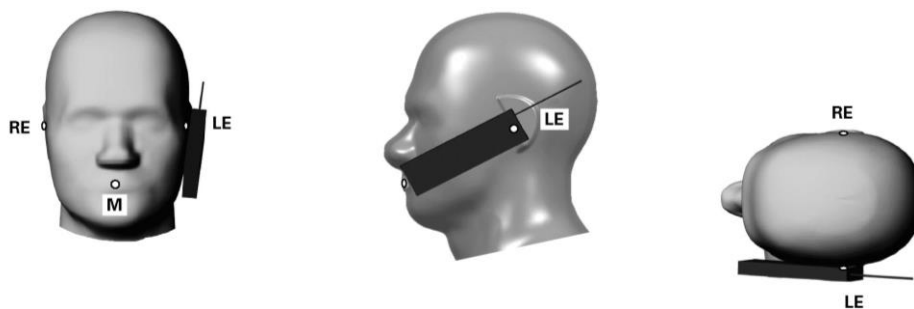


Fig 8.2 Illustration for Cheek Position

8.3 Tilted Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 8.3).

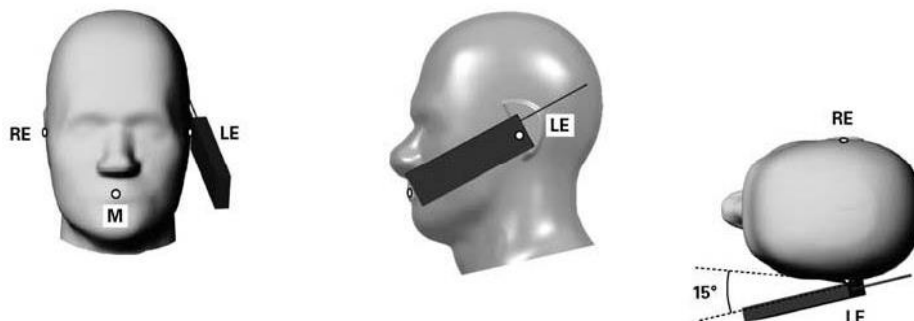


Fig 8.3 Illustration for Tilted Position

8.4 Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1cm and 1.5cm.

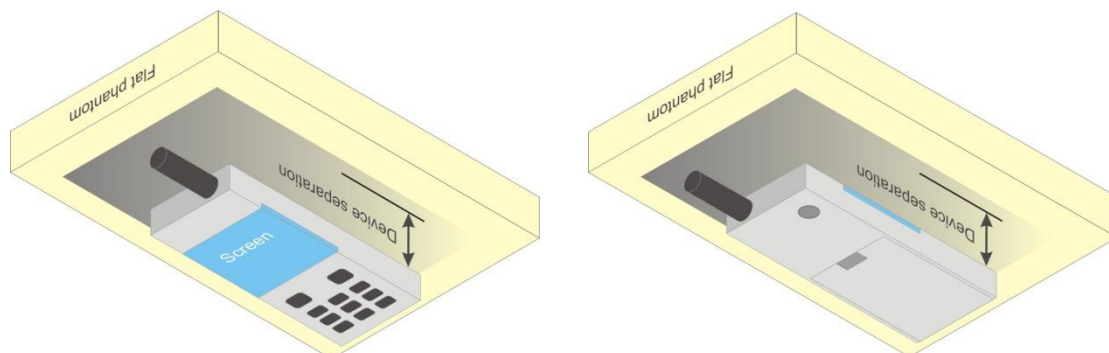


Fig 8.4 Illustration for Body Worn Position

8.5 Hotspot Position

- (a) To position the device parallel to the phantom surface with all sides and either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device and the flat phantom to 1.0cm.

<EUT Setup Photos>

Please refer to Appendix D for the test setup photos.

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.4 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remains in the same test position for all measurements and all volume scans use the same spatial resolution and grid spacing. When all volume scans are completed, the software, SEMCAD postprocessor, can combine and subsequently superpose these measurement data to calculate the multiband SAR.

9.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.6 Power Drift Monitoring

All SAR testing is under the EUT with a full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

Note:

1. Per KDB 447498 D01v05r01, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
3. Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table above, and the frame-average power is derived below to determine SAR testing.

$$DTM \text{ frame average power (dBm)} = 10 \cdot \log [\sum (\text{power of each slot, in mW}) / 8]$$
4. For head and body-worn SAR testing, GSM and DTM should be evaluated, therefore the EUT was set in DTM Multi-slot class 11 for GSM850 and GMS1900 due to its highest frame-average power.
5. For hotspot mode SAR testing, GPRS, EDGE and DTM should be evaluated, therefore the EUT was set in GPRS 4 Tx slots for GSM850 and GPRS 3 Tx slots for GSM1900 due to its highest frame-average power.

Band GSM850		Burst Average Power (dBm)			Frame-Average Power (dBm)		
TX Channel		128	189	251	128	189	251
Frequency (MHz)		824.2	836.4	848.8	824.2	836.4	848.8
GSM (GMSK, 1 Tx slot)		33.26	33.22	33.10	24.26	24.22	24.10
GPRS (GMSK, 1 Tx slot) – CS1		33.20	33.17	33.06	24.20	24.17	24.06
GPRS (GMSK, 2 Tx slots) – CS1		30.88	30.82	30.69	24.88	24.82	24.69
GPRS (GMSK, 3 Tx slots) – CS1		29.22	29.46	29.34	24.96	25.20	25.08
GPRS (GMSK, 4 Tx slots) – CS1		29.03	29.45	29.26	26.03	26.45	26.26
EDGE (GMSK, 1 Tx slot) – MCS1		33.25	33.21	33.10	24.25	24.21	24.10
EDGE (GMSK, 2 Tx slots) – MCS1		30.94	30.82	30.71	24.94	24.82	24.71
EDGE (GMSK, 3 Tx slots) – MCS1		29.26	29.48	29.35	25.00	25.22	25.09
EDGE (GMSK, 4 Tx slots) – MCS1		29.02	29.44	29.25	26.02	26.44	26.25
EDGE (8PSK, 1 Tx slot) – MCS5		26.40	26.37	26.33	17.40	17.37	17.33
EDGE (8PSK, 2 Tx slots) – MCS5		26.26	26.18	26.14	20.26	20.18	20.14
EDGE (8PSK, 3 Tx slots) – MCS5		26.13	26.05	26.03	21.87	21.79	21.77
EDGE (8PSK, 4 Tx slots) – MCS5		25.93	25.89	25.84	22.93	22.89	22.84
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.90	30.80	30.70	24.79	24.69	24.58
	GPRS (GMSK, 1 Tx slot) – CS1	30.72	30.62	30.49			
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.88	30.78	30.67	24.78	24.67	24.54
	GPRS (GMSK, 1 Tx slot) – CS1	30.71	30.60	30.45			
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	29.13	29.46	29.32	24.75	25.04	24.91
	GPRS (GMSK, 2 Tx slots) – CS1	28.95	29.21	29.10			
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.83	30.73	30.59	23.07	22.98	22.87
	EDGE (8PSK, 1 Tx slot) – MCS5	26.15	26.10	26.07			
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.80	30.72	30.55	23.01	22.94	22.81
	EDGE (8PSK, 1 Tx slot) – MCS5	26.01	25.96	25.93			
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	29.12	29.40	29.27	23.04	23.16	23.08
	EDGE (8PSK, 2 Tx slots) – MCS5	25.98	25.94	25.92			

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Band GSM1900		Burst Average Power (dBm)			Frame-Average Power (dBm)		
TX Channel		512	661	810	512	661	810
Frequency (MHz)		1850.2	1880	1909.8	1850.2	1880	1909.8
GSM (GMSK, 1 Tx slot)		29.83	30.07	30.34	20.83	21.07	21.34
GPRS (GMSK, 1 Tx slot) – CS1		29.82	30.14	30.32	20.82	21.14	21.32
GPRS (GMSK, 2 Tx slots) – CS1		27.48	27.65	27.73	21.48	21.65	21.73
GPRS (GMSK, 3 Tx slots) – CS1		26.20	26.34	26.63	21.94	22.08	22.37
GPRS (GMSK, 4 Tx slots) – CS1		24.94	25.12	25.33	21.94	22.12	22.33
EDGE (GMSK, 1 Tx slot) – MCS1		29.63	29.94	30.12	20.63	20.94	21.12
EDGE (GMSK, 2 Tx slots) – MCS1		27.44	27.63	27.71	21.44	21.63	21.71
EDGE (GMSK, 3 Tx slots) – MCS1		26.15	26.37	26.61	21.89	22.11	22.35
EDGE (GMSK, 4 Tx slots) – MCS1		24.91	25.09	25.32	21.91	22.09	22.32
EDGE (8PSK, 1 Tx slot) – MCS5		25.46	25.52	25.70	16.46	16.52	16.70
EDGE (8PSK, 2 Tx slots) – MCS5		25.33	25.38	25.49	19.33	19.38	19.49
EDGE (8PSK, 3 Tx slots) – MCS5		25.17	25.25	25.39	20.91	20.99	21.13
EDGE (8PSK, 4 Tx slots) – MCS5		25.05	25.01	25.16	22.05	22.01	22.16
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.41	27.65	27.82	21.38	21.59	21.79
	GPRS (GMSK, 1 Tx slot) – CS1	27.39	27.58	27.80			
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.40	27.62	27.80	21.34	21.56	21.77
	GPRS (GMSK, 1 Tx slot) – CS1	27.33	27.55	27.78			
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	26.14	26.32	26.61	21.84	22.05	22.32
	GPRS (GMSK, 2 Tx slots) – CS1	26.08	26.31	26.57			
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.42	27.62	27.78	20.48	20.61	20.77
	EDGE (8PSK, 1 Tx slot) – MCS5	25.34	25.36	25.50			
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.40	27.60	27.74	20.41	20.53	20.67
	EDGE (8PSK, 1 Tx slot) – MCS5	25.18	25.17	25.30			
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	26.14	26.31	26.62	21.25	21.31	21.51
	EDGE (8PSK, 2 Tx slots) – MCS5	25.16	25.15	25.27			
Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots. The calculated method are shown as below: Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB							

<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

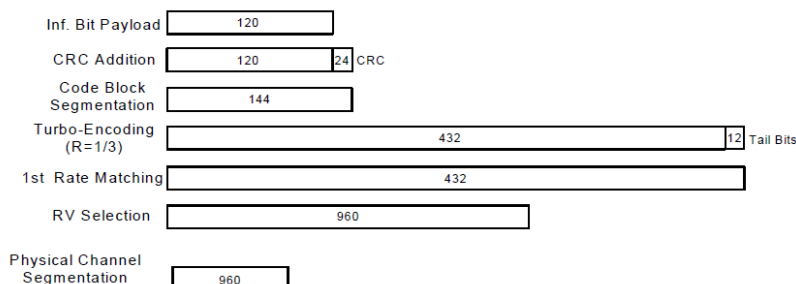
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
Note:

1. Applying the subtest setup in Table C.11.1.3 of 3GPP TS 34.121-1 V9.1.0 to Rel. 6 HSPA.
2. Per KDB 941225 D01v02, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
3. By design, HSDPA/HSUPA/DC-HSDPA RF power will not be larger than RMC 12.2kbps.

Band		WCDMA V			WCDMA II			WCDMA IV		
TX Channel		4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency (MHz)		826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
3GPP Rel 99	AMR 12.2Kbps	23.13	23.15	23.10	23.34	23.58	23.67	23.33	23.28	23.31
3GPP Rel 99	RMC 12.2Kbps	23.15	23.18	23.12	23.35	23.60	23.69	23.35	23.30	23.34
3GPP Rel 6	HSDPA Subtest-1	22.22	22.24	22.18	22.44	22.70	22.71	22.35	22.30	22.33
3GPP Rel 6	HSDPA Subtest-2	22.20	22.22	22.17	22.42	22.69	22.70	22.32	22.29	22.30
3GPP Rel 6	HSDPA Subtest-3	21.81	21.86	21.77	22.12	22.28	22.30	21.92	21.88	21.86
3GPP Rel 6	HSDPA Subtest-4	21.78	21.80	21.71	22.07	22.23	22.26	21.90	21.86	21.84
3GPP Rel 8	DC-HSDPA Subtest-1	22.19	22.21	22.16	22.42	22.67	22.69	22.33	22.28	22.30
3GPP Rel 8	DC-HSDPA Subtest-2	22.17	22.19	22.14	22.40	22.66	22.68	22.30	22.26	22.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.80	21.83	21.74	22.09	22.25	22.28	21.90	21.87	21.85
3GPP Rel 8	DC-HSDPA Subtest-4	21.76	21.78	21.68	22.05	22.20	22.24	21.88	21.84	21.82
3GPP Rel 6	HSUPA Subtest-1	22.14	22.10	22.04	21.90	22.01	22.05	22.08	22.03	21.98
3GPP Rel 6	HSUPA Subtest-2	20.85	20.80	20.70	21.17	21.40	21.43	20.98	20.99	20.94
3GPP Rel 6	HSUPA Subtest-3	21.08	21.04	20.98	21.02	21.11	21.15	20.90	20.95	20.87
3GPP Rel 6	HSUPA Subtest-4	21.64	21.60	21.55	21.55	21.64	21.70	21.47	21.50	21.41
3GPP Rel 6	HSUPA Subtest-5	22.24	22.20	22.09	22.02	22.08	22.10	22.21	22.18	22.14
MPR result										
3GPP MPR specification		WCDMA V			WCDMA II			WCDMA IV		
0	HSDPA Subtest-1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	HSDPA Subtest-2	0.02	0.02	0.01	0.02	0.01	0.01	0.03	0.01	0.03
≤0.5	HSDPA Subtest-3	0.41	0.38	0.41	0.32	0.42	0.41	0.43	0.42	0.47
≤0.5	HSDPA Subtest-4	0.44	0.44	0.47	0.37	0.47	0.45	0.45	0.44	0.49
0	HSDPA Subtest-1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	HSDPA Subtest-2	0.02	0.02	0.02	0.02	0.01	0.01	0.03	0.02	0.30
≤0.5	HSDPA Subtest-3	0.39	0.38	0.42	0.33	0.42	0.41	0.43	0.41	0.45
≤0.5	HSDPA Subtest-4	0.43	0.43	0.48	0.37	0.47	0.45	0.45	0.44	0.48
≤0	HSUPA Subtest-1	0.10	0.10	0.05	0.12	0.07	0.05	0.13	0.15	0.16
≤2	HSUPA Subtest-2	1.39	1.40	1.39	0.85	0.68	0.67	1.23	1.19	1.20
≤1	HSUPA Subtest-3	1.16	1.16	1.11	1.00	0.97	0.95	1.31	1.23	1.27
≤2	HSUPA Subtest-4	0.60	0.60	0.54	0.47	0.44	0.40	0.74	0.68	0.73
≤0	HSUPA Subtest-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

<WLAN 2.4GHz Conducted Power>

WLAN 2.4GHz 802.11b Average Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate	Channel	2Mbps	5.5Mbps	11Mbps
		1Mbps				
CH 1	2412	18.36	CH 1	18.30	18.31	18.27
CH 6	2437	18.21				
CH 11	2462	18.18				

WLAN 2.4GHz 802.11g Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 1	2412	13.00	CH 6	13.21	13.31	13.3	13.28	13.31	13.29	13.27
CH 6	2437	13.33								
CH 11	2462	12.94								

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 1	2412	12.07	CH 11	12.04	12.08	11.95	12	11.91	11.93	12.03
CH 6	2437	11.77								
CH 11	2462	12.11								

Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
3. Per KDB 248227 D01 v01r02, 11g and 11n-HT20 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.

<Bluetooth Conducted Power>

Channel	Frequency (MHz)	Average power (dBm)	
		Mode	
		GFSK	8-DPSK
CH 0	2402	7.87	6.44
CH 39	2441	7.99	6.56
CH 78	2480	7.85	6.41

Channel	Frequency (MHz)	Average power (dBm)	
		Mode	
		BT v4.0 LE, GFSK	
CH 0	2402	-0.31	
CH 19	2440	-0.33	
CH 39	2480	-0.61	

Note:

- Per KDB 447498 D01v05r01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	mW	Test Distance (mm)	Frequency (GHz)	exclusion thresholds
8	6.31	5	2.48	1.99

- Per KDB 447498 D01v05r01 exclusion thresholds is $1.99 < 3$, RF exposure evaluation is not required.

<WLAN 5GHz Conducted Power>

WLAN 5GHz 802.11a Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	12.32	CH 48	12.44	12.44	12.42	12.39	12.41	12.44	12.38
CH 40	5200	12.36								
CH 44	5220	12.34								
CH 48	5240	12.45								
CH 52	5260	11.89	CH 60	11.98	11.96	11.89	11.95	11.98	11.96	11.99
CH 56	5280	11.91								
CH 60	5300	12.01								
CH 64	5320	11.82								
CH 100	5500	11.70	CH 116	11.95	11.80	11.88	11.92	11.90	11.94	11.97
CH 104	5520	11.71								
CH 108	5540	11.85								
CH 112	5560	11.75								
CH 116	5580	12.08								
CH 120	5600	11.99								
CH 124	5620	12.02								
CH 128	5640	11.85								
CH 132	5660	11.65								
CH 136	5680	11.75								
CH 140	5700	11.80								
CH 149	5745	12.22	CH 149	12.03	11.97	11.95	11.99	12.01	12.13	12.17
CH 153	5765	12.11								
CH 157	5785	12.19								
CH 161	5805	12.11								
CH 165	5825	12.20								


WLAN 5GHz 802.11n-HT20 Average Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 36	5180	11.90	CH 48	12.03	12	12.03	12.02	12.01	11.94	12.08
CH 40	5200	11.89								
CH 44	5220	11.81								
CH 48	5240	12.09								
CH 52	5260	11.98	CH 52	11.96	11.95	11.89	11.91	11.94	11.93	11.92
CH 56	5280	11.84								
CH 60	5300	11.97								
CH 64	5320	11.9								
CH 100	5500	11.73	CH 116	11.94	11.99	11.98	11.98	11.93	11.93	11.97
CH 104	5520	11.82								
CH 108	5540	11.97								
CH 112	5560	11.84								
CH 116	5580	12.00								
CH 120	5600	12.00								
CH 124	5620	12.05								
CH 128	5640	11.95								
CH 132	5660	11.86								
CH 136	5680	11.80								
CH 140	5700	11.90								
CH 149	5745	12.05	CH 165	12.18	12.14	12.15	12.04	12.19	12.19	12.09
CH 153	5765	12.17								
CH 157	5785	12.14								
CH 161	5805	12.13								
CH 165	5825	12.21								

WLAN 5GHz 802.11n-HT40 Average Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 38	5190	11.95	CH 38	11.83	11.84	11.85	11.9	11.84	11.87	11.87
CH 46	5230	11.74								
CH 54	5270	11.94	CH 54	11.93	11.84	11.93	11.93	11.9	11.89	11.88
CH 62	5310	11.89								
CH 102	5510	11.82	CH 110	11.88	11.86	11.86	11.9	11.86	11.89	11.9
CH 110	5550	11.92								
CH 118	5590	11.94								
CH 134	5670	11.71								
CH 151	5755	12.02	CH 159	12.14	12.12	12.15	12.13	12.16	12.06	12.15
CH 159	5795	12.17								

Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate.
3. Per KDB 248227 D01 v01r02, 11n-HT20 and 11n-HT40 output power is less than 1/4dB higher than 802.11a mode, thus the SAR can be excluded.

11. Antenna Location

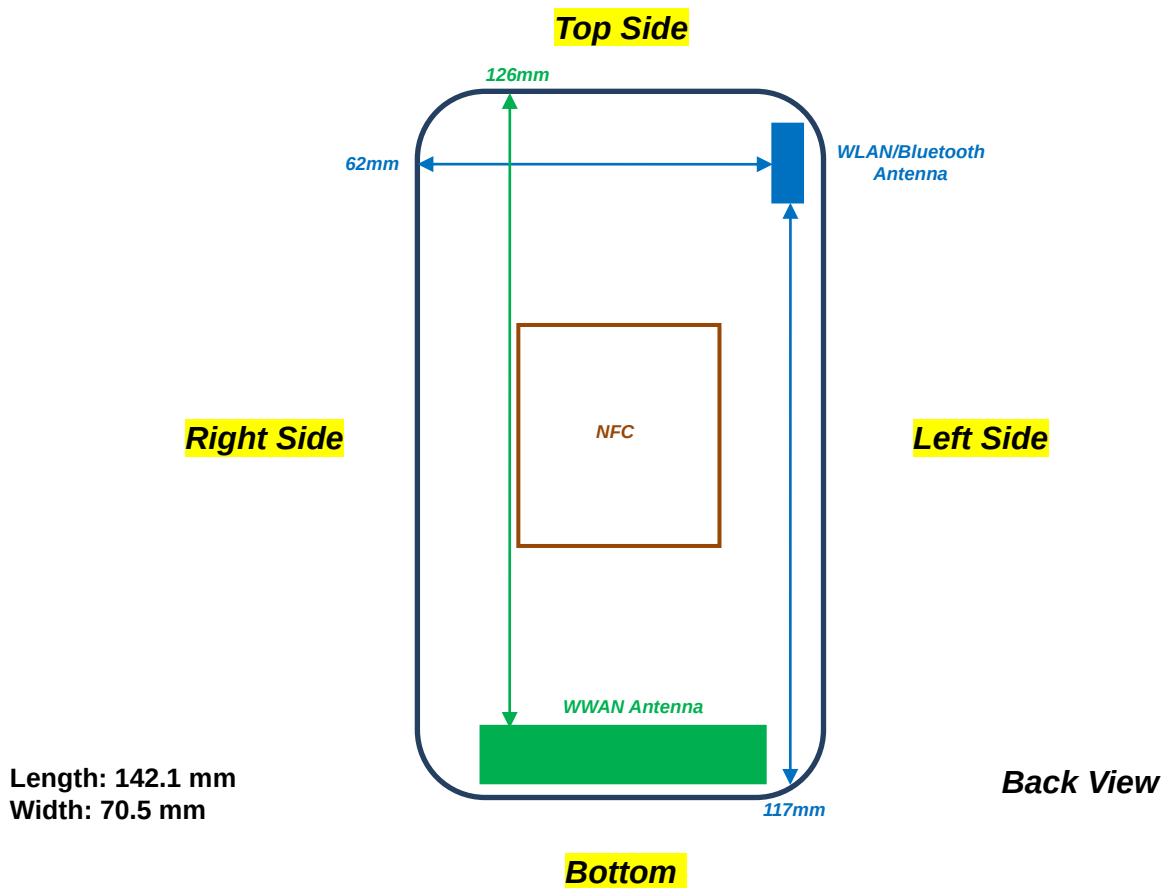

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	126mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	117mm	62mm	≤ 25mm

Positions for SAR tests; Hotspot mode Test distance: 10 mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	NO	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	NO	NO	Yes

Note:

Per KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

12. SAR Test Results

Note:

- Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

$$\text{Scaling Factor} = \text{tune-up limit power (mW)} / \text{EUT RF power (mW)}, \text{ where tune-up limit is the maximum rated power among all production units.}$$

$$\text{Reported SAR(W/kg)} = \text{Measured SAR(W/kg)} * \text{Scaling Factor}$$
- Per KDB 447498 D01v05r01, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA, output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA /HSUPA /DC-HSDPA SAR evaluation can be excluded.

12.1 Test Records for Head SAR Test

<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
1	GSM850	DTM Multi-slot class 11	Right Cheek	189	836.4	29.46	29.5	1.009	0.05	0.440	0.444
2	GSM850	DTM Multi-slot class 11	Right Tilted	189	836.4	29.46	29.5	1.009	0.11	0.275	0.278
3	GSM850	DTM Multi-slot class 11	Left Cheek	189	836.4	29.46	29.5	1.009	0	0.501	0.506
4	GSM850	DTM Multi-slot class 11	Left Tilted	189	836.4	29.46	29.5	1.009	0	0.288	0.291
82	GSM1900	DTM Multi-slot class 11	Right Cheek	810	1909.8	26.61	27	1.094	-0.09	0.539	0.590
83	GSM1900	DTM Multi-slot class 11	Right Tilted	810	1909.8	26.61	27	1.094	-0.02	0.341	0.373
84	GSM1900	DTM Multi-slot class 11	Left Cheek	810	1909.8	26.61	27	1.094	-0.03	0.561	0.614
85	GSM1900	DTM Multi-slot class 11	Left Tilted	810	1909.8	26.61	27	1.094	-0.04	0.392	0.429

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
5	WCDMA V	RMC 12.2Kbps	Right Cheek	4182	836.4	23.18	24	1.208	0	0.199	0.240
6	WCDMA V	RMC 12.2Kbps	Right Tilted	4182	836.4	23.18	24	1.208	-0.01	0.137	0.165
7	WCDMA V	RMC 12.2Kbps	Left Cheek	4182	836.4	23.18	24	1.208	0.05	0.281	0.339
8	WCDMA V	RMC 12.2Kbps	Left Tilted	4182	836.4	23.18	24	1.208	-0.03	0.146	0.176
88	WCDMA IV	RMC 12.2Kbps	Right Cheek	1312	1712.4	23.35	24	1.161	0.14	0.485	0.563
89	WCDMA IV	RMC 12.2Kbps	Right Tilted	1312	1712.4	23.35	24	1.161	-0.01	0.273	0.317
90	WCDMA IV	RMC 12.2Kbps	Left Cheek	1312	1712.4	23.35	24	1.161	0.01	0.500	0.581
91	WCDMA IV	RMC 12.2Kbps	Left Tilted	1312	1712.4	23.35	24	1.161	-0.02	0.295	0.343
76	WCDMA II	RMC 12.2Kbps	Right Cheek	9538	1907.6	23.69	24	1.074	0.03	0.540	0.580
77	WCDMA II	RMC 12.2Kbps	Right Tilted	9538	1907.6	23.69	24	1.074	-0.03	0.334	0.359
78	WCDMA II	RMC 12.2Kbps	Left Cheek	9538	1907.6	23.69	24	1.074	-0.1	0.576	0.619
79	WCDMA II	RMC 12.2Kbps	Left Tilted	9538	1907.6	23.69	24	1.074	0.02	0.358	0.384

<WLAN SAR DTS>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Compensate Factor	Power Drift (dB)	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
101	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	1	2412	18.36	18.5	1.033	97.63	1.024	0.03	0.057	0.060
102	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	1	2412	18.36	18.5	1.033	97.63	1.024	0.11	0.061	0.064
103	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	1	2412	18.36	18.5	1.033	97.63	1.024	0.07	0.044	0.046
104	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	1	2412	18.36	18.5	1.033	97.63	1.024	0.01	0.046	0.049
117	WLAN5GHz	802.11a 6Mbps	Right Cheek	149	5745	12.22	13	1.197	87.26	1.146	-0.04	0.023	0.031
118	WLAN5GHz	802.11a 6Mbps	Right Tilted	149	5745	12.22	13	1.197	87.26	1.146	-0.08	0.025	0.035
119	WLAN5GHz	802.11a 6Mbps	Left Cheek	149	5745	12.22	13	1.197	87.26	1.146	0.02	0.00521	0.007
120	WLAN5GHz	802.11a 6Mbps	Left Tilted	149	5745	12.22	13	1.197	87.26	1.146	0.07	0.024	0.034

<WLAN SAR NII>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Compensate Factor	Power Drift (dB)	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
105	WLAN5GHz	802.11a 6Mbps	Right Cheek	48	5240	12.45	13	1.135	87.26	1.146	0.04	0.037	0.048
106	WLAN5GHz	802.11a 6Mbps	Right Tilted	48	5240	12.45	13	1.135	87.26	1.146	0.053	0.027	0.035
107	WLAN5GHz	802.11a 6Mbps	Left Cheek	48	5240	12.45	13	1.135	87.26	1.146	0.01	0.022	0.028
108	WLAN5GHz	802.11a 6Mbps	Left Tilted	48	5240	12.45	13	1.135	87.26	1.146	0.07	0.036	0.047
109	WLAN5GHz	802.11a 6Mbps	Right Cheek	60	5300	12.01	13	1.256	87.26	1.146	0.08	0.025	0.036
110	WLAN5GHz	802.11a 6Mbps	Right Tilted	60	5300	12.01	13	1.256	87.26	1.146	-0.03	0.017	0.024
111	WLAN5GHz	802.11a 6Mbps	Left Cheek	60	5300	12.01	13	1.256	87.26	1.146	0.09	0.02	0.029
112	WLAN5GHz	802.11a 6Mbps	Left Tilted	60	5300	12.01	13	1.256	87.26	1.146	0.03	0.021	0.030
113	WLAN5GHz	802.11a 6Mbps	Right Cheek	116	5580	12.08	13	1.236	87.26	1.146	0.01	0.036	0.051
114	WLAN5GHz	802.11a 6Mbps	Right Tilted	116	5580	12.08	13	1.236	87.26	1.146	-0.06	0.027	0.038
115	WLAN5GHz	802.11a 6Mbps	Left Cheek	116	5580	12.08	13	1.236	87.26	1.146	0.02	0.035	0.049
116	WLAN5GHz	802.11a 6Mbps	Left Tilted	116	5580	12.08	13	1.236	87.26	1.146	0.03	0.039	0.056

12.2 Test Records for Hotspot SAR Test

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	126mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	117mm	62mm	≤ 25mm

Positions for SAR tests; Hotspot mode Test distance: 10 mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	NO	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	NO	NO	Yes

Note:

Per KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
9	GSM850	GPRS (4 Tx slots)	Front	1cm	189	836.4	29.45	29.5	1.012	-0.11	0.753	0.762
10	GSM850	GPRS (4 Tx slots)	Back	1cm	189	836.4	29.45	29.5	1.012	-0.04	0.893	0.903
11	GSM850	GPRS (4 Tx slots)	Back	1cm	128	824.2	29.03	29.5	1.114	0.11	0.859	0.957
12	GSM850	GPRS (4 Tx slots)	Back	1cm	251	848.8	29.26	29.5	1.057	-0.01	0.927	0.980
13	GSM850	GPRS (4 Tx slots)	Left Side	1cm	189	836.4	29.45	29.5	1.012	0.02	0.909	0.920
14	GSM850	GPRS (4 Tx slots)	Left Side	1cm	128	824.2	29.03	29.5	1.114	0.11	0.819	0.913
15	GSM850	GPRS (4 Tx slots)	Left Side	1cm	251	848.8	29.26	29.5	1.057	0.13	0.898	0.949
16	GSM850	GPRS (4 Tx slots)	Right Side	1cm	189	836.4	29.45	29.5	1.012	0	0.722	0.730
18	GSM850	GPRS (4 Tx slots)	Bottom Side	1cm	189	836.4	29.45	29.5	1.012	0	0.204	0.206
52	GSM1900	GPRS (3 Tx slots)	Front	1cm	810	1909.8	26.63	27	1.089	-0.03	0.755	0.822
47	GSM1900	GPRS (3 Tx slots)	Front	1cm	512	1850.2	26.2	27	1.202	0.11	0.615	0.739
48	GSM1900	GPRS (3 Tx slots)	Front	1cm	661	1880	26.34	27	1.164	-0.08	0.722	0.840
49	GSM1900	GPRS (3 Tx slots)	Back	1cm	810	1909.8	26.63	27	1.089	0.01	0.784	0.854
50	GSM1900	GPRS (3 Tx slots)	Back	1cm	512	1850.2	26.2	27	1.202	-0.07	0.553	0.665
51	GSM1900	GPRS (3 Tx slots)	Back	1cm	661	1880	26.34	27	1.164	0.12	0.662	0.771
53	GSM1900	GPRS (3 Tx slots)	Left Side	1cm	810	1909.8	26.63	27	1.089	-0.03	0.43	0.468
54	GSM1900	GPRS (3 Tx slots)	Right Side	1cm	810	1909.8	26.63	27	1.089	0.04	0.497	0.541
55	GSM1900	GPRS (3 Tx slots)	Bottom Side	1cm	810	1909.8	26.63	27	1.089	-0.04	0.363	0.395

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
21	WCDMA V	RMC 12.2Kbps	Front	1cm	4182	836.4	23.18	24	1.208	-0.03	0.314	0.379
26	WCDMA V	RMC 12.2Kbps	Back	1cm	4182	836.4	23.18	24	1.208	0	0.421	0.508
27	WCDMA V	RMC 12.2Kbps	Left Side	1cm	4182	836.4	23.18	24	1.208	-0.03	0.403	0.487
28	WCDMA V	RMC 12.2Kbps	Right Side	1cm	4182	836.4	23.18	24	1.208	0.03	0.299	0.361
30	WCDMA V	RMC 12.2Kbps	Bottom Side	1cm	4182	836.4	23.18	24	1.208	-0.01	0.093	0.112
65	WCDMA IV	RMC 12.2Kbps	Front	1cm	1312	1712.4	23.35	24	1.161	0.01	0.7	0.813
69	WCDMA IV	RMC 12.2Kbps	Front	1cm	1413	1732.6	23.3	24	1.175	-0.04	0.554	0.651
70	WCDMA IV	RMC 12.2Kbps	Front	1cm	1513	1752.6	23.34	24	1.164	-0.01	0.636	0.740
66	WCDMA IV	RMC 12.2Kbps	Back	1cm	1312	1712.4	23.35	24	1.161	-0.05	0.752	0.873
67	WCDMA IV	RMC 12.2Kbps	Back	1cm	1413	1732.6	23.3	24	1.175	0	0.566	0.665
68	WCDMA IV	RMC 12.2Kbps	Back	1cm	1513	1752.6	23.34	24	1.164	0	0.64	0.745
71	WCDMA IV	RMC 12.2Kbps	Left Side	1cm	1312	1712.4	23.35	24	1.161	0	0.306	0.355
72	WCDMA IV	RMC 12.2Kbps	Right Side	1cm	1312	1712.4	23.35	24	1.161	-0.08	0.386	0.448
74	WCDMA IV	RMC 12.2Kbps	Bottom Side	1cm	1312	1712.4	23.35	24	1.161	-0.02	0.38	0.441
36	WCDMA II	RMC 12.2Kbps	Front	1cm	9538	1907.6	23.69	24	1.074	0.02	0.76	0.816
44	WCDMA II	RMC 12.2Kbps	Front	1cm	9262	1852.4	23.35	24	1.161	-0.09	0.596	0.692
45	WCDMA II	RMC 12.2Kbps	Front	1cm	9400	1880	23.6	24	1.096	-0.1	0.638	0.700
37	WCDMA II	RMC 12.2Kbps	Back	1cm	9538	1907.6	23.69	24	1.074	0.04	0.915	0.983
38	WCDMA II	RMC 12.2Kbps	Back	1cm	9262	1852.4	23.35	24	1.161	0.04	0.736	0.855
39	WCDMA II	RMC 12.2Kbps	Back	1cm	9400	1880	23.6	24	1.096	0.04	0.797	0.874
40	WCDMA II	RMC 12.2Kbps	Left Side	1cm	9538	1907.6	23.69	24	1.074	-0.02	0.413	0.444
41	WCDMA II	RMC 12.2Kbps	Right Side	1cm	9538	1907.6	23.69	24	1.074	-0.01	0.528	0.567
43	WCDMA II	RMC 12.2Kbps	Bottom Side	1cm	9538	1907.6	23.69	24	1.074	-0.03	0.42	0.451

<WLAN SAR DTS>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Compensate Factor	Power Drift (dB)	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
121	WLAN2.4GHz	802.11b 1Mbps	Front	1cm	1	2412	18.36	18.5	1.033	97.63	1.024	-0.096	0.02	0.021
122	WLAN2.4GHz	802.11b 1Mbps	Back	1cm	1	2412	18.36	18.5	1.033	97.63	1.024	0.04	0.066	0.070
123	WLAN2.4GHz	802.11b 1Mbps	Left Side	1cm	1	2412	18.36	18.5	1.033	97.63	1.024	-0.13	0.058	0.061
124	WLAN2.4GHz	802.11b 1Mbps	Top Side	1cm	1	2412	18.36	18.5	1.033	97.63	1.024	-0.12	0.043	0.045

12.3 Test Records for Body Worn SAR Test

Note:

1. Per KDB 941225 D06v01r01, when the same wireless modems and device transmission configurations are required for testing body-worn accessories and hotspot mode, it is not necessary to test body-worn accessory SAR for the same device orientation if the test separation distance for hotspot mode is more conservative than that used for body-worn accessories. In this report, the worst exposure position is the back exposure position of the device.
2. Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call or DTM mode is selected to be tested at the back exposure position.
3. Per KDB 648474 D04v01r01, when the *reported* SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
19	GSM850	DTM Multi-slot class 11	Front	1cm	189	836.4	29.46	29.5	1.009	-0.05	0.636	0.642
20	GSM850	DTM Multi-slot class 11	Back	1cm	189	836.4	29.46	29.5	1.009	0.02	0.775	0.782
34	GSM850	DTM Multi-slot class 11	Back	1.5cm	189	836.4	29.46	29.5	1.009	0.01	0.634	0.640
57	GSM1900	DTM Multi-slot class 11	Front	1cm	810	1909.8	26.61	27	1.094	-0.11	0.728	0.796
58	GSM1900	DTM Multi-slot class 11	Front	1cm	512	1850.2	26.14	27	1.219	0.13	0.644	0.785
59	GSM1900	DTM Multi-slot class 11	Front	1cm	661	1880	26.32	27	1.169	-0.04	0.74	0.865
60	GSM1900	DTM Multi-slot class 11	Back	1cm	810	1909.8	26.61	27	1.094	-0.03	0.797	0.872
61	GSM1900	DTM Multi-slot class 11	Back	1cm	512	1850.2	26.14	27	1.219	0.1	0.533	0.650
62	GSM1900	DTM Multi-slot class 11	Back	1cm	661	1880	26.32	27	1.169	0.07	0.637	0.745
63	GSM1900	DTM Multi-slot class 11	Back	1.5cm	810	1909.8	26.61	27	1.094	-0.04	0.499	0.546

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
21	WCDMA V	RMC 12.2Kbps	Front	1cm	4182	836.4	23.18	24	1.208	-0.03	0.314	0.379
26	WCDMA V	RMC 12.2Kbps	Back	1cm	4182	836.4	23.18	24	1.208	0	0.421	0.508
33	WCDMA V	RMC 12.2Kbps	Back	1.5cm	4182	836.4	23.18	24	1.208	0.03	0.357	0.431
65	WCDMA IV	RMC 12.2Kbps	Front	1cm	1312	1712.4	23.35	24	1.161	0.01	0.700	0.813
69	WCDMA IV	RMC 12.2Kbps	Front	1cm	1413	1732.6	23.3	24	1.175	-0.04	0.554	0.651
70	WCDMA IV	RMC 12.2Kbps	Front	1cm	1513	1752.6	23.34	24	1.164	-0.01	0.636	0.740
66	WCDMA IV	RMC 12.2Kbps	Back	1cm	1312	1712.4	23.35	24	1.161	-0.05	0.752	0.873
67	WCDMA IV	RMC 12.2Kbps	Back	1cm	1413	1732.6	23.3	24	1.175	0	0.566	0.665
68	WCDMA IV	RMC 12.2Kbps	Back	1cm	1513	1752.6	23.34	24	1.164	0	0.640	0.745
75	WCDMA IV	RMC 12.2Kbps	Back	1.5cm	1312	1712.4	23.35	24	1.161	0	0.488	0.567
36	WCDMA II	RMC 12.2Kbps	Front	1cm	9538	1907.6	23.69	24	1.074	0.02	0.760	0.816
44	WCDMA II	RMC 12.2Kbps	Front	1cm	9262	1852.4	23.35	24	1.161	-0.09	0.596	0.692
45	WCDMA II	RMC 12.2Kbps	Front	1cm	9400	1880	23.6	24	1.096	-0.1	0.638	0.700
37	WCDMA II	RMC 12.2Kbps	Back	1cm	9538	1907.6	23.69	24	1.074	0.04	0.915	0.983
38	WCDMA II	RMC 12.2Kbps	Back	1cm	9262	1852.4	23.35	24	1.161	0.04	0.736	0.855
39	WCDMA II	RMC 12.2Kbps	Back	1cm	9400	1880	23.6	24	1.096	0.04	0.797	0.874
46	WCDMA II	RMC 12.2Kbps	Back	1.5cm	9538	1907.6	23.69	24	1.074	0	0.512	0.550

<WLAN SAR DTS>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Compensate Factor	Power Drift (dB)	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
121	WLAN2.4GHz	802.11b 1Mbps	Front	1cm	1	2412	18.36	18.5	1.033	97.63	1.024	-0.096	0.02	0.021
122	WLAN2.4GHz	802.11b 1Mbps	Back	1cm	1	2412	18.36	18.5	1.033	97.63	1.024	0.04	0.066	0.070
125	WLAN2.4GHz	802.11b 1Mbps	Back	1.5cm	1	2412	18.36	18.5	1.033	97.63	1.024	-0.17	0.027	0.029
135	WLAN5GHz	802.11a 6Mbps	Front	1cm	149	5745	12.22	13	1.197	87.26	1.146	0.03	0.00179	0.002
136	WLAN5GHz	802.11a 6Mbps	Back	1cm	149	5745	12.22	13	1.197	87.26	1.146	0.12	0.075	0.103
137	WLAN5GHz	802.11a 6Mbps	Back	1.5cm	149	5745	12.22	13	1.197	87.26	1.146	0.02	0.046	0.063

<WLAN SAR NII>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Compensate Factor	Power Drift (dB)	Measured SAR 1g (W/kg)	Scaled SAR 1g (W/kg)
126	WLAN5GHz	802.11a 6Mbps	Front	1cm	48	5240	12.45	13	1.135	87.26	1.146	0.01	0.014	0.018
127	WLAN5GHz	802.11a 6Mbps	Back	1cm	48	5240	12.45	13	1.135	87.26	1.146	-0.08	0.131	0.170
128	WLAN5GHz	802.11a 6Mbps	Back	1.5cm	48	5240	12.45	13	1.135	87.26	1.146	0.03	0.074	0.096
129	WLAN5GHz	802.11a 6Mbps	Front	1cm	60	5300	12.01	13	1.256	87.26	1.146	0.08	0.00119	0.001
130	WLAN5GHz	802.11a 6Mbps	Back	1cm	60	5300	12.01	13	1.256	87.26	1.146	-0.04	0.084	0.121
131	WLAN5GHz	802.11a 6Mbps	Back	1.5cm	60	5300	12.01	13	1.256	87.26	1.146	-0.09	0.054	0.078
132	WLAN5GHz	802.11a 6Mbps	Front	1cm	116	5580	12.08	13	1.236	87.26	1.146	0.013	0.014	0.020
133	WLAN5GHz	802.11a 6Mbps	Back	1cm	116	5580	12.08	13	1.236	87.26	1.146	-0.06	0.119	0.168
134	WLAN5GHz	802.11a 6Mbps	Back	1.5cm	116	5580	12.08	13	1.236	87.26	1.146	0.011	0.072	0.103

12.4 Repeated SAR Measurement
Note:

1. Per KDB 865664 D01v01r01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$
2. Per KDB 865664 D01v01r01, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured SAR 1g (W/kg)	Ratio	Scaled SAR 1g (W/kg)
12	GSM850	GPRS (4 Tx slots)	Back	1cm	251	848.8	29.26	29.5	1.057	-0.01	0.927	1	0.980
35	GSM850	GPRS (4 Tx slots)	Back	1cm	251	848.8	29.26	29.5	1.057	-0.04	0.913	1.02	0.965
37	WCDMA II	RMC 12.2Kbps	Back	1cm	9538	1907.6	23.69	24	1.074	0.04	0.915	1	0.983
64	WCDMA II	RMC 12.2Kbps	Back	1cm	9538	1907.6	23.69	24	1.074	0.15	0.890	1.03	0.956

12.5 Highest SAR Plot

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013/6/27

#12_GSM850_GPRS (4 Tx slots)_Back_1cm_Ch251

DUT: 360415

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2

Medium: MSL_850_130627 Medium parameters used: $f = 849$ MHz; $\sigma = 0.977$ mho/m; $\epsilon_r = 54.357$; $\rho =$

1000 kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(9.15, 9.15, 9.15); Calibrated: 2013/6/4;

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1338; Calibrated: 2013/5/28

- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542

- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch251/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 mW/g

Configuration/Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,


dz=5mm

Reference Value = 33.593 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.170 mW/g

SAR(1 g) = 0.927 mW/g; SAR(10 g) = 0.715 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

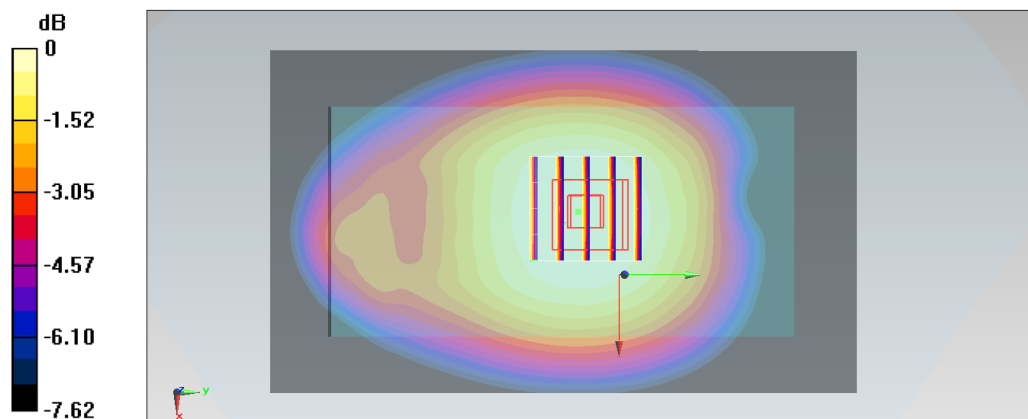

0 dB = 1.06 mW/g = 0.51 dB mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013/6/30

#66_WCDMA IV_RMC 12.2Kbps_Back_1cm_Ch1312

DUT: 360415

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: MSL_1750_130630 Medium parameters used : $f = 1712.4$ MHz; $\sigma = 1.501$ S/m; $\epsilon_r = 51.856$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.98, 4.98, 4.98); Calibrated: 2012/9/28;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1446
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch1312/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.893 W/kg


Configuration/Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.036 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.752 W/kg; SAR(10 g) = 0.504 W/kg

Maximum value of SAR (measured) = 0.873 W/kg

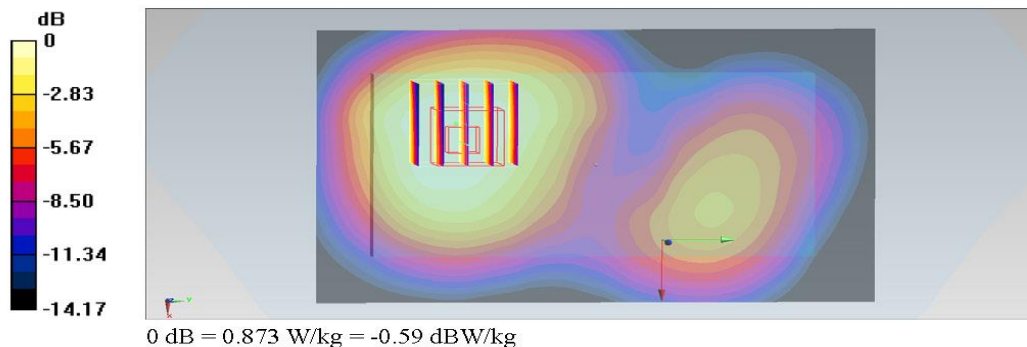

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013/6/29

#37_WCDMA II_RMC 12.2Kbps_Back_1cm_Ch9538

DUT: 360415

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130629 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.561$ mho/m; $\epsilon_r = 50.754$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.67, 4.67, 4.67); Calibrated: 2012/9/28;

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn778; Calibrated: 2012/8/27

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1446

- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Ch9538/Area Scan (71x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.40 mW/g

Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.233 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.874 mW/g

SAR(1 g) = 0.915 mW/g; SAR(10 g) = 0.489 mW/g

Maximum value of SAR (measured) = 1.31 mW/g


Configuration/Ch9538/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.233 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.280 mW/g

SAR(1 g) = 0.802 mW/g; SAR(10 g) = 0.518 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

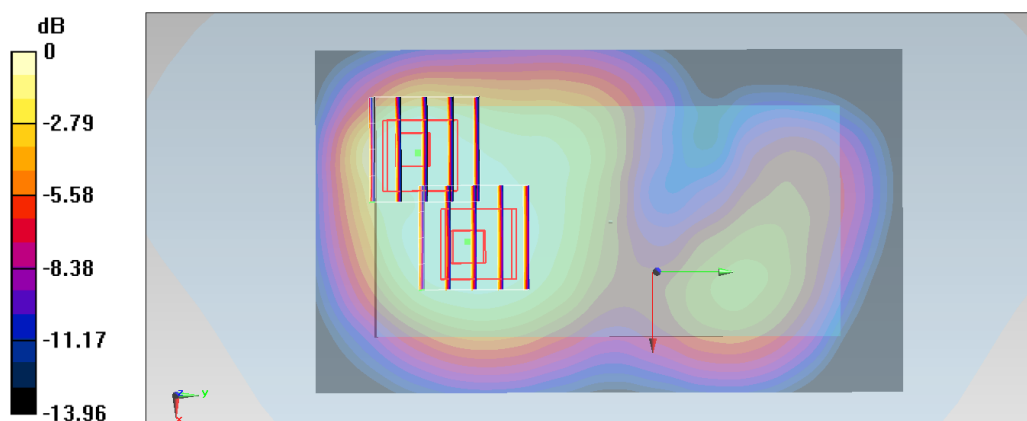

0 dB = 1.02 mW/g = 0.17 dB mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013-6-9

#122_WLAN2.4GHz_802.11b 1Mbps_Back 1cm_Ch1

DUT: 360415

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1.024

Medium: MSL_2450_130609 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.884$ mho/m; $\epsilon_r =$

51.097; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(6.84, 6.84, 6.84); Calibrated: 2012-12-10
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013-1-16
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.4.5 (3634)

Ch1/Area Scan (91x141x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.098 mW/g

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.217 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.095 mW/g



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2013-6-9

#127_WLAN5GHz_802.11a 6Mbps_Back 1cm_Ch48

DUT: 360415

Communication System: WIFI; Frequency: 5240 MHz; Duty Cycle: 1:1.146

Medium: MSL_5000_130609 Medium parameters used: $f = 5240$ MHz; $\sigma = 5.368$ mho/m; $\epsilon_r =$

47.72; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3820; ConvF(4.23, 4.23, 4.23); Calibrated: 2012-12-10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn679; Calibrated: 2013-1-16
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.4.5 (3634)

Ch48/Area Scan (101x171x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.244 mW/g


Ch48/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.130 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.241 mW/g

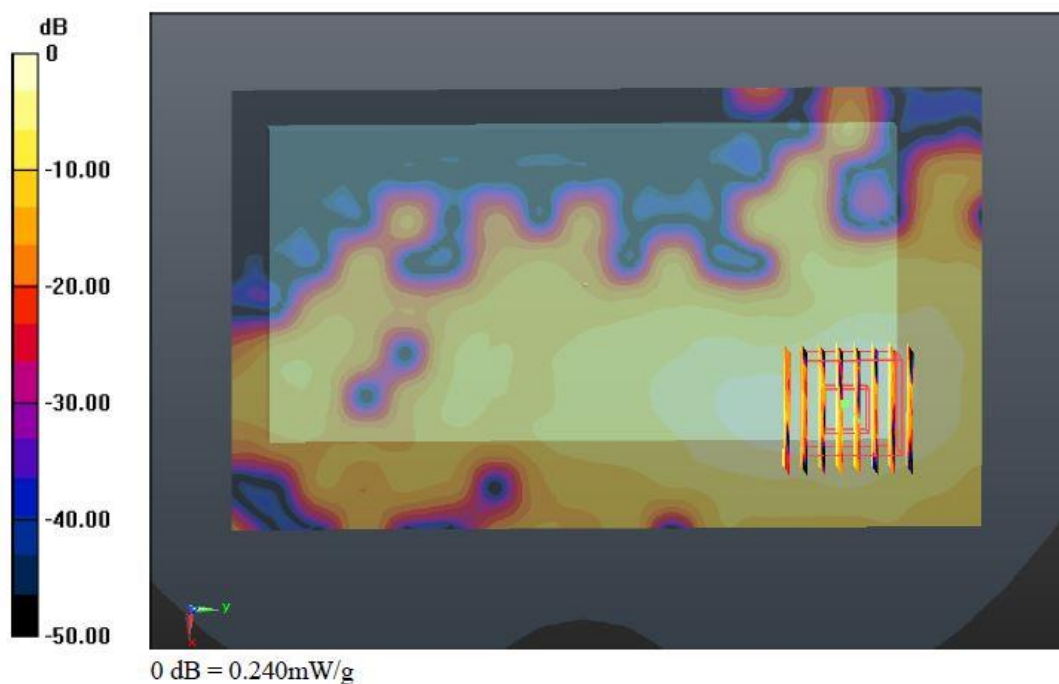

13. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Hotspot	
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes		
2.	WCDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		
3.	GSM(Voice) + Bluetooth(data)	Yes	Yes		
4.	WCDMA((Voice) + Bluetooth(data)	Yes	Yes		
5.	GSM(Voice) + WLAN5GHz(data)	Yes	Yes		
6.	WCDMA((Voice) + WLAN5GHz(data)	Yes	Yes		
7.	GPRS/EDGE(Data) + WLAN2.4GHz(data)			Yes	2.4GHz Hotspot
8.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
9.	GPRS/EDGE(Data) + Bluetooth(data)			Yes	Bluetooth Tethering
10.	WCDMA(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering

Note:

- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, they will not transmit simultaneously.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05r01, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6\text{W/kg}$.
 - $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan
If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r01 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$
for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$.

Bluetooth Max Power	Exposure Position	Head	Hotspot	Body-worn
	Test separation	0 mm	10 mm	10 mm
8 dBm	Antenna to user distance	0 mm	10 mm	10 mm
	Estimated SAR (W/kg)	0.265 W/kg	0.132 W/kg	0.132 W/kg

13.1 Head Exposure Conditions

<WWAN + WLAN2.4GHz>

Position	WWAN			WLAN		Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)	
Right Cheek	GSM850	1	0.444	101	0.06	0.50
	GSM1900	82	0.590	101	0.06	0.65
	WCDMA V	5	0.240	101	0.06	0.30
	WCDMA IV	88	0.563	101	0.06	0.62
	WCDMA II	76	0.580	101	0.06	0.64
Right Tilted	GSM850	2	0.278	102	0.064	0.34
	GSM1900	83	0.373	102	0.064	0.44
	WCDMA V	6	0.165	102	0.064	0.23
	WCDMA IV	89	0.317	102	0.064	0.38
	WCDMA II	77	0.359	102	0.064	0.42
Left Cheek	GSM850	3	0.506	103	0.046	0.55
	GSM1900	84	0.614	103	0.046	0.66
	WCDMA V	7	0.339	103	0.046	0.39
	WCDMA IV	90	0.581	103	0.046	0.63
	WCDMA II	78	0.619	103	0.046	0.67
Left Tilted	GSM850	4	0.291	104	0.049	0.34
	GSM1900	85	0.429	104	0.049	0.48
	WCDMA V	8	0.176	104	0.049	0.23
	WCDMA IV	91	0.343	104	0.049	0.39
	WCDMA II	79	0.384	104	0.049	0.43

<WWAN + WLAN 5.2GHz Band>

Position	WWAN			WLAN		Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)	
Right Cheek	GSM850	1	0.444	105	0.048	0.49
	GSM1900	82	0.590	105	0.048	0.64
	WCDMA V	5	0.240	105	0.048	0.29
	WCDMA IV	88	0.563	105	0.048	0.61
	WCDMA II	76	0.580	105	0.048	0.63
Right Tilted	GSM850	2	0.278	106	0.035	0.31
	GSM1900	83	0.373	106	0.035	0.41
	WCDMA V	6	0.165	106	0.035	0.20
	WCDMA IV	89	0.317	106	0.035	0.35
	WCDMA II	77	0.359	106	0.035	0.39
Left Cheek	GSM850	3	0.506	107	0.028	0.53
	GSM1900	84	0.614	107	0.028	0.64
	WCDMA V	7	0.339	107	0.028	0.37
	WCDMA IV	90	0.581	107	0.028	0.61
	WCDMA II	78	0.619	107	0.028	0.65
Left Tilted	GSM850	4	0.291	108	0.047	0.34
	GSM1900	85	0.429	108	0.047	0.48
	WCDMA V	8	0.176	108	0.047	0.22
	WCDMA IV	91	0.343	108	0.047	0.39
	WCDMA II	79	0.384	108	0.047	0.43

< WWAN + WLAN 5.3GHz Band >

Position	WWAN			WLAN		Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)	
Right Cheek	GSM850	1	0.444	109	0.036	0.48
	GSM1900	82	0.590	109	0.036	0.63
	WCDMA V	5	0.240	109	0.036	0.28
	WCDMA IV	88	0.563	109	0.036	0.60
	WCDMA II	76	0.580	109	0.036	0.62
Right Tilted	GSM850	2	0.278	110	0.024	0.30
	GSM1900	83	0.373	110	0.024	0.40
	WCDMA V	6	0.165	110	0.024	0.19
	WCDMA IV	89	0.317	110	0.024	0.34
	WCDMA II	77	0.359	110	0.024	0.38
Left Cheek	GSM850	3	0.506	111	0.029	0.54
	GSM1900	84	0.614	111	0.029	0.64
	WCDMA V	7	0.339	111	0.029	0.37
	WCDMA IV	90	0.581	111	0.029	0.61
	WCDMA II	78	0.619	111	0.029	0.65
Left Tilted	GSM850	4	0.291	112	0.030	0.32
	GSM1900	85	0.429	112	0.030	0.46
	WCDMA V	8	0.176	112	0.030	0.21
	WCDMA IV	91	0.343	112	0.030	0.37
	WCDMA II	79	0.384	112	0.030	0.41

< WWAN + WLAN 5.5GHz Band >

Position	WWAN			WLAN		Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)	
Right Cheek	GSM850	1	0.444	113	0.051	0.50
	GSM1900	82	0.590	113	0.051	0.64
	WCDMA V	5	0.240	113	0.051	0.29
	WCDMA IV	88	0.563	113	0.051	0.61
	WCDMA II	76	0.580	113	0.051	0.63
Right Tilted	GSM850	2	0.278	114	0.038	0.32
	GSM1900	83	0.373	114	0.038	0.41
	WCDMA V	6	0.165	114	0.038	0.20
	WCDMA IV	89	0.317	114	0.038	0.36
	WCDMA II	77	0.359	114	0.038	0.40
Left Cheek	GSM850	3	0.506	115	0.049	0.56
	GSM1900	84	0.614	115	0.049	0.66
	WCDMA V	7	0.339	115	0.049	0.39
	WCDMA IV	90	0.581	115	0.049	0.63
	WCDMA II	78	0.619	115	0.049	0.67
Left Tilted	GSM850	4	0.291	116	0.056	0.35
	GSM1900	85	0.429	116	0.056	0.49
	WCDMA V	8	0.176	116	0.056	0.23
	WCDMA IV	91	0.343	116	0.056	0.40
	WCDMA II	79	0.384	116	0.056	0.44

< WWAN + WLAN 5.8GHz Band >

Position	WWAN			WLAN		Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)	
Right Cheek	GSM850	1	0.444	117	0.031	0.48
	GSM1900	82	0.590	117	0.031	0.62
	WCDMA V	5	0.240	117	0.031	0.27
	WCDMA IV	88	0.563	117	0.031	0.59
	WCDMA II	76	0.580	117	0.031	0.61
Right Tilted	GSM850	2	0.278	118	0.035	0.31
	GSM1900	83	0.373	118	0.035	0.41
	WCDMA V	6	0.165	118	0.035	0.20
	WCDMA IV	89	0.317	118	0.035	0.35
	WCDMA II	77	0.359	118	0.035	0.39
Left Cheek	GSM850	3	0.506	119	0.007	0.51
	GSM1900	84	0.614	119	0.007	0.62
	WCDMA V	7	0.339	119	0.007	0.35
	WCDMA IV	90	0.581	119	0.007	0.59
	WCDMA II	78	0.619	119	0.007	0.63
Left Tilted	GSM850	4	0.291	120	0.034	0.33
	GSM1900	85	0.429	120	0.034	0.46
	WCDMA V	8	0.176	120	0.034	0.21
	WCDMA IV	91	0.343	120	0.034	0.38
	WCDMA II	79	0.384	120	0.034	0.42

<WWAN + Bluetooth>

Position	WWAN			Bluetooth	Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Estimated SAR (W/kg)	
Right Cheek	GSM850	1	0.444	0.265	0.71
	GSM1900	82	0.590	0.265	0.86
	WCDMA V	5	0.240	0.265	0.51
	WCDMA IV	88	0.563	0.265	0.83
	WCDMA II	76	0.580	0.265	0.85
Right Tilted	GSM850	2	0.278	0.265	0.54
	GSM1900	83	0.373	0.265	0.64
	WCDMA V	6	0.165	0.265	0.43
	WCDMA IV	89	0.317	0.265	0.58
	WCDMA II	77	0.359	0.265	0.62
Left Cheek	GSM850	3	0.506	0.265	0.77
	GSM1900	84	0.614	0.265	0.88
	WCDMA V	7	0.339	0.265	0.60
	WCDMA IV	90	0.581	0.265	0.85
	WCDMA II	78	0.619	0.265	0.88
Left Tilted	GSM850	4	0.291	0.265	0.56
	GSM1900	85	0.429	0.265	0.69
	WCDMA V	8	0.176	0.265	0.44
	WCDMA IV	91	0.343	0.265	0.61
	WCDMA II	79	0.384	0.265	0.65

13.2 Hotspot Exposure Conditions

< WWAN + WLAN 2.4GHz >

Position	WWAN			WLAN		Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)	
Front	GSM850	9	0.762	121	0.021	0.78
	GSM1900	48	0.840	121	0.021	0.86
	WCDMA V	21	0.379	121	0.021	0.40
	WCDMA IV	65	0.813	121	0.021	0.83
	WCDMA II	36	0.816	121	0.021	0.84
Back	GSM850	12	0.980	122	0.070	1.05
	GSM1900	49	0.854	122	0.070	0.92
	WCDMA V	26	0.508	122	0.070	0.58
	WCDMA IV	66	0.873	122	0.070	0.94
	WCDMA II	37	0.983	122	0.070	1.05
Left Side	GSM850	15	0.949	123	0.061	1.01
	GSM1900	53	0.468	123	0.061	0.53
	WCDMA V	27	0.487	123	0.061	0.55
	WCDMA IV	71	0.355	123	0.061	0.42
	WCDMA II	40	0.444	123	0.061	0.51
Right Side	GSM850	16	0.730			0.73
	GSM1900	54	0.541			0.54
	WCDMA V	28	0.361			0.36
	WCDMA IV	72	0.448			0.45
	WCDMA II	41	0.567			0.57
Top Side				124	0.045	0.08
				124	0.045	0.22
				124	0.045	0.06
				124	0.045	0.27
				124	0.045	0.25
Bottom Side	GSM850	18	0.206			0.21
	GSM1900	55	0.395			0.40
	WCDMA V	30	0.112			0.11
	WCDMA IV	74	0.441			0.44
	WCDMA II	43	0.451			0.45



< WWAN + Bluetooth >

Position	WWAN			Bluetooth	Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Estimated SAR (W/kg)	
Front	GSM850	9	0.762	0.132	0.89
	GSM1900	48	0.840	0.132	0.97
	WCDMA V	21	0.379	0.132	0.51
	WCDMA IV	65	0.813	0.132	0.95
	WCDMA II	36	0.816	0.132	0.95
Back	GSM850	12	0.980	0.132	1.11
	GSM1900	49	0.854	0.132	0.99
	WCDMA V	26	0.508	0.132	0.64
	WCDMA IV	66	0.873	0.132	1.01
	WCDMA II	37	0.983	0.132	1.12
Left Side	GSM850	15	0.949	0.132	1.08
	GSM1900	53	0.468	0.132	0.60
	WCDMA V	27	0.487	0.132	0.62
	WCDMA IV	71	0.355	0.132	0.49
	WCDMA II	40	0.444	0.132	0.58
Right Side	GSM850	16	0.730		0.73
	GSM1900	54	0.541		0.54
	WCDMA V	28	0.361		0.36
	WCDMA IV	72	0.448		0.45
	WCDMA II	41	0.567		0.57
Top Side				0.132	0.13
				0.132	0.13
				0.132	0.13
				0.132	0.13
				0.132	0.13
Bottom Side	GSM850	18	0.206		0.21
	GSM1900	55	0.395		0.40
	WCDMA V	30	0.112		0.11
	WCDMA IV	74	0.441		0.44
	WCDMA II	43	0.451		0.45

13.3 Body-Worn Exposure Conditions

< WWAN + WLAN 2.4GHz >

Position	WWAN			WLAN		Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)	
Front	GSM850	19	0.642	121	0.021	0.66
	GSM1900	59	0.865	121	0.021	0.89
	WCDMA V	21	0.379	121	0.021	0.40
	WCDMA IV	65	0.813	121	0.021	0.83
	WCDMA II	36	0.816	121	0.021	0.84
Back	GSM850	20	0.782	122	0.070	0.85
	GSM1900	60	0.872	122	0.070	0.94
	WCDMA V	26	0.508	122	0.070	0.58
	WCDMA IV	66	0.873	122	0.070	0.94
	WCDMA II	37	0.983	122	0.070	1.05

< WWAN + WLAN 5.2GHz >

Position	WWAN			WLAN		Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)	
Front	GSM850	19	0.642	126	0.018	0.66
	GSM1900	59	0.865	126	0.018	0.88
	WCDMA V	21	0.379	126	0.018	0.40
	WCDMA IV	65	0.813	126	0.018	0.83
	WCDMA II	36	0.816	126	0.018	0.83
Back	GSM850	20	0.782	127	0.170	0.95
	GSM1900	60	0.872	127	0.170	1.04
	WCDMA V	26	0.508	127	0.170	0.68
	WCDMA IV	66	0.873	127	0.170	1.04
	WCDMA II	37	0.983	127	0.170	1.15

< WWAN + WLAN 5.3GHz >

Position	WWAN			WLAN		Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)	
Front	GSM850	19	0.642	129	0.001	0.64
	GSM1900	59	0.865	129	0.001	0.87
	WCDMA V	21	0.379	129	0.001	0.38
	WCDMA IV	65	0.813	129	0.001	0.81
	WCDMA II	36	0.816	129	0.001	0.82
Back	GSM850	20	0.782	130	0.121	0.90
	GSM1900	60	0.872	130	0.121	0.99
	WCDMA V	26	0.508	130	0.121	0.63
	WCDMA IV	66	0.873	130	0.121	0.99
	WCDMA II	37	0.983	130	0.121	1.10

< WWAN + WLAN 5.5GHz>

Position	WWAN			WLAN		Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)	
Front	GSM850	19	0.642	132	0.020	0.66
	GSM1900	59	0.865	132	0.020	0.89
	WCDMA V	21	0.379	132	0.020	0.40
	WCDMA IV	65	0.813	132	0.020	0.83
	WCDMA II	36	0.816	132	0.020	0.84
Back	GSM850	20	0.782	133	0.168	0.95
	GSM1900	60	0.872	133	0.168	1.04
	WCDMA V	26	0.508	133	0.168	0.68
	WCDMA IV	66	0.873	133	0.168	1.04
	WCDMA II	37	0.983	133	0.168	1.15

< WWAN + WLAN 5.8GHz>

Position	WWAN			WLAN		Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Plot No	SAR (W/kg)	
Front	GSM850	19	0.642	135	0.002	0.64
	GSM1900	59	0.865	135	0.002	0.87
	WCDMA V	21	0.379	135	0.002	0.38
	WCDMA IV	65	0.813	135	0.002	0.82
	WCDMA II	36	0.816	135	0.002	0.82
Back	GSM850	20	0.782	136	0.103	0.89
	GSM1900	60	0.872	136	0.103	0.98
	WCDMA V	26	0.508	136	0.103	0.61
	WCDMA IV	66	0.873	136	0.103	0.98
	WCDMA II	37	0.983	136	0.103	1.09

< WWAN + Bluetooth>

Position	WWAN			Bluetooth	Summed SAR (W/kg)
	WWAN Band	Plot No	SAR (W/kg)	Estimated SAR (W/kg)	
Front	GSM850	19	0.642	0.132	0.77
	GSM1900	59	0.865	0.132	1.00
	WCDMA V	21	0.379	0.132	0.51
	WCDMA IV	65	0.813	0.132	0.95
	WCDMA II	36	0.816	0.132	0.95
Back	GSM850	20	0.782	0.132	0.91
	GSM1900	60	0.872	0.132	1.00
	WCDMA V	26	0.508	0.132	0.64
	WCDMA IV	66	0.873	0.132	1.01
	WCDMA II	37	0.983	0.132	1.12

Test Engineer : Bevis Chang, Ted Sun, Angel Chang, Tom Jiang, and Ken Li

14. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 14.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/ κ ^(b)	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 14.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 14.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.55	Normal	1	1	1	± 6.55 %	± 6.55 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Probe Positioning	9.9	Rectangular	√3	1	1	± 5.7 %	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 12.8 %	± 12.6 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 25.6 %	± 25.2 %

Table 14.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz