

ENGINEERING STATEMENT  
IN REGARD TO MEASUREMENTS ON  
Lentek International  
FCC ID: PD4PB01T

A. INTRODUCTION

Hyak Laboratories Inc. has been authorized by Lentek International, to perform measurements on a transmitter to determine compliance with FCC Rules, Subpart C.

The device is a low powered, battery operated transmitter designed as a pet security system. It operates at a nominal 315 MHz frequency. The transmitter, constructed on an etched circuit card, is powered from a 3 volt lithium battery. An integral, etched-circuit antenna is used.

The device meets the provisions of Para. 15.231(e) since as an automatically operated device it transmits for only a nominal 300 milliseconds with a silent period between transmissions of over 30 times the duration and at least 10 seconds.

B. REPORT OF PERIODIC OPERATION

Figure 1 is a time-domain plot of transmission duration. Nominal duration is 280 milliseconds.

Figure 2 is a time-domain plot showing silent period between Automatic transmission of 10 seconds.

C. DESCRIPTION OF MEASUREMENT FACILITIES

A description of the Hyak Laboratories Inc. radiation test facility is a matter of record with the FCC. The facility was accepted for radiation measurements on October 1, 1976, and is currently listed as an acceptable site.


#### D. DESCRIPTION OF MEASUREMENT PROCEDURE: RADIATED MEASUREMENTS

Measurements of transmitter radiation field strength were made using ANSI C63.4 (1992) as the test procedure. Measurements were made with 3 meter spacing between the transmitter under test and the test equipment antenna.

The transmitter under test was placed on a rotatable table approximately 80 cm in height.

The power supply was a fresh battery.

2  
FIGURE 1

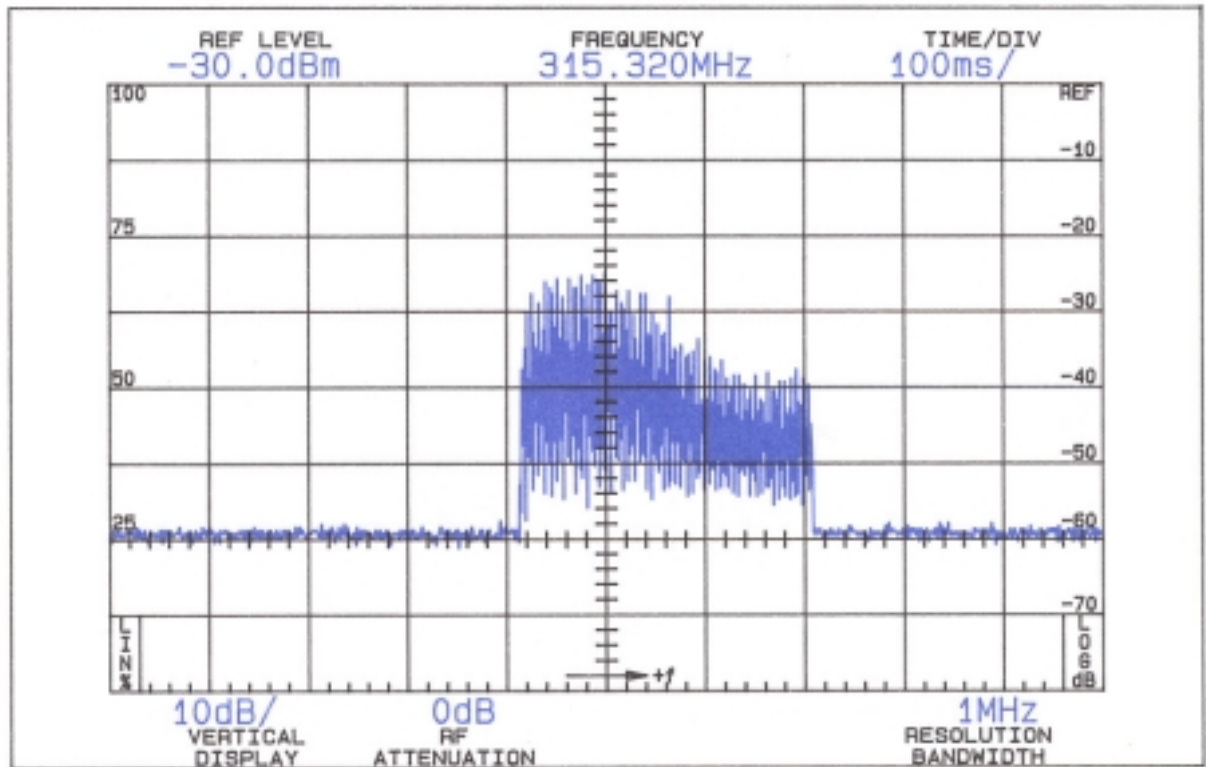

#### TRANSMISSION DURATION

Horizontal: 100 mS/Div  
Vertical: 10 dB/Div  
Resolution: 1 MHz


(Time Domain)

Transmission Timing  
FCC ID: PD4PB01T

Figure 1

3

FIGURE 2

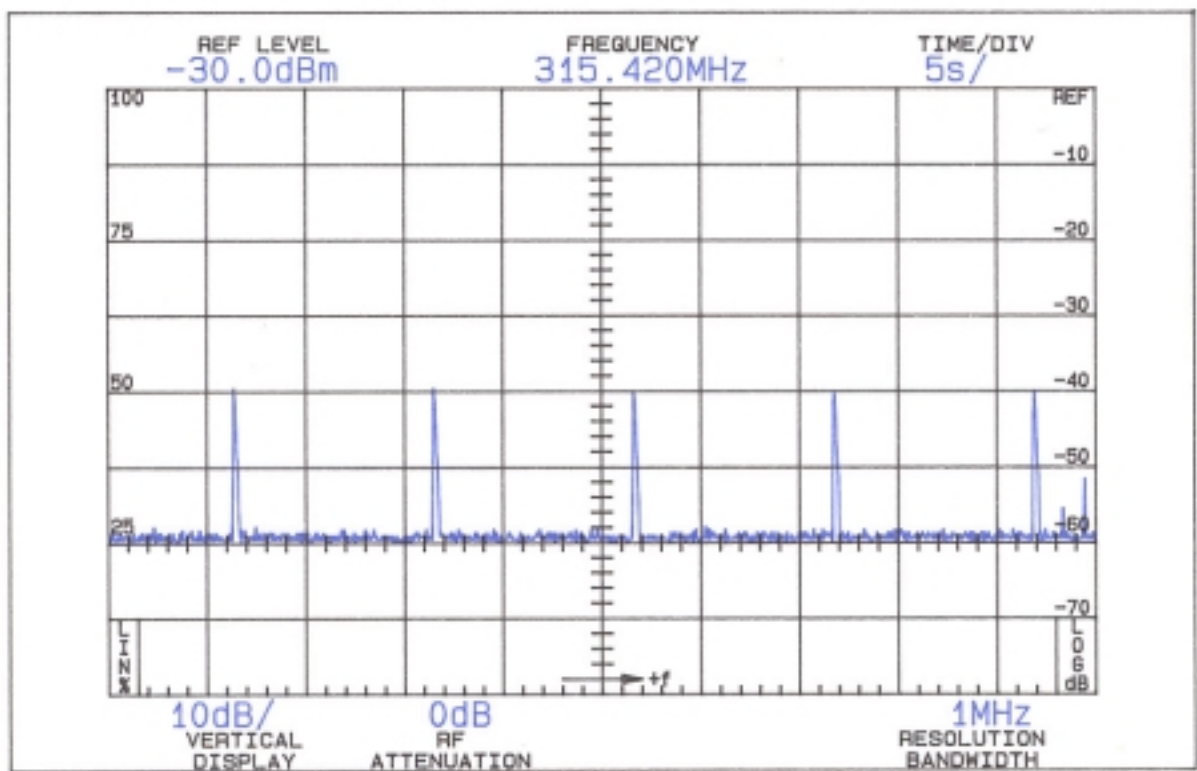

TRANSMISSION DURATION LIMITING

Horizontal: 5 seconds/Div

Vertical: 10 dB/Div  
Resolution: 1 MHz

(Time Domain)

Transmission Timing  
FCC ID: PD4PB01T

Figure 2

4

D. DESCRIPTION OF MEASUREMENT PROCEDURE: RADIATED MEASUREMENTS  
(Continued)

Measurement of field strength was made through use of HP 8596E and Tektronix 494P spectrum analyzers in conjunction with a HP 8447D and Avantek wide band, low noise preamplifiers; and an Advantest R3361A spectrum analyzer with quasi-peak detector.

Singer DM-105A series calibrated dipoles were used as the test antennas in the 25-1000 MHz range. An EMCO 3115 calibrated horn antenna was used between 1 and 4.4 GHz.

An analysis of time domain measurements (see plots in Figures 3 and 4) was made to determine average field intensity of the fundamental and any harmonics outside of forbidden bands. Sample calculations are included in Figure 5.

Based on time domain observations, and using the procedures of Figure 4, a correction factor for a nominal 100 mS averaging interval was computed.

Data for radiated emissions in Table 1 includes this correction factor. **For emissions that fell in forbidden bands below 1 GHz the CISPR quasi-peak detector was used.**

For each spurious emission identified between 30 MHz to the tenth harmonic the test assembly was rotated for maximum pickup, the test antenna varied in elevation and the test antenna polarization shifted between horizontal to vertical in order to maximize observed signals.

The measurement procedure included recording the worst-case field strength for receiving antenna polarization, test antenna height variation from 3 feet to 10 feet, test sample rotation, and placing the test sample on each of its major planes.

The spectrum was checked from 30 MHz to the tenth harmonic. All emissions not reported were more than 20 dB below the permitted level or below FCC limits but in the ambient/system noise floor. Tabulation of the measurements are shown in Table 1.


Specific forbidden band scans were made per Paragraph 15.205 and 15.209.

E. REPORT OF RADIATED MEASUREMENTS

Table 1 lists the frequency and amplitude of all signals observed from 30 MHz to the tenth harmonic that were within 20 dB of the limits of FCC Rules. The averaging factor is included as noted.

5

FIGURE 3

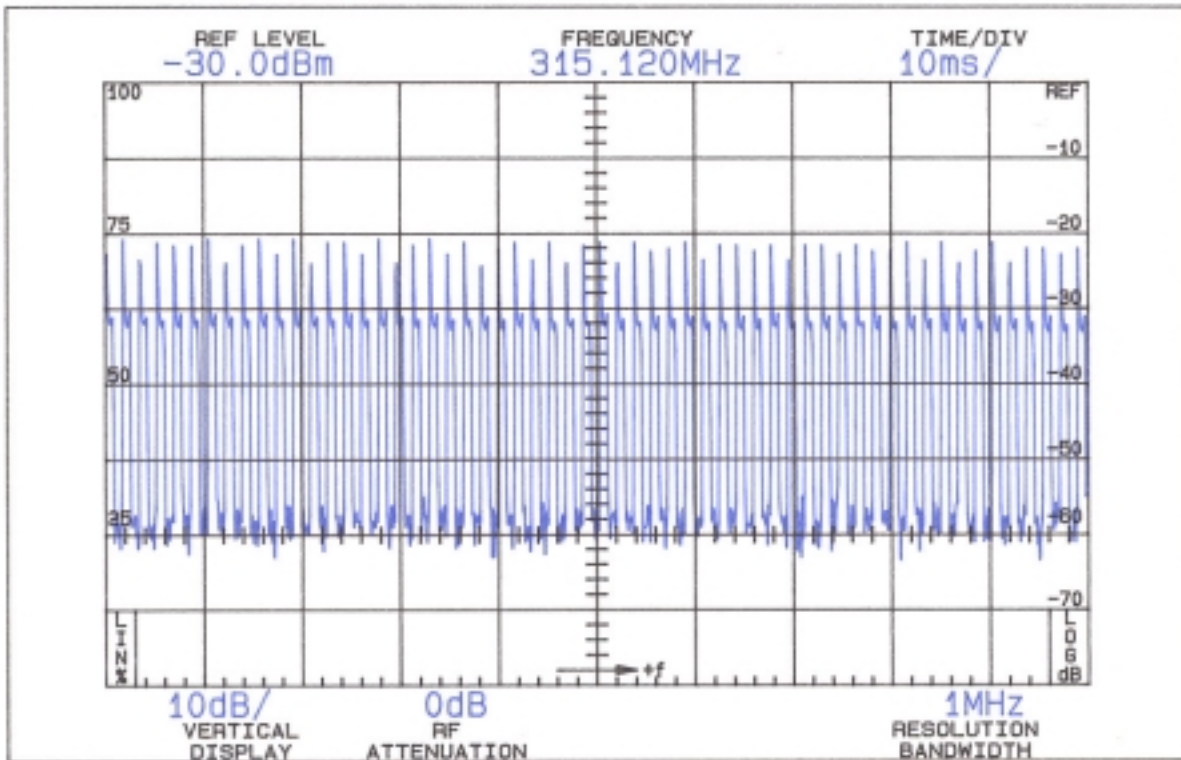

COMPLETE WORD TRANSMISSION


Horizontal: 10 milliseconds/Div  
Vertical: 10 dB/Div.  
Resolution: 1 MHz

(Time domain)

PULSE CHARACTERISTICS  
FCC ID: PD4PB01T

FIGURE 3

6  
FIGURE 4

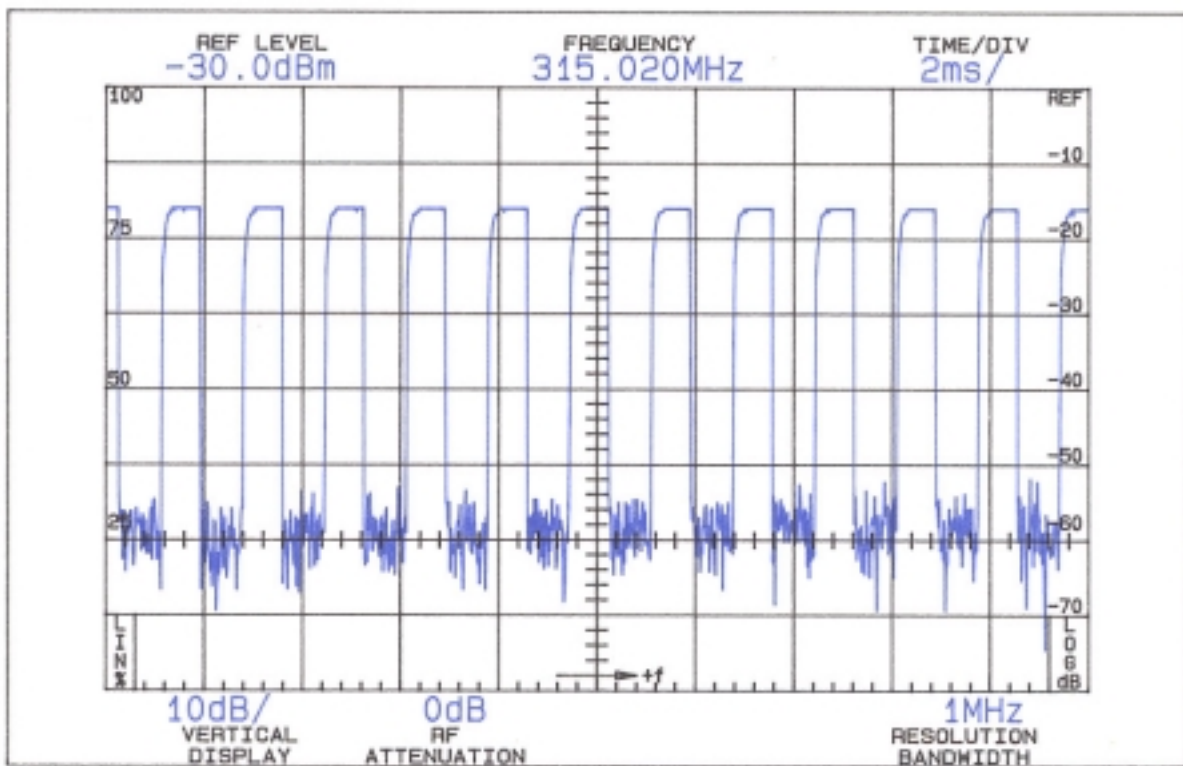

## WORD DETAIL

Horizontal: 2 milliseconds/Div  
Vertical: 10 dB/Div.  
Resolution: 1 MHz

(Time domain)

PULSE CHARACTERISTICS  
FCC ID: PD4PB01T

FIGURE 4

7

## SAMPLE COMPUTATIONS

Using the time domain plots of Figures 3 and 4, maximum "on" time over any 100 mS interval is:

Pulses:

$$\text{"On"} \ 58 \times 0.8 = 46.4$$

$$\text{Duty Cycle: } 46.4/100 = 0.46$$

$$20 \text{ Log } 0.46 = -6.7 \text{ dB}$$



SAMPLE COMPUTATIONS  
FCC ID: PD4PB01T

FIGURE 5

8

TABLE 1

RADIATED FIELD INTENSITY  
Measured at 3 meters  
15.231(b)

Frequency (MHz)	Meter <sup>1</sup> Reading (dBm)	Antenna Field <sup>2</sup> Factor (dB)	Intensity uV/m @ 3m	Calc. Field <sup>3</sup> Intensity uV/m @ 3m	FCC Limit uV/m @ 3m	dB to Limit
315.45	-60.4	21.8	2630.3	1216.2	2417.7	- 6.0
630.91	-83.2	28.5	412.1	190.5	241.8	- 2.1
946.32	-86.3	32.6	462.4	213.8	241.8	- 1.1
1261.30	-86.8	25.1	184.1	85.1	241.8	- 9.1
1578.00	-94.8	26.1	82.2	38.0	241.8	-16.1
1894.60	-89.6	27.8	182.0	84.1	241.8	- 9.2
2209.20	-92.4	28.8	147.9	68.4	241.8	-11.0
2524.80	-94.8	29.7	124.5	57.5	241.8	-12.5
2840.40	-91.2	30.4	204.2	94.4	241.8	- 8.2
3156.00	-95.2	31.3	142.9	66.1	241.8	-11.3

Note 1: Peak detector reading without averaging.

Note 2:  $\text{uV/m} = \text{Log} \frac{-1\text{dBu/m}}{20}$

dBu = dBm + antenna factor + 107

Note 3: Field Intensity calculated from peak value and -6.7 dB peak/average factor.

\*Forbidden Band

All other emissions to the tenth harmonic were below FCC limits.

(Unit was measured on 3 major planes)

RBW: 100 kHz to 1 GHz; 1 MHz if > 1GHz (Measured at 1 m extrapolated to 3 m). No video filtering. **Peak responding, rms calibrated detector.**

RADIATED FIELD INTENSITY  
FCC ID: PD4PB01T

TABLE 1

9

#### D. FORBIDDEN BAND MEASUREMENTS

Any spurious signals from the transmitter that fell in a forbidden band are identified in Table 1. All forbidden bands, per Paragraph 15.205, from 73 MHz to 4.4 GHz were searched and any applicable emissions above noise or interference levels are shown in Table 1.

#### E. OCCUPIED BANDWIDTH

A plot of occupied bandwidth is shown in Figure 6. The device meets bandwidth restriction of Paragraph 15.231(c); 26 dB points are less than 350 kHz with worst-case modulation. (Limit is 0.25% of 315 MHz or 790 kHz).

#### F. POWER LINE CONDUCTED MEASUREMENTS

AC line conducted spurious measurements were not made since the device does not use the public power supply system.

#### G. STATEMENT


Technical test data are from tests performed by me or under my supervision. My qualifications are a matter of record with the Federal Communications Commission. I personally attest to the accuracy of the test data submitted as a part of this engineering statement.

---

Rowland S. Johnson

Dated: November 9, 2000

10  
FIGURE 6

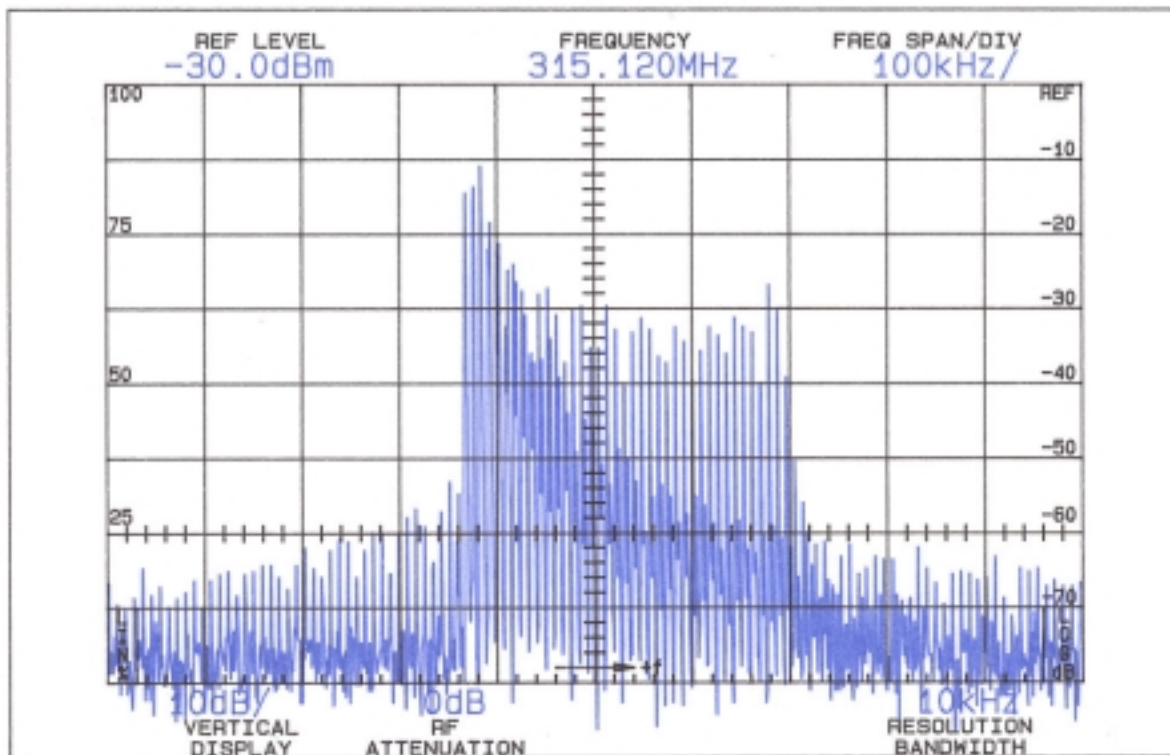

Center Frequency 315 MHz

Horizontal: 100 kHz  
Vertical: 10 dB/Div.  
Resolution: 1 kHz

No video filtering.

OCCUPIED BANDWIDTH  
FCC ID: PD4PB01T

FIGURE 6