



## FCC Part 74H Test Report

<b>APPLICANT</b>	WISYCOM
	VIA SPIN, 156 ROMANO D'EZZELINO (VI) 36060 ITALY
<b>FCC ID</b>	POUMTP41
<b>MODEL NUMBER</b>	MTP41S-US
<b>PRODUCT DESCRIPTION</b>	WIDEBAND BODYPACK TRANSMITTER
<b>DATE SAMPLE RECEIVED</b>	8/23/2018
<b>DATE TESTED</b>	8/23/2018
<b>TESTED BY</b>	Tim Royer
<b>APPROVED BY</b>	Franklin Rose
<b>TEST RESULTS</b>	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Report Version	Description	Issue Date
1336AUT18_PT74_Report	Rev1	Initial Issue	08/29/2018

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE  
WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

## TABLE OF CONTENTS

<b>GENERAL REMARKS .....</b>	<b>2</b>
<b>GENERAL INFORMATION .....</b>	<b>3</b>
<b>RESULTS SUMMARY .....</b>	<b>4</b>
<b>CHANGE(S) TO EUT, SUMMARY.....</b>	<b>4</b>
<b>RF POWER OUTPUT .....</b>	<b>5</b>
TEST DATA: MEAN OUTPUT MEASUREMENT TABLE, 470.075 -607.925 MHz BAND .....	5
TEST DATA: MEAN OUTPUT MEASUREMENT TABLE, 600 MHz DUPLEX GAP .....	5
<b>EMISSION MASK .....</b>	<b>6</b>
TEST DATA: 470.075 MHz EMISSION MASK PLOT .....	8
TEST DATA: 555.000 MHz EMISSION MASK PLOT .....	9
TEST DATA: 607.925 MHz EMISSION MASK PLOT .....	10
TEST DATA: 653.075 MHz EMISSION MASK PLOT .....	11
<b>STATEMENT OF MEASUREMENT UNCERTAINTY.....</b>	<b>12</b>
<b>EMC EQUIPMENT LIST .....</b>	<b>13</b>

## GENERAL REMARKS

### Summary

The device under test does:

- Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- Not fulfill the general approval requirements as identified in this test report

### Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

**Timco Engineering Inc.**  
**849 NW State Road 45**  
**Newberry, FL 32669**  
**Designation #: US1070**

### Tested by:



---

<b>Name and Title</b>	Tim Royer, Project Manager / EMC Testing Engineer
<b>Date</b>	08/29/2018

---

### Reviewed and Approved by:



---

<b>Name and Title</b>	Franklin Rose, Project Manager / EMC Testing Technician
<b>Date</b>	08/29/2018

---

## GENERAL INFORMATION

<b>EUT Description</b>	WIDEBAND BODYPACK TRANSMITTER
<b>FCC ID</b>	POUMTP41
<b>Model Number</b>	MTP41S-US
<b>Operating Frequency</b>	Band 1: 470.075 – 607.925 Band 3: 653.075 – 656.925 MHz
<b>Test Frequencies</b>	Band 1: 470.075, 555.0, 607.925 MHz Band 3: 653.075 MHz
<b>EUT Power Source</b>	<input type="checkbox"/> 110–120Vac/50– 60Hz <input type="checkbox"/> DC Power <input checked="" type="checkbox"/> Battery Operated Exclusively
<b>Test Item</b>	<input type="checkbox"/> Prototype <input type="checkbox"/> Pre-Production <input checked="" type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed <input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable
<b>Antenna Connector</b>	BNC
<b>Test Conditions</b>	The temperature was 26°C Relative humidity of 50%.
<b>Modification to the EUT</b>	No Modification to EUT.
<b>Test Exercise</b>	The EUT was placed in continuous transmit and was operated in "Test Mode" for digital emissions tests.
<b>Applicable Standards</b>	FCC CFR 47 Part 2, & 74, KDB 206256 D01 v02, ANSI/TIA 603-D:2010, ANSI C63.4 2014, ANSI C63.26 2015, ETSI EN 300-422-1 V1.4.2
<b>Test Facility</b>	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070

Applicant: WISYCOM SRL

FCC ID: POUMTP41

Report: 1336AUT18TestReport\_Rev1

## RESULTS SUMMARY

FCC Rule Part	Requirement	Test Item	Result
PART 2.1046(a), 74.861(e) (1) (ii), (iii)	Conducted Power	RF Power Output	<b>PASS</b>
PART 74.861(e)(7), ETSI EN 300-422-1 s. 8.3.2	Unwanted Emissions	Emission Mask	<b>PASS</b>

## CHANGE(S) TO EUT, SUMMARY

The changes to Part 74 H, specifically in the 600 MHz band have impact on the granted function of this device. In order to comply with the changes outlined in KDB 206256 D01 Wireless Microphones v02, this device has been tested to show compliance with the new rulings.

This device's hardware has not been altered; only the software/firmware settings have been changed in order to become compliant with the newly updated rules, as per KDB 206256, sections II and III. For more specific information, please see the updated Operational Description of the device.

This device was previously granted on the following frequency bands:

Date of Grant: 10/23/2013

470.075 – 607.925 MHz  
614.075 – 697.925 MHz

And only the software has been altered to limit operation to:

470.075 – 607.925 MHz  
653.075 – 656.925 MHz

**Note:** This device also contains user-selectable Part 15.236 frequencies, for use only by "Professional Users." For more information, please see the companion report:

"1336bUT18\_PT15\_TestReport\_Rev1"

## RF POWER OUTPUT

**Rule Part No.:** 2.1046(a), 74.861(e) (1) (ii), (iii)


### Requirement:

#### §74.861 Technical requirements.

(e) For low power auxiliary stations operating in the 600 MHz duplex gap and the bands allocated for TV broadcasting, the following technical requirements apply:

- (1) The power may not exceed the following values.
- (ii) 470-608 and 614-698: 250 mW conducted power
- (iii) 600 MHz duplex gap: 20 mW EIRP

### Setup Diagram:

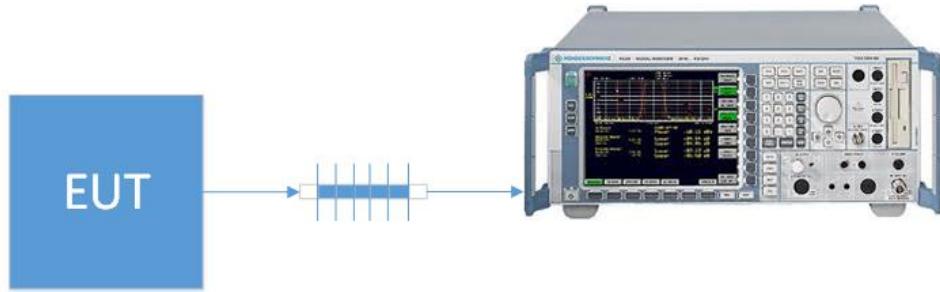

### Test Data: Mean Output Measurement Table, 470.075 -607.925 MHz Band

Tuned Frequency (MHz)	Mean Power Output		
	Level (dBm)	Level (mW)	Margin (mW)
470.075	14.98	31.5	218.5
555.000	14.89	30.8	219.2
607.925	14.98	31.5	218.5

### Test Data: Mean Output Measurement Table, 600 MHz Duplex Gap

Tuned Frequency (MHz)	Mean Power Output			
	Level (dBm)	Ant. Gain (dBi)	Level (mW)	Margin (mW)
653.075	10.89	0.00	12.3	7.7

## EMISSION MASK

**Rule Part No.:** FCC CFR 47 PART 74.861(e)(7)

(7) Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter.

**Requirement:** ETSI EN 300 422-1 Section 8.3.2

- (c) Compliance for emission mask and spurious emission requirements shall be demonstrated using the applicable measurement procedures of ETSI EN 300 422-1. Compliance with the emission limits shall be demonstrated using a RMS Average detector. Emissions shall be investigated up to the 10<sup>th</sup> harmonic of the fundamental. All other technical requirements shall be demonstrated utilizing the procedures specified in ANSI C63.26,<sup>4</sup> as applicable.

## EMISSION MASK

### 8.3.2.2 Limits

The transmitter output spectrum shall be within the mask defined in figure 4. This mask may also be used for analogue.


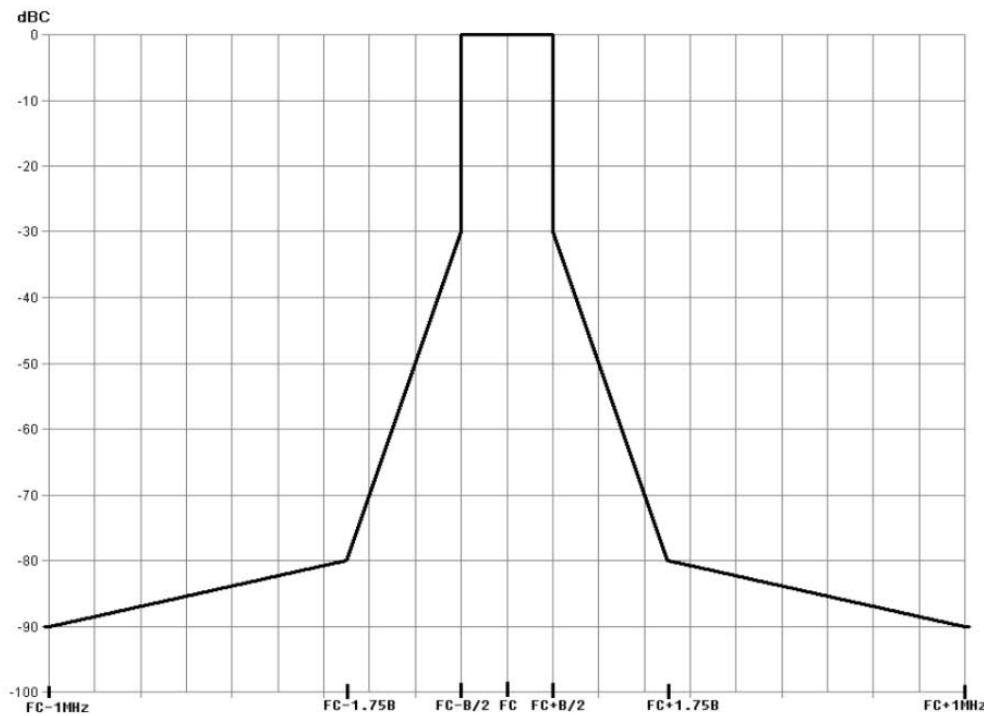


Figure 4: Spectrum mask for digital systems below 1 GHz

**Procedure:** ETSI EN 300 422-1 s. 8.3.2  
 ANSI C63.26, 5.4.4 (using Test Setup from TIA 603-E 2.2.11, below)

**Setup Diagram:**

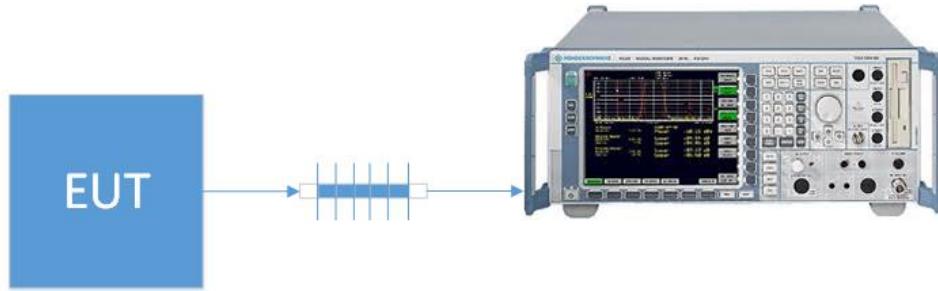


Applicant: WISYCOM SRL

FCC ID: POUUMTP41

Report: 1336AUT18TestReport\_Rev1

## EMISSION MASK

### Test Data: 470.075 MHz Emission Mask Plot

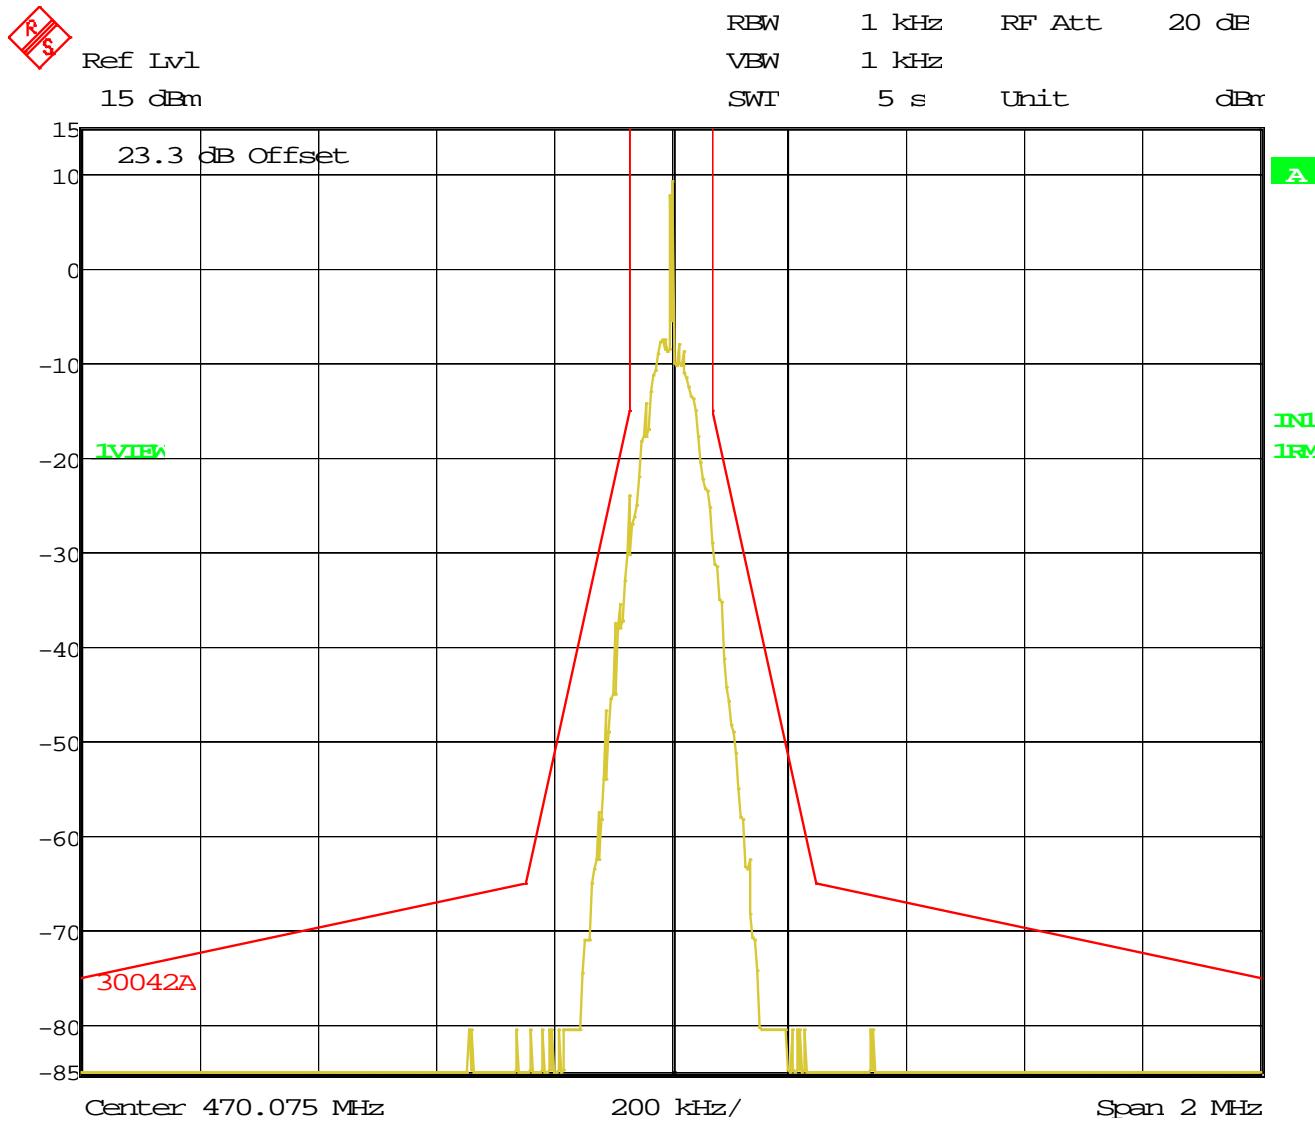


Applicant: WISYCOM SRL

FCC ID: POUUMTP41

Report: 1336AUT18TestReport\_Rev1

## EMISSION MASK

### Test Data: 555.000 MHz Emission Mask Plot

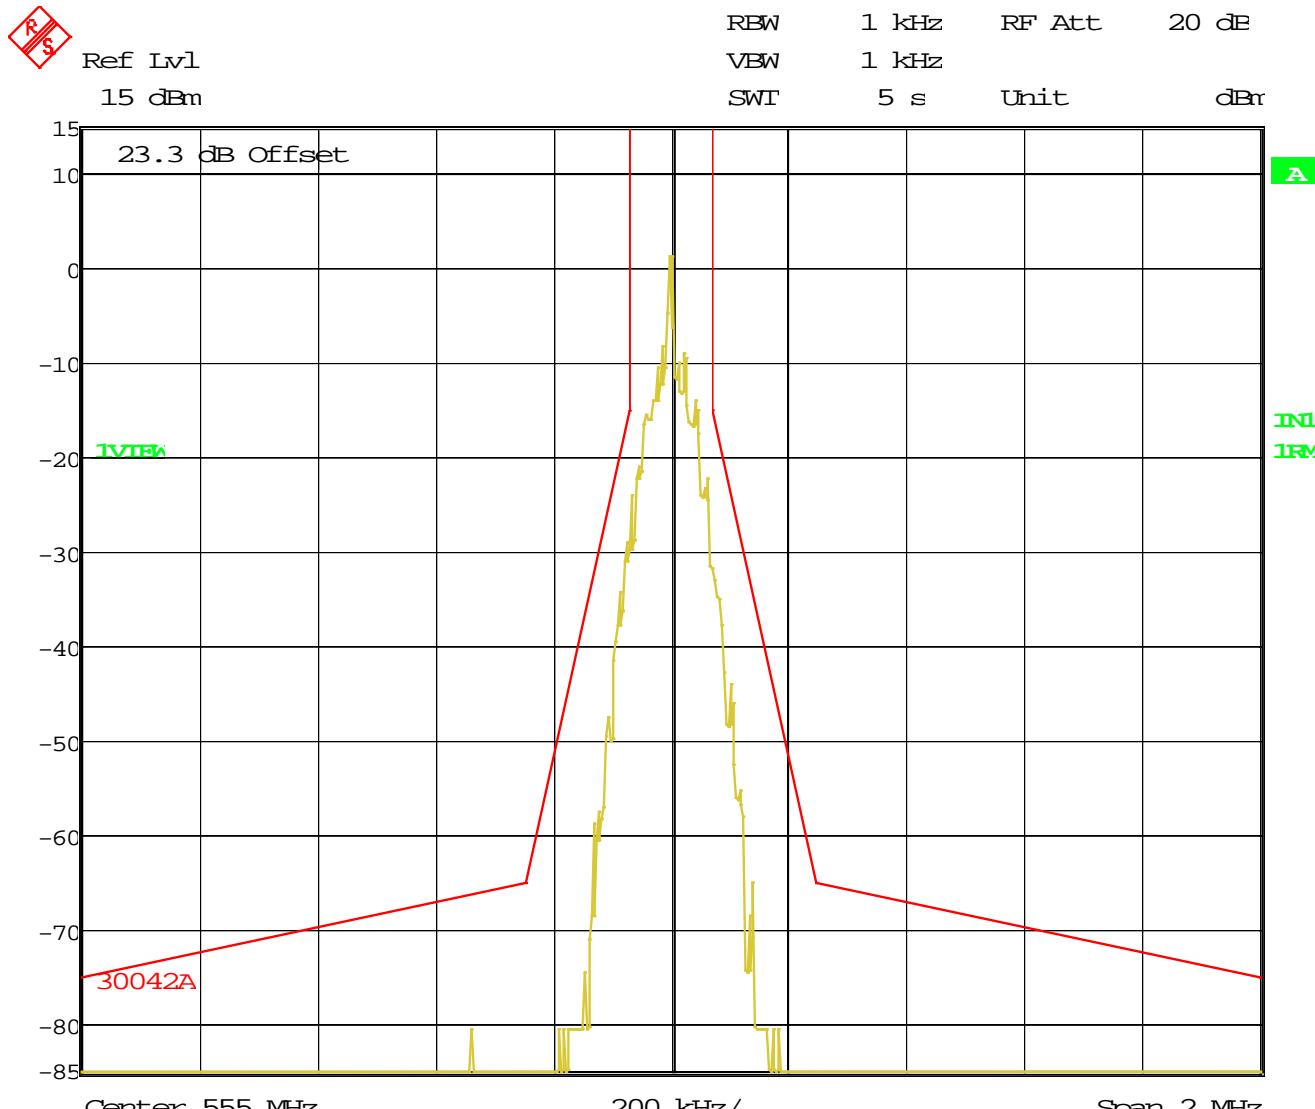


Applicant: WISYCOM SRL

FCC ID: POUUMTP41

Report: 1336AUT18TestReport\_Rev1

## EMISSION MASK

### Test Data: 607.925 MHz Emission Mask Plot

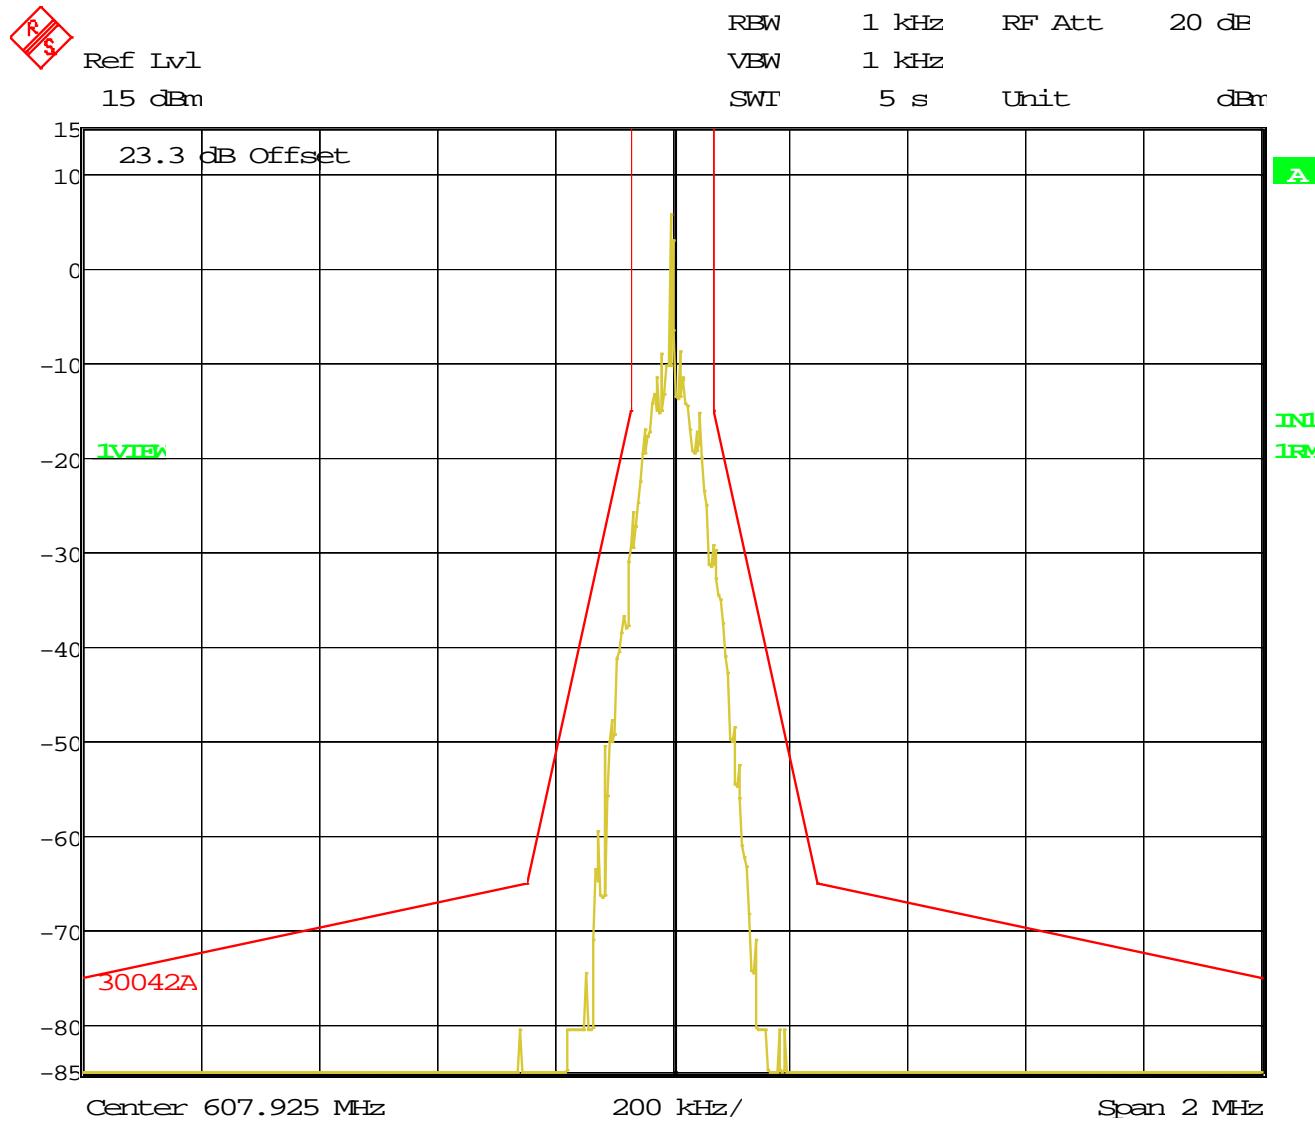

Date: 1.JAN.1997 02:18:26


Applicant: WISYCOM SRL

FCC ID: POUUMTP41

Report: 1336AUT18TestReport\_Rev1

## EMISSION MASK

### Test Data: 653.075 MHz Emission Mask Plot

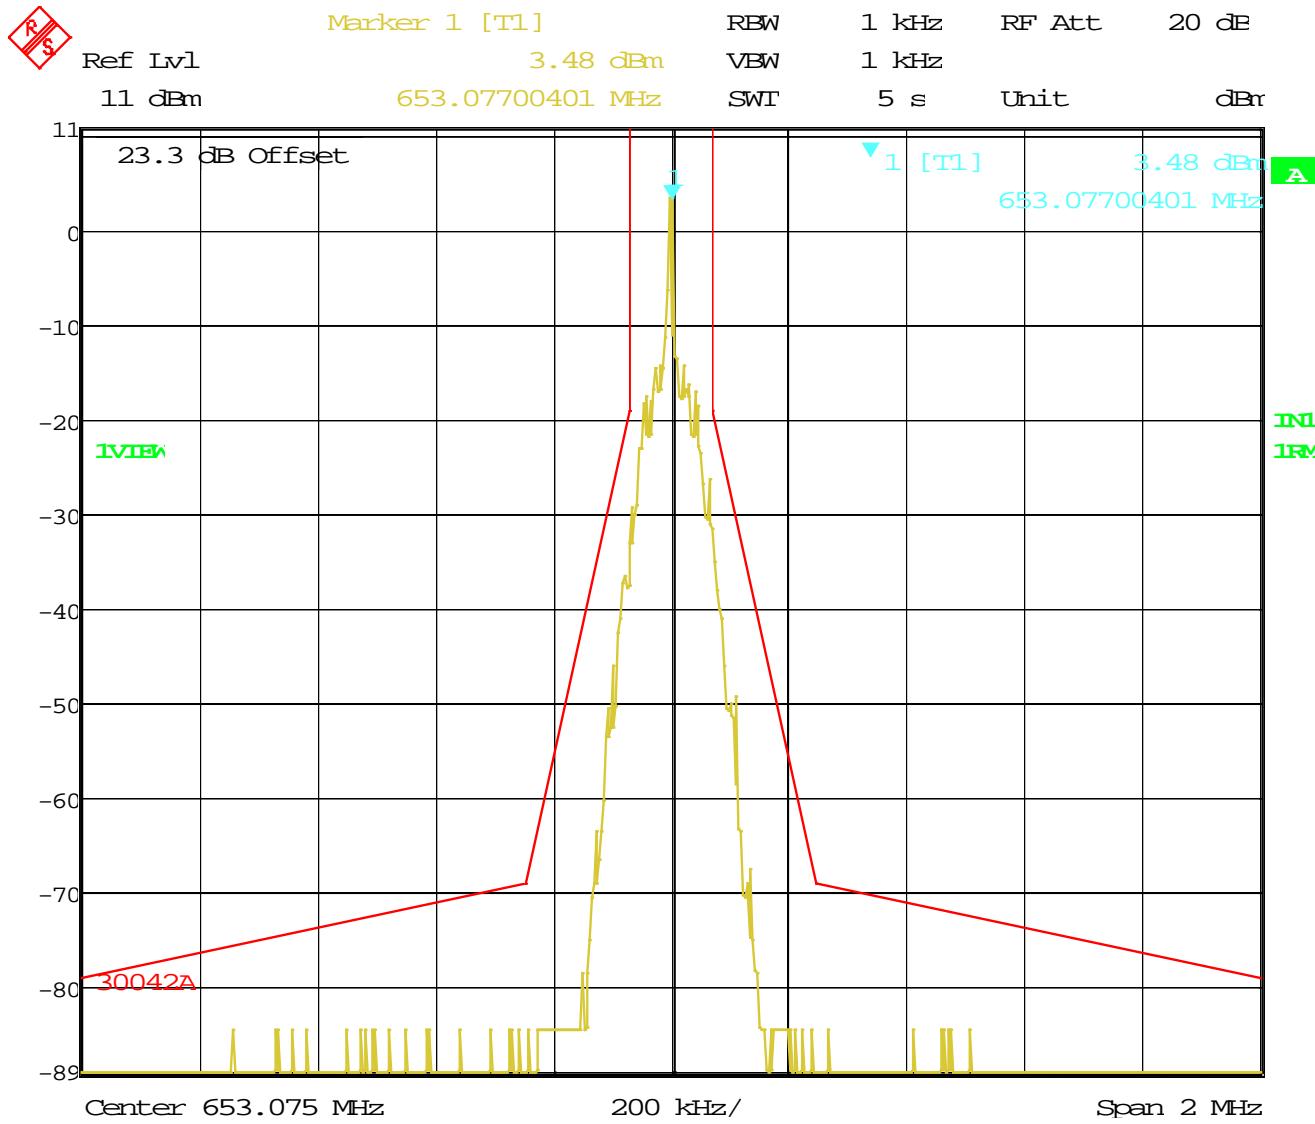

Date: 1.JAN.1997 02:09:55

Applicant: WISYCOM SRL

FCC ID: POUUMTP41

Report: 1336AUT18TestReport\_Rev1

## STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: “Uncertainty in EMC Measurements” and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

Test Items	Measurement Uncertainty	Notes
RF Frequency Accuracy	± 49.5 Hz	(1)
RF Conducted Power	±0.93dB	(1)
Conducted spurious emission of transmitter valid up to 40GHz	±1.86dB	
Occupied Bandwidth	±2.65%	
Audio Frequency Response	±1.86dB	
Modulation limiting	±1.88%	
Radiated RF Power	±1.4dB	
Maximum frequency deviation: Within 300 Hz and 6kHz of audio freq.	±1.88%	
Within 6kHz and 25kHz of audio Freq.	±2.04%	
Rad Emissions Sub Meth up to 26.5GHz	±2.14dB	
Adjacent channel power	±1.47dB	(1)
Transient Frequency Response	±1.88%	
Temperature	±1.0°C	(1)
Humidity	±5.0%	

Notes: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

**EMC EQUIPMENT LIST**

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Sweep/Signal Generator	Anritsu	68369B	985112	11/08/17	11/08/19
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/16/16	08/16/19
Tunable Notch Filter 250-850 MHz	Eagle	TNF-200	250-850 MHz (#19)	01/19/17	11/19/19

**\*EMI RECEIVER SOFTWARE VERSION**

The receiver firmware used was version 4.43 Service Pack 3

**END OF TEST REPORT**