

Test Laboratory: Compliance Certification Services Inc.

80211b Rate 1M Bottom Flat AR5B225 u310 FCC

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.2 deg C; Liquid Temperature: 23.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.18, 6.18, 6.18);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2011/7/26
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Bottom Middle CH6/Area Scan (18x26x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.171 mW/g

Bottom Middle CH6/Zoom Scan (7x7x9)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 0.872 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.475 W/kg

SAR(1 g) = **0.101 mW/g**; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.128 mW/g

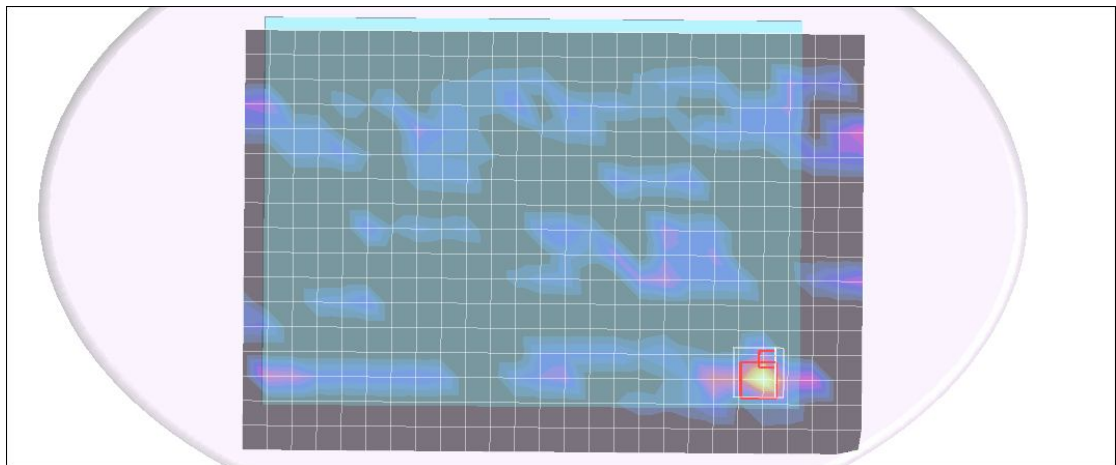

1g/10g Averaged SAR

SAR; Zoom Scan 2: Value Along Z, X=3, Y=3

