


ALS BETRIEBSGEHEIMNIS ANVERTRAUT. ALLE RECHTE VORBEHALTEN. PROPRIETARY DATA, COMPANY CONFIDENTIAL. ALL RIGHTS RESERVED.

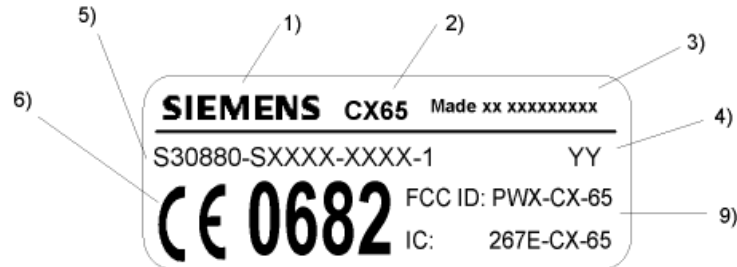

Label: Z30880-Z9999-Z72-*-25
 Ink ribbon: TTR-Band Ricoh 110-C
 Font: Title blocks concentric

1) Corporate logo: 1.5 SN 66324
 2) Product name: Internal font B, size 3
 3) Made xx xxxxxxx: Internal font A, size 4 / Depending on production location
 4) Code of date: Internal font D, size 4
 e.g. F3 — March
 ?—?1995
 5) Code number: Internal font D, size 4
 Corresponding to the number of the transceiver unit part list
 6) CE - identification: Height: 5mm
 9) Canada IC and US FCC: Internal font B, size 3

				DATE 17.02.2004	Approval label top CX65	
				NAME Kraiss		
				PD HW4 ULM		
1		17.02.04	KRA	SIEMENS AG	LETTERING PLAN	PAGE 1
VERS		DATE	TOKEN		DIS 62990	
						FROM 1

ALS BETRIEBSGEHEIMNIS ANVERTRAUT. ALLE RECHTE VORBEHALTEN. PROPRIETARY DATA, COMPANY CONFIDENTIAL. ALL RIGHTS RESERVED.



8)

- 10) XXXXXXXX Typ-Approval Code TAC
 - 10) SSSSSS Current serial number (6 digits), Assigned by PICS
 - 10) C CHECK DIGIT 15. digit
- space between TAC, serial no. and 15.digit

Label: Z30880-Z9999-Z72-* -25
 Ink ribbon: TTR-Band Ricoh 110-C
 Font: Title blocks concentric

7) Barcode IMEI-no.: Code: 128 Size 2 Ratio: 3.0 Height: 3mm
 Typ 128, table C and B
Characteristic: IMEI-No. has 15 digits
 Digit 1-14 is generated as Barcode with table C.
 Digit 15 is printed with table B.

8) IMEI-no. (plain writing): Internal font D, size 4, space between TAC,serial no. and 15.digit

10) Document for IMEI-no. allocation: DIS - 63079-* BOM 000 xx
 Valid is the highest level in the system

				DATE 23.01.2004	Approval label bottom Ulysses	
				NAME Kraiss		
				PD HW4 ULM		
1		23.01.04	KRA		LETTERING PLAN	
VERS		DATE	TOKEN	SIEMENS AG	DIS 62991	PAGE 1
						FROM 1

