

FCC RADIO TEST REPORT

Applicant's company	NETGEAR Inc.
Applicant Address	4500 Great America Parkway, Santa Clara, CA 95054, USA
FCC ID	PY308100078
Manufacturer's company	Ambit Microsystems (Shanghai) Ltd.
Manufacturer Address	No. 1925, Nanle Road, Songjiang Export Processing Zone, Shanghai, China

Product Name	RangeMax Duo Wireless-N Router
Brand Name	NETGEAR
Model Name	WNDR3300
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Nov. 24, 2007
Final Test Date	Jan. 28, 2008
Submission Type	Original Equipment
Operating Mode	Master



Statement

Test result included is only for the 802.11a (5150 ~ 5350MHz / 5470 ~ 5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart E**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes	5
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units	6
3.8. Table for Parameters of Test Software Setting	6
3.9. Test Configurations	7
4. TEST RESULT	9
4.1. AC Power Line Conducted Emissions Measurement.....	9
4.2. 99% Occupied Bandwidth Measurement	13
4.3. Maximum Conducted Output Power Measurement.....	20
4.4. Power Spectral Density Measurement	32
4.5. Peak Excursion Measurement.....	39
4.6. Radiated Emissions Measurement	46
4.7. Band Edge Emissions Measurement	70
4.8. Frequency Stability Measurement	76
4.9. Antenna Requirements	79
5. LIST OF MEASURING EQUIPMENTS	80
6. TEST LOCATION.....	82
7. TAF CERTIFICATE OF ACCREDITATION	83
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A17
APPENDIX B. TEST PHOTOS.....	B1 ~ B5
APPENDIX C. MPE REPORT	C1 ~ C4

History of This Test Report

Original Issue Date: Feb. 29, 2008

Report No.: FR7N2806-01AA

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



1. CERTIFICATE OF COMPLIANCE

Product Name : RangeMax Duo Wireless-N Router
Brand Name : NETGEAR
Model Name : WNDR3300
Applicant : NETGEAR Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 24, 2007 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read "Wayne Hsu 2/2008", is written over a horizontal line.

Wayne Hsu

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.81 dB
4.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.01 dB
4.4	15.407(a)	Power Spectral Density	Complies	2.45 dB
4.5	15.407(a)	Peak Excursion	Complies	3.62 dB
4.6	15.407(b)	Radiated Emissions	Complies	1.12 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.21 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN
Radio Type	Intentional Transceiver
Power Type	From Adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	11a: 19
Channel Band Width (99%)	11a: 17.56MHz
Conducted Output Power	Band 1: 16.07 dBm ; Band 2: 17.05 dBm ; Band 3: 16.71 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)		Two (TX)	
Band width Mode	20 MHz	40 MHz	20 MHz	40 MHz
802.11a	X	X	V	X


3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	NETGEAR	DSA-20P-10 US 120180	Input: 100-240VAC, 50/60Hz, 0.7A Output: 12VDC, 1.5A
Adapter 2	NETGEAR	MU18-2120150-A1	Input: 100-240VAC, 50/60Hz, 0.6A Output: 12VDC, 1.5A

3.3. Table for Filed Antenna

For 5GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
3	-	-	Printed Antenna	NA	6.92	TX / RX Ant.
4	-	-	Printed Antenna	NA	6.50	RX Ant.
5	-	-	Printed Antenna	NA	6.92	TX / RX Ant.

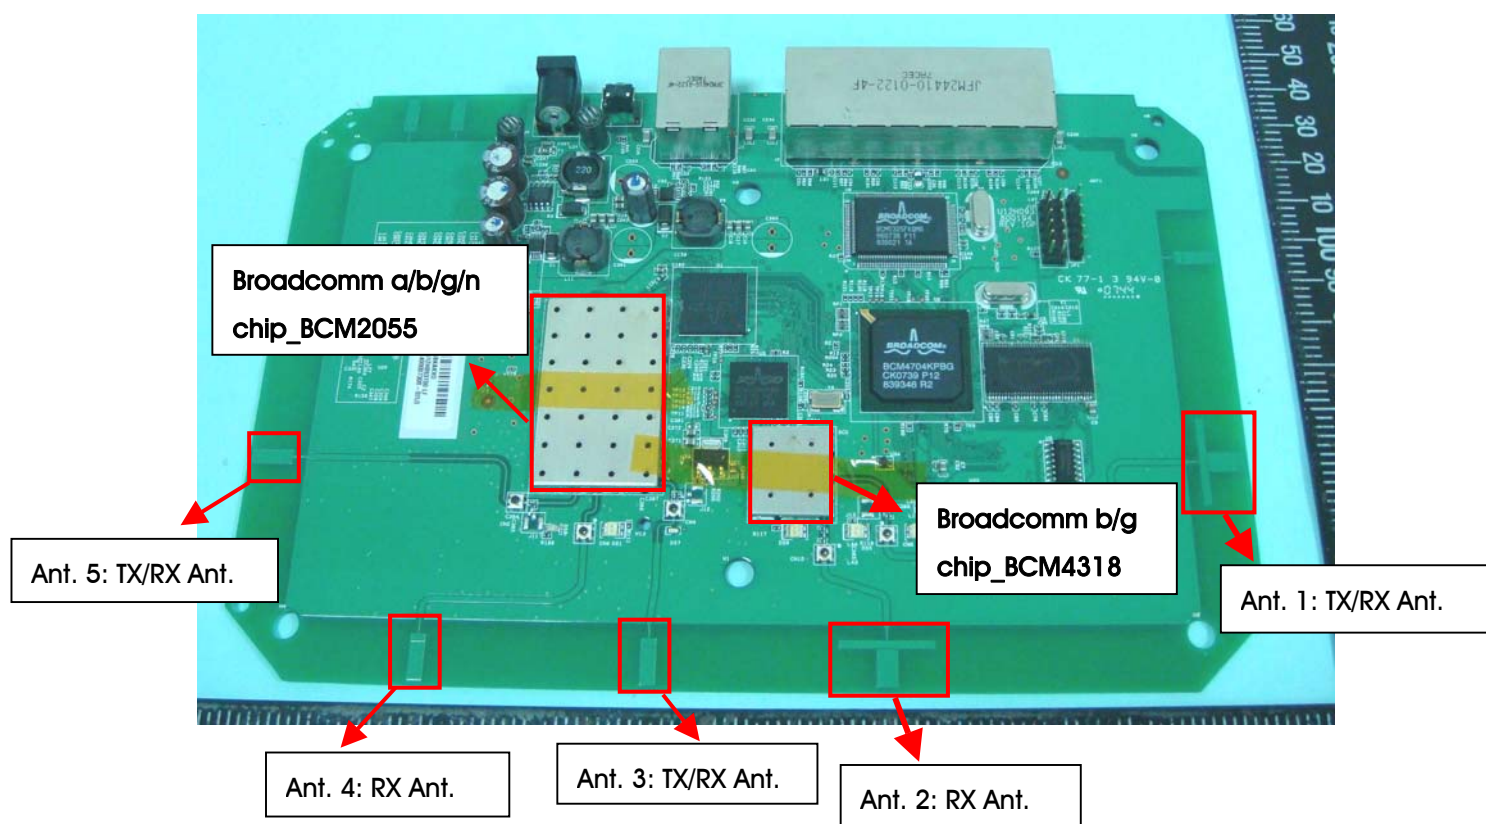

3.4. Table for Carrier Frequencies

Frequency Allocation for 802.11a

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	40	5200 MHz	48	5240 MHz
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	56	5280 MHz	64	5320 MHz
5470~5725 MHz Band 3	100	5500 MHz	124	5620 MHz
	104	5520 MHz	128	5640 MHz
	108	5540 MHz	132	5660 MHz
	112	5560 MHz	136	5680 MHz
	116	5580 MHz	140	5700 MHz
	120	5600 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link / Mode 2	Auto	-	-
Max. Conducted Output Power	Band 1/BPSK	6Mbps	36/40/48	3/5/3+5
	Band 2/BPSK	6Mbps	52/60/64	3/5/3+5
	Band 3/BPSK	6Mbps	100/120/140	3/5/3+5
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Power Spectral Density Peak Excursion	Band 1/BPSK	6Mbps	36/40/48	3+5
	Band 2/BPSK	6Mbps	52/60/64	3+5
	Band 3/BPSK	6Mbps	100/120/140	3+5
Radiated Emission Below 1GHz	Normal Link / Mode 2	Auto	-	-
Radiated Emission Above 1GHz	Band 1/BPSK	6Mbps	36/40/48	3+5
	Band 2/BPSK	6Mbps	52/60/64	3+5
	Band 3/BPSK	6Mbps	100/120/140	3+5
Band Edge Emission	Band 1/BPSK	6Mbps	36/48	3+5
	Band 2/BPSK	6Mbps	52/64	3+5
	Band 3/BPSK	6Mbps	100/140	3+5
Frequency Stability	Un-modulation	-	40/60	N/A

There have two test mode below:

Mode 1: Broadcomm a/b/g/n chip_BCM2055+Adapter 1

Mode 2: Broadcomm a/b/g/n chip_BCM2055+Adapter 2

Due to Mode 2 generated the worst test result, so it was recorded in this report.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D505	E2K24GBRL
Notebook	DELL	D505	E2K24GBRL
Notebook	DELL	D400	E2K24GBRL

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.


Power Parameters of IEEE 802.11a

Test Software Version	Telnet		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a	3c4b	3c4a	434f
Frequency	5260 MHz	5300 MHz	5320 MHz
IEEE 802.11a	3744	3a45	3a47
Frequency	5500 MHz	5600 MHz	5700 MHz
IEEE 802.11a	464c	4448	3a40


3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration


Test Configuration: 9KHz~1GHz

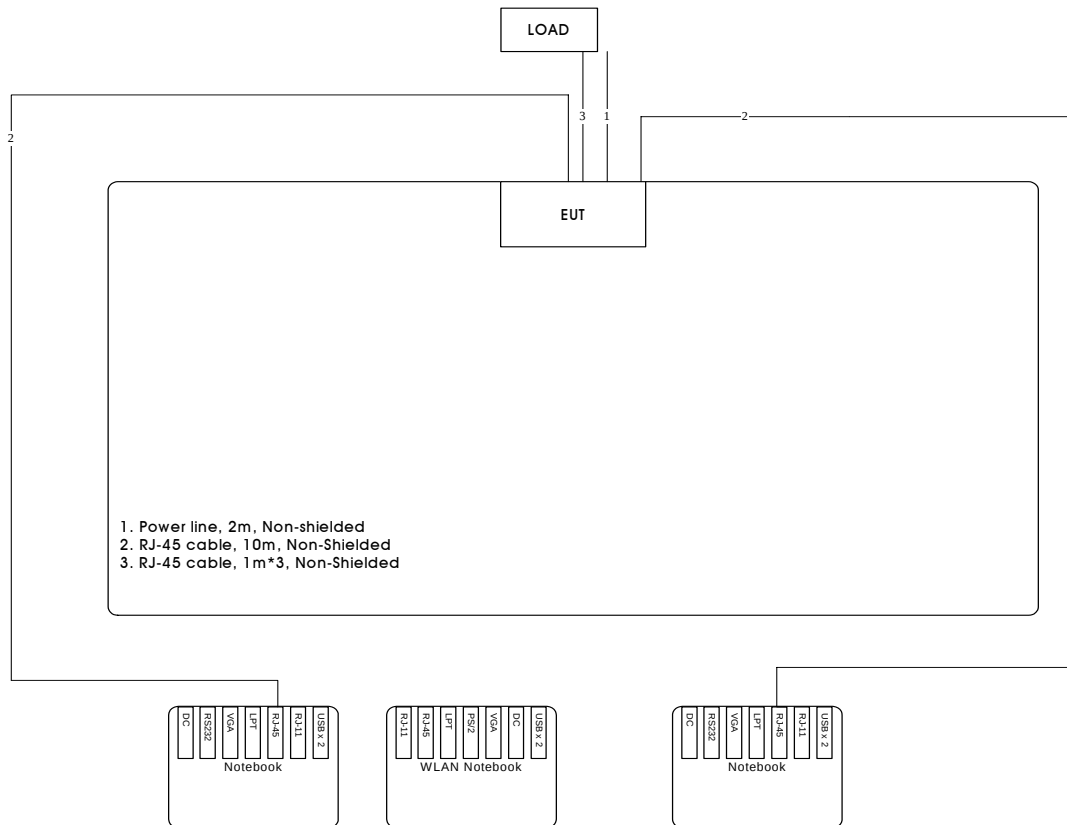

Test Configuration: above 1GHz

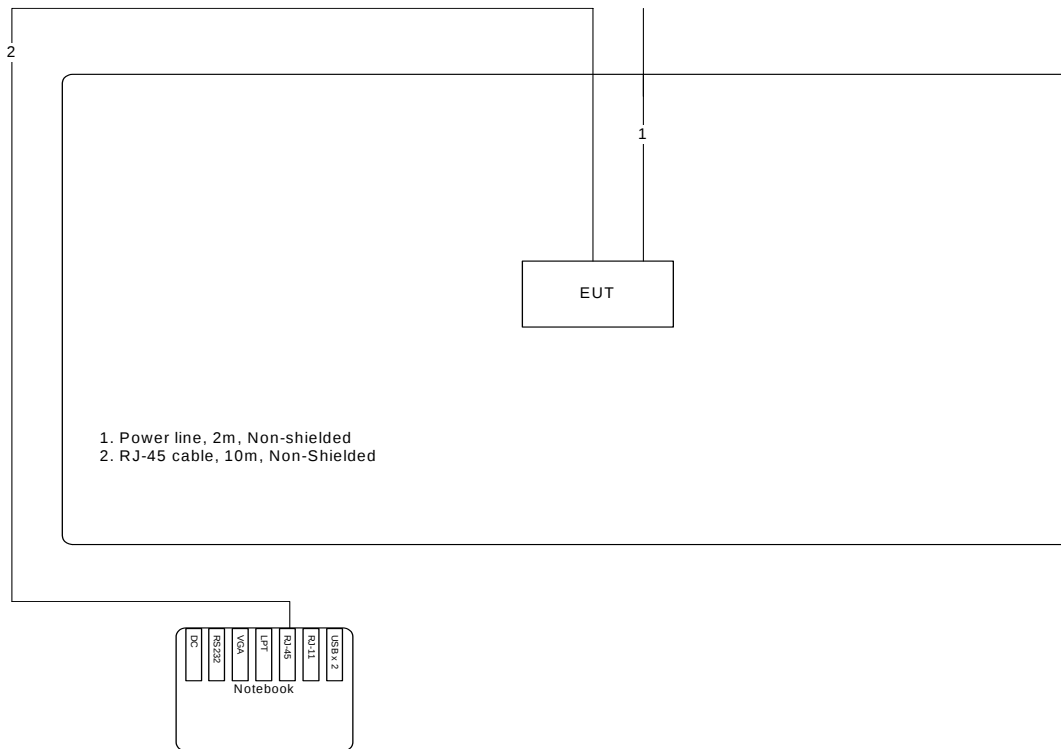

3.9.2. AC Power Line Conduction Emissions Test Configuration

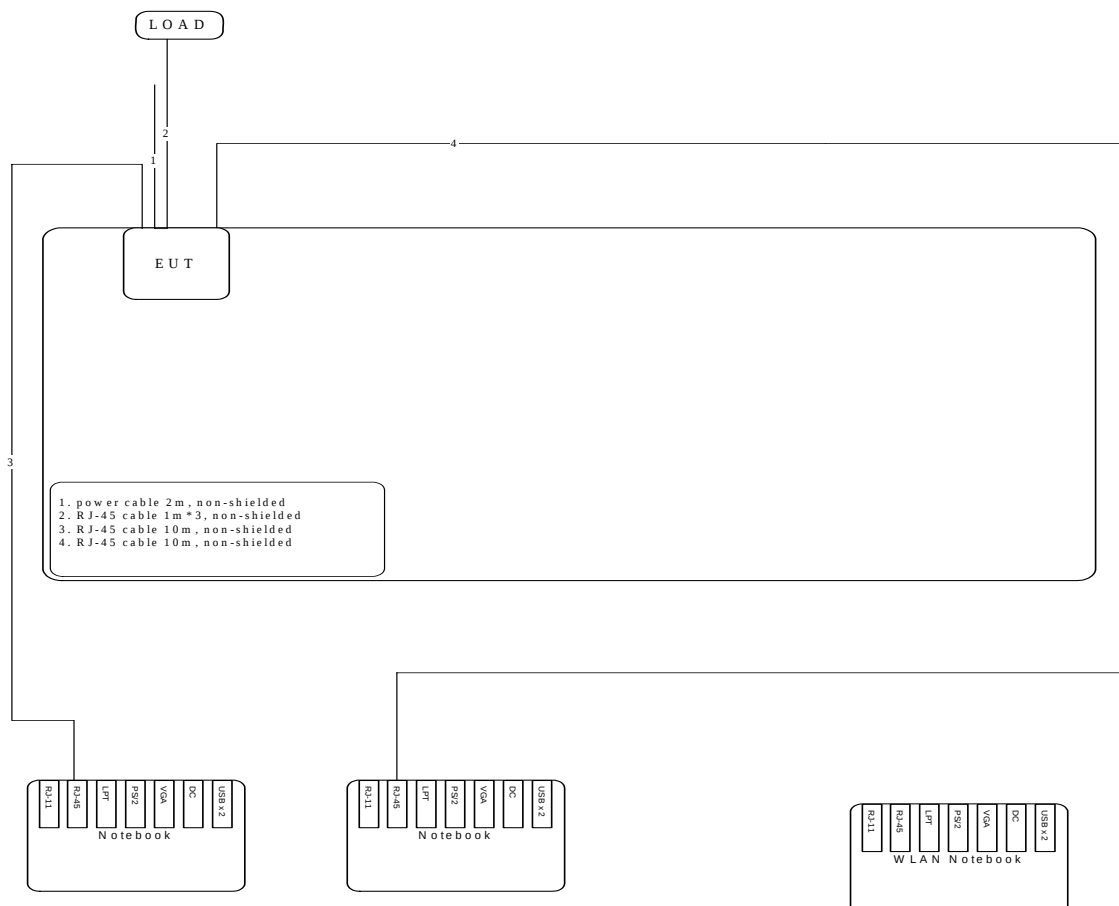

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

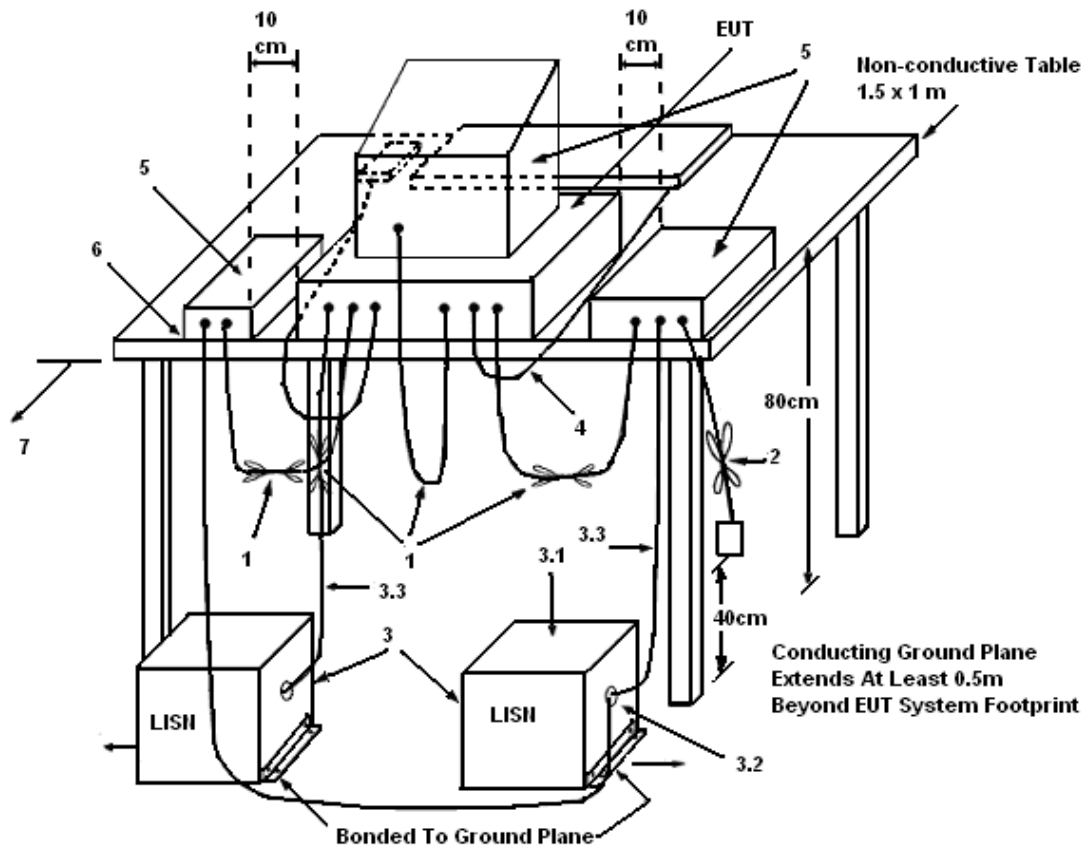

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Phase	Line
Configuration	Normal Link		

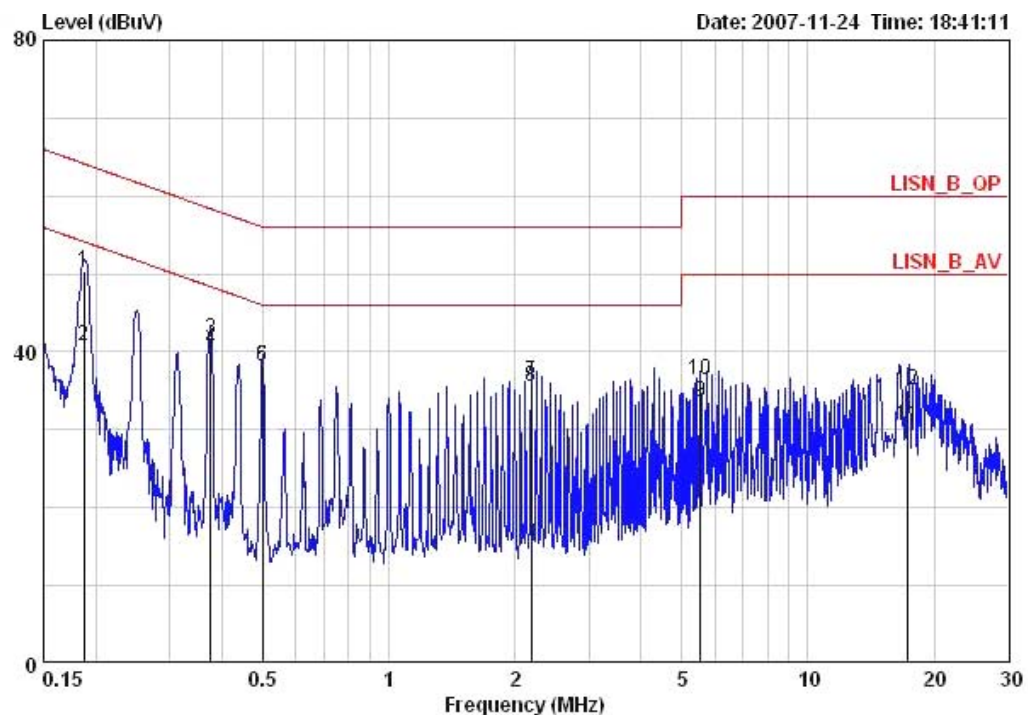

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.18699	50.37	-13.80	64.17	50.02	0.15	0.20	QP	LINE
2	0.18699	40.77	-13.40	54.17	40.42	0.15	0.20	AVERAGE	LINE
3	0.37512	41.63	-16.76	58.39	41.33	0.10	0.20	QP	LINE
4	0.37512	40.43	-7.96	48.39	40.13	0.10	0.20	AVERAGE	LINE
5	0.49897	38.20	-17.82	56.02	37.92	0.08	0.20	QP	LINE
6	0.49897	38.17	-7.85	46.02	37.89	0.08	0.20	AVERAGE	LINE
7	2.184	36.20	-19.80	56.00	36.00	0.00	0.20	QP	LINE
8	2.184	35.52	-10.48	46.00	35.32	0.00	0.20	AVERAGE	LINE
9	5.553	33.56	-16.44	50.00	33.23	0.03	0.30	AVERAGE	LINE
10	5.553	36.47	-23.53	60.00	36.14	0.03	0.30	QP	LINE
11	17.286	30.50	-19.50	50.00	29.90	0.10	0.50	AVERAGE	LINE
12	17.286	35.20	-24.80	60.00	34.60	0.10	0.50	QP	LINE

Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Phase	Neutral
Configuration	Normal Link		

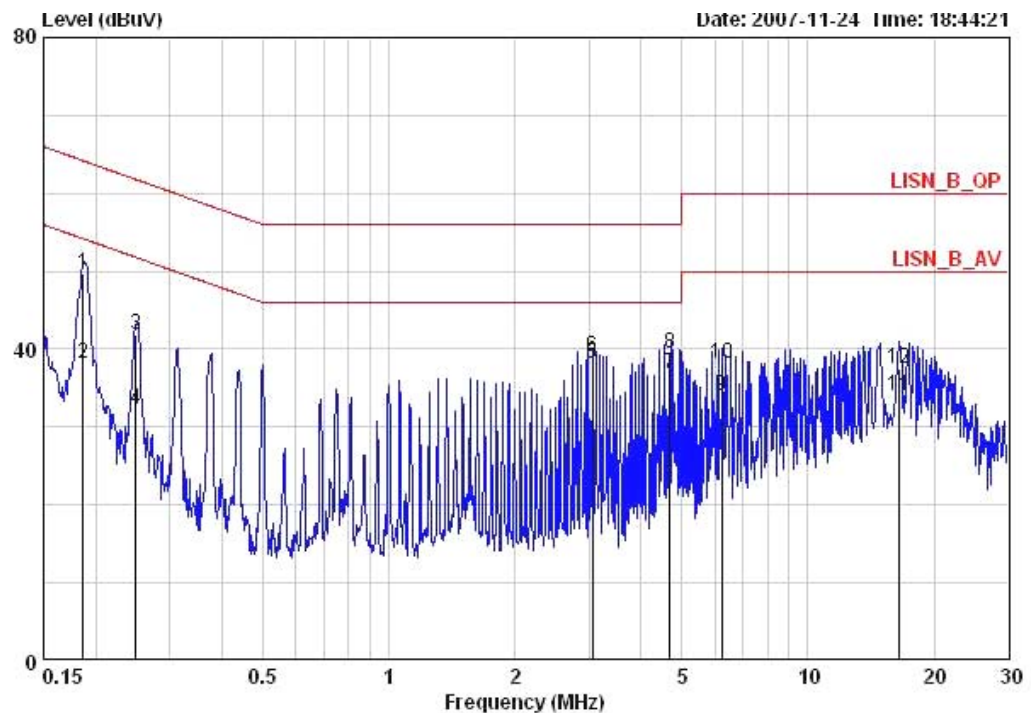

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1 ☐	0.18659	49.63	-14.56	64.19	49.18	0.25	0.20	QP	NEUTRAL
2 ☐	0.18659	38.16	-16.03	54.19	37.71	0.25	0.20	AVERAGE	NEUTRAL
3	0.24958	41.79	-19.98	61.77	41.41	0.18	0.20	QP	NEUTRAL
4	0.24958	32.23	-19.54	51.77	31.85	0.18	0.20	AVERAGE	NEUTRAL
5 ☐	3.058	38.19	-7.81	46.00	37.88	0.10	0.21	AVERAGE	NEUTRAL
6 ☐	3.058	38.97	-17.03	56.00	38.66	0.10	0.21	QP	NEUTRAL
7 ☐	4.680	36.79	-9.21	46.00	36.39	0.10	0.30	AVERAGE	NEUTRAL
8 ☐	4.680	39.50	-16.50	56.00	39.10	0.10	0.30	QP	NEUTRAL
9 ☐	6.238	34.05	-15.95	50.00	33.60	0.10	0.35	AVERAGE	NEUTRAL
10	6.238	38.06	-21.94	60.00	37.61	0.10	0.35	QP	NEUTRAL
11 ☐	16.471	33.94	-16.06	50.00	33.44	0.10	0.40	AVERAGE	NEUTRAL
12	16.471	37.43	-22.57	60.00	36.93	0.10	0.40	QP	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.
4. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

4.2.4. Test Setup Layout

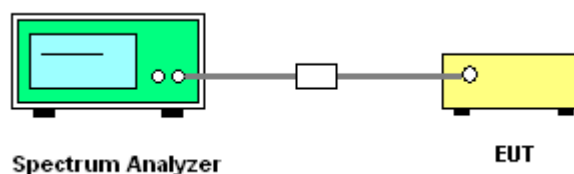

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.2.7. Test Result of 99% Occupied Bandwidth

Temperature	23°C	Humidity	56%
Test Engineer	Barry Chen	Configurations	802.11a

Configuration IEEE 802.11a Ant. 3 + Ant. 5


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	22.05	17.56
40	5200 MHz	22.05	17.56
48	5240 MHz	22.05	17.56
52	5260 MHz	19.35	16.53
60	5300 MHz	19.48	16.53
64	5320 MHz	19.23	16.53
100	5500 MHz	19.23	16.53
120	5600 MHz	19.35	16.53
140	5700 MHz	21.41	16.53

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5180 MHz

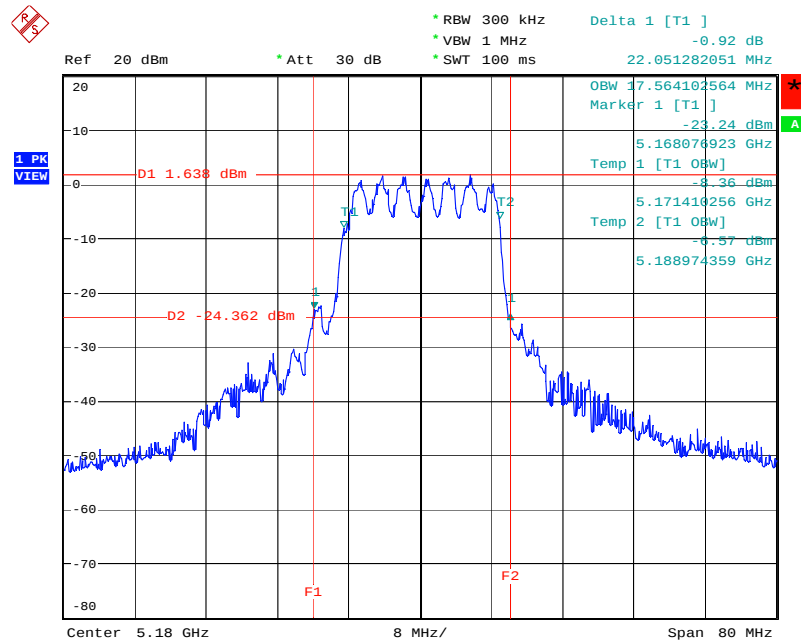


Date: 11.DEC.2007 14:44:45

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5200 MHz

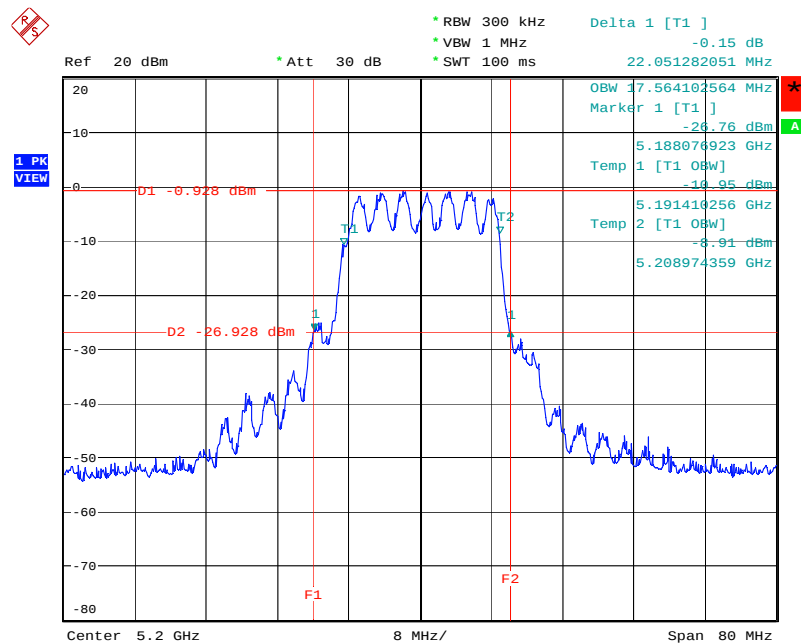


Date: 11.DEC.2007 14:46:13

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5240 MHz

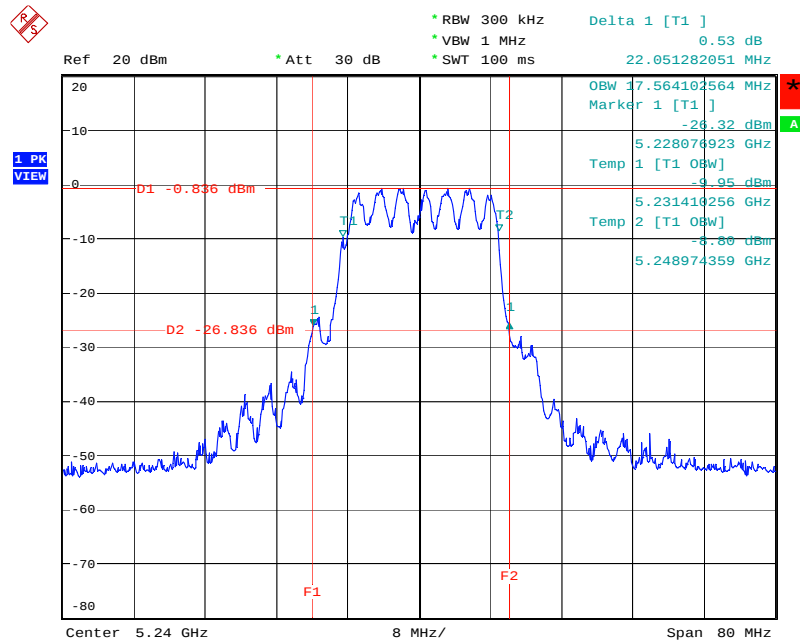


Date: 11.DEC.2007 14:47:49

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5260 MHz

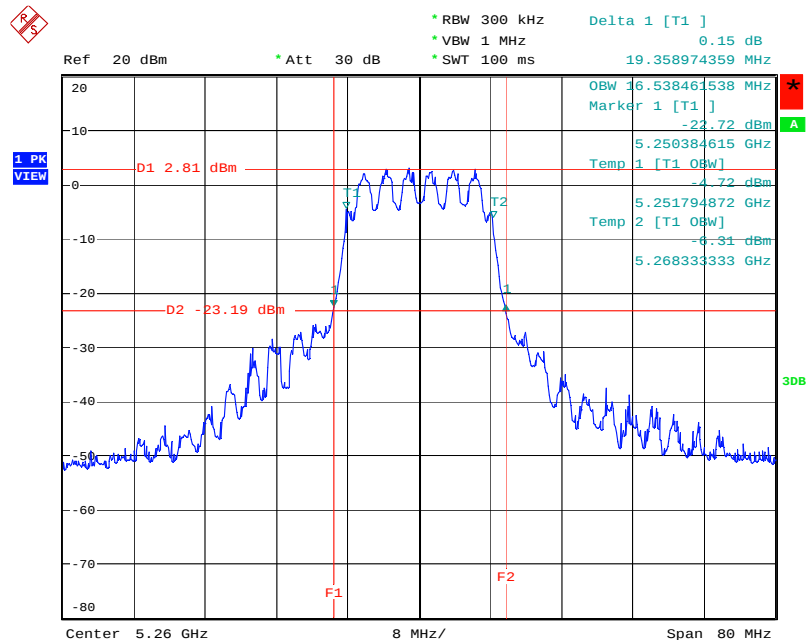


Date: 20.JAN.2008 00:55:35

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5300 MHz

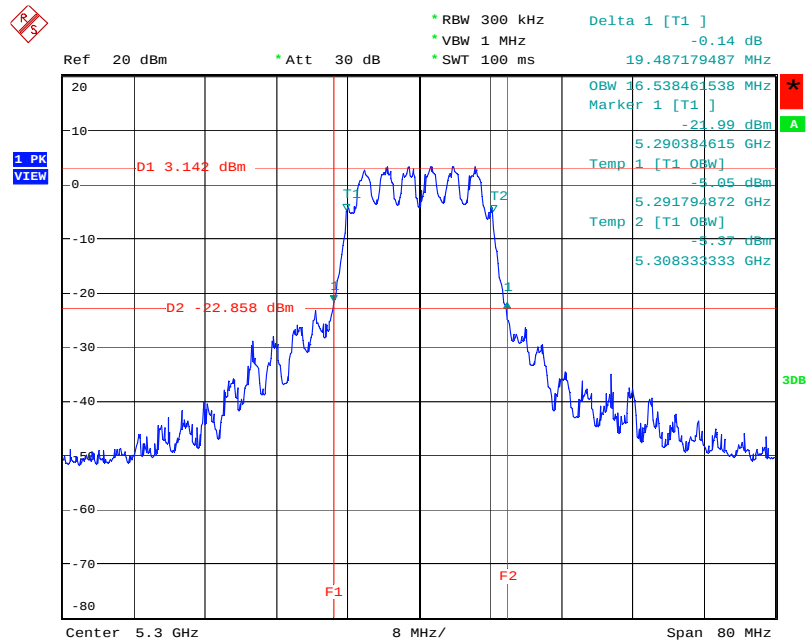


Date: 20.JAN.2008 00:52:45

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5320 MHz

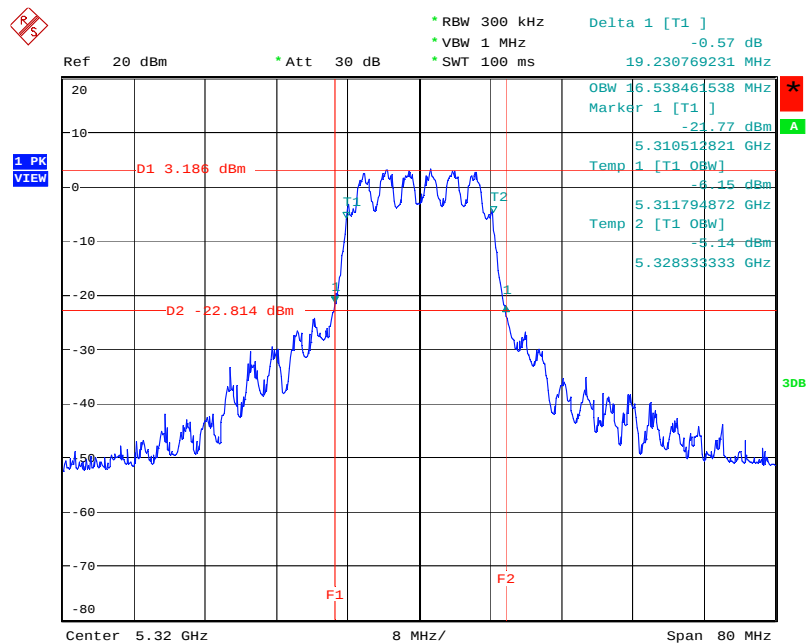


Date: 20.JAN.2008 00:49:04

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5500 MHz

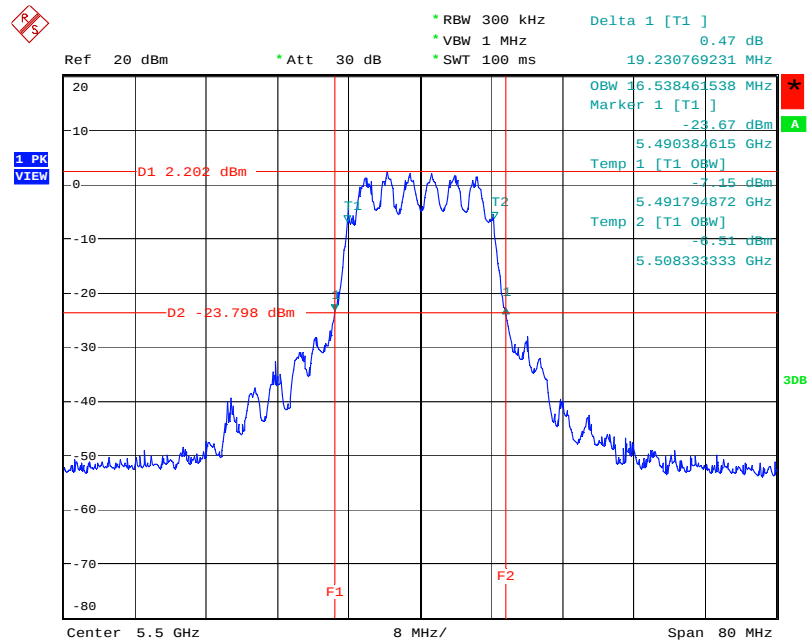


Date: 20.JAN.2008 00:43:52

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5600 MHz

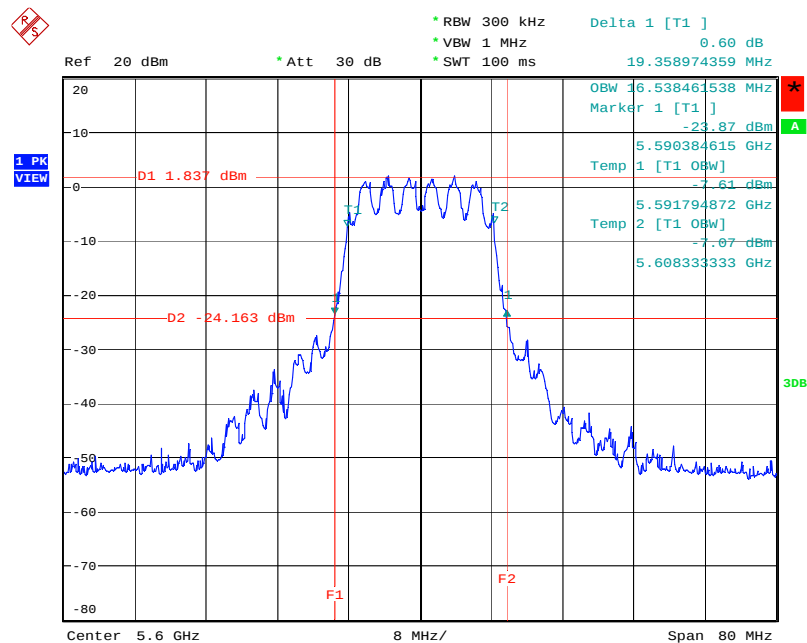

Date: 20.JAN.2008 00:41:10

26 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5700 MHz

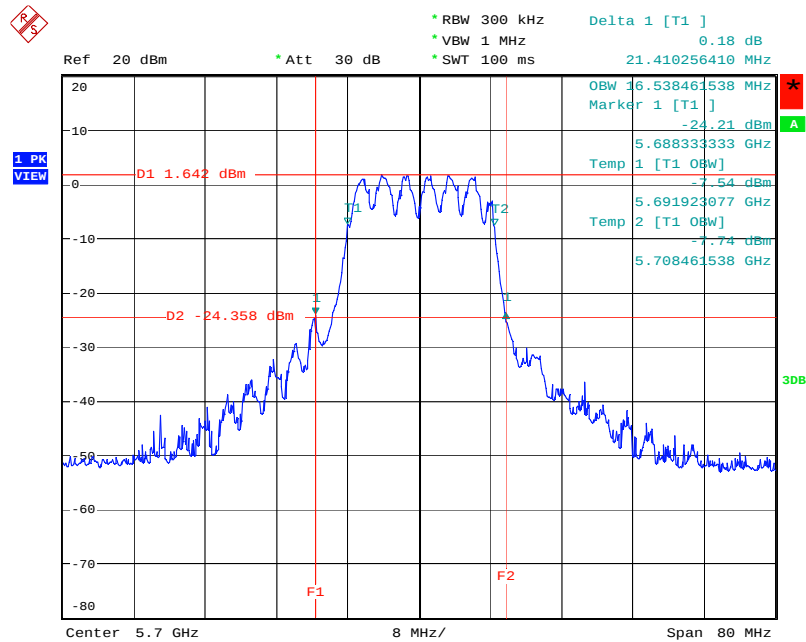

Date: 20.JAN.2008 01:45:28

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or $11 \text{ dBm} + 10\log B$. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W (30dBm) or $17 \text{ dBm} + 10\log B$. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power and peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	rms
Trace	MAX HOLD
Sweep Time	500ms

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with FCC Public Notice DA 02-2138, August 30, 2002.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

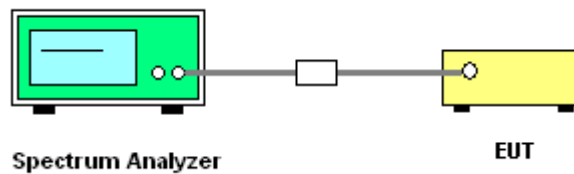

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	70%
Test Engineer	Sam Lee	Configurations	802.11a

Configuration IEEE 802.11a Ant. 3

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.19	16.08	Complies
40	5200 MHz	13.12	16.08	Complies
48	5240 MHz	12.89	16.08	Complies
52	5260 MHz	16.47	23.08	Complies
60	5300 MHz	16.67	23.08	Complies
64	5320 MHz	17.05	23.08	Complies
100	5500 MHz	16.71	23.08	Complies
120	5600 MHz	16.60	23.08	Complies
140	5700 MHz	16.63	23.08	Complies


Configuration IEEE 802.11a Ant. 5

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	12.93	16.08	Complies
40	5200 MHz	12.99	16.08	Complies
48	5240 MHz	13.10	16.08	Complies
52	5260 MHz	16.66	23.08	Complies
60	5300 MHz	16.77	23.08	Complies
64	5320 MHz	16.69	23.08	Complies
100	5500 MHz	16.87	23.08	Complies
120	5600 MHz	16.57	23.08	Complies
140	5700 MHz	16.87	23.08	Complies

Configuration IEEE 802.11a Ant. 3 + Ant. 5


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	16.07	16.08	Complies
40	5200 MHz	16.07	16.08	Complies
48	5240 MHz	16.01	16.08	Complies
52	5260 MHz	19.58	23.08	Complies
60	5300 MHz	19.73	23.08	Complies
64	5320 MHz	19.88	23.08	Complies
100	5500 MHz	19.80	23.08	Complies
120	5600 MHz	19.60	23.08	Complies
140	5700 MHz	19.76	23.08	Complies

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3 / 5180 MHz

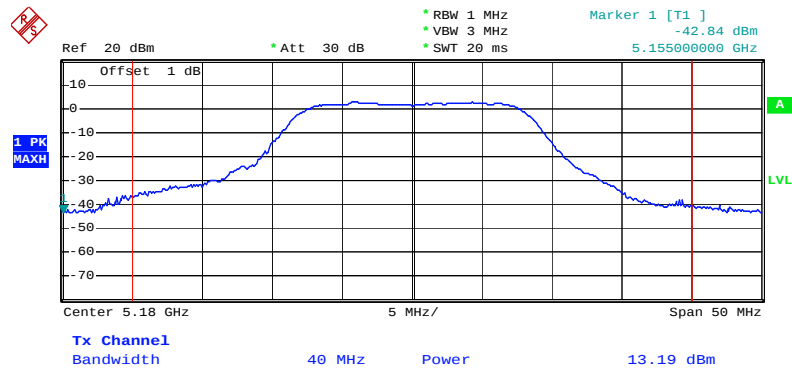


Date: 27.DEC.2007 03:06:31

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 5 / 5180 MHz

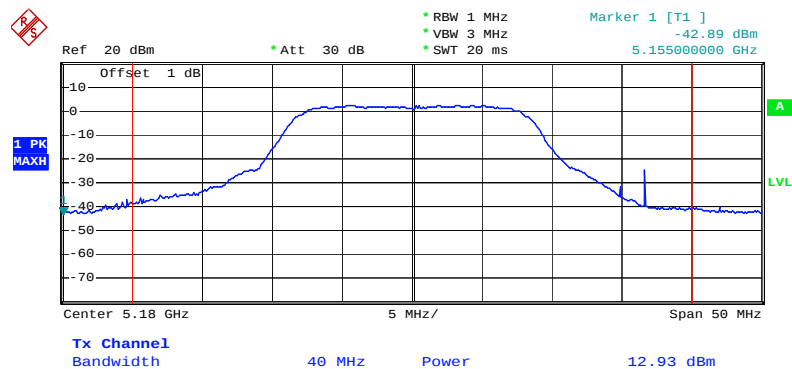


Date: 27.DEC.2007 03:09:17

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3 / 5200 MHz

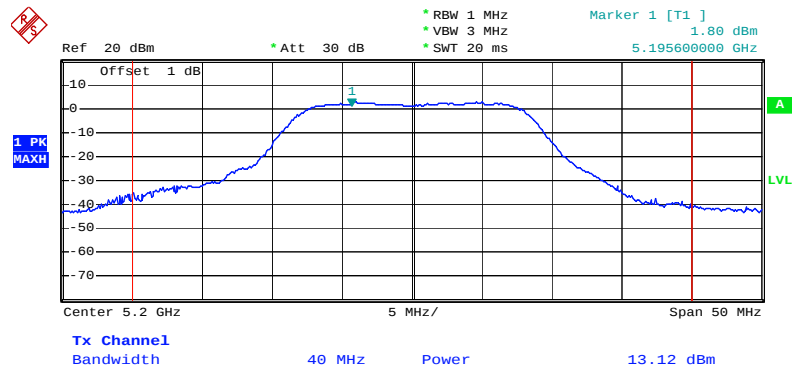


Date: 27.DEC.2007 03:15:57

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 5 / 5200 MHz

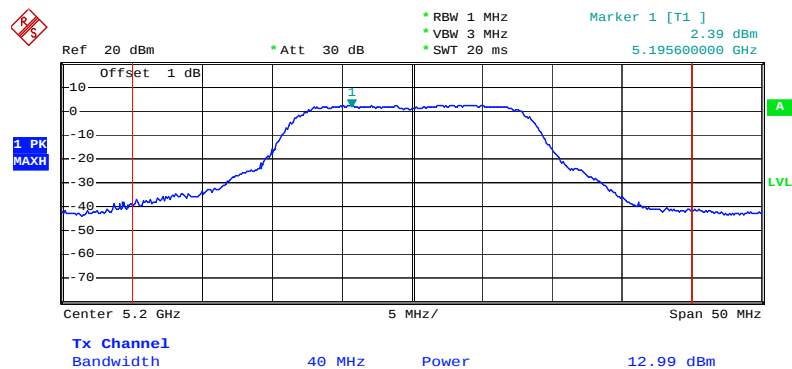


Date: 27.DEC.2007 03:15:15

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3 / 5240 MHz

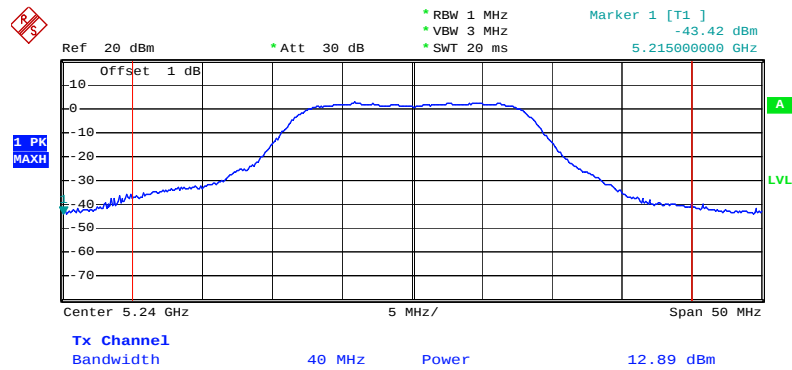


Date: 27.DEC.2007 03:32:21

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 5 / 5240 MHz

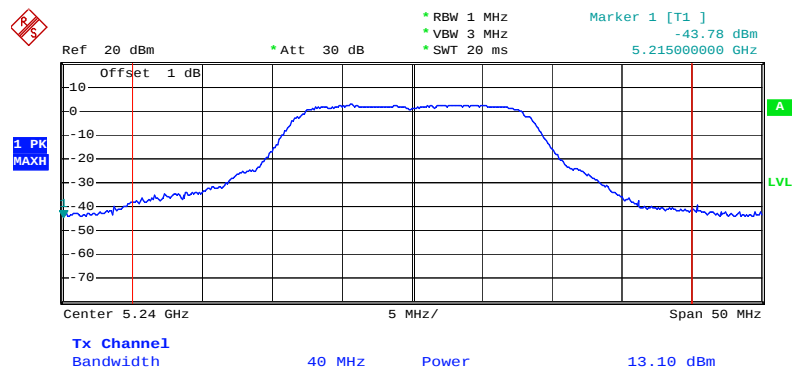


Date: 27.DEC.2007 03:29:51

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3 / 5260 MHz

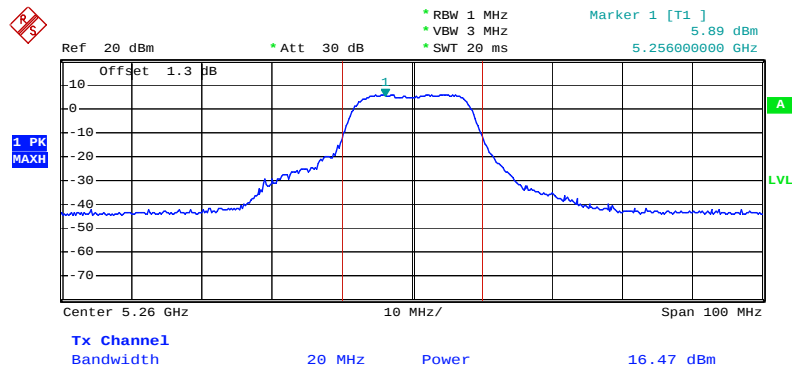


Date: 28.JAN.2008 12:40:26

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 5 / 5260 MHz

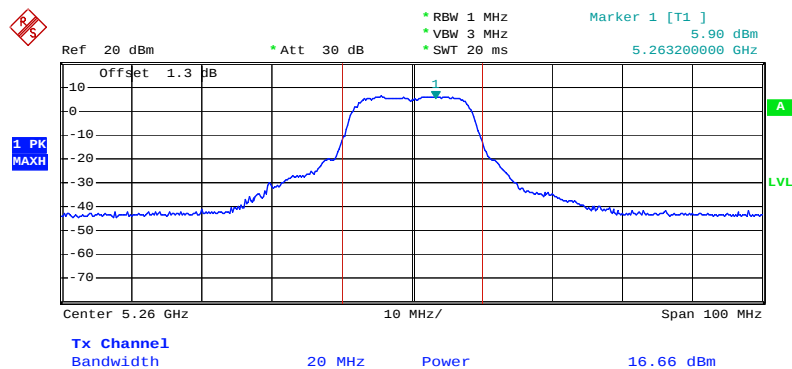


Date: 28.JAN.2008 12:43:12

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3 / 5300 MHz

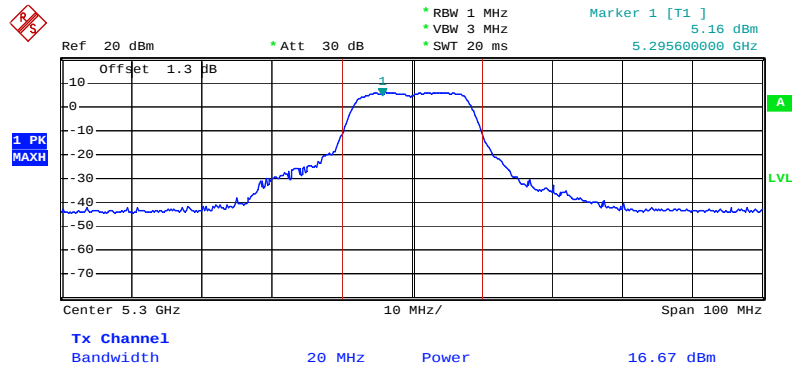


Date: 28.JAN.2008 12:48:40

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 5 / 5300 MHz

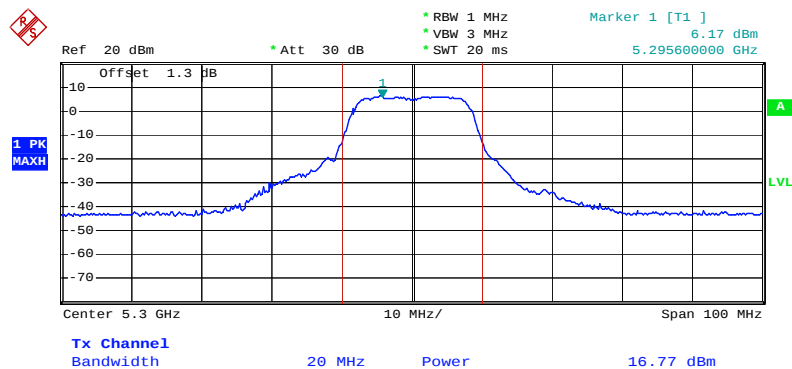


Date: 28.JAN.2008 12:49:23

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3 / 5320 MHz

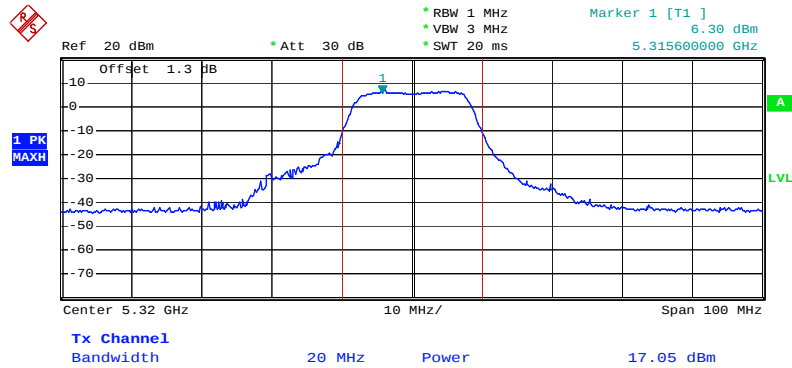


Date: 28.JAN.2008 12:55:02

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 5 / 5320 MHz

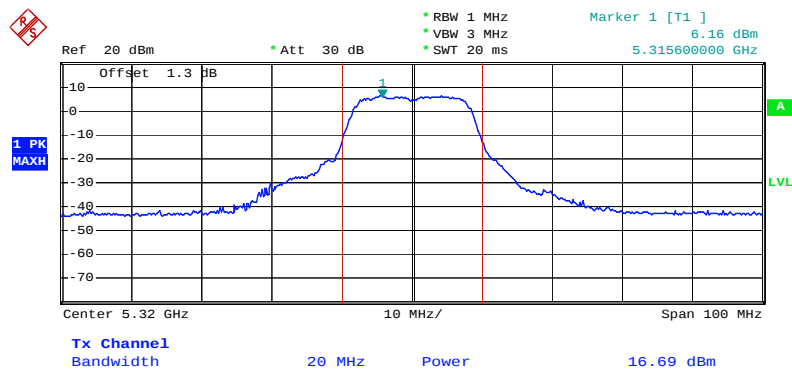


Date: 28.JAN.2008 12:52:44

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3 / 5500 MHz

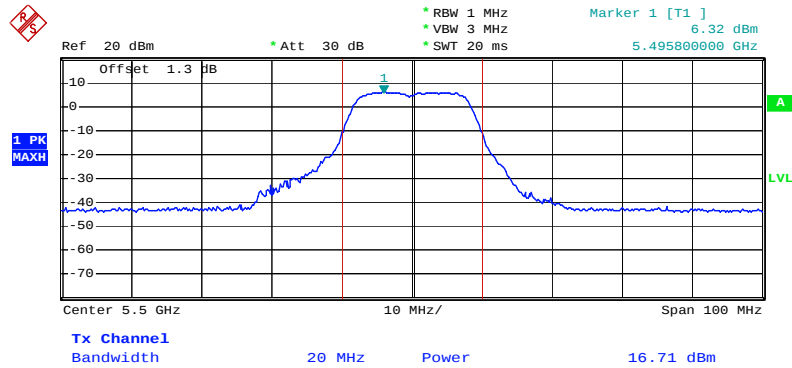


Date: 28.JAN.2008 13:04:54

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 5 / 5500 MHz

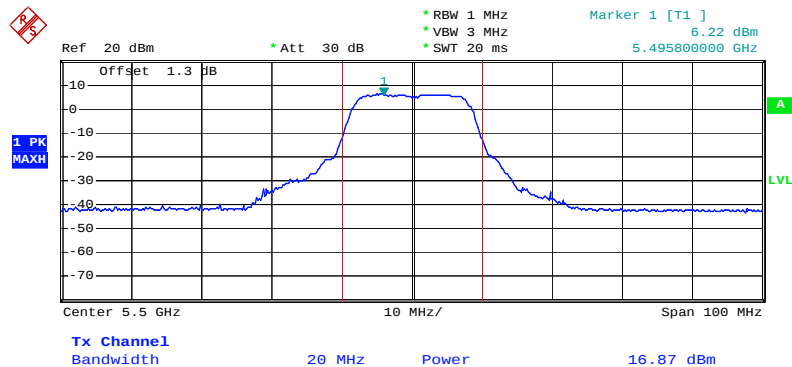


Date: 28.JAN.2008 13:06:28

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3 / 5600 MHz

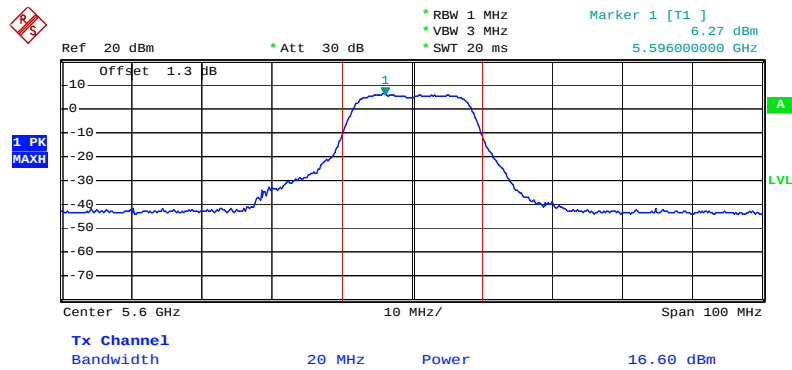


Date: 28.JAN.2008 13:14:53

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 5 / 5600 MHz

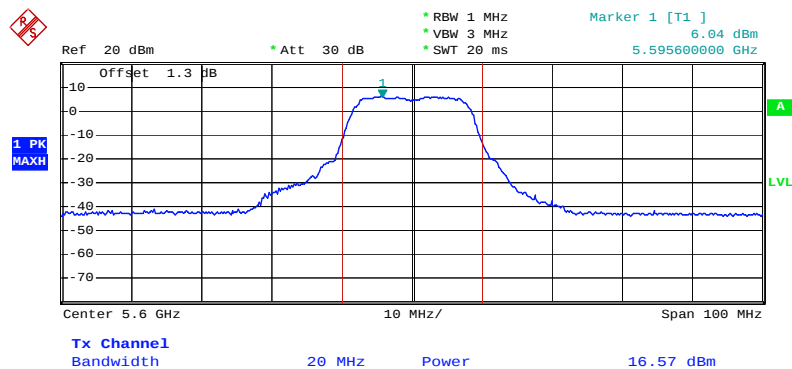


Date: 28.JAN.2008 13:13:18

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 3 / 5700 MHz

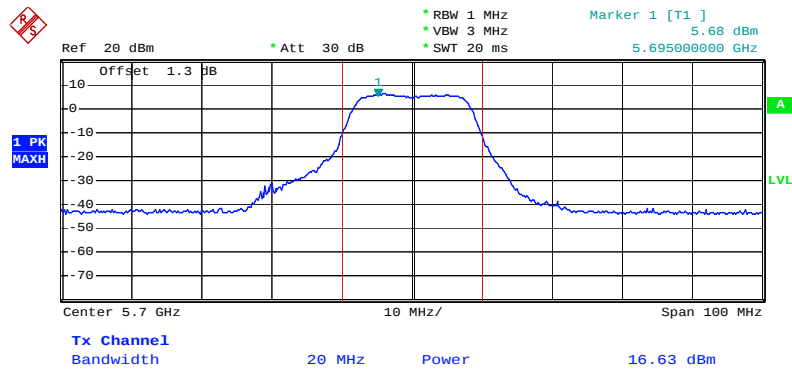

Date: 28.JAN.2008 13:17:53

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 5 / 5700 MHz

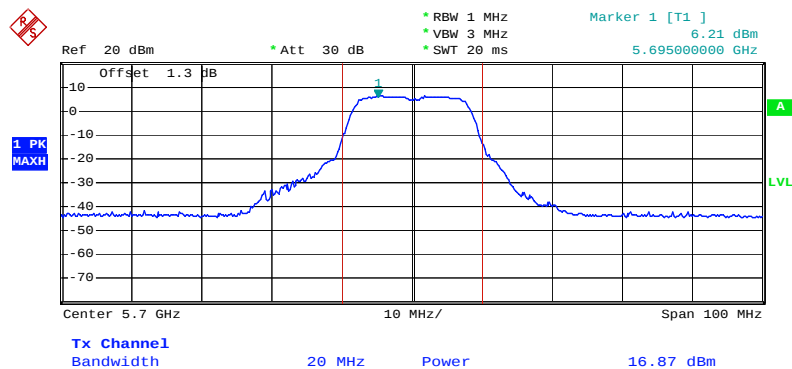

Date: 28.JAN.2008 13:17:18

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4
5.25-5.35 GHz	11
5470-5725	11

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.
3. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

4.4.4. Test Setup Layout

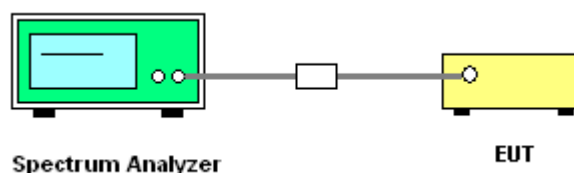

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.4.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	56%
Test Engineer	Barry Chen	Configurations	802.11a

Configuration IEEE 802.11a Ant. 3 + Ant. 5


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	1.55	4.00	Complies
40	5200 MHz	0.30	11.00	Complies
48	5240 MHz	0.09	11.00	Complies
52	5260 MHz	1.88	11.00	Complies
60	5300 MHz	2.48	11.00	Complies
64	5320 MHz	3.14	11.00	Complies
100	5500 MHz	1.00	11.00	Complies
120	5600 MHz	1.14	11.00	Complies
140	5700 MHz	1.68	11.00	Complies

Power Density Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5180 MHz

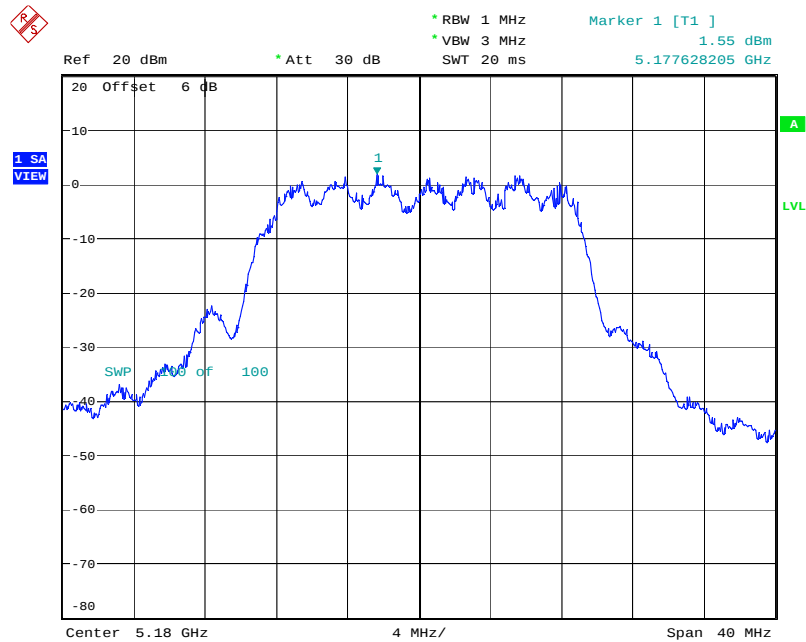


Date: 11.DEC.2007 14:44:52

Power Density Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5200 MHz

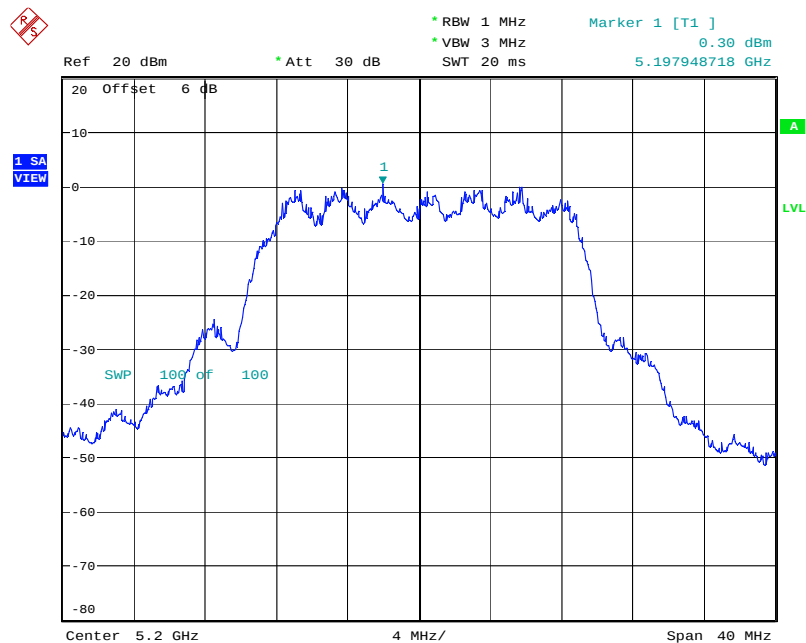


Date: 11.DEC.2007 14:46:20

Power Density Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5240 MHz

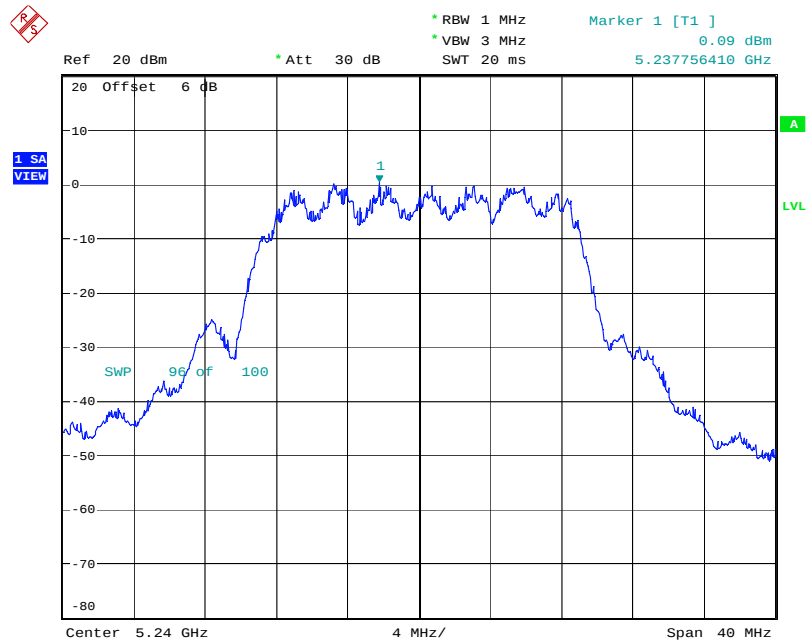


Date: 11.DEC.2007 14:47:56

Power Density Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5260 MHz

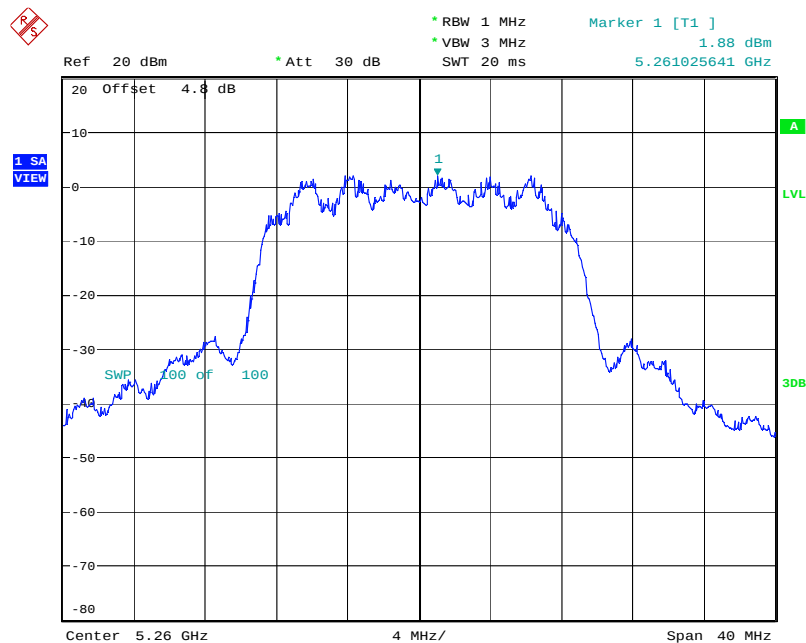


Date: 20.JAN.2008 00:55:42

Power Density Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5300 MHz

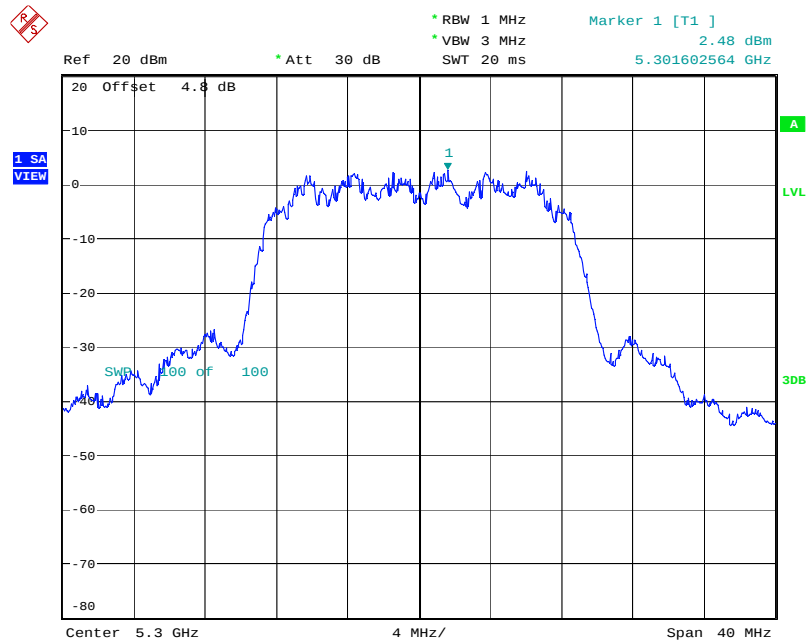


Date: 20.JAN.2008 00:52:52

Power Density Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5320 MHz

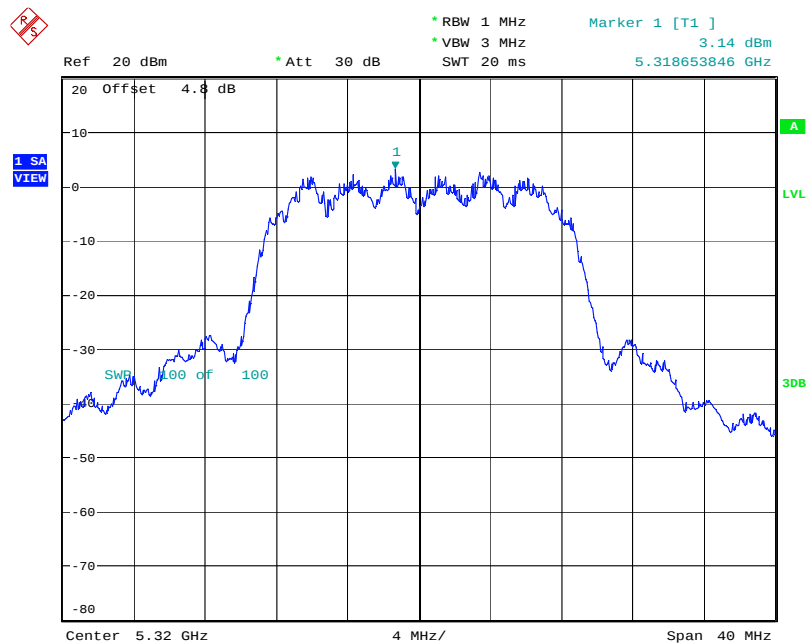


Date: 20.JAN.2008 00:49:11

Power Density Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5500 MHz

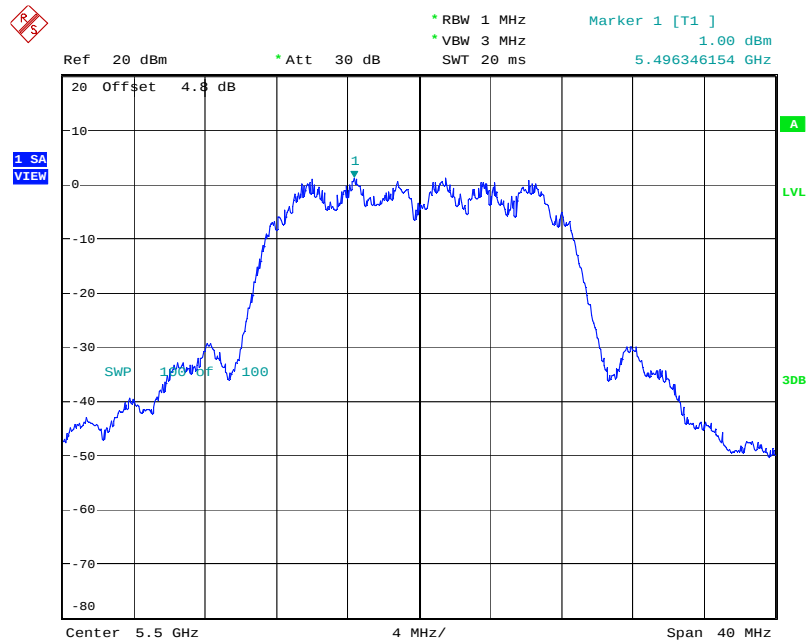


Date: 20.JAN.2008 00:44:00

Power Density Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5600 MHz

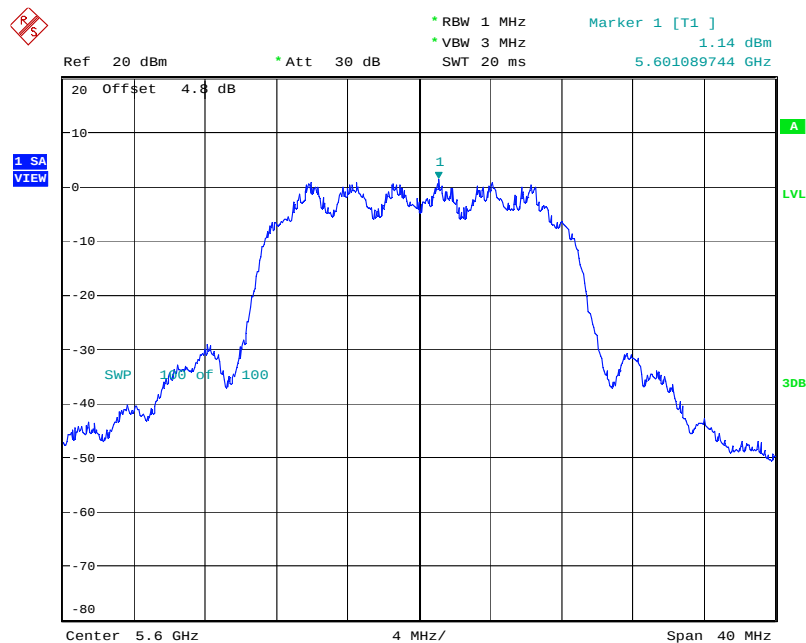

Date: 20.JAN.2008 00:41:18

Power Density Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5700 MHz

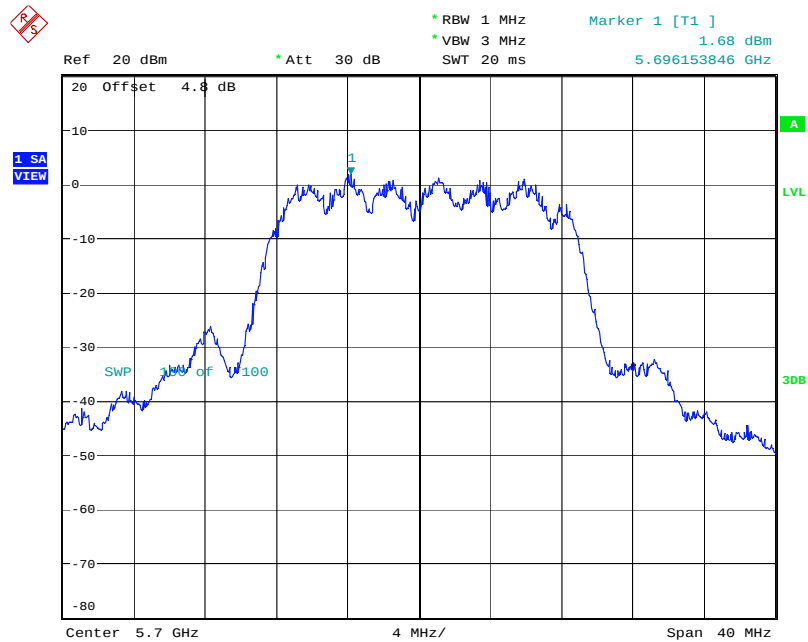

Date: 20.JAN.2008 01:45:36

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be ≤ 13 dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to "free run". Set RBW = 1 MHz. Set VBW $\geq 1/T$ (IEEE 802.11a VBW = 300kHz $\geq 1/4 \mu s$). Use sample detector mode if bin width (i.e., span/number of points in spectrum) < 0.5 RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.
5. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

4.5.4. Test Setup Layout

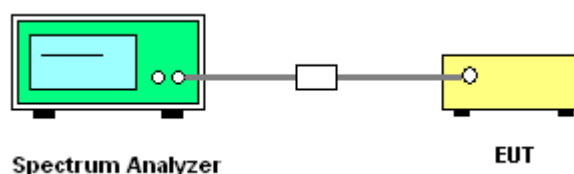

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.5.7. Test Result of Peak Excursion

Temperature	23°C	Humidity	56%
Test Engineer	Barry Chen	Configurations	802.11a

Configuration IEEE 802.11a Ant. 3 + Ant. 5


Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
36	5180 MHz	4.19	13	Complies
40	5200 MHz	4.41	13	Complies
48	5240 MHz	4.55	13	Complies
52	5260 MHz	4.38	13	Complies
60	5300 MHz	4.69	13	Complies
64	5320 MHz	3.62	13	Complies
100	5500 MHz	3.67	13	Complies
120	5600 MHz	4.67	13	Complies
140	5700 MHz	4.69	13	Complies

Peak Excursion Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5180 MHz

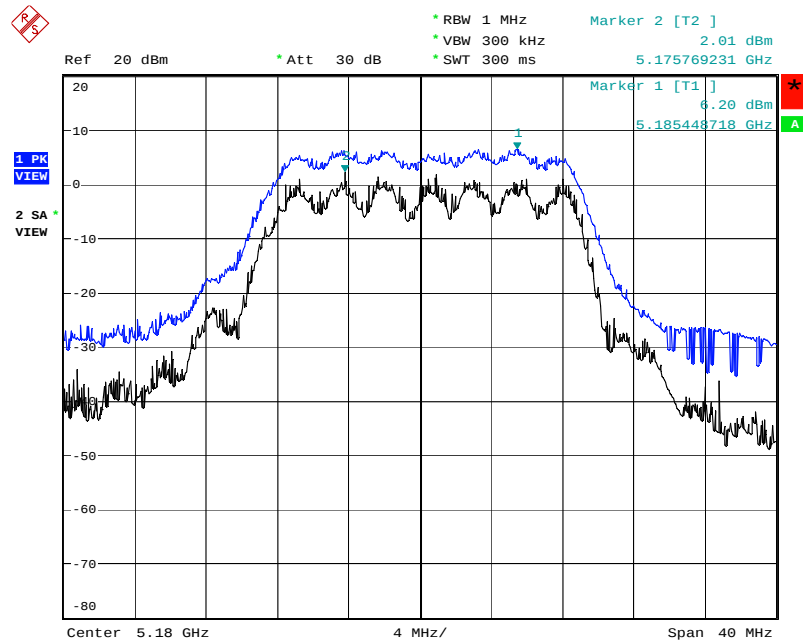


Date: 11.DEC.2007 14:45:39

Peak Excursion Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5200 MHz

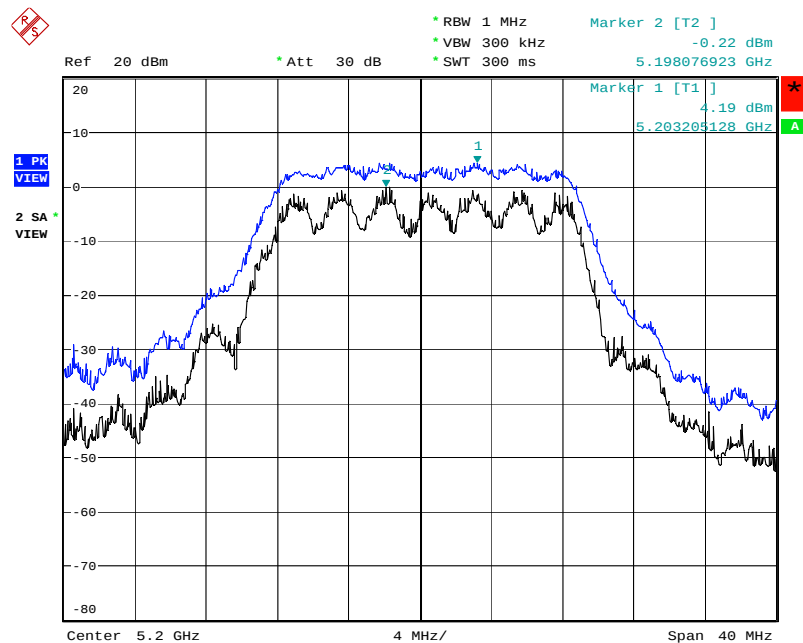


Date: 11.DEC.2007 14:47:07

Peak Excursion Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5240 MHz

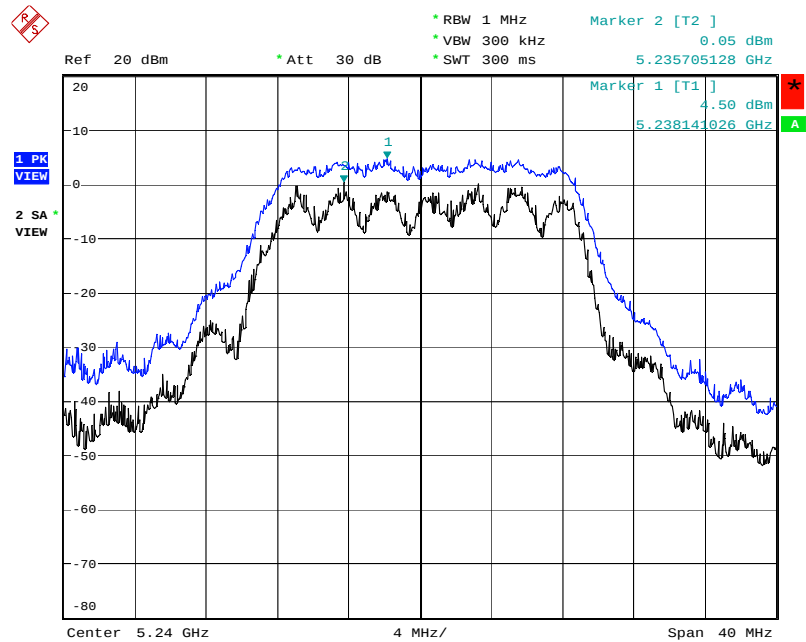


Date: 11.DEC.2007 14:48:44

Peak Excursion Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5260 MHz

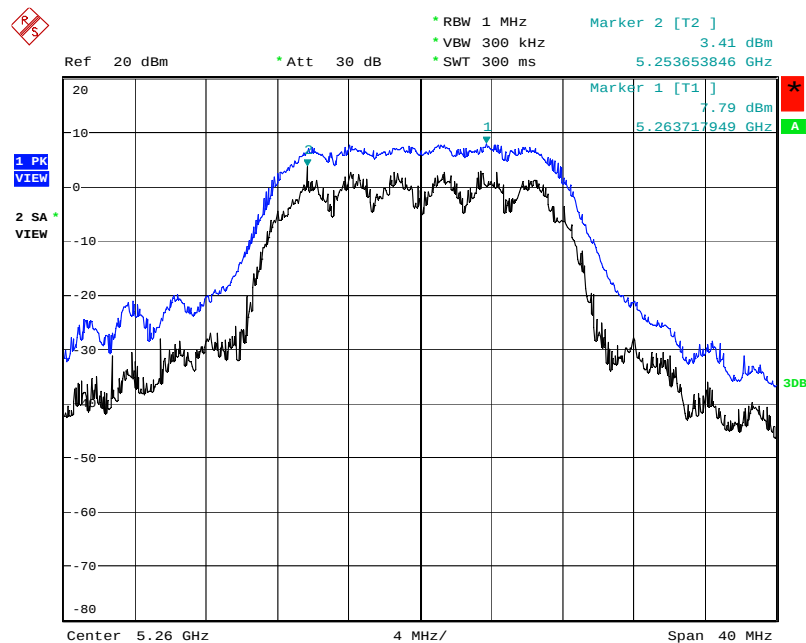


Date: 20.JAN.2008 00:56:27

Peak Excursion Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5300 MHz

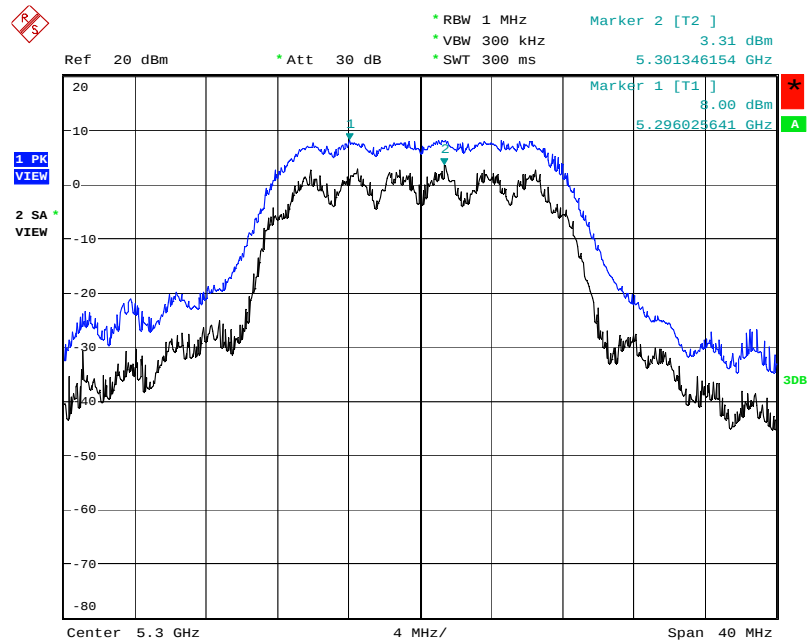


Date: 20.JAN.2008 00:53:37

Peak Excursion Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5320 MHz

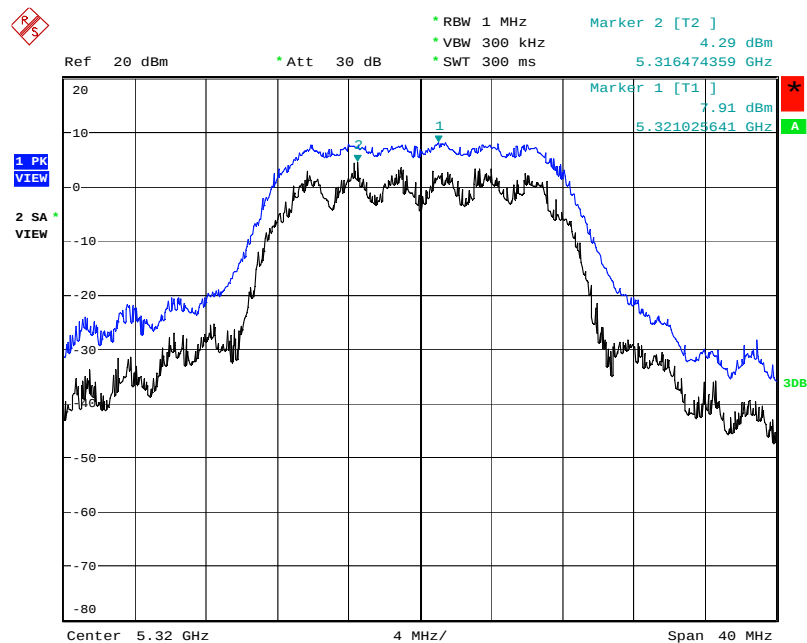


Date: 20.JAN.2008 00:49:57

Peak Excursion Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5500 MHz

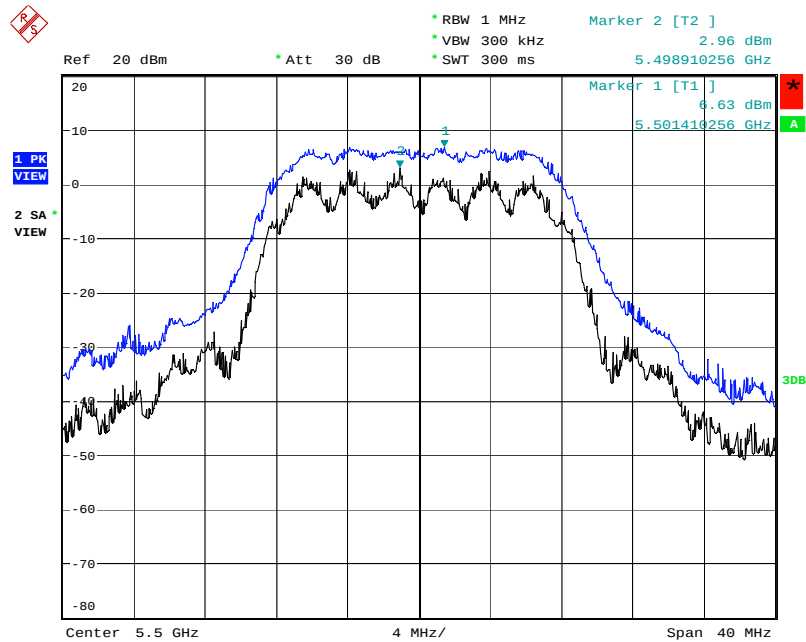


Date: 20.JAN.2008 00:44:47

Peak Excursion Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5600 MHz

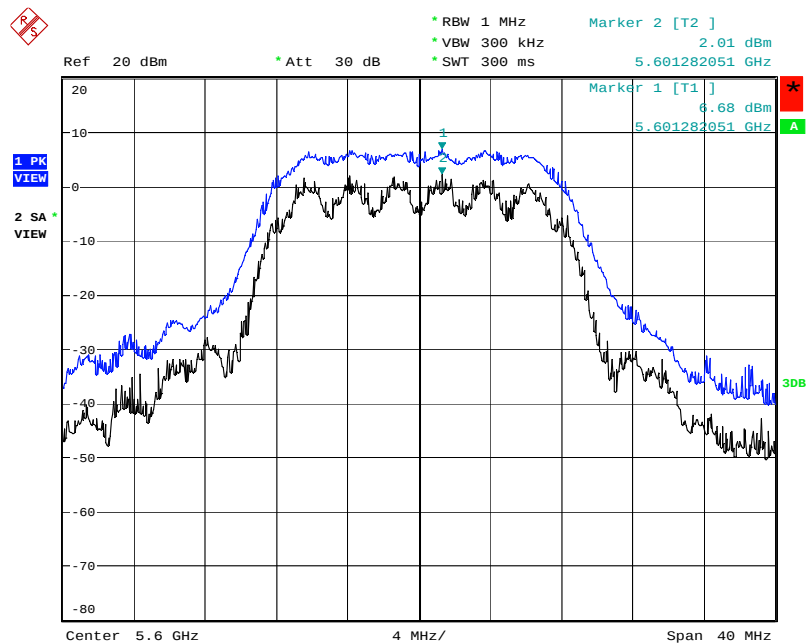

Date: 20.JAN.2008 00:42:05

Peak Excursion Plot on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5700 MHz

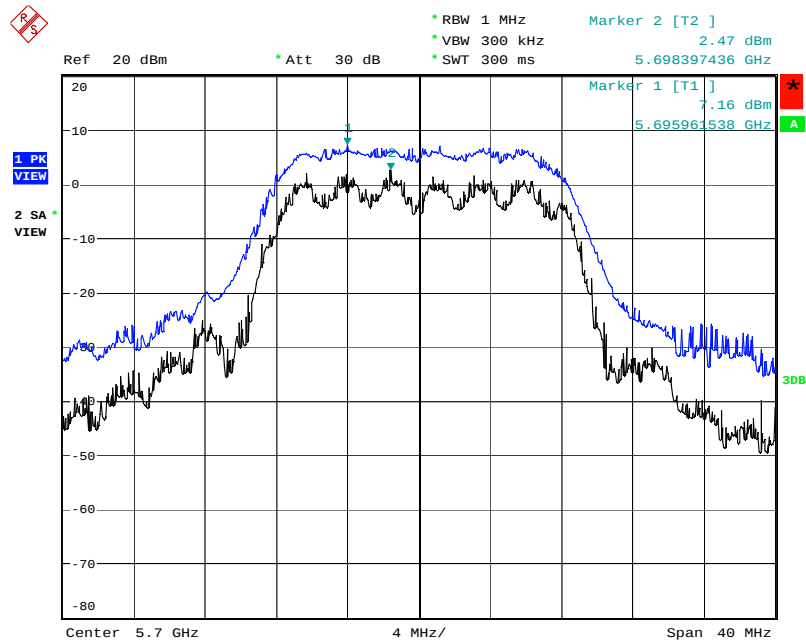

Date: 20.JAN.2008 01:46:23

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, in case the emission falls within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 30MHz

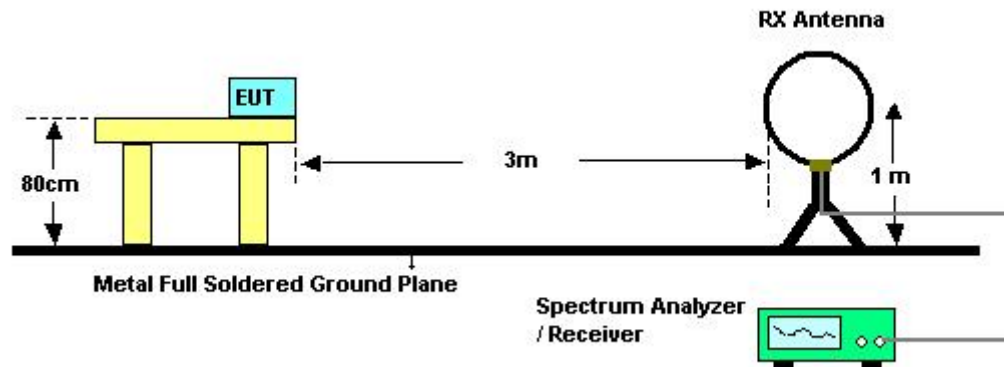

For radiated emissions above 30MHz

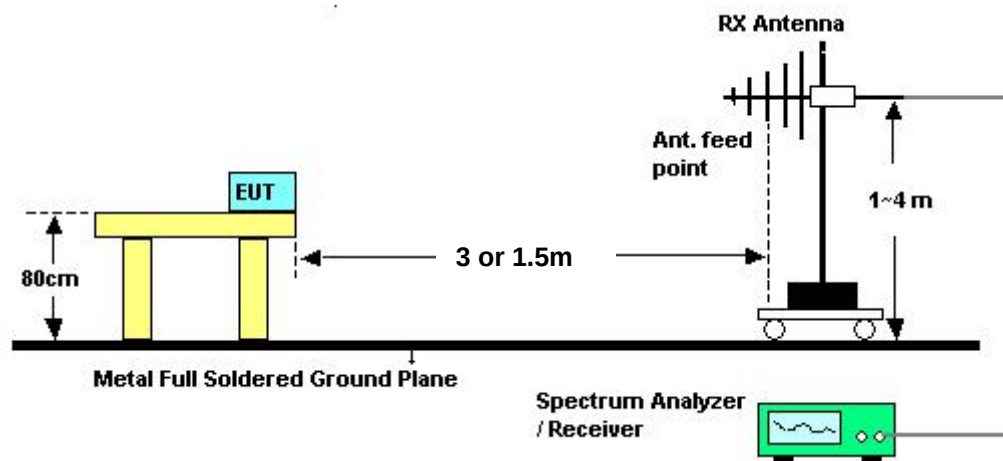

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23℃	Humidity	54%
Test Engineer	Barry Chen	Configurations	Normal Link

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	23℃	Humidity	54%
Test Engineer	Barry Chen	Configurations	Normal Link

Horizontal

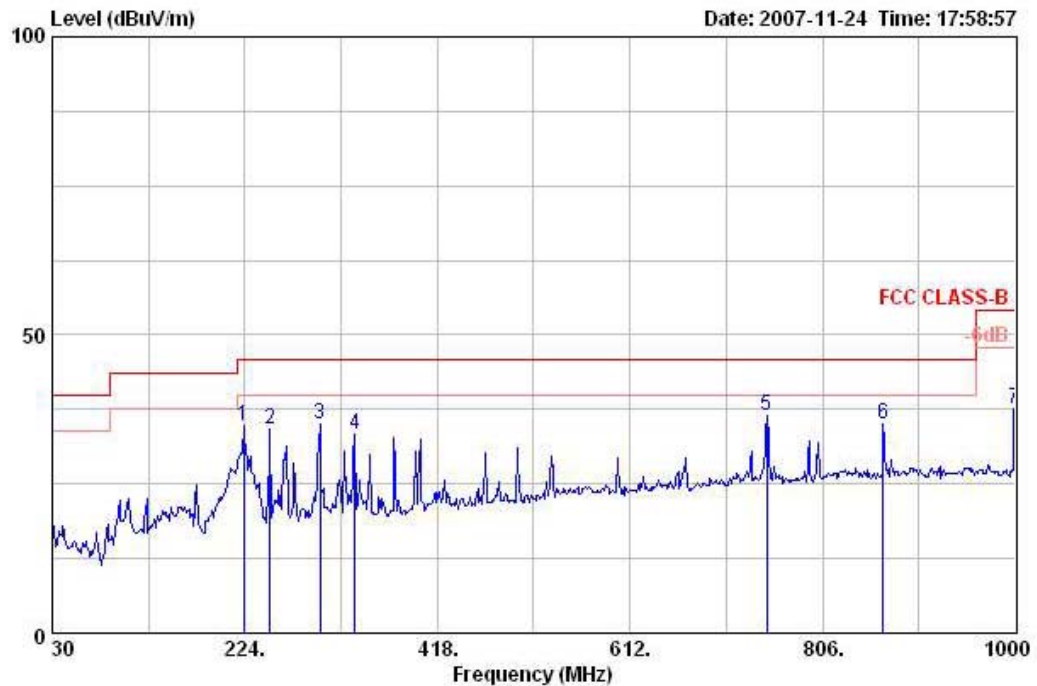

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Table Pos	Ant Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm	
1	223.030	34.71	-11.29	46.00	51.06	8.91	27.05	1.79	Peak	0	100	HORIZONTAL
2	249.220	34.07	-11.93	46.00	47.61	11.56	27.00	1.90	Peak	0	100	HORIZONTAL
3	299.660	35.16	-10.84	46.00	47.06	12.90	26.90	2.10	Peak	0	100	HORIZONTAL
4	334.580	33.41	-12.59	46.00	44.42	13.97	27.14	2.17	Peak	0	100	HORIZONTAL
5	749.740	36.59	-9.41	46.00	40.82	20.07	27.80	3.50	Peak	0	100	HORIZONTAL
6	867.110	34.93	-11.07	46.00	38.51	20.43	27.47	3.47	Peak	0	100	HORIZONTAL
7	1000.000	37.69	-16.31	54.00	40.69	20.30	27.00	3.70	Peak	0	100	HORIZONTAL

Vertical

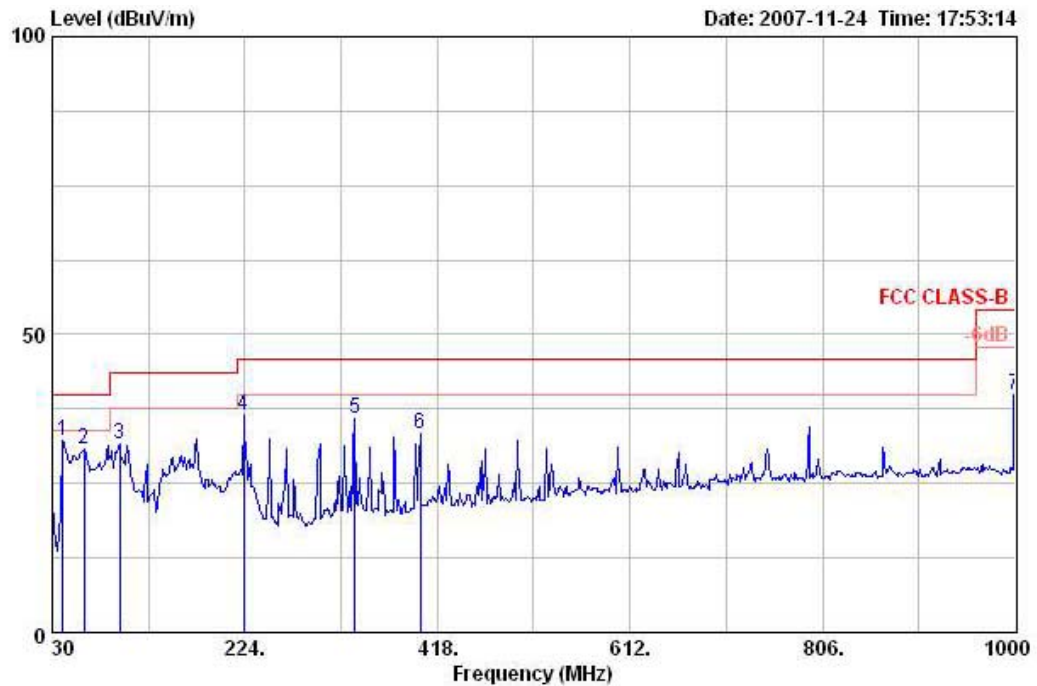

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Table Pos	Ant Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm	
1	40.670	32.06	-7.94	40.00	47.71	11.45	27.80	0.70	Peak	236	100	VERTICAL
2	62.010	30.68	-9.32	40.00	52.64	4.95	27.75	0.84	Peak	0	400	VERTICAL
3	97.900	31.70	-11.80	43.50	48.20	9.95	27.61	1.16	Peak	0	400	VERTICAL
4	223.030	36.59	-9.41	46.00	52.94	8.91	27.05	1.79	Peak	0	400	VERTICAL
5	334.580	35.79	-10.21	46.00	46.80	13.97	27.14	2.17	Peak	0	400	VERTICAL
6	400.540	33.46	-12.54	46.00	42.81	15.95	27.61	2.31	Peak	0	400	VERTICAL
7	1000.000	39.85	-14.15	54.00	42.85	20.30	27.00	3.70	Peak	0	400	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)


Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Configurations	802.11a Ch 36 Ant. 3 + Ant. 5

Horizontal

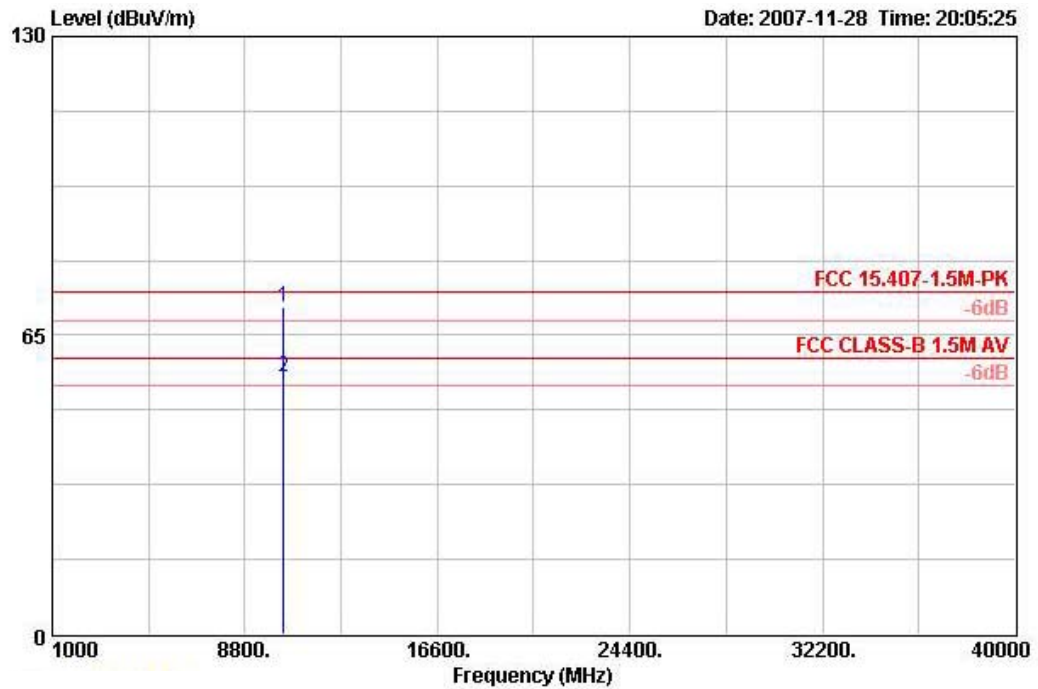

	Freq	Level	Over Limit	Limit Line	Remark	Pol/Phase	Distance	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor
	MHz	dBuV/m	dB	dBuV/m			m	dBuV	dB/m	dB	dB
1 !	10358.120	71.18	-3.12	74.30	PEAK	HORIZONTAL	3	58.60	38.37	9.32	35.12


Vertical

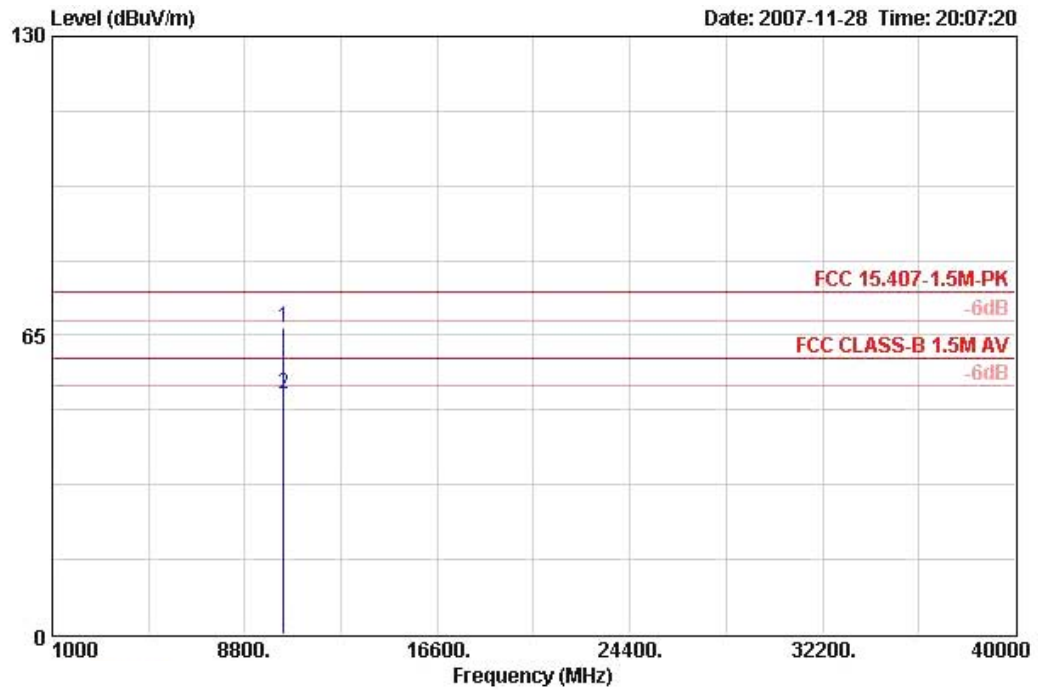

	Freq	Level	Over	Limit				ReadAntenna	Cable	Preamp
	MHz	dBuV/m	Limit	Line	Remark	Pol/Phase	Distance	Level	Factor	Loss
			dB	dBuV/m			m	dBuV	dB/m	dB
1	10359.640	66.73	-7.57	74.30	PEAK	VERTICAL	3	54.16	38.37	9.32
										35.12


Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Configurations	802.11a Ch 40 Ant. 3 + Ant. 5

Horizontal

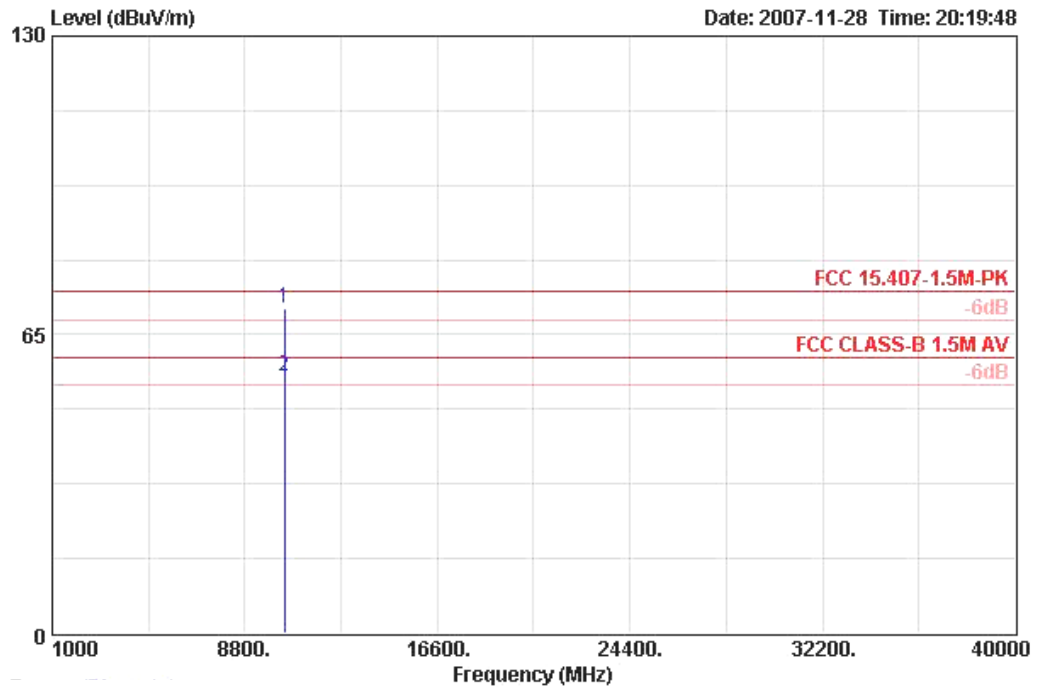

	Freq	Level	Over Limit	Limit	Line Remark	Pol/Phase	Distance	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor
	MHz	dBuV/m	dB	dBuV/m			m	dBuV	dB/m	dB	dB
1 !	10398.000	70.76	-3.54	74.30	PEAK	HORIZONTAL	3	58.08	38.38	9.36	35.05


Vertical

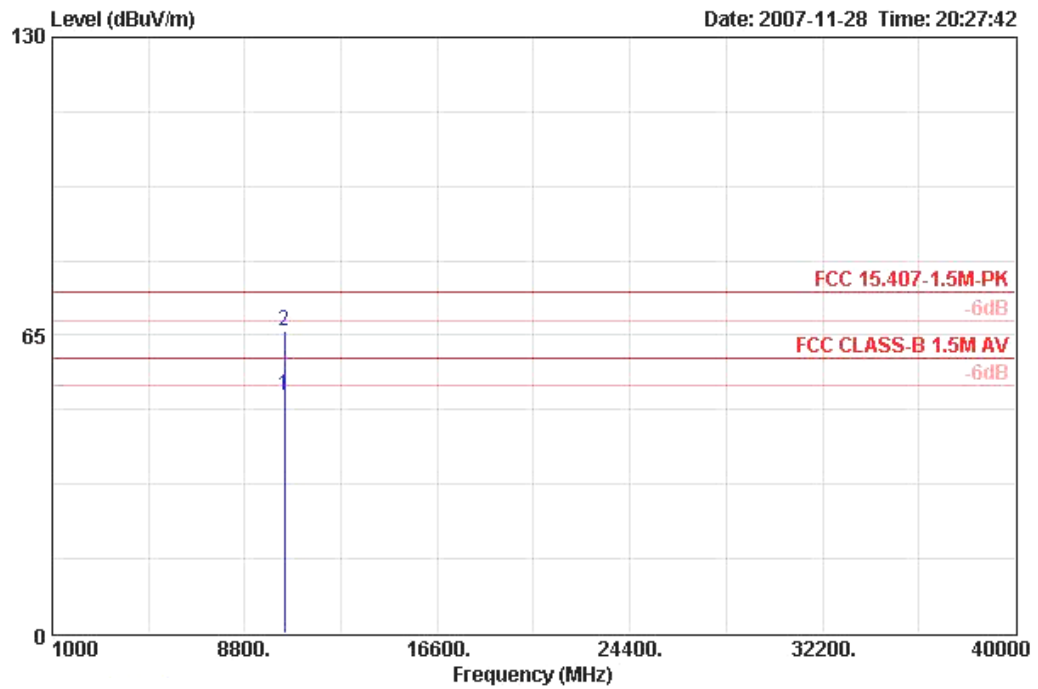

	Freq	Level	Over	Limit				ReadAntenna	Cable	Preamp
	MHz	dBuV/m	Limit	Line	Remark	Pol/Phase	Distance	Level	Loss	Factor
			dB	dBuV/m			m	dBuV	dB/m	dB
2	10400.000	65.98	-8.32	74.30	PEAK	VERTICAL	3	53.30	38.38	9.36 35.05


Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Configurations	802.11a Ch 48 Ant. 3 + Ant. 5

Horizontal

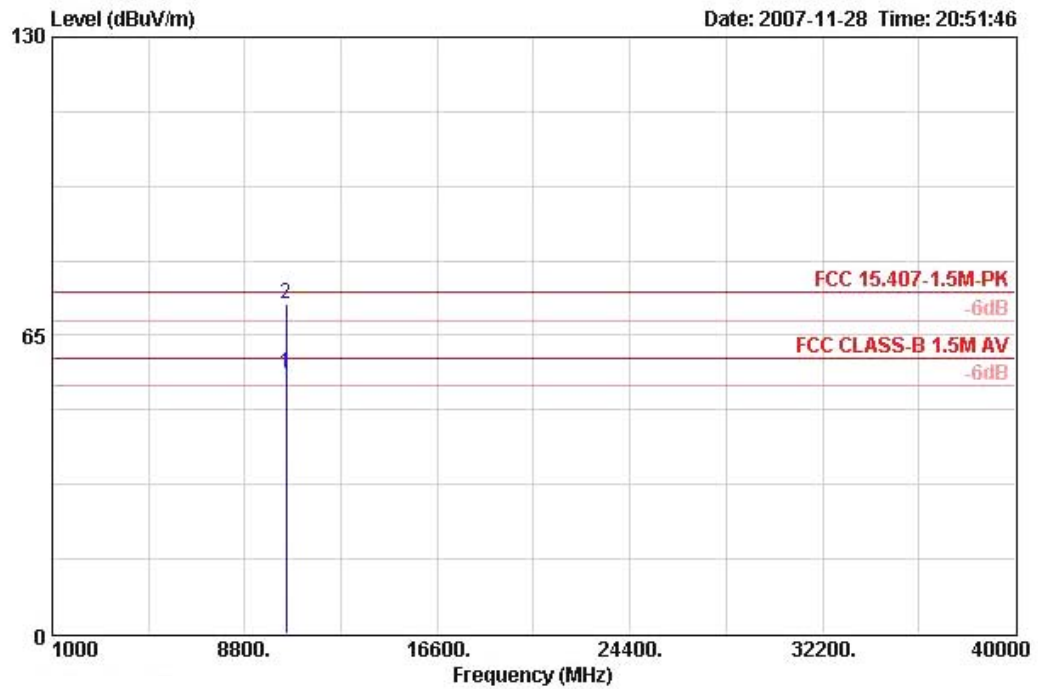

	Freq	Level	Over Limit	Limit Line	Remark	Pol/Phase	Distance	Read Level	Antenna Factor	Cable Loss	Preamp Factor
	MHz	dBuV/m	dB	dBuV/m			m	dBuV	dB/m	dB	dB
2 !	10483.080	71.89	-2.41	74.30	PEAK	HORIZONTAL	3	59.04	38.40	9.41	34.96


Vertical

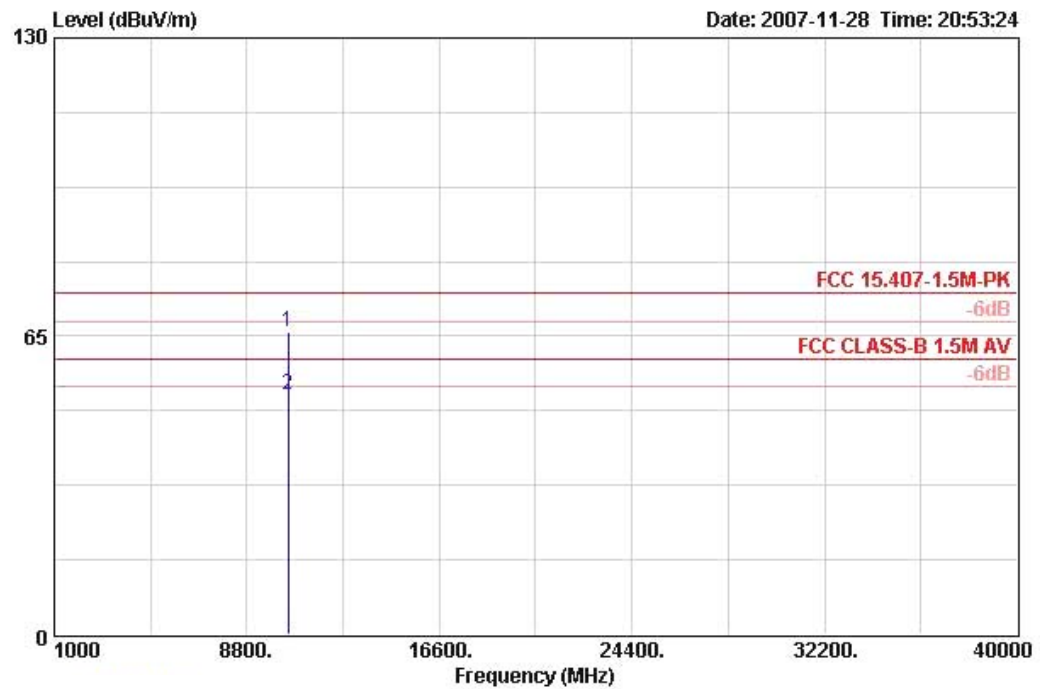

	Freq	Level	Over	Limit	Remark	Pol/Phase	Distance	ReadAntenna		Cable Preamp	
			Limit	Line				Level	Factor	Loss	Factor
	MHz	dBuV/m	dB	dBuV/m			m	dBuV	dB/m	dB	dB
1	10477.880	66.05	-8.25	74.30	PEAK	VERTICAL	3	53.20	38.40	9.41	34.96


Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Configurations	802.11a Ch 52 Ant. 3 + Ant. 5

Horizontal

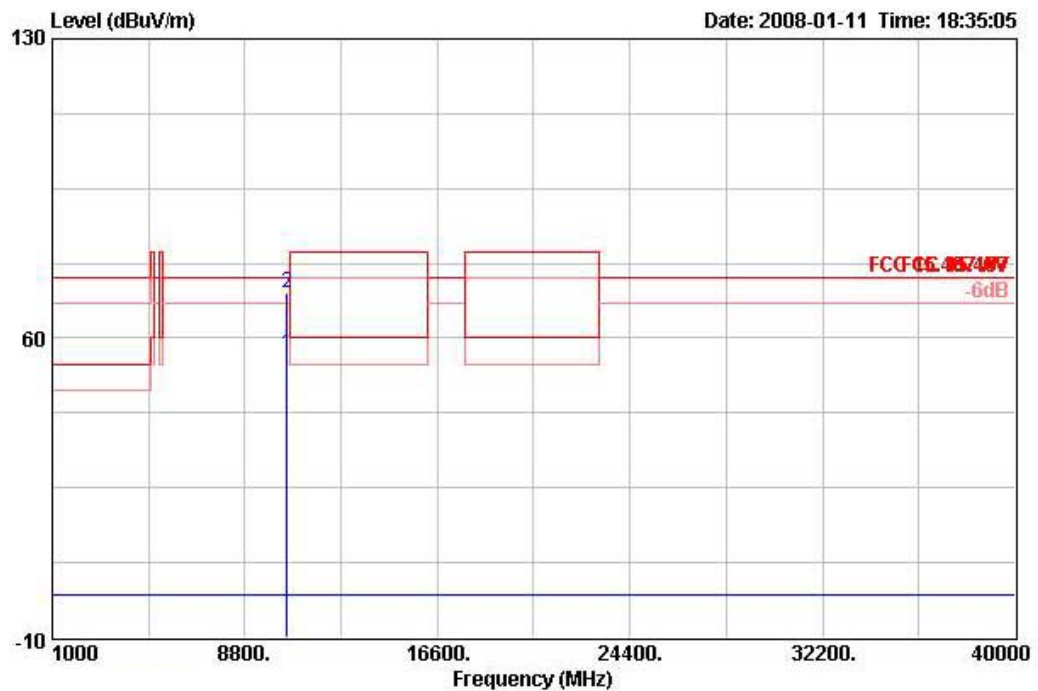

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos	Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10520.480	56.26	-18.04	74.30	43.36	38.40	9.43	34.93	AVERAGE	135	317	HORIZONTAL
2	10523.240	70.77	-3.53	74.30	57.87	38.40	9.43	34.93	PEAK	135	317	HORIZONTAL


Vertical

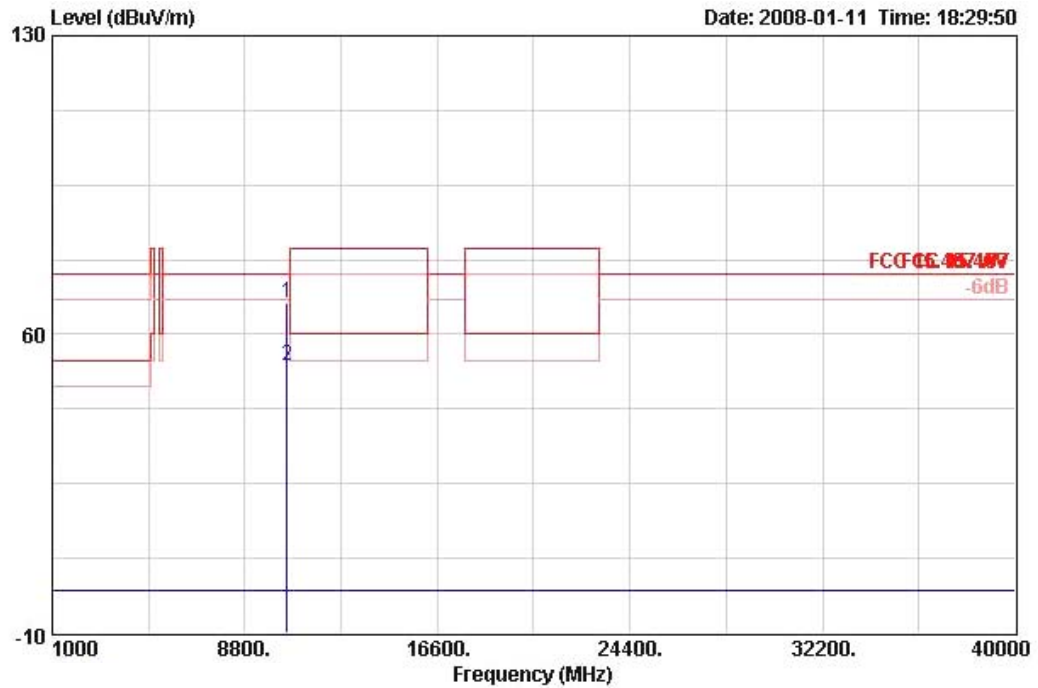

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10517.600	67.40	-6.90	74.30	54.50	38.40	9.43	34.93	PEAK	108	33	VERTICAL
2	10520.040	52.50	-21.80	74.30	39.60	38.40	9.43	34.93	AVERAGE	108	33	VERTICAL


Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Configurations	802.11a Ch 60 Ant. 3 + Ant. 5

Horizontal

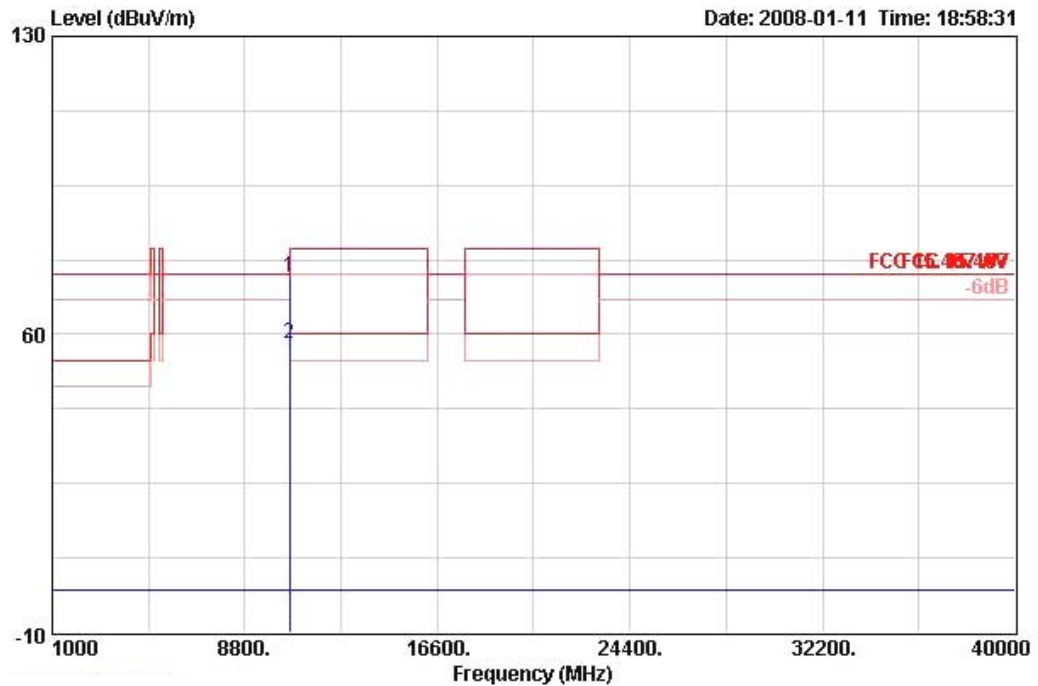

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10598.040	73.18	-1.12	74.30	60.23	38.38	9.47	34.90	PEAK	112	314	HORIZONTAL
2	10600.760	57.78	-2.22	60.00	44.81	38.38	9.48	34.89	AVERAGE	112	314	HORIZONTAL


Vertical

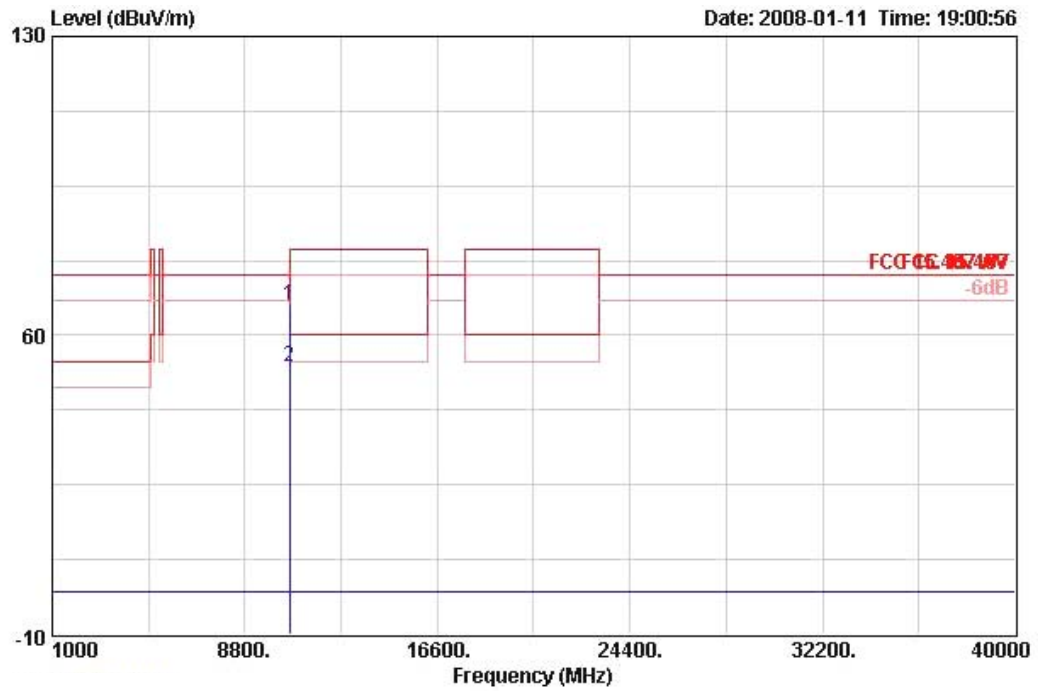

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10599.560	67.13	-7.17	74.30	54.18	38.38	9.47	34.90	PEAK	109	343	VERTICAL
2	10599.600	52.77	-21.53	74.30	39.81	38.38	9.47	34.90	AVERAGE	109	343	VERTICAL


Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Configurations	802.11a Ch 64 Ant. 3 + Ant. 5

Horizontal

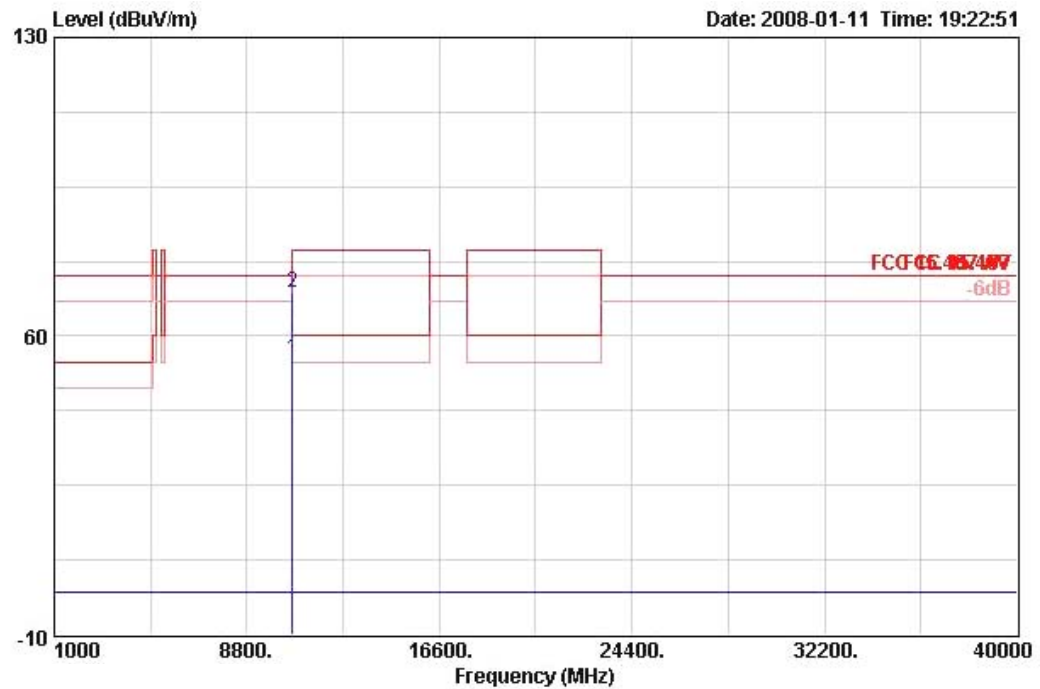

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB	cm	deg	
1	10640.480	54.71	-5.29	60.00	41.72	38.37	9.50	34.88	110	304	HORIZONTAL
2	10643.240	70.11	-9.89	80.00	57.12	38.37	9.50	34.88	110	304	HORIZONTAL


Vertical

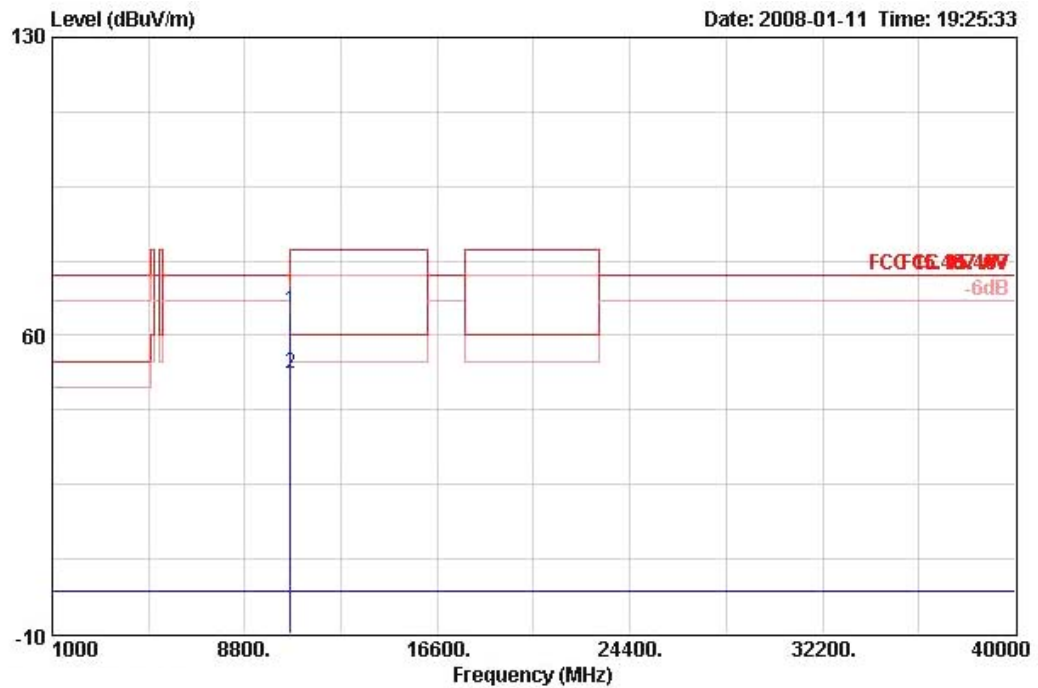

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	10639.520	65.81	-14.19	80.00	52.82	38.37	9.50	34.88	114	341	VERTICAL
2	10640.000	50.98	-9.02	60.00	37.99	38.37	9.50	34.88	114	341	VERTICAL


Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Configurations	802.11a Ch 100 Ant. 3 + Ant. 5

Horizontal

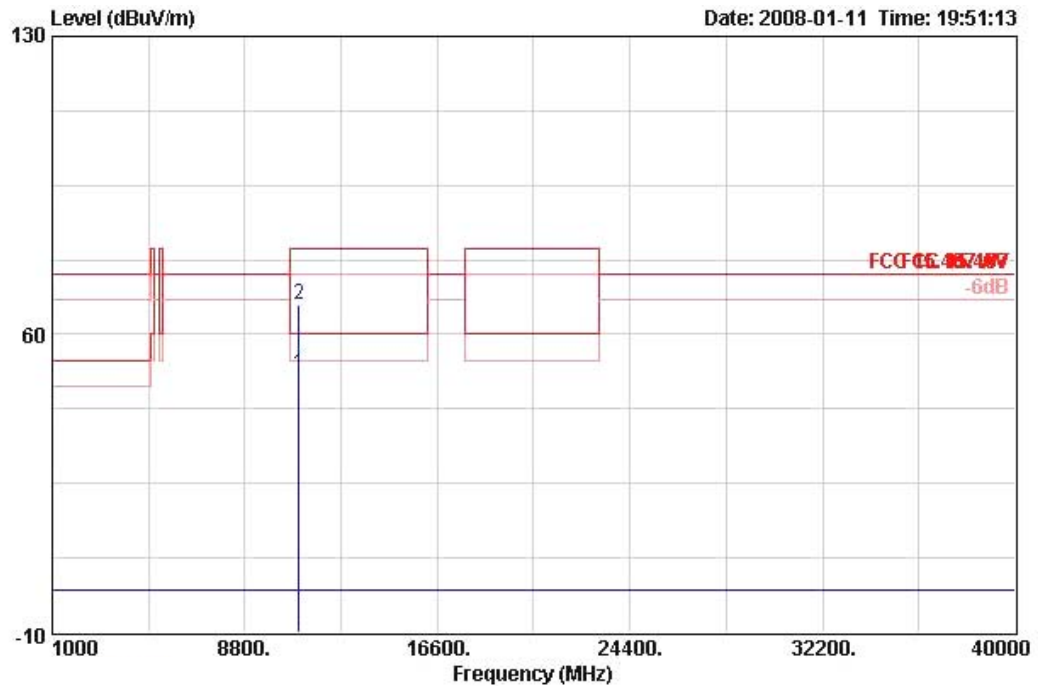

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10998.920	50.47	-9.53	60.00	37.24	38.30	9.69	34.76	AVERAGE	109	73	HORIZONTAL
2	10999.000	66.96	-13.04	80.00	53.72	38.30	9.69	34.76	PEAK	109	73	HORIZONTAL


Vertical

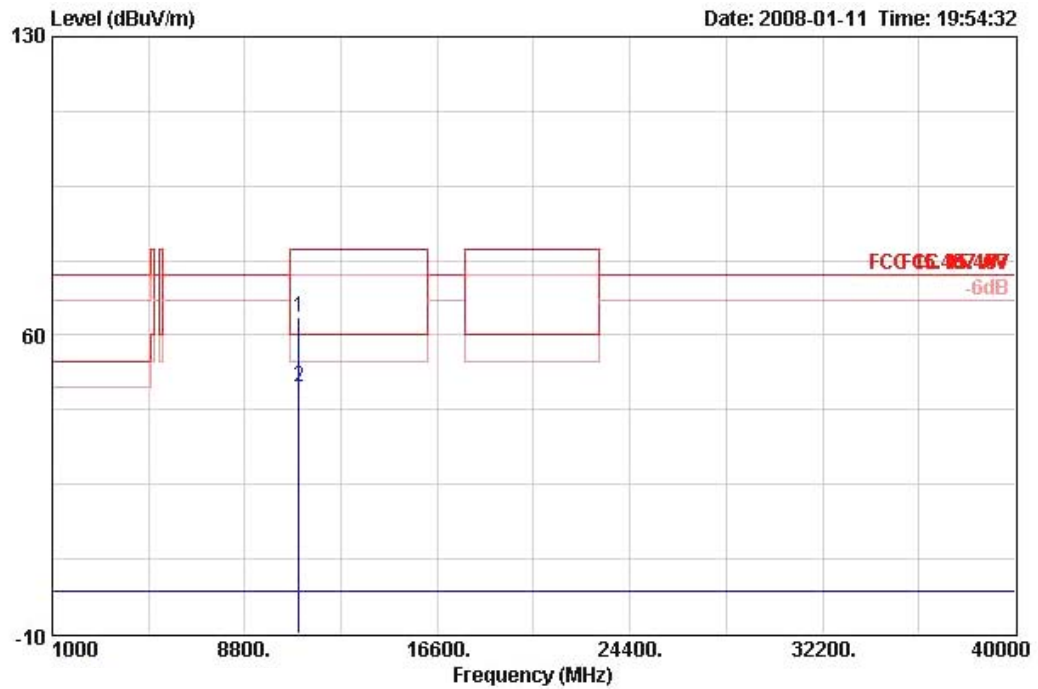

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10999.540	64.06	-15.94	80.00	50.83	38.30	9.69	34.76	PEAK	109	360	VERTICAL
2	10999.900	47.87	-12.13	60.00	34.63	38.30	9.69	34.76	AVERAGE	109	360	VERTICAL


Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Configurations	802.11a Ch 120 Ant. 3 + Ant. 5

Horizontal

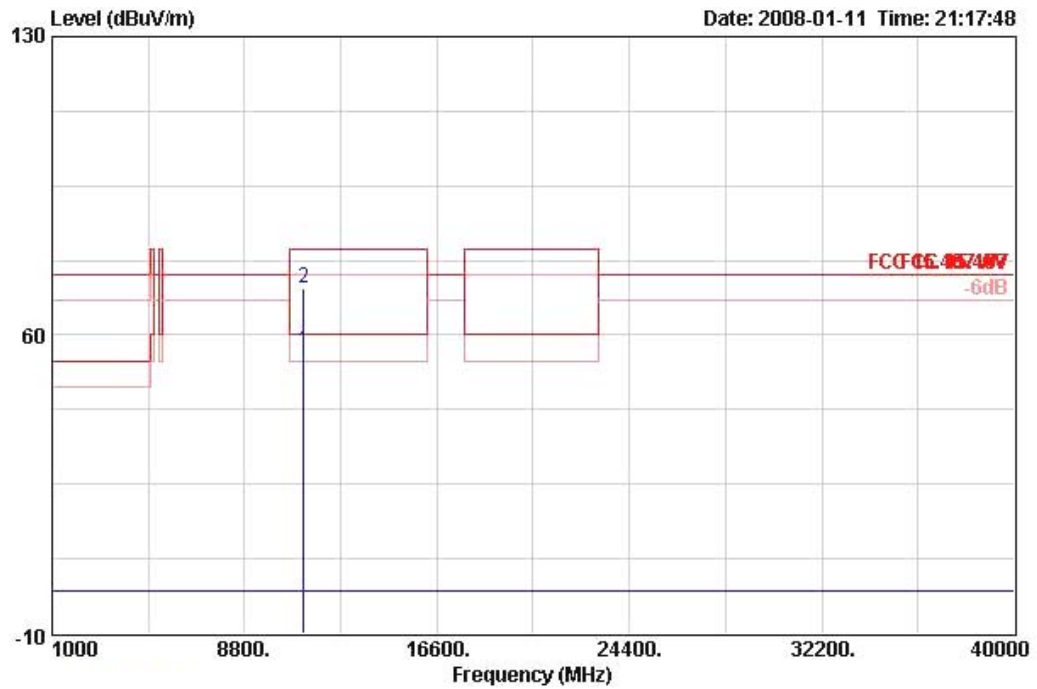

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11199.200	56.19	-3.81	60.00	42.82	38.50	9.73	34.85	AVERAGE	134	75	HORIZONTAL
2	11204.220	71.01	-8.99	80.00	57.64	38.50	9.73	34.85	PEAK	134	75	HORIZONTAL


Vertical

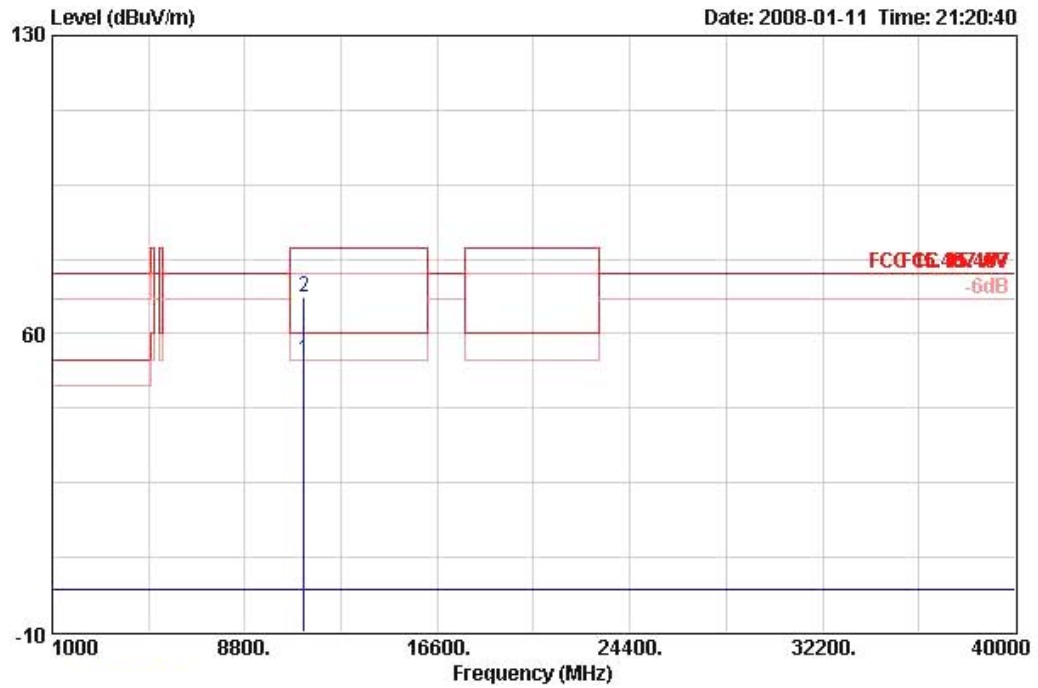

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	11199.040	53.89	-6.11	60.00	40.51	38.50	9.73	34.85	106	-1	VERTICAL
2	11204.400	68.51	-11.49	80.00	55.13	38.50	9.73	34.85	106	-1	VERTICAL


Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Configurations	802.11a Ch 140 Ant. 3 + Ant. 5

Horizontal

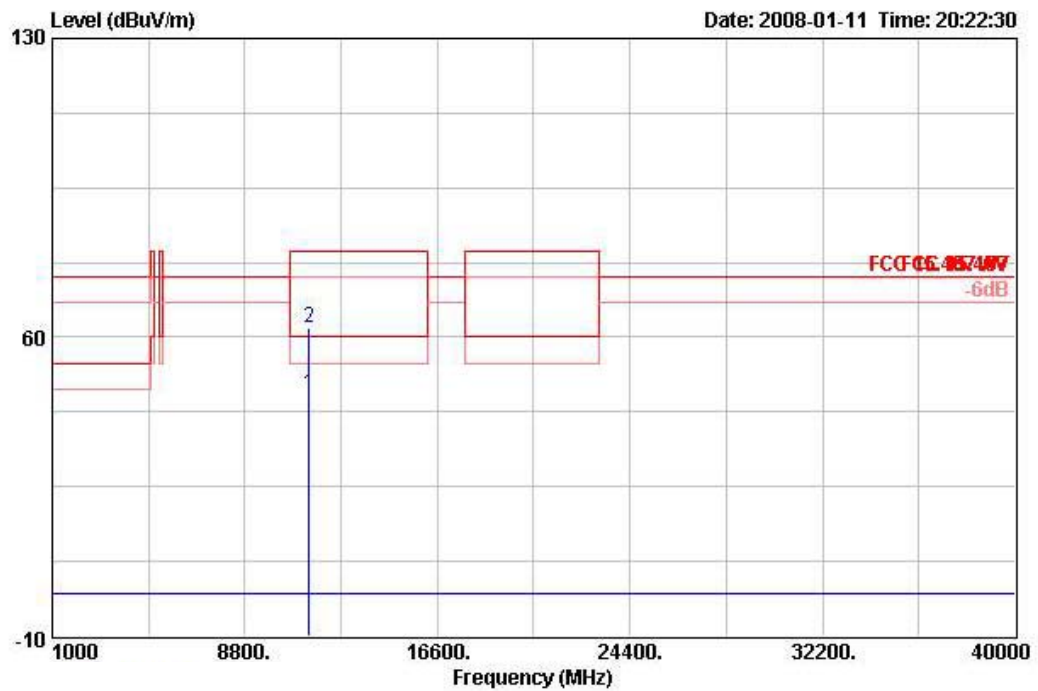

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos	Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11400.960	46.78	-13.22	60.00	33.27	38.70	9.76	34.95	AVERAGE	109	67	HORIZONTAL
2	11403.720	62.33	-17.67	80.00	48.81	38.70	9.76	34.95	PEAK	112	69	HORIZONTAL

Vertical

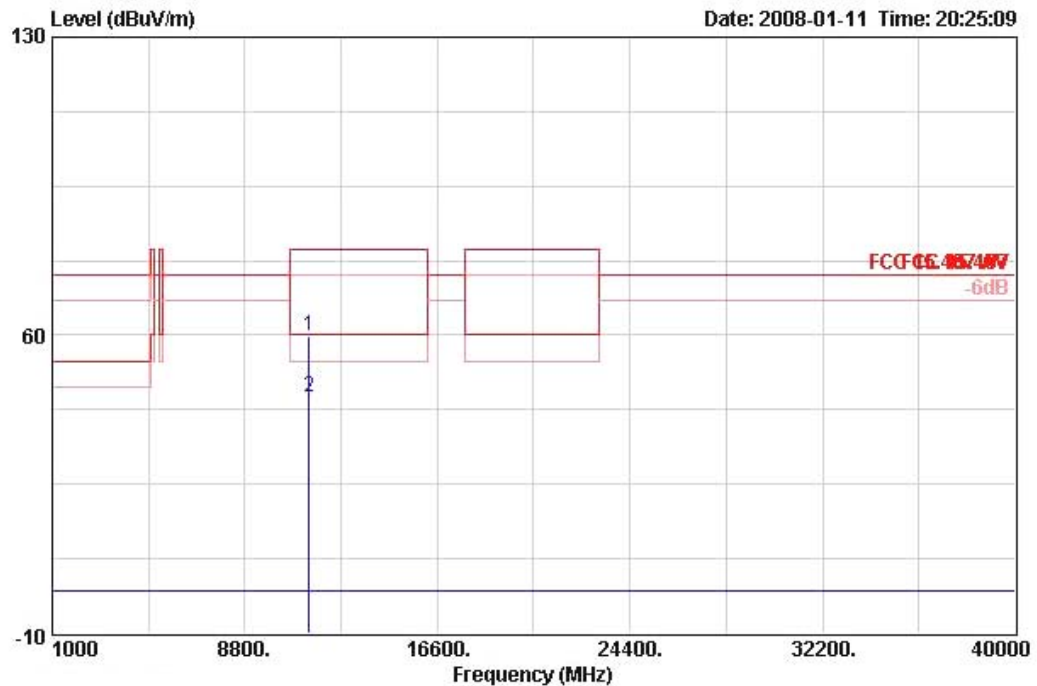

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos	Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11399.160	59.79	-20.21	80.00	46.27	38.70	9.76	34.95	PEAK	107	358	VERTICAL
2	11401.480	45.34	-14.66	60.00	31.83	38.70	9.76	34.95	AVERAGE	107	358	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz / 1 MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Configurations	802.11a Ch 36, 40, 48, 52 Ant. 3 + Ant. 5

Channel 36

	Freq	Level	Over	Limit	Remark	Pol/Phase	Distance	ReadAntenna		Cable	Preamp
			Limit	Line				Level	Factor	Loss	Factor
	MHz	dBuV/m	dB	dBuV/m			m	dBuV	dB/m	dB	dB
1 !	5150.000	59.76	-0.24	60.00	AVERAGE	VERTICAL	3	19.55	33.67	6.54	0.00
2	5150.000	75.52			PEAK	VERTICAL	3	35.30	33.67	6.54	0.00
3	5176.200	106.09			AVERAGE	VERTICAL	3	65.81	33.73	6.55	0.00
4	5183.400	117.71			PEAK	VERTICAL	3	77.43	33.73	6.55	0.00

Item 3, 4 are the fundamental frequency at 5180 MHz.

Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Channel 40

	Freq	Level	Over	Limit	Remark	Pol/Phase	Distance	ReadAntenna		Cable	Preamp
			Limit	Line				Level	Factor	Loss	Factor
	MHz	dBuV/m	dB	dBuV/m			m	dBuV	dB/m	dB	dB
1 @	5195.400	106.79			AVERAGE	VERTICAL	3	66.47	33.76	6.57	0.00
2	5195.600	118.16			PEAK	VERTICAL	3	77.83	33.76	6.57	0.00

Item 1, 2 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Over	Limit	Remark	Pol/Phase	Distance	ReadAntenna		Cable	Preamp
			Limit	Line				Level	Factor	Loss	Factor
	MHz	dBuV/m	dB	dBuV/m			m	dBuV	dB/m	dB	dB
1 @	5237.800	108.28			AVERAGE	VERTICAL	3	67.88	33.82	6.58	0.00
2	5242.800	119.16			PEAK	VERTICAL	3	78.74	33.85	6.58	0.00

Item 1, 2 are the fundamental frequency at 5240 MHz.

Channel 52

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 $\odot$	5325.200	119.63			79.04	33.97	6.63	0.00	PEAK	104	272	VERTICAL
2 $\odot$	5325.400	105.29			64.69	33.97	6.63	0.00	AVERAGE	104	272	VERTICAL
3	5350.400	59.54	-0.46	60.00	18.87	34.03	6.64	0.00	AVERAGE	104	272	VERTICAL
4 $\odot$	5350.600	79.71	-0.29	80.00	39.04	34.03	6.64	0.00	PEAK	104	272	VERTICAL

Item 1, 2 are the fundamental frequency at 5260 MHz.

Temperature	23°C	Humidity	54%
Test Engineer	Barry Chen	Configurations	802.11a Channel 100, 140

Channel 100

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	5450.800	69.91	-10.09	80.00	29.01	34.21	6.69	0.00	Peak	100	272	VERTICAL
2 ☺	5460.000	57.63	-2.37	60.00	16.73	34.21	6.69	0.00	AVERAGE	100	272	VERTICAL
3 ☺	5469.900	74.09	-0.21	74.30	33.16	34.24	6.69	0.00	PEAK	100	272	VERTICAL
4 ☺	5503.800	115.22			74.20	34.30	6.71	0.00	Peak	100	272	VERTICAL
5 ☺	5505.600	103.72			62.71	34.30	6.71	0.00	AVERAGE	100	272	VERTICAL

Item 3, 4 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5695.200	102.13			60.98	34.34	6.81	0.00	AVERAGE	100	289	VERTICAL
2 @	5695.800	113.42			72.28	34.34	6.81	0.00	PEAK	100	289	VERTICAL
3 @	5725.160	73.87	-0.43	74.30	32.71	34.34	6.82	0.00	PEAK	100	289	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

EIRP Emission in Band on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5180 MHz

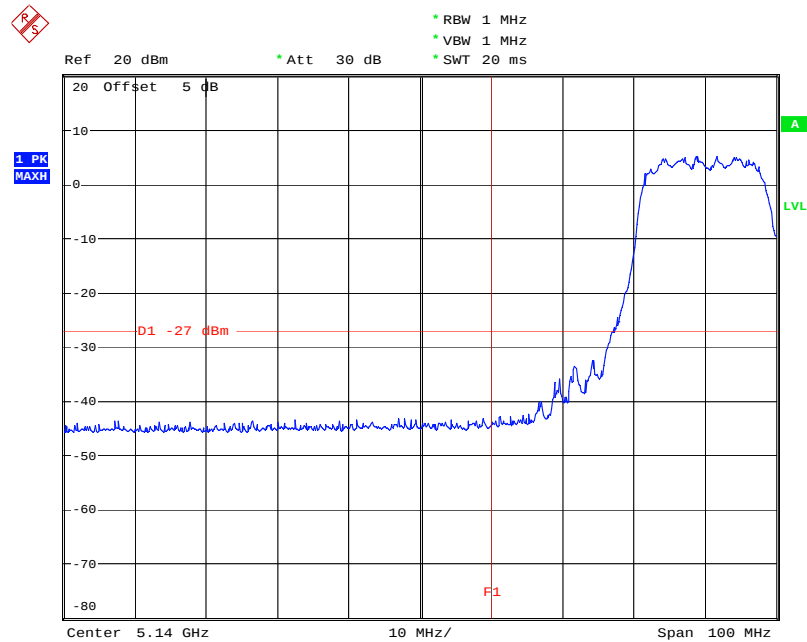


Date: 11.DEC.2007 12:07:46

EIRP Emission in Band on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5240 MHz

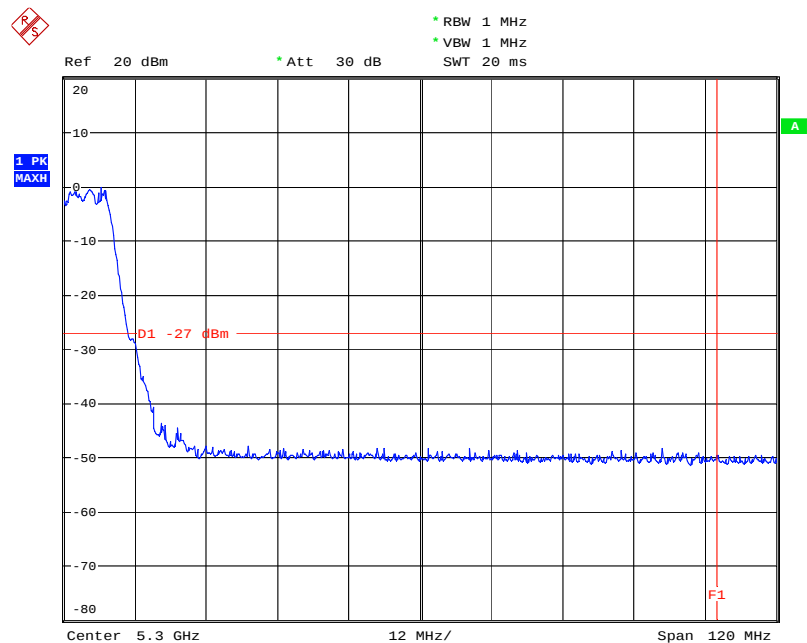


Date: 11.DEC.2007 12:24:06

EIRP Emission in Band on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5500 MHz

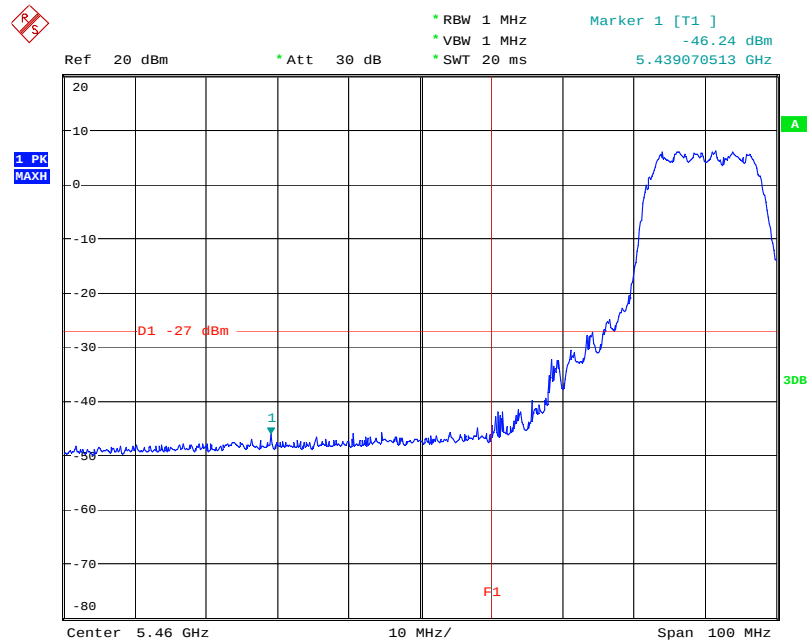

Date: 20.JAN.2008 00:45:43

EIRP Emission in Band on Configuration IEEE 802.11a Ant. 3 + Ant. 5 / 5700 MHz

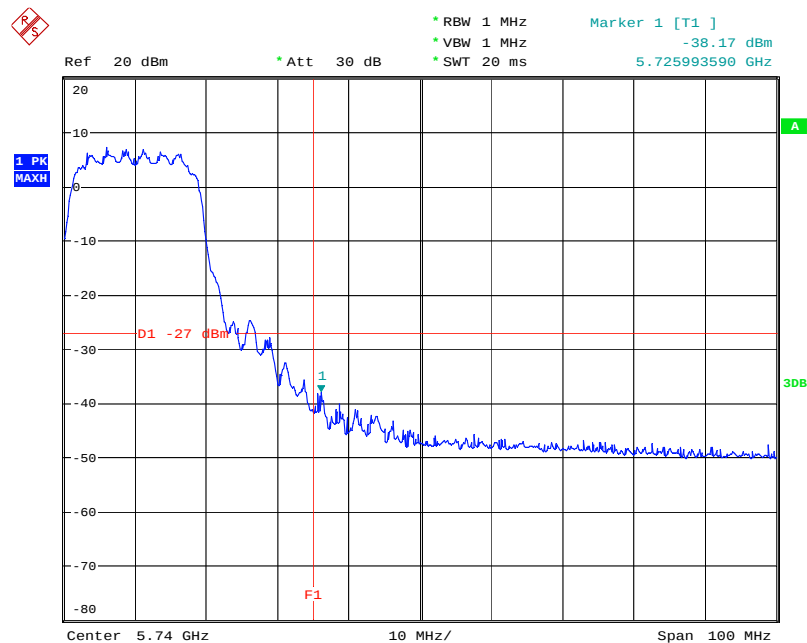

Date: 20.JAN.2008 00:39:03

4.8. Frequency Stability Measurement

4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or $\pm 20\text{ppm}$ (IEEE 802.11a specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than $\pm 20\text{ppm}$ (IEEE 802.11a specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.
8. Measuring multiple antennas, the connector is required to link with Power Meter through a combiner.

4.8.4. Test Setup Layout

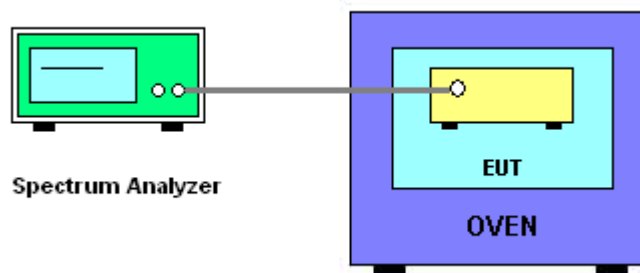

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200
126.50	5200.012400
110.00	5200.012400
93.50	5200.012400
Max. Deviation (MHz)	0.012400
Max. Deviation (ppm)	2.38

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200
-30	5200.065400
-20	5200.061200
-10	5200.061200
0	5200.043200
10	5200.034200
20	5200.012400
30	5199.998200
40	5199.998200
50	5199.996800
Max. Deviation (MHz)	0.065400
Max. Deviation (ppm)	12.58

Voltage	Measurement Frequency (MHz)
(V)	5300
126.50	5300.019300
110.00	5300.013500
93.50	5299.953200
Max. Deviation (MHz)	0.046800
Max. Deviation (ppm)	8.83

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5300
-30	5300.056300
-20	5300.055700
-10	5300.045700
0	5300.023100
10	5300.012900
20	5299.983500
30	5299.965300
40	5299.961200
50	5299.955600
Max. Deviation (MHz)	0.056300
Max. Deviation (ppm)	10.62

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100359	9kHz – 2.75GHz	Mar. 01, 2007	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2007	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2007	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2007	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	May 09, 2007	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2007	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan 14 2008	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jun. 07, 2007	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100305	9 kHz - 40 GHz	Sep. 27, 2007	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 21, 2007	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 04, 2007	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Dec. 17, 2007	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 27, 2007	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 04, 2007*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 03, 2007	Conducted (TH01-HY)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2007	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2007	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 07, 2007	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

* Calibration Interval of instruments listed above is two year.

NCR means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : LI190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.

EMC & Wireless Communications Laboratory

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

P1, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.