



# FCC RF Test Report

**APPLICANT** : Sony Mobile Communications Inc.  
**EQUIPMENT** : GSM/WCDMA/LTE Phone + Bluetooth,  
DTS/UNII a/b/g/n/ac, ANT+, and NFC  
**BRAND NAME** : Sony  
**FCC ID** : PY7-PM0910  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Jul. 16, 2015 and testing was completed on Sep. 06, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



# TABLE OF CONTENTS

**REVISION HISTORY.....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION.....5**

    1.1 Applicant.....5

    1.2 Manufacturer.....5

    1.3 Product Feature of Equipment Under Test.....5

    1.4 Modification of EUT .....6

    1.5 Testing Location .....7

    1.6 Applicable Standards.....7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....8**

    2.1 Carrier Frequency and Channel .....8

    2.2 Pre-Scanned RF Power.....9

    2.3 Test Mode.....11

    2.4 Connection Diagram of Test System.....12

    2.5 Support Unit used in test configuration and system .....13

    2.6 EUT Operation Test Setup .....13

    2.7 Measurement Results Explanation Example.....13

**3 TEST RESULT.....14**

    3.1 6dB Bandwidth Measurement .....14

    3.2 Peak Output Power Measurement .....16

    3.3 Power Spectral Density Measurement .....18

    3.4 Conducted Band Edges and Spurious Emission Measurement .....20

    3.5 Radiated Band Edges and Spurious Emission Measurement .....51

    3.6 AC Conducted Emission Measurement.....55

    3.7 Antenna Requirements.....59

**4 LIST OF MEASURING EQUIPMENT .....61**

**5 UNCERTAINTY OF EVALUATION.....63**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED TEST RESULTS**

**APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.98 dB at 2390.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 22.70 dB at 24.006 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

Sony Mobile Communications Inc.  
Nya Vattentorget, 22188 Lund, Sweden

## 1.2 Manufacturer

Sony Mobile Communications Inc.  
1-8-15 Konan, Minato-ku, Tokyo, 108-0075, Japan

## 1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, ANT+, NFC and GPS

Product Specification subjective to this standard	
Antenna Type / Gain	<Ant 1> 802.11b/g/n : Monopole Antenna with gain -4.20 dBi <Ant 2> 802.11b/g/n : Monopole Antenna with gain -4.70 dBi

EUT Information List				
IMEI	HW Version	SW Version	S/N	Performed Test Item
IMEI : 004402541724518	A	32.0.B.0.233	CB5A27RL7B	RF conducted measurement
IMEI : 004402541720599			CB5A27R4B7	Radiated Spurious Emission
IMEI : 004402541724070			CB5A27R49U	Conducted Emission



Accessory List	
AC Adapter	Model No. : UCH20
	Type No. : AC-0061-US
	S/N : 5815W22500089 (for radiated spurious emission) 5815W22500112 (for conducted emission)
Earphone	Model No. : MDR-NC750
	Type No. : AG-0020
USB Cable	Model No. : UCB11
	Type No. : AI-0120
	S/N : 1015W02400014C (for radiated spurious emission) 1522A7370000074 (for conducted emission)

**Note:**

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.

### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		
	TH05-HY	CO05-HY	03CH07-HY

**Note:** The test site complies with ANSI C63.4 2009 requirement.

### 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2009

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table for frequency above 1GHz as an alternative in C63.10-2013 through inquiry tracking number 961829.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane for antenna 1 and antenna 1+2 ; X plane for antenna 2) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442		



## 2.2 Pre-Scanned RF Power

The data rates were set in

1 Mbps for 802.11b, 6Mbps for 802.11g, and MCS0 for 802.11n HT20 for Ant. 1 and Ant. 2;

6Mbps for 802.11g and MCS8 for 802.11n HT20 for MIMO <Ant. 1 + 2>, due to the customer declared.

<Ant. 1>

802.11b					
Data Rate (MHz)	1M bps				
Channel	01	06	11	12	13
Frequency (MHz)	2412	2437	2462	2467	2472
Peak Power (dBm)	16.34	16.58	16.31	16.16	15.67

<Ant. 2>

802.11b					
Data Rate (MHz)	1M bps				
Channel	01	06	11	12	13
Frequency (MHz)	2412	2437	2462	2467	2472
Peak Power (dBm)	16.50	16.89	17.04	16.98	15.80

SISO <Ant. 1>

802.11g					
Data Rate (MHz)	6M bps				
Channel	01	06	11	12	13
Frequency (MHz)	2412	2437	2462	2467	2472
Peak Power (dBm)	20.08	20.16	20.04	16.55	10.51

2.4GHz 802.11n HT20					
Data Rate (MHz)	MCS0				
Channel	01	06	11	12	13
Frequency (MHz)	2412	2437	2462	2467	2472
Peak Power (dBm)	20.18	20.37	19.91	15.36	10.07



SISO <Ant. 2>

802.11g					
Data Rate (MHz)	6M bps				
Channel	01	06	11	12	13
Frequency (MHz)	2412	2437	2462	2467	2472
Peak Power (dBm)	20.15	20.78	20.42	16.68	10.05

2.4GHz 802.11n HT20					
Data Rate (MHz)	MCS0				
Channel	01	06	11	12	13
Frequency (MHz)	2412	2437	2462	2467	2472
Peak Power (dBm)	20.04	20.16	19.66	14.47	9.50

MIMO <Ant. 1+2>

802.11g					
Data Rate (MHz)	6M bps				
Channel	01	06	11	12	13
Frequency (MHz)	2412	2437	2462	2467	2472
Peak Power (dBm)	23.12	23.49	23.24	19.86	15.52

2.4GHz 802.11n HT20					
Data Rate (MHz)	MCS8				
Channel	01	06	11	12	13
Frequency (MHz)	2412	2437	2462	2467	2472
Peak Power (dBm)	23.04	23.28	22.71	17.72	12.26

Note: MIMO Ant. 1+2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.



### 2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

#### Single Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


#### MIMO Antenna

Modulation	Data Rate
802.11g	6 Mbps
802.11n HT20	MCS8


Test Cases	
AC Conducted Emission	Mode 1 : WLAN 2.4GHz Link + USB Cable( Charging from Adapter) + Earphone

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

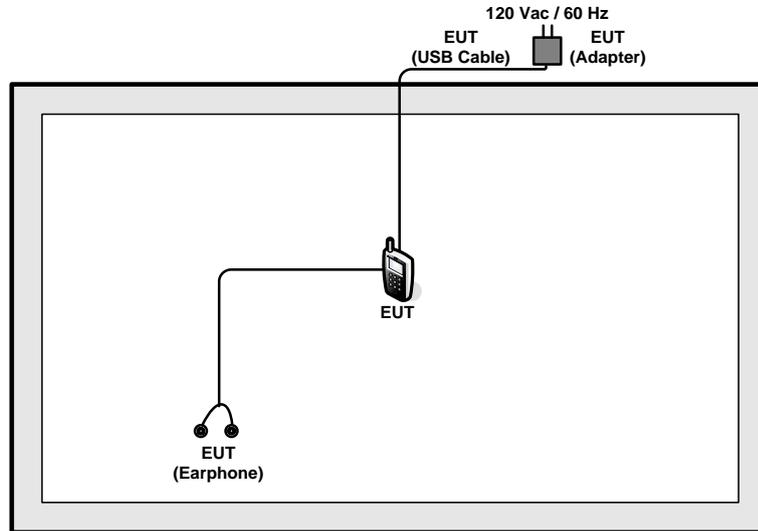

### <AC Conducted Emission Mode>

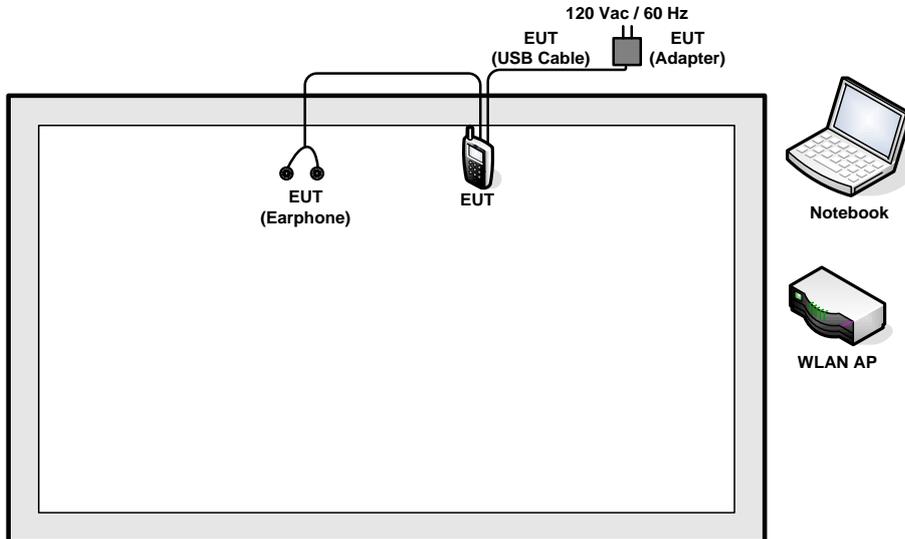



### 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	IO-Data	WN-AC733GR	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

### 2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

### 2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\text{Offset(dB)} = \text{RF cable loss(dB)} + \text{attenuator factor(dB)}.$$

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


##### 3.1.4 Test Setup

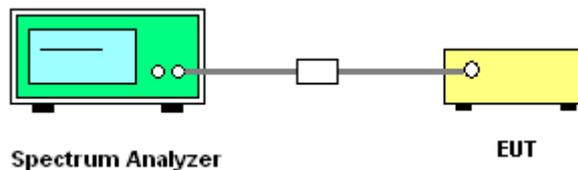



### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A of this test report.

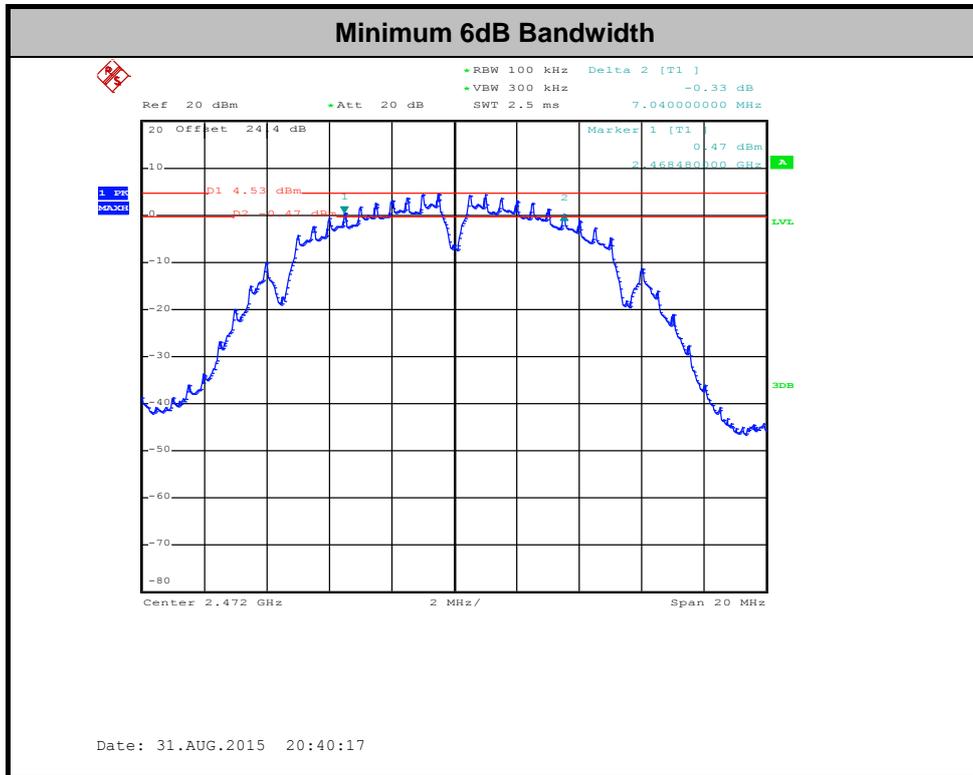

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

### 3.2.4 Test Setup

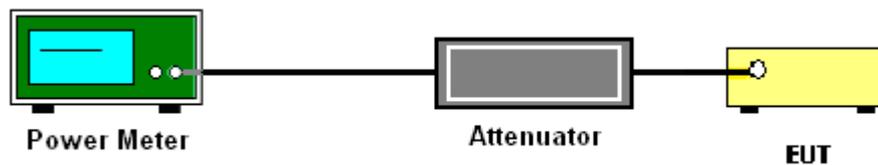



### **3.2.5 Test Result of Peak Output Power**

Please refer to Appendix A of this test report.

### **3.2.6 Test Result of Average output Power (Reporting Only)**

Please refer to Appendix A of this test report.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus  $10 \log(N)$  exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (2): Measure and add  $10 \log(N)$  dB, where N is the number of outputs. (N=2)

### 3.3.4 Test Setup

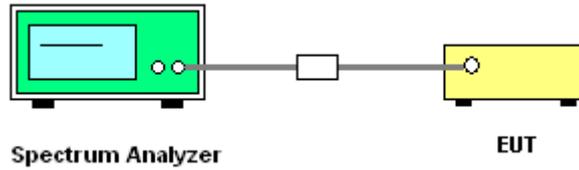

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

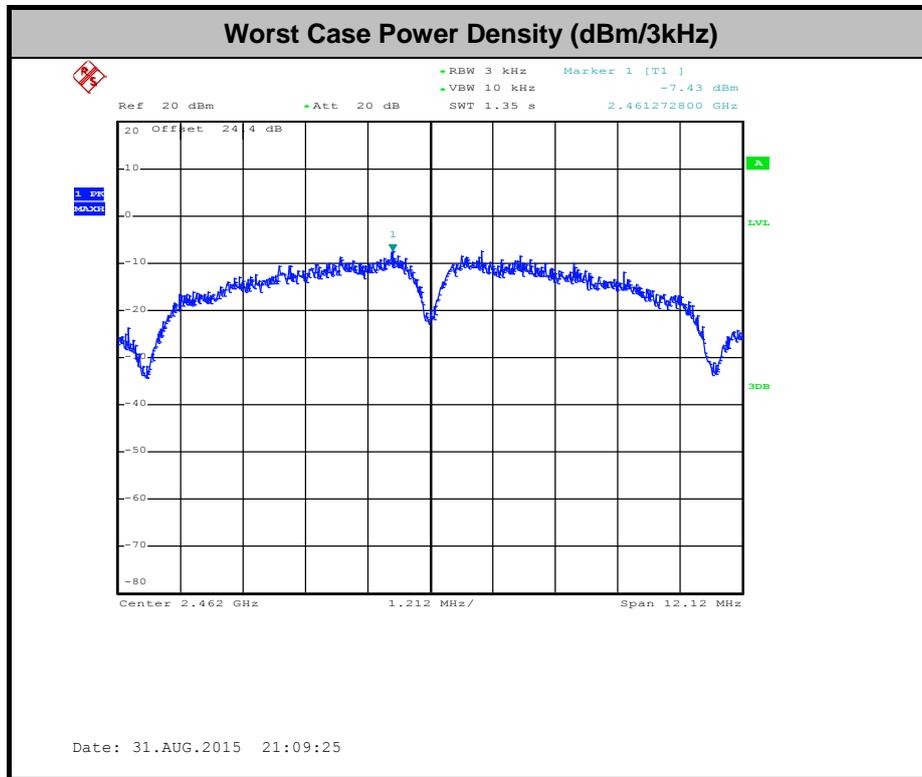

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

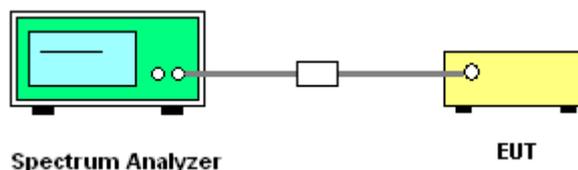




### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Number of TX = 1, Ant. 1 (Measured)


Number of TX	1	Ant. :	1
Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz Low	Relative Humidity :	52~53%
Test Channel :	01	Test Engineer :	Osolemio Chang

#### WLAN 802.11b Channel 01


##### 100kHz PSD reference Level

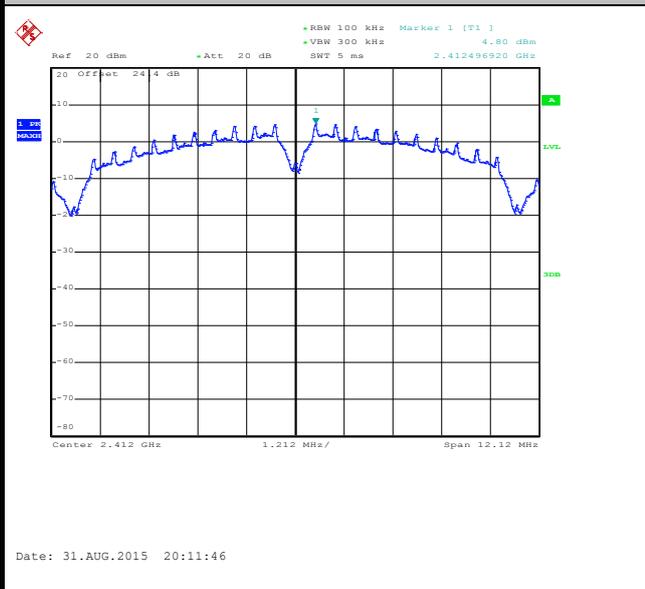


##### Low Channel Plot

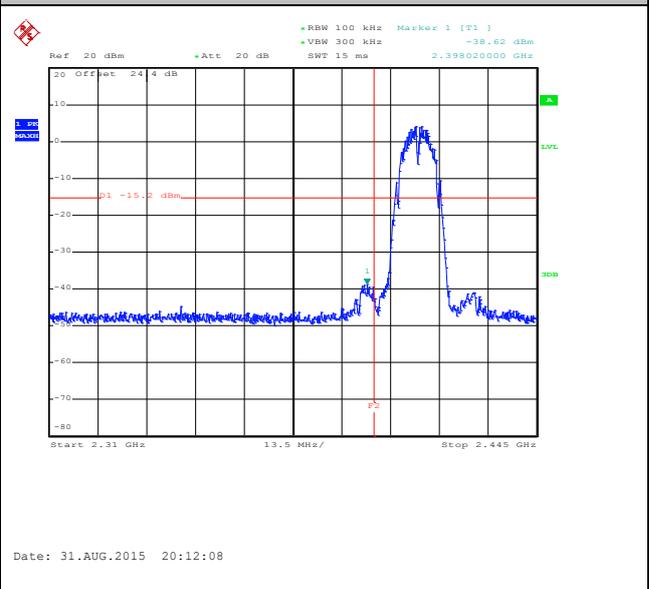

##### Spurious Emission 30MHz~3GHz

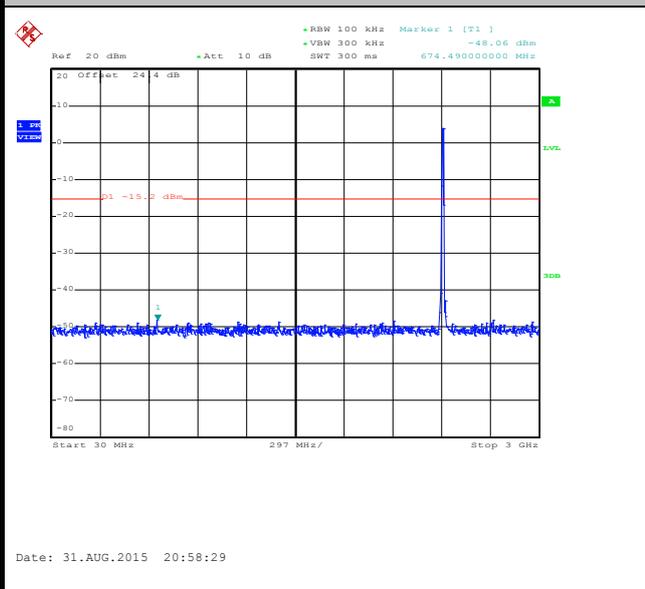

##### Spurious Emission 2GHz~25GHz

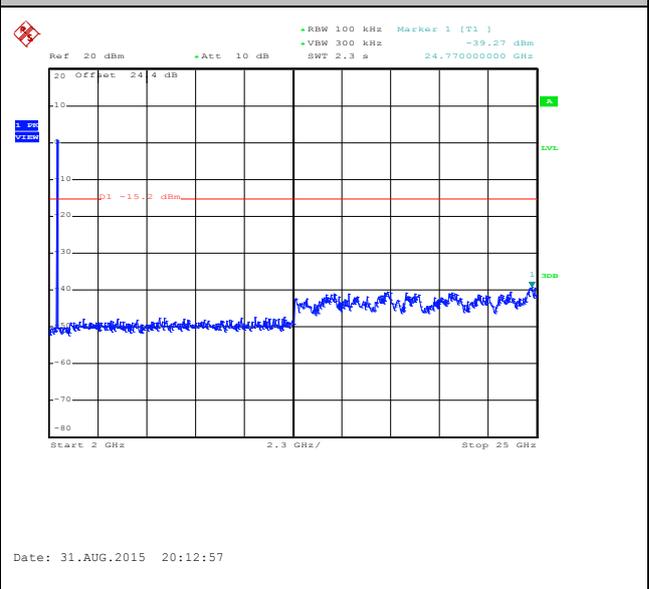




Number of TX :	1	Ant. :	1
Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz Mid	Relative Humidity :	52~53%
Test Channel :	06	Test Engineer :	Osolemio Chang

WLAN 802.11b Channel 06


100kHz PSD reference Level



Spurious Emission 30MHz~3GHz

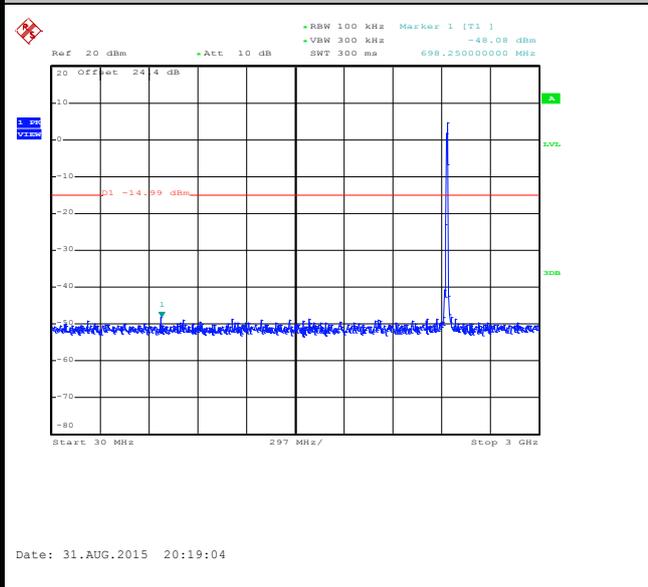

Spurious Emission 2GHz~25GHz

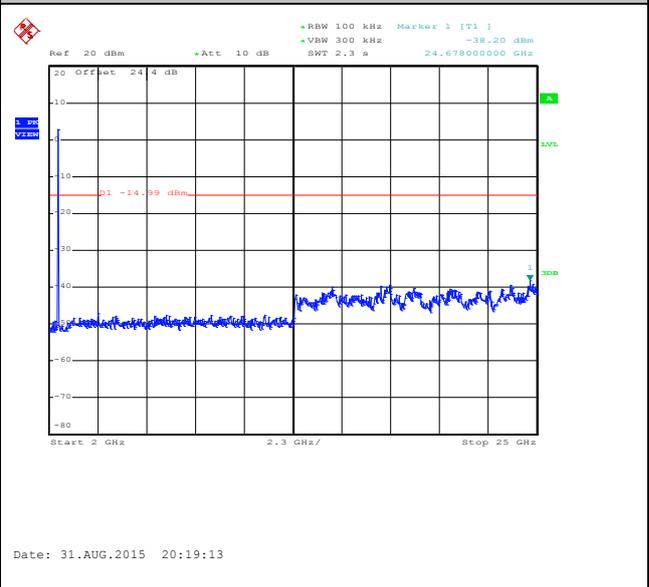




Number of TX :	1	Ant. :	1
Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	11	Test Engineer :	Osolemio Chang

WLAN 802.11b Channel 11


100kHz PSD reference Level




High Channel Plot

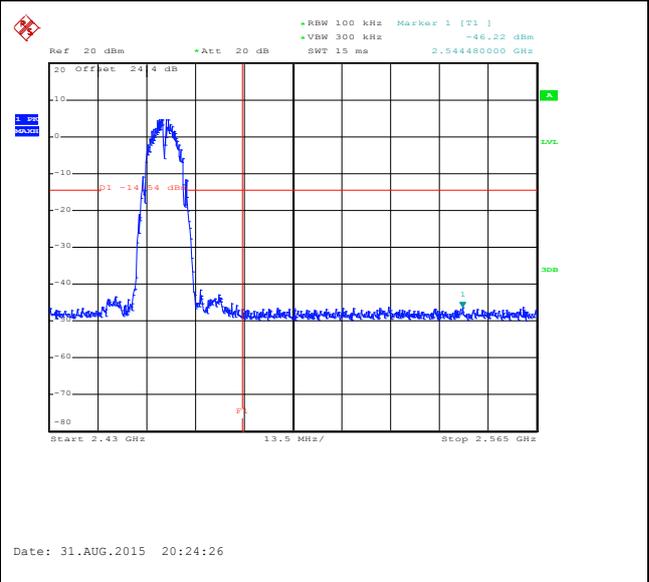

Spurious Emission 30MHz~3GHz

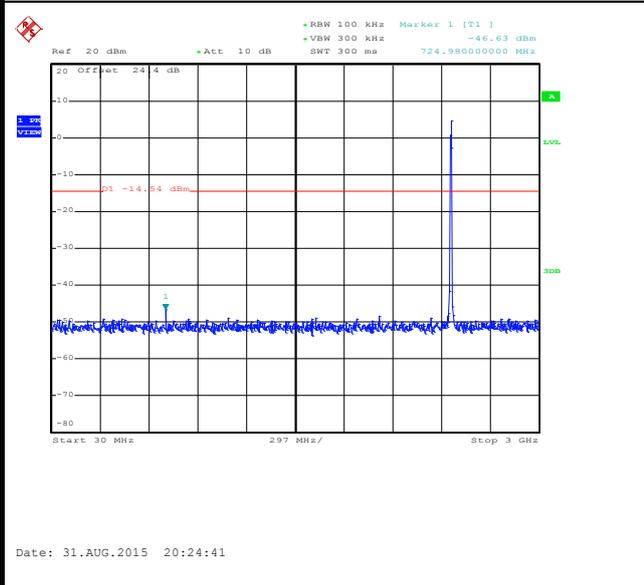

Spurious Emission 2GHz~25GHz

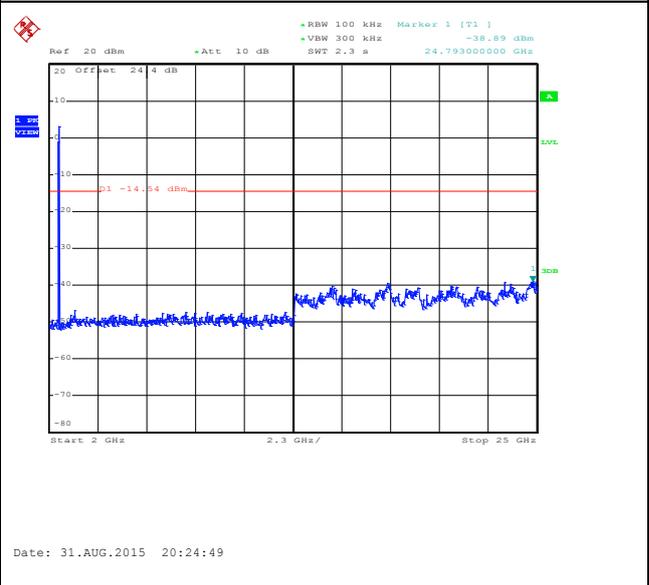




Number of TX :	1	Ant. :	1
Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	12	Test Engineer :	Osolemio Chang

WLAN 802.11b Channel 12


100kHz PSD reference Level




High Channel Plot

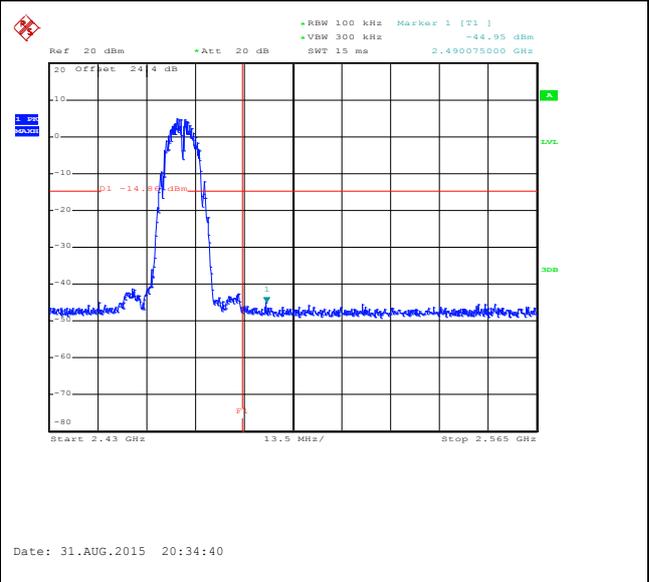

Spurious Emission 30MHz~3GHz

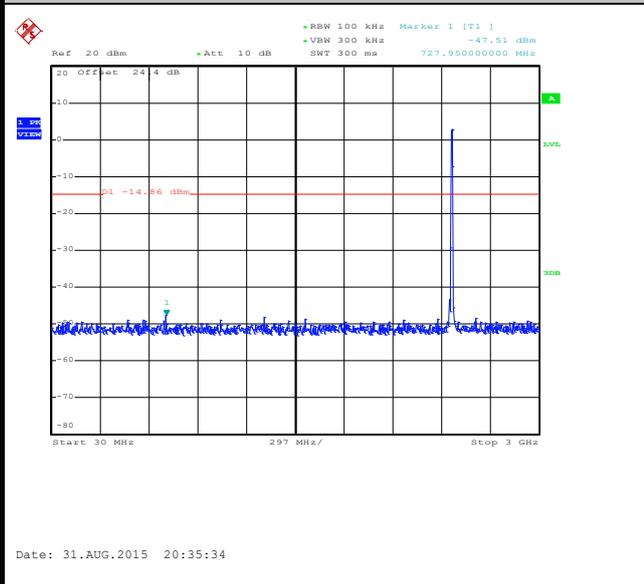

Spurious Emission 2GHz~25GHz

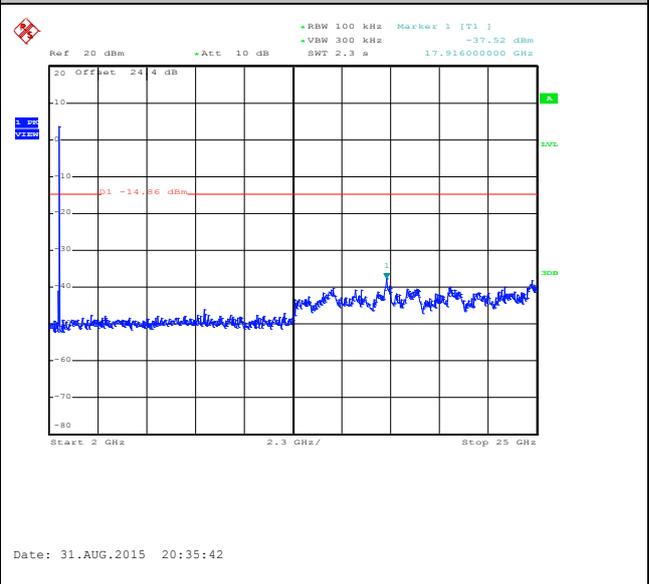





Number of TX :	1	Ant. :	1
Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	13	Test Engineer :	Osolemio Chang

WLAN 802.11b Channel 13


100kHz PSD reference Level

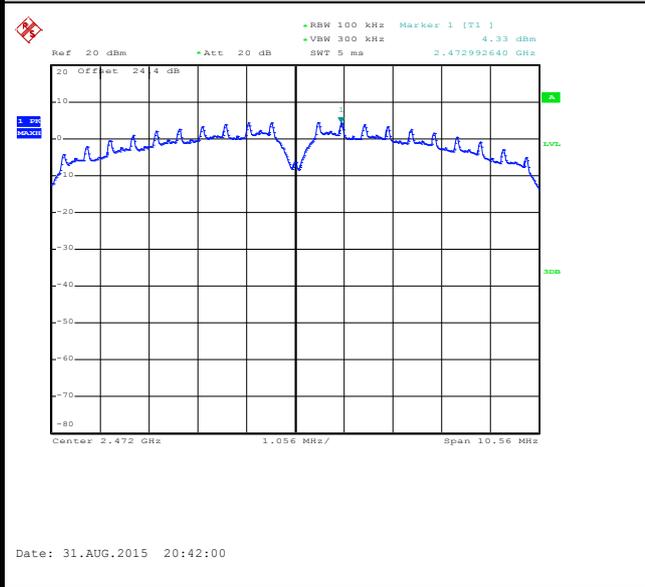


High Channel Plot

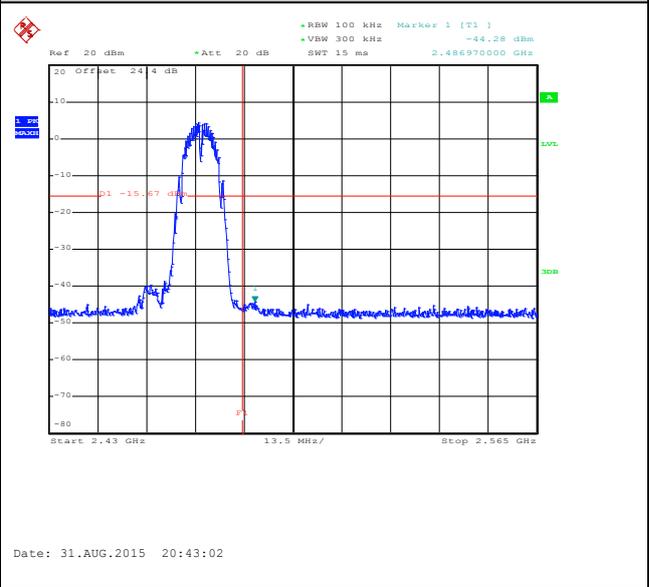

Spurious Emission 30MHz~3GHz

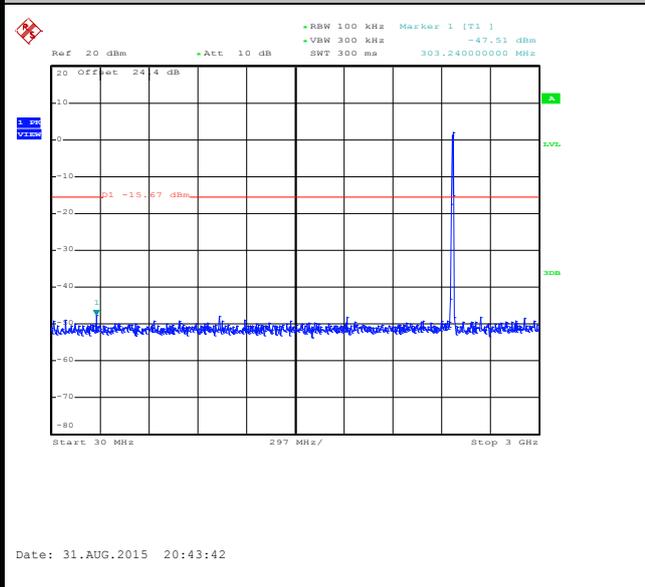

Spurious Emission 2GHz~25GHz

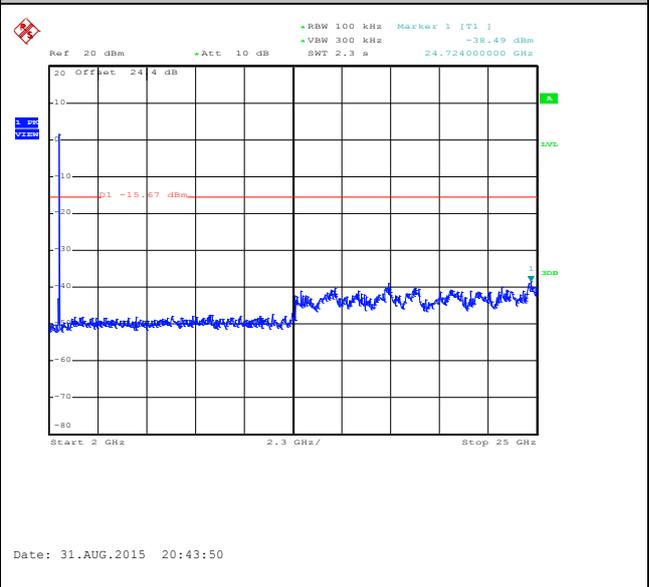




Number of TX = 1, Ant. 2 (Measured)


Number of TX	1	Ant. :	2
Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz Low	Relative Humidity :	52~53%
Test Channel :	01	Test Engineer :	Osolemio Chang

WLAN 802.11b Channel 01


100kHz PSD reference Level

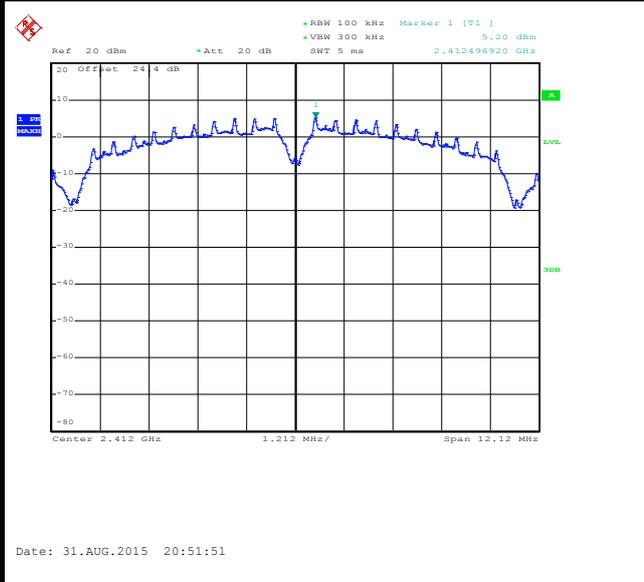


Low Channel Plot

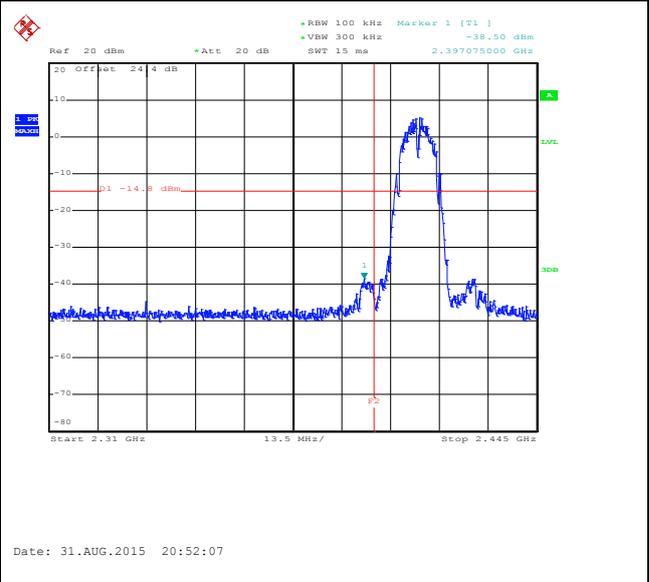

Spurious Emission 30MHz~3GHz

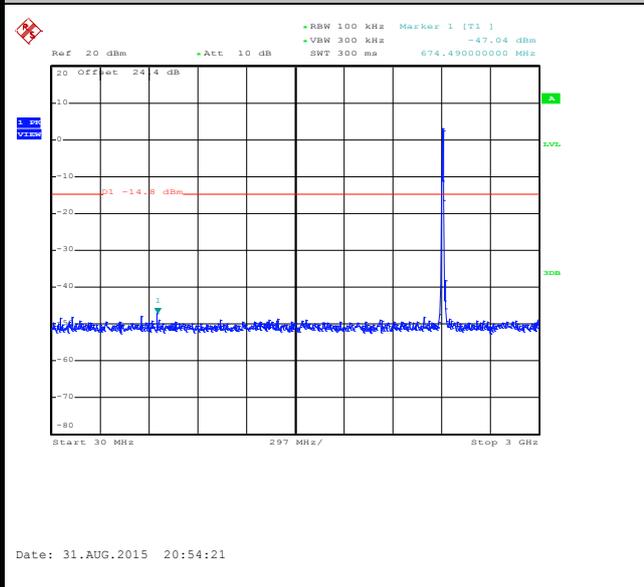

Spurious Emission 2GHz~25GHz

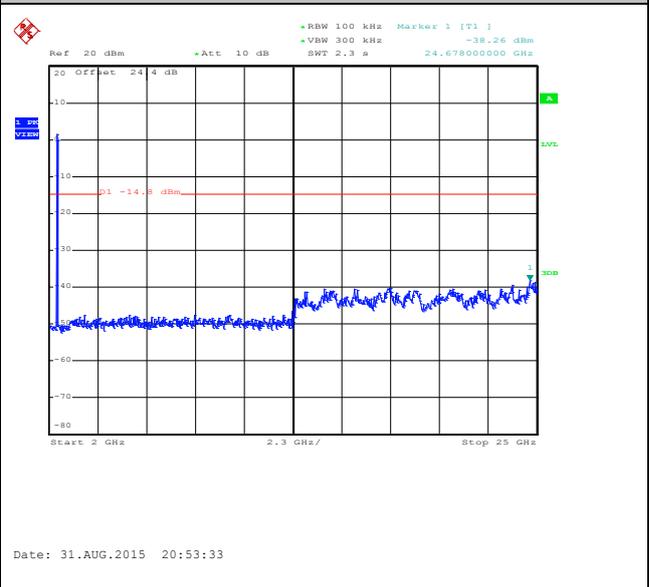





Number of TX	1	Ant. :	2
Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz Mid	Relative Humidity :	52~53%
Test Channel :	06	Test Engineer :	Osolemio Chang

WLAN 802.11b Channel 06


100kHz PSD reference Level

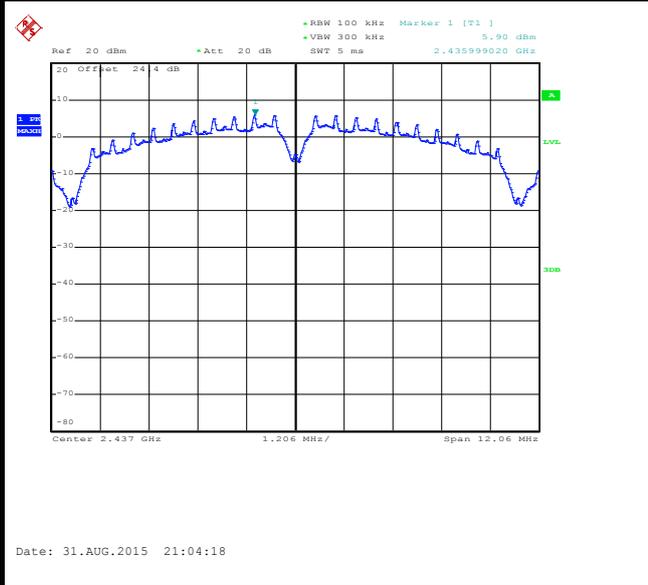

Spurious Emission 30MHz~3GHz

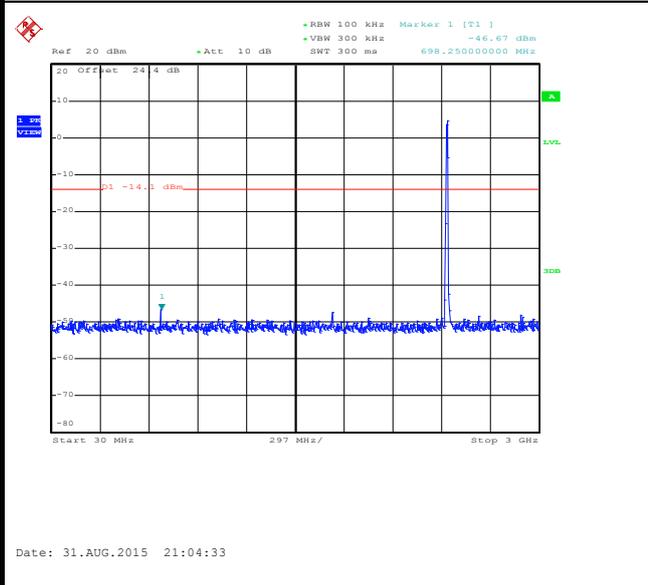

Spurious Emission 2GHz~25GHz

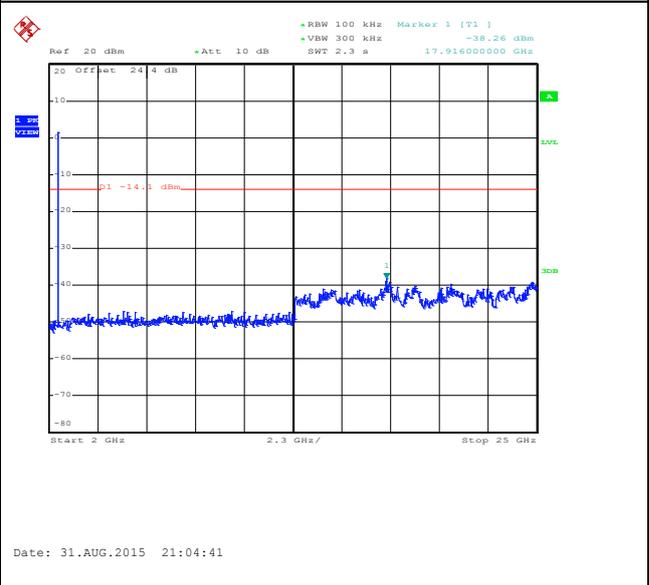





Number of TX	1	Ant. :	2
Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	11	Test Engineer :	Osolemio Chang

WLAN 802.11b Channel 11


100kHz PSD reference Level

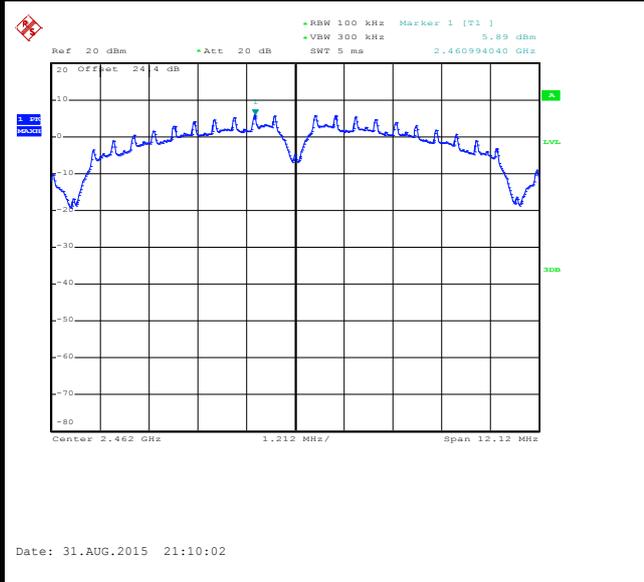


High Channel Plot

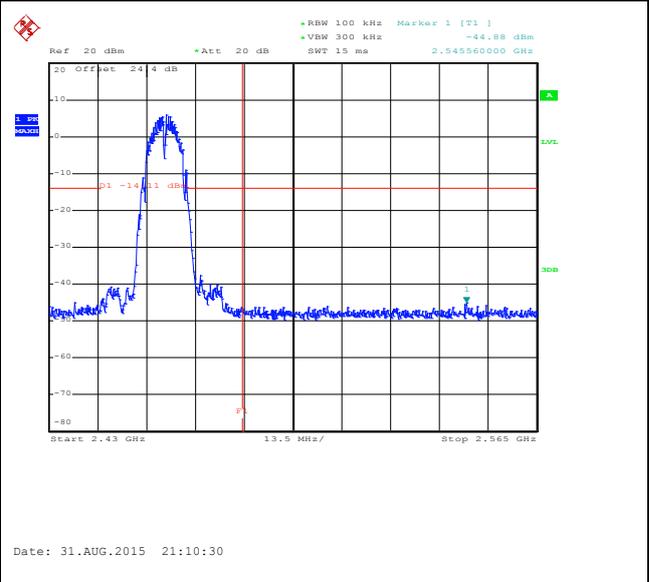

Spurious Emission 30MHz~3GHz

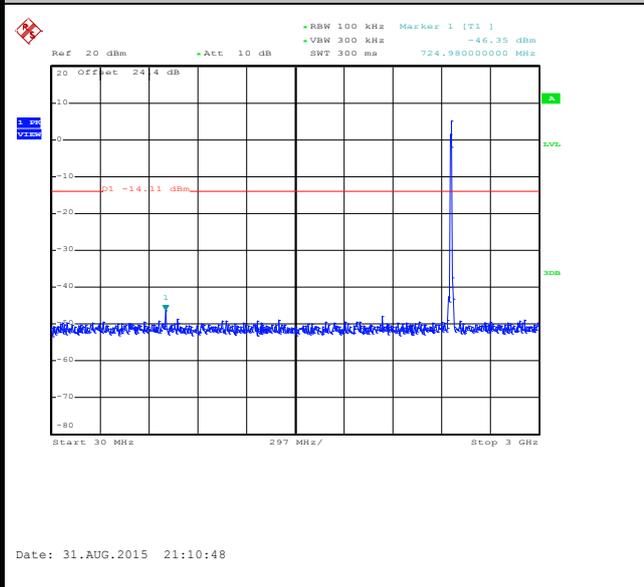

Spurious Emission 2GHz~25GHz

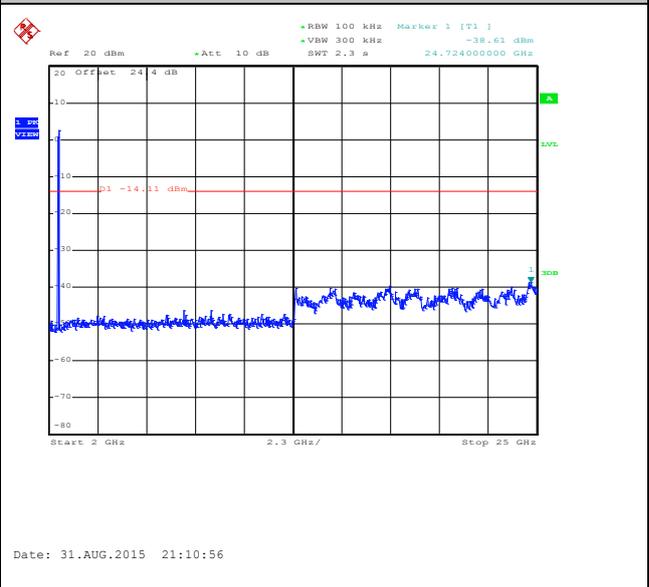





Number of TX	1	Ant. :	2
Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	12	Test Engineer :	Osolemio Chang

WLAN 802.11b Channel 12


100kHz PSD reference Level

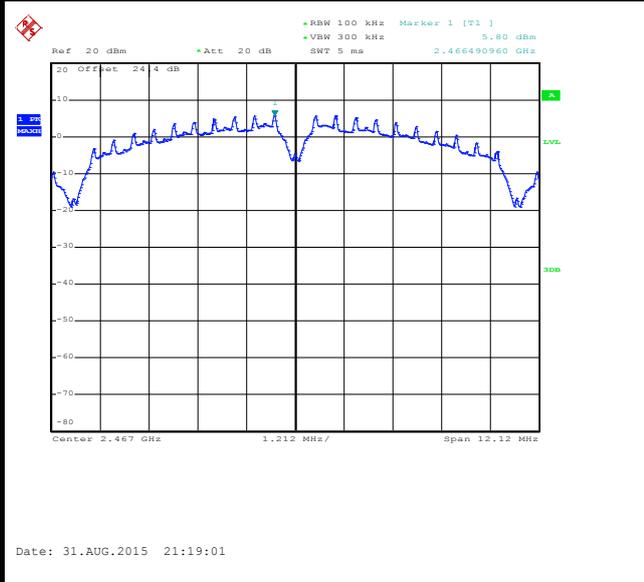


High Channel Plot

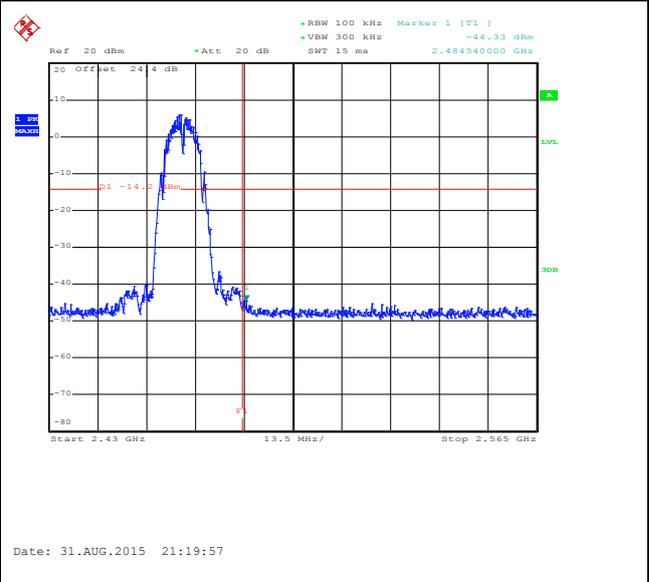

Spurious Emission 30MHz~3GHz

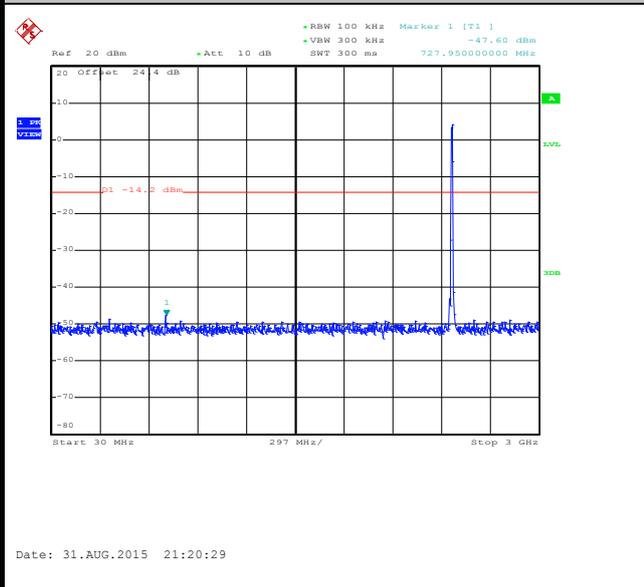

Spurious Emission 2GHz~25GHz

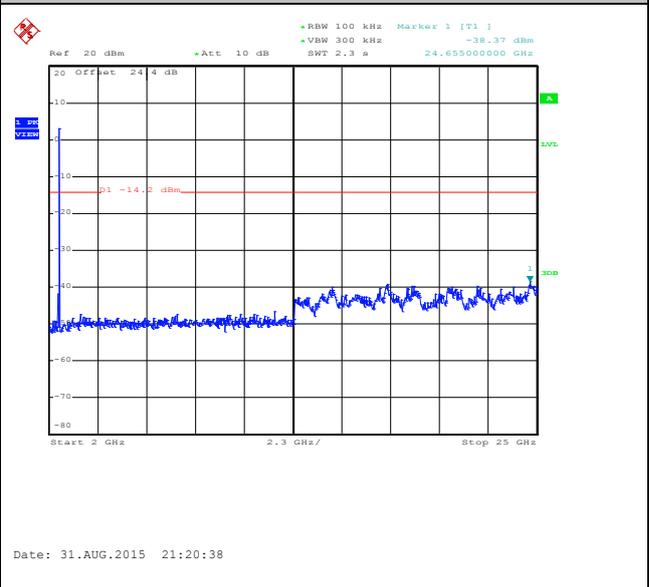





Number of TX	1	Ant. :	2
Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	13	Test Engineer :	Osolemio Chang

WLAN 802.11b Channel 13


100kHz PSD reference Level

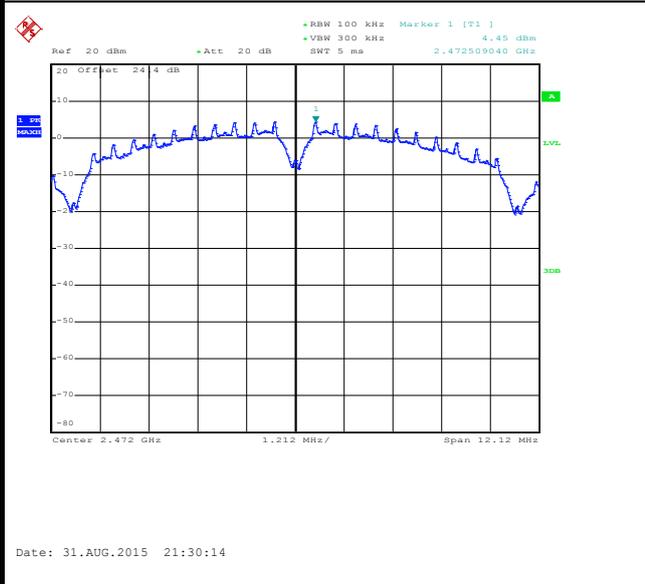


High Channel Plot

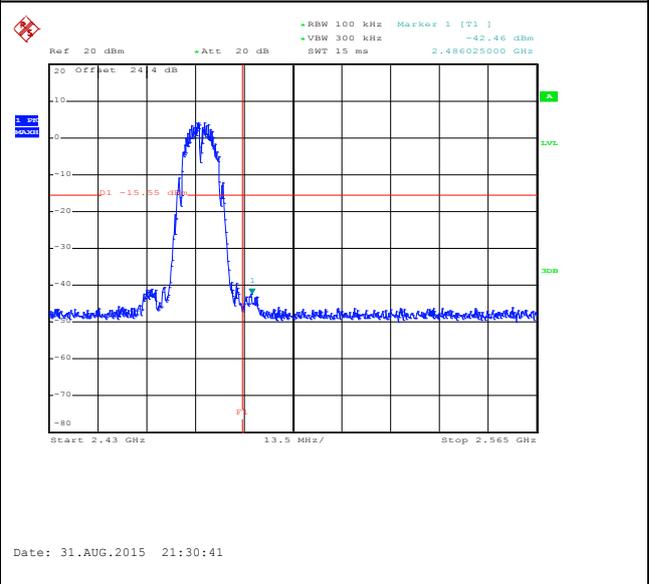

Spurious Emission 30MHz~3GHz

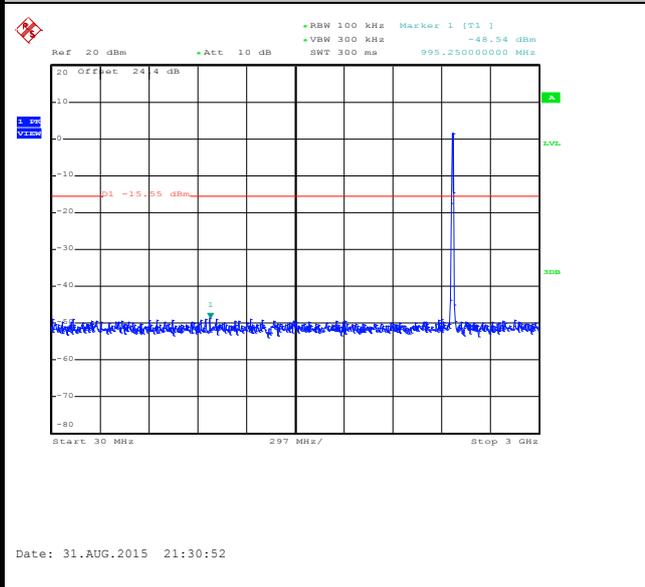

Spurious Emission 2GHz~25GHz

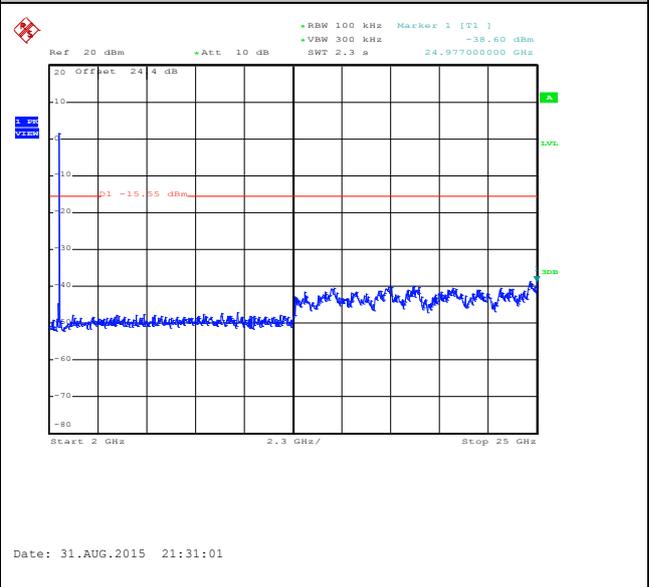



Number of TX = 2, Ant. 1(Measured)


Number of TX :	2	Ant. :	1
Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz Low	Relative Humidity :	52~53%
Test Channel :	01	Test Engineer :	Osolemio Chang

WLAN 802.11g Channel 01


100kHz PSD reference Level




Low Channel Plot

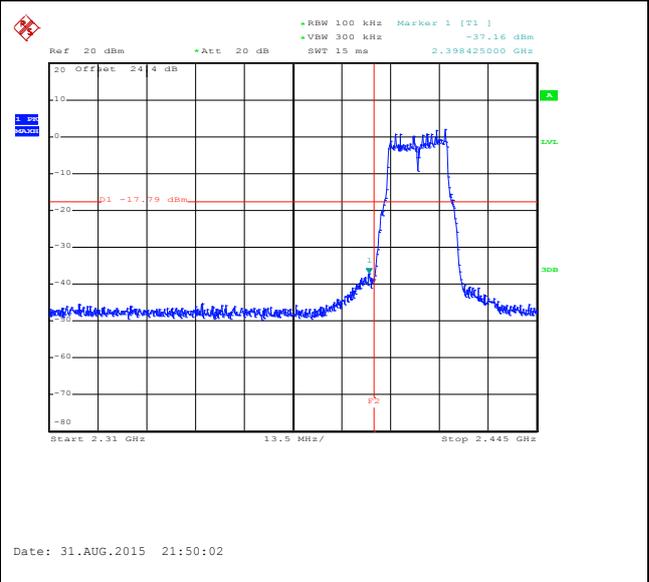

Spurious Emission 30MHz~3GHz

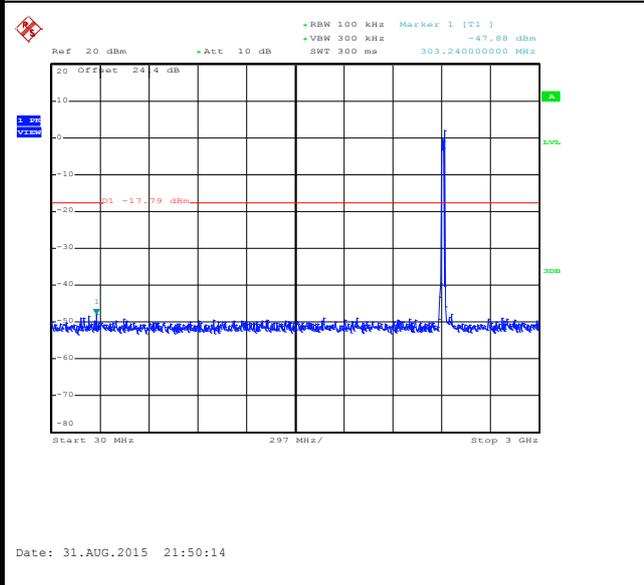

Spurious Emission 2GHz~25GHz

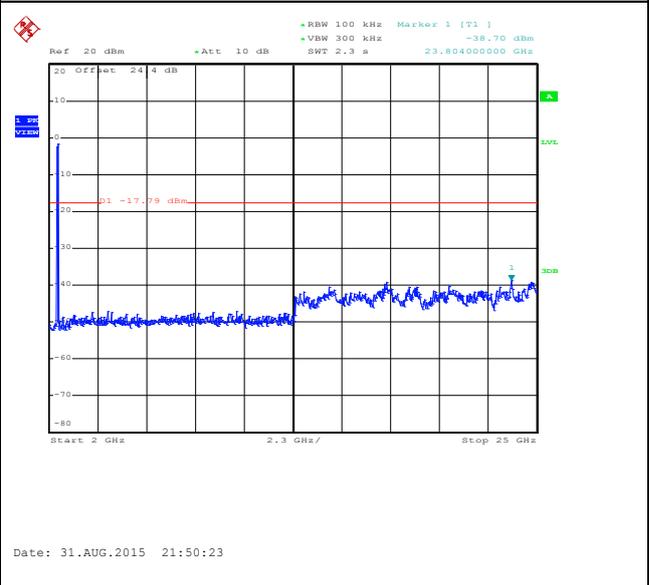




Number of TX :	2	Ant. :	1
Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz Mid	Relative Humidity :	52~53%
Test Channel :	06	Test Engineer :	Osolemio Chang

WLAN 802.11g Channel 06


100kHz PSD reference Level



Spurious Emission 30MHz~3GHz

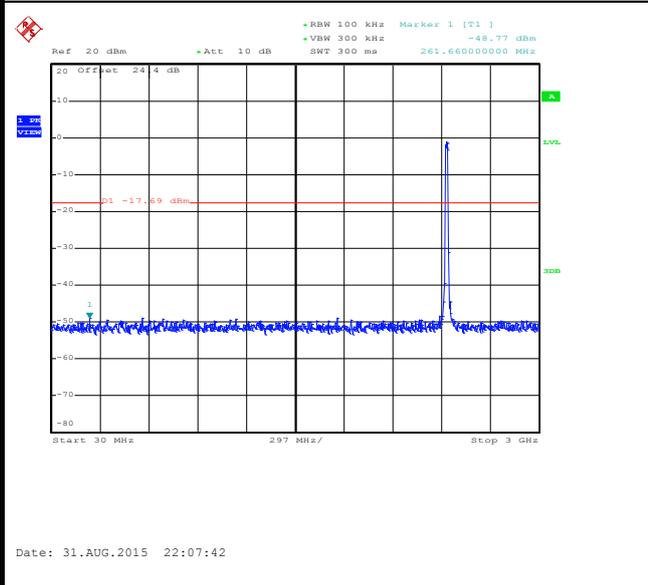

Spurious Emission 2GHz~25GHz

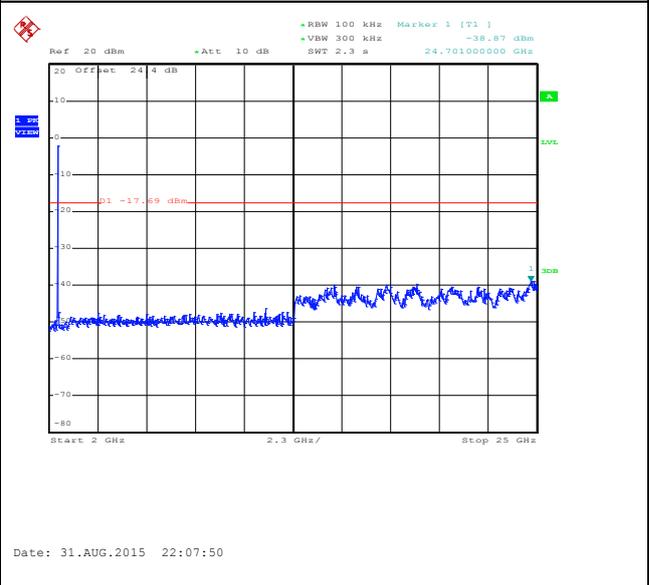




Number of TX :	2	Ant. :	1
Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	11	Test Engineer :	Osolemio Chang

WLAN 802.11g Channel 11


100kHz PSD reference Level




High Channel Plot

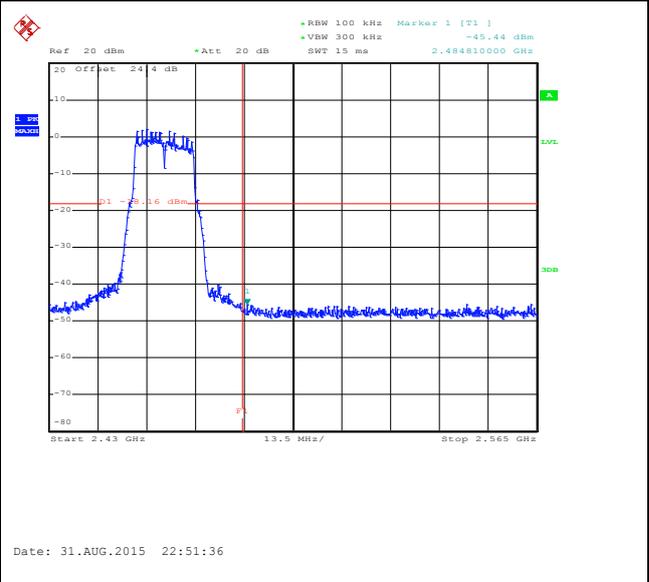

Spurious Emission 30MHz~3GHz

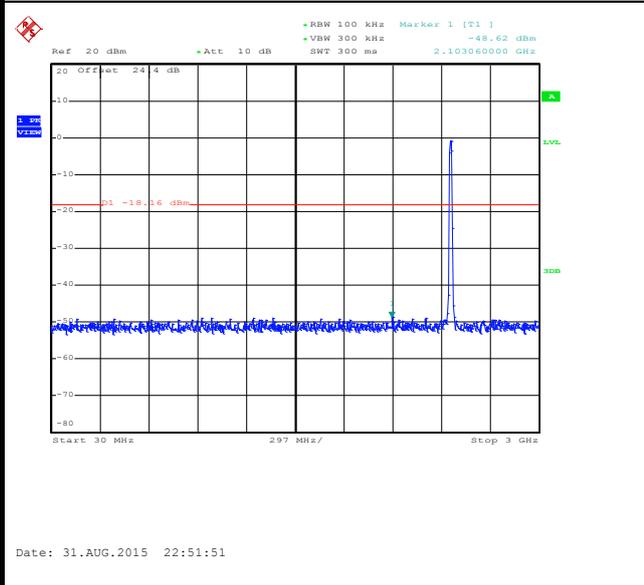

Spurious Emission 2GHz~25GHz

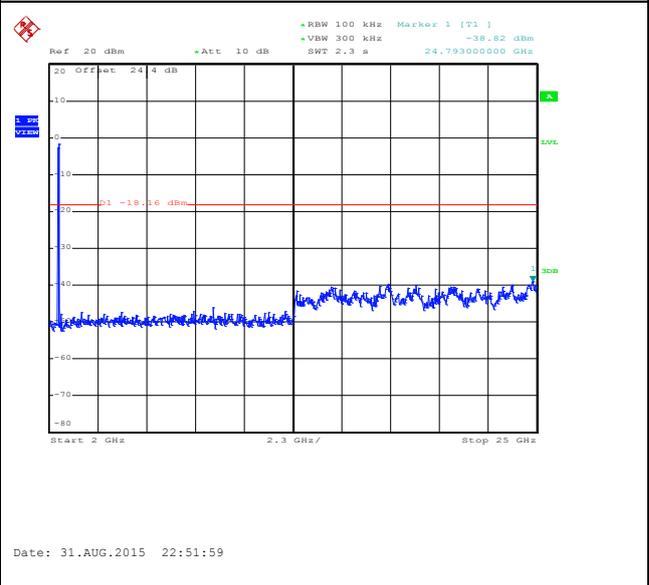





Number of TX :	2	Ant. :	1
Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	12	Test Engineer :	Osolemio Chang

WLAN 802.11g Channel 12


100kHz PSD reference Level

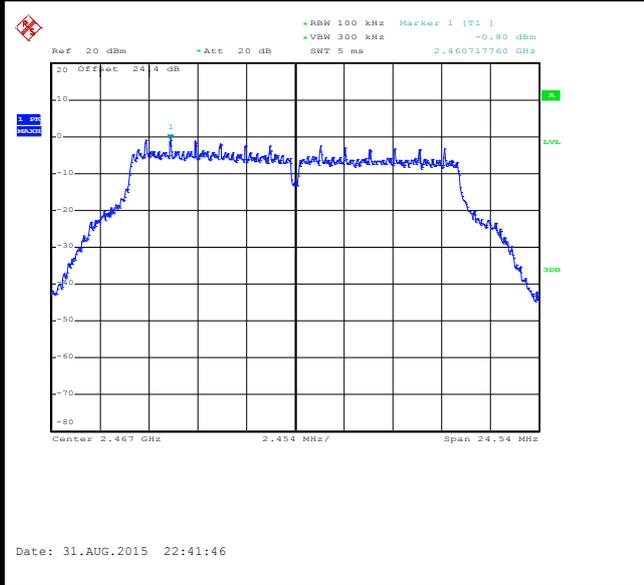


High Channel Plot

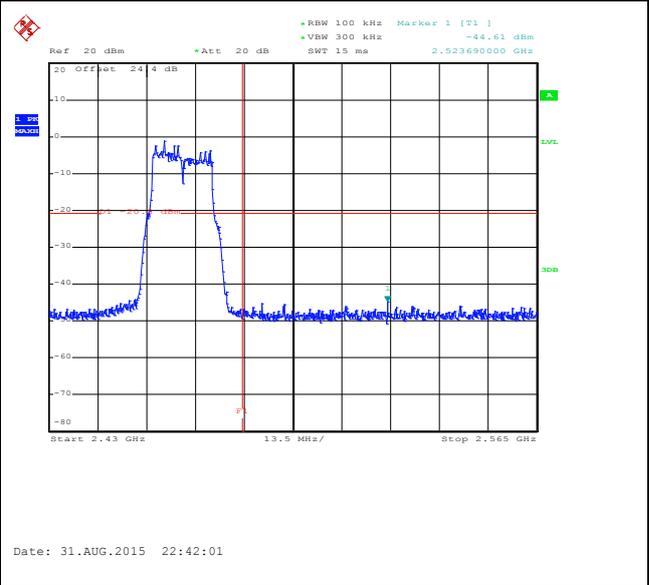

Spurious Emission 30MHz~3GHz

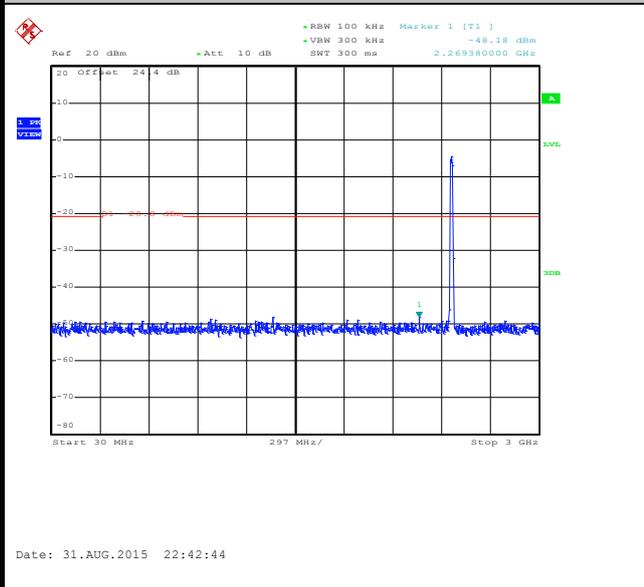

Spurious Emission 2GHz~25GHz

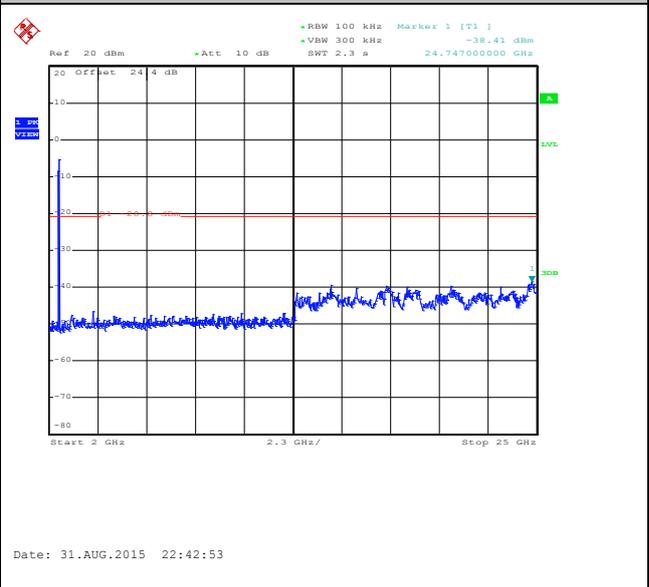





Number of TX :	2	Ant. :	1
Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	13	Test Engineer :	Osolemio Chang

WLAN 802.11g Channel 13


100kHz PSD reference Level

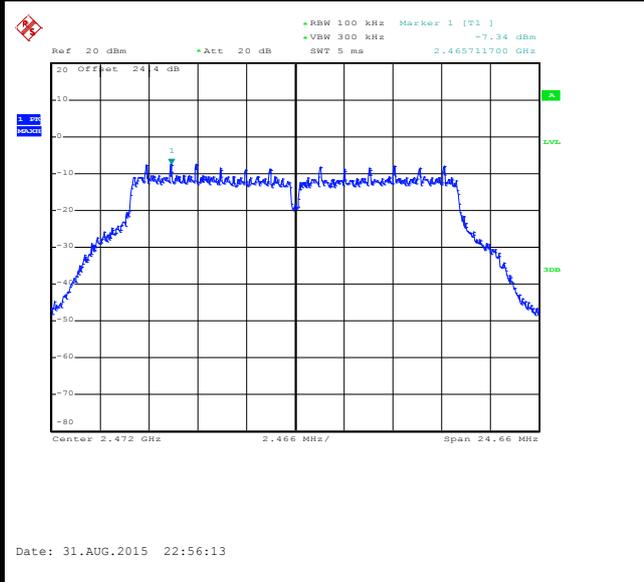


High Channel Plot

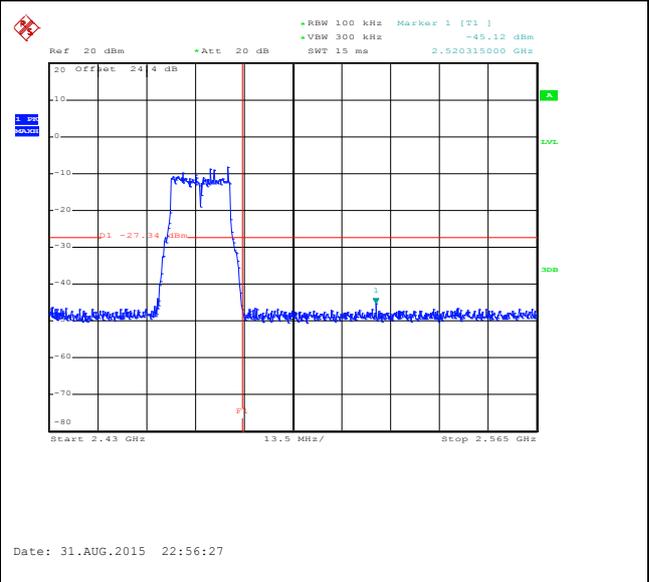

Spurious Emission 30MHz~3GHz

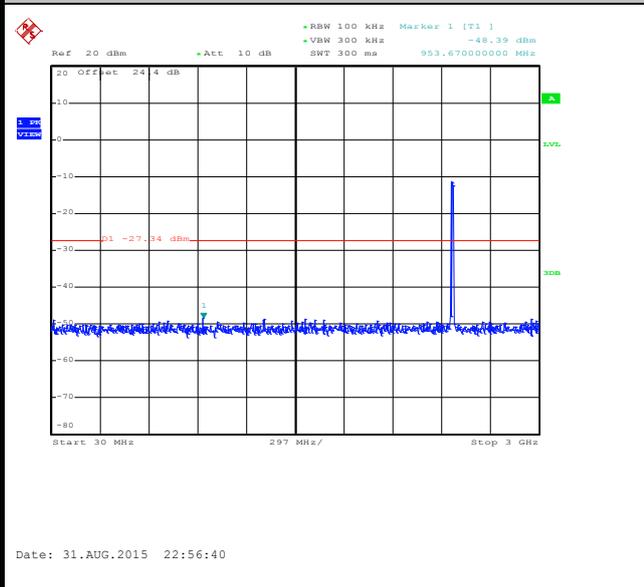

Spurious Emission 2GHz~25GHz

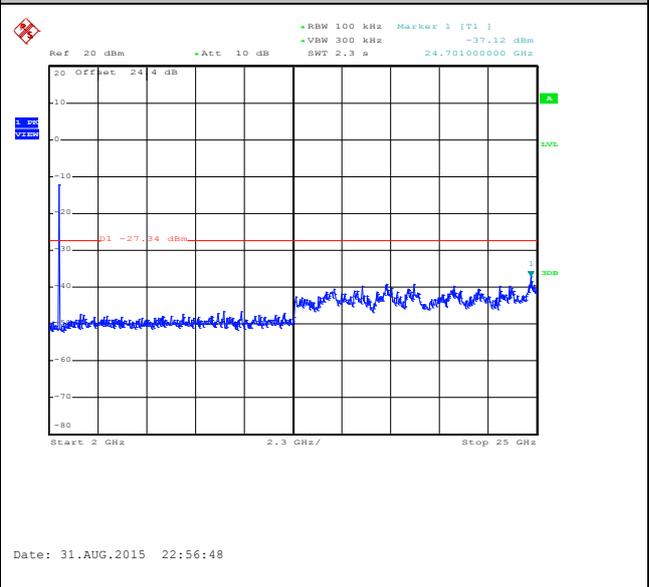





Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz Low	Relative Humidity :	52~53%
Test Channel :	01	Test Engineer :	Osolemio Chang

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

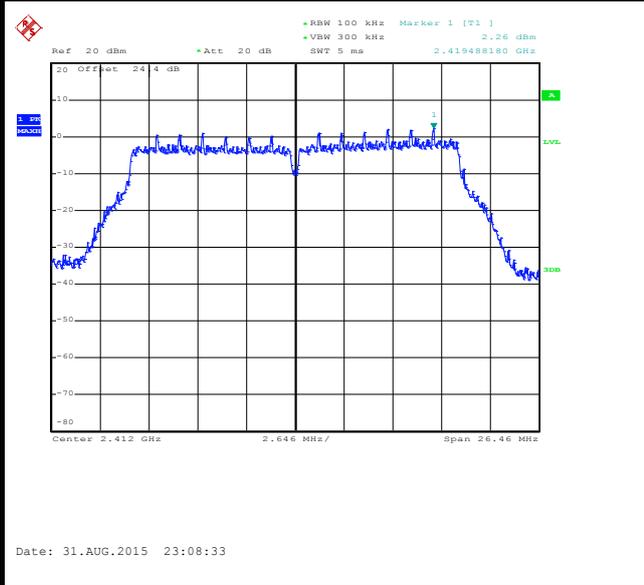


Low Channel Plot

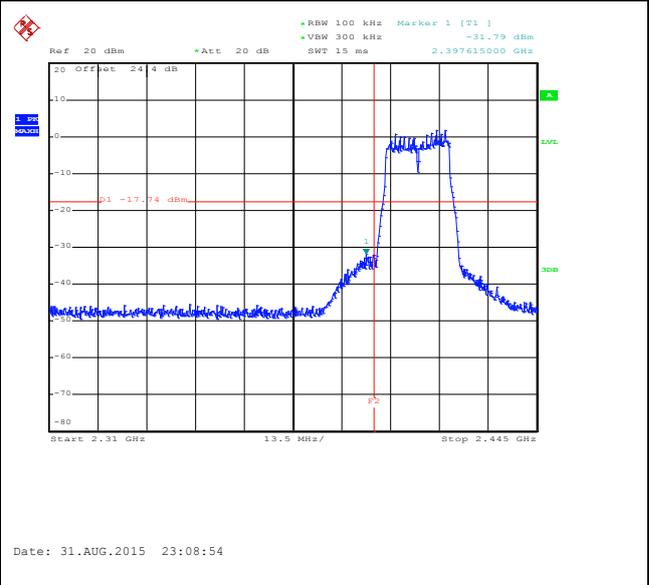

Spurious Emission 30MHz~3GHz

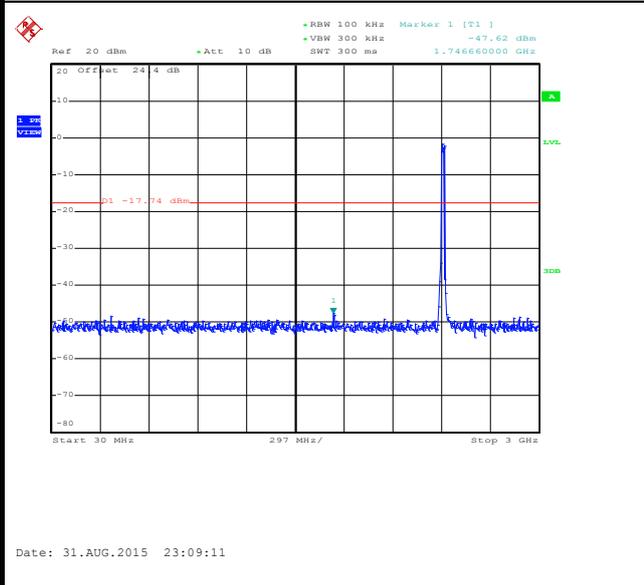

Spurious Emission 2GHz~25GHz

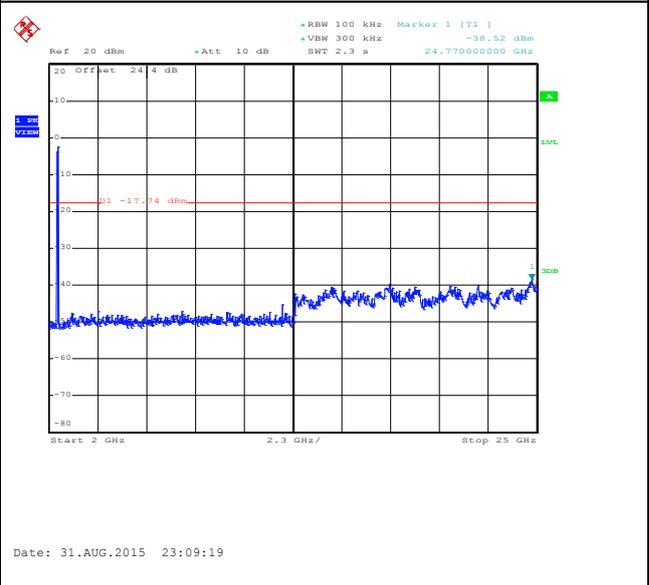




Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz Mid	Relative Humidity :	52~53%
Test Channel :	06	Test Engineer :	Osolemio Chang

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level



Spurious Emission 30MHz~3GHz

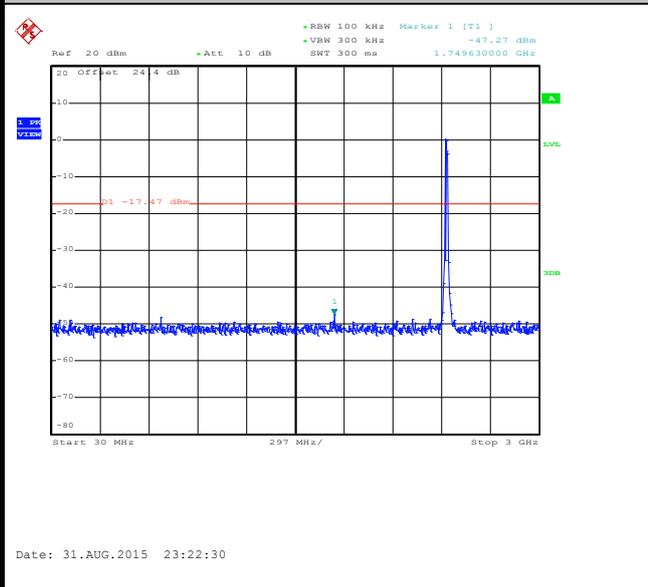


Spurious Emission 2GHz~25GHz

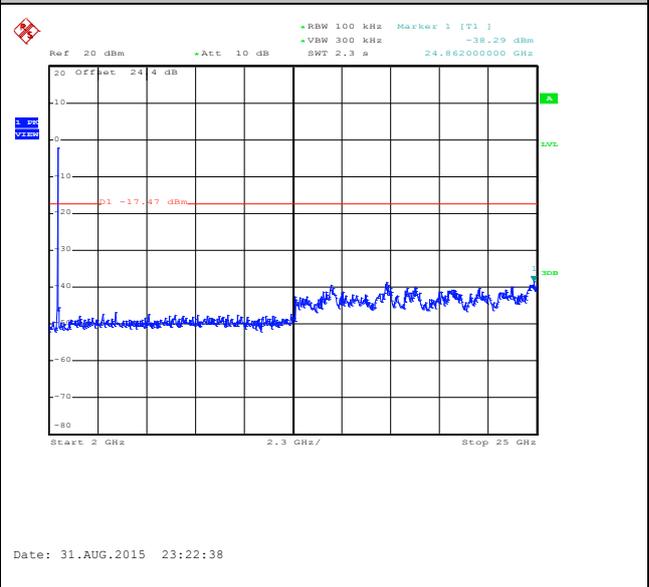




Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	11	Test Engineer :	Osolemio Chang

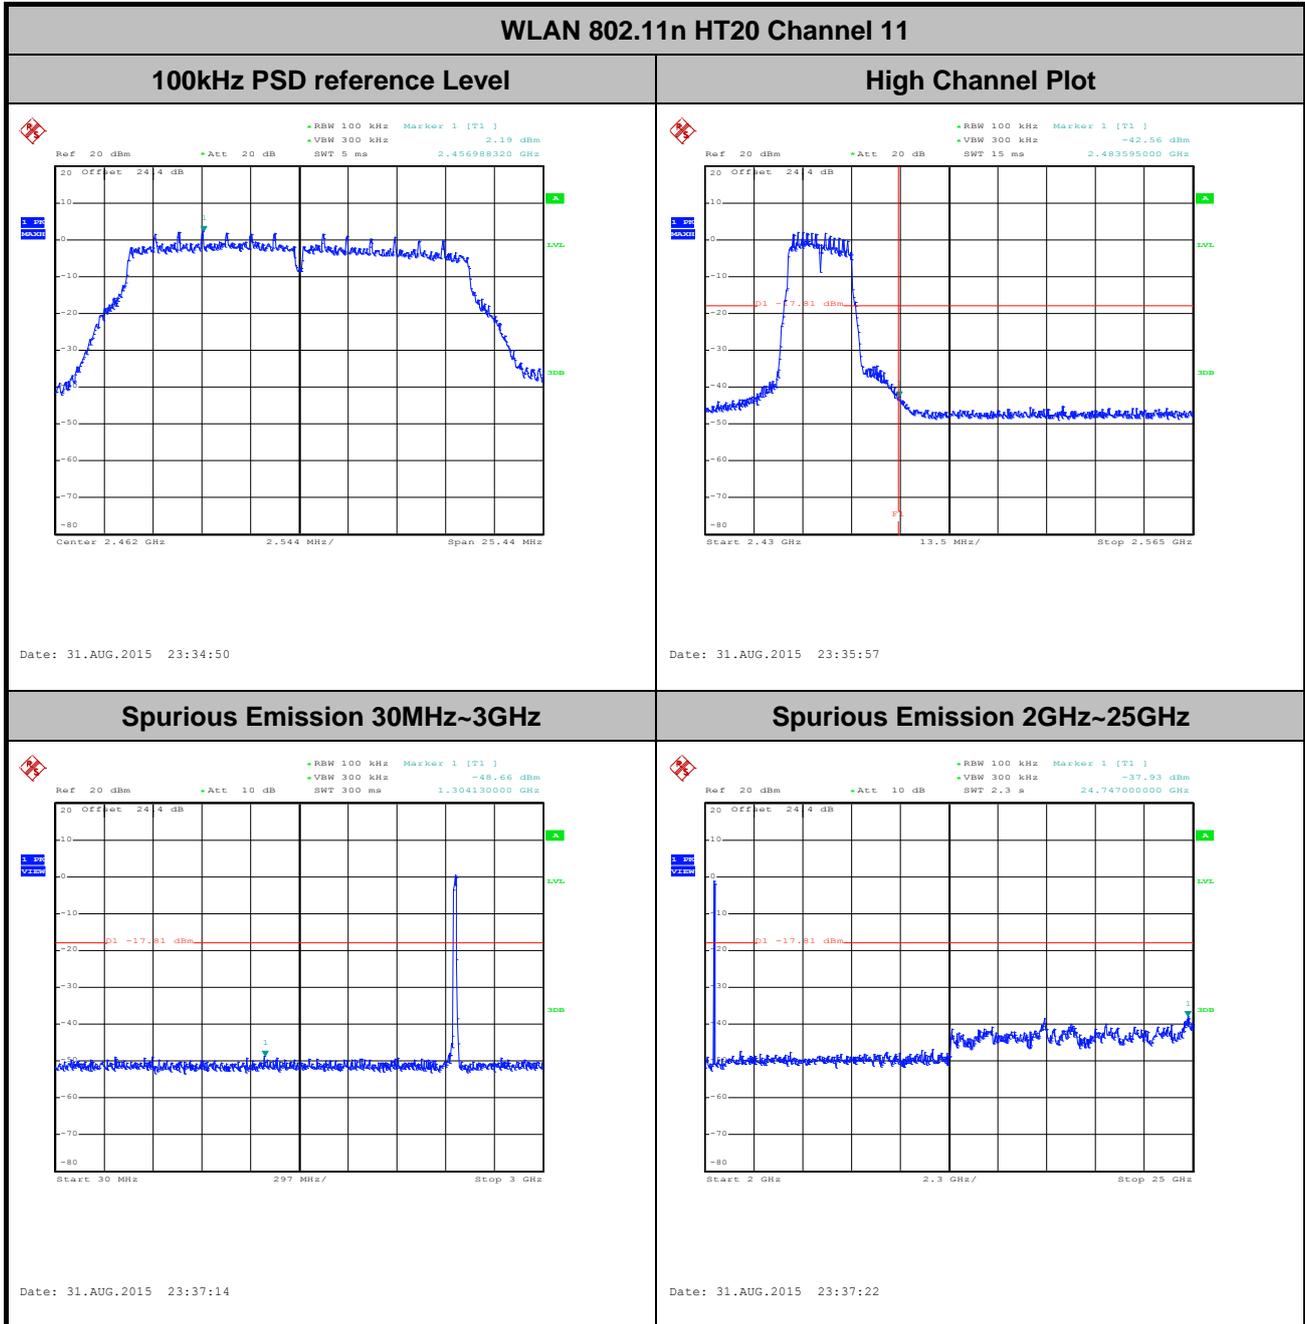




Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	12	Test Engineer :	Osolemio Chang

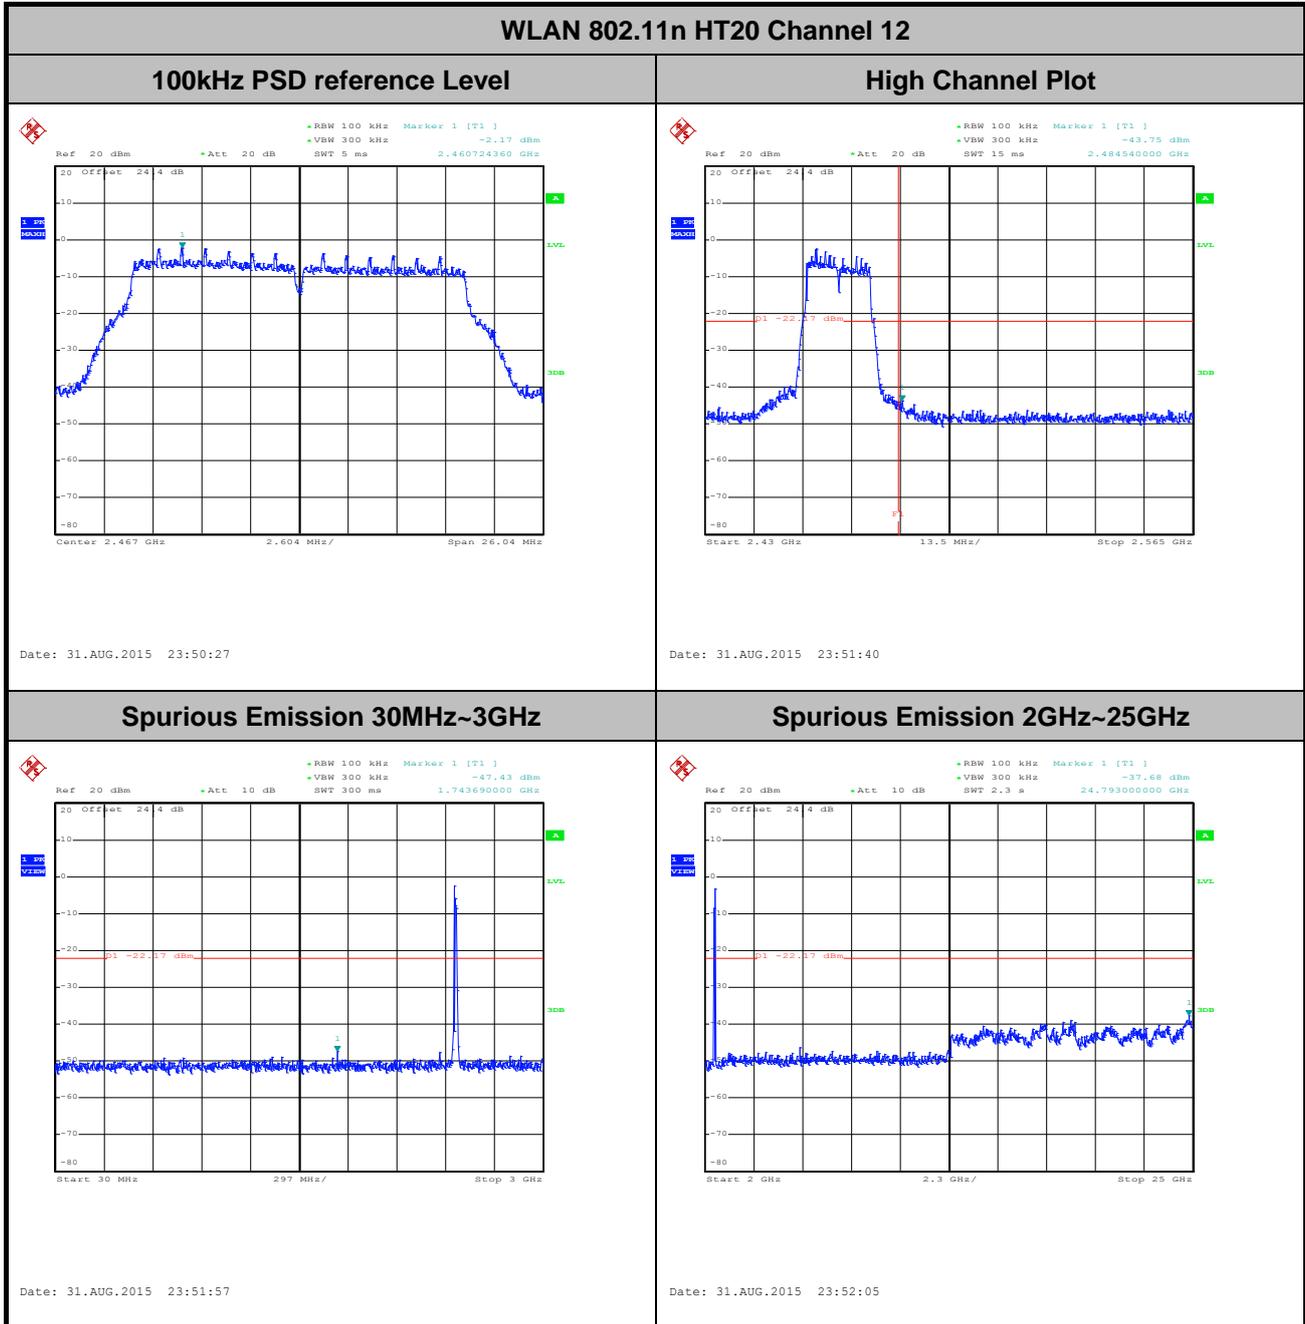



Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	13	Test Engineer :	Osolemio Chang

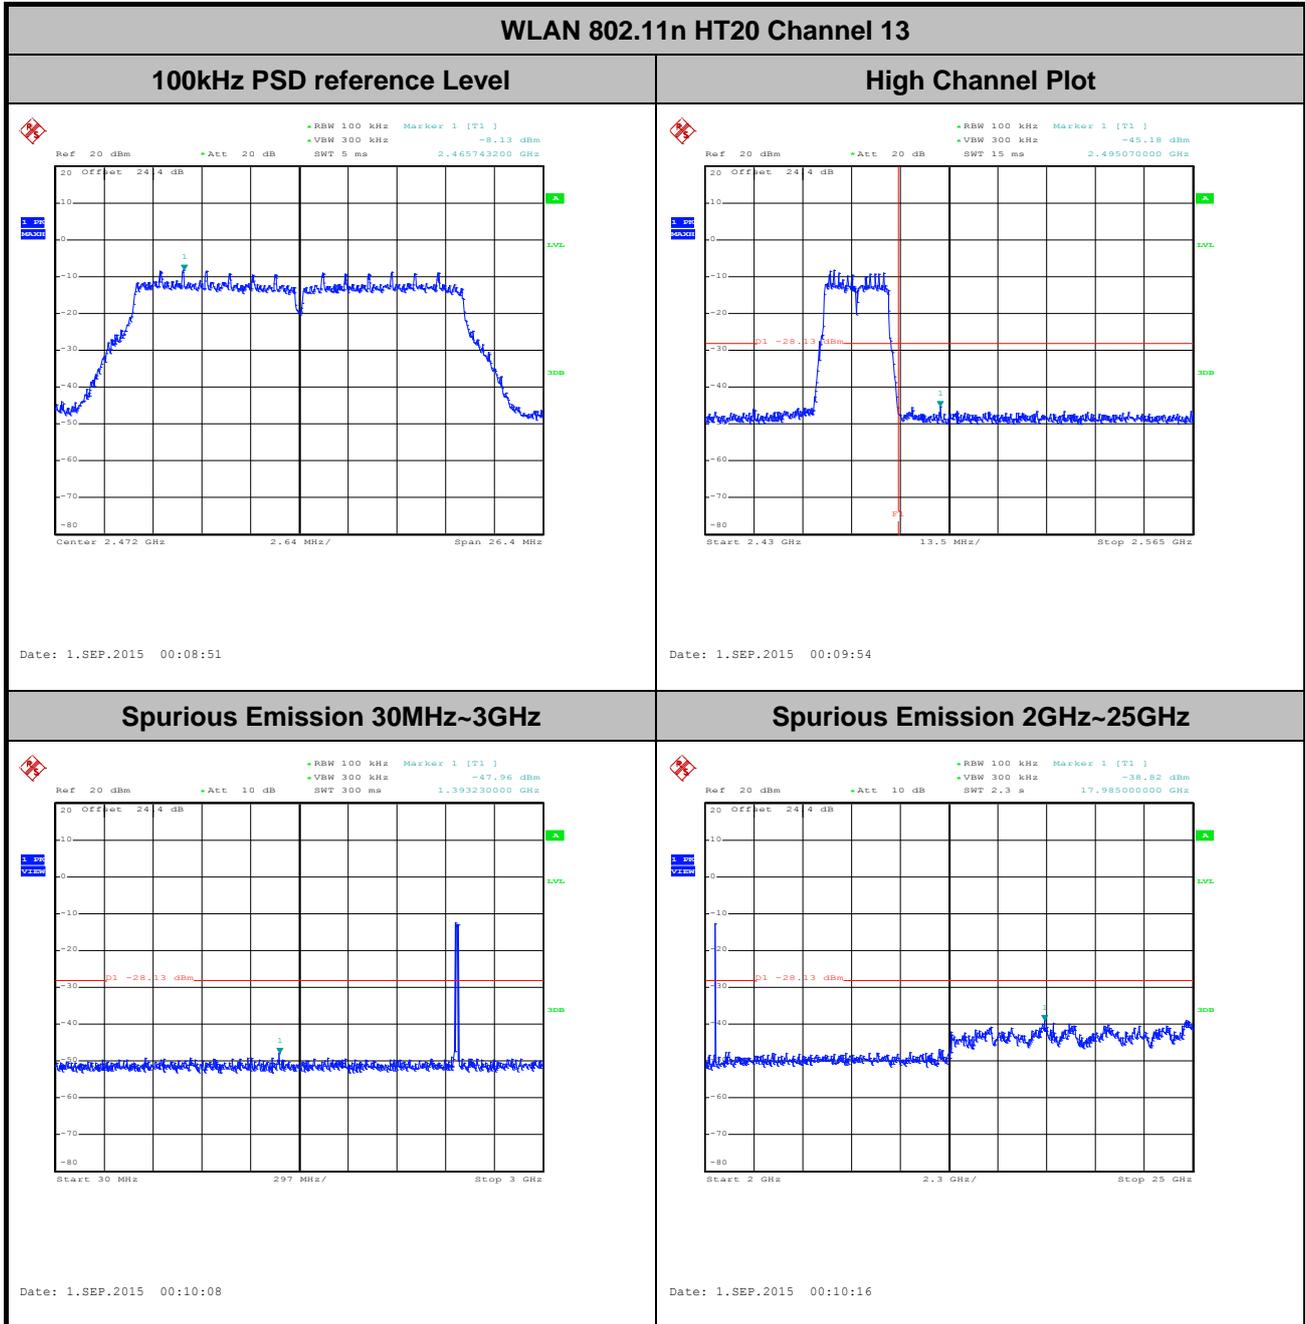




Number of TX = 2, Ant. 2 (Measured)


Number of TX :	2	Ant. :	2
Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz Low	Relative Humidity :	52~53%
Test Channel :	01	Test Engineer :	Osolemio Chang

WLAN 802.11g Channel 01


100kHz PSD reference Level

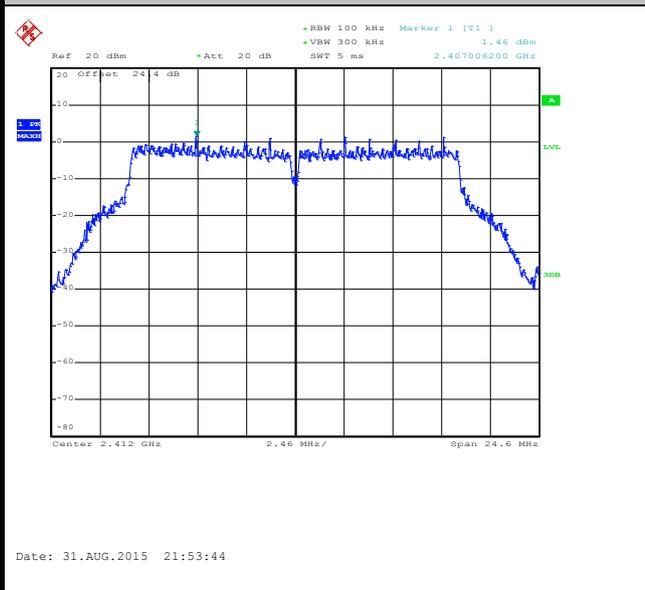


Low Channel Plot

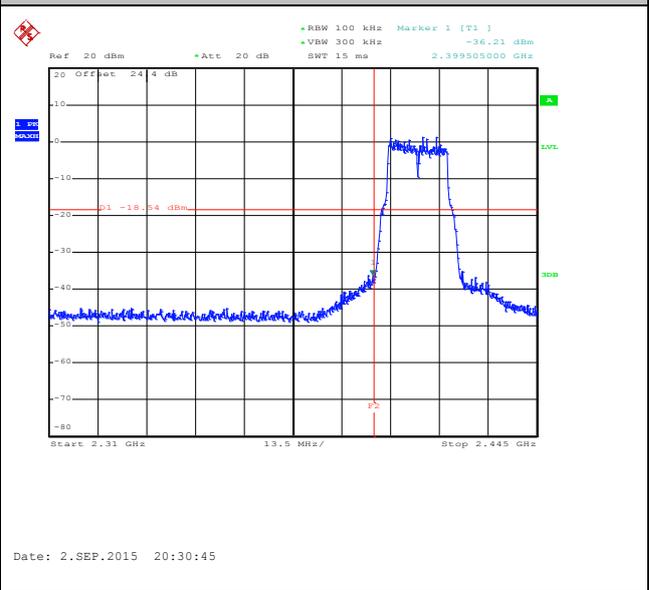

Spurious Emission 30MHz~3GHz

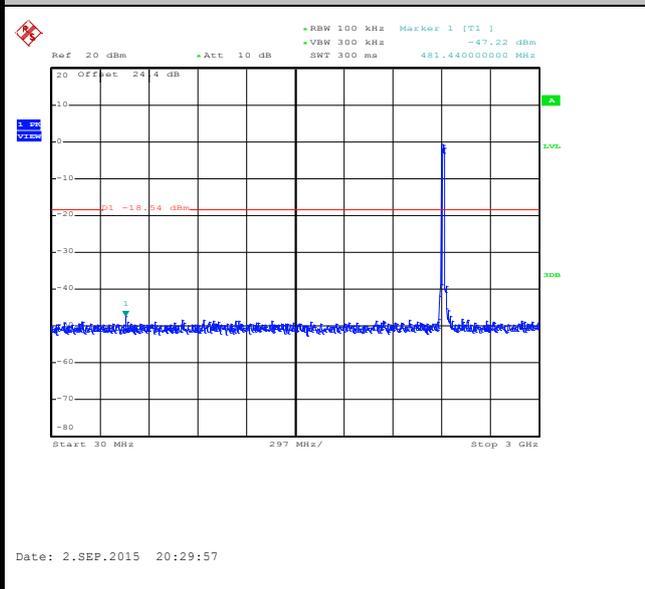

Spurious Emission 2GHz~25GHz

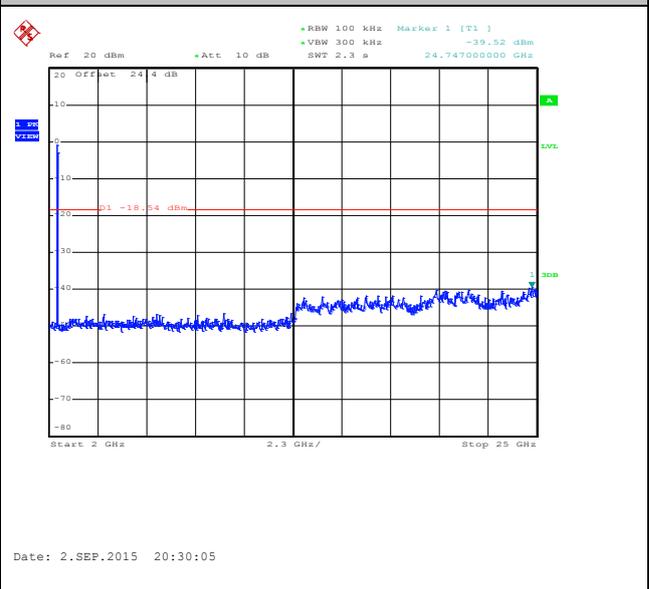




Number of TX :	2	Ant. :	2
Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz Mid	Relative Humidity :	52~53%
Test Channel :	06	Test Engineer :	Osolemio Chang

WLAN 802.11g Channel 06


100kHz PSD reference Level



Spurious Emission 30MHz~3GHz

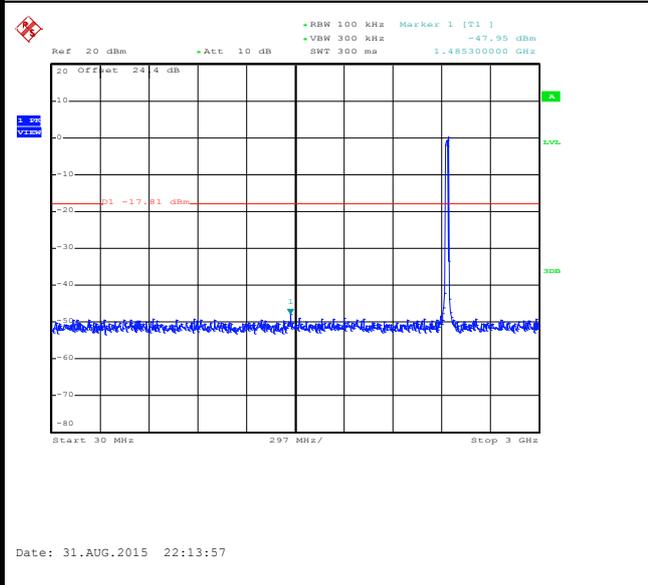

Spurious Emission 2GHz~25GHz

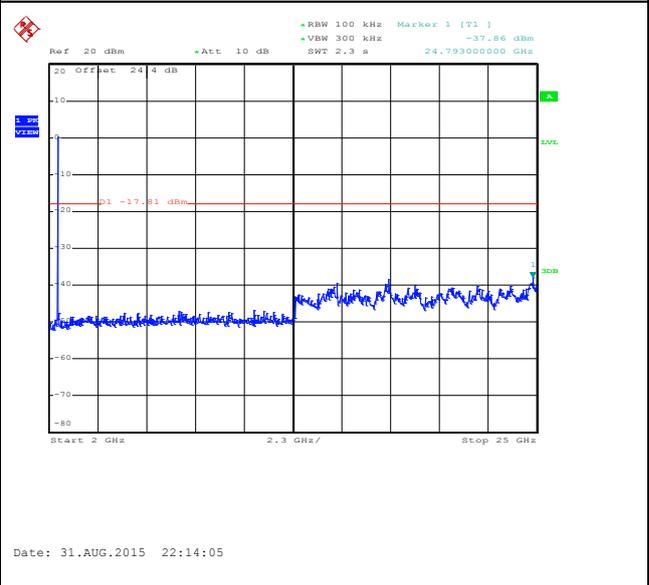




Number of TX :	2	Ant. :	2
Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	11	Test Engineer :	Osolemio Chang

WLAN 802.11g Channel 11


100kHz PSD reference Level




High Channel Plot

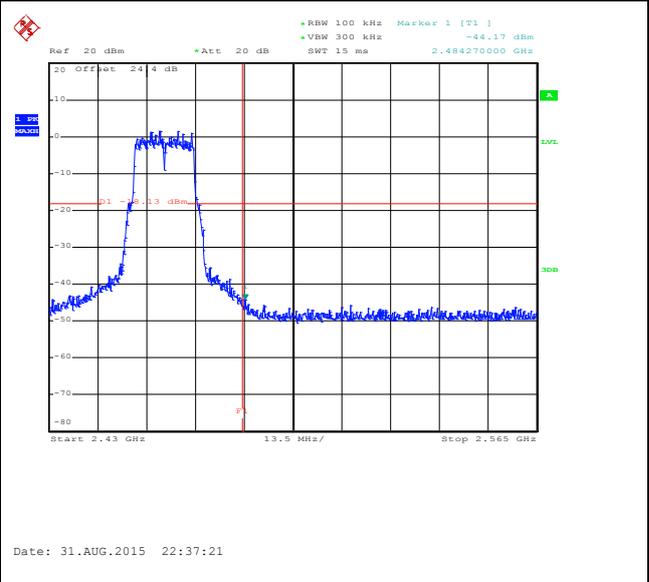

Spurious Emission 30MHz~3GHz

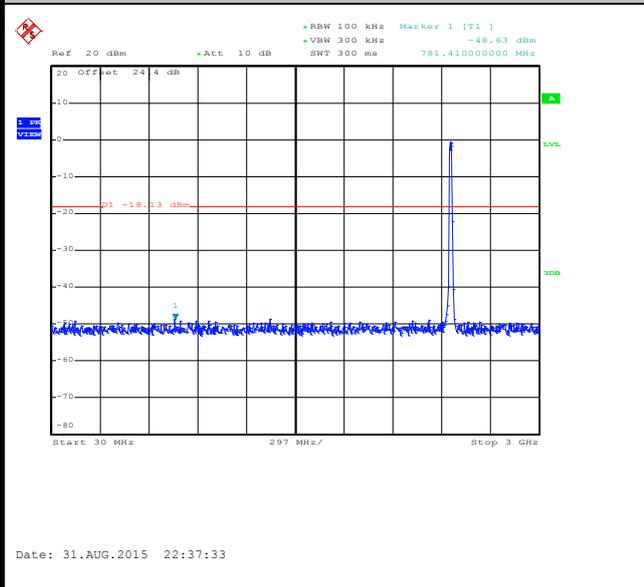

Spurious Emission 2GHz~25GHz

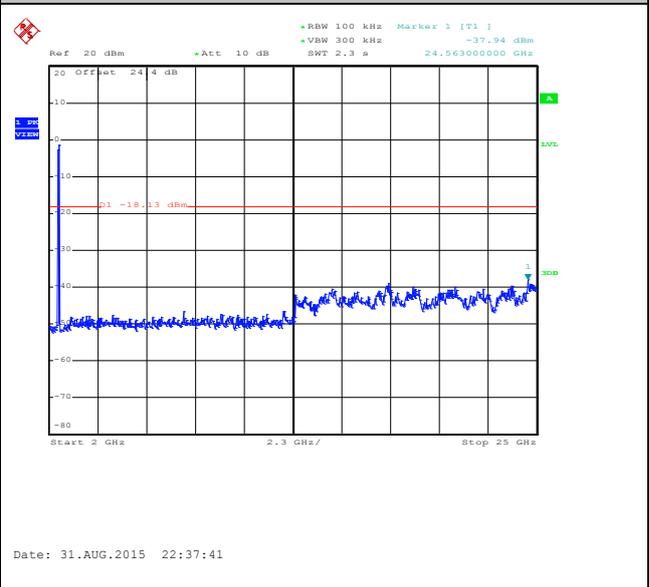




Number of TX :	2	Ant. :	2
Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	12	Test Engineer :	Osolemio Chang

WLAN 802.11g Channel 12


100kHz PSD reference Level




High Channel Plot

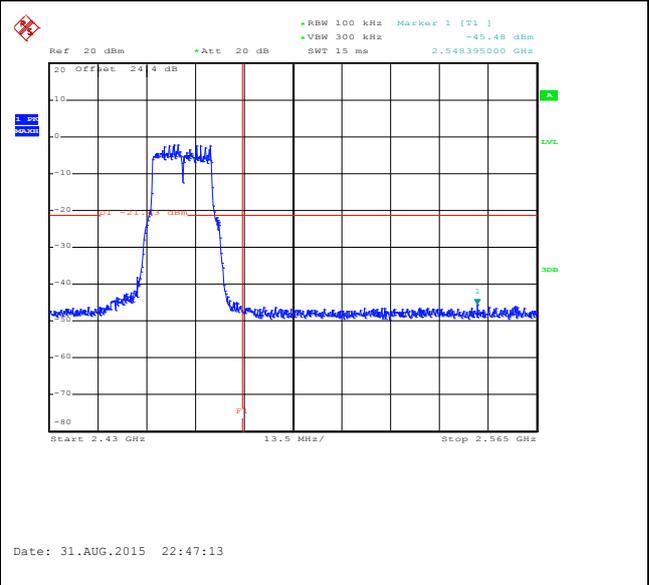

Spurious Emission 30MHz~3GHz

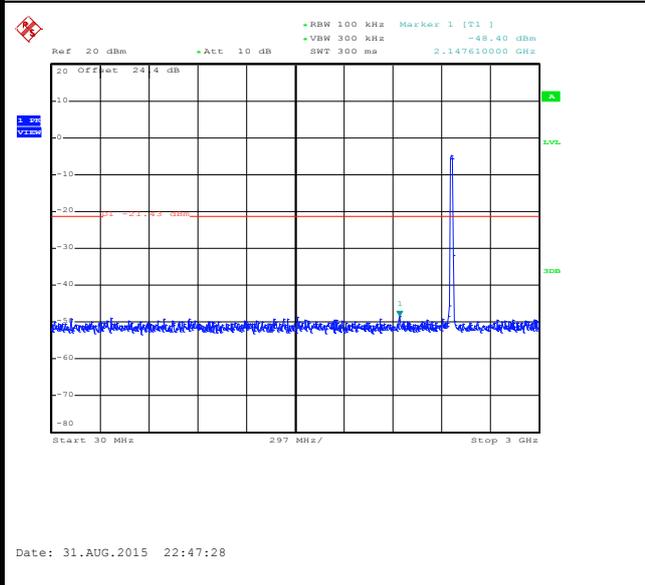

Spurious Emission 2GHz~25GHz

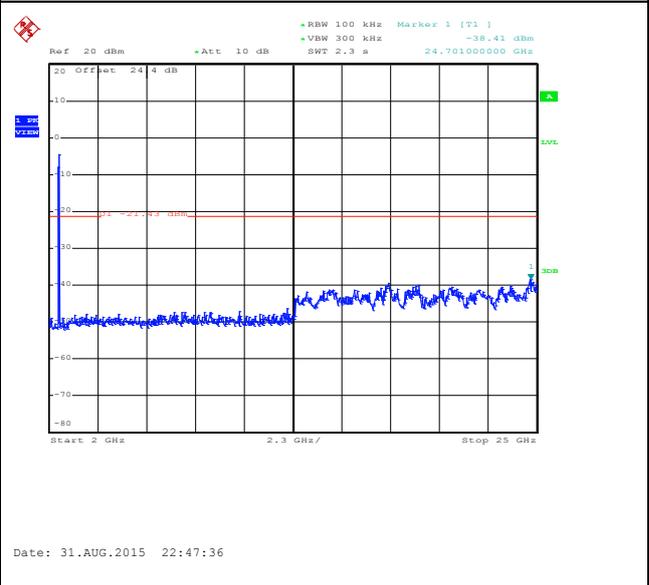





Number of TX :	2	Ant. :	2
Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	13	Test Engineer :	Osolemio Chang

WLAN 802.11g Channel 13


100kHz PSD reference Level

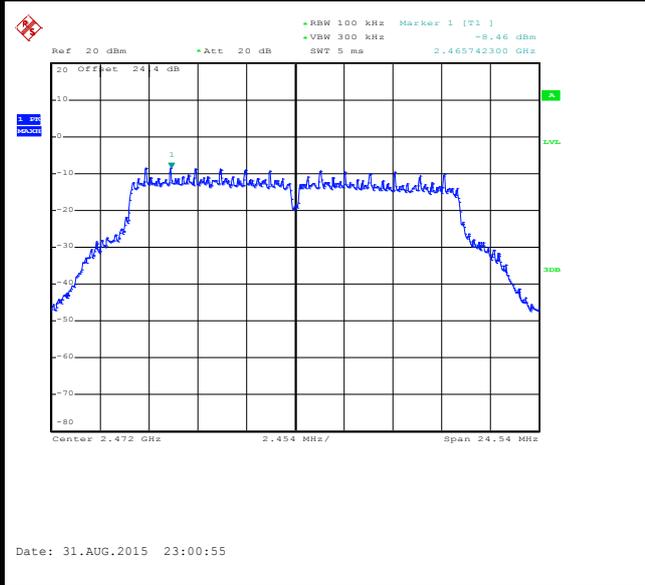


High Channel Plot

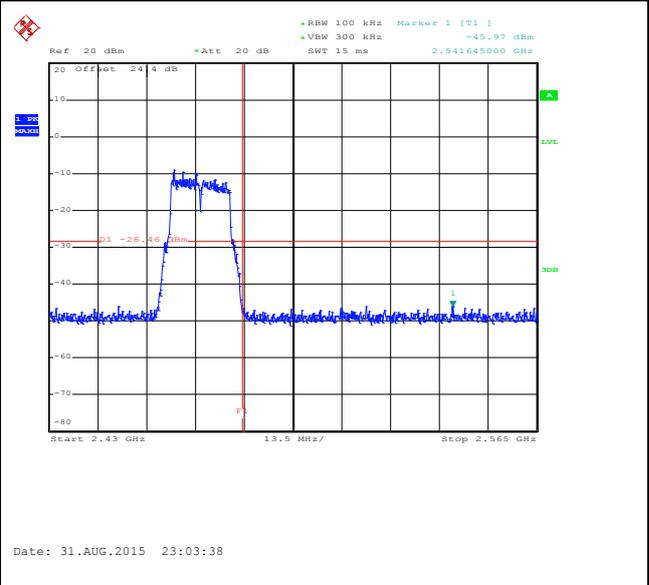

Spurious Emission 30MHz~3GHz

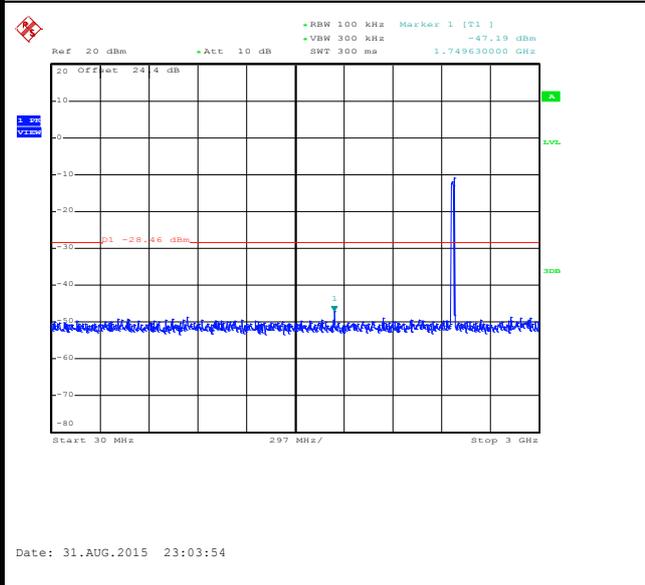


Spurious Emission 2GHz~25GHz

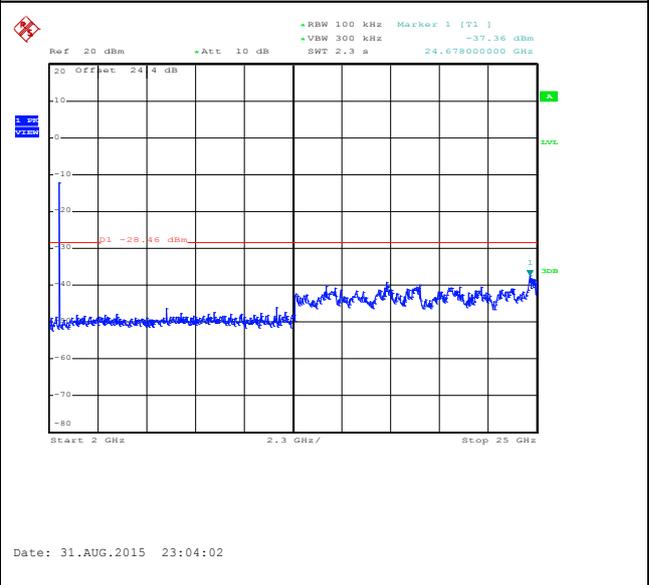



Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz Low	Relative Humidity :	52~53%
Test Channel :	01	Test Engineer :	Osolemio Chang

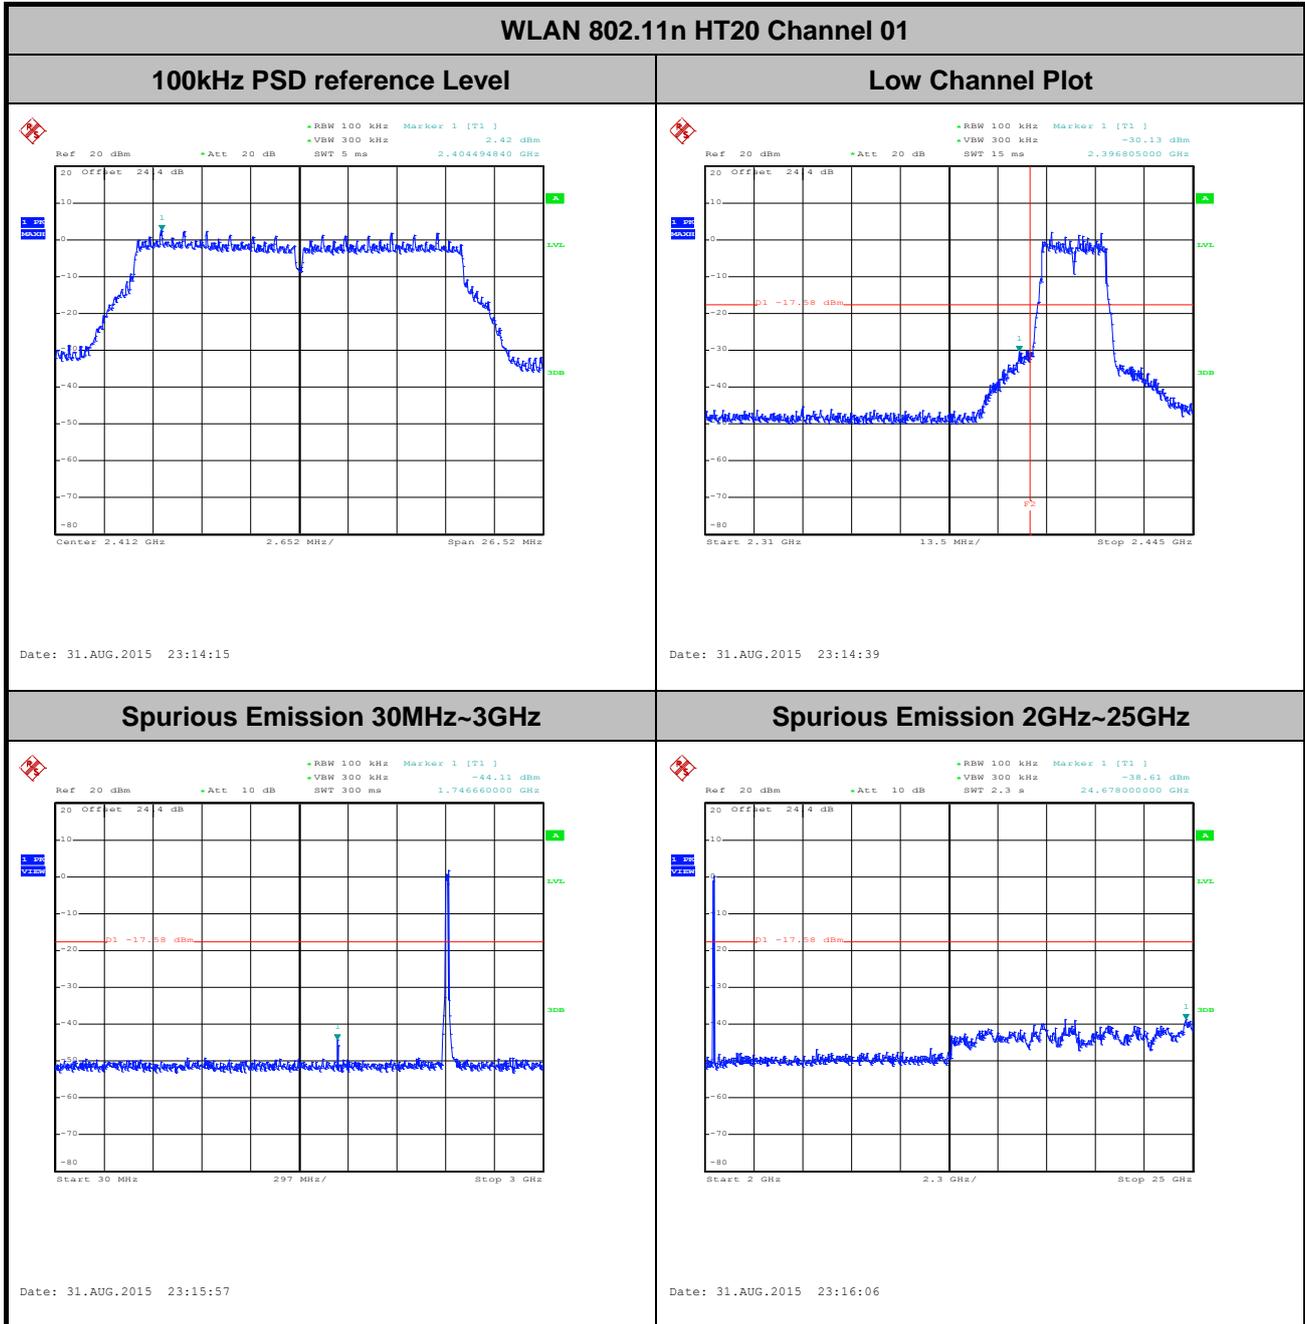





Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz Mid	Relative Humidity :	52~53%
Test Channel :	06	Test Engineer :	Osolemio Chang

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

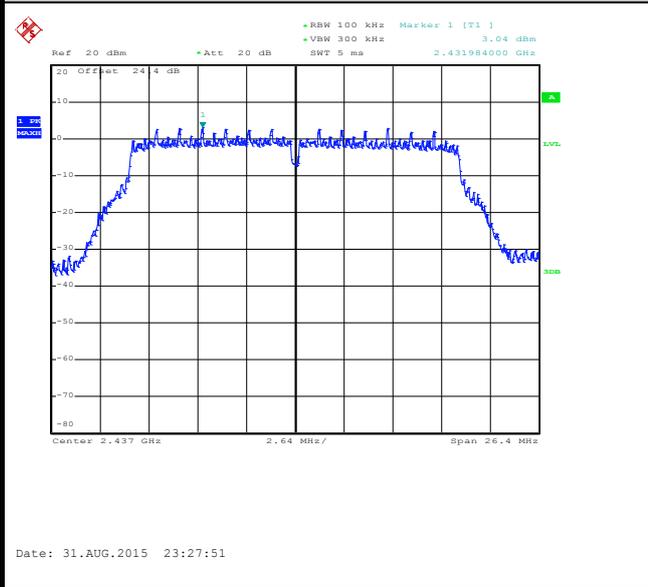

Spurious Emission 30MHz~3GHz

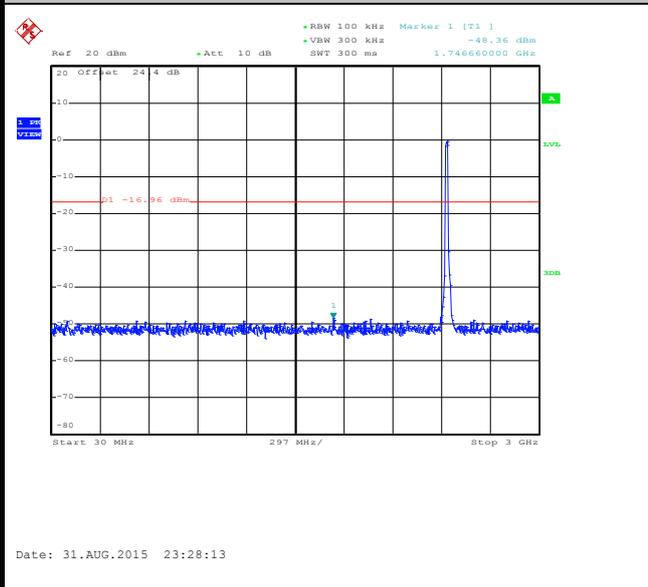

Spurious Emission 2GHz~25GHz

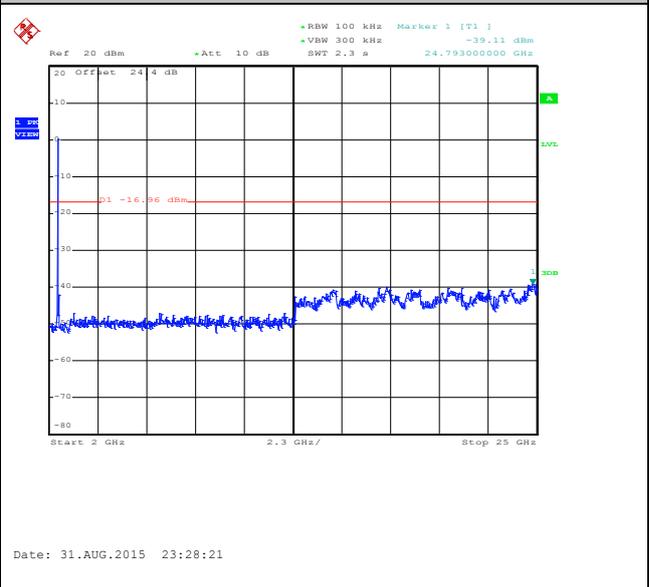




Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	11	Test Engineer :	Osolemio Chang

WLAN 802.11n HT20 Channel 11


100kHz PSD reference Level




High Channel Plot

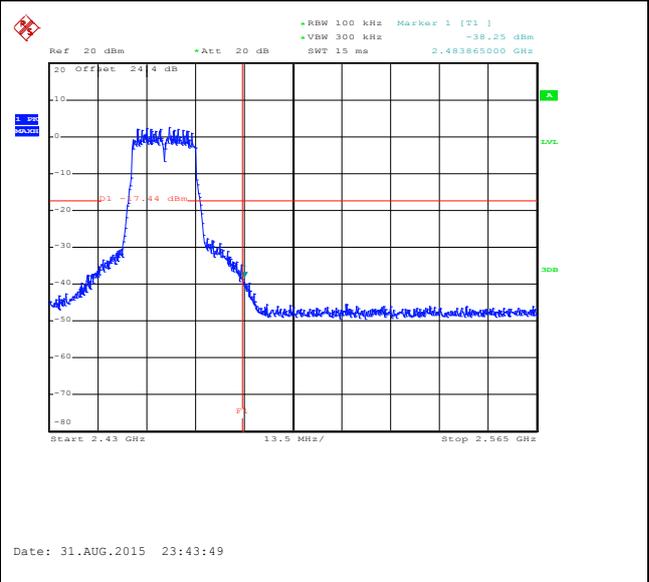

Spurious Emission 30MHz~3GHz

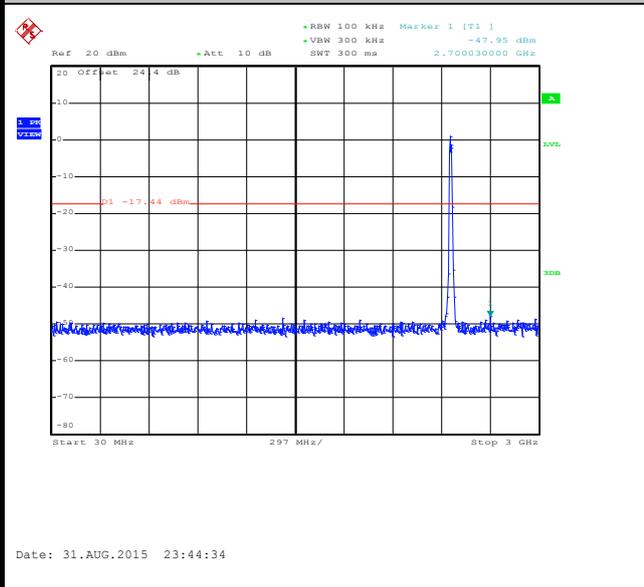

Spurious Emission 2GHz~25GHz

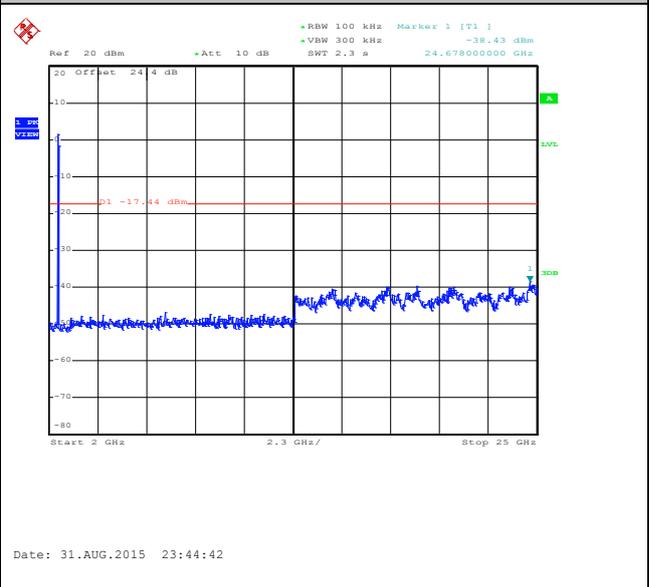





Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	12	Test Engineer :	Osolemio Chang

WLAN 802.11n HT20 Channel 12


100kHz PSD reference Level

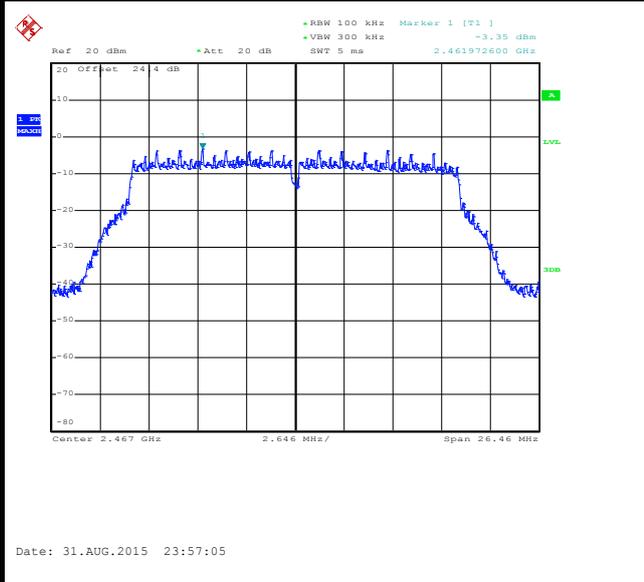


High Channel Plot

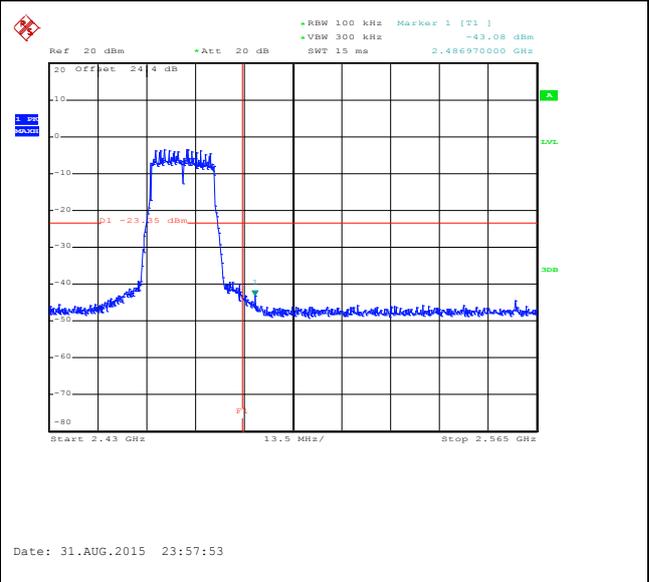

Spurious Emission 30MHz~3GHz

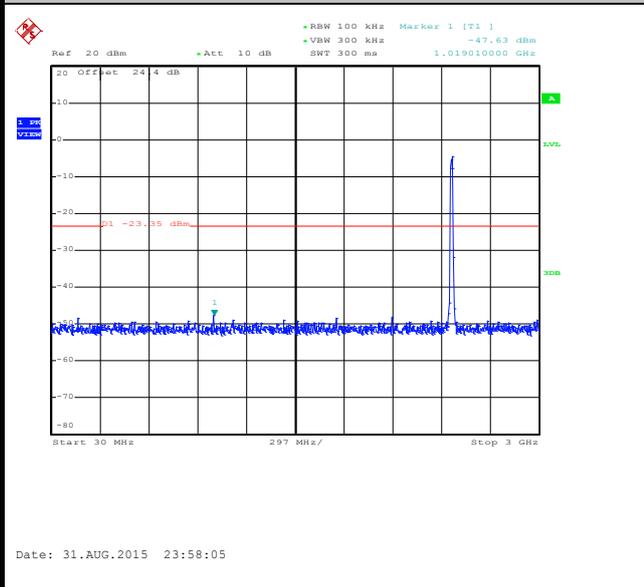


Spurious Emission 2GHz~25GHz

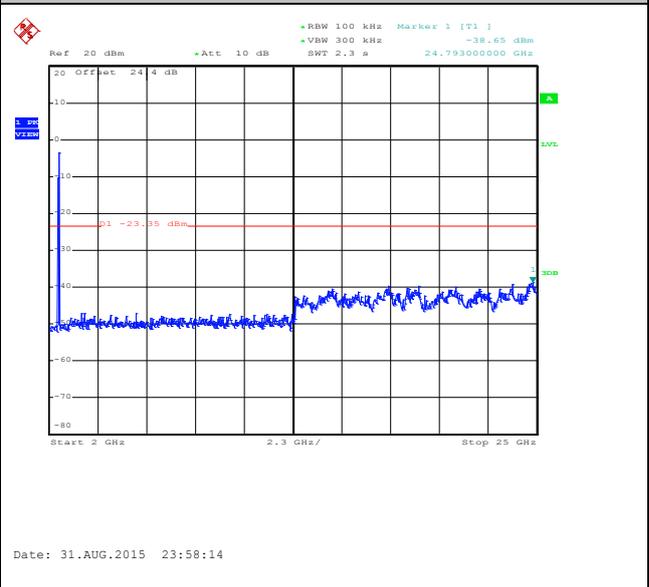



Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	52~53%
Test Channel :	13	Test Engineer :	Osolemio Chang

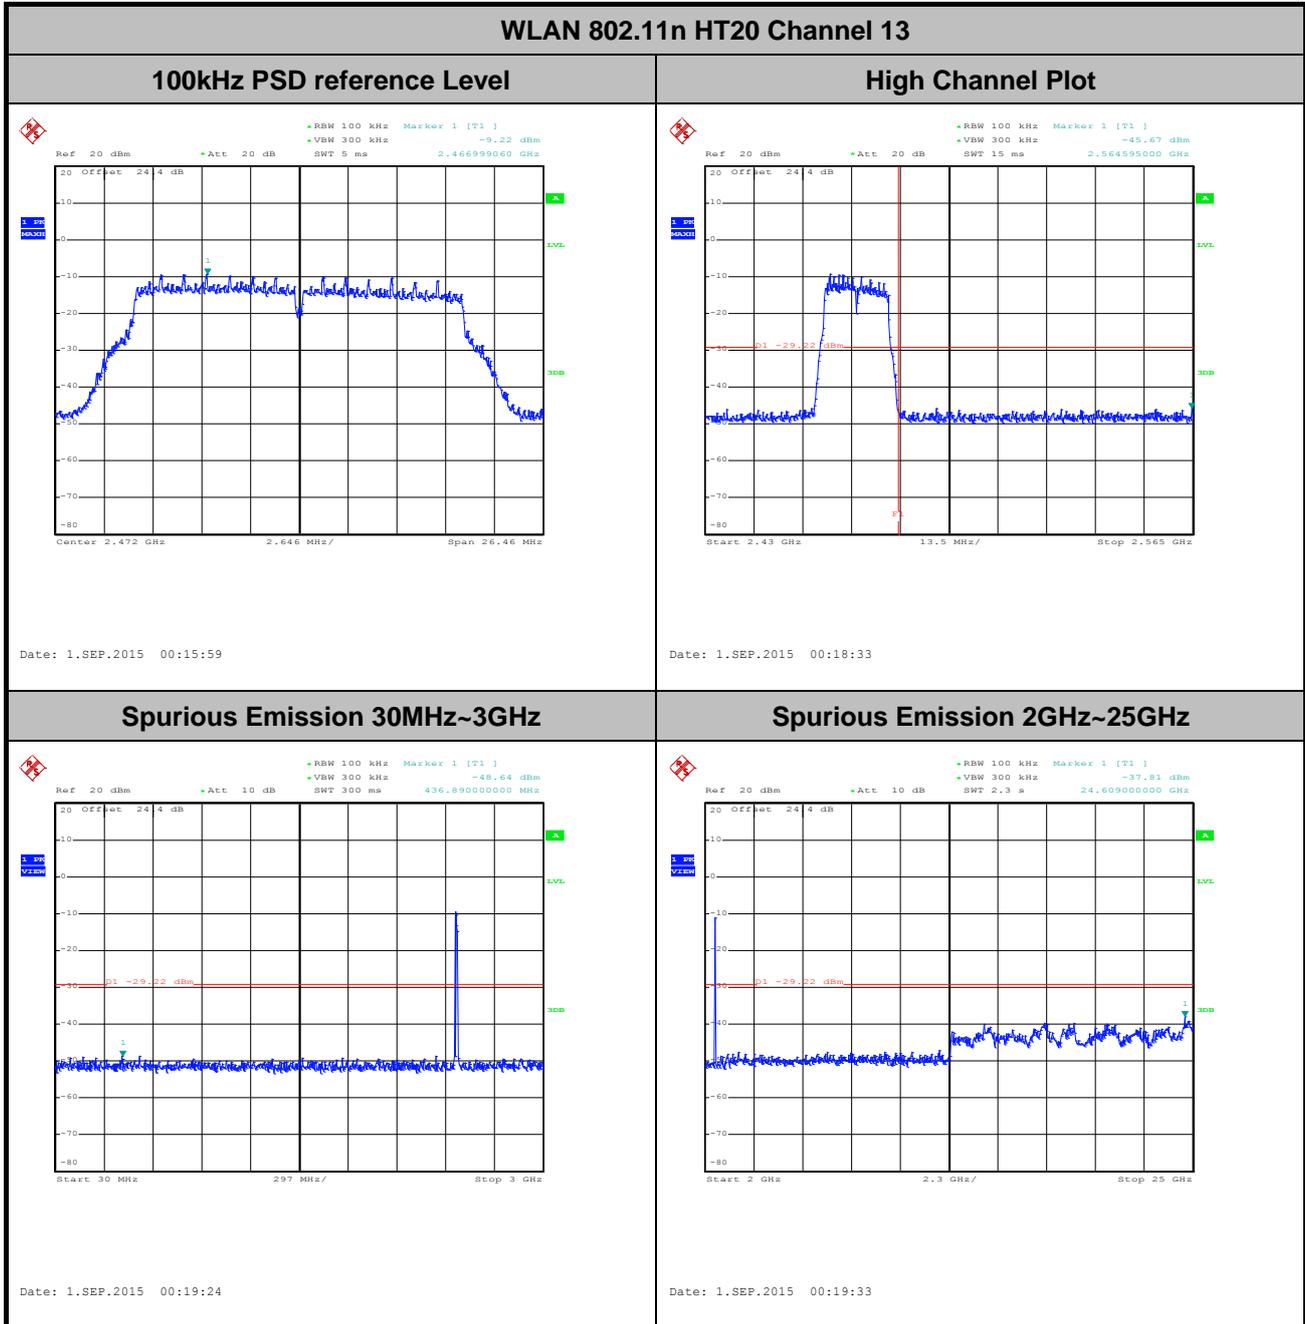



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1 \text{ GHz}$ ;  $\text{VBW} \geq \text{RBW}$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1 \text{ GHz}$  for peak measurement.  
 For average measurement:
    - $\text{VBW} = 10 \text{ Hz}$ , when duty cycle is no less than 98 percent.
    - $\text{VBW} \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
0	802.11b	98.66	-	-	10Hz
1	802.11b	98.66	-	-	
0+1	2.4GHz 802.11g for Ant 1	98.9	-	-	
0+1	2.4GHz 802.11g for Ant 2	98.9	-	-	
0+1	2.4GHz 802.11n HT20 for Ant 1	98.01	-	-	
0+1	2.4GHz 802.11n HT20 for Ant 2	98.01	-	-	

### 3.5.4 Test Setup


For radiated emissions below 30MHz

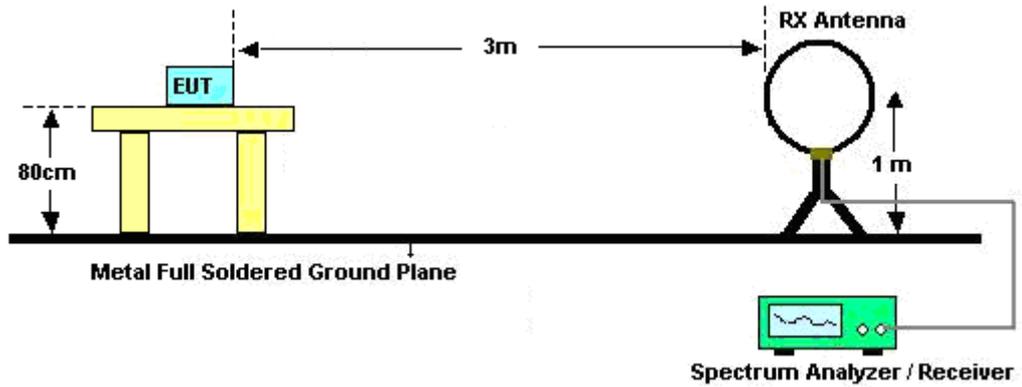

For radiated emissions from 30MHz to 1GHz

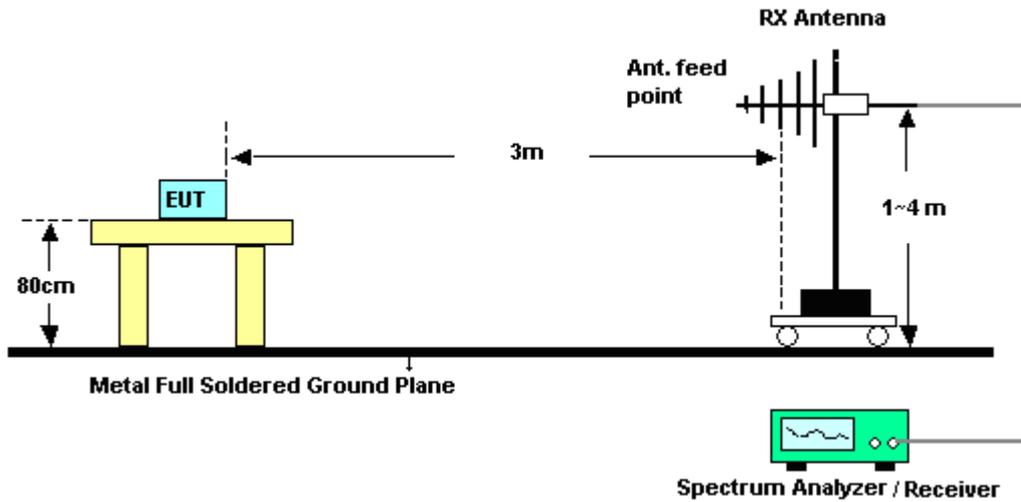

For radiated emissions above 1GHz

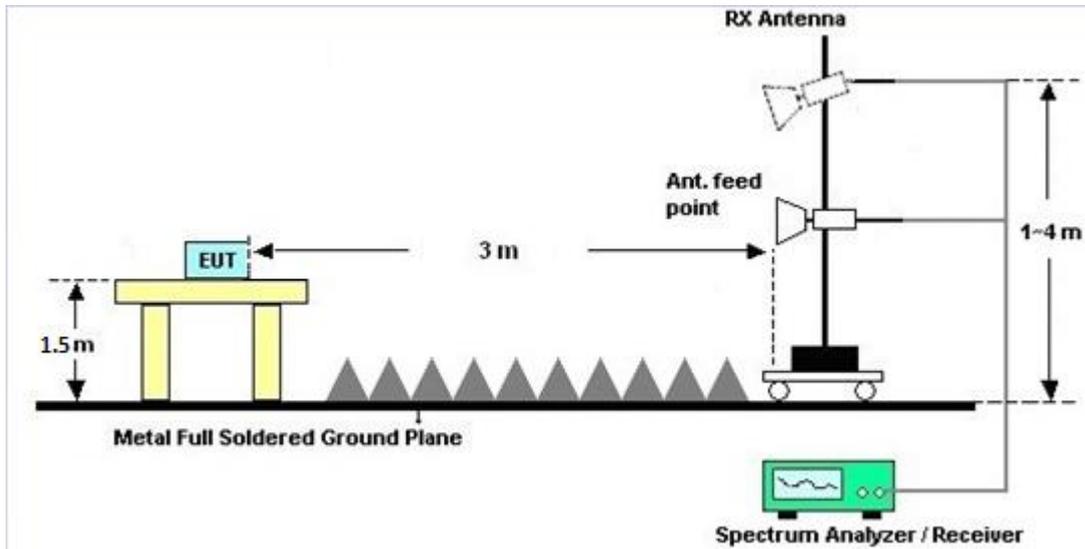

### 3.5.5 Test Results of Radiated Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C of this test report.

### 3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B and C of this test report.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

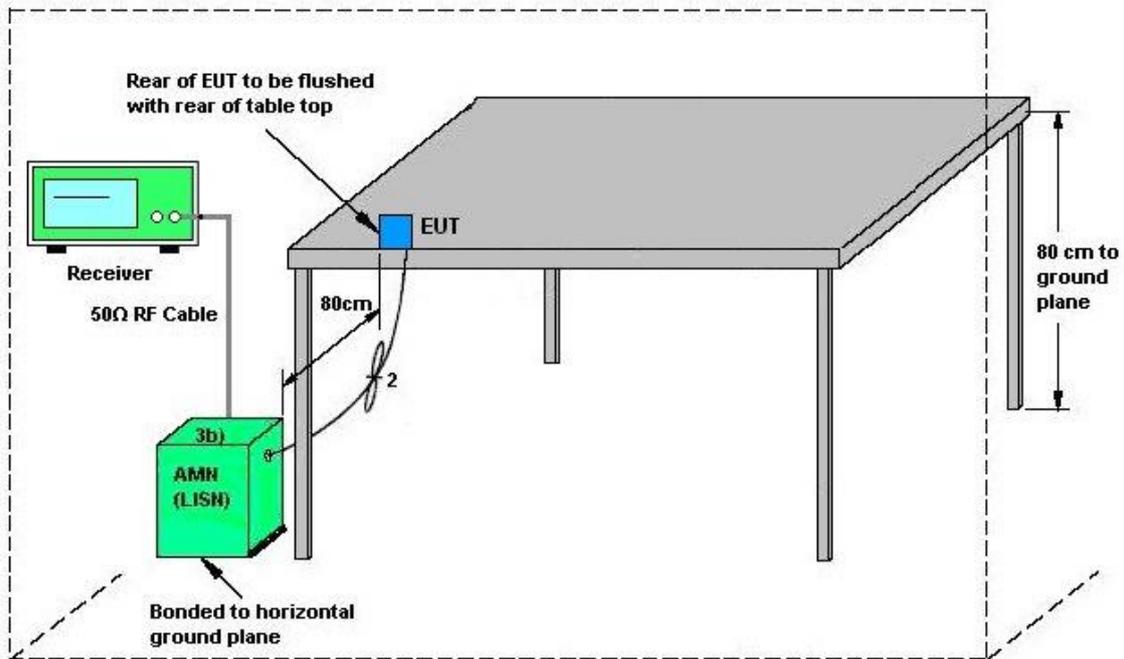


AMN = Artificial mains network (LISN)  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	23~25°C
Test Engineer :	Derreck Chen	Relative Humidity :	58~61%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN 2.4GHz Link + USB Cable( Charging from Adapter) + Earphone		

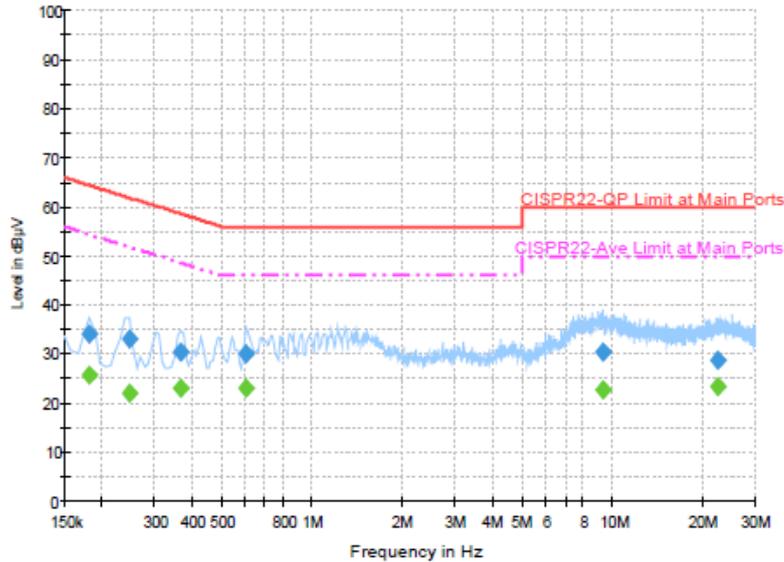

Final Result : QuasiPeak


Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.182000	34.2	Off	L1	19.5	30.2	64.4
0.246000	33.2	Off	L1	19.5	28.7	61.9
0.366000	30.5	Off	L1	19.5	28.1	58.6
0.606000	30.1	Off	L1	19.5	25.9	56.0
9.342000	30.4	Off	L1	19.8	29.6	60.0
22.478000	28.8	Off	L1	20.0	31.2	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.182000	25.9	Off	L1	19.5	28.5	54.4
0.246000	22.2	Off	L1	19.5	29.7	51.9
0.366000	23.1	Off	L1	19.5	25.5	48.6
0.606000	23.2	Off	L1	19.5	22.8	46.0
9.342000	22.7	Off	L1	19.8	27.3	50.0
22.478000	23.3	Off	L1	20.0	26.7	50.0



Test Mode :	Mode 1	Temperature :	23~25°C
Test Engineer :	Derreck Chen	Relative Humidity :	58~61%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN 2.4GHz Link + USB Cable( Charging from Adapter) + Earphone		

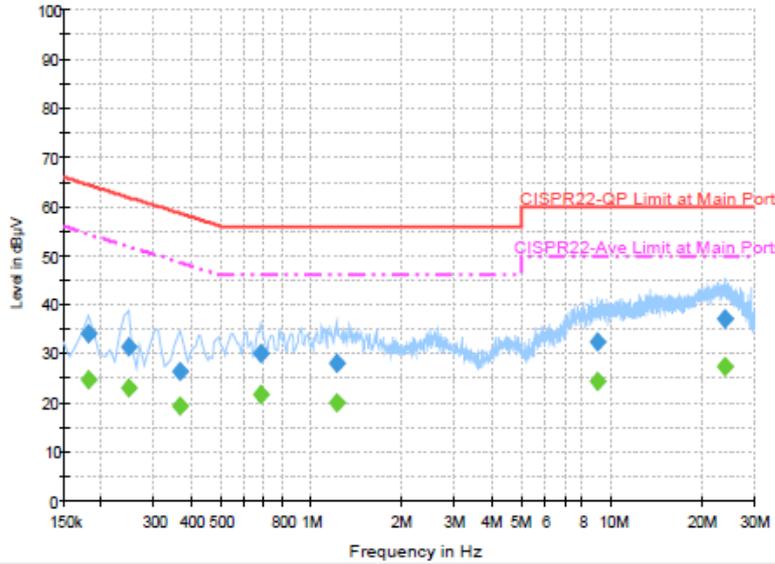

**Final Result : QuasiPeak**

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.182000	34.1	Off	N	19.5	30.3	64.4
0.246000	31.4	Off	N	19.5	30.5	61.9
0.366000	26.5	Off	N	19.5	32.1	58.6
0.678000	30.0	Off	N	19.6	26.0	56.0
1.214000	28.0	Off	N	19.6	28.0	56.0
9.022000	32.3	Off	N	19.9	27.7	60.0
24.006000	37.1	Off	N	20.1	22.9	60.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.182000	24.9	Off	N	19.5	29.5	54.4
0.246000	23.1	Off	N	19.5	28.8	51.9
0.366000	19.3	Off	N	19.5	29.3	48.6
0.678000	21.9	Off	N	19.6	24.1	46.0
1.214000	20.1	Off	N	19.6	25.9	46.0
9.022000	24.4	Off	N	19.9	25.6	50.0
24.006000	27.3	Off	N	20.1	22.7	50.0

### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.7.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

For CDD and beamforming transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;  
 $G_k$  is the gain in dBi of the  $k$ th antenna.

The EUT supports CDD mode and beamforming.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.



			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant. 1	Ant. 2	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
<b>2.4 GHz</b>	-4.20	-4.70	-1.44	-1.44	0.00	0.00

*Power Limit Reduction = DG(Power) – 6dBi, ( min = 0 )*

*PSD Limit Reduction = DG(PSD) – 6dBi, ( min = 0 )*



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1218006	300MHz~40GHz	Oct. 18, 2014	Aug. 23, 2015~ Sep. 02, 2015	Oct. 17, 2015	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1126017	300MHz~40GHz	Oct. 18, 2014	Aug. 23, 2015~ Sep. 02, 2015	Oct. 17, 2015	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Jun. 18, 2015	Aug. 23, 2015~ Sep. 02, 2015	Jun. 17, 2016	Conducted (TH05-HY)
Hygrometer	Testo	608-H1	34897199	N/A	May 04, 2015	Aug. 23, 2015~ Sep. 02, 2015	May 03, 2016	Conducted (TH05-HY)
RF Cable	HARBOUR INDUSTRIES	LL142	Infinet CA3601-360 1-DLL	0.1MHz~40GHz	Mar. 06, 2015	Aug. 23, 2015~ Sep. 02, 2015	Mar. 05, 2016	Conducted (TH05-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Sep. 27, 2014	Sep. 02, 2015~ Sep. 06, 2015	Sep. 26, 2015	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 21, 2015	Sep. 02, 2015~ Sep. 06, 2015	Aug. 20, 2016	Radiation (03CH07-HY)
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	Feb. 02, 2015	Sep. 02, 2015~ Sep. 06, 2015	Feb. 01, 2016	Radiation (03CH10-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 25, 2015	Sep. 02, 2015~ Sep. 06, 2015	Aug. 24, 2016	Radiation (03CH07-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA91705 84	18GHz- 40GHz	Nov. 03, 2014	Sep. 02, 2015~ Sep. 06, 2015	Nov. 02, 2015	Radiation (03CH10-HY)
Hygrometer	Testo	608-H1	34897197	N/A	May 04, 2015	Sep. 02, 2015~ Sep. 06, 2015	May 03, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00101 800-30-10P	1590075	1GHz ~ 18GHz	Apr. 20, 2015	Sep. 02, 2015~ Sep. 06, 2015	Apr. 19, 2016	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1000MHz	Mar. 12, 2015	Sep. 02, 2015~ Sep. 06, 2015	Mar. 11, 2016	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 21, 2014	Sep. 02, 2015~ Sep. 06, 2015	Oct. 20, 2015	Radiation (03CH07-HY)
Signal Analyzer	Rohde & Schwarz	FSV 30	101749	10Hz~30GHz	Mar. 10, 2015	Sep. 02, 2015~ Sep. 06, 2015	Mar. 09, 2016	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	1GHz~40GHz	Dec. 04, 2014	Sep. 02, 2015~ Sep. 06, 2015	Dec. 03, 2015	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	9KHz~1GHz	Dec. 04, 2014	Sep. 02, 2015~ Sep. 06, 2015	Dec. 03, 2015	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Sep. 02, 2015~ Sep. 06, 2015	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF78020836 8	Control Ant Mast	N/A	Sep. 02, 2015~ Sep. 06, 2015	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Sep. 02, 2015~ Sep. 06, 2015	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 degree	N/A	Sep. 02, 2015~ Sep. 06, 2015	N/A	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-1800400 0-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	Sep. 02, 2015~ Sep. 06, 2015	Jun. 01, 2016	Radiation (03CH07-HY)
Test Software	Audix	E3	6.2009-8-24	N/A	N/A	Sep. 02, 2015~ Sep. 06, 2015	N/A	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz – 2.75GHz	Dec. 01, 2014	Aug. 28, 2015	Nov. 30, 2015	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Apr. 20, 2015	Aug. 28, 2015	Apr. 19, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2014	Aug. 28, 2015	Dec. 01, 2015	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Aug. 28, 2015	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 07, 2015	Aug. 28, 2015	Jan. 06, 2016	Conduction (CO05-HY)
Test Software	N/A	EMC32	8.40.0	N/A	N/A	Aug. 28, 2015	N/A	Conduction (CO05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.80
---	------



## Appendix A. Conducted Test Results

Test Engineer:	osolemio Chang	Temperature:	22~23	°C
Test Date:	2015/08/23~2015/09/02	Relative Humidity:	52~53	%

**TEST RESULTS DATA**  
**6dB Bandwidth**

2.4GHz Band								
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 2		
11b	1Mbps	1	1	2412	8.08	8.08	0.50	Pass
11b	1Mbps	1	6	2437	7.60	8.04	0.50	Pass
11b	1Mbps	1	11	2462	7.56	8.08	0.50	Pass
11b	1Mbps	1	12	2467	7.60	8.08	0.50	Pass
11b	1Mbps	1	13	2472	7.04	8.08	0.50	Pass
11g	6Mbps	2	1	2412	16.40	16.40	0.50	Pass
11g	6Mbps	2	6	2437	16.40	16.40	0.50	Pass
11g	6Mbps	2	11	2462	16.12	16.40	0.50	Pass
11g	6Mbps	2	12	2467	16.36	16.40	0.50	Pass
11g	6Mbps	2	13	2472	16.44	16.36	0.50	Pass
HT20	MCS8	2	1	2412	17.64	17.68	0.50	Pass
HT20	MCS8	2	6	2437	17.64	17.60	0.50	Pass
HT20	MCS8	2	11	2462	16.96	17.64	0.50	Pass
HT20	MCS8	2	12	2467	17.36	17.64	0.50	Pass
HT20	MCS8	2	13	2472	17.60	17.64	0.50	Pass

**TEST RESULTS DATA**  
**Peak Output Power**

2.4GHz Band																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	16.34	16.50		30.00	30.00	-4.20	-4.70	12.14	11.80	36.00	36.00	Pass
11b	1Mbps	1	6	2437	16.58	16.89		30.00	30.00	-4.20	-4.70	12.38	12.19	36.00	36.00	Pass
11b	1Mbps	1	11	2462	16.31	17.04		30.00	30.00	-4.20	-4.70	12.11	12.34	36.00	36.00	Pass
11b	1Mbps	1	12	2467	16.16	16.98		30.00	30.00	-4.20	-4.70	11.96	12.28	36.00	36.00	Pass
11b	1Mbps	1	13	2472	15.67	15.80		30.00	30.00	-4.20	-4.70	11.47	11.10	36.00	36.00	Pass
11g	6Mbps	2	1	2412	20.01	20.21	23.12	30.00		-1.44		21.69		36.00		Pass
11g	6Mbps	2	6	2437	20.07	20.86	23.49	30.00		-1.44		22.06		36.00		Pass
11g	6Mbps	2	11	2462	19.94	20.50	23.24	30.00		-1.44		21.80		36.00		Pass
11g	6Mbps	2	12	2467	16.50	17.17	19.86	30.00		-1.44		18.42		36.00		Pass
11g	6Mbps	2	13	2472	14.16	9.81	15.52	30.00		-1.44		14.08		36.00		Pass
HT20	MCS8	2	1	2412	19.85	20.21	23.04	30.00		-1.44		21.61		36.00		Pass
HT20	MCS8	2	6	2437	20.27	20.26	23.28	30.00		-1.44		21.84		36.00		Pass
HT20	MCS8	2	11	2462	19.91	19.48	22.71	30.00		-1.44		21.27		36.00		Pass
HT20	MCS8	2	12	2467	15.11	14.26	17.72	30.00		-1.44		16.28		36.00		Pass
HT20	MCS8	2	13	2472	9.80	8.62	12.26	30.00		-1.44		10.82		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Average Output Power**

2.4GHz Band									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)		
					Ant 1	Ant 2	Ant 1	Ant 2	SUM
11b	1Mbps	1	1	2412	0.06	0.06	13.20	13.43	
11b	1Mbps	1	6	2437	0.06	0.06	13.30	13.58	
11b	1Mbps	1	11	2462	0.06	0.06	13.03	13.77	
11b	1Mbps	1	12	2467	0.06	0.06	13.00	13.70	
11b	1Mbps	1	13	2472	0.06	0.06	12.48	12.68	
11g	6Mbps	2	1	2412	0.05	0.05	13.21	13.45	16.34
11g	6Mbps	2	6	2437	0.05	0.05	13.30	13.92	16.63
11g	6Mbps	2	11	2462	0.05	0.05	13.12	13.71	16.43
11g	6Mbps	2	12	2467	0.05	0.05	9.81	9.75	12.79
11g	6Mbps	2	13	2472	0.05	0.05	3.91	2.84	6.42
HT20	MCS8	2	1	2412	0.09	0.09	13.27	13.63	16.46
HT20	MCS8	2	6	2437	0.09	0.09	13.43	13.98	16.72
HT20	MCS8	2	11	2462	0.09	0.09	13.21	13.69	16.46
HT20	MCS8	2	12	2467	0.09	0.09	8.32	7.95	11.15
HT20	MCS8	2	13	2472	0.09	0.09	3.06	2.42	5.76

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Peak Power Spectral Density**

2.4GHz Band												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant 1	Ant 2	Worse + 3.01	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	-9.94	-8.76		-4.20	-4.70	8.00	8.00	Pass
11b	1Mbps	1	6	2437	-8.58	-8.23		-4.20	-4.70	8.00	8.00	Pass
11b	1Mbps	1	11	2462	-8.18	-7.43		-4.20	-4.70	8.00	8.00	Pass
11b	1Mbps	1	12	2467	-9.10	-8.17		-4.20	-4.70	8.00	8.00	Pass
11b	1Mbps	1	13	2472	-9.46	-8.58		-4.20	-4.70	8.00	8.00	Pass
11g	6Mbps	2	1	2412	-12.31	-10.89	-7.88	-1.44		8.00		Pass
11g	6Mbps	2	6	2437	-11.32	-11.37	-8.31	-1.44		8.00		Pass
11g	6Mbps	2	11	2462	-12.10	-11.99	-8.98	-1.44		8.00		Pass
11g	6Mbps	2	12	2467	-13.92	-15.27	-10.91	-1.44		8.00		Pass
11g	6Mbps	2	13	2472	-21.49	-22.20	-18.48	-1.44		8.00		Pass
HT20	MCS8	2	1	2412	-13.20	-12.89	-9.88	-1.44		8.00		Pass
HT20	MCS8	2	6	2437	-12.50	-10.95	-7.94	-1.44		8.00		Pass
HT20	MCS8	2	11	2462	-12.23	-12.28	-9.22	-1.44		8.00		Pass
HT20	MCS8	2	12	2467	-17.09	-17.15	-14.08	-1.44		8.00		Pass
HT20	MCS8	2	13	2472	-22.13	-23.67	-19.12	-1.44		8.00		Pass

Measured power density (dBm) has offset with cable loss.



## Appendix B. Radiated Spurious Emission

Test Engineer :	Luke Chang	Temperature :	21~23°C
		Relative Humidity :	41~42%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
802.11b CH 01 2412MHz		2344.11	58.48	-15.52	74	52.94	32.11	7.68	34.25	100	49	P	H	
		2390	44.77	-9.23	54	39.14	32.18	7.75	34.3	100	49	A	H	
	*	2413.28	104.64	-	-	98.99	32.2	7.75	34.3	100	49	P	H	
	*	2412.69	100.44	-	-	94.79	32.2	7.75	34.3	100	49	A	H	
													H	
														H
			2335.02	58.2	-15.8	74	52.71	32.11	7.6	34.22	255	290	P	V
			2333.13	44.39	-9.61	54	38.92	32.09	7.6	34.22	255	290	A	V
	*		2413.36	96.55	-	-	90.9	32.2	7.75	34.3	255	290	P	V
	*		2412.69	92.37	-	-	86.72	32.2	7.75	34.3	255	290	A	V
													V	
													V	
802.11b CH 06 2437MHz		2351.76	58.28	-15.72	74	52.72	32.13	7.68	34.25	227	34	P	H	
		2389.47	44.48	-9.52	54	38.82	32.18	7.75	34.27	227	34	A	H	
	*	2437	104.71	-	-	98.99	32.24	7.83	34.35	227	34	P	H	
	*	2437	100.61	-	-	94.89	32.24	7.83	34.35	227	34	A	H	
			2483.6	59.8	-14.2	74	54.04	32.28	7.91	34.43	227	34	P	H
			2485.12	44.6	-9.4	54	38.84	32.28	7.91	34.43	227	34	A	H
			2317.47	58.62	-15.38	74	53.17	32.07	7.6	34.22	308	106	P	V
			2333.22	44.32	-9.68	54	38.85	32.09	7.6	34.22	308	106	A	V
	*		2437	95.69	-	-	89.97	32.24	7.83	34.35	308	106	P	V
	*		2437	91.54	-	-	85.82	32.24	7.83	34.35	308	106	A	V
		2484.96	58.42	-15.58	74	52.66	32.28	7.91	34.43	308	106	P	V	
		2484.12	44.51	-9.49	54	38.75	32.28	7.91	34.43	308	106	A	V	



<b>802.11b</b> <b>CH 11</b> <b>2462MHz</b>	*	2462	105.57	-	-	99.79	32.26	7.91	34.39	222	30	P	H
	*	2462	101.31	-	-	95.53	32.26	7.91	34.39	222	30	A	H
		2486.2	58.81	-15.19	74	53.05	32.28	7.91	34.43	222	30	P	H
		2483.52	45.02	-8.98	54	39.26	32.28	7.91	34.43	222	30	A	H
													H
													H
	*	2462	98.06	-	-	92.28	32.26	7.91	34.39	325	102	P	V
	*	2462	93.78	-	-	88	32.26	7.91	34.39	325	102	A	V
		2495.68	58.65	-15.35	74	52.92	32.3	7.91	34.48	325	102	P	V
		2483.52	44.49	-9.51	54	38.73	32.28	7.91	34.43	325	102	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	40.76	-33.24	74	54.98	34.26	11.16	59.64	100	0	P	H
													H
													H
													H
		4824	43.73	-30.27	74	57.95	34.26	11.16	59.64	100	0	P	V
													V
													V
													V
802.11b CH 06 2437MHz		4872	41.25	-32.75	74	55.31	34.3	11.21	59.57	100	0	P	H
		7311	43.9	-30.1	74	51.69	35.6	15.08	58.47	100	0	P	H
													H
													H
		4872	41.83	-32.17	74	55.89	34.3	11.21	59.57	397	0	P	V
		7311	43.8	-30.2	74	51.59	35.6	15.08	58.47	397	0	P	V
													V
													V
802.11b CH 11 2462MHz		4926	40.61	-33.39	74	54.5	34.34	11.27	59.5	100	0	P	H
		7386	44.84	-29.16	74	52.68	35.6	15.14	58.58	100	0	P	H
													H
													H
		4926	40.88	-33.12	74	54.77	34.34	11.27	59.5	100	0	P	V
		7386	42.96	-31.04	74	50.8	35.6	15.14	58.58	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 12 2467MHz	*	2467	104.95	-	-	99.21	32.26	7.91	34.43	223	31	P	H
	*	2467	100.8	-	-	95.06	32.26	7.91	34.43	223	31	A	H
		2483.88	61.17	-12.83	74	55.41	32.28	7.91	34.43	223	31	P	H
		2483.52	46.64	-7.36	54	40.88	32.28	7.91	34.43	223	31	A	H
													H
													H
	*	2467	96.14	-	-	90.4	32.26	7.91	34.43	326	88	P	V
	*	2467	92.01	-	-	86.27	32.26	7.91	34.43	326	88	A	V
		2498.48	59.14	-14.86	74	53.41	32.3	7.91	34.48	326	88	P	V
		2483.52	44.72	-9.28	54	38.96	32.28	7.91	34.43	326	88	A	V
													V
													V
802.11b CH 13 2472MHz	*	2472	103.92	-	-	98.16	32.28	7.91	34.43	222	31	P	H
	*	2472	99.69	-	-	93.93	32.28	7.91	34.43	222	31	A	H
		2483.84	62.03	-11.97	74	56.27	32.28	7.91	34.43	222	31	P	H
		2485.76	47.73	-6.27	54	41.97	32.28	7.91	34.43	222	31	A	H
													H
													H
	*	2472	95.31	-	-	89.55	32.28	7.91	34.43	326	108	P	V
	*	2472	91.13	-	-	85.37	32.28	7.91	34.43	326	108	A	V
		2487.4	59.03	-14.97	74	53.27	32.28	7.91	34.43	326	108	P	V
		2486	44.9	-9.1	54	39.14	32.28	7.91	34.43	326	108	A	V
													V
													V



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 12 2467MHz		4932	41.65	-32.35	74	55.54	34.34	11.27	59.5	100	0	P	H
		7404	42.8	-31.2	74	50.66	35.6	15.14	58.6	100	0	P	H
													H
													H
		4932	42.35	-31.65	74	56.24	34.34	11.27	59.5	100	0	P	V
		7404	42.95	-31.05	74	50.81	35.6	15.14	58.6	100	0	P	V
													V
													V
802.11b CH 13 2472MHz		4944	41.02	-32.98	74	54.81	34.36	11.32	59.47	100	0	P	H
		7416	42.84	-31.16	74	50.7	35.6	15.14	58.6	100	0	P	H
													H
													H
		4944	40.6	-33.4	74	54.39	34.36	11.32	59.47	100	0	P	V
		7416	42.23	-31.77	74	50.09	35.6	15.14	58.6	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
2.4GHz 802.11b LF		30.54	24.68	-15.32	40	36.09	18.28	1.77	31.46	168	63	P	H	
		55.65	22.34	-17.66	40	45.37	6.4	1.77	31.2			P	H	
		150.15	18.3	-25.2	43.5	35.99	10.8	2.61	31.1			P	H	
		689.9	25.09	-20.91	46	30.66	20.5	4.35	30.42			P	H	
		823.6	27.56	-18.44	46	30.6	22.61	4.7	30.35			P	H	
		929.3	29.04	-16.96	46	30.33	24.27	4.8	30.36			P	H	
														H
														H
														H
														H
														H
														H
														H
			31.89	23.18	-16.82	40	35.07	17.76	1.77	31.42	100	105	P	V
			38.37	19.61	-20.39	40	34.62	14.44	1.77	31.22			P	V
			77.25	18.51	-21.49	40	40.75	6.9	2.06	31.2			P	V
			560.4	24.41	-21.59	46	31.19	19.97	4.01	30.76			P	V
			728.4	26.01	-19.99	46	30.11	21.89	4.41	30.4			P	V
			918.1	28.1	-17.9	46	29.73	23.91	4.8	30.34			P	V
														V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2412MHz													

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
802.11b CH 01 2412MHz		2321.52	59.04	-14.96	74	53.57	32.09	7.6	34.22	125	70	P	H	
		2390	44.76	-9.24	54	39.13	32.18	7.75	34.3	125	70	A	H	
	*	2413.36	100.58	-	-	94.93	32.2	7.75	34.3	125	70	P	H	
	*	2412.69	96.57	-	-	90.92	32.2	7.75	34.3	125	70	A	H	
													H	
														H
			2334.84	58.84	-15.16	74	53.35	32.11	7.6	34.22	332	177	P	V
			2388.3	44.44	-9.56	54	38.78	32.18	7.75	34.27	332	177	A	V
	*		2413.28	97.72	-	-	92.07	32.2	7.75	34.3	332	177	P	V
	*		2412.78	93.49	-	-	87.84	32.2	7.75	34.3	332	177	A	V
														V
														V
802.11b CH 06 2437MHz		2369.76	58.51	-15.49	74	52.94	32.16	7.68	34.27	100	33	P	H	
		2333.22	44.41	-9.59	54	38.94	32.09	7.6	34.22	100	33	A	H	
	*	2435.74	100.73	-	-	95.03	32.22	7.83	34.35	100	33	P	H	
	*	2436.24	95.65	-	-	89.95	32.22	7.83	34.35	100	33	A	H	
			2490.28	58.65	-15.35	74	52.87	32.3	7.91	34.43	100	33	P	H
			2484.16	44.6	-9.4	54	38.84	32.28	7.91	34.43	100	33	A	H
			2385.33	58.28	-15.72	74	52.64	32.16	7.75	34.27	395	102	P	V
			2318.1	44.44	-9.56	54	38.97	32.09	7.6	34.22	395	102	A	V
	*		2435.91	100.65	-	-	94.95	32.22	7.83	34.35	395	102	P	V
	*		2436.24	96.59	-	-	90.89	32.22	7.83	34.35	395	102	A	V
			2496.12	58.94	-15.06	74	53.21	32.3	7.91	34.48	395	102	P	V
			2485.64	44.58	-9.42	54	38.82	32.28	7.91	34.43	395	102	A	V



<b>802.11b</b> <b>CH 11</b> <b>2462MHz</b>	*	2460.79	100.93	-	-	95.15	32.26	7.91	34.39	111	51	P	H
	*	2461.29	96.78	-	-	91	32.26	7.91	34.39	111	51	A	H
		2483.72	58.57	-15.43	74	52.81	32.28	7.91	34.43	111	51	P	H
		2483.52	44.88	-9.12	54	39.12	32.28	7.91	34.43	111	51	A	H
													H
													H
	*	2460.87	98.97	-	-	93.19	32.26	7.91	34.39	303	98	P	V
	*	2461.29	94.89	-	-	89.11	32.26	7.91	34.39	303	98	A	V
		2488.56	58.21	-15.79	74	52.43	32.3	7.91	34.43	303	98	P	V
		2483.56	44.69	-9.31	54	38.93	32.28	7.91	34.43	303	98	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
802.11b CH 01 2412MHz		4824	40.24	-33.76	74	54.46	34.26	11.16	59.64	100	0	P	H	
													H	
													H	
													H	
		4824	39.8	-34.2	74	54.02	34.26	11.16	59.64	100	0	P	V	
														V
														V
														V
802.11b CH 06 2437MHz		4872	39.48	-34.52	74	53.54	34.3	11.21	59.57	100	0	P	H	
		7308	42.72	-31.28	74	50.51	35.6	15.08	58.47	100	0	P	H	
													H	
													H	
		4872	40.2	-33.8	74	54.26	34.3	11.21	59.57	100	0	P	V	
		7308	43.28	-30.72	74	51.07	35.6	15.08	58.47	100	0	P	V	
														V
														V
802.11b CH 11 2462MHz		4926	40.1	-33.9	74	53.99	34.34	11.27	59.5	100	0	P	H	
		7386	43.7	-30.3	74	51.54	35.6	15.14	58.58	100	0	P	H	
													H	
													H	
		4926	40.39	-33.61	74	54.28	34.34	11.27	59.5	100	0	P	V	
		7386	43.46	-30.54	74	51.3	35.6	15.14	58.58	100	0	P	V	
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
802.11b CH 12 2467MHz	*	2465.88	100.53	-	-	94.75	32.26	7.91	34.39	124	72	P	H	
	*	2466.3	96.46	-	-	90.72	32.26	7.91	34.43	124	72	A	H	
		2483.56	58.87	-15.13	74	53.11	32.28	7.91	34.43	124	72	P	H	
		2483.52	45.72	-8.28	54	39.96	32.28	7.91	34.43	124	72	A	H	
													H	
														H
	*	2465.8	96.5	-	-	90.72	32.26	7.91	34.39	304	92	P	V	
	*	2467.8	92.43	-	-	86.69	32.26	7.91	34.43	304	92	A	V	
		2485.92	59.01	-14.99	74	53.25	32.28	7.91	34.43	304	92	P	V	
		2483.52	45.1	-8.9	54	39.34	32.28	7.91	34.43	304	92	A	V	
														V
														V
802.11b CH 13 2472MHz	*	2470.89	98.85	-	-	93.09	32.28	7.91	34.43	270	72	P	H	
	*	2471.31	94.61	-	-	88.85	32.28	7.91	34.43	270	72	A	H	
		2493.36	59.96	-14.04	74	54.23	32.3	7.91	34.48	270	72	P	H	
		2485.8	46.77	-7.23	54	41.01	32.28	7.91	34.43	270	72	A	H	
													H	
														H
	*	2470.81	95.47	-	-	89.71	32.28	7.91	34.43	272	92	P	V	
	*	2471.23	91.4	-	-	85.64	32.28	7.91	34.43	272	92	A	V	
		2491.72	58.87	-15.13	74	53.09	32.3	7.91	34.43	272	92	P	V	
		2485.92	45.58	-8.42	54	39.82	32.28	7.91	34.43	272	92	A	V	
														V
														V



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 12 2467MHz		4932	40.65	-33.35	74	54.54	34.34	11.27	59.5	100	0	P	H
		7404	42.51	-31.49	74	50.37	35.6	15.14	58.6	100	0	P	H
													H
													H
		4932	40.23	-33.77	74	54.12	34.34	11.27	59.5	100	0	P	V
		7404	42.48	-31.52	74	50.34	35.6	15.14	58.6	100	0	P	V
													V
													V
802.11b CH 13 2472MHz		4944	40.66	-33.34	74	54.45	34.36	11.32	59.47	100	0	P	H
		7416	42.88	-31.12	74	50.74	35.6	15.14	58.6	100	0	P	H
													H
													H
		4944	41.22	-32.78	74	55.01	34.36	11.32	59.47	100	0	P	V
		7416	42.56	-31.44	74	50.42	35.6	15.14	58.6	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
2.4GHz 802.11b LF		31.08	27.86	-12.14	40	39.27	18.28	1.77	31.46	192	54	P	H	
		55.38	21.82	-18.18	40	44.85	6.4	1.77	31.2			P	H	
		148.53	18.86	-24.64	43.5	36.27	11.08	2.61	31.1			P	H	
		649.3	24.86	-21.14	46	30.74	20.4	4.22	30.5			P	H	
		849.5	28.42	-17.58	46	30.82	23.3	4.7	30.4			P	H	
		916	28.79	-17.21	46	30.55	23.77	4.8	30.33			P	H	
														H
														H
														H
														H
														H
														H
														H
			30	27.43	-12.57	40	38.36	18.8	1.77	31.5	103	87	P	V
			39.18	25.17	-14.83	40	40.16	14.44	1.77	31.2			P	V
			77.25	22.89	-17.11	40	45.13	6.9	2.06	31.2			P	V
			692	24.77	-21.23	46	30.32	20.52	4.35	30.42			P	V
			818	26.92	-19.08	46	30.2	22.44	4.62	30.34			P	V
			946.1	29.29	-16.71	46	30.38	24.36	4.94	30.39			P	V
														V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2412MHz													

- 3. Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- 4. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- 3. Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- 4. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- 3. Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- 4. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
802.11g CH 01 2412MHz		2389.11	62.01	-11.99	74	56.35	32.18	7.75	34.27	100	44	P	H	
		2388.93	47.61	-6.39	54	41.95	32.18	7.75	34.27	100	44	A	H	
	*	2412	108.27	-	-	102.62	32.2	7.75	34.3	100	44	P	H	
	*	2412	97.18	-	-	91.53	32.2	7.75	34.3	100	44	A	H	
													H	
														H
			2387.58	59.46	-14.54	74	53.8	32.18	7.75	34.27	202	112	P	V
			2388.03	46.15	-7.85	54	40.49	32.18	7.75	34.27	202	112	A	V
	*		2412	105.59	-	-	99.94	32.2	7.75	34.3	202	112	P	V
	*		2412	94.47	-	-	88.82	32.2	7.75	34.3	202	112	A	V
														V
														V
802.11g CH 06 2437MHz		2387.49	58.85	-15.15	74	53.19	32.18	7.75	34.27	137	42	P	H	
		2389.74	45.35	-8.65	54	39.69	32.18	7.75	34.27	137	42	A	H	
	*	2437	107.2	-	-	101.48	32.24	7.83	34.35	137	42	P	H	
	*	2437	96.09	-	-	90.37	32.24	7.83	34.35	137	42	A	H	
			2485.64	59	-15	74	53.24	32.28	7.91	34.43	137	42	P	H
			2483.72	45.18	-8.82	54	39.42	32.28	7.91	34.43	137	42	A	H
			2376.42	59.02	-14.98	74	53.45	32.16	7.68	34.27	200	111	P	V
			2389.47	44.58	-9.42	54	38.92	32.18	7.75	34.27	200	111	A	V
	*		2437	104.49	-	-	98.77	32.24	7.83	34.35	200	111	P	V
	*		2437	93.42	-	-	87.7	32.24	7.83	34.35	200	111	A	V
			2484.72	59.09	-14.91	74	53.33	32.28	7.91	34.43	200	111	P	V
			2483.8	44.78	-9.22	54	39.02	32.28	7.91	34.43	200	111	A	V



<b>802.11g CH 11 2462MHz</b>	*	2462	108.18	-	-	102.4	32.26	7.91	34.39	110	40	P	H
	*	2462	97.05	-	-	91.27	32.26	7.91	34.39	110	40	A	H
		2483.64	59.34	-14.66	74	53.58	32.28	7.91	34.43	110	40	P	H
		2483.52	46.11	-7.89	54	40.35	32.28	7.91	34.43	110	40	A	H
													H
													H
	*	2462	105.81	-	-	100.03	32.26	7.91	34.39	202	111	P	V
	*	2462	94.45	-	-	88.67	32.26	7.91	34.39	202	111	A	V
		2485.68	58.98	-15.02	74	53.22	32.28	7.91	34.43	202	111	P	V
		2483.6	45.52	-8.48	54	39.76	32.28	7.91	34.43	202	111	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
802.11g CH 01 2412MHz		4824	41.07	-32.93	74	55.29	34.26	11.16	59.64	100	0	P	H	
													H	
													H	
													H	
		4824	43.35	-30.65	74	57.57	34.26	11.16	59.64	100	0	P	V	
														V
														V
														V
802.11g CH 06 2437MHz		4874	40.18	-33.82	74	54.24	34.3	11.21	59.57	100	0	P	H	
		7311	44.22	-29.78	74	52.01	35.6	15.08	58.47	100	0	P	H	
													H	
													H	
		4874	41.87	-32.13	74	55.93	34.3	11.21	59.57	100	0	P	V	
		7311	43.16	-30.84	74	50.95	35.6	15.08	58.47	100	0	P	V	
														V
														V
802.11g CH 11 2462MHz		4924	41.59	-32.41	74	55.48	34.34	11.27	59.5	100	0	P	H	
		7386	43.72	-30.28	74	51.56	35.6	15.14	58.58	100	0	P	H	
													H	
													H	
		4924	42.25	-31.75	74	56.14	34.34	11.27	59.5	100	0	P	V	
		7386	43.26	-30.74	74	51.1	35.6	15.14	58.58	100	0	P	V	
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11g CH 12 2467MHz	*	2467	104.08	-	-	98.34	32.26	7.91	34.43	107	43	P	H
	*	2467	92.89	-	-	87.15	32.26	7.91	34.43	107	43	A	H
		2484.84	60.17	-13.83	74	54.41	32.28	7.91	34.43	107	43	P	H
		2483.52	46.43	-7.57	54	40.67	32.28	7.91	34.43	107	43	A	H
													H
													H
	*	2467	101.35	-	-	95.61	32.26	7.91	34.43	203	113	P	V
	*	2467	89.97	-	-	84.23	32.26	7.91	34.43	203	113	A	V
		2499.12	58.93	-15.07	74	53.2	32.3	7.91	34.48	203	113	P	V
		2483.68	45.37	-8.63	54	39.61	32.28	7.91	34.43	203	113	A	V
													V
													V
802.11g CH 13 2472MHz	*	2472	97.41	-	-	91.65	32.28	7.91	34.43	170	42	P	H
	*	2472	86.53	-	-	80.77	32.28	7.91	34.43	170	42	A	H
		2483.6	66.8	-7.2	74	61.04	32.28	7.91	34.43	170	42	P	H
		2483.52	48.33	-5.67	54	42.57	32.28	7.91	34.43	170	42	A	H
													H
													H
	*	2472	93.53	-	-	87.77	32.28	7.91	34.43	200	105	P	V
	*	2472	82.49	-	-	76.73	32.28	7.91	34.43	200	105	A	V
		2483.68	62.48	-11.52	74	56.72	32.28	7.91	34.43	200	105	P	V
		2483.52	46.99	-7.01	54	41.23	32.28	7.91	34.43	200	105	A	V
													V
													V



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11g CH 12 2467MHz		4934	40.93	-33.07	74	54.82	34.34	11.27	59.5	100	0	P	H
		7401	43.14	-30.86	74	51	35.6	15.14	58.6	100	0	P	H
													H
													H
		4934	40.74	-33.26	74	54.63	34.34	11.27	59.5	100	0	P	V
		7401	43.15	-30.85	74	51.01	35.6	15.14	58.6	100	0	P	V
													V
													V
802.11g CH 13 2472MHz		4944	40.49	-33.51	74	54.28	34.36	11.32	59.47	100	0	P	H
		7416	43.18	-30.82	74	51.04	35.6	15.14	58.6	100	0	P	H
													H
													H
		4944	40.64	-33.36	74	54.43	34.36	11.32	59.47	100	0	P	V
		7416	43.02	-30.98	74	50.88	35.6	15.14	58.6	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
802.11n HT20 CH 01 2412MHz		2390	68.71	-5.29	74	63.08	32.18	7.75	34.3	101	42	P	H	
		2390	51.02	-2.98	54	45.39	32.18	7.75	34.3	101	42	A	H	
	*	2413.11	107.79	-	-	102.14	32.2	7.75	34.3	101	42	P	H	
	*	2412	95.74	-	-	90.09	32.2	7.75	34.3	101	42	A	H	
													H	
														H
			2389.47	63.05	-10.95	74	57.39	32.18	7.75	34.27	202	114	P	V
			2390	48.85	-5.15	54	43.22	32.18	7.75	34.3	202	114	A	V
	*		2412	104.76	-	-	99.11	32.2	7.75	34.3	202	114	P	V
	*		2412	91.8	-	-	86.15	32.2	7.75	34.3	202	114	A	V
													V	
													V	
802.11n HT20 CH 06 2437MHz		2329.26	59.32	-14.68	74	53.85	32.09	7.6	34.22	164	146	P	H	
		2390.01	45.06	-8.94	54	39.43	32.18	7.75	34.3	164	146	A	H	
	*	2437	105.82	-	-	100.1	32.24	7.83	34.35	164	146	P	H	
	*	2437	93.71	-	-	87.99	32.24	7.83	34.35	164	146	A	H	
		2486.08	59.34	-14.66	74	53.58	32.28	7.91	34.43	164	146	P	H	
		2483.76	44.98	-9.02	54	39.22	32.28	7.91	34.43	164	146	A	H	
		2355.54	59.35	-14.65	74	53.79	32.13	7.68	34.25	256	77	P	V	
		2389.11	44.6	-9.4	54	38.94	32.18	7.75	34.27	256	77	A	V	
	*		2437	102.61	-	-	96.89	32.24	7.83	34.35	256	77	P	V
	*		2437	89.69	-	-	83.97	32.24	7.83	34.35	256	77	A	V
		2499.6	58.54	-15.46	74	52.81	32.3	7.91	34.48	256	77	P	V	
		2484.48	44.64	-9.36	54	38.88	32.28	7.91	34.43	256	77	A	V	



802.11n HT20 CH 11 2462MHz	*	2462	107.26	-	-	101.48	32.26	7.91	34.39	132	42	P	H
	*	2462	95.2	-	-	89.42	32.26	7.91	34.39	132	42	A	H
		2484.44	65.61	-8.39	74	59.85	32.28	7.91	34.43	132	42	P	H
		2483.52	49.92	-4.08	54	44.16	32.28	7.91	34.43	132	42	A	H
													H
													H
	*	2462	103.73	-	-	97.95	32.26	7.91	34.39	203	96	P	V
	*	2462	91.02	-	-	85.24	32.26	7.91	34.39	203	96	A	V
		2483.68	64.63	-9.37	74	58.87	32.28	7.91	34.43	203	96	P	V
		2483.52	48.67	-5.33	54	42.91	32.28	7.91	34.43	203	96	A	V
												V	
												V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4804	41.16	-32.84	74	55.47	34.25	11.11	59.67	100	0	P	H
													H
													H
													H
		4804	41.11	-32.89	74	55.42	34.25	11.11	59.67	100	0	P	V
													V
													V
802.11n HT20 CH 06 2437MHz		4874	40.36	-33.64	74	54.42	34.3	11.21	59.57	100	0	P	H
		7311	43.7	-30.3	74	51.49	35.6	15.08	58.47	100	0	P	H
													H
													H
		4874	41.11	-32.89	74	55.17	34.3	11.21	59.57	100	0	P	V
		7311	43.22	-30.78	74	51.01	35.6	15.08	58.47	100	0	P	V
													V
802.11n HT20 CH 11 2462MHz		4924	41.12	-32.88	74	55.01	34.34	11.27	59.5	100	0	P	H
		7386	43.52	-30.48	74	51.36	35.6	15.14	58.58	100	0	P	H
													H
													H
		4924	41.14	-32.86	74	55.03	34.34	11.27	59.5	100	0	P	V
		7386	43.83	-30.17	74	51.67	35.6	15.14	58.58	100	0	P	V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
802.11n HT20 CH 12 2467MHz	*	2467	101.81	-	-	96.07	32.26	7.91	34.43	235	46	P	H	
	*	2467	90.08	-	-	84.34	32.26	7.91	34.43	235	46	A	H	
		2483.92	61.39	-12.61	74	55.63	32.28	7.91	34.43	235	46	P	H	
		2483.52	47.95	-6.05	54	42.19	32.28	7.91	34.43	235	46	A	H	
													H	
														H
	*	2467	96.68	-	-	90.94	32.26	7.91	34.43	202	120	P	V	
	*	2467	84.21	-	-	78.47	32.26	7.91	34.43	202	120	A	V	
		2486.92	60.6	-13.4	74	54.84	32.28	7.91	34.43	202	120	P	V	
		2483.6	46.49	-7.51	54	40.73	32.28	7.91	34.43	202	120	A	V	
													V	
													V	
802.11n HT20 CH 13 2472MHz	*	2472	95.61	-	-	89.85	32.28	7.91	34.43	244	44	P	H	
	*	2472	84.13	-	-	78.37	32.28	7.91	34.43	244	44	A	H	
		2483.56	67.19	-6.81	74	61.43	32.28	7.91	34.43	244	44	P	H	
		2483.52	48.09	-5.91	54	42.33	32.28	7.91	34.43	244	44	A	H	
													H	
														H
	*	2472	91.17	-	-	85.41	32.28	7.91	34.43	127	118	P	V	
	*	2472	77.81	-	-	72.05	32.28	7.91	34.43	127	118	A	V	
		2483.68	61.7	-12.3	74	55.94	32.28	7.91	34.43	127	118	P	V	
		2483.52	45.79	-8.21	54	40.03	32.28	7.91	34.43	127	118	A	V	
													V	
													V	



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11n HT20 CH 12 2467MHz		4934	41.69	-32.31	74	55.58	34.34	11.27	59.5	100	0	P	H
		7401	42.86	-31.14	74	50.72	35.6	15.14	58.6	100	0	P	H
													H
													H
		4934	41.67	-32.33	74	55.56	34.34	11.27	59.5	100	0	P	V
		7401	43.6	-30.4	74	51.46	35.6	15.14	58.6	100	0	P	V
													V
802.11n HT20 CH 13 2472MHz		4944	40.68	-33.32	74	54.47	34.36	11.32	59.47	100	0	P	H
		7416	42.69	-31.31	74	50.55	35.6	15.14	58.6	100	0	P	H
													H
													H
		4944	40.79	-33.21	74	54.58	34.36	11.32	59.47	100	0	P	V
		7416	44.08	-29.92	74	51.94	35.6	15.14	58.6	100	0	P	V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
2.4GHz 802.11g LF		30.54	27.01	-12.99	40	38.42	18.28	1.77	31.46	199	33	P	H	
		55.38	21.7	-18.3	40	44.73	6.4	1.77	31.2			P	H	
		154.74	18.43	-25.07	43.5	36.27	10.7	2.61	31.15			P	H	
		718.6	25.1	-20.9	46	29.73	21.36	4.41	30.4			P	H	
		850.2	27.45	-18.55	46	29.86	23.29	4.7	30.4			P	H	
		949.6	28.97	-17.03	46	30.03	24.4	4.94	30.4			P	H	
														H
														H
														H
														H
														H
														H
														H
			30	27.04	-12.96	40	37.97	18.8	1.77	31.5	136	21	P	V
			77.25	22.73	-17.27	40	44.97	6.9	2.06	31.2			P	V
			161.22	17.5	-26	43.5	35.71	10.36	2.61	31.18			P	V
			756.4	26.86	-19.14	46	30.67	22.1	4.48	30.39			P	V
			849.5	27.29	-18.71	46	29.69	23.3	4.7	30.4			P	V
			935.6	28.77	-17.23	46	30.04	24.3	4.8	30.37			P	V
														V
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.													





**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2412MHz													

- 5. Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- 6. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- 5. Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- 6. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- 5. Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- 6. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



# Appendix C. Radiated Spurious Emission Plots

2.4GHz 2400~2483.5MHz





WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Vertical
Peak	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>
Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz – Low channel location	
1	Horizontal	Vertical
Peak	<p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	<p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>
Avg.	<p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>	<p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>

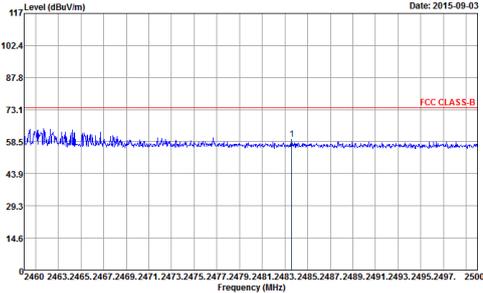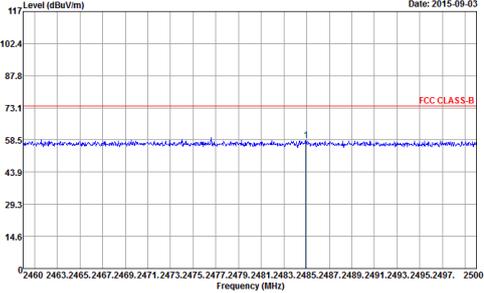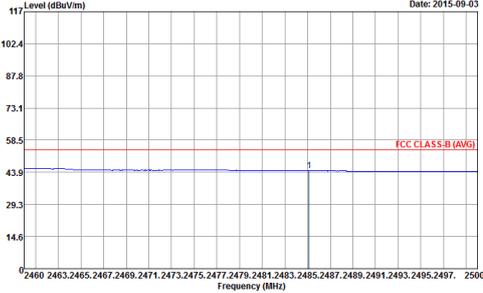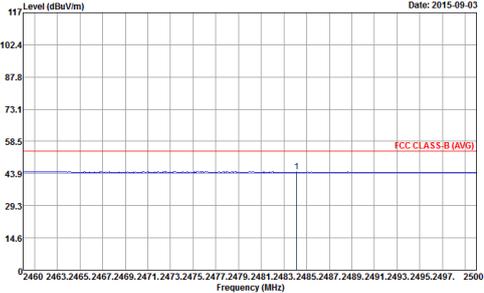

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - High channel location	
1	Horizontal	Vertical
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The blue signal line shows a peak at 2437 MHz reaching approximately 73.1 dBuV/m.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The blue signal line shows a peak at 2437 MHz reaching approximately 73.1 dBuV/m.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B (AVG) limit at 58.5 dBuV/m. The blue signal line shows a peak at 2437 MHz reaching approximately 58.5 dBuV/m.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B (AVG) limit at 58.5 dBuV/m. The blue signal line shows a peak at 2437 MHz reaching approximately 58.5 dBuV/m.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
Peak	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH12 2467MHz	
1	Horizontal	Vertical
Peak	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak</p>

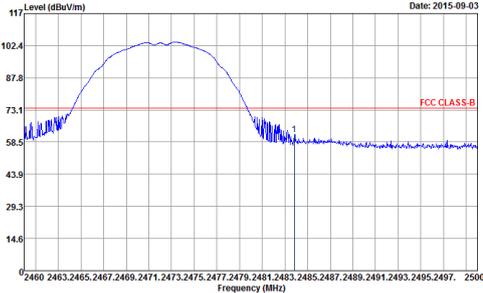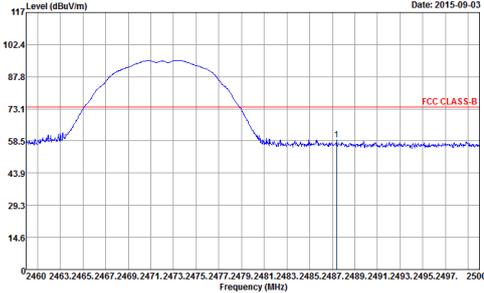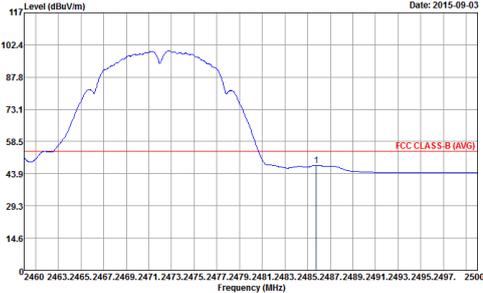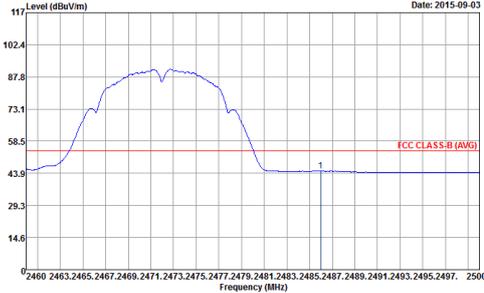

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH13 2472MHz	
1	Horizontal	Vertical
Peak	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	 <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak</p>



2.4GHz 2400~2483.5MHz





WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
2	Horizontal	Vertical
Peak	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>
Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - Low channel location	
2	Horizontal	Vertical
Peak	<p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	<p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>
Avg.	<p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>	<p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>

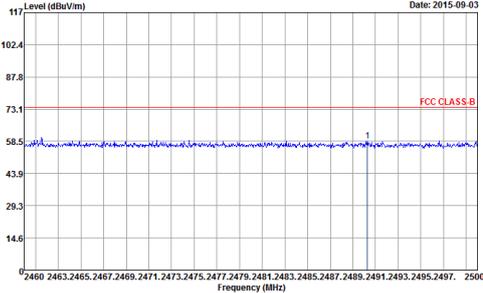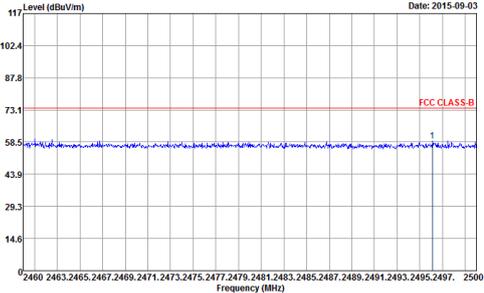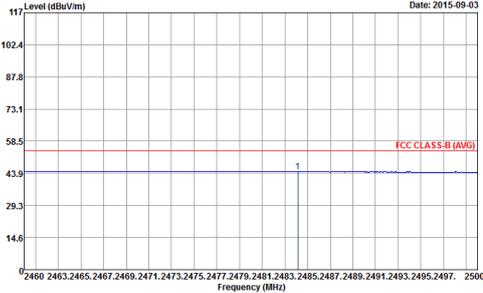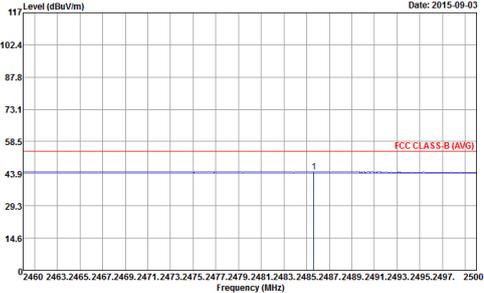

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz -High channel location	
2	Horizontal	Vertical
Peak	 <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak</p>	 <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak</p>
Avg.	 <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak</p>	 <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
2	Horizontal	Vertical
Peak	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH12 2467MHz	
2	Horizontal	Vertical
Peak	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak</p>	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak</p>
Avg.	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak</p>	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH13 2472MHz	
2	Horizontal	Vertical
Peak	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-03</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak</p>







2.4GHz 2400~2483.5MHz





WIFI 802.11g (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1+2	Horizontal	Vertical
Peak	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL Detector : Peak</p>
Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL Detector : Peak</p>

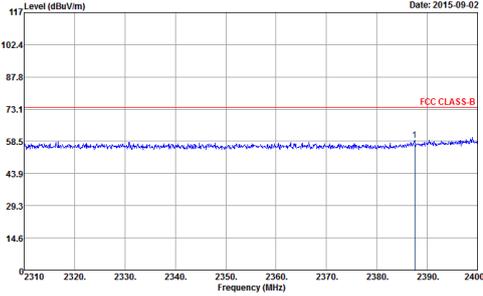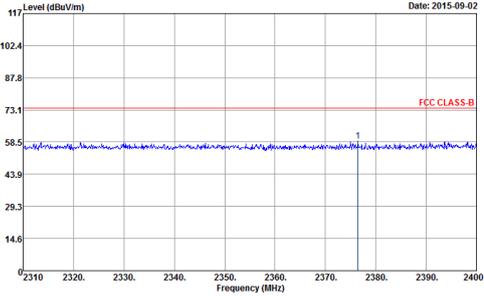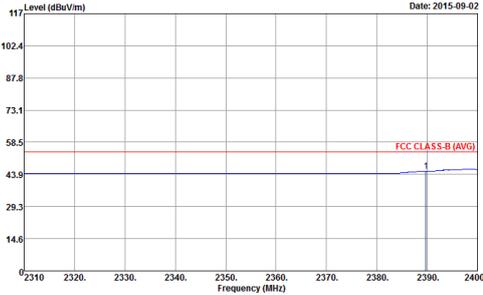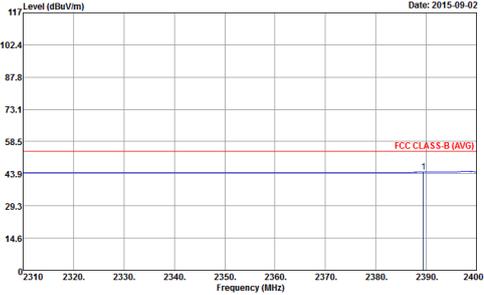

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - Low channel location	
1+2	Horizontal	Vertical
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red horizontal line indicates the FCC CLASS-B limit at 73.1 dBuV/m. A blue trace shows the measured signal with a peak at 2437 MHz. A vertical line labeled '1' points to this peak. The date is 2015-09-02.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red horizontal line indicates the FCC CLASS-B limit at 73.1 dBuV/m. A blue trace shows the measured signal with a peak at 2437 MHz. A vertical line labeled '1' points to this peak. The date is 2015-09-02.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation showing average values. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red horizontal line indicates the FCC CLASS-B (AVG) limit at 58.5 dBuV/m. A blue trace shows the average signal with a peak at 2437 MHz. A vertical line labeled '1' points to this peak. The date is 2015-09-02.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation showing average values. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red horizontal line indicates the FCC CLASS-B (AVG) limit at 58.5 dBuV/m. A blue trace shows the average signal with a peak at 2437 MHz. A vertical line labeled '1' points to this peak. The date is 2015-09-02.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak</p>

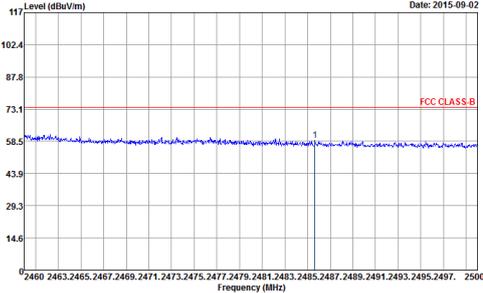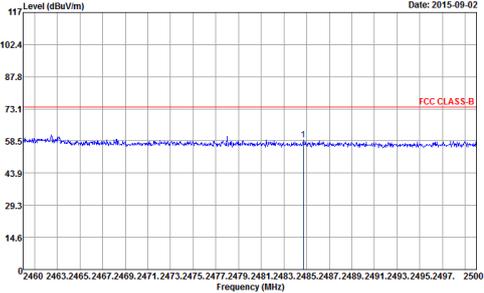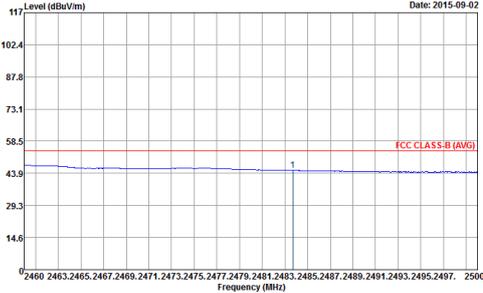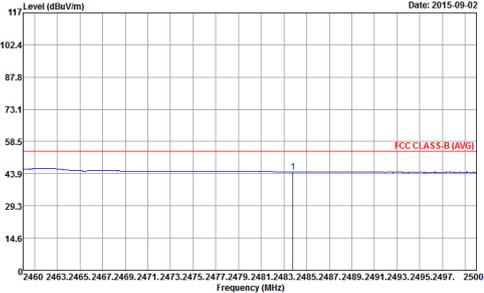

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - High channel location	
1+2	Horizontal	Vertical
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B limit at 73.1 dBuV/m. A blue trace shows the measured signal with a peak at 2437 MHz reaching approximately 85 dBuV/m.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B limit at 73.1 dBuV/m. A blue trace shows the measured signal with a peak at 2437 MHz reaching approximately 85 dBuV/m.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B (AVG) limit at 58.5 dBuV/m. A blue trace shows the average signal level, which is consistently below the limit.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B (AVG) limit at 58.5 dBuV/m. A blue trace shows the average signal level, which is consistently below the limit.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1+2	Horizontal	Vertical
Peak	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>
Avg.	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH12 2467MHz	
1+2	Horizontal	Vertical
Peak	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>
Avg.	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak</p>

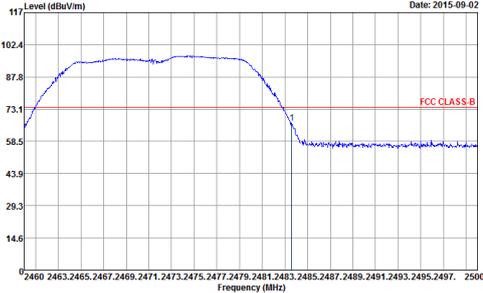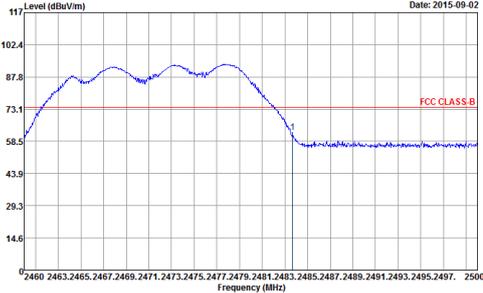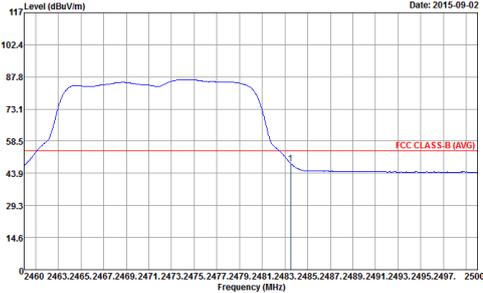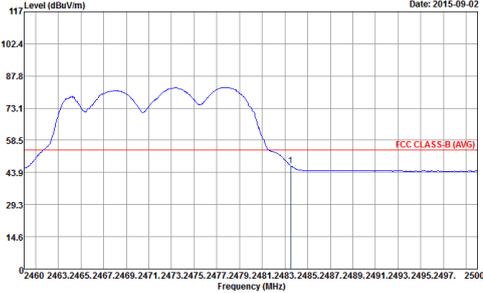

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH013 2472MHz	
1+2	Horizontal	Vertical
Peak	 <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak</p>	 <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak</p>
Avg.	 <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak</p>	 <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL            RBW:1000.000kHz VBW:0.010kHz SWT:Auto            Detector : Peak</p>







2.4GHz 2400~2483.5MHz





WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1+2	Horizontal	Vertical
Peak	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>
Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak</p>

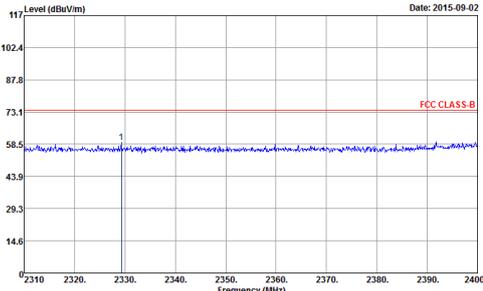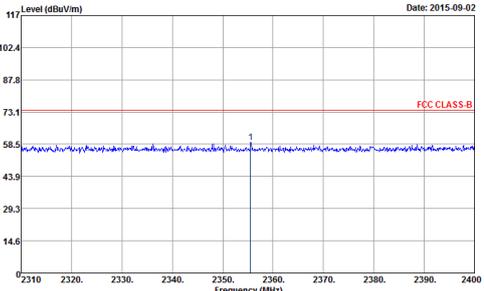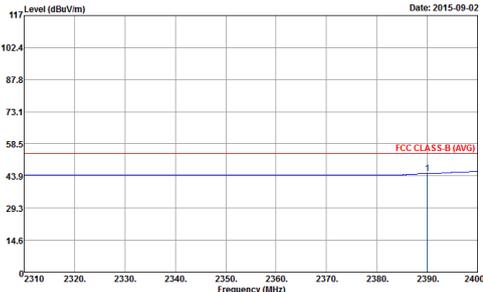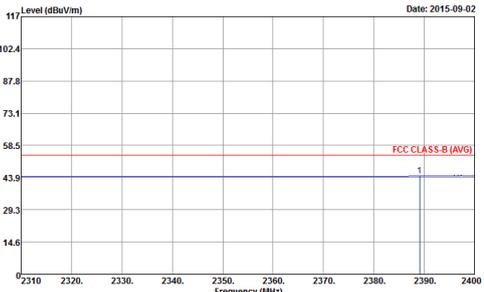

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - Low channel location	
1+2	Horizontal	Vertical
Peak	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>
Avg.	 <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak</p>

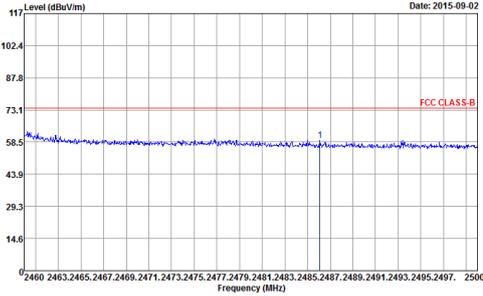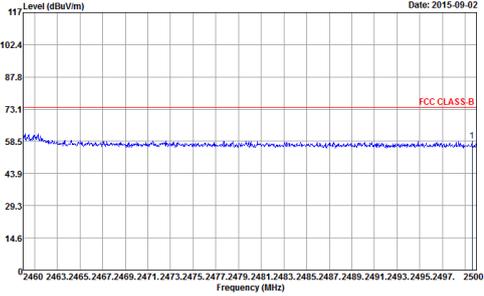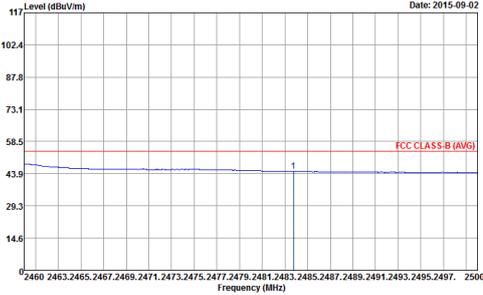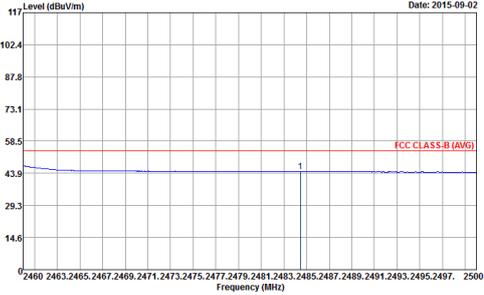

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - High channel location	
1+2	Horizontal	Vertical
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The blue trace shows a signal level around 58.5 dBuV/m with a small peak at 2437 MHz.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The blue trace shows a signal level around 58.5 dBuV/m with a small peak at 2437 MHz.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B (AVG) limit at 58.5 dBuV/m. The blue trace shows a signal level around 43.9 dBuV/m with a small peak at 2437 MHz.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line indicates the FCC CLASS-B (AVG) limit at 58.5 dBuV/m. The blue trace shows a signal level around 43.9 dBuV/m with a small peak at 2437 MHz.</p> <p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1+2	Horizontal	Vertical
Peak	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH12 2467MHz	
1+2	Horizontal	Vertical
Peak	<p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>	<p>Site : 03CH07-HY            Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak</p>
Avg.	<p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>	<p>Site : 03CH07-HY            Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL            RBW:1000.000KHz VBW:0.010KHz SWT:Auto            Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH13 2472MHz	
1+2	Horizontal	Vertical
Peak	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>
Avg.	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak</p>	<p>Date: 2015-09-02</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak</p>



2.4GHz 2400~2483.5MHz



WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>

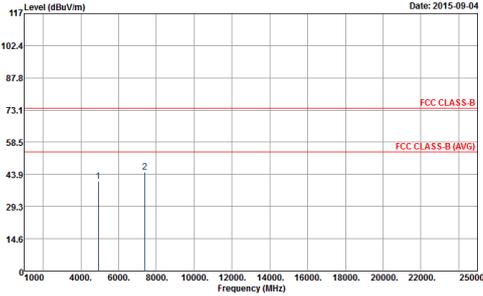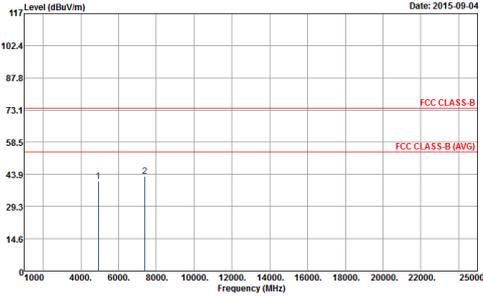

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH12 2467MHz	
1	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH13 2472MHz	
1	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	<p>Date: 2015-09-04</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Date: 2015-09-04</p> <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
2	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>

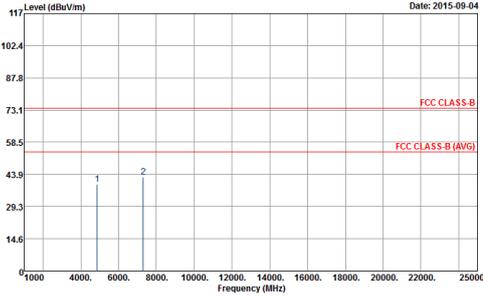
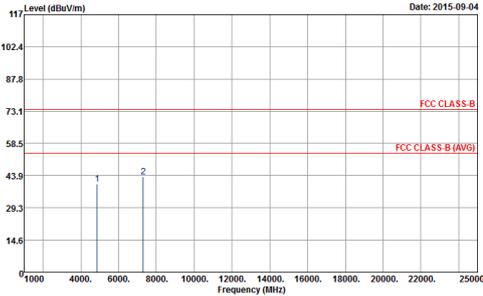


WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
2	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
2	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>

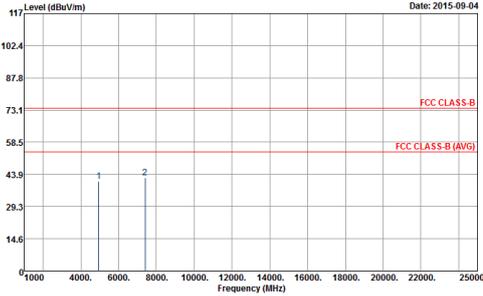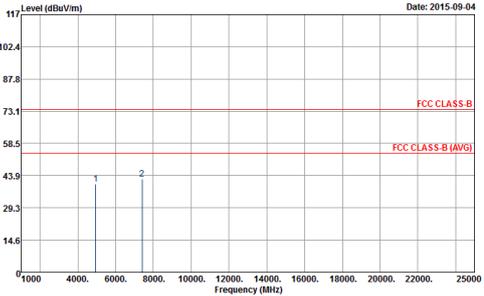

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH12 2467MHz	
2	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH13 2472MHz	
2	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>





2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH01 2412MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>

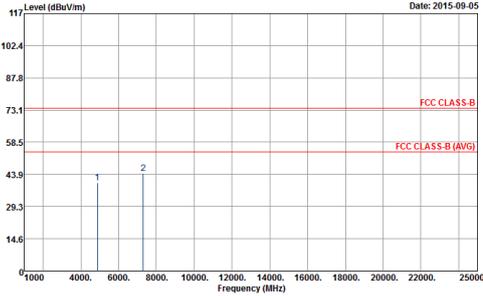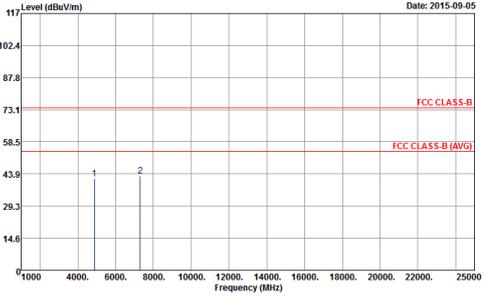

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
1+2	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH12 2467MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>

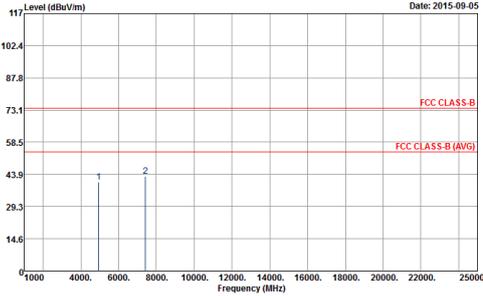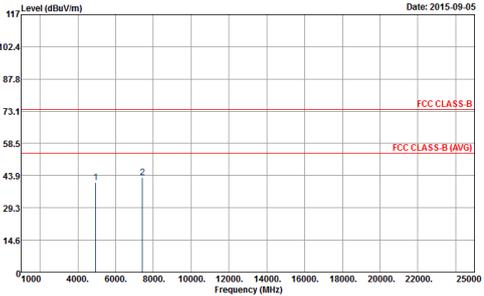

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH13 2472MHz	
1+2	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>



2.4GHz 2400~2483.5MHz



WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH06 2437MHz	
1+2	Horizontal	Vertical
<b>Peak Avg.</b>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>

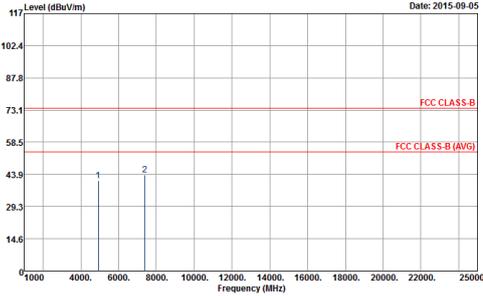
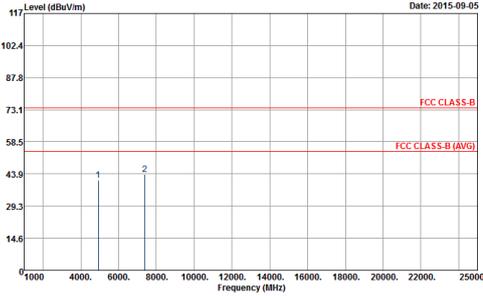


WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1+2	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>

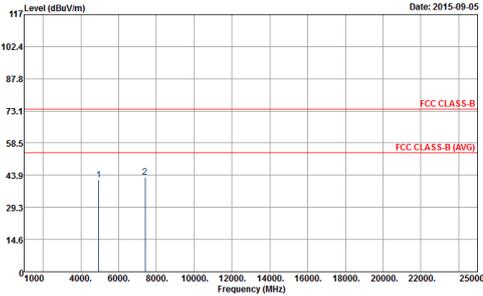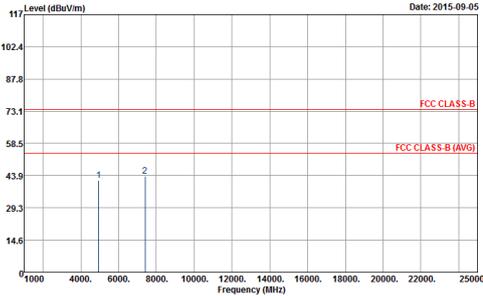

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH12 2467MHz	
1+2	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>

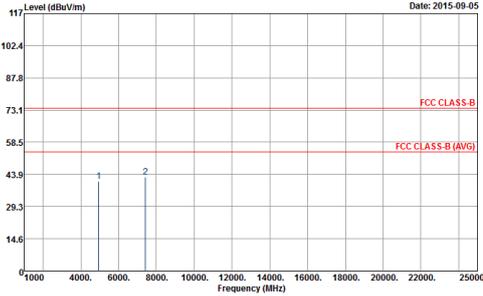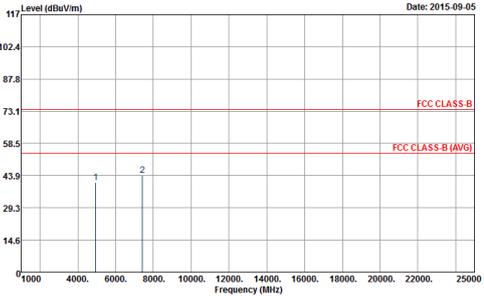

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH13 2472MHz	
1+2	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11b LF	
1	Horizontal	Vertical
QP / Peak	<p>Horizontal plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line and a red stepped line representing FCC CLASS B limits. The signal level is consistently below the limits. Site: 03CH07-HY, Condition: FCC CLASS-B 3m LF-ANT(131102) HORIZONTAL. Date: 2015-09-06.</p>	<p>Vertical plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line and a red stepped line representing FCC CLASS B limits. The signal level is consistently below the limits. Site: 03CH07-HY, Condition: FCC CLASS-B 3m LF-ANT(131102) VERTICAL. Date: 2015-09-06.</p>



WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11b LF	
2	Horizontal	Vertical
QP / Peak		



**2.4GHz 2400~2483.5MHz**

**Emission below 1GHz**

**2.4GHz WIFI 802.11g (LF)**

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11g LF	
1+2	Horizontal	Vertical
<p><b>QP / Peak</b></p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m LF-ANT(131102) HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m LF-ANT(131102) VERTICAL</p>



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11n HT20 LF	
1+2	Horizontal	Vertical
QP / Peak	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m LF-ANT(131102) HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m LF-ANT(131102) VERTICAL</p>