



Accredited testing-laboratory

DAR registration number: DAT-P-176/94-D1

**Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97**

Recognized by the Federal Communications Commission

Anechoic chamber registration no.: 90462 (FCC)

Anechoic chamber registration no.: 3463A-1 (IC)

Certification ID: DE 0001

Accreditation ID: DE 0002

Accredited Bluetooth® Test Facility (BQTF)

*The Bluetooth word mark and logos are owned by the Bluetooth SIG,
Inc. and any use of such marks by Cetecom ICT is under license*

Annex to : 2-4576-13-02/07
Test report no. :
Type identification : AAC-1052042-BV
Applicant : Sony Ericsson Mobile Communications AB
FCC ID : PY7A1052042
IC Reg. No. : 4170B-A1052042
Test standards : 47 CFR Part 15
RSS-210 Issue 6

Table of contents

- 1 General information..... 3**
 - 1.1 Notes3
 - 1.2 Testing laboratory4
 - 1.3 Details of applicant4
 - 1.4 Application details4
- 2 Test standard/s:..... 5**
- 3 Technical tests..... 6**
 - 3.1 Details of manufacturer.....6
 - 3.2 Test item(s) and test configuration.....6
- 4 Summary of Measurement Results and list of all performed test cases 7**
- 5 Measurements and results 8**
- 6 Annex A: FCC Part 15 Subpart B 9**
 - 6.1 Conducted Limits9
 - 6.2 Receiver spurious emission radiated (Idle mode)12
- 7 Test equipment and ancillaries used for tests 15**
- 8 Photographs of the Test Set-up 16**
- 9 Photographs of the EUT 19**

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test laboratory manager:

2007-05-09

Jakob Reschke



Date

Name

Signature

Technical responsibility for area of testing:

2007-05-09

Michael Berg



Date

Name

Signature

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation: The test laboratory (area of testing) is accredited according to
DIN EN ISO/IEC 17025
DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :
Street :
Town :
Country :
Phone :
Fax :

1.3 Details of applicant

Name:	Sony Ericsson Mobile Communications AB
Street:	Torshamnsgatan 27
Town:	164 94 Kista
Country:	Sweden
Telephone:	+46 46 19 40 00
Fax:	+46 8 404 3430
Contact:	Kenth Skoglund
E-mail:	kenth.skoglund@sonyericsson.com
Telephone:	+46 8 508 77 056

1.4 Application details

Date of receipt of order:	2007-03-14
Date of receipt of test item:	2007-05-02
Date of start test:	2007-05-02
Date of end test:	2007-05-09
Persons(s) who have been present during the test:	

2 Test standard/s:

47 CFR Part 15	2006-08	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter A - general, Part 15-Radio frequency devices
		Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter B - common carrier services, Part 24-Personal communications services
		Spectrum Management and Telecommunications Policy - Radio Standards Specifications 800 MHz Cellular Telephones Employing New Technologies
		Spectrum Management and Telecommunications Policy - Radio Standards Specifications 2 GHz Personal Communication Services

3 Technical tests

3.1 Details of manufacturer

Name:	Sony Ericsson Mobile Communications AB
Street:	Nya Vattentorget
Town:	22188 Lund
Country:	Sweden

3.2 Test item(s) and test configuration

No.: 1	Standard Charger CST-60	with	AAC-1052042-BV
No.: 2		with	AAC-1052042-BV
No.: 3		with	AAC-1052042-BV
No.: 4		with	AAC-1052042-BV
No.: 5		with	AAC-1052042-BV
No.: 6		with	AAC-1052042-BV
No.: 7		with	AAC-1052042-BV
No.: 8		with	AAC-1052042-BV
No.: 9		with	AAC-1052042-BV
No.: 10		with	AAC-1052042-BV

4 Summary of Measurement Results and list of all performed test cases

- No deviations from the technical specifications were ascertained**
- There were deviations from the technical specifications ascertained

Section in this Report	Test Name	Verdict
6.1	Conducted limits CFR Part 15.207, 15.107 RSS 210, Issue 6, Section 6.6 , 7.4	Pass
6.2	Receiver spurious emission radiated (Idle mode) CFR Part SUBCLAUSE § 15.109 RSS 210, Issue 6, Section 7.3 Receiver Spurious Emissions (Radiated)	Pass

5 Measurements and results

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are conforming to specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Antennas are conforming to ANSI C63.2-1996 item 15.

9 kHz – 150 kHz ,Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.
150 kHz - 30 MHz: Quasi Peak measurement, 9 kHz Bandwidth, passive loop antenna.
30 MHz - 200 MHz: Quasi Peak measurement, 120 KHz Bandwidth, biconical antenna
200MHz - 1GHz: Quasi Peak measurement, 120 KHz Bandwidth, log periodic antenna
>1GHz: Average, RBW 1MHz, VBW 10 Hz, wave guide horn

All measurement settings are according to FCC 15.109 and 15.107

6 Annex A: FCC Part 15 Subpart B

6.1 Conducted Limits

Reference

FCC:	CFR Part 15.207, 15.107
IC:	RSS 210, Issue 6, Section 6.6 , 7.4


Limits: § 15.107 / 15.207

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency


Plot 1: (Part 22)

Idle Mode: 150 kHz – 30 MHz

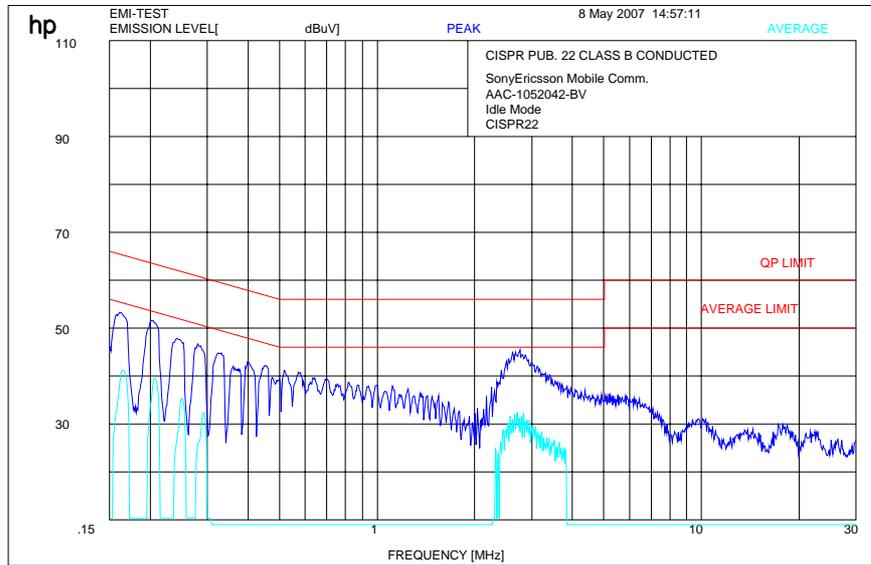


Plot 2: (Part 22)


Traffic Mode : 150 kHz – 30 MHz

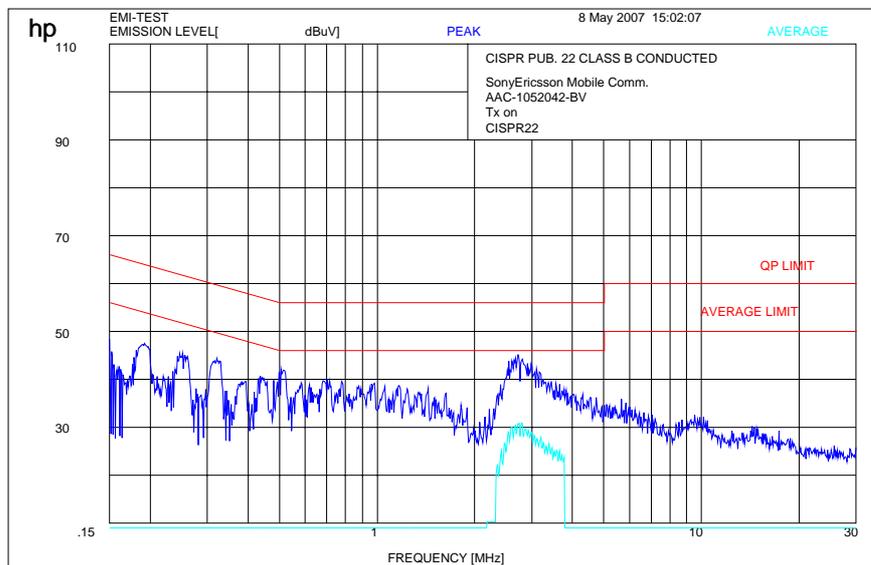

Plot 1: (Part 24)
Idle Mode: 150 kHz – 30 MHz

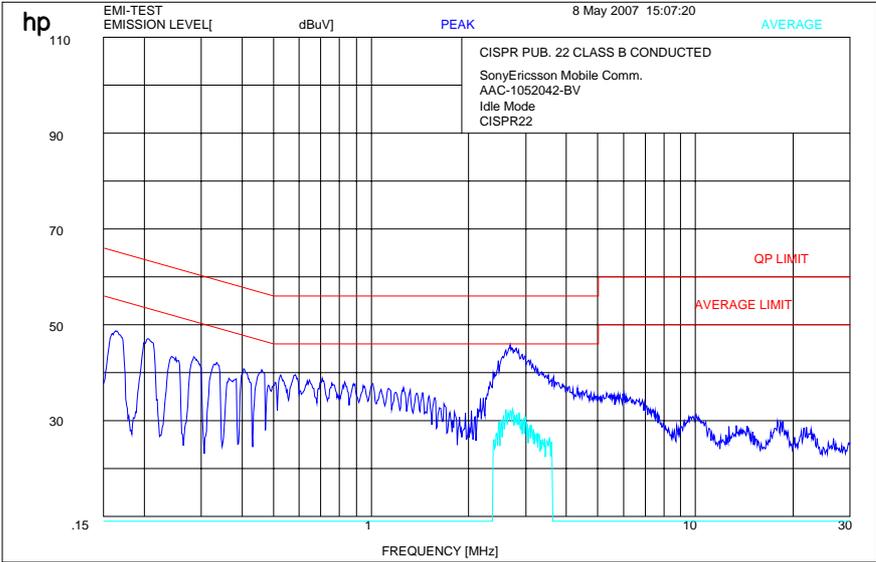

Plot 2: (Part 24)
Traffic Mode : 150 kHz – 30 MHz

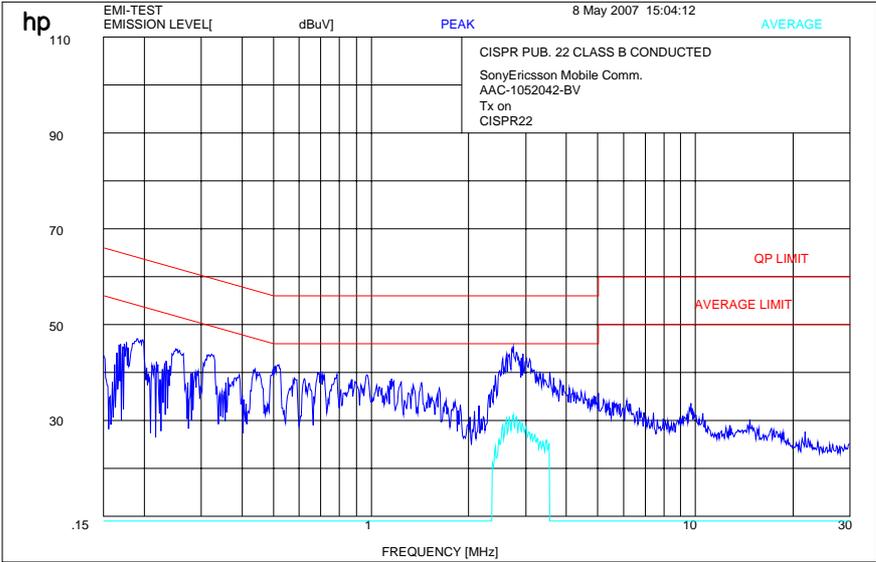

6.2 Receiver spurious emission radiated (Idle mode)

Reference

FCC:	CFR Part SUBCLAUSE § 15.109
IC:	RSS 210, Issue 6, Section 7.3 Receiver Spurious Emissions (Radiated)

SPURIOUS EMISSIONS LEVEL ($\mu\text{V/m}$)								
Idle Mode								
F [MHz]	Detector	Level [$\mu\text{V/m}$]	F [MHz]	Detector	Level [$\mu\text{V/m}$]	F [MHz]	Detector	Level [$\mu\text{V/m}$]
No critical peaks found								
Measurement uncertainty			± 3 dB					

$f < 1$ GHz : RBW/VBW: 100 kHz


$f \geq 1$ GHz : RBW/VBW: 1 MHz

Limits


SUBCLAUSE § 15.109

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3


Plot 1:
RX (30 MHz to 4 GHz)

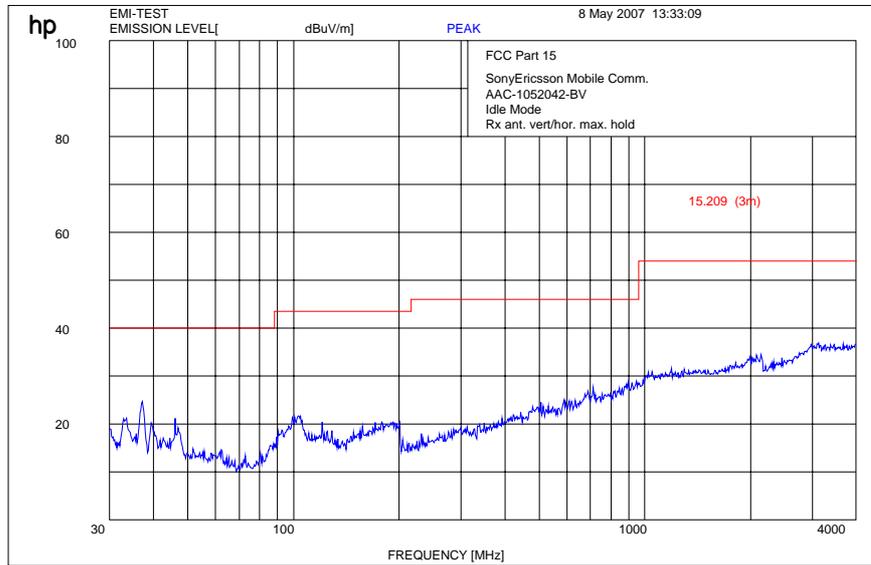

Plot 2:
RX (4 GHz to 12 GHz)

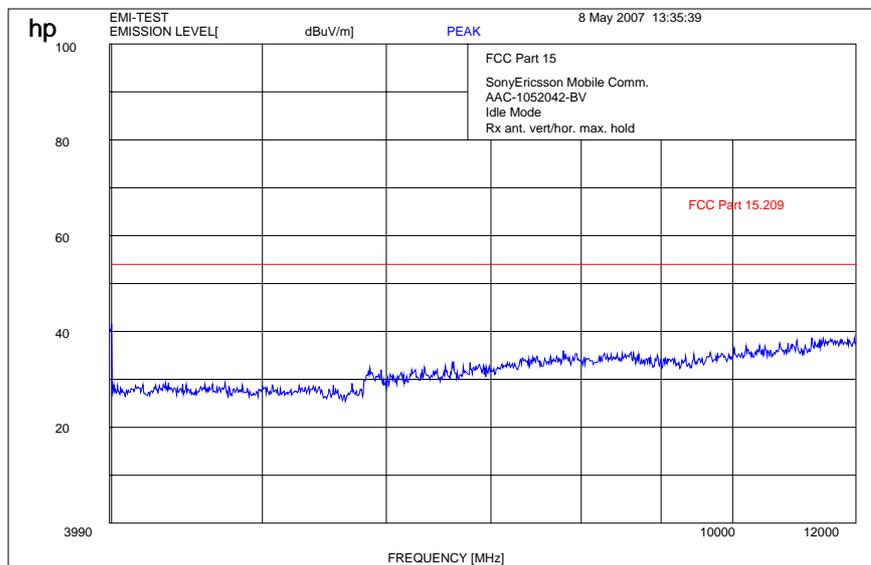

Plot 3:
RX (12 GHz to 25 GHz)

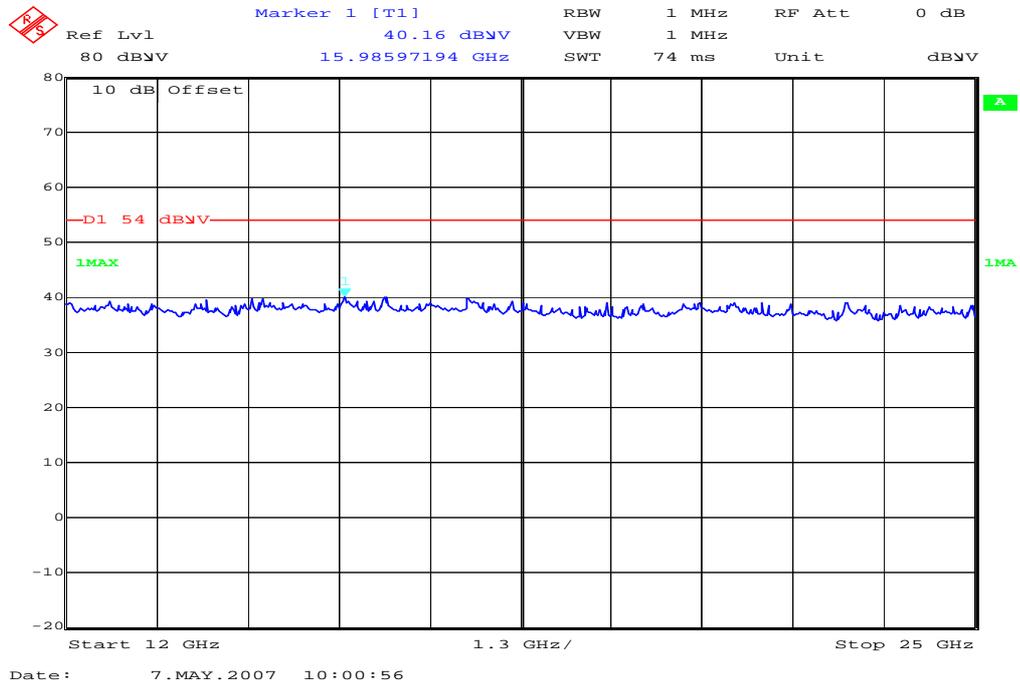

7 Test equipment and ancillaries used for tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

Anechoic chamber C:

No	Equipment/Type	Manufact.	Serial Nr.	Inv. No. Cetecom
1	Anechoic chamber	MWB	87400/02	300000996
2	System-Rack 85900	HP I.V.	*	300000222
3	Measurement System 1			
4	Spektrum Analyzer 8566B	HP	2747A05306	300001000
5	Spektrum Analyzer Display 85662A	HP	2816A16541	300002297
6	Quasi-Peak-Adapter 85650A	HP	2811A01131	300000999
7	RF-Preselector 85685A	HP	2837A00779	300000218
8	PC Vectra VL	HP		300001688
9	Software EMI	HP		300000983
10	Measurement System 2			
11	FSP 30	R&S	100623	ICT 300003464
12	PC	F+W		
13	TILE	TILE		
14	Biconical antenna	EMCO	S/N: 860 942/003	
15	Log. Period. Antenna 3146	EMCO	2130	300001603
16	Double Ridged Antenna HP 3115P	EMCO	3088	300001032
17	Active Loop Antenna 6502	EMCO	2210	300001015
18	Power Supply 6032A	HP	2818A03450	300001040
19	Busisolator	Kontron		300001056
20	Leitungsteiler 11850C	HP		300000997
21	Power attenuator 8325	Byrd	1530	300001595
22	Band reject filter WRCG1855/1910	Wainwright	7	300003350
23	Band reject filter WRCG2400/2483	Wainwright	11	300003351

Rack:

No	Equipment/Type	Manufact.	Serial Nr.	Inv. No. Cetecom
1	FSP 30	R&S		300003575
2	CMU-200	R&S	103992	300003231
3	Switch Matrix	HP		300000929
4	Power Supply	HP	3041A00544	300002270
5	Signal Generator	R&S	836206/0092	300002680

8 Photographs of the Test Set-up

Photo documentation

Photo 1:

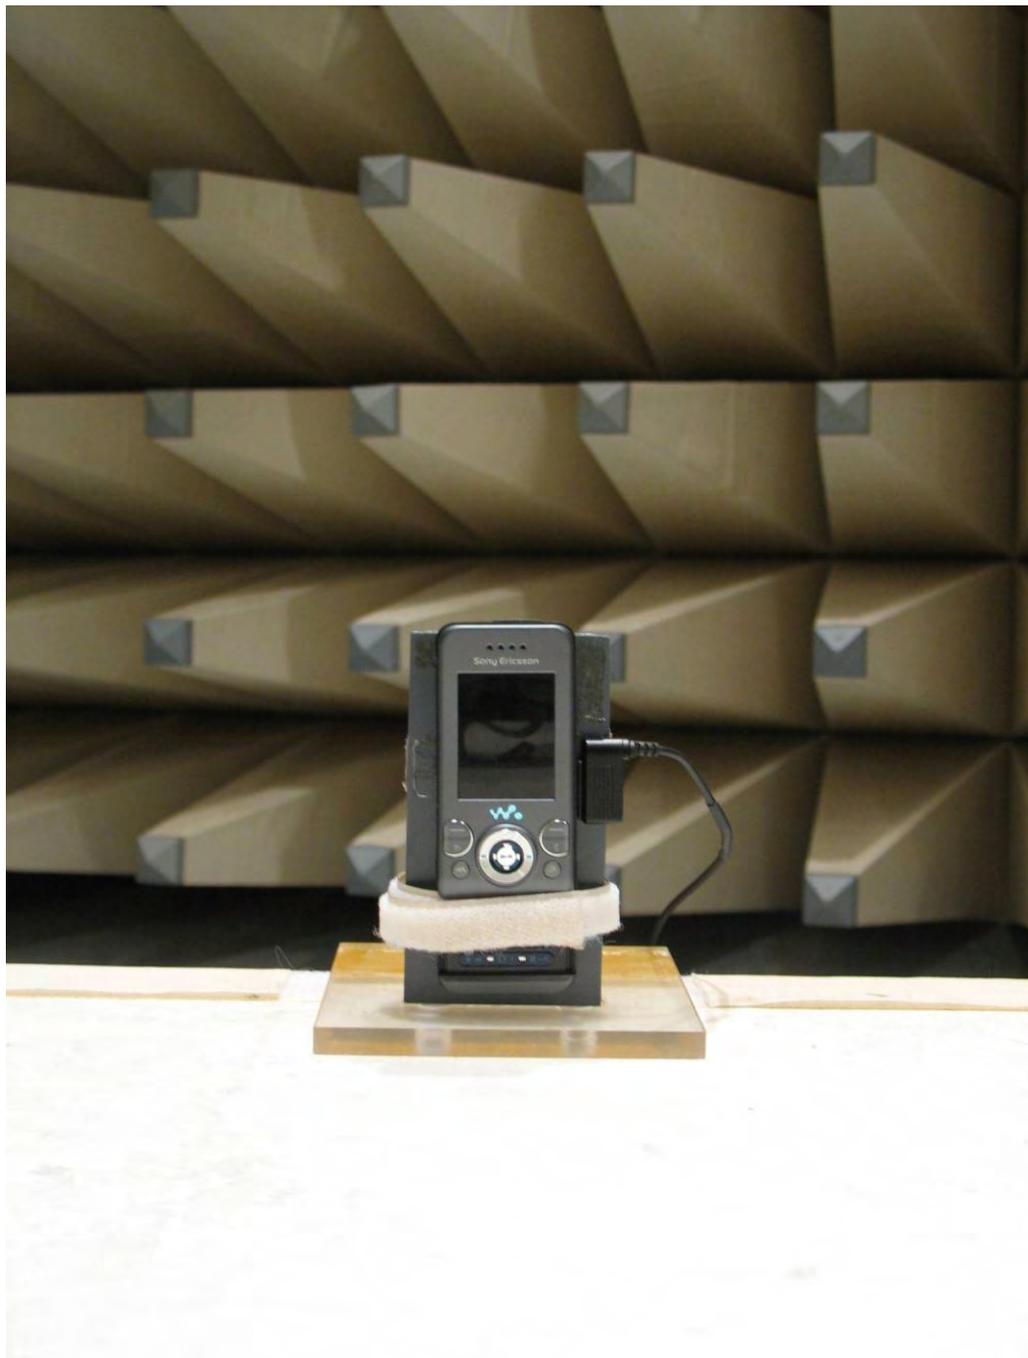


Photo 2:


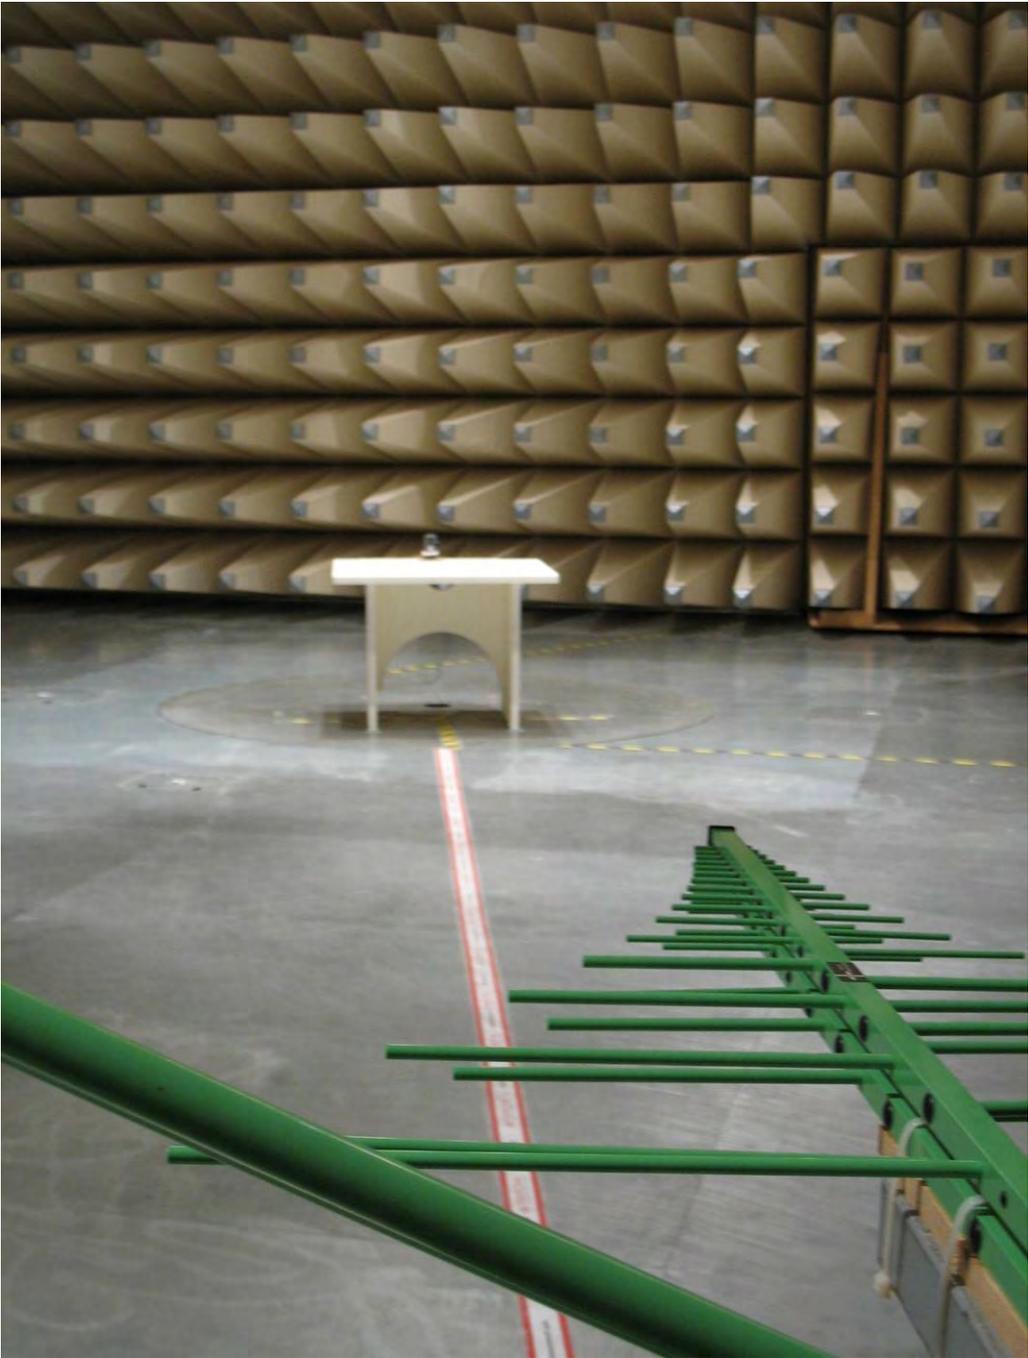


Photo 3:

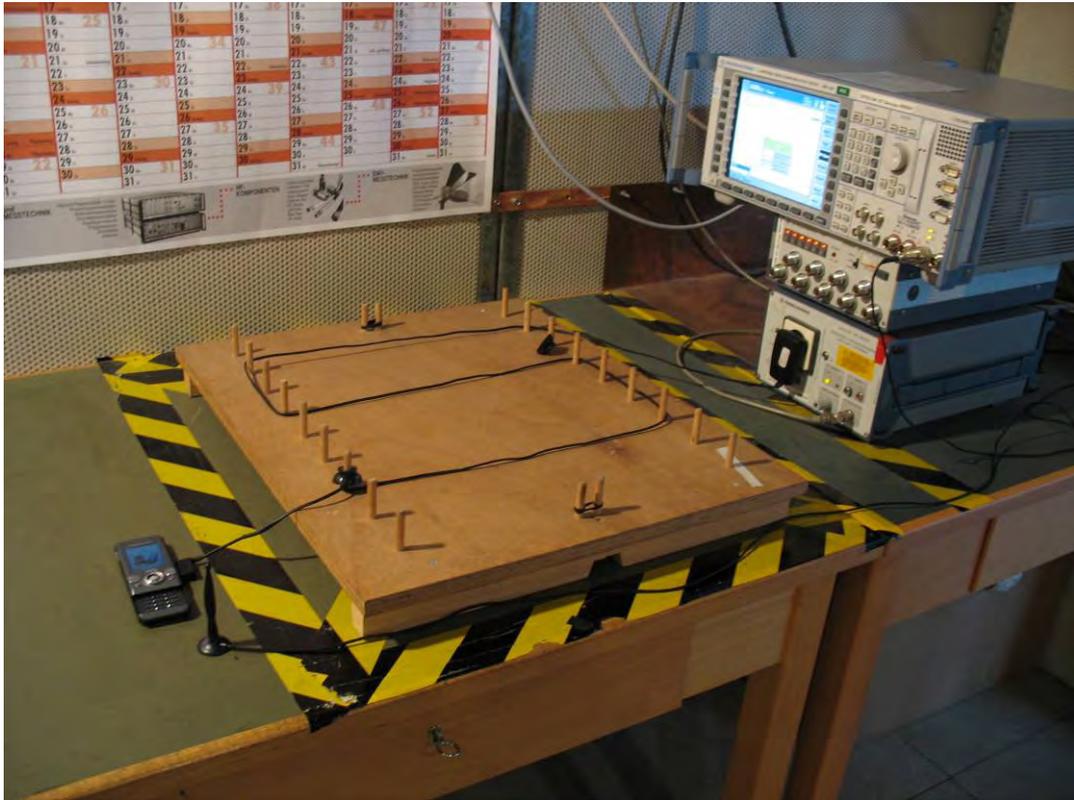

9 Photographs of the EUT

Photo documentation

Photo 4:



Photo 5:



Photo 6:



Photo 7:



Photo 8:



Photo 9:



Photo 10:



Photo 11:



Photo 12:



Photo 13:



Photo 14:



Photo 15:



Photo 16:



Photo 17:

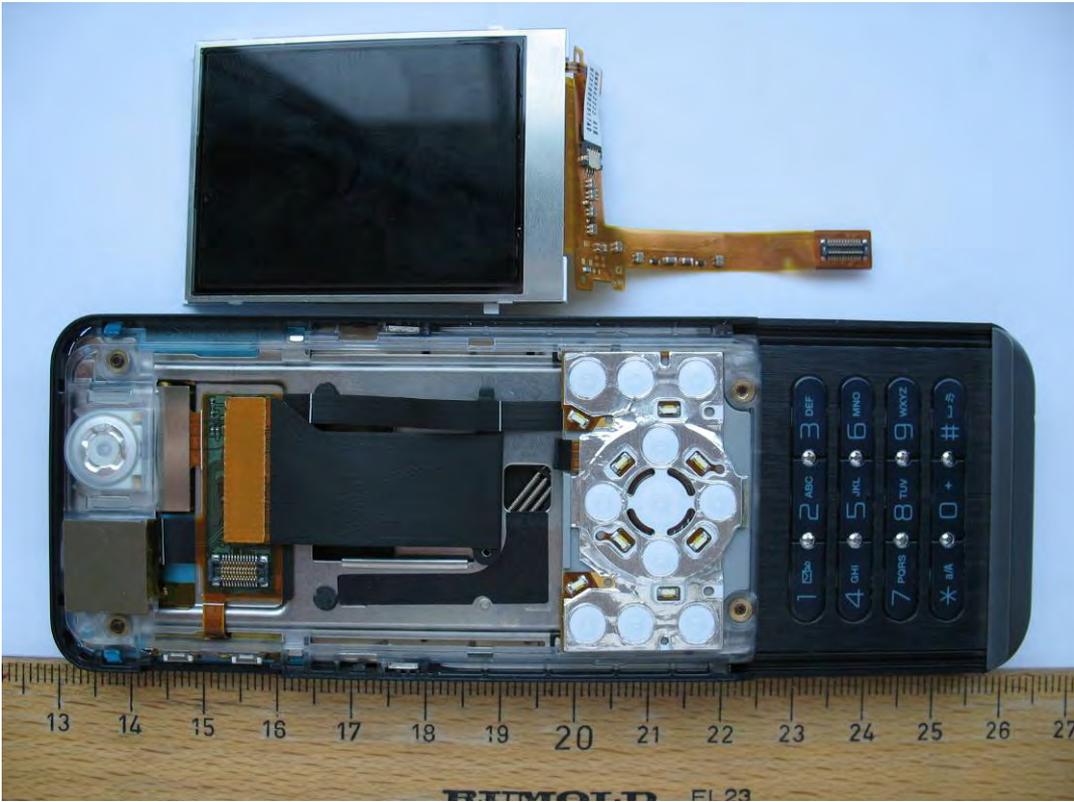


Photo 18:

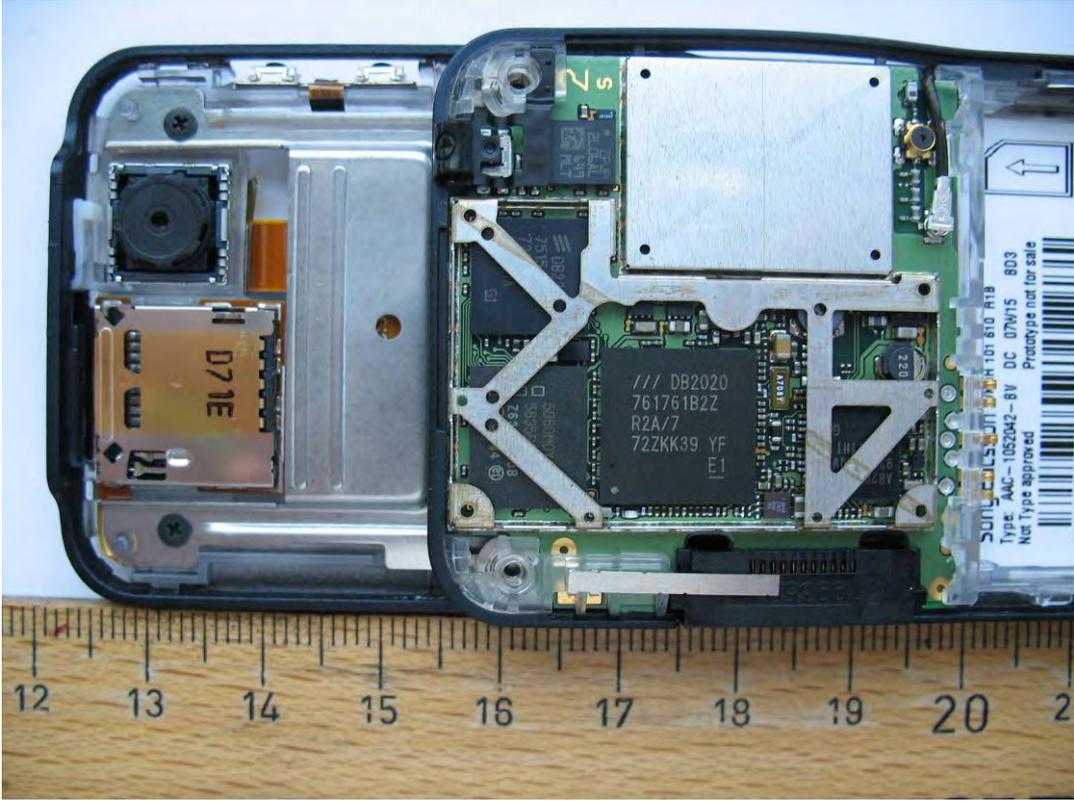


Photo 19:



Photo 20:



Photo 21:



Photo 22:

