



Accredited testing-laboratory

DAR registration number: DAT-P-176/94-D1

**Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97**

Recognized by the Federal Communications Commission

Anechoic chamber registration no.: 90462 (FCC)

Anechoic chamber registration no.: 3463A-1 (IC)

Certification ID: DE 0001

Accreditation ID: DE 0002

Accredited Bluetooth® Test Facility (BQTF)

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Cetecom ICT is under license

Test report no. : 2-4883-05-04/08-A
Type identification : FAD-3022019-BV
Applicant : Sony Ericsson Mobile Communications AB
FCC ID : PY7F3022019
IC Certification No : 4170B-F3022019
Test standards : 47 CFR Part 15
RSS - 210 Issue 7

Table of contents

1	General information	3
1.1	Notes	3
1.2	Testing laboratory	4
1.3	Details of applicant	4
1.4	Application details	4
2	Test standard/s:	5
3	Technical tests	6
3.1	Details of manufacturer.....	6
3.1.1	Test item.....	6
3.1.2	Additional EUT information For IC Canada (appendix 2).....	7
3.1.3	EUT operating modes.....	8
3.1.4	Extreme conditions testing values	8
4	Summary of Measurement Results and list of all performed test cases	9
5	RF measurement testing	10
5.1	Description of test set-up.....	10
5.1.1	Radiated measurements.....	10
5.1.2	Conducted measurements.....	10
5.2	Referenced Documents	11
5.3	Additional comments	11
5.4	Antenna gain	11
5.5	Peak Power Spectral density (digitally modulated systems) §15.247(e).....	12
5.6	Spectrum Bandwidth of a DSSS System / 6 dB Bandwidth §15.247(a)(2).....	16
5.7	Maximum output power (conducted) §15.247 (b)(3).....	20
5.8	Max. peak output power (radiated) §15.247 (b)(3)	25
5.9	Band-edge compliance of conducted emissions §15.247 (d)	26
5.10	Band-edge compliance of radiated emissions §15.205	28
5.11	Spurious Emissions - conducted (Transmitter) §15.247 (c).....	32
5.12	Spurious Emissions - radiated (Transmitter) §15.209	33
5.13	Spurious Emissions - radiated (Receiver) §15.109 / 209	48
5.14	Spurious Emissions - radiated <30 MHz §15.209.....	51
5.15	Conducted Emissions <30 MHz §15.107/207.....	52
6	Test equipment and ancillaries used for tests	53
7	Photographs of the Test Set-up	59
8	Photographs of the EUT	62

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test laboratory manager:

2008-02-13

Stefan Bös



Date


Name

Signature

Technical responsibility for area of testing:

2008-02-13

Harro Ames



Date

Name

Signature

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10
66117 Saarbrücken
Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation: The test laboratory (area of testing) is accredited according to
DIN EN ISO/IEC 17025
DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :
Street :
Town :
Country :
Phone :
Fax :

1.3 Details of applicant

Name:	Sony Ericsson Mobile Communications AB
Street:	Torshamnsgatan 27
Town:	164 94 Kista
Country:	Sweden
Telephone:	+46 46 19 40 00
Fax:	+46 (0) 8 404 3430
Contact:	Kenth Skoglund
E-mail:	kenth.skoglund@sonyericsson.com
Telephone:	+46 (0) 70 320 7056

1.4 Application details

Date of receipt of order:	2008-01-24
Date of receipt of test item:	2008-02-04
Date of start test:	2008-02-04
Date of end test	2008-02-13
Persons(s) who have been present during the test:	

2 Test standard/s:

47 CFR Part 15	2007-09	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter A - general, Part 15-Radio frequency devices
RSS - 210 Issue 7	2007-06	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

3 Technical tests

3.1 Details of manufacturer

Name:	Sony Ericsson Mobile Communications AB
Street:	Nya Vattentorget
Town:	22188 Lund
Country:	Sweden

3.1.1 Test item

Kind of test item	: GSM Mobile Phone 900/1800/1900/BT/WLAN
Type identification	: FAD-3022019-BV
S/N serial number	: CB5A0M770Z (radiated) CB5A0M77BY (conducted)
HW hardware status	: AP1.1
SW software status	: ITP/OTP
Frequency Band [MHz]	: ISM 2.400 - 2.483,5
Type of Modulation	: DSSS / OFDM
Number of channels	: 11
Antenna	: Integrated antenna
Power Supply	: 3.8 V DC
Temperature Range	: -20 °C to 55 °C

Max. power radiated: 19.12 dBm

Max. power conducted: 20.55 dBm

FCC ID: PY7F3022019

IC: 4170B-F3022019

3.1.2 Additional EUT information For IC Canada (appendix 2)

IC Registration Number:	4170B-F3022019
Model Name:	FAD-3022019-BV
Manufacturer (complete Address):	Sony Ericsson Mobile Communications AB Nya Vattentorget 22188 Lund Sweden
Tested to Radio Standards Specification (RSS) No.:	RSS-210 Issue 7
Open Area Test Site Industry Canada Number:	IC 3463A-1
Frequency Range (or fixed frequency) [MHz]:	2400 – 2483.5 MHz
RF: Power [W] (max):	Rad. EIRP: 81.66 mW Conducted : 113.5 mW
Antenna Type:	Integrated antenna
Occupied Bandwidth (99% BW) [kHz]:	10160 kHz (DSSS) 16600 kHz (OFDM)
Type of Modulation:	DSSS / OFDM
Emission Designator (TRC-43):	10M2G1D (DSSS)
Transmitter Spurious (worst case) [μ V/m in 3m]:	Nothing found
Receiver Spurious (worst case) [μ V/m in 3m]:	Nothing found

ATTESTATION: I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Date: 2008-02-13

Test engineer: Stefan Bös

3.1.3 EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions
Op. 1		low temperature, low power source conditions
Op. 2		low temperature, high power source conditions
Op. 3		high temperature, low power source conditions
Op. 4		high temperature, high power source conditions

*) EUT operating mode no. is used to simplify the test plan

3.1.4 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature	T _{nom}	°C	23
Nominal Humidity	H _{nom}	%	56
Nominal Power Source	V _{nom}	V	3.8

Type of power source: **DC**

Deviations from these values are reported in chapter 2

4 Summary of Measurement Results and list of all performed test cases

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247 - CANADA RSS-210	PASS	2008-02-13	

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
None	Antenna Gain	Yes			
§15.247 (e)	Peak power spectral density	Yes			
§15.247(a)(2)	Spectrum Bandwidth of a DSSS System / 6dB BW	Yes			
§ 15.247 (b)(3)	Maximum output power (conducted)	Yes			
§ 15.247 (b)(3)	Max. peak output power (radiated)	Yes			
§15.247 (d)	Band-edge compliance of conducted emissions	Yes			
§15.205	Band-edge compliance of radiated emissions	Yes			
§15.247 (d)	Spurious Emission - conducted (Transmitter)	Yes			
§ 15.209	Spurious Emission -radiated (Transmitter)	Yes			
§ 15.109	Spurious Emissions-radiated (Receiver)	Yes			
§ 15.209	Spurious Emissions-radiated <30 MHz	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	Yes			

5 RF measurement testing

5.1 Description of test set-up

5.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

9 kHz - 150 MHz: Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.

150 kHz - 30 MHz: Quasi Peak measurement, 9 kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120 kHz Bandwidth, biconical antenna


200MHz - 1GHz: Quasi Peak measurement, 120 kHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 Hz, wave guide horn

All measurement settings are according to FCC 15.209 and 15.207

5.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is connected to the spectrum analyzer. The specific losses for signal path are first checked within a calibration. The measurement readings on the spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

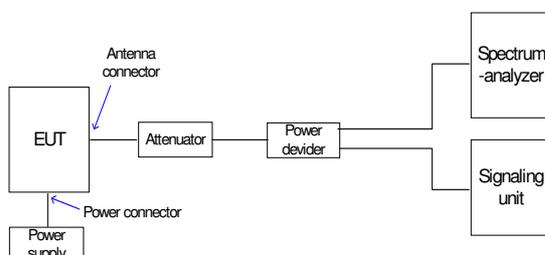

5.2 Referenced Documents

None

5.3 Additional comments

--

5.4 Antenna gain


The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

(DSSS-Mode)

	low channel	mid channel	high channel
Conducted power [dBm]	19.58	20.37	20.55
Radiated power [dBm]	18.33	18.77	19.12
Gain [dBi]	-1.25	-1.60	-1.43


5.5 Peak Power Spectral density (digitally modulated systems) §15.247(e)

Plot 1: DSSS-Mode (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

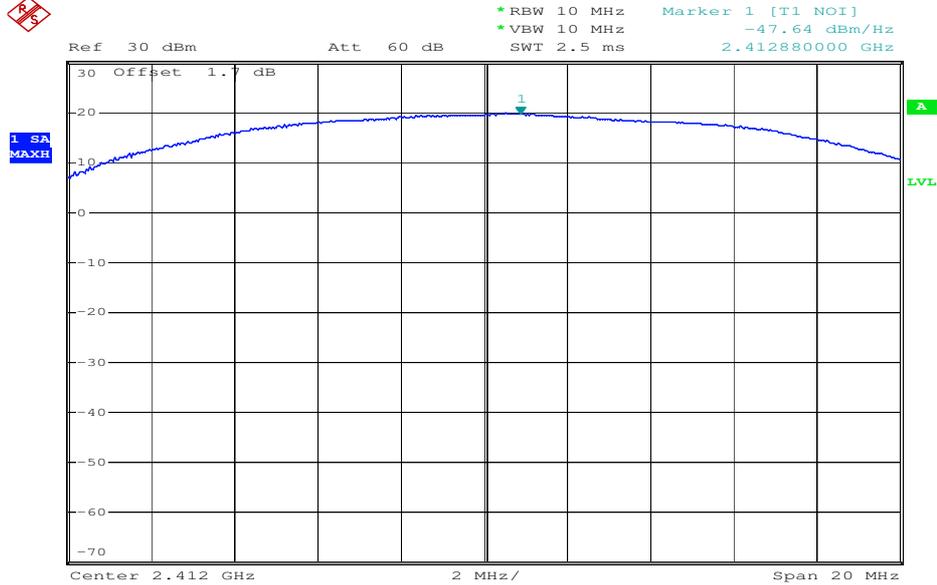


Date: 12.FEB.2008 07:00:27

Plot 2: DSSS-Mode (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

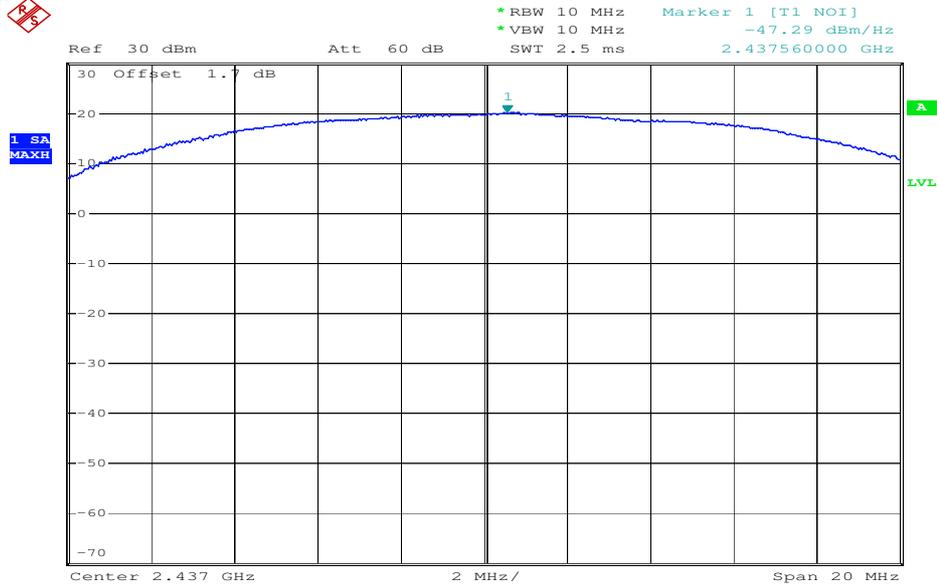


Date: 12.FEB.2008 06:59:31

Plot 3: DSSS-Mode (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

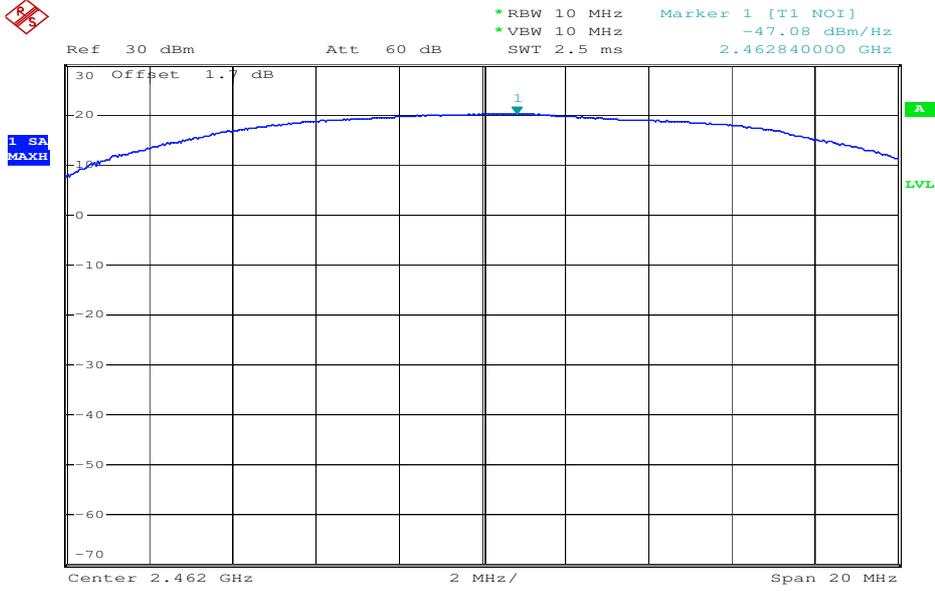


Date: 12.FEB.2008 06:58:36

Plot 4: OFDM-Mode (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

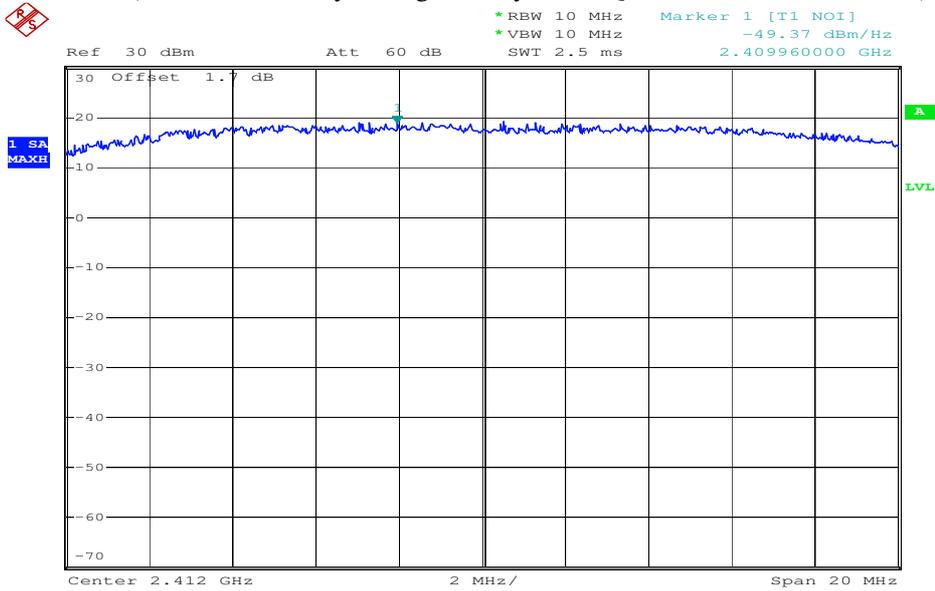


Date: 12.FEB.2008 07:24:01

Plot 5: OFDM-Mode (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

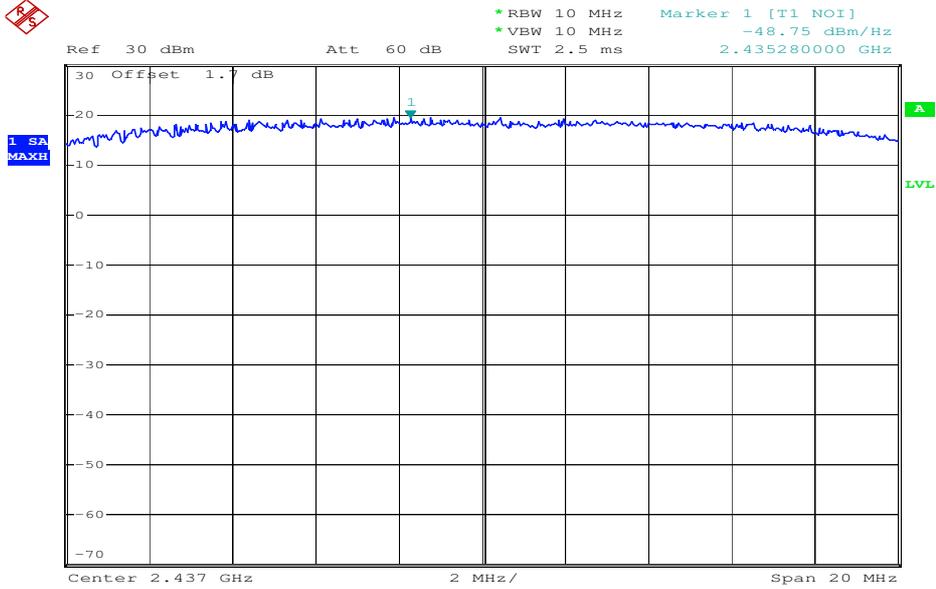

Date: 12.FEB.2008 07:23:02

Plot 6: OFDM-Mode (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

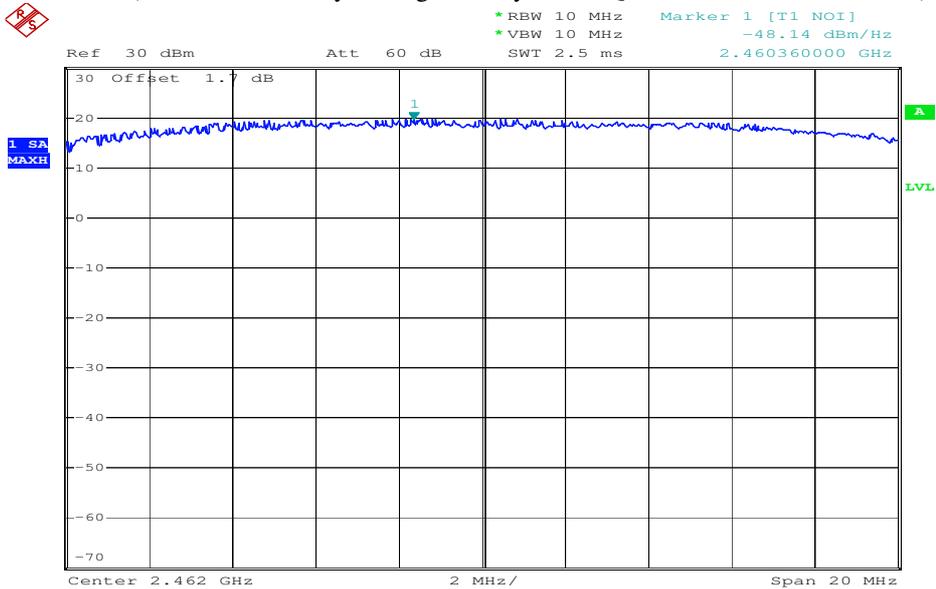

Date: 12.FEB.2008 07:21:51

Results: Plot 1: Power density: - 47.64 dBm/Hz = - 12.84 dBm / 3 kHz
Plot 2: Power density: - 47.29 dBm/Hz = - 12.49 dBm / 3 kHz
Plot 3: Power density: - 47.07 dBm/Hz = - 12.27 dBm / 3 kHz
Plot 1: Power density: - 49.37 dBm/Hz = - 14.57 dBm / 3 kHz
Plot 2: Power density: - 48.75 dBm/Hz = - 13.95 dBm / 3 kHz
Plot 3: Power density: - 48.14 dBm/Hz = - 13.34 dBm / 3 kHz


Correction factor from dBm/Hz to dBm/3 kHz is +34,8 dB

Limits :

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission
-----------------------------------	---


5.6 Spectrum Bandwidth of a DSSS System / 6 dB Bandwidth §15.247(a)(2)

Plot 1: DSSS-Mode

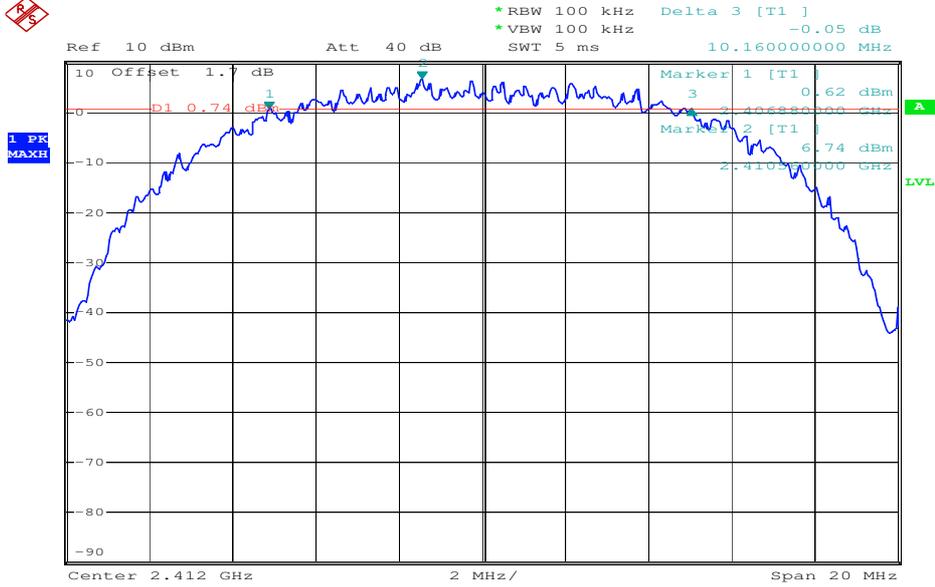


Date: 12.FEB.2008 07:03:29

Plot 2: DSSS-Mode

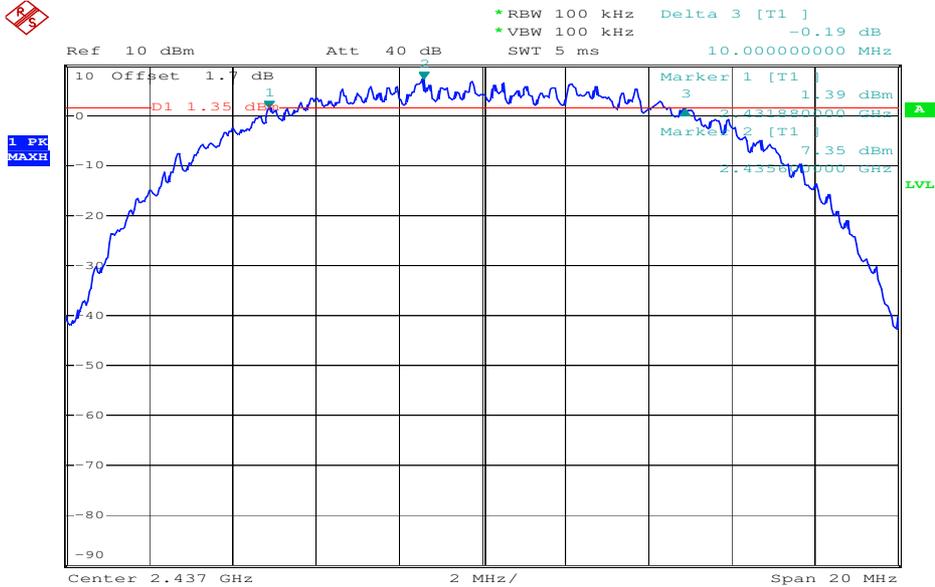


Date: 12.FEB.2008 07:05:02

Plot 3: DSSS-Mode

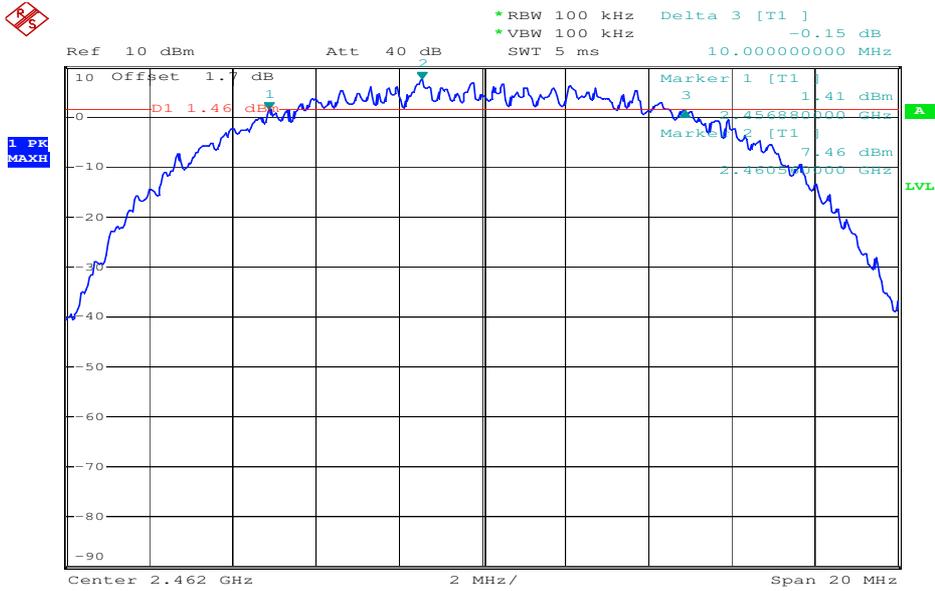


Date: 12.FEB.2008 07:06:47

Plot 4: OFDM-Mode

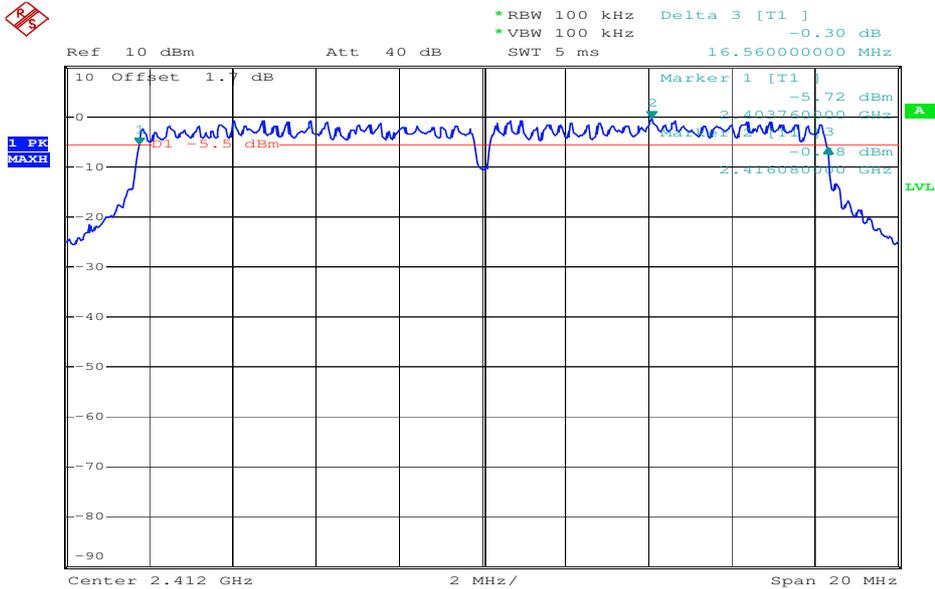


Date: 12.FEB.2008 07:26:14

Plot 5: OFDM-Mode

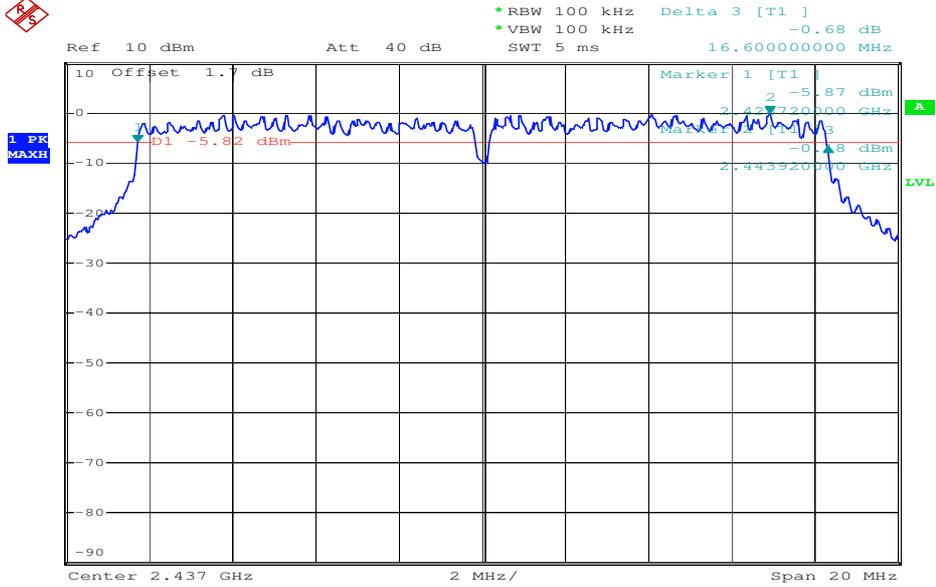

Date: 12.FEB.2008 07:27:17

Plot 6: OFDM-Mode

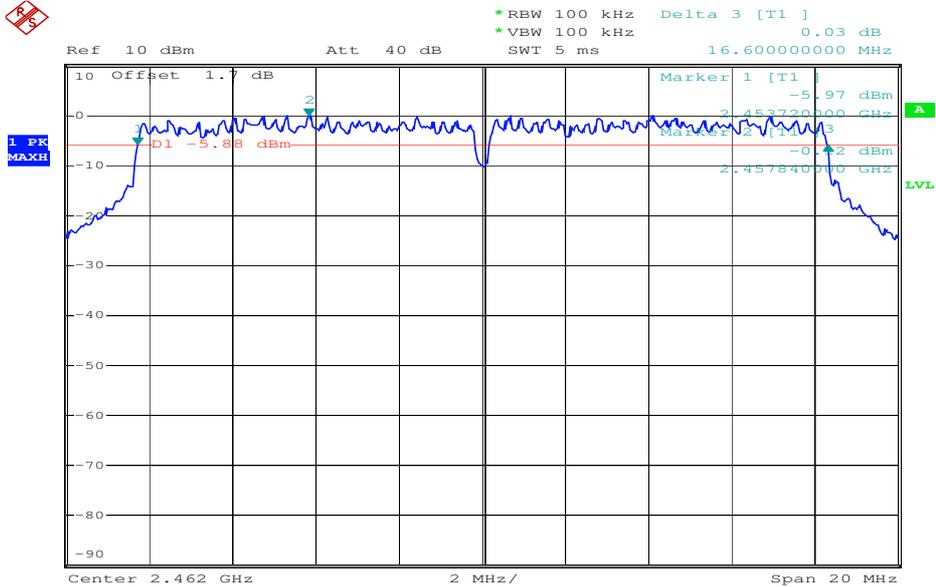

Date: 12.FEB.2008 07:28:25

Results:

Test conditions Frequency [MHz]	6 dB BANDWIDTH [MHz]		
	2412	2437	2462
DSSS	10.16	10.00	10.00
OFDM	16.56	16.60	16.60
Measurement uncertainty	±1kHz		


RBW: 100 kHz / VBW 100 kHz

Limits:

Under normal test conditions only	> 500 kHz
-----------------------------------	-----------


5.7 Maximum output power (conducted) §15.247 (b)(3)

Plot 1: DSSS-Mode

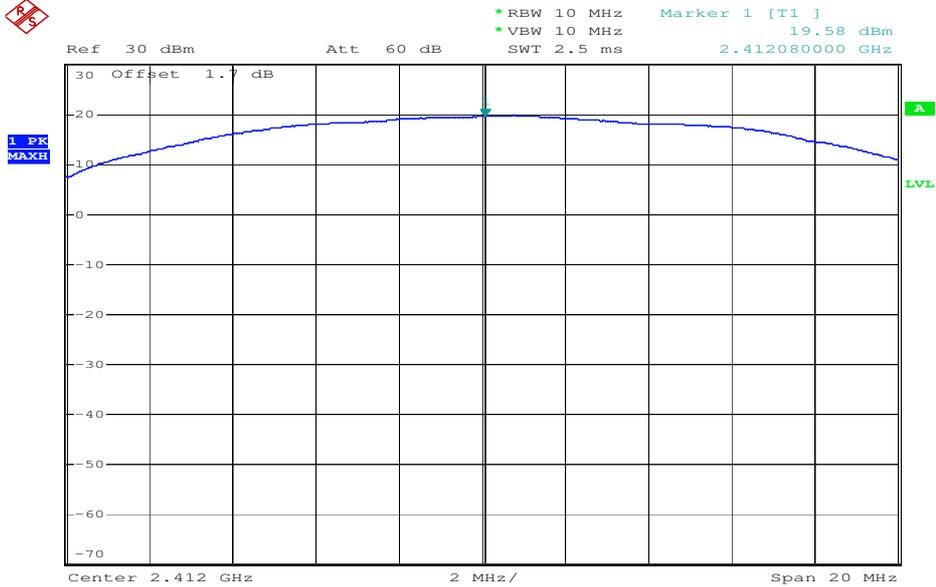


Date: 12.FEB.2008 06:54:48

Plot 2: DSSS-Mode

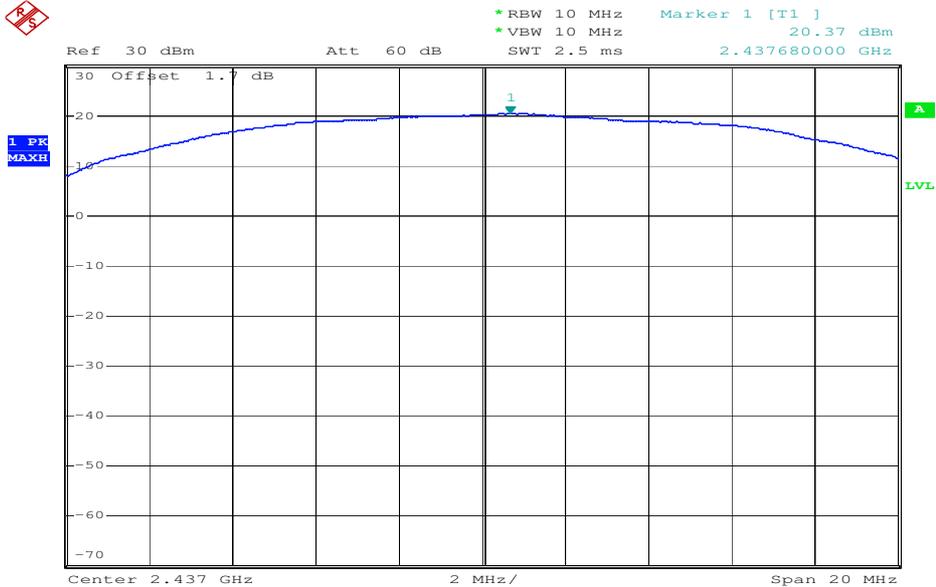


Date: 12.FEB.2008 06:55:55

Plot 3: DSSS-Mode

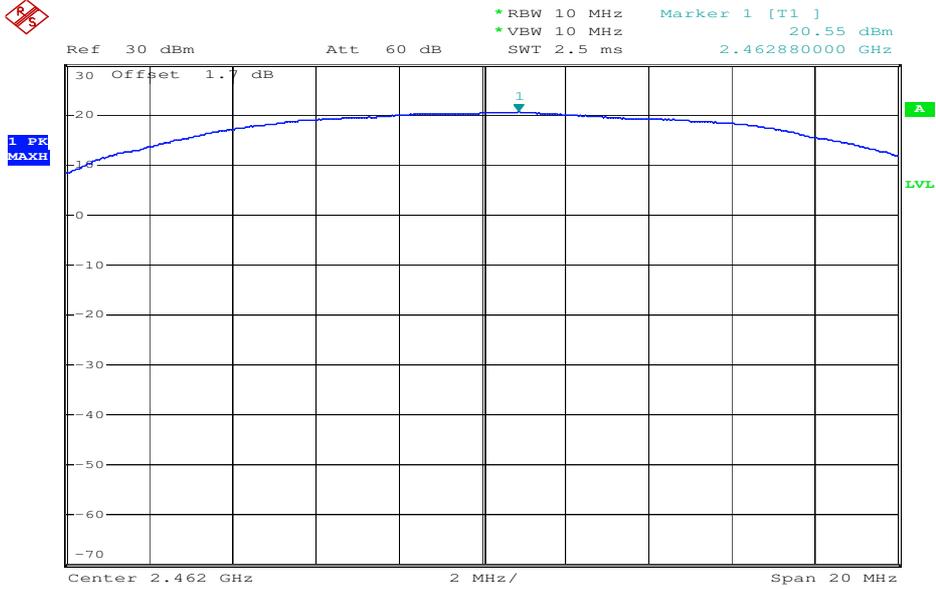


Date: 12.FEB.2008 06:56:48

Plot 4: OFDM-Mode

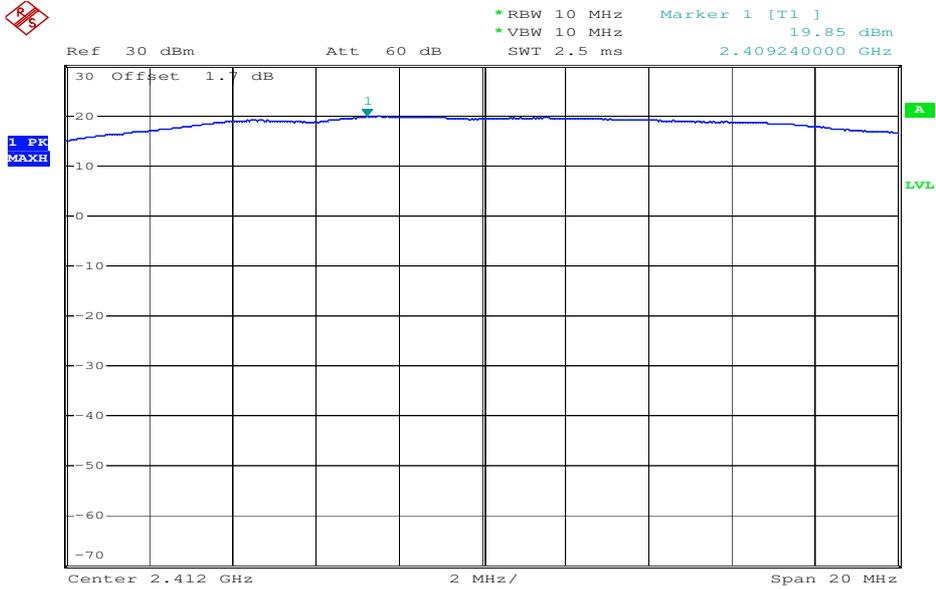


Date: 12.FEB.2008 07:17:59

Plot 5: OFDM-Mode

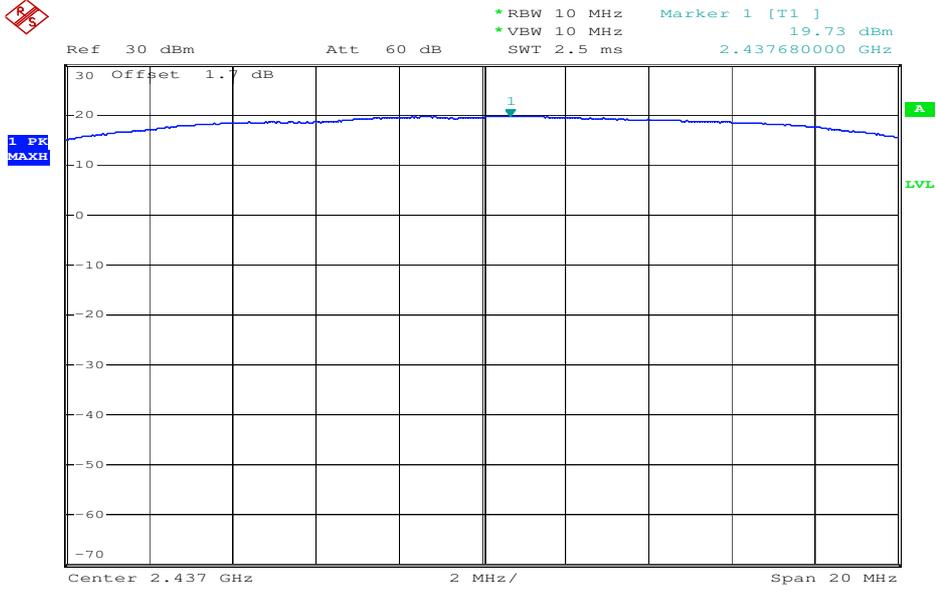

Date: 12.FEB.2008 07:18:57

Plot 6: OFDM-Mode

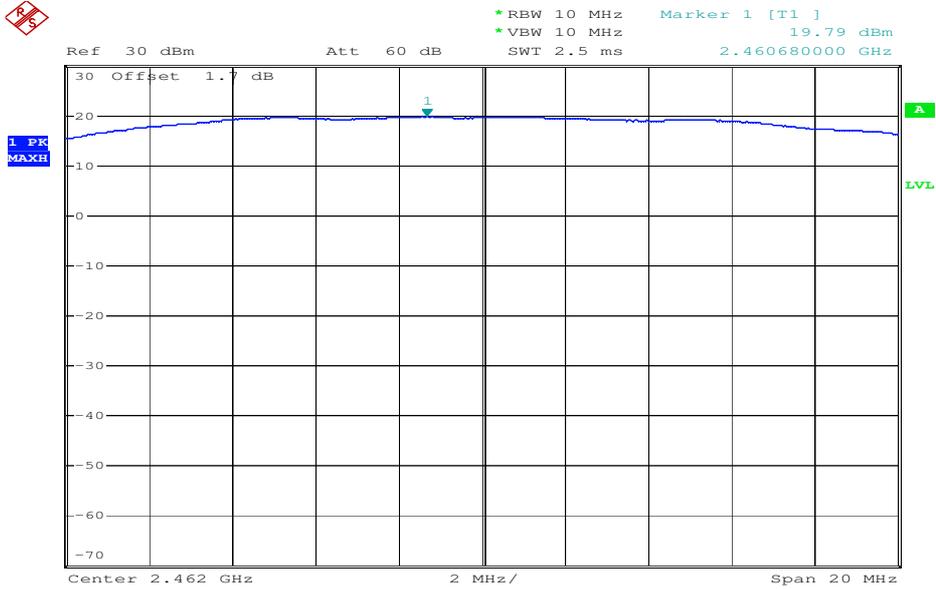

Date: 12.FEB.2008 07:19:53

Results:

Test conditions Frequency [MHz]	Max. peak output power [dBm]		
	2412	2437	2462
DSSS	19.58	20.37	20.55
OFDM	19.85	19.73	19.79
Measurement uncertainty	±3dB		

RBW / VBW: 10 MHz

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
--	------------------------

MPE calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units e.g. mW)

G = power gain of the antenna in the direction of interest relative to the isotropic radiator

R = distance to the centre of radiation of the antenna (appropriate units e.g. cm)

Or

$$S = EIRP/4\pi R^2$$

where EIRP = equivalent isotropically radiated power

Calculation:

(Calculated for max. EIRP)

EIRP: 19.12 dBm (81.66 mW)

calculated at distance of 20 cm:

$$\text{power density} = 81.66/4\pi 20^2 = 0.016 \text{ mW/ cm}^2$$

Limit:

1mW/ cm ² is the reference level for general public exposure according to the OET Bulletin 65, Edition 97-01 Table 1.

5.8 Max. peak output power (radiated) §15.247 (b)(3)

Results:

Test conditions	Max. peak output power EIRP [dBm]		
Frequency [MHz]	2412	2437	2462
DSSS	18.33	18.77	19.12
OFDM	18.60	18.13	18.36
Measurement uncertainty	±3dB		

RBW / VBW: 10 MHz


Measured at a distance of 3m

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------


5.9 Band-edge compliance of conducted emissions §15.247 (d)

Plot 1, DSSS, lowest channel

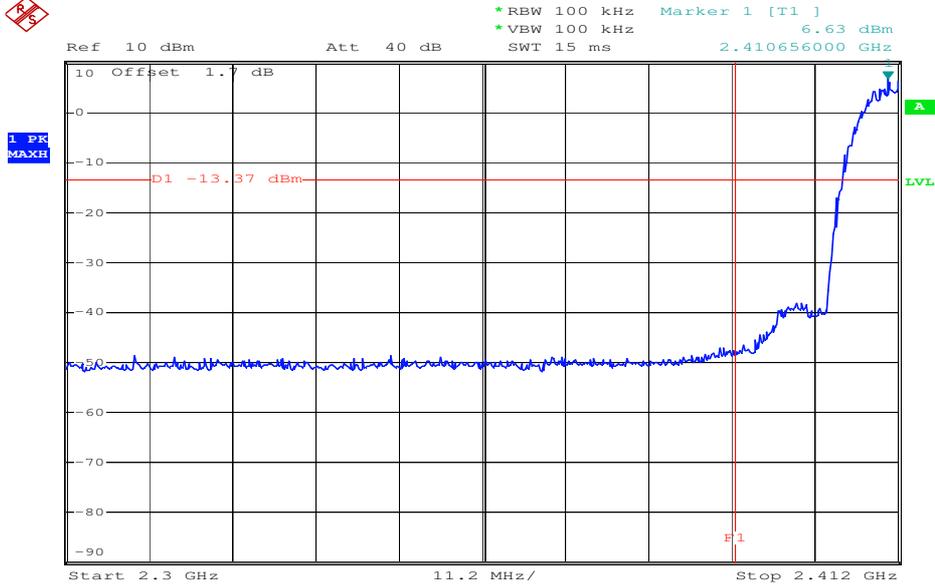


Date: 12.FEB.2008 07:13:28

Plot 2, DSSS, highest channel

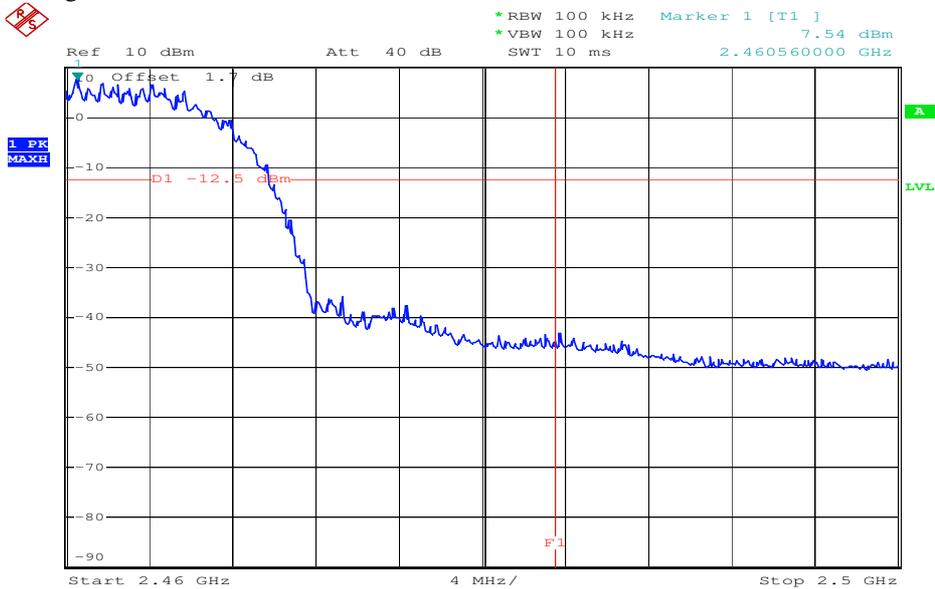


Date: 12.FEB.2008 07:09:27

Plot 3, OFDM, lowest channel

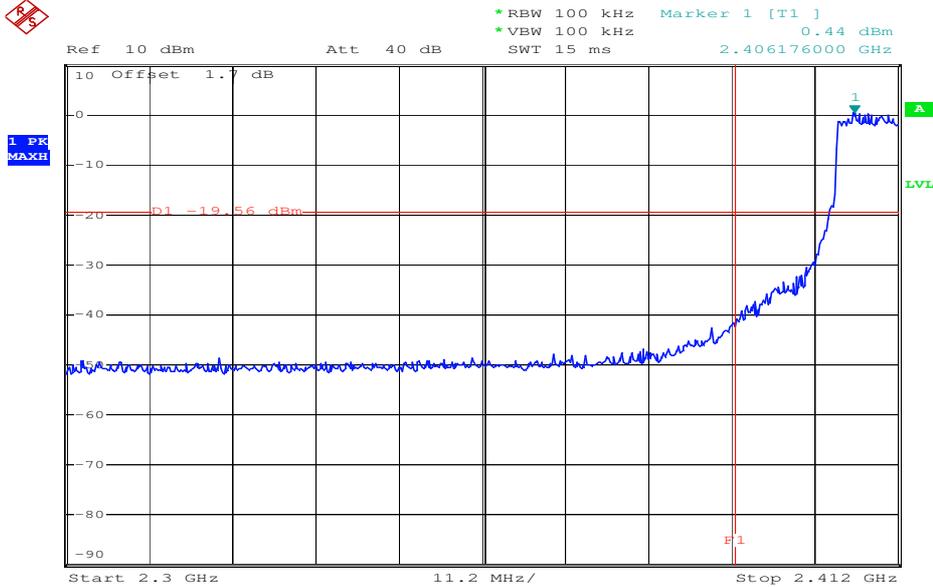

Date: 12.FEB.2008 07:15:31

Plot 4, OFDM, highest channel

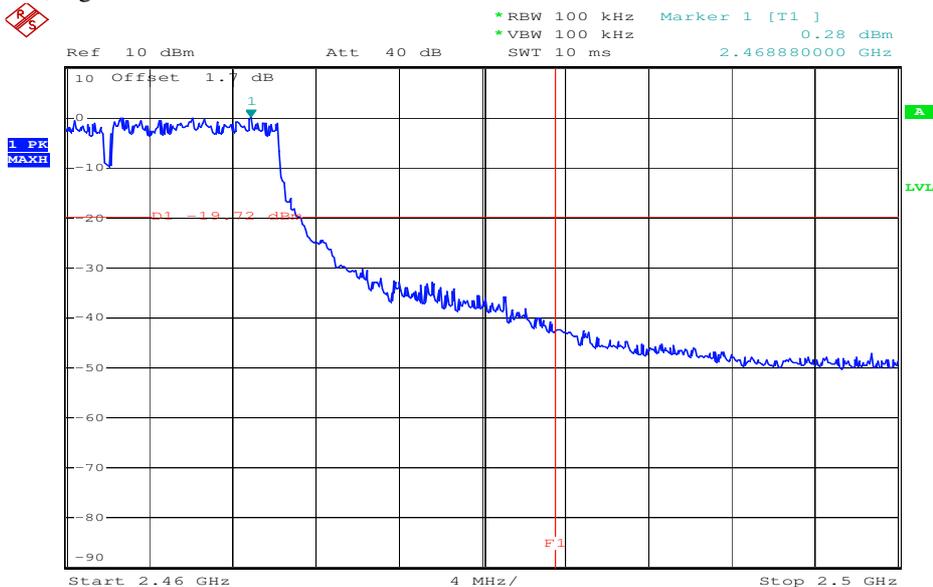


Date: 12.FEB.2008 07:11:20

Limits:

<p>Under normal test conditions only</p>	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).</p>
--	---

5.10 Band-edge compliance of radiated emissions §15.205


Plot 1: Max field strength in 3m distance (single frequency) peak (DSSS)

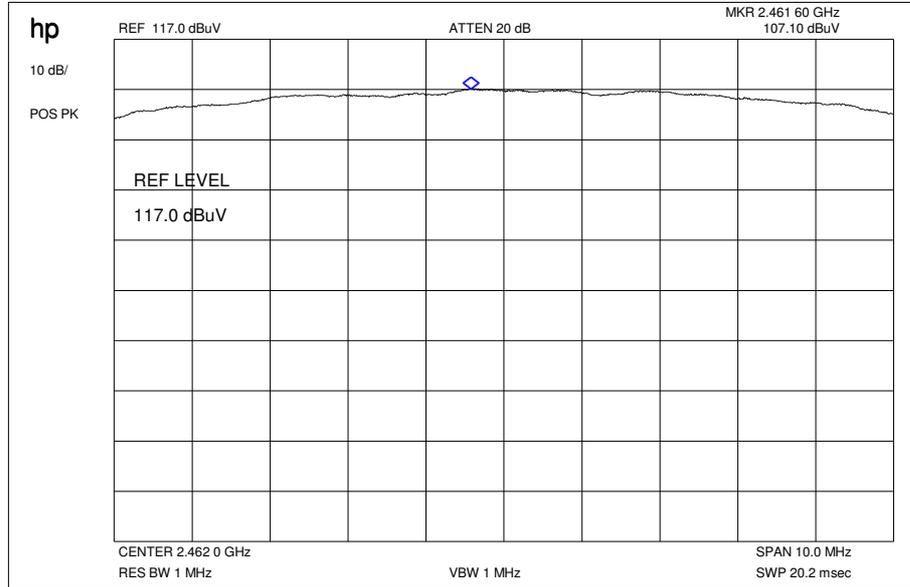

Result:

Frequency	Meter reading	Correction factor	Results
2462 MHz	107.1 dB μ V	-3.2 dB	103.9 dB μ V


Plot 2 : Max field strength in 3m distance (single frequency) average (DSSS)

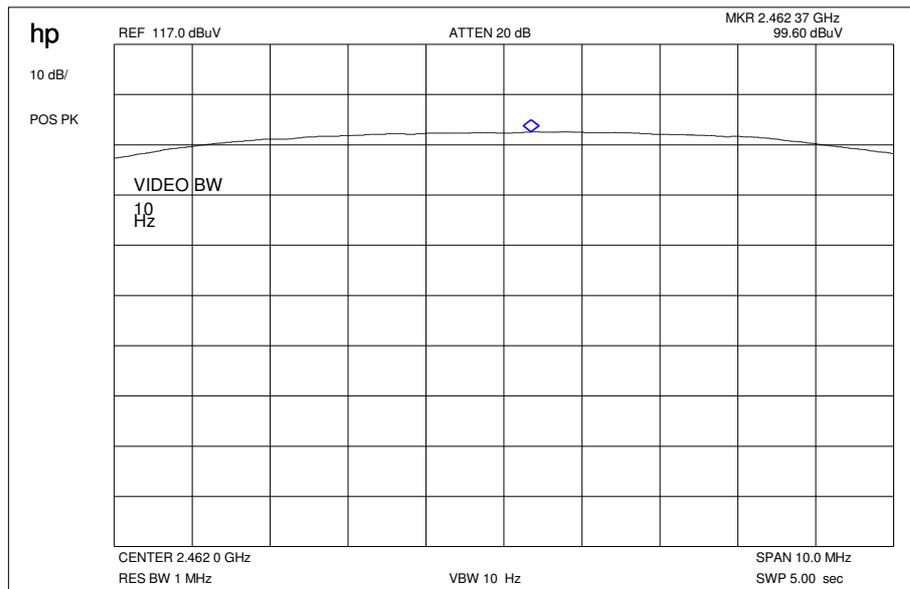

Result:

Frequency	Meter reading	Correction factor	Results
2462 MHz	99.6 dB μ V	-3.2 dB	96.4 dB μ V

Plot 3: Marker-Delta Method RBW/VBW = 1% of span (DSSS)

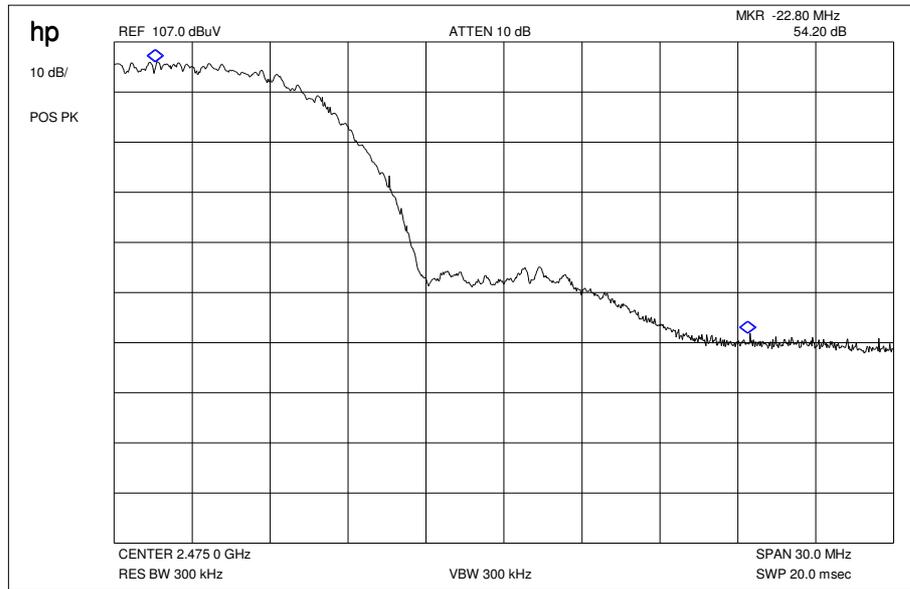

Result:

Marker-Delta-Value: 54.2 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)


Results & Limits: (DSSS)

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	107.1 dB μ V/m	-3.2 dB	103.9 dB μ V/m
Max. average value	1 MHz RBW 10 Hz VBW	99.6 dB μ V/m	-3.2 dB	96.4 dB μ V/m
Delta value	Peak 300 kHz RBW/VBW	54.2 dB		
Value at band edge	limit 54 dB μ V/m			42.2 dB μ V/m
Statement:				Complies


Plot 4: Max field strength in 3m distance (single frequency) peak (OFDM)

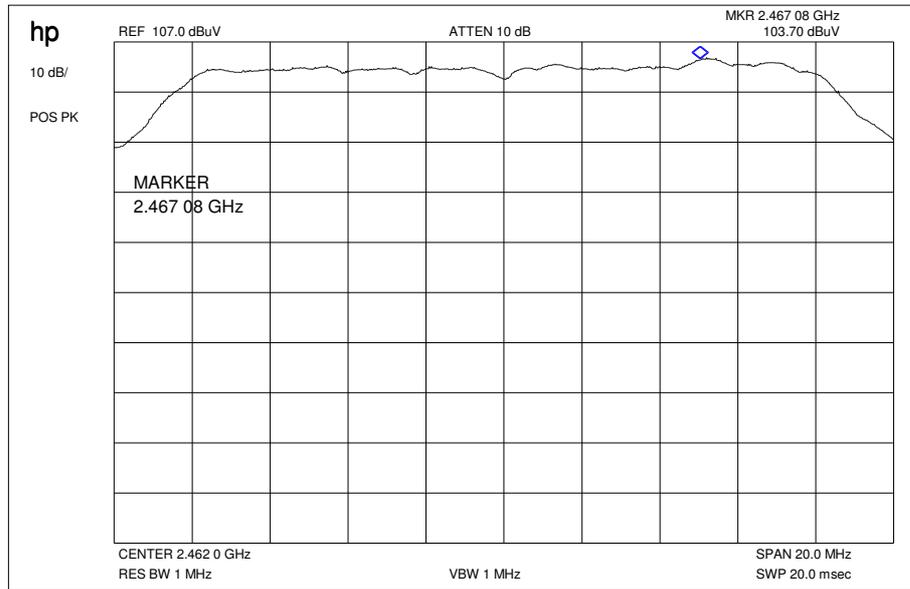

Result:

Frequency	Meter reading	Correction factor	Results
2462 MHz	103.7 dB μ V	-3.2 dB	100.5 dB μ V


Plot 5 : Max field strength in 3m distance (single frequency) average (OFDM)

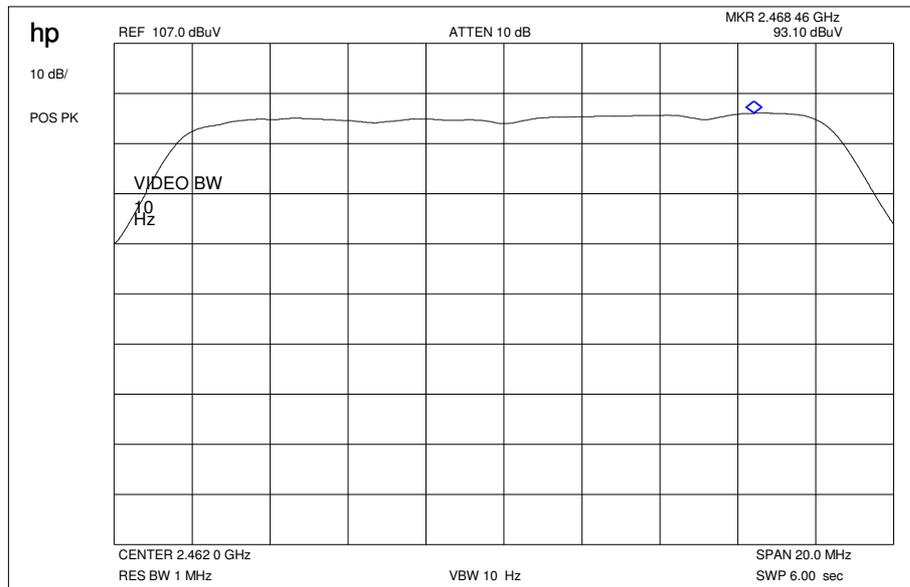

Result:

Frequency	Meter reading	Correction factor	Results
2462 MHz	93.1 dB μ V	-3.2 dB	89.9 dB μ V

Plot 6: Marker-Delta Method RBW/VBW = 1% of span (OFDM)

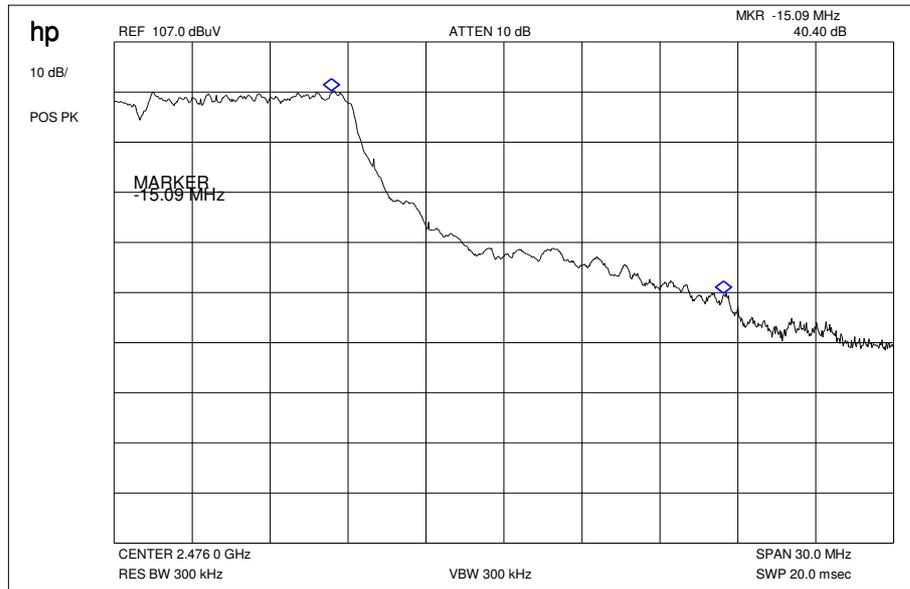

Result:

Marker-Delta-Value: 40.4 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)

Results & Limits: (OFDM)

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	103.7 dB μ V/m	-3.2 dB	100.5 dB μ V/m
Max. average value	1 MHz RBW 10 Hz VBW	93.1 dB μ V/m	-3.2 dB	89.9 dB μ V/m
Delta value	Peak 300 kHz RBW/VBW	40.4 dB		
Value at band edge	limit 54 dB μ V/m			49.5 dB μ V/m
Statement:				Complies

5.11 Spurious Emissions - conducted (Transmitter) §15.247 (c)

Plots see § 3.9 Band-edge compliance of conducted emissions

Result & Limits:

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412			30 dBm	-	Operating frequency
No critical peaks found			-20 dBc		
2437			30 dBm		Operating frequency
No critical peaks found			-20 dBc		
2462			30 dBm		Operating frequency
No critical peaks found			-20 dBc		
Measurement uncertainty		± 3dB			

F < 1 GHz: RBW: 100 kHz VBW: 100 kHz
 F > 1 GHz: RBW: 1 MHz VBW: 1 MHz

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

5.12 Spurious Emissions - radiated (Transmitter) §15.209

Plot 1: 0.03 - 1 GHz (DSSS / lowest channel)

Information


EUT: 1202-2566.1C/1 (FAD-3022019-BV) + CAA 0002002-BV
 Serial Number: CB5A0M77OZ + 458B 06W03
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN Channel 1; 11Mbit/s; output power 17
 Operator Name: Folz
 Comment: Powered with AC 115V/ 60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: EMI radiated\Electric Field (NOS)
 Level Unit: dBµV/m

Subrange **Detectors** **IF Bandwidth** **Meas. Time** **Receiver**
 30MHz - 1GHz QuasiPeak 120kHz 15s Receiver

FCC_10m_Fast_1GHz (B)

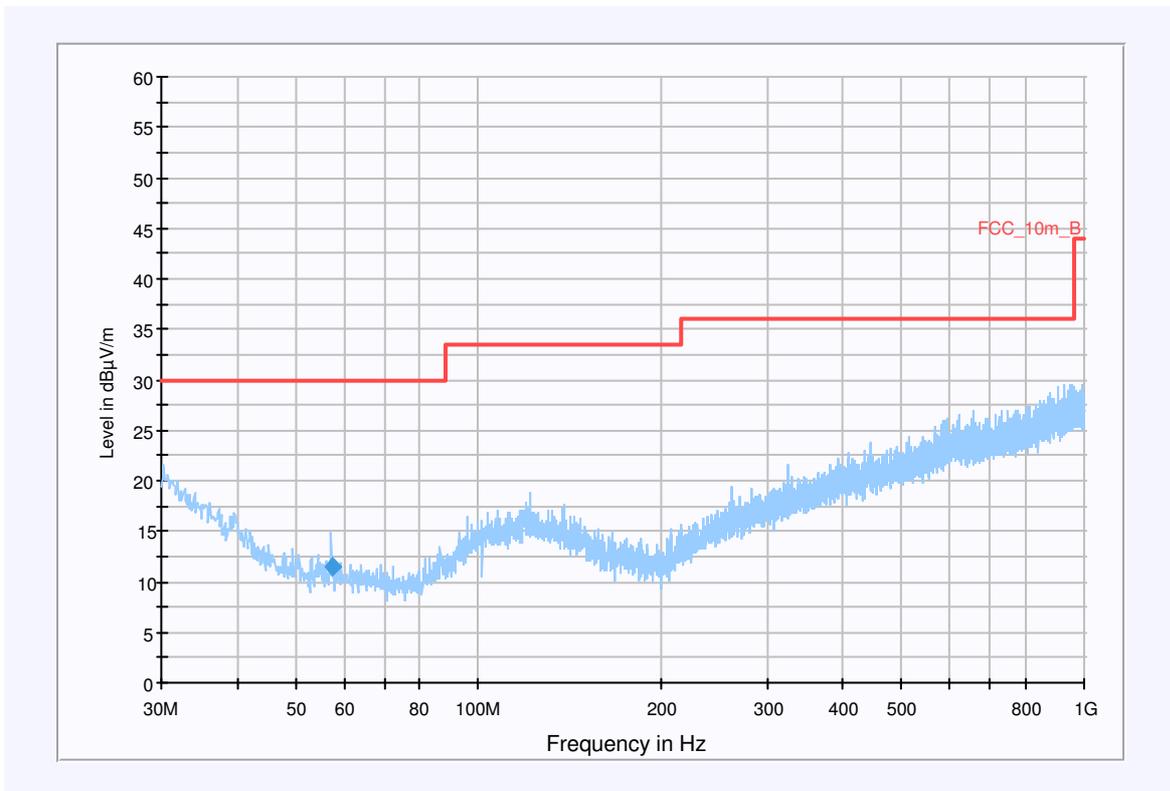

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
57.304500	11.4	15000.000	120.000	295.0	V	271.0	8.2	18.6	30.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1

Frequency Range: 30MHz - 2GHz

Receiver: Receiver [ESCI 3]
@ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009


Signal Path: without Notch
FW 1.0

Antenna: Chase Broadband BiLog Antenna CBL 6112
SN 2110, FW A, CAL 07.01.2009
Correction Table (vertical): Chase Broadband BiLog Antenna CBL 6112
Correction Table (horizontal): Chase Broadband BiLog Antenna CBL 6112
Correction Table: Cabel with switch (1007)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.12


Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9)

Plot 2: 1 - 4 GHz (DSSS / lowest channel)

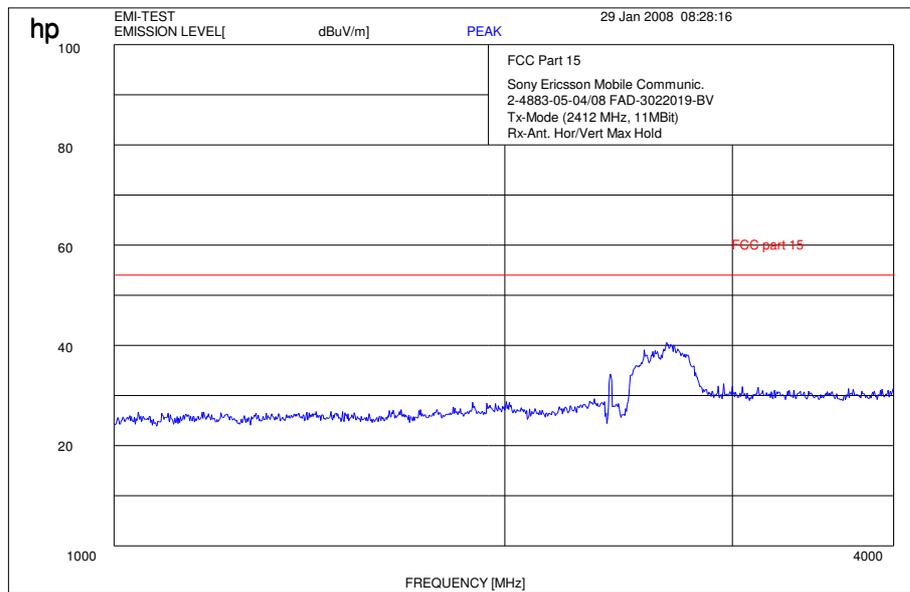


Carrier suppressed with a rejection filter

Plot 3: 4 - 12 GHz (DSSS / lowest channel)

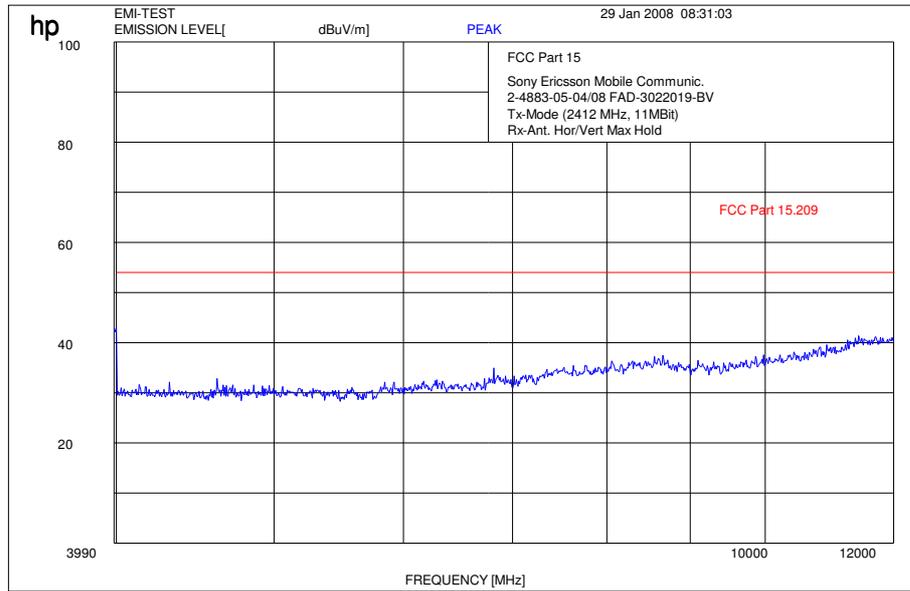

Plot 4: 12 - 25 GHz (valid for all channels and modes)

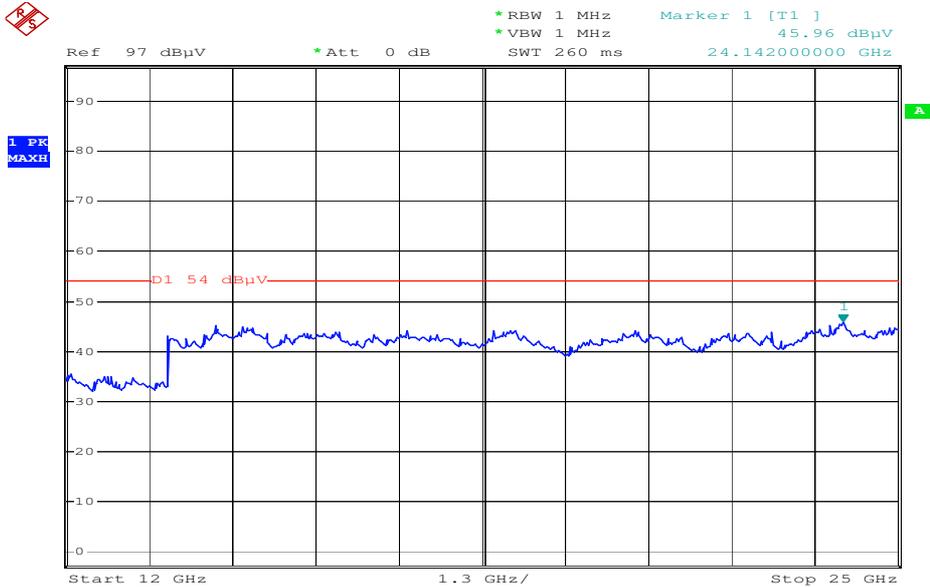

Date: 31.JAN.2008 14:47:49

Plot 5: 0.03 - 1 GHz (DSSS / middle channel)

Information


EUT: 1202-2566.1C/1 (FAD-3022019-BV) + CAA 0002002-BV
 Serial Number: CB5A0M77OZ + 458B 06W03
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN Channel 6; 11Mbit/s; output power 17
 Operator Name: Folz
 Comment: Powered with AC 115V/ 60Hz

Scan Setup: STAN_Fin [EMI radiated]


Hardware Setup: EMI radiated\Electric Field (NOS)
 Level Unit: dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30MHz - 1GHz	QuasiPeak	120kHz	15s	Receiver

FCC_10m_Fast_1GHz (B)

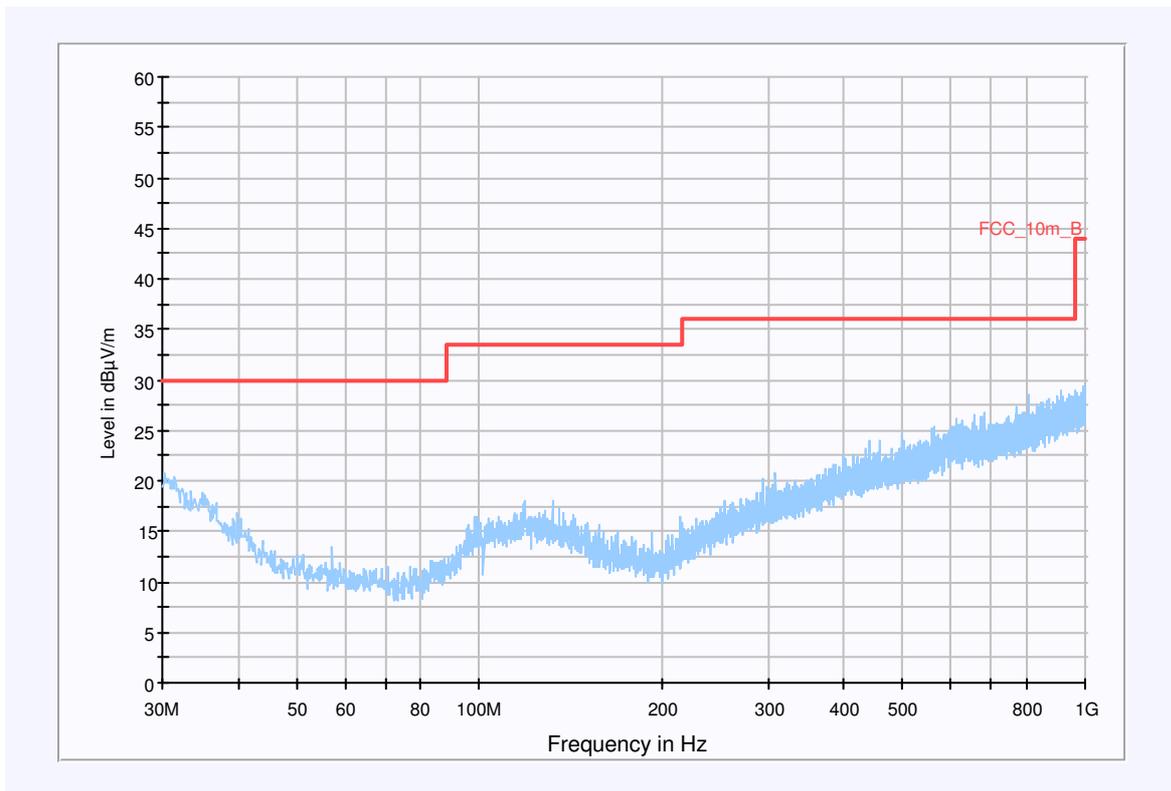


Plot 6: 1 - 4 GHz (DSSS / middle channel)

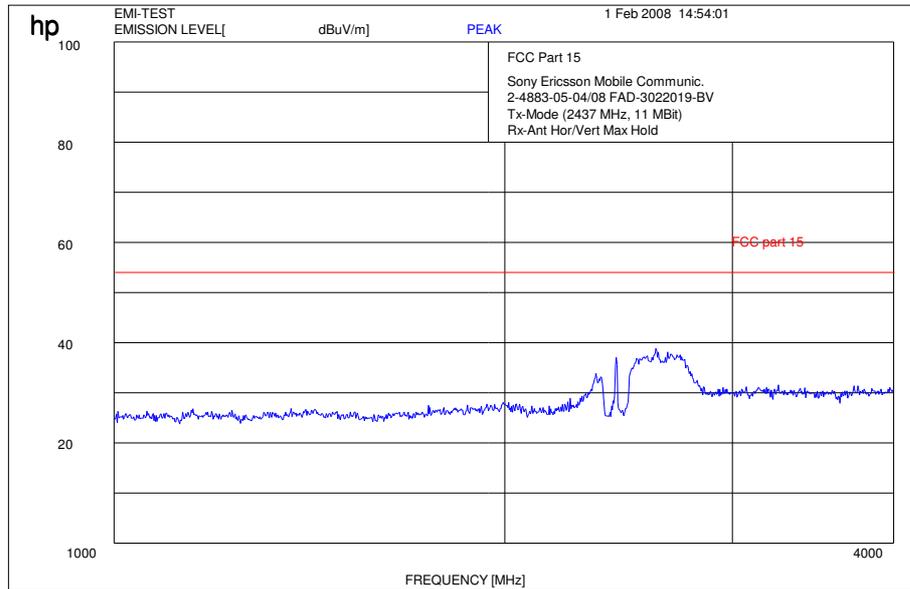

Carrier suppressed with a rejection filter

Plot 7: 4 - 12 GHz (DSSS / middle channel)

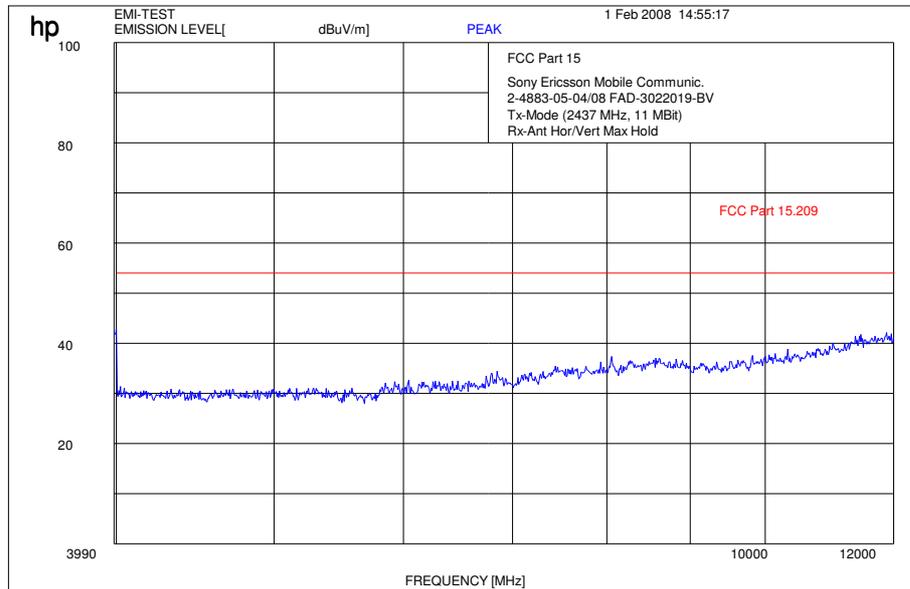

Plot 8: 0.03 - 1 GHz (DSSS / highest channel)

Information


EUT: 1202-2566.1C/1 (FAD-3022019-BV) + CAA 0002002-BV
 Serial Number: CB5A0M77OZ + 458B 06W03
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN Channel 11; 11Mbit/s; output power 17
 Operator Name: Folz
 Comment: Powered with AC 115V/ 60Hz

Scan Setup: STAN_Fin [EMI radiated]


Hardware Setup: EMI radiated\Electric Field (NOS)
 Level Unit: dBµV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30MHz - 1GHz	QuasiPeak	120kHz	15s	Receiver

FCC_10m_Fast_1GHz (B)

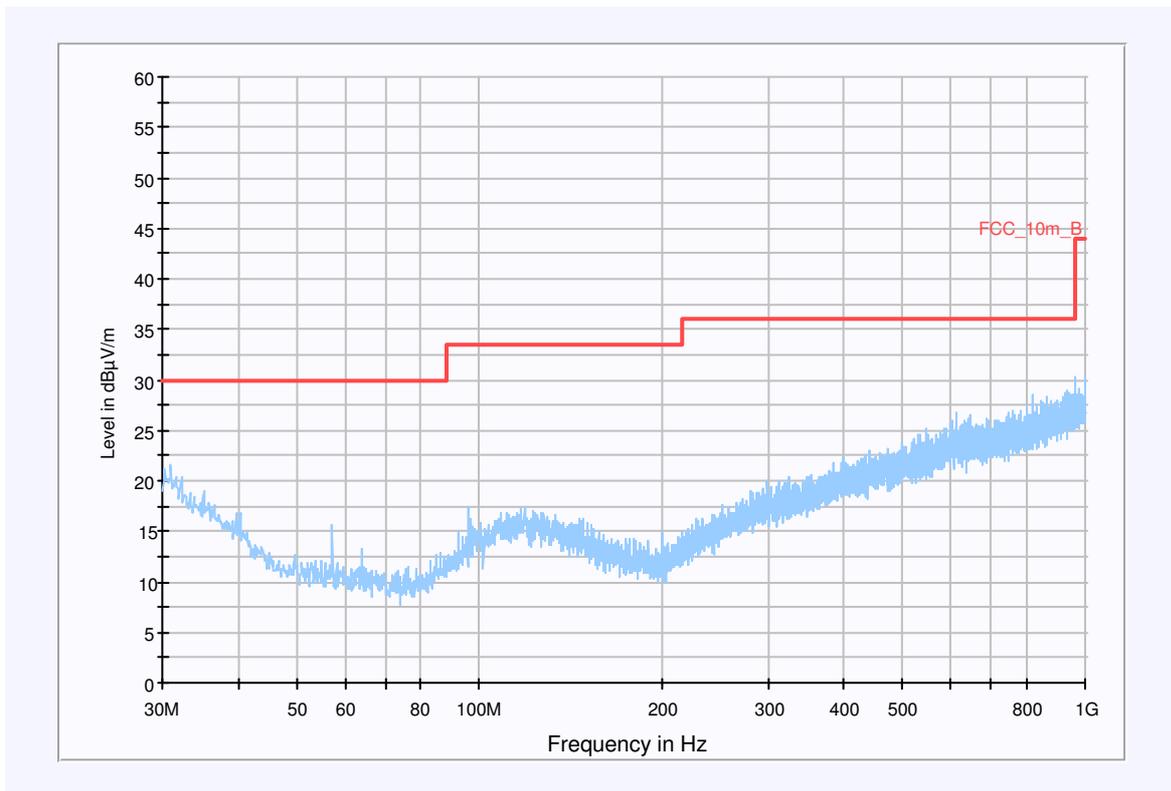


Plot 9: 1 - 4 GHz (DSSS / highest channel)

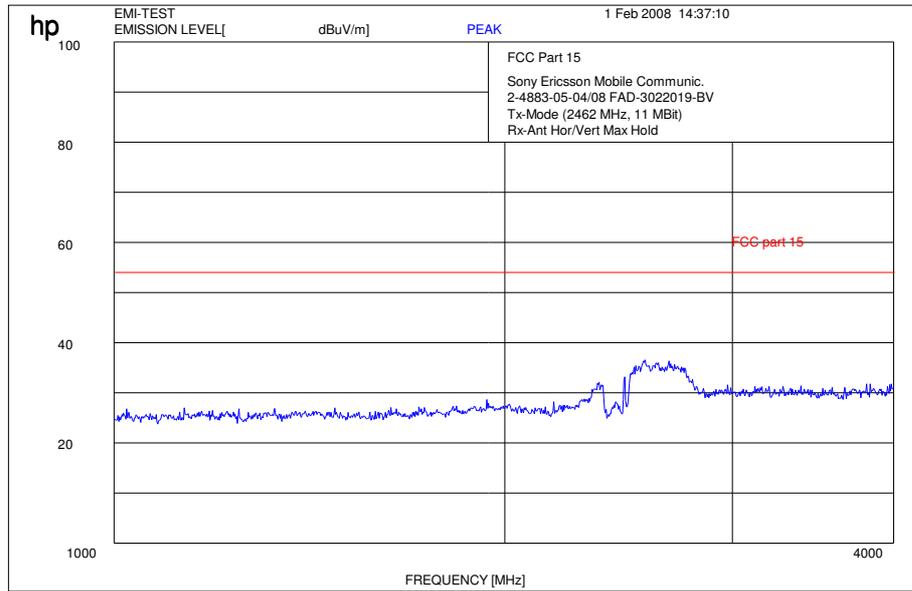

Carrier suppressed with a rejection filter

Plot 10: 4 - 12 GHz (DSSS / highest channel)

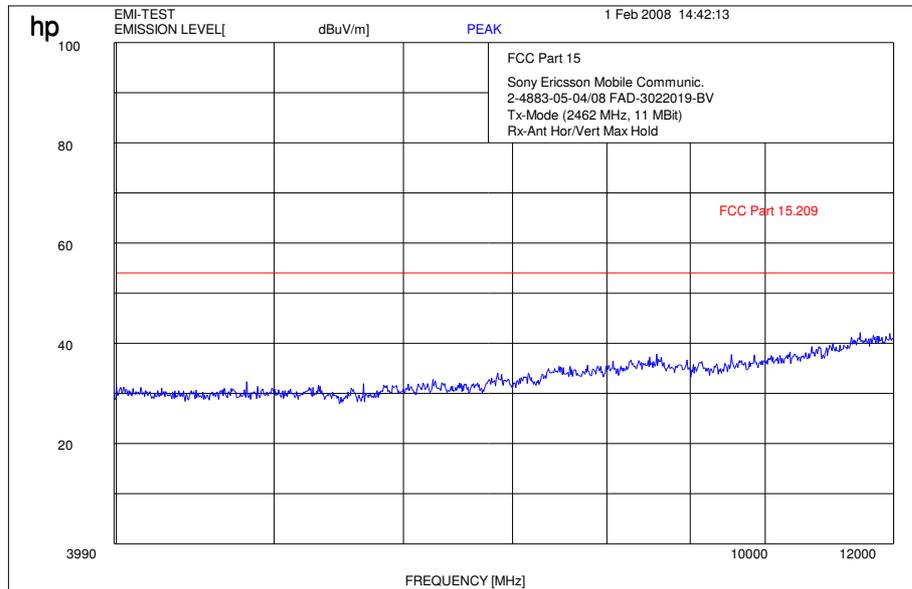

Results: DSSS

SPURIOUS EMISSIONS LEVEL §15.209								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
No critical peaks found			No critical peaks found			No critical peaks found		
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Plot 11: 0.03 - 1 GHz (OFDM / lowest channel)

Information


EUT: 1202-2566.1C/1 (FAD-3022019-BV) + CAA 0002002-BV
 Serial Number: CB5A0M77OZ + 458B 06W03
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN channel 1; 54 Mbit/s; output power 13
 Operator Name: Folz
 Comment: Powered with AC 115V/ 60Hz

Scan Setup: STAN_Fin [EMI radiated]


Hardware Setup: EMI radiated\Electric Field (NOS)
 Level Unit: dBµV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30MHz - 1GHz	QuasiPeak	120kHz	15s	Receiver

FCC_10m_Fast_1GHz (B)

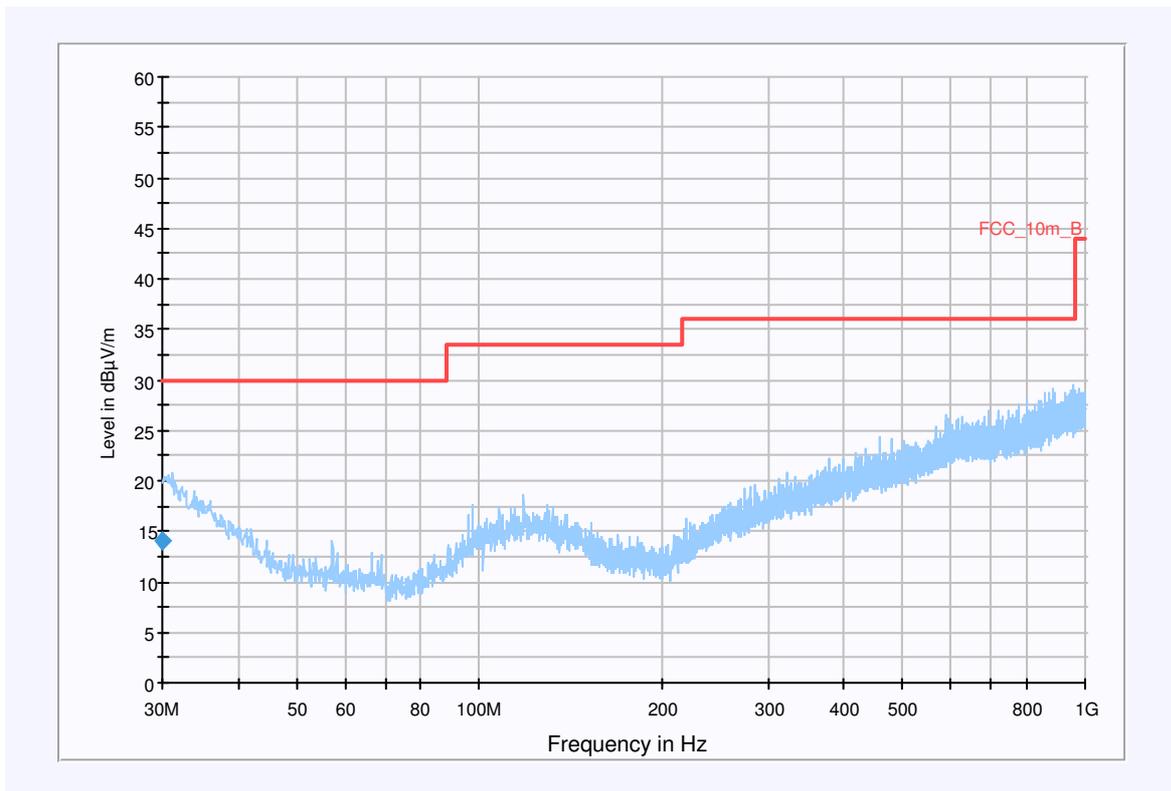


Plot 12: 1 - 4 GHz (OFDM / lowest channel)

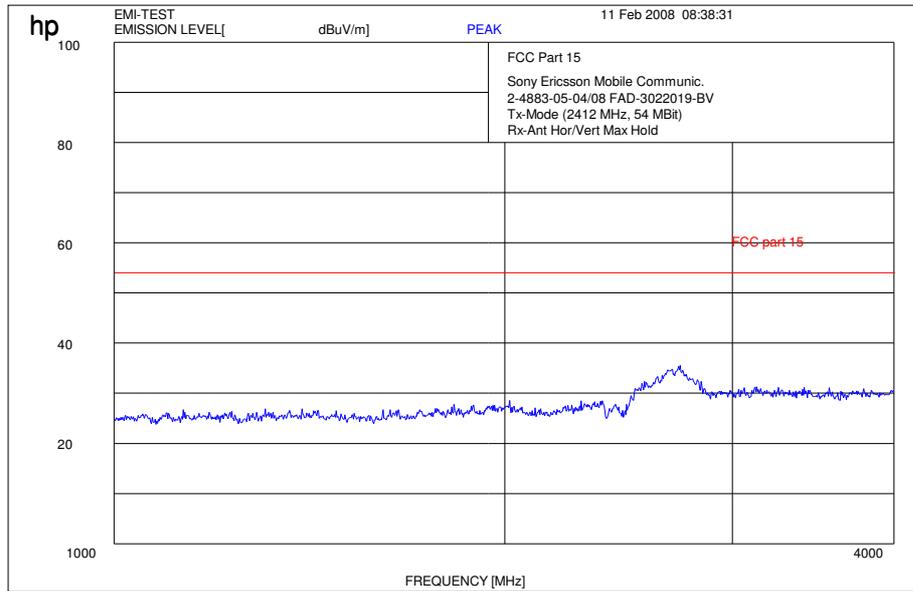

Carrier suppressed with a rejection filter

Plot 13: 4 - 12 GHz (OFDM / lowest channel)

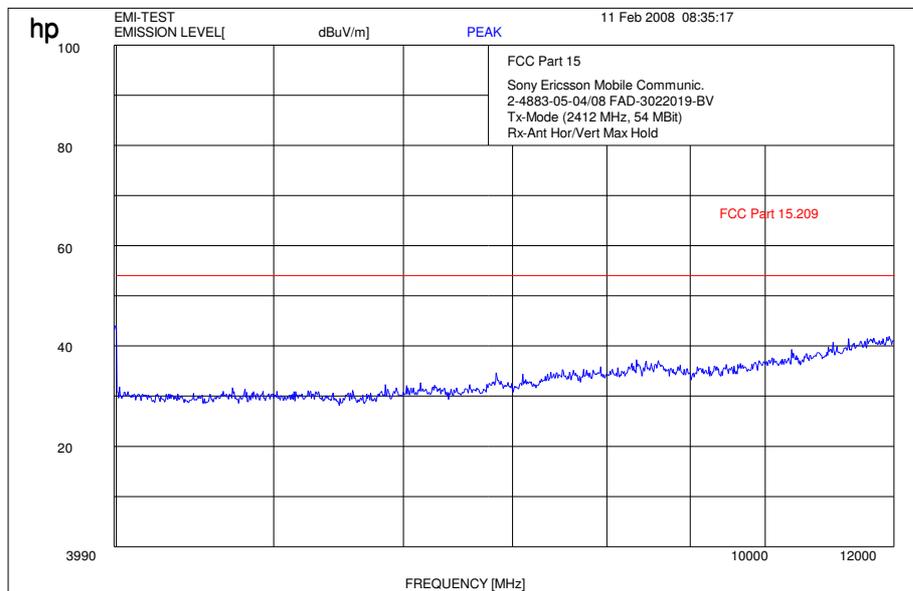

Plot 14: 0.03 - 1 GHz (OFDM / middle channel)

Information


EUT: 1202-2566.1C/1 (FAD-3022019-BV) + CAA 0002002-BV
 Serial Number: CB5A0M77OZ + 458B 06W03
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN channel 6; 54 Mbit/s; output power 13
 Operator Name: Folz
 Comment: Powered with AC 115V/ 60Hz

Scan Setup: STAN_Fin [EMI radiated]


Hardware Setup: EMI radiated\Electric Field (NOS)
 Level Unit: dBμV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30MHz - 1GHz	QuasiPeak	120kHz	15s	Receiver

FCC_10m_Fast_1GHz (B)

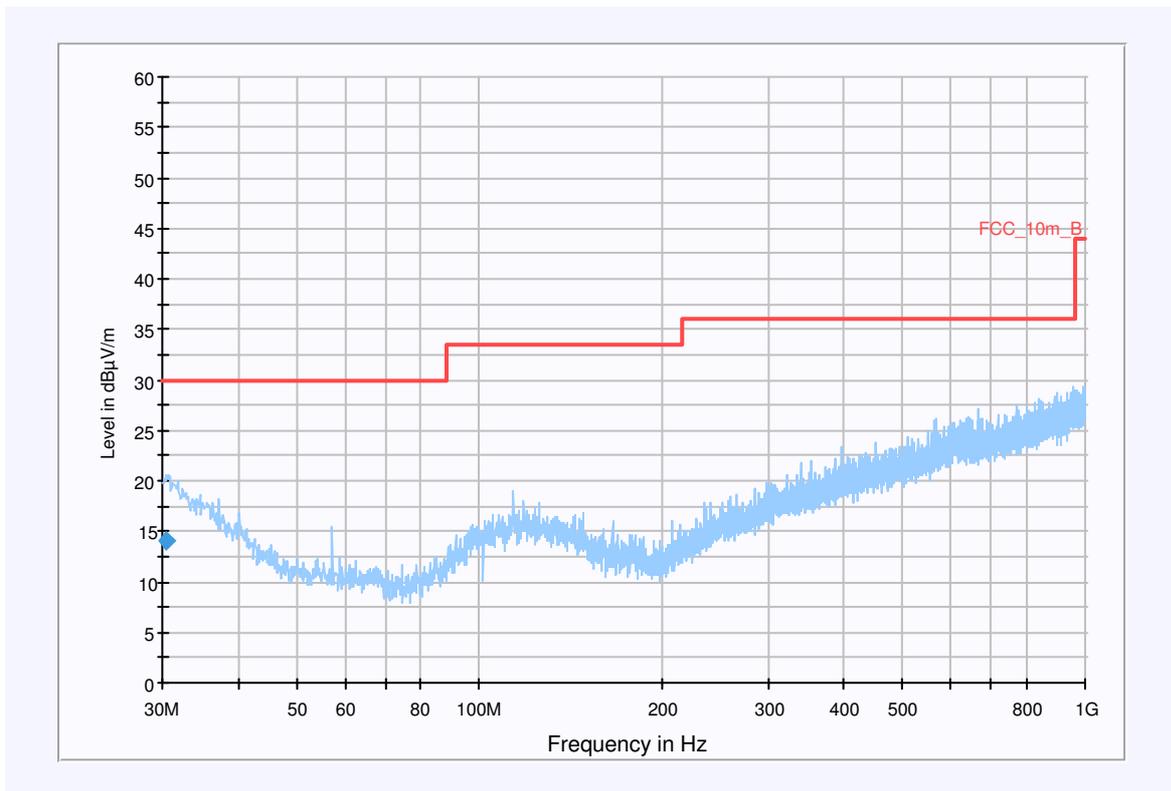


Plot 15: 1 - 4 GHz (OFDM / middle channel)

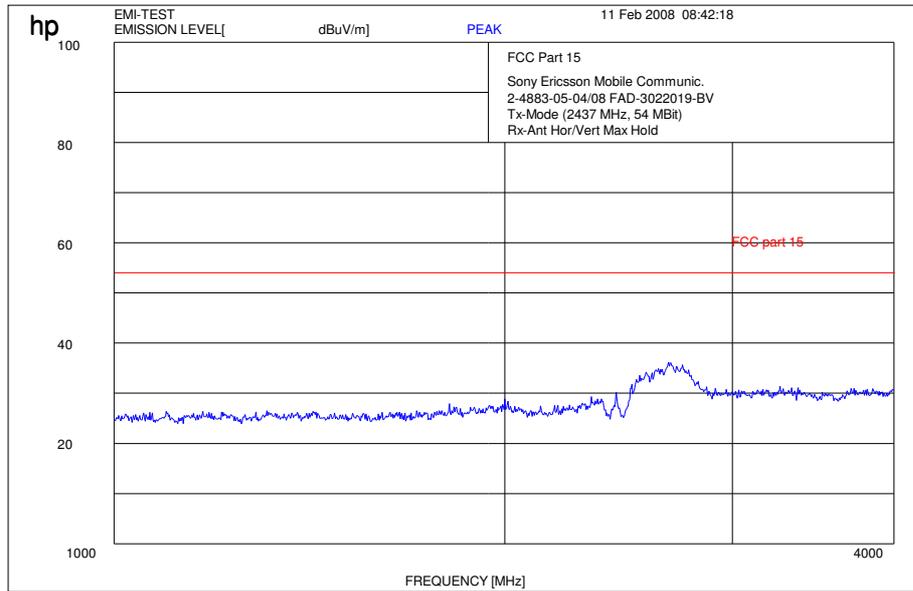

Carrier suppressed with a rejection filter

Plot 16: 4 - 12 GHz (OFDM / middle channel)

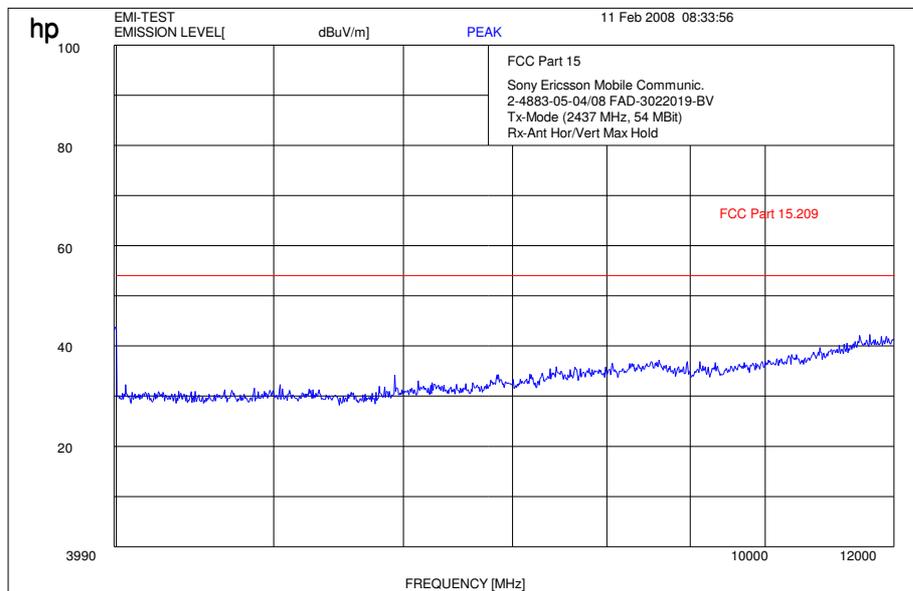

Plot 17: 0.03 - 1 GHz (OFDM / highest channel)

Information


EUT: 1202-2566.1C/1 (FAD-3022019-BV) + CAA 0002002-BV
 Serial Number: CB5A0M77OZ + 458B 06W03
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN channel 11; 54 Mbit/s; output power 13
 Operator Name: Folz
 Comment: Powered with AC 115V/ 60Hz

Scan Setup: STAN_Fin [EMI radiated]


Hardware Setup: EMI radiated\Electric Field (NOS)
 Level Unit: dBµV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30MHz - 1GHz	QuasiPeak	120kHz	15s	Receiver

FCC_10m_Fast_1GHz (B)

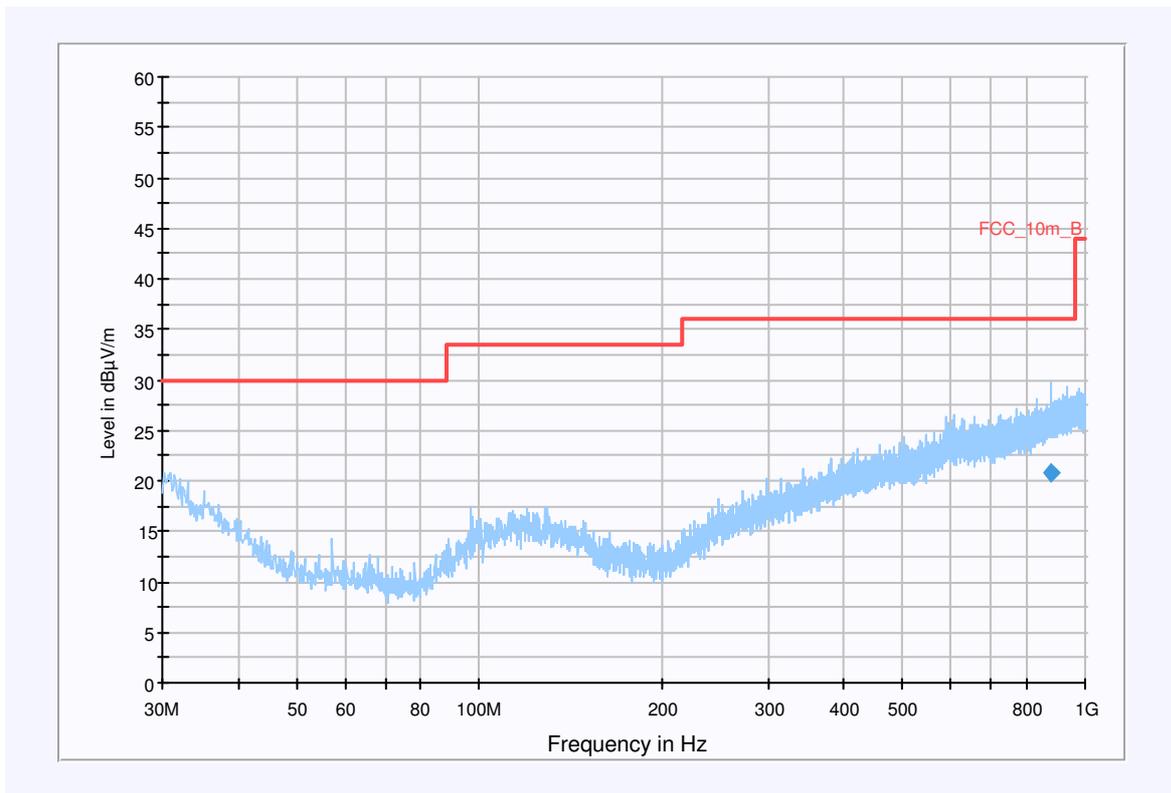


Plot 18: 1 - 4 GHz (OFDM / highest channel)

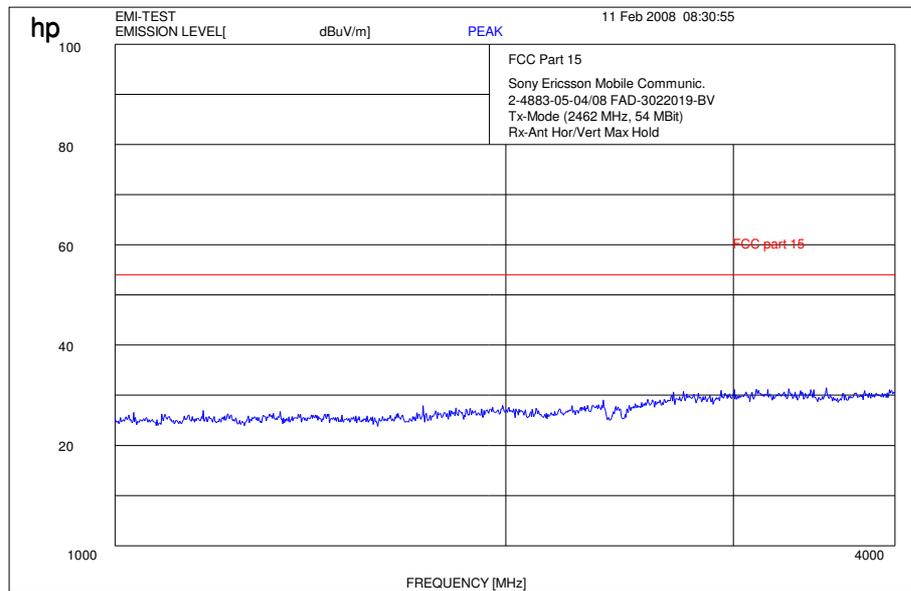

Carrier suppressed with a rejection filter

Plot 19: 4 - 12 GHz (OFDM / highest channel)

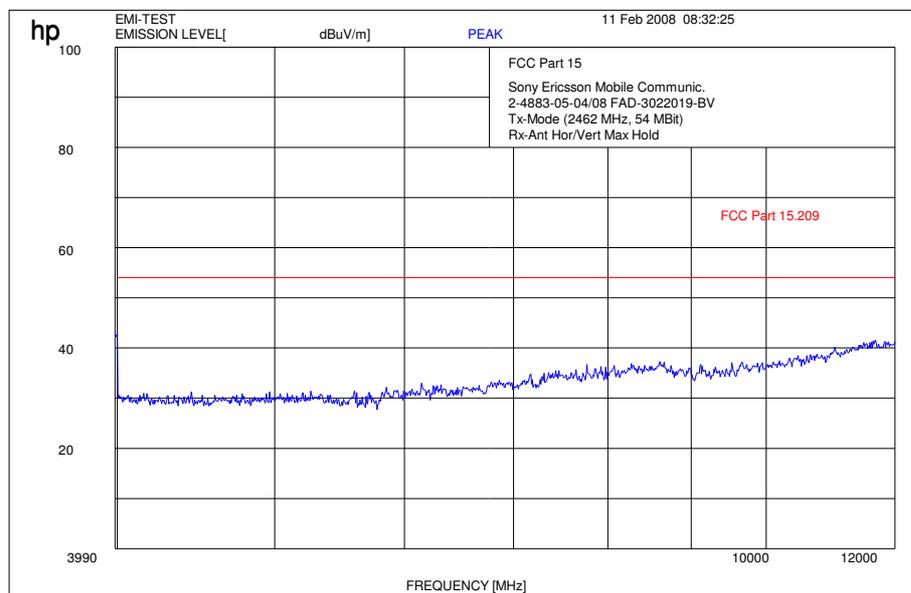

5.13 Spurious Emissions - radiated (Receiver) §15.109 / 209

Plot 1: 0.03 - 1 GHz vertical / horizontal (receiver)

Information


EUT: 1202-2566.1C/1 (FAD-3022019-BV) + CAA 0002002-BV
 Serial Number: CB5A0M77OZ + 458B 06W03
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN Idle; 11Mbit/s; output power 17
 Operator Name: Folz
 Comment: Powered with AC 115V/ 60Hz

Scan Setup: STAN_Fin [EMI radiated]


Hardware Setup: EMI radiated\Electric Field (NOS)
 Level Unit: dBµV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30MHz - 1GHz	QuasiPeak	120kHz	15s	Receiver


FCC_10m_Fast_1GHz (B)

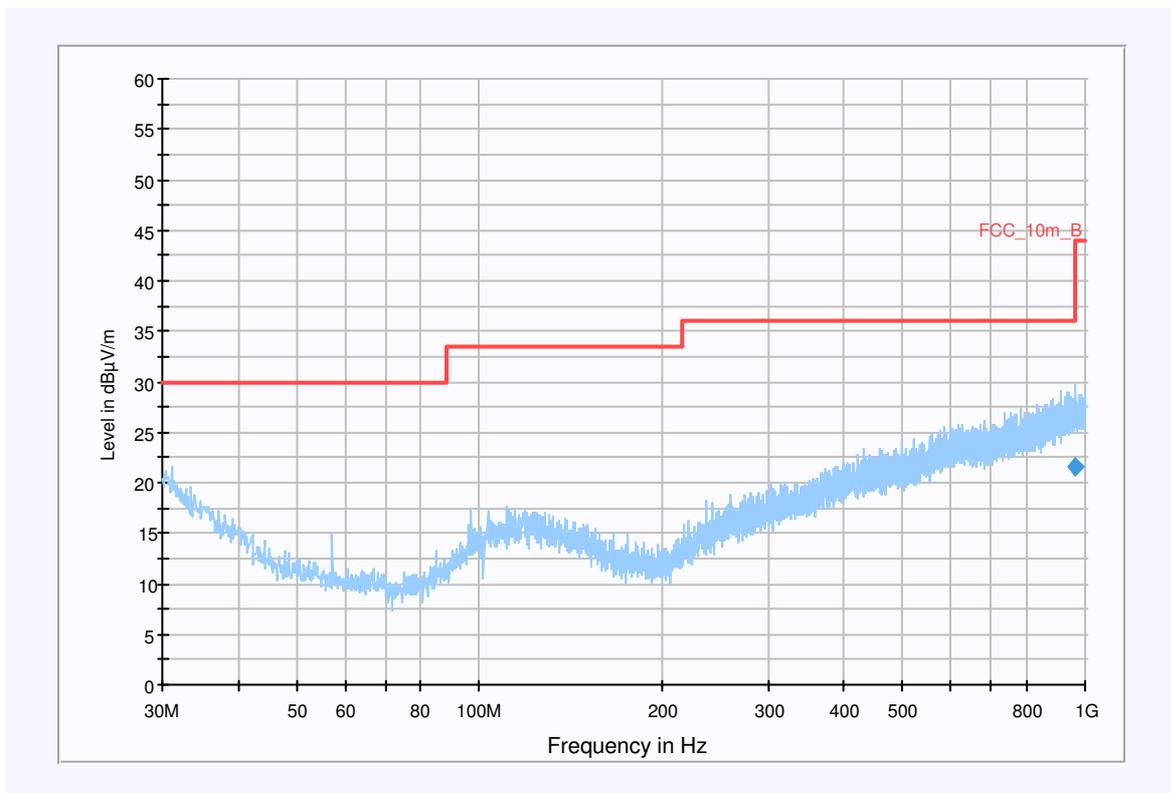


Plot 2: 1 - 4 GHz (receiver)

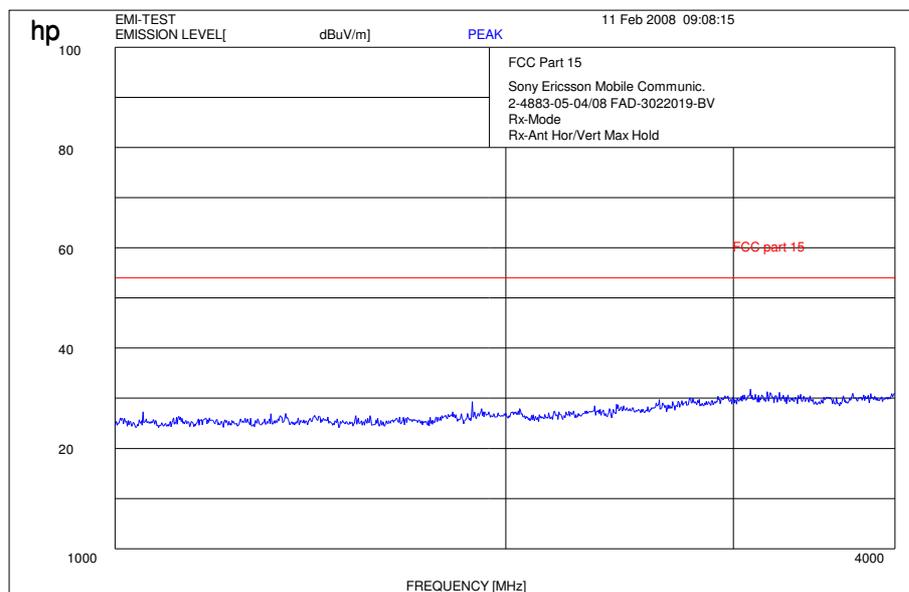

Plot 3: 4 - 12 GHz (receiver)

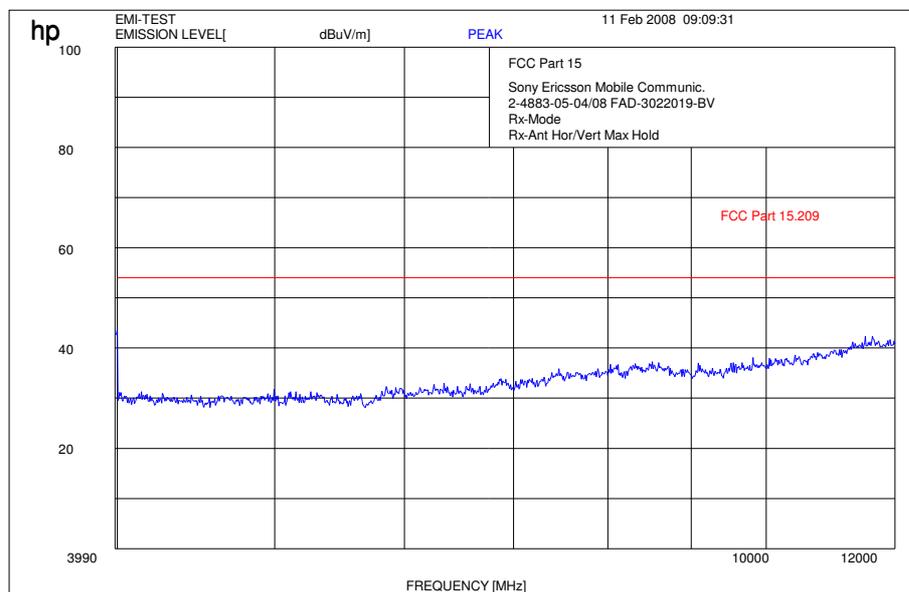

Plot 3: 12 - 25 GHz (receiver)

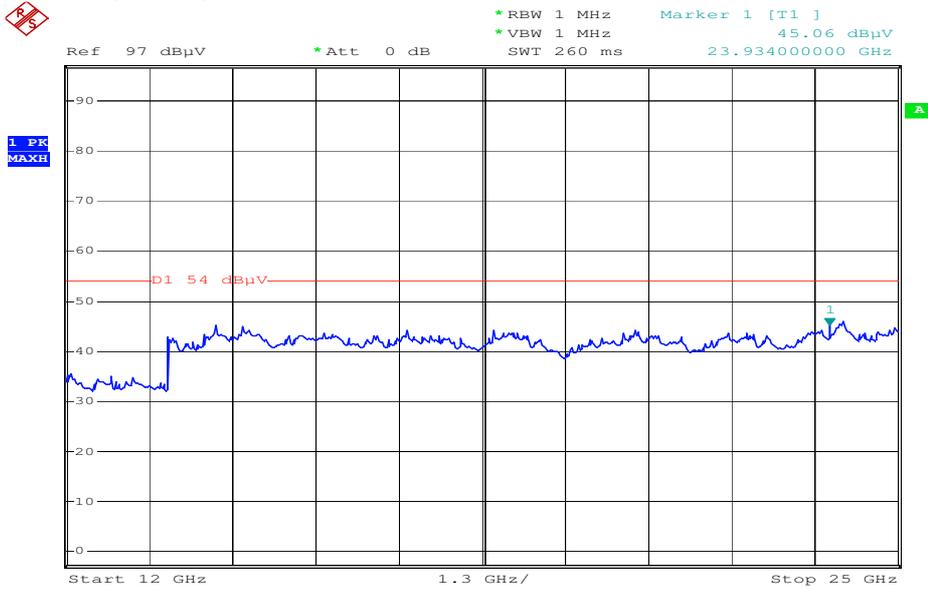

Date: 31.JAN.2008 14:47:27

Results:

Spurious Emissions level [dBµV/m]		
f[MHz]	Detector	Level [dBµV/m]
No critical peaks found		
Measurement uncertainty		±3 dB

f < 1 GHz : RBW/VBW: 100 kHz f ≥ 1GHz : RBW/VBW: 1 MHz

See above plots

Measurement distance see table

Limits: § 15.109 / 209


Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
30 - 88	100 (40 dBµV/m)	3
88 - 216	150 (43.5 dBµV/m)	3
216 - 960	200 (46 dBµV/m)	3
above 960	500 (54 dBµV/m)	3

5.14 Spurious Emissions - radiated <30 MHz §15.209

Measured at 10 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

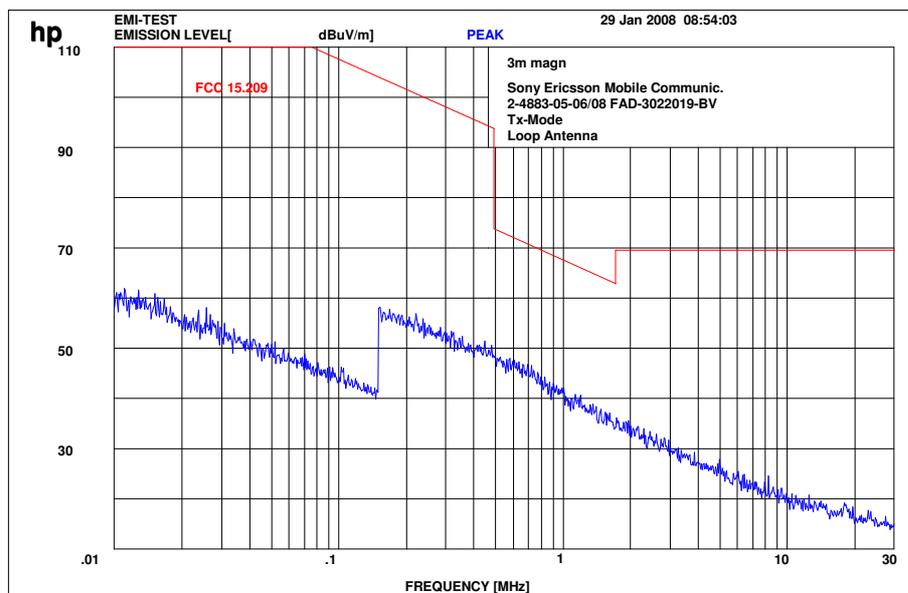


Limits:


Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB $\mu\text{V}/\text{m}$	30
30 - 88	100 / 40 dB $\mu\text{V}/\text{m}$	3
88 - 216	150 / 43.5 dB $\mu\text{V}/\text{m}$	3
216 - 960	200 / 46 dB $\mu\text{V}/\text{m}$	3
above 960	54 dB $\mu\text{V}/\text{m}$	3

5.15 Conducted Emissions <30 MHz §15.107/207

Plot 1: Phase Line CISPR 22

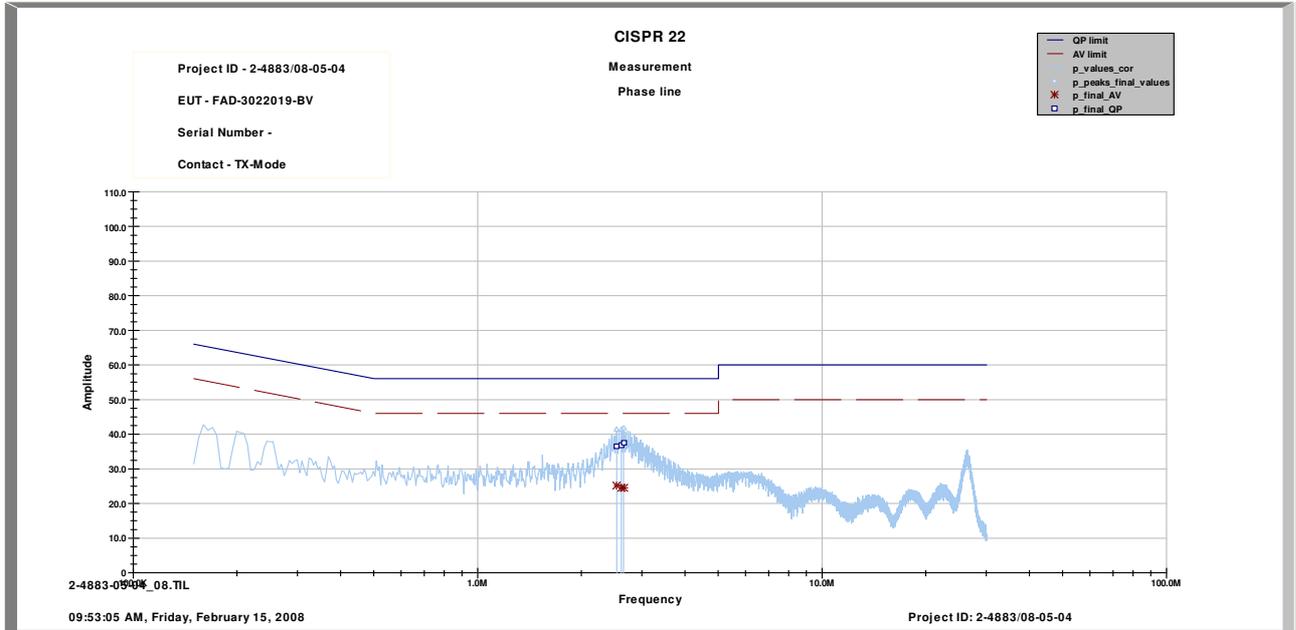

Plot 2: Neutral Line CISPR 22

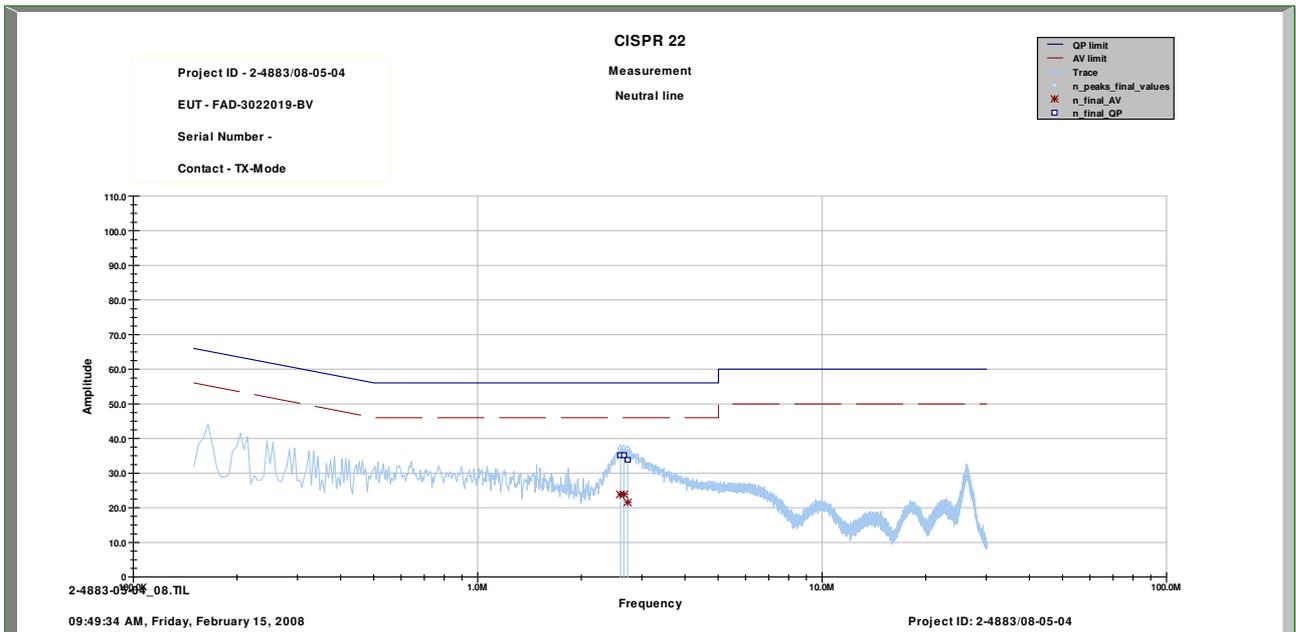

We measured in TX and RX mode, L1 and N floating and grounded, max value was hold.

Limits:

Under normal test conditions only	See plots
-----------------------------------	-----------

6 Test equipment and ancillaries used for tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

Anechoic chamber C:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Anechoic chamber	MWB	87400/02	300000996	Monthly verification		
2	System-Rack 85900	HP I.V.	*	300000222	n.a.		
3	Measurement System 1						
4	Spektrum Analyzer 8566B	HP	2747A05306	300001000	05.10.2006	24	05.10.2008
5	Spektrum Analyzer Display 85662A	HP	2816A16541	300002297	05.10.2006	24	05.10.2008
6	Quasi-Peak-Adapter 85650A	HP	2811A01131	300000999	05.10.2006	24	05.10.2008
7	RF-Preselector 85685A	HP	2837A00779	300000218	08.11.2006	24	08.11.2008
8	PC Vectra VL	HP		300001688	n.a.		
9	Software EMI	HP		300000983	n.a.		
10	Measurement System 2						
11	FSP 30	R&S	100623	ICT 300003464	05.10.2007	24	15.10.2009
12	PC	F+W			n.a.		
13	TILE	TILE			n.a.		
14	Biconical antenna	EMCO	S/N: 860 942/003		Monthly verification (System cal.)		
15	Log. Period. Antenna 3146	EMCO	2130	300001603	Monthly verification (System cal.)		
16	Double Ridged Antenna HP 3115P	EMCO	3088	300001032	Monthly verification (System cal.)		
17	Active Loop Antenna 6502	EMCO	2210	300001015	Monthly verification (System cal.)		
18	Power Supply 6032A	HP	2818A03450	300001040	12.05.2007	36	12.05.2010
19	Busisolator	Kontron		300001056	n.a.		
20	Leitungsteiler 11850C	HP		300000997	Monthly verification (System cal.)		
21	Power attenuator 8325	Byrd	1530	300001595	Monthly verification (System cal.)		
22	Band reject filter WRCG1855/1910	Wainwright	7	300003350	Monthly verification (System cal.)		
23	Band reject filter WRCG2400/2483	Wainwright	11	300003351	Monthly verification (System cal.)		

System Rack Room 005 :

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	FSP 30	R&S		300003575	02.04.2007	24	02.04.2009
2	CBT	R&S	100313	300003516	24.10.2006	24	24.10.2008
3	Switch Matrix	HP		300000929	n.a.		
4	Power Supply	HP	3041A00544	300002270	13.05.2007	36	13.05.2010
5	Signal Generator	R&S	836206/0092	300002680	30.05.2007	36	30.05.2010

Signalling Units:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	CBT	R&S	100313	300003516	24.10.2006	24	24.10.2008
2	CBT	R&S	100185	300003416	21.02.2006	24	21.02.2008
3	CMU-200	R&S	103992	300003231	27.04.2007	12	27.04.2008
4	CMU-200	R&S	106240	300003321	02.05.2006	24	02.05.2008

SRD Laboratory Room 002:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	System Controller PSM 12	R&S	835259/007	3000002681-00xx	n.a.		
2	Memory Extension PSM-K10	R&S	To 1	3000002681	n.a.		
3	Operating Software PSM-B2	R&S	To 1	3000002681	n.a.		
4	19" Monitor		22759020-ED	3000002681	n.a.		
5	Mouse		LZE 0095/6639	3000002681	n.a.		
6	Keyboard		G00013834L 461	3000002681	n.a.		
7	Spectrum Analyser FSIQ 26	R&S	835540/018	3000002681-0005	01.08.2006	24	01.08.2008
8	Tracking Generator FSIQ-B10	R&S	835107/015	3000002681	s.No.7		
10	RF-Generator SMIQ03 (B1 Signal)	R&S	835541/056	3000002681-0002	01.08.2006	36	01.08.2009
11	Modulation Coder SMIQ-B20	R&S	To 10	3000002681	s.No.10		
12	Data Generator SMIQ-B11	R&S	To 10	3000002681	s.No.10		
13	RF Rear Connection SMIQ-B19	R&S	To 10	3000002681	s.No.10		
14	Fast CPU SM-B50	R&S	To 10	3000002681	s.No.10		
15	FM Modulator SM-B5	R&S	835676/033	3000002681	s.No.10		
16	RF-Generator SMIQ03 (B2 Signal)	R&S	835541/055	3000002681-0001	01.08.2006	36	01.08.2009
17	Modulation Coder SMIQ-B20	R&S	To 16	3000002681	s.No.16		
18	Data Generator SMIQ-B11	R&S	To 16	3000002681	s.No.16		

19	RF Rear Connection SMIQ-B19	R&S	To 16	3000002681	s.No.16		
20	Fast CPU SM-B50	R&S	To 16	3000002681	s.No.16		
21	FM Modulator SM-B5	R&S	836061/022	3000002681	s.No.16		
22	RF-Generator SMP03 (B3 Signal)	R&S	835133/011	3000002681-0003	01.08.2006	36	01.08.2009
23	Attenuator SMP-B15	R&S	835136/014	3000002681	S.No.22		
24	RF Rear Connection SMP-B19	R&S	834745/007	3000002681	S.No.22		
25	Power Meter NRVD	R&S	835430/044	3000002681-0004	01.08.2006	24	01.08.2008
26	Power Sensor NRVD-Z1	R&S	833894/012	3000002681-0013	01.08.2006	24	01.08.2008
27	Power Sensor NRVD-Z1	R&S	833894/011	3000002681-0010	01.08.2006	24	01.08.2008
28	Rubidium Standard RUB	R&S		3000002681-0009	01.08.2006	24	01.08.2008
29	Switching and Signal Conditioning Unit SSCU	R&S	338864/003	3000002681-0006	01.08.2006	24	01.08.2008
30	Laser Printer HP Deskjet 2100	HP	N/A	3000002681-0011	n.a.		
31	19" Rack	R&S	11138363000004	3000002681	n.a.		
32	RF-cable set	R&S	N/A	3000002681	n.a.		
33	IEEE-cables	R&S	N/A	3000002681	n.a.		
34	Sampling System FSIQ-B70	R&S	835355/009	3000002681	s.No.7		
35	RSP programmable attenuator	R&S	834500/010	3000002681-0007	01.08.2006	24	01.08.2008
36	Signalling Unit	R&S	838312/011	3000002681	n.a.		
37	NGPE programmable Power Supply for EUT	R&S	192.033.41	3000002681			
38	Climatic box VT 4002	Heraeus Vötsch	58566046820010	300003019	11.05.2007	24	11.05.2009
39	Signaling Unit CMU200	R&S	832221/0055	300002862	12.01.2006	24	12.01.2008
40	Power Splitter 6005-3	Inmet Corp.	none	300002841	23.12.2006	24	23.12.2008
41	SMA Cables SPS-1151-985-SPS	Insulated Wire	different	different	n.a.		
42	CBT32 with EDR Signaling Unit	R&S					
43	Coupling unit	Narda	N/A	--	n.a.		
44	2xSwitch Matrix PSU	R&S	872584/021	300001329	n.a.		
45	RF-cable set	R&S	N/A	different	n.a.		
46	IEEE-cables	R&S	N/A	--	n.a.		

Anmerkung: 3000002681-00xx als Systeme inventarisiert

SRD Laboratory Room 005:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Spektrum Analyzer 8566B	HP	2747A05275	300000219	08.11.2006	24	08.11.2008
2	Spektrum Analyzer Display 85662A	HP	2816A16497	300001690	08.11.2006	24	08.11.2008
3	Quasi-Peak-Adapter 85650A	HP	2811A01135	300000216	08.11.2006	24	08.11.2008
4	Power Supply	Heiden	003202	300001187	12.05.2007	36	12.05.2010
5	Power Supply	Heiden	1701	300001392	12.05.2007	36	12.05.2010

C.BER Bluetooth Rack Room AC2:

No	Equipment/Type	Manufact.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	System Controller with XP Prof. & C.BER Control Software	F&W	300003580	na		
2	GPIB to USB Converter	Agilent	300003426	na		
3	Spectrum Analyser FSIQ26	R&S	300002681-005	1.08.2006	24	1.08.2008
	Sampling System FSIQ-B70	R&S	300002681-005	1.08.2006	24	1.08.2008
	Tracking Generator FSIQ-B10 for FSIQ26	R&S	300002681-005	1.08.2006	24	1.08.2008
4	RF-Generator SMIQ03 (Interferer Signal)	R&S	300002681-001	1.08.2006	24	1.08.2008
	Modulation Coder SMIQ-B20	R&S	300002681-001	1.08.2006	24	1.08.2008
	Data Generator SMIQ-B11	R&S	300002681-001	1.08.2006	24	1.08.2008
	RF Rear Connection SMIQ-B19	R&S	300002681-001	1.08.2006	24	1.08.2008
	Fast CPU SM-B50	R&S	300002681-001	1.08.2006	24	1.08.2008
	FM Modulator SM-B5	R&S	300002681-001	1.08.2006	24	1.08.2008
5	Rubidium Standard RUB	R&S	300002681-009	1.08.2006	24	1.08.2008
6	Switching Unit 3488A including 2 44476A cards	HP	300000926	Verified with path compensation		
	44472A VHF switch	HP	300000926	Verified with path compensation		
7	Signalling Unit: CBT with EDR	R&S	300003416	24.06.2006	24	24.06.2008
8	RF-cable set	different	no	Verified with path compensation		
9	IEEE-cables	R&S	no	na		
10	NGPE programmable Power Supply for EUT	R&S	400000078	1.08.2006	24	1.08.2008
11	Coupling Unit 4324-2	Narda	no	Verified with path compensation		
12	Climatic Chamber VT4002	Voetch	300003019	11.05.2207	24	11.05.2009
13	6 dB Attenuator 1W	Narda	no	Verified with path compensation		
14	DCBlocker 30 MHz to 12.75 GHz 1W	Narda	no	Verified with path compensation		

Anechoic chamber F:

No.	Instrument/Ancillary	Manufacturer	Type	Serial-No.	Internal identification
Radiated emission in chamber F					
F-1	Control Computer	F+W		FW0502032	300003303
F-2	Bilog antenna	Chase	CBL 6112A	2110	300000573
F-3a	Amplifier	Veritech Microwave Inc.	0518C-138	- / -	- / -
F-4b	Switch	HP	3488A	- / -	300000368
F-5	EMI Test receiver	R&S	ESCI	100083	300003312
F-6	Turntable Controller	EMCO	1061 3M	1218	300000661
F-7	Tower Controller	EMCO	1051 Controller	1262	300000625
F-8	Tower	EMCO	1051 Tower	1262	300000625
F-9	Ultra Notch-Filter Rejected band Ch. 62	WRCD		9	
Radiated immunity in chamber F					
F-10	Control Computer	F+W		FW0502032	300003303
F-11	Signal Generator	R&S	SML 03	102519	300003407
F-12	RF-Amplifier	ar	50W1000	12932	300001438
F-13	Directional Coupler	ar	DC 3010	12708	300001428
F-14	Logper Antenna	R&S	HL023A1	323704/016	300001476
F-15	RF-Amplifier	ar	60S1G3	313649	300003410
F-16	Directional Coupler	ar	DC7144A	312786	300003411
F-17	Horn Antenna	ar	AT 4002	19739	300000633
F-18	Power Meter	R&S	NRV	860327/024	F033
F-19	Power sensor	R&S	URV5-Z2	839080/005	300002844.02
F-20	Power sensor	R&S	URV5-Z2	830755/057	F032
Harmonics and flicker in front of chamber F					
F-21	Flicker and Harmonics Test System	Spitzenberger & Spies	PHE4500/B I PHE4500/B II	B5983 B5984	300000210
F-22	Control Unit	Spitzenberger & Spies	STE	B5980	300000210
F-23	Power Amplifier	Spitzenberger & Spies	EP 4500/B	B5976	300000210
F-24	Conect Panel	Spitzenberger & Spies	Conect panel	B5982	300000210
F-25	Power Supply	Spitzenberger & Spies	NT-EP 4500	B3977	300000210
F-26	Additional transformer	Spitzenberger & Spies	UT-EP 4500	B5978	300000210
F-27	Analyzer Reference System	Spitzenberger & Spies	ARS 16/1	A3509 07/0 0205	300003314
F-26	Power Supply	Hewlett Packard	6032 A	2920 A 04466	300000580

OTA chamber:

No	Equipment	Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calib.	Freq. months	Next Calib.
1	Splitter	15542	Mini Circuits	15542	400000086	Verified with path compensation		
2	Splitter	42000	Anaren	4730	400000085	Verified with path compensation		
3	Cable N-Con. 15m	Aircell 7	Aircell	--	400000087	Verified with path compensation		
4	CTIA-Chamber	AMS 8500	ETS-Lindgren	--	300003327-0000	Verified with chamber and ripple tests		
5	CTIA-Chamber - Positioning Equipment	--	EMCO	--	300003328-0000	na		
6	CTIA-Chamber – Software EMQuest	--	EMCO	--	300003328-0001	na		
7	CTIA-Chamber - Antennas	Double Ridged Horn, Dipoles/Loops	EMCO	--	300003328-0002	na		
8	Power supply 0-50V	6633A	HP Meßtechnik	2851A-01222	300001530	12.5.07	24	12.5.09
9	MP5 Five-Beam-Laser	MP5	CST/berger		400000088	na		
10	Mount kit for Laptop	--	EMCO		300003295	na		
15	Antenna for signalling	3102 L Conical log spir	EMCO	40953	300003296	na		
16	Cable SMA-Con. 15m	KK-MF141-15	Huber & Suhner		400000090	Verified with path compensation		
17	Cables	--	Huber & Suhner	different	400000083	Verified with path compensation		
18	Limiting Amplifier	LA 02-801	JCA Tech.	101	300003341	na		
19	Spectrum Analyzer	FSP-7	R&S	100289	300003282	12.5.07	24	12.5.09
20	Switch Unit	TS-RSP	R&S	100155	300003281	Verified with path compensation		
21	Step Attenuator 0 ...139.9 dB	RSP	R&S	860712002	400000079	Verified with path compensation		
22	Signalgenerator	SMIQ03B	R&S	836206 /0091	300002679	1.6.07	36	1.6.10
23	Universal Communication Tester	CMU 200	R&S	106240	300003321	2.5.07	24	2.5.09
24	Hygro-Thermometer	-/-, 5-45°C, 20-100%rF	Thies Clima	-/-	400000089	27.4.07	12	27.4.08