



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 22, 24, 27 / IC RSS-132 RSS-133 RSS-139

**Applicant Name:**  
Sony Mobile Communications  
Nya Vattentornet  
Lund  
Sweden 22188

**Date of Testing:**  
6/12 - 7/1/2013  
**Test Site/Location:**  
PCTEST Lab., Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1306100974.PY7

<b>FCC ID:</b>	<b>PY7PM-0410</b>
<b>APPLICANT:</b>	<b>SONY MOBILE COMMUNICATIONS</b>

**Application Type:** Certification  
**Type Number:** PM-0410-BV  
**EUT Type:** Portable Handset  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §2 §22(H) §24(E) §27(L)  
**IC Specification(s):** RSS-132 Issue 3 RSS-133 Issue 6 RSS-139 Issue 2  
**Test Procedure(s):** ANSI/TIA-603-C-2004, KDB 971168  
**Test Device Serial No.:** *identical prototype* [S/N: 6801]

Mode	Tx Frequency (MHz)	Emission Designator	ERP/EIRP	
			Max. Power (W)	Max. Power (dBm)
GSM850	824.2 - 848.8	244KGXW	1.776	32.49
EDGE850	824.2 - 848.8	245KG7W	0.559	27.47
GSM1900	1850.2 - 1909.8	241KGXW	1.675	32.24
EDGE1900	1850.2 - 1909.8	241KG7W	0.513	27.10
WCDMA850	826.4 - 846.6	4M14F9W	0.128	21.07
WCDMA1700	1712.4 - 1752.5	4M13F9W	0.372	25.71
WCDMA1900	1852.4 - 1907.6	4M13F9W	0.271	24.32

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez  
President




<b>FCC ID:</b> PY7PM-0410		<b>FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1306100974.PY7	<b>Test Dates:</b> 6/12 - 7/1/2013	<b>EUT Type:</b> Portable Handset	Page 1 of 72	

# T A B L E O F C O N T E N T S


FCC PART 22, 24, 27 MEASUREMENT REPORT .....		3
1.0	INTRODUCTION .....	4
1.1	SCOPE .....	4
1.2	TESTING FACILITY .....	4
2.0	PRODUCT INFORMATION .....	5
2.1	EQUIPMENT DESCRIPTION .....	5
2.2	DEVICE CAPABILITIES .....	5
2.3	TEST CONFIGURATION .....	5
2.4	EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	EVALUATION PROCEDURE .....	6
3.2	CELLULAR - BASE FREQUENCY BLOCKS .....	6
3.3	CELLULAR - MOBILE FREQUENCY BLOCKS .....	6
3.4	PCS - BASE FREQUENCY BLOCKS .....	6
3.5	PCS - MOBILE FREQUENCY BLOCKS .....	7
3.6	AWS - BASE FREQUENCY BLOCKS .....	7
3.7	AWS - MOBILE FREQUENCY BLOCKS .....	7
3.8	OCCUPIED BANDWIDTH .....	7
3.9	SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	8
3.10	RADIATED POWER AND RADIATED SPURIOUS EMISSIONS .....	8
3.11	PEAK-AVERAGE RATIO .....	9
3.12	FREQUENCY STABILITY / TEMPERATURE VARIATION .....	9
4.0	TEST EQUIPMENT CALIBRATION DATA .....	10
5.0	SAMPLE CALCULATIONS .....	11
6.0	TEST RESULTS .....	12
6.1	SUMMARY .....	12
6.2	CELLULAR EFFECTIVE RADIATED POWER (ERP) .....	13
6.3	AWS EFFECTIVE RADIATED POWER (EIRP) .....	14
6.4	PCS EFFECTIVE RADIATED POWER (EIRP) .....	15
6.5	CELLULAR GSM RADIATED MEASUREMENTS .....	16
6.6	CELLULAR WCDMA RADIATED MEASUREMENTS .....	19
6.7	AWS WCDMA RADIATED MEASUREMENTS .....	22
6.8	PCS GSM RADIATED MEASUREMENTS .....	25
6.9	PCS WCDMA RADIATED MEASUREMENTS .....	28
6.10	CELLULAR GSM FREQUENCY STABILITY MEASUREMENTS .....	31
6.11	CELLULAR WCDMA FREQUENCY STABILITY MEASUREMENTS .....	33
6.12	AWS WCDMA FREQUENCY STABILITY MEASUREMENTS .....	35
6.13	PCS GSM FREQUENCY STABILITY MEASUREMENTS .....	37
6.14	PCS WCDMA FREQUENCY STABILITY MEASUREMENTS .....	39
7.0	PLOTS OF EMISSIONS .....	41
8.0	CONCLUSION .....	72

<b>FCC ID:</b> PY7PM-0410	 <b>FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>SONY</b> make.believe	<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1306100974.PY7	<b>Test Dates:</b> 6/12 - 7/1/2013	<b>EUT Type:</b> Portable Handset	Page 2 of 72



# MEASUREMENT REPORT

## FCC Part 22, 24, 27




### §2.1033 General Information

**APPLICANT:** Sony Mobile Communications  
**APPLICANT ADDRESS:** Nya Vattentornet  
 Lund, Sweden 22188  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA  
**FCC RULE PART(S):** §2 §22(H) §24(E) §27(L)  
**TYPE NUMBER:** PM-0410-BV  
**FCC ID:** PY7PM-0410  
**FCC CLASSIFICATION:** PCS Licensed Transmitter Held to Ear (PCE)  
**MODE:** GSM / EDGE / WCDMA  
**FREQUENCY TOLERANCE:** ±0.00025 % (2.5 ppm)  
**Test Device Serial No.:** 6801       Production     Pre-Production     Engineering  
**DATE(S) OF TEST:** 6/12 - 7/1/2013  
**TEST REPORT S/N:** 0Y1306100974.PY7

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



<b>FCC ID:</b> PY7PM-0410	 <b>FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1306100974.PY7	<b>Test Dates:</b> 6/12 - 7/1/2013	<b>EUT Type:</b> Portable Handset	Page 3 of 72

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

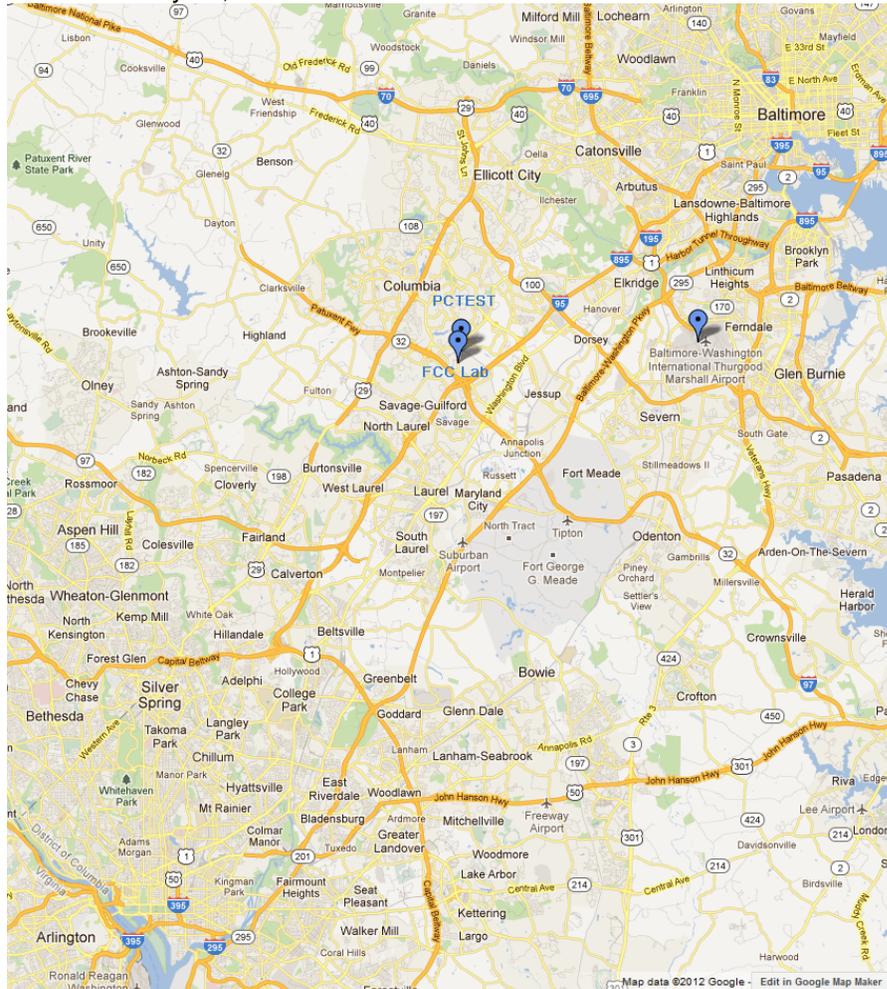


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 4 of 72	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Sony Portable Handset FCC ID: PY7PM-0410**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Band 2, 4, 5, 7 LTE, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x, EDR, LE), ANT+, NFC

### 2.3 Test Configuration

The Sony Portable Handset FCC ID: PY7PM-0410 was tested per the guidance of ANSI/TIA-603-C-2004 and KDB 971168. See Section 3.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 5 of 72	

### 3.0 DESCRIPTION OF TESTS

#### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **Sony Portable Handset FCC ID: PY7PM-0410**.

Deviation from Measurement Procedure.....None

#### 3.2 Cellular - Base Frequency Blocks

§22.905



BLOCK 1: 869 – 880 MHz (A\* Low + A)


BLOCK 3: 890 – 891.5 MHz (A\* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B\*)

#### 3.3 Cellular - Mobile Frequency Blocks

§22.905

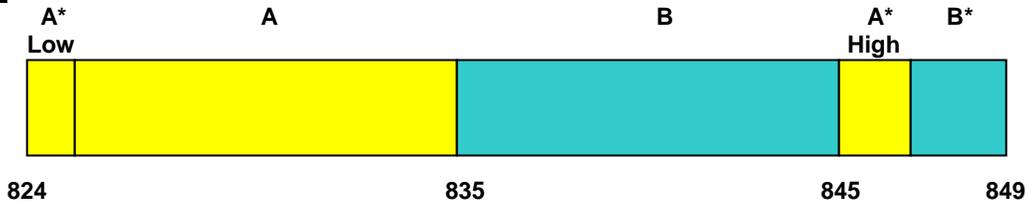

BLOCK 1: 824 – 835 MHz (A\* Low + A)


BLOCK 3: 845 – 846.5 MHz (A\* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B\*)

#### 3.4 PCS - Base Frequency Blocks

§24.229

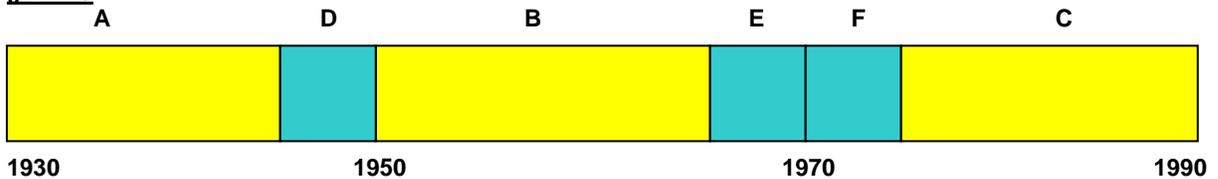

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)


BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

FCC ID: PY7PM-0410	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	 make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 6 of 72

### 3.5 PCS - Mobile Frequency Blocks


§24.229

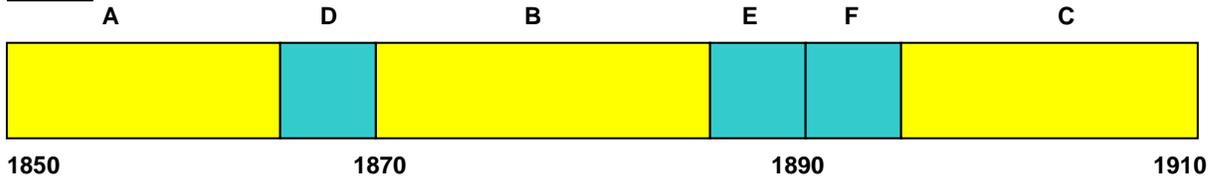

- BLOCK 1: 1850 – 1865 MHz (A)
- BLOCK 2: 1865 – 1870 MHz (D)
- BLOCK 3: 1870 – 1885 MHz (B)
- BLOCK 4: 1885 – 1890 MHz (E)
- BLOCK 5: 1890 – 1895 MHz (F)
- BLOCK 6: 1895 – 1910 MHz (C)

### 3.6 AWS - Base Frequency Blocks


§27.5(h)

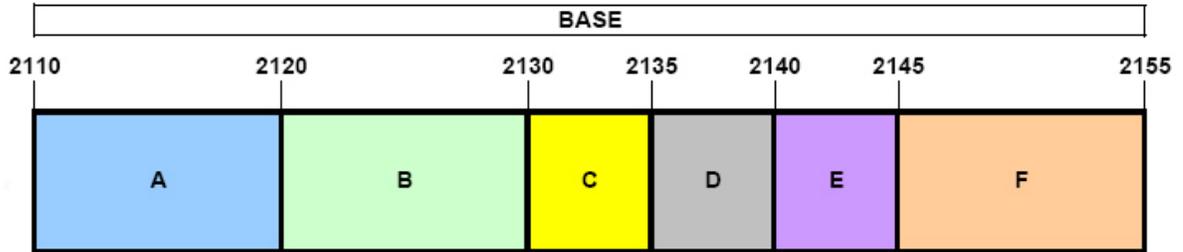

- BLOCK 1: 2110 – 2120 MHz (A)
- BLOCK 2: 2120 – 2130 MHz (B)
- BLOCK 3: 2130 – 2135 MHz (C)
- BLOCK 4: 2135 – 2140 MHz (D)
- BLOCK 5: 2140 – 2145 MHz (E)
- BLOCK 6: 2145 – 2155 MHz (E)

### 3.7 AWS - Mobile Frequency Blocks

§27.5(h)

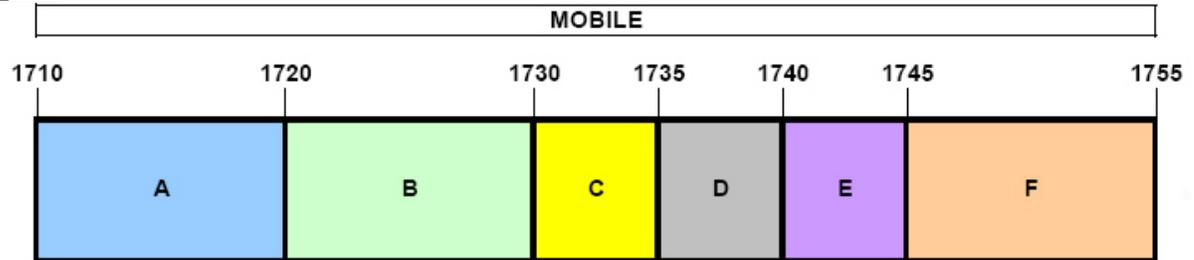

- BLOCK 1: 1710 – 1720 MHz (A)
- BLOCK 2: 1720 – 1730 MHz (B)
- BLOCK 3: 1730 – 1735 MHz (C)
- BLOCK 4: 1735 – 1740 MHz (D)
- BLOCK 5: 1740 – 1745 MHz (E)
- BLOCK 6: 1745 – 1755 MHz (F)

### 3.8 Occupied Bandwidth

§2.1049 RSS-Gen(4.6.1) RSS-133(2.3) RSS-139(2.3)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The spectrum analyzers' "occupied bandwidth" measurement function was used to record the occupied bandwidth in accordance with KDB 971168.

FCC ID: PY7PM-0410	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	 make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 7 of 72

### 3.9 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(h) RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22 and 1 MHz or greater for Part 24, Part 27. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

### 3.10 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(d.10) §27.53(h) RSS-132(4.4) RSS-132(4.5.1) RSS-133(6.4) RSS-133(6.5.1) RSS-139(6.5.2)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A 3/4" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss} \text{ [dB]} + \text{antenna gain} \text{ [dBd/dBi]}$$

Where, P<sub>d</sub> is the dipole equivalent power, P<sub>g</sub> is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to P<sub>g</sub> [dBm] - cable loss [dB].

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 8 of 72	



The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power}_{[\text{Watts}]})$  specified in 22.917(a) and 24.238(a).

### 3.11 Peak-Average Ratio

§24.232(d) §27.50(d.5) RSS-132(5.4) RSS-133(6.4) RSS-139(6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

For pulsed signals, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power. For continuous signals, the trigger is set to “free run” in the CCDF measurement mode.

### 3.12 Frequency Stability / Temperature Variation

§2.1055 §22.355 §22.863 §22.905 §24.229 §24.235 §27.5(h) §27.54 RSS-132(4.3) RSS-133(6.3) RSS-139(6.3)

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

*Specification – For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.*

#### Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 9 of 72	

## 4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	1/17/2013	Annual	1/17/2014	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/29/2013	Annual	3/29/2014	N/A
Agilent	8447D	Broadband Amplifier	5/31/2013	Annual	5/31/2014	2443A01900
Agilent	N5183A	MXG Analog Signal Generator	1/6/2013	Annual	1/6/2014	MY50141900
Agilent	N9030A	PXA Signal Analyzer (44GHz)	1/11/2013	Annual	1/11/2014	MY52350166
Agilent	87405C	Pre-amplifier (0.1 - 18 GHz)	3/11/2013	Annual	3/11/2014	MY53010007
Espec	ESX-2CA	Environmental Chamber	4/16/2013	Annual	4/16/2014	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	11/7/2012	Biennial	11/7/2014	128338
Mini-Circuits	VHF-1200+	High Pass Filter	1/17/2013	Annual	1/17/2014	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/17/2013	Annual	1/17/2014	30841
Mini-Circuits	PWR-SENS-4RMS	USB Power Sensor	4/17/2013	Annual	4/17/2014	11210140001
Rohde & Schwarz	CMU200	Base Station Simulator	N/A		NA	836536/0005
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100040
Rohde & Schwarz	ESU26	EMI Test Receiver	2/25/2013	Annual	2/25/2014	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	10/3/2011	Biennial	10/3/2013	91052522TX
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	10/3/2011	Biennial	10/3/2013	91052523RX
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

**Table 4-1. Test Equipment**

**Notes:**

Equipment used for signaling with a calibration date of "N/A" shown in this list was only used for maintaining a link between the piece of equipment and the EUT. This equipment was not used to make direct calibrated measurements.

<b>FCC ID:</b> PY7PM-0410		<b>FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1306100974.PY7	<b>Test Dates:</b> 6/12 - 7/1/2013	<b>EUT Type:</b> Portable Handset	Page 10 of 72	

## 5.0 SAMPLE CALCULATIONS

### GSM Emission Designator

**Emission Designator = 250KGXW**

GSM BW = 250 kHz  
 G = Phase Modulation  
 X = Cases not otherwise covered  
 W = Combination (Audio/Data)

### EDGE Emission Designator

**Emission Designator = 250KG7W**

EDGE BW = 250 kHz  
 G = Phase Modulation  
 7 = Quantized/Digital Info  
 W = Combination (Audio/Data)

### WCDMA Emission Designator

**Emission Designator = 4M16F9W**

WCDMA BW = 4.16 MHz  
 F = Frequency Modulation  
 9 = Composite Digital Info  
 W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

### Spurious Radiated Emission

**Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.50 dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 11 of 72	

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: Sony Mobile Communications  
 FCC ID: PY7PM-0410  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM / EDGE / WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>						
2.1049	RSS-Gen(4.6.1) RSS-133(2.3) RSS-139(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051 22.917(a) 24.238(a) 27.53(h)	RSS-132(4.5.1) RSS-133(6.5.2) RSS-139(6.5.2)	Band Edge / Conducted Spurious Emissions	> 43 + log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 7.0
24.232(d) 27.50(d.5)	RSS-132(5.4) RSS-133(6.4) RSS-139(6.4)	Peak-Average Ratio	< 13 dB		PASS	Section 7.0
2.1046	RSS-132(4.4) RSS-133(4.1) RSS-139(4.1)	Transmitter Conducted Output Power	N/A	RADIATED	PASS	RF Exposure Report
22.913(a.2)	RSS-132(4.4) [SRSP-503(5.1.3)]	Effective Radiated Power	< 7 Watts max. ERP		PASS	Section 6.2
24.232(c)	RSS-133(6.4) [SRSP-510(5.1.2)]	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 6.4
27.50(d.4)	RSS-139(6.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.3
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132(4.5.1) RSS-133(6.5.2) RSS-139(6.5.2)	Undesirable Emissions	> 43 + log <sub>10</sub> (P[Watts]) for all out-of-band emissions		PASS	Sections 6.5, 6.6, 6.7, 6.8, 6.9
2.1055 22.355 24.235 27.54	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3)	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)		PASS	Sections 6.10, 6.11, 6.12, 6.13, 6.14

**Table 6-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 12 of 72	

## 6.2 Cellular Effective Radiated Power (ERP)

§22.913(a)(2) RSS-132(4.4) [SRSP-503(5.1.3)]

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	PoI [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GSM850	Standard	27.55	4.59	V	32.14	1.638	38.45	-6.31
836.60	GSM850	Standard	27.67	4.82	V	32.49	1.776	38.45	-5.96
848.80	GSM850	Standard	26.65	5.05	V	31.70	1.479	38.45	-6.75
836.60	EDGE850	Standard	22.65	4.82	V	27.47	0.559	38.45	-10.98

Table 6-2. ERP (Cellular GSM)

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	PoI [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	Standard	16.48	4.59	V	21.07	0.128	38.45	-17.38
836.60	WCDMA850	Standard	15.88	4.82	V	20.70	0.118	38.45	-17.75
846.60	WCDMA850	Standard	15.02	5.05	V	20.07	0.102	38.45	-18.38

Table 6-4. ERP (Cellular WCDMA)

### NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active. This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the V position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410	 FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 13 of 72

### 6.3 AWS Effective Radiated Power (EIRP)

§22.913(a)(2) RSS-132(4.4) [SRSP-503(5.1.3)]

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	PoI [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	Standard	14.72	9.89	H2	24.61	0.289	30.00	-5.39
1732.50	WCDMA1700	Standard	14.96	9.85	H2	24.81	0.303	30.00	-5.19
1752.50	WCDMA1700	Standard	15.90	9.81	H2	25.71	0.372	30.00	-4.29

**Table 6-3. EIRP (AWS WCDMA)**

**NOTES:**

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H2 position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 14 of 72	

## 6.4 PCS Effective Radiated Power (EIRP)

§22.913(a)(2) RSS-132(4.4) [SRSP-503(5.1.3)]

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	PoI [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GSM1900	Standard	22.64	9.60	H2	32.24	1.675	33.01	-0.77
1880.00	GSM1900	Standard	21.56	9.53	H2	31.09	1.286	33.01	-1.92
1909.80	GSM1900	Standard	22.07	9.47	H2	31.54	1.427	33.01	-1.47
1850.20	EDGE1900	Standard	17.50	9.60	H2	27.10	0.513	33.01	-5.91

Table 6-4. EIRP (PCS GSM)

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	PoI [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	Standard	14.73	9.59	H2	24.32	0.271	33.01	-8.69
1880.00	WCDMA1900	Standard	13.43	9.53	H2	22.96	0.198	33.01	-10.05
1907.60	WCDMA1900	Standard	13.69	9.48	H2	23.17	0.207	33.01	-9.84

Table 6-4. EIRP (PCS WCDMA)

### NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active. This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H2 position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410	 FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 15 of 72

## 6.5 Cellular GSM Radiated Measurements

§2.1053 §22.917(a) RSS-132(4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.20 MHz  
 CHANNEL: 128  
 MEASURED OUTPUT POWER: 32.14 dBm = 1.638 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  45.14 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1648.40	-50.16	2.60	-47.56	H	79.7
2472.60	-38.64	2.90	-35.75	H	67.9
3296.80	-81.79	5.44	-76.35	H	108.5
4121.00	-81.50	7.05	-74.45	H	106.6
4945.20	-80.98	7.86	-73.12	H	105.3

Table 6-5. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)

#### NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 16 of 72	

## Cellular GSM Radiated Measurements (Cont'd)

§2.1053 §22.917(a) RSS-132(4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 190  
 MEASURED OUTPUT POWER: 32.49 dBm = 1.776 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  45.49 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-48.56	2.34	-46.22	H	78.7
2509.80	-38.19	2.84	-35.35	H	67.8
3346.40	-81.98	5.64	-76.33	H	108.8
4183.00	-81.65	7.15	-74.51	H	107.0
5019.60	-81.01	7.97	-73.04	H	105.5

**Table 6-6. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)**

#### NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 17 of 72	

**Cellular GSM Radiated Measurements (Cont'd)**  
§2.1053 §22.917(a) RSS-132(4.5.1)

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 848.80 MHz  
 CHANNEL: 251  
 MEASURED OUTPUT POWER: 31.70 dBm = 1.479 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  44.70 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1697.60	-48.20	2.08	-46.12	H	77.8
2546.40	-38.84	3.17	-35.67	H	67.4
3395.20	-82.15	5.84	-76.31	H	108.0
4244.00	-81.80	7.24	-74.56	H	106.3
5092.80	-80.78	8.03	-72.76	H	104.5

**Table 6-7. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)**

**NOTES:**

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410	 FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 18 of 72

## 6.6 Cellular WCDMA Radiated Measurements

§2.1053 §22.917(a) RSS-132(4.5.1)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 826.40 MHz  
 CHANNEL: 4132  
 MEASURED OUTPUT POWER: 21.07 dBm = 0.128 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  34.07 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1652.80	-55.56	2.55	-53.01	H	74.1
2479.20	-79.80	2.86	-76.93	H	98.0
3305.60	-81.82	5.48	-76.35	H	97.4
4132.00	-81.53	7.06	-74.46	H	95.5
4958.40	-81.00	7.88	-73.12	H	94.2

Table 6-8. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

#### NOTES:

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 19 of 72	

**Cellular WCDMA Radiated Measurements (Cont'd)**  
**§2.1053 §22.917(a) RSS-132(4.5.1)**

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 836.60 MHz  
 CHANNEL: 4183  
 MEASURED OUTPUT POWER: 20.70 dBm = 0.118 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  33.70 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-54.95	2.37	-52.58	H	73.3
2509.80	-79.73	2.80	-76.93	H	97.6
3346.40	-81.96	5.62	-76.35	H	97.1
4183.00	-81.60	7.13	-74.46	H	95.2
5019.60	-81.07	7.96	-73.12	H	93.8

**Table 6-9. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)**

**NOTES:**

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410	 FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 20 of 72

**Cellular WCDMA Radiated Measurements (Cont'd)**  
**§2.1053 §22.917(a) RSS-132(4.5.1)**

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 846.60 MHz  
 CHANNEL: 4233  
 MEASURED OUTPUT POWER: 20.07 dBm = 0.102 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  33.07 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.20	-55.80	2.13	-53.67	H	73.7
2539.80	-80.05	3.11	-76.93	H	97.0
3386.40	-82.15	5.80	-76.35	H	96.4
4233.00	-81.69	7.22	-74.46	H	94.5
5079.60	-81.13	8.01	-73.12	H	93.2

**Table 6-10. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)**

**NOTES:**

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 21 of 72	

## 6.7 AWS WCDMA Radiated Measurements §2.1053 §24.238(a) RSS-139(6.5.2)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1712.40 MHz  
 CHANNEL: 1312  
 MEASURED OUTPUT POWER: 24.61 dBm = 0.289 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.61 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3424.80	-22.34	8.11	-14.23	H	38.8
5137.20	-84.14	10.21	-73.93	H	98.5
6849.60	-82.62	11.32	-71.30	H	95.9
8562.00	-82.12	13.03	-69.09	H	93.7
10274.40	-79.02	13.02	-66.00	H	90.6

**Table 6-11. Radiated Spurious Data (AWS WCDMA Mode – Ch. 9262)**

#### NOTES:

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410	 FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 22 of 72

**AWS WCDMA Radiated Measurements (Cont'd)**  
§2.1053 §24.238(a) RSS-139(6.5.2)

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 1732.50 MHz  
 CHANNEL: 1412  
 MEASURED OUTPUT POWER: 24.81 dBm = 0.303 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.81 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-22.44	8.26	-14.18	H	39.0
5197.50	-84.19	10.26	-73.93	H	98.7
6930.00	-82.72	11.42	-71.30	H	96.1
8662.50	-82.16	13.07	-69.09	H	93.9
10395.00	-79.12	13.12	-66.00	H	90.8

**Table 6-12. Radiated Spurious Data (AWS WCDMA Mode – Ch. 9400)**

**NOTES:**

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 23 of 72	

**AWS WCDMA Radiated Measurements (Cont'd)**  
**§2.1053 §24.238(a) RSS-139(6.5.2)**

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 1752.50 MHz  
 CHANNEL: 1862  
 MEASURED OUTPUT POWER: 25.71 dBm = 0.372 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  38.71 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3505.00	-22.65	8.40	-14.25	H	40.0
5257.50	-84.24	10.31	-73.93	H	99.6
7010.00	-82.81	11.51	-71.30	H	97.0
8762.50	-82.20	13.11	-69.09	H	94.8
10515.00	-79.20	13.20	-66.00	H	91.7

**Table 6-13. Radiated Spurious Data (AWS WCDMA Mode – Ch. 9538)**

**NOTES:**

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410	 FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 24 of 72

## 6.8 PCS GSM Radiated Measurements

§2.1053 §24.238(a) RSS-133(6.5.2)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1850.20 MHz  
 CHANNEL: 512  
 MEASURED OUTPUT POWER: 32.24 dBm = 1.675 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  45.24 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3700.40	-57.58	8.40	-49.18	H	81.4
5550.60	-84.17	10.62	-73.55	H	105.8
7400.80	-82.17	11.82	-70.35	H	102.6
9251.00	-81.58	13.30	-68.28	H	100.5
11101.20	-78.19	13.50	-64.69	H	96.9

**Table 6-14. Radiated Spurious Data (PCS GSM Mode – Ch. 512)**

#### NOTES:

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 25 of 72	

**PCS GSM Radiated Measurements (Cont'd)**  
§2.1053 §24.238(a) RSS-133(6.5.2)

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 661  
 MEASURED OUTPUT POWER: 31.09 dBm = 1.286 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  44.09 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-56.83	8.42	-48.41	H	79.5
5640.00	-84.10	10.66	-73.45	H	104.5
7520.00	-82.04	11.92	-70.11	H	101.2
9400.00	-81.16	13.24	-67.92	H	99.0
11280.00	-77.91	13.49	-64.42	H	95.5

**Table 6-15. Radiated Spurious Data (PCS GSM Mode – Ch. 661)**

**NOTES:**

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 26 of 72	

**PCS GSM Radiated Measurements (Cont'd)**  
§2.1053 §24.238(a) RSS-133(6.5.2)

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 1909.80 MHz  
 CHANNEL: 810  
 MEASURED OUTPUT POWER: 31.54 dBm = 1.427 W  
 MODULATION SIGNAL: GSM (GMSK)  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  44.54 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3819.60	-57.97	8.57	-49.40	H	80.9
5729.40	-84.04	10.69	-73.35	H	104.9
7639.20	-82.04	12.07	-69.97	H	101.5
9549.00	-80.84	13.20	-67.64	H	99.2
11458.80	-77.84	13.42	-64.43	H	96.0

**Table 6-16. Radiated Spurious Data (PCS GSM Mode – Ch. 810)**

**NOTES:**

- 1) This device was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 27 of 72	

## 6.9 PCS WCDMA Radiated Measurements

§2.1053 §24.238(a) RSS-133(6.5.2)

### Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1852.40 MHz  
 CHANNEL: 9262  
 MEASURED OUTPUT POWER: 24.32 dBm = 0.271 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  37.32 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3704.80	-55.31	8.40	-46.91	H	71.2
5557.20	-82.02	10.62	-71.39	H	95.7
7409.60	-80.01	11.83	-68.19	H	92.5
9262.00	-79.40	13.30	-66.10	H	90.4
11114.40	-76.02	13.50	-62.52	H	86.8

Table 6-17. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

#### NOTES:

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 28 of 72

**PCS WCDMA Radiated Measurements (Cont'd)**  
§2.1053 §24.238(a) RSS-133(6.5.2)

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 9400  
 MEASURED OUTPUT POWER: 22.96 dBm = 0.198 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  35.96 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-55.11	8.42	-46.68	H	69.6
5640.00	-82.05	10.66	-71.39	H	94.4
7520.00	-80.11	11.92	-68.19	H	91.1
9400.00	-79.34	13.24	-66.10	H	89.1
11280.00	-76.01	13.49	-62.52	H	85.5

**Table 6-18. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)**

**NOTES:**

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410	 FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 29 of 72

**PCS WCDMA Radiated Measurements (Cont'd)**  
§2.1053 §24.238(a) RSS-133(6.5.2)

**Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY: 1907.60 MHz  
 CHANNEL: 9538  
 MEASURED OUTPUT POWER: 23.17 dBm = 0.207 W  
 MODULATION SIGNAL: WCDMA  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  36.17 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3815.20	-55.45	8.56	-46.89	H	70.1
5722.80	-82.08	10.69	-71.39	H	94.6
7630.40	-80.24	12.06	-68.19	H	91.4
9538.00	-79.30	13.20	-66.10	H	89.3
11445.60	-75.94	13.42	-62.52	H	85.7

**Table 6-19. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)**

**NOTES:**

- 1) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA, and GSM/GPRS/EDGE capabilities. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 2) This unit was tested with its standard battery.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case configuration was found in the H position. The data reported in the table above was measured in this test setup.

FCC ID: PY7PM-0410	 FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 30 of 72

## 6.10 Cellular GSM Frequency Stability Measurements

§2.1055 §22.355 RSS-132(4.3)

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 190

REFERENCE VOLTAGE: 3.8 VDC


DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,599,999	-1	-0.0000001
100 %		- 30	836,599,996	-4	-0.0000005
100 %		- 20	836,599,998	-2	-0.0000002
100 %		- 10	836,599,995	-5	-0.0000006
100 %		0	836,600,000	0	0.0000000
100 %		+ 10	836,599,991	-9	-0.0000011
100 %		+ 20	836,599,991	-9	-0.0000011
100 %		+ 30	836,600,003	3	0.0000004
100 %		+ 40	836,599,993	-7	-0.0000008
100 %		+ 50	836,599,991	-9	-0.0000011
115 %		4.37	+ 20	836,599,994	-6
BATT. ENDPOINT	3.2	+ 20	836,600,000	0	0.0000000

**Table 6-20. Frequency Stability Data (Cellular GSM Mode – Ch. 190)**

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 31 of 72	

**Cellular GSM Frequency Stability Measurements (Cont'd)**  
§2.1055 §22.355 RSS-132(4.3)

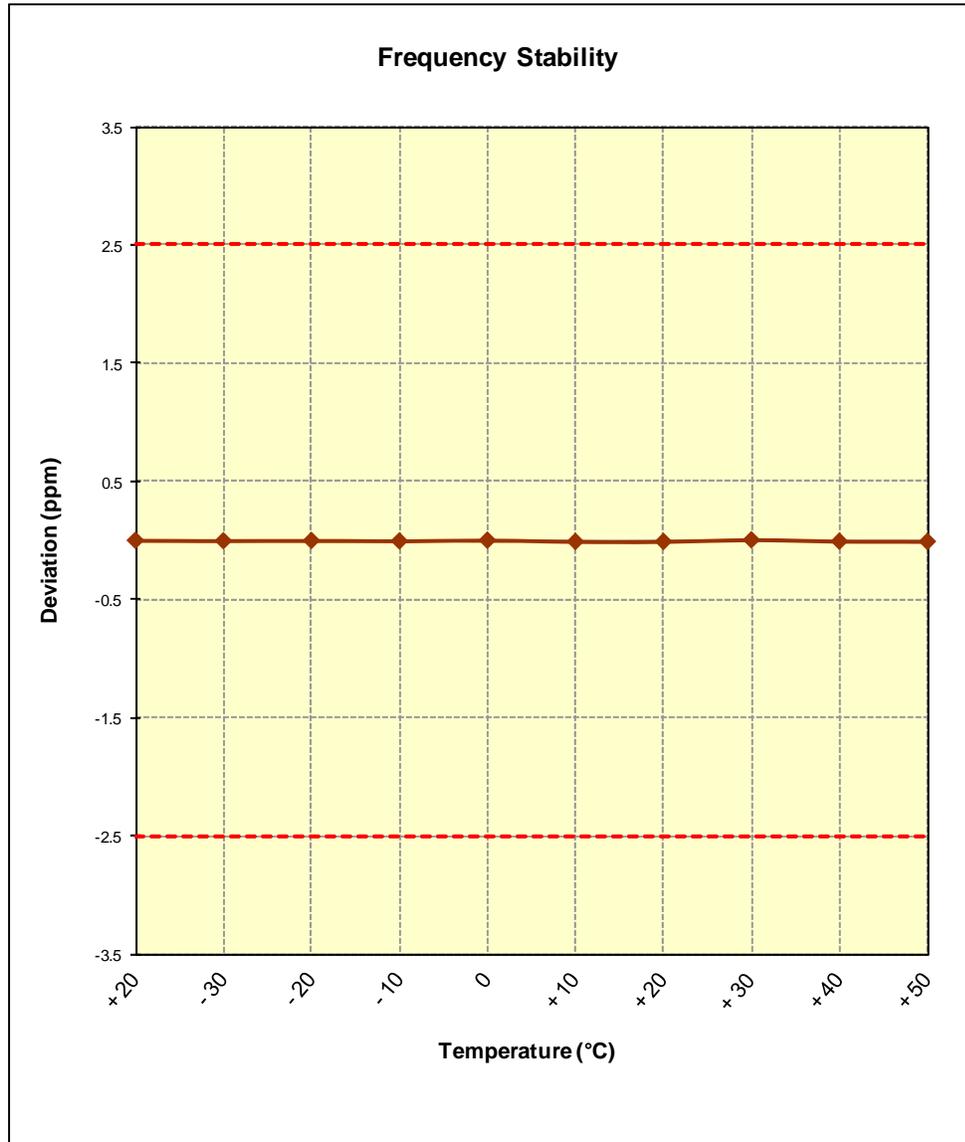

**Figure 6-1. Frequency Stability Graph (Cellular GSM Mode – Ch. 190)**

FCC ID: PY7PM-0410	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	 <b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 32 of 72	

## 6.11 Cellular WCDMA Frequency Stability Measurements

§2.1055 §22.355 RSS-132(4.3)

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 4183

REFERENCE VOLTAGE: 3.8 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,600,003	3	0.0000004
100 %		- 30	836,599,999	-1	-0.0000001
100 %		- 20	836,599,991	-9	-0.0000011
100 %		- 10	836,600,002	2	0.0000002
100 %		0	836,599,993	-7	-0.0000008
100 %		+ 10	836,599,997	-3	-0.0000004
100 %		+ 20	836,599,997	-3	-0.0000004
100 %		+ 30	836,599,997	-3	-0.0000004
100 %		+ 40	836,599,993	-7	-0.0000008
100 %		+ 50	836,599,992	-8	-0.0000010
115 %	4.37	+ 20	836,599,995	-5	-0.0000006
BATT. ENDPOINT	3.20	+ 20	836,600,002	2	0.0000002

**Table 6-21. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)**

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 33 of 72	

**Cellular WCDMA Frequency Stability Measurements (Cont'd)**  
§2.1055 §22.355 RSS-132(4.3)

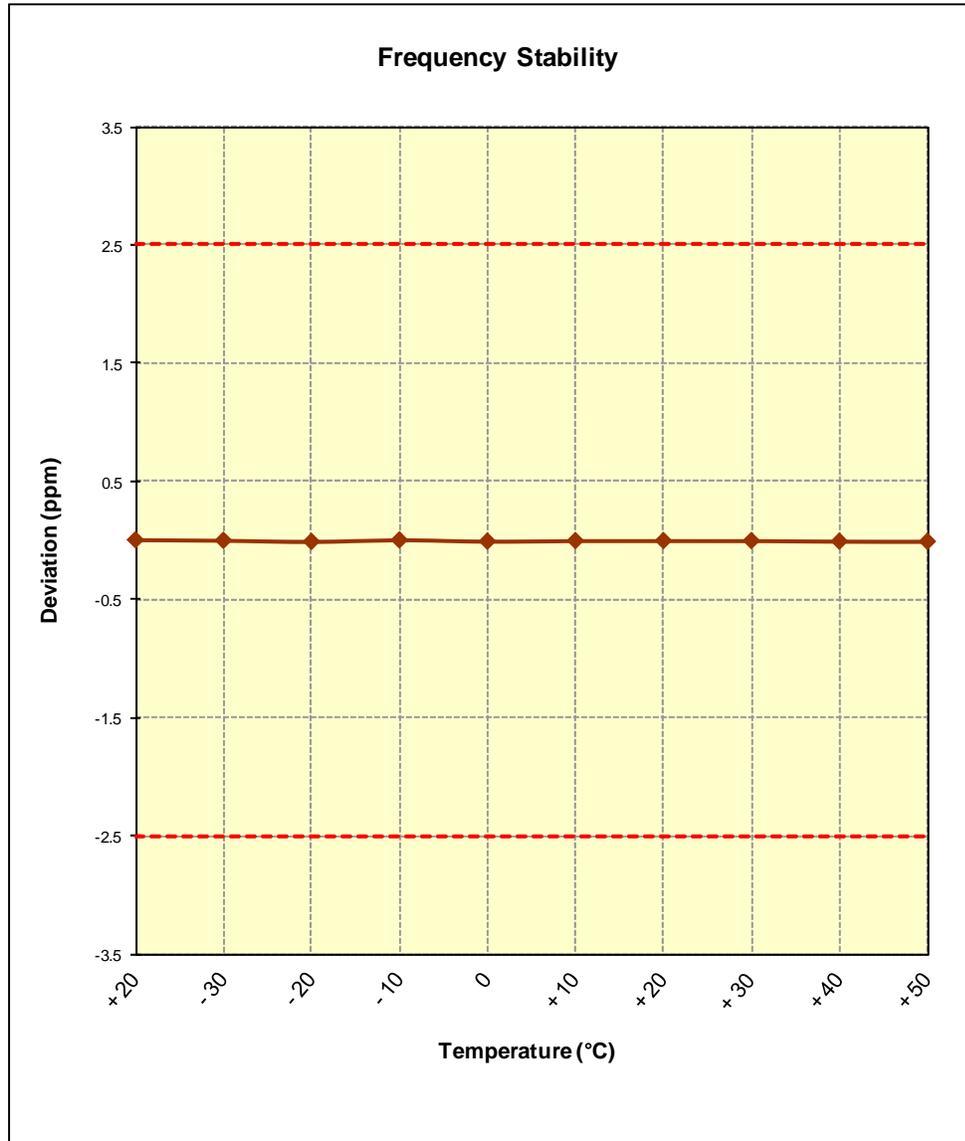


Figure 6-2. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: PY7PM-0410	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	 SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 34 of 72	

## 6.12 AWS WCDMA Frequency Stability Measurements

§2.1055 §27.54 RSS-139(6.3)

OPERATING FREQUENCY: 1,732,500,000 Hz

CHANNEL: 1412

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,499,994	-6	-0.0000003
100 %		- 30	1,732,500,001	1	0.0000001
100 %		- 20	1,732,499,998	-2	-0.0000001
100 %		- 10	1,732,500,001	1	0.0000001
100 %		0	1,732,499,998	-2	-0.0000001
100 %		+ 10	1,732,500,003	3	0.0000002
100 %		+ 20	1,732,499,991	-9	-0.0000005
100 %		+ 30	1,732,499,989	-11	-0.0000006
100 %		+ 40	1,732,499,994	-6	-0.0000003
100 %		+ 50	1,732,499,987	-13	-0.0000008
115 %		4.37	+ 20	1,732,499,986	-14
BATT. ENDPOINT	3.20	+ 20	1,732,499,993	-7	-0.0000004


**Table 6-22. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 35 of 72	

**AWS WCDMA Frequency Stability Measurements (Cont'd)**  
**§2.1055 §27.54 RSS-139(6.3)**

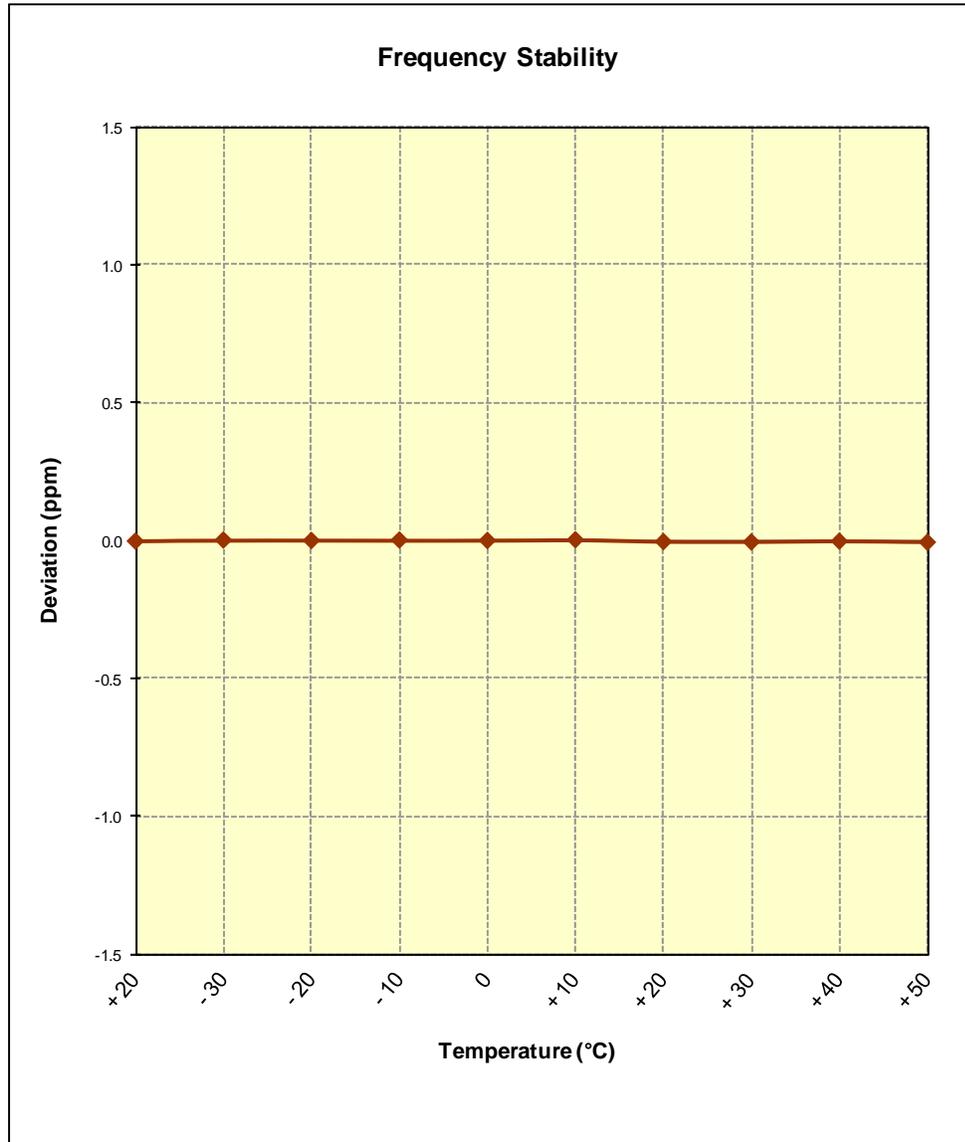

**Figure 6-3. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)**

<b>FCC ID:</b> PY7PM-0410		<b>FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1306100974.PY7	<b>Test Dates:</b> 6/12 - 7/1/2013	<b>EUT Type:</b> Portable Handset	Page 36 of 72	

### 6.13 PCS GSM Frequency Stability Measurements

§2.1055 §24.235 RSS-139(6.3)

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 661

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,880,000,004	4	0.0000002
100 %		- 30	1,879,999,988	-12	-0.0000006
100 %		- 20	1,879,999,988	-12	-0.0000006
100 %		- 10	1,879,999,989	-11	-0.0000006
100 %		0	1,880,000,004	4	0.0000002
100 %		+ 10	1,879,999,998	-2	-0.0000001
100 %		+ 20	1,879,999,985	-15	-0.0000008
100 %		+ 30	1,879,999,990	-10	-0.0000005
100 %		+ 40	1,879,999,988	-12	-0.0000006
100 %		+ 50	1,879,999,995	-5	-0.0000003
115 %	4.37	+ 20	1,879,999,994	-6	-0.0000003
BATT. ENDPOINT	3.20	+ 20	1,879,999,988	-12	-0.0000006


**Table 6-23. Frequency Stability Data (PCS GSM Mode – Ch. 661)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 37 of 72	

**PCS GSM Frequency Stability Measurements (Cont'd)**  
§2.1055 §24.235 RSS-139(6.3)

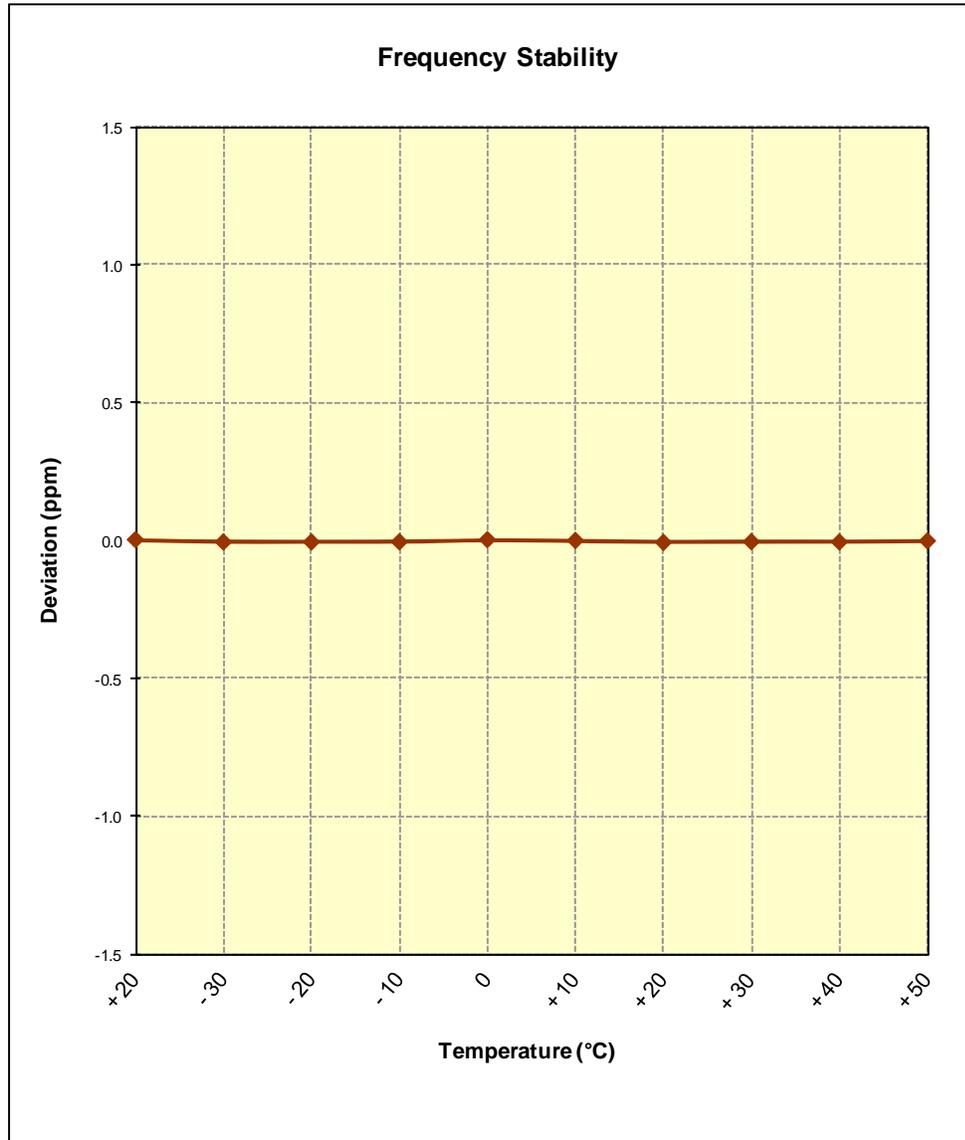

**Figure 6-4. Frequency Stability Graph (PCS GSM Mode – Ch. 661)**

<b>FCC ID:</b> PY7PM-0410		<b>FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1306100974.PY7	<b>Test Dates:</b> 6/12 - 7/1/2013	<b>EUT Type:</b> Portable Handset	Page 38 of 72	

### 6.14 PCS WCDMA Frequency Stability Measurements §2.1055 §24.235 RSS-139(6.3)

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 9400

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (° C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,988	-12	-0.0000006
100 %		- 30	1,879,999,988	-12	-0.0000006
100 %		- 20	1,879,999,999	-1	-0.0000001
100 %		- 10	1,880,000,000	0	0.0000000
100 %		0	1,879,999,997	-3	-0.0000002
100 %		+ 10	1,879,999,993	-7	-0.0000004
100 %		+ 20	1,879,999,985	-15	-0.0000008
100 %		+ 30	1,880,000,003	3	0.0000002
100 %		+ 40	1,879,999,993	-7	-0.0000004
100 %		+ 50	1,879,999,988	-12	-0.0000006
115 %		4.37	+ 20	1,879,999,994	-6
BATT. ENDPOINT	3.20	+ 20	1,880,000,000	0	0.0000000


**Table 6-24. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: PY7PM-0410	 FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 39 of 72


**PCS WCDMA Frequency Stability Measurements (Cont'd)**  
§2.1055 §24.235 RSS-139(6.3)

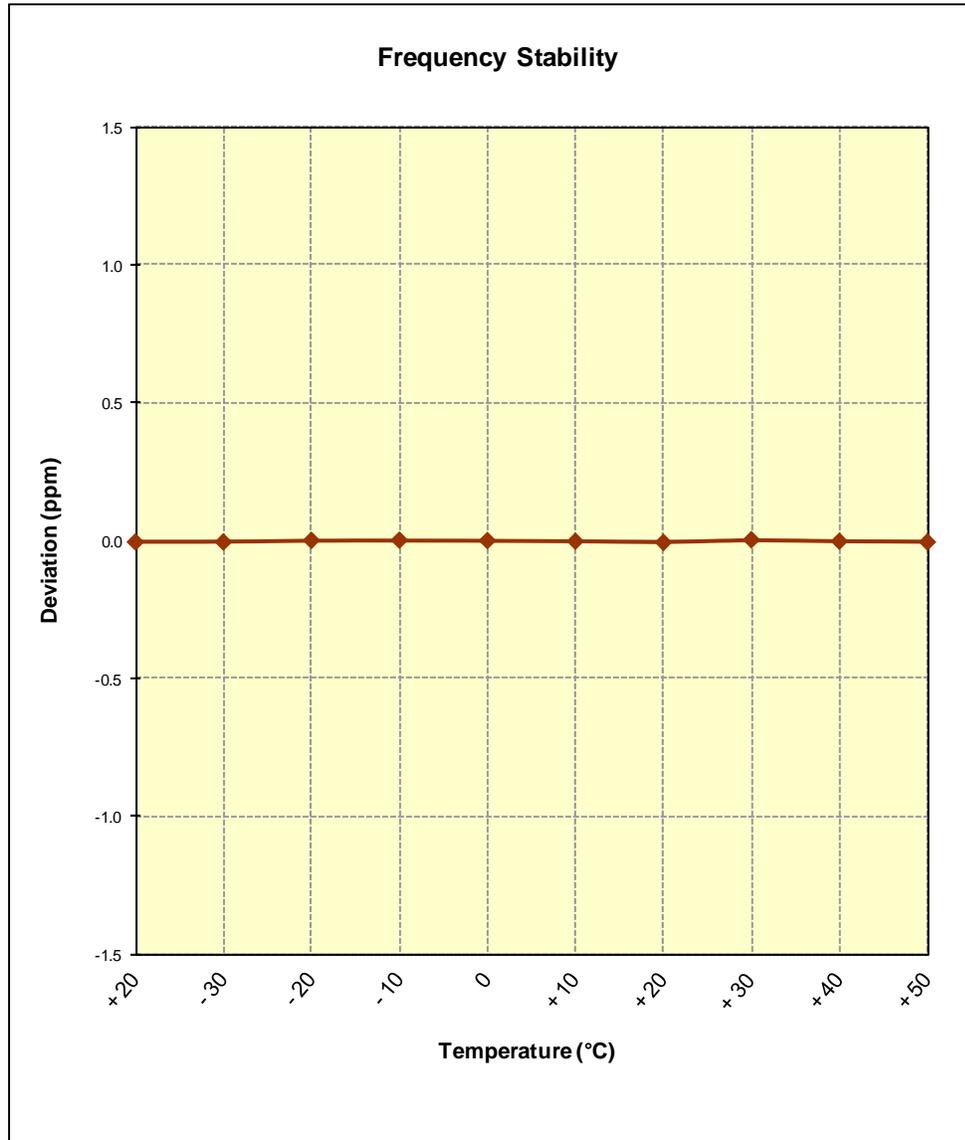


**Figure 6-5. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)**

<b>FCC ID:</b> PY7PM-0410		<b>FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1306100974.PY7	<b>Test Dates:</b> 6/12 - 7/1/2013	<b>EUT Type:</b> Portable Handset	Page 40 of 72	

## 7.0 PLOTS OF EMISSIONS

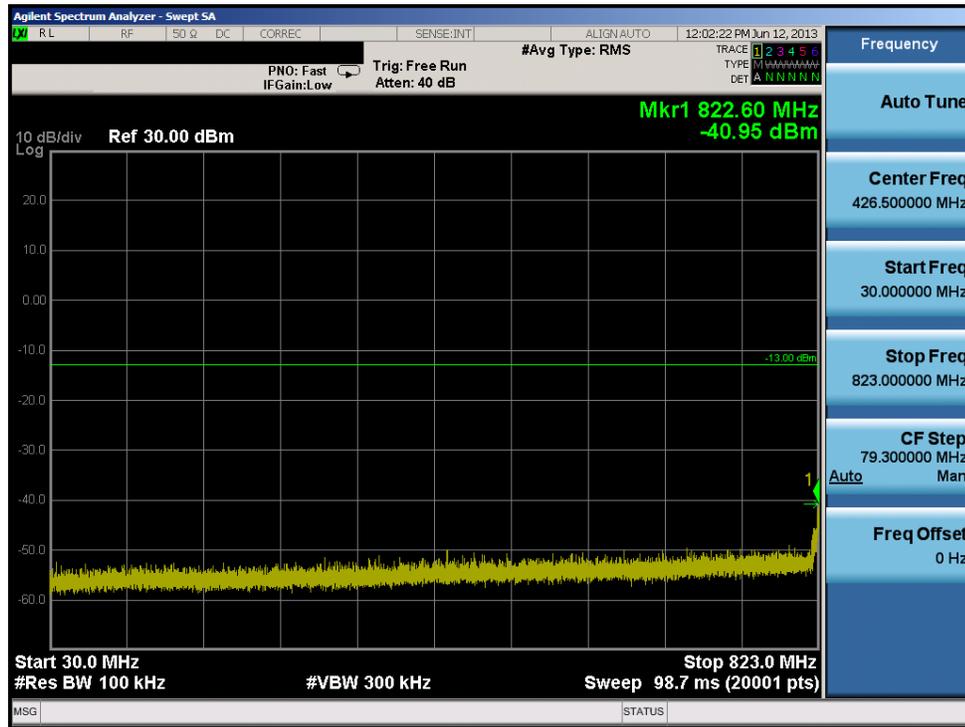


**Plot 7-1. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)**

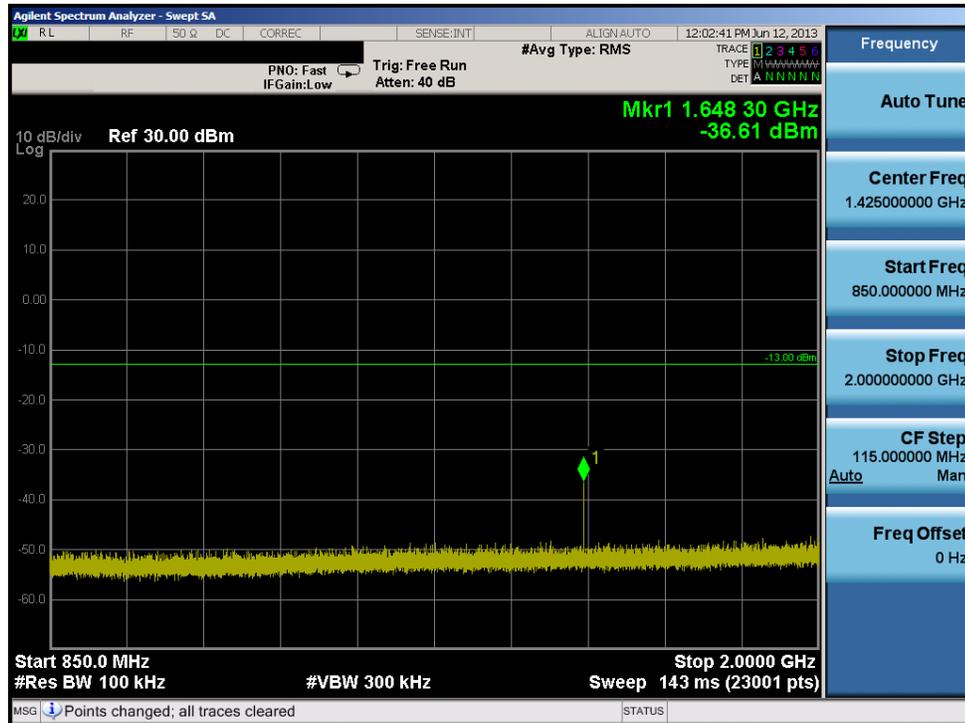


**Plot 7-2. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)**

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 41 of 72

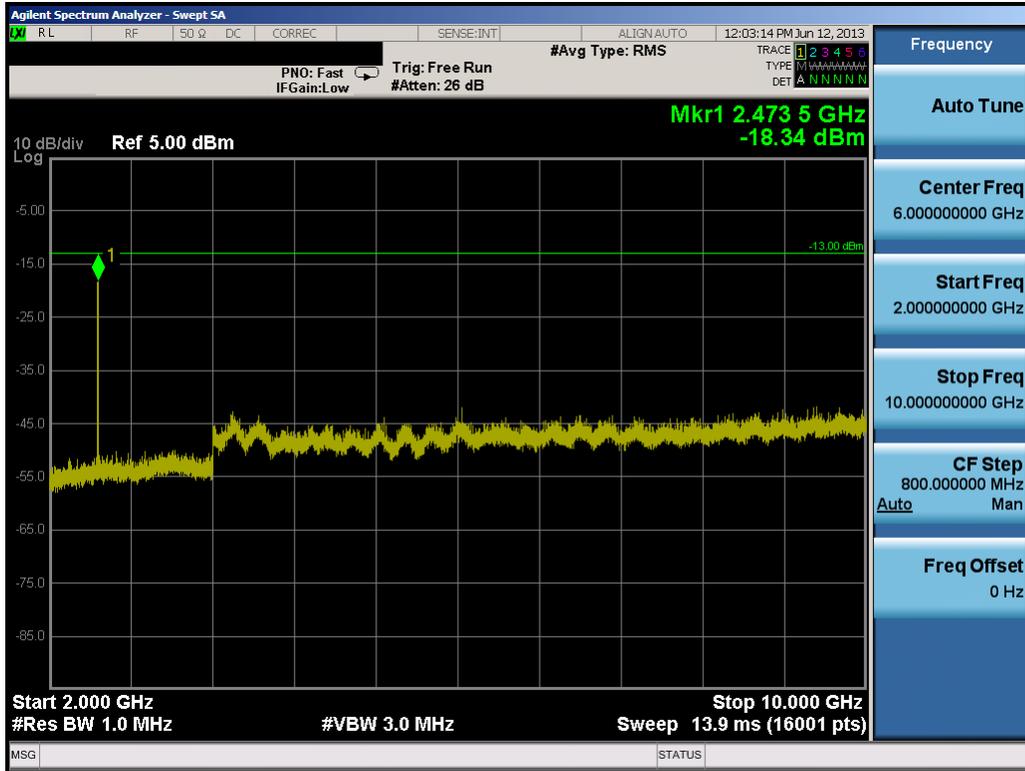


Plot 7-3. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

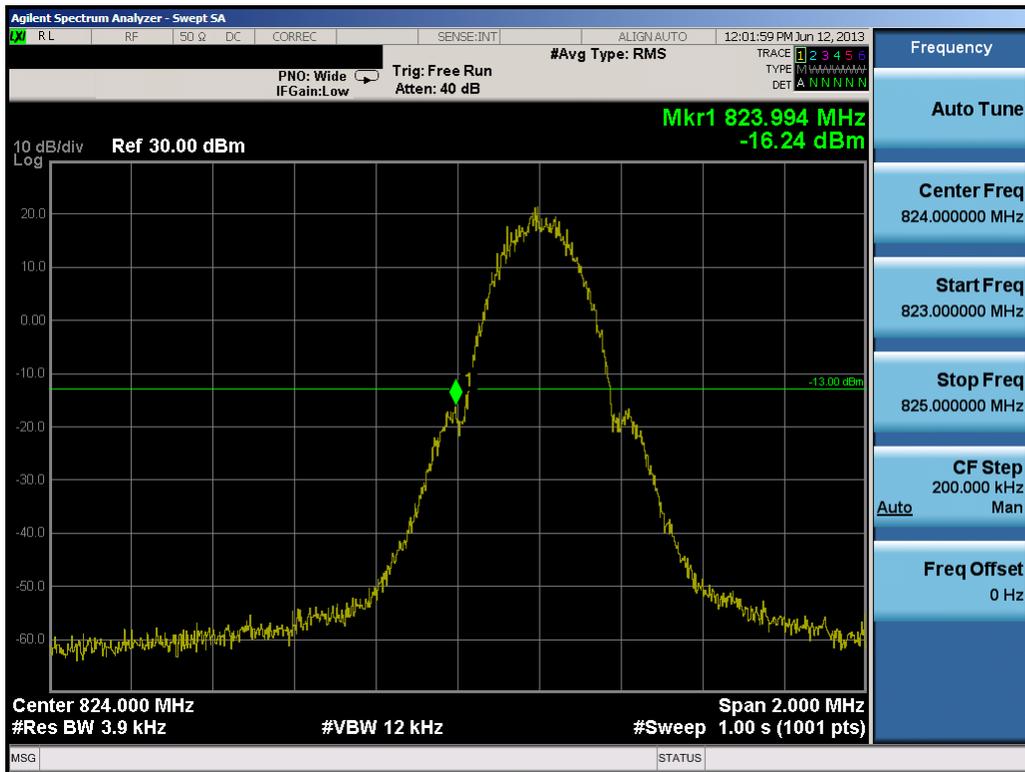


Plot 7-4. Band Edge Plot (Cellular GSM Mode – Ch. 128)

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 42 of 72

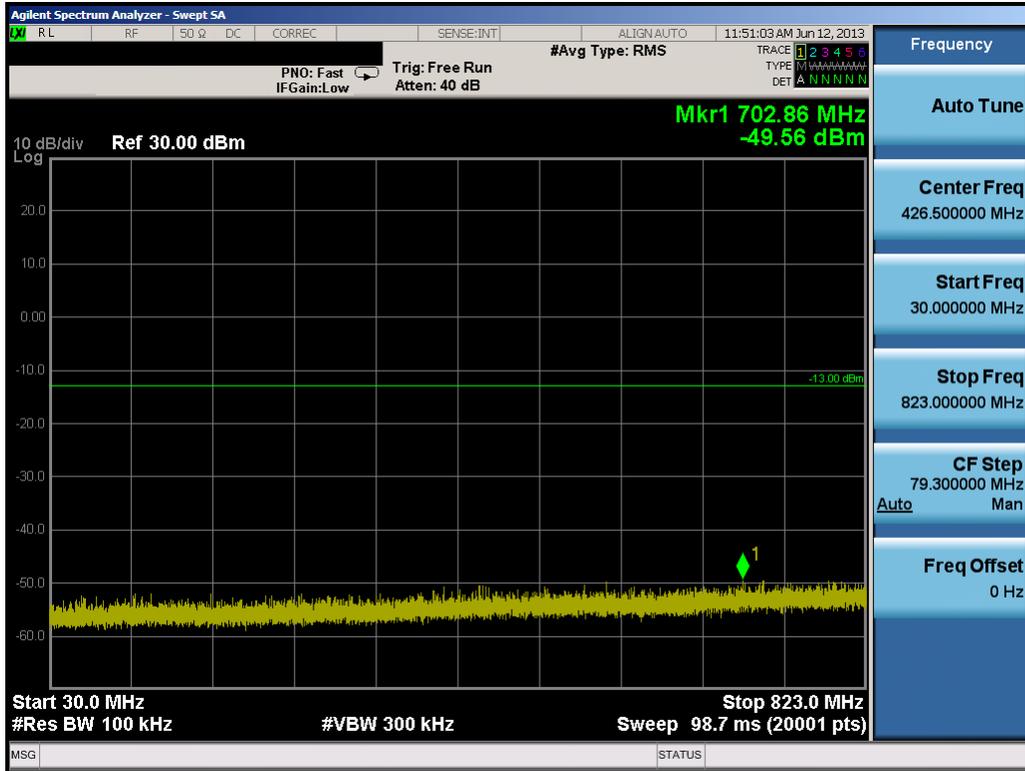


Plot 7-5. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

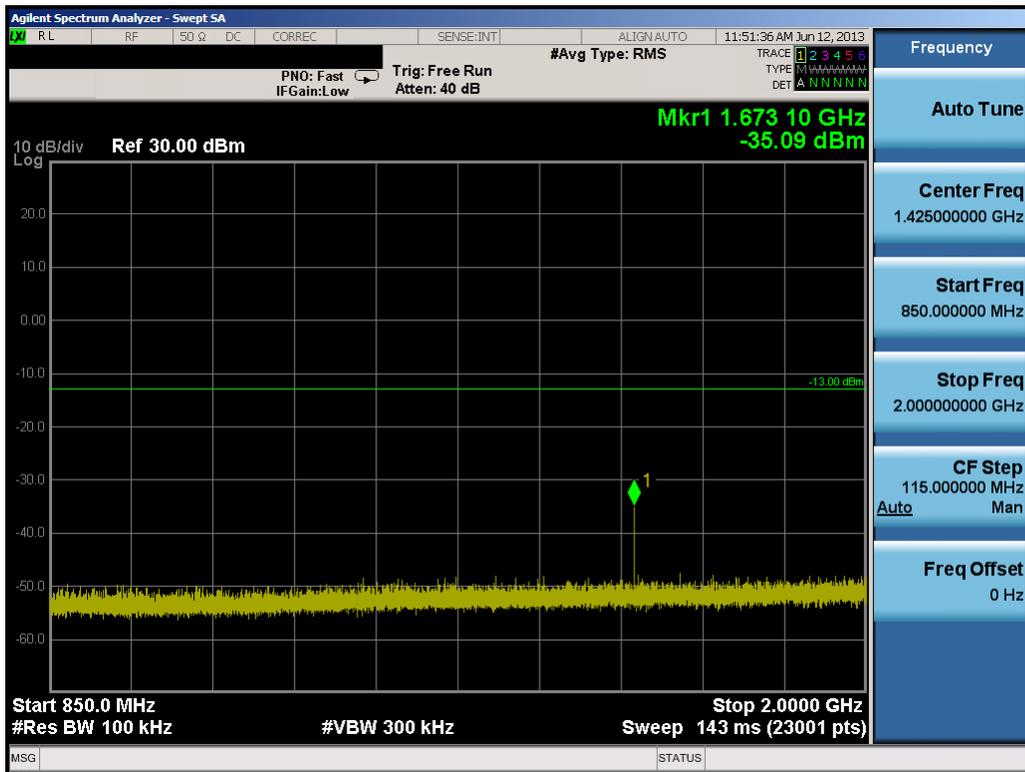


Plot 7-6. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 43 of 72

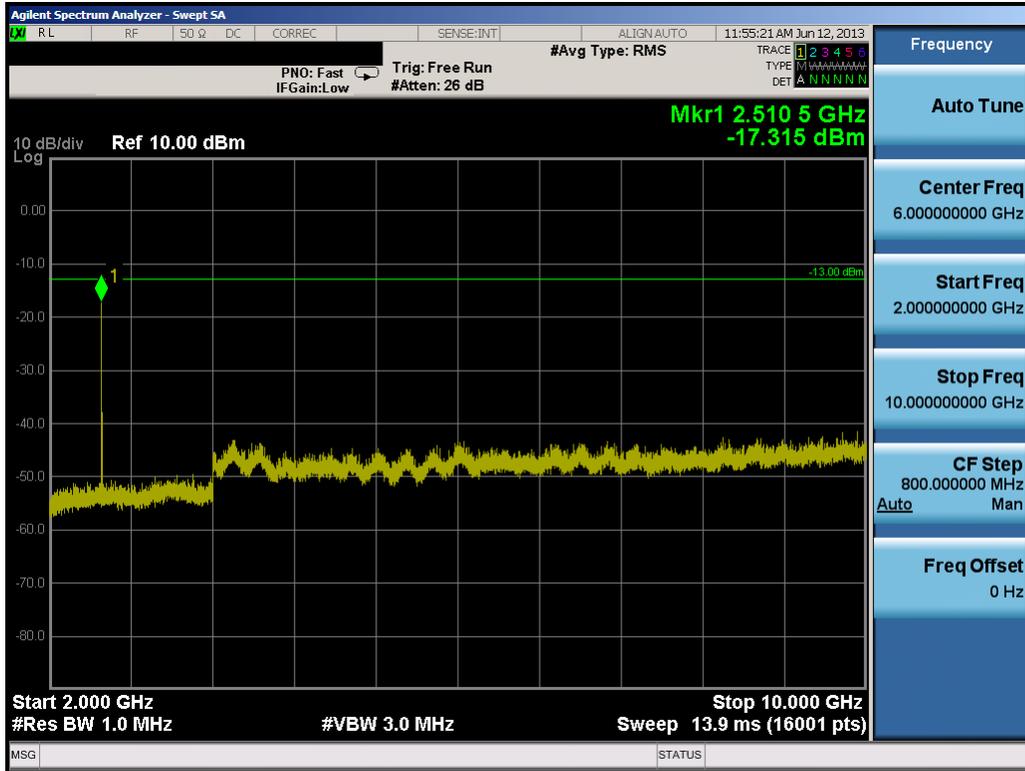


**Plot 7-7. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)**

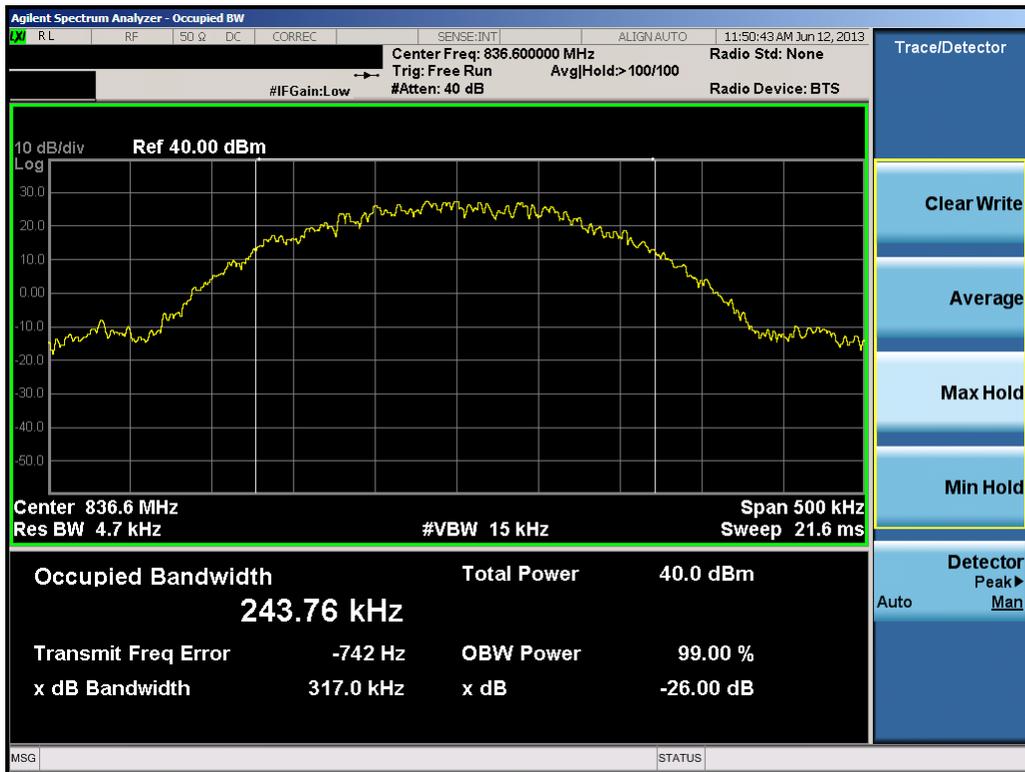


**Plot 7-8. Occupied Bandwidth Plot (Cellular GSM Mode – Ch. 190)**

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 44 of 72

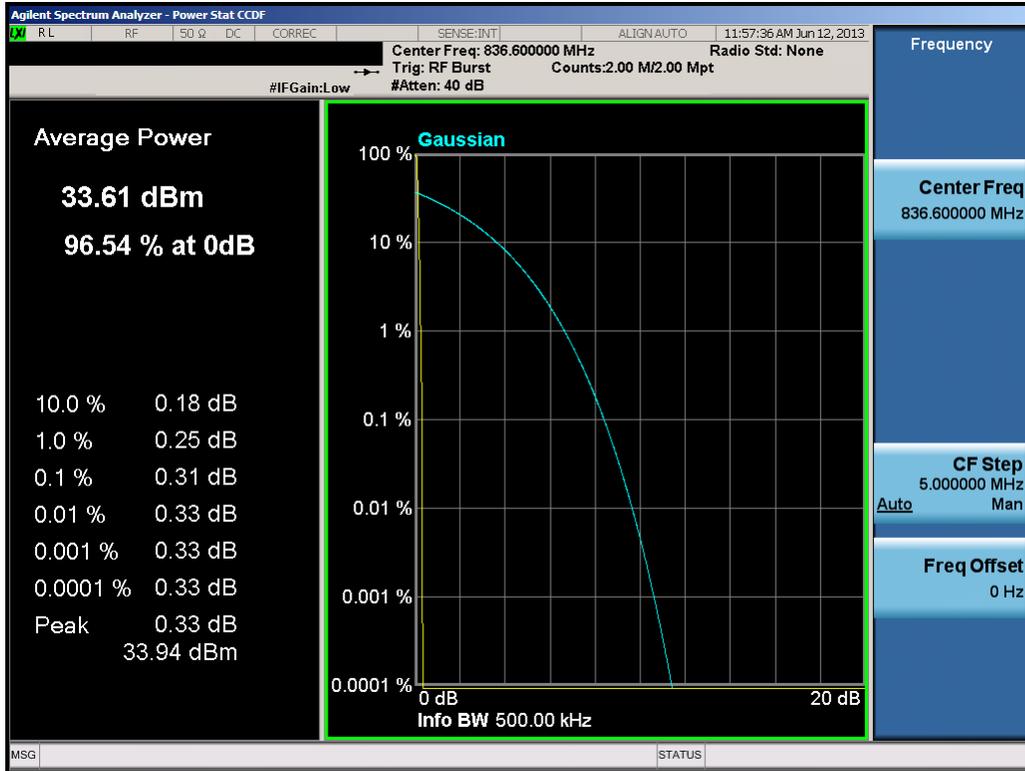


Plot 7-9. Peak-Average Ratio Plot (Cellular GSM Mode – Ch. 190)

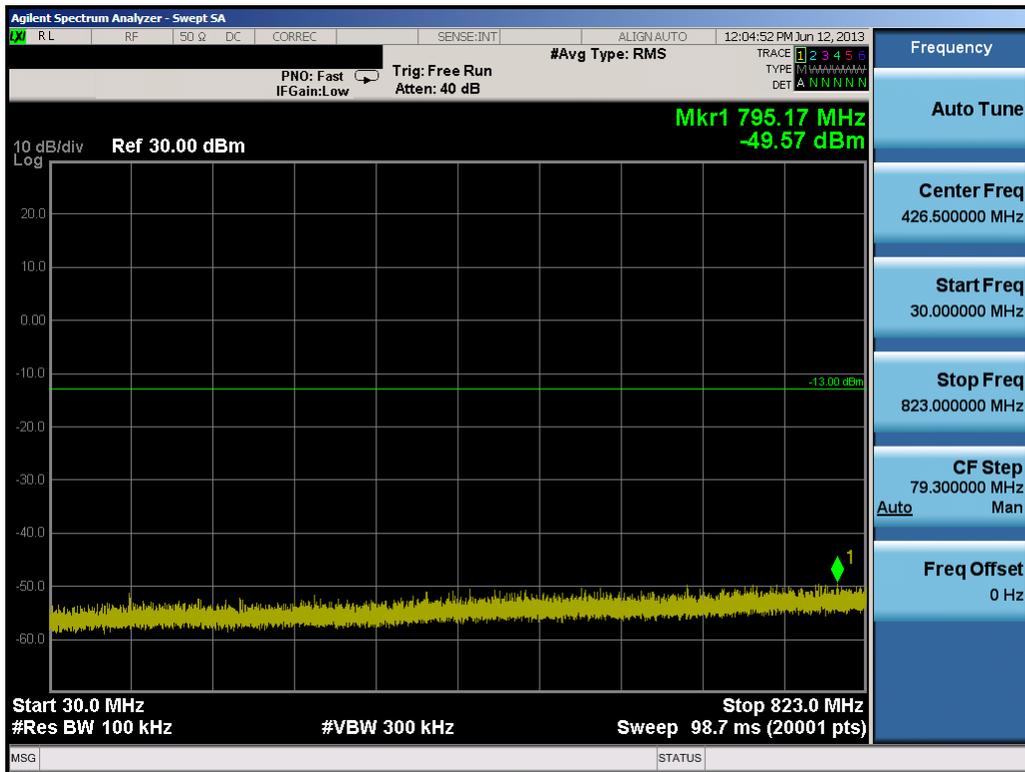


Plot 7-10. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 45 of 72

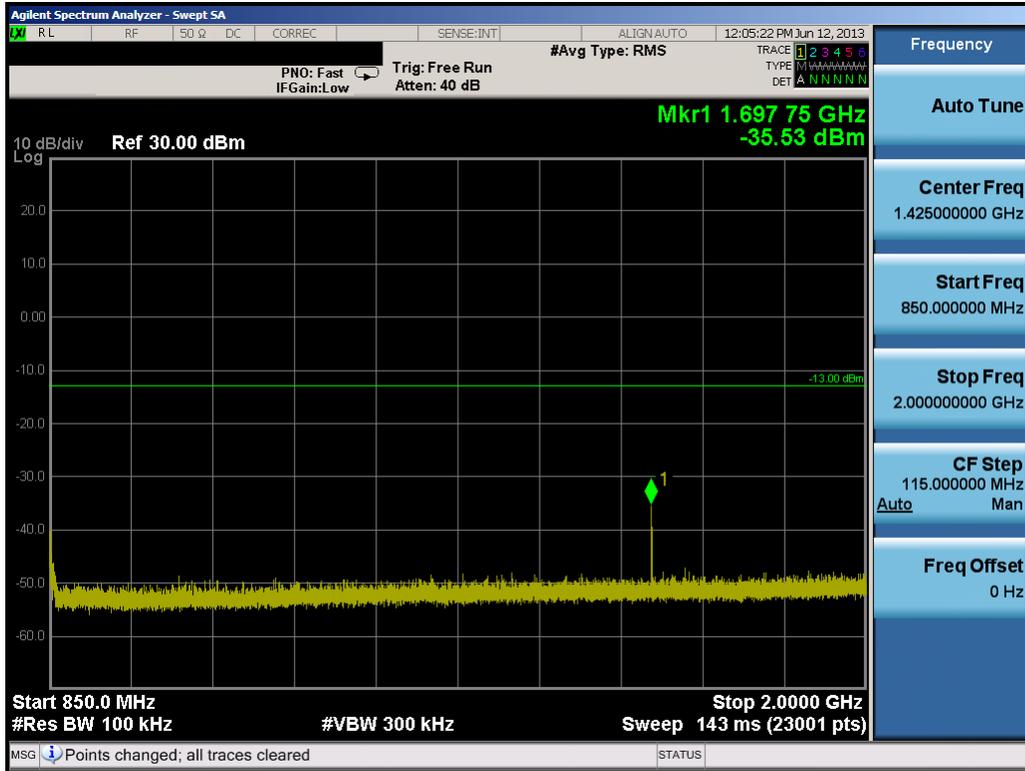


Plot 7-11. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

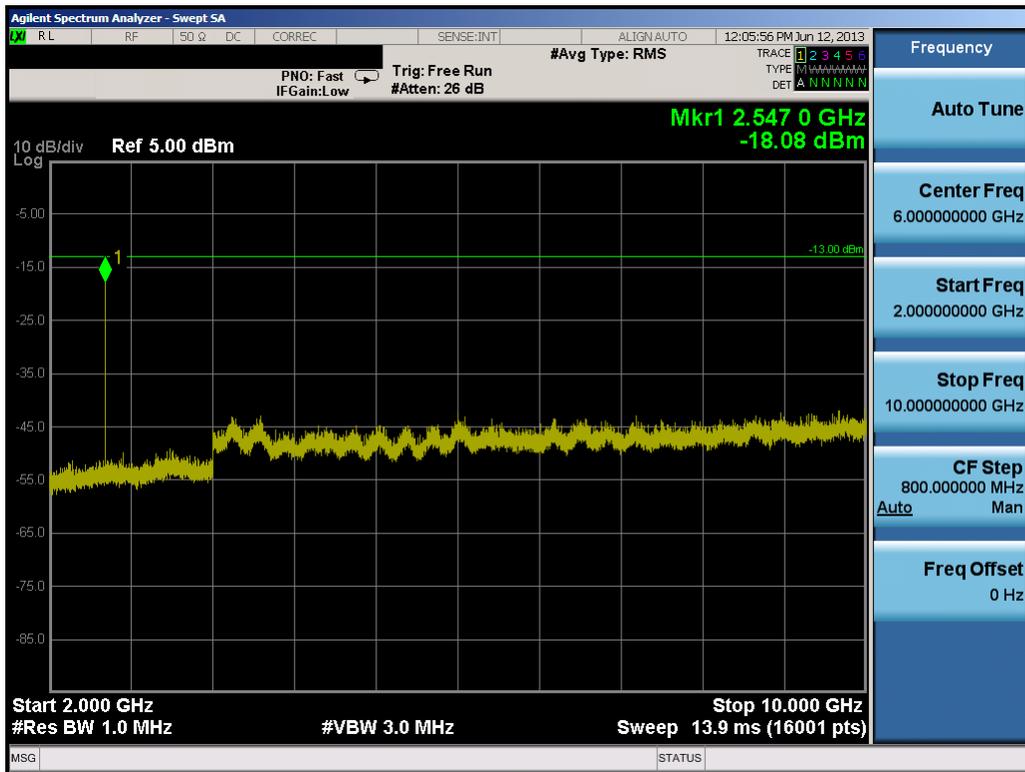

Plot 7-12. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 46 of 72

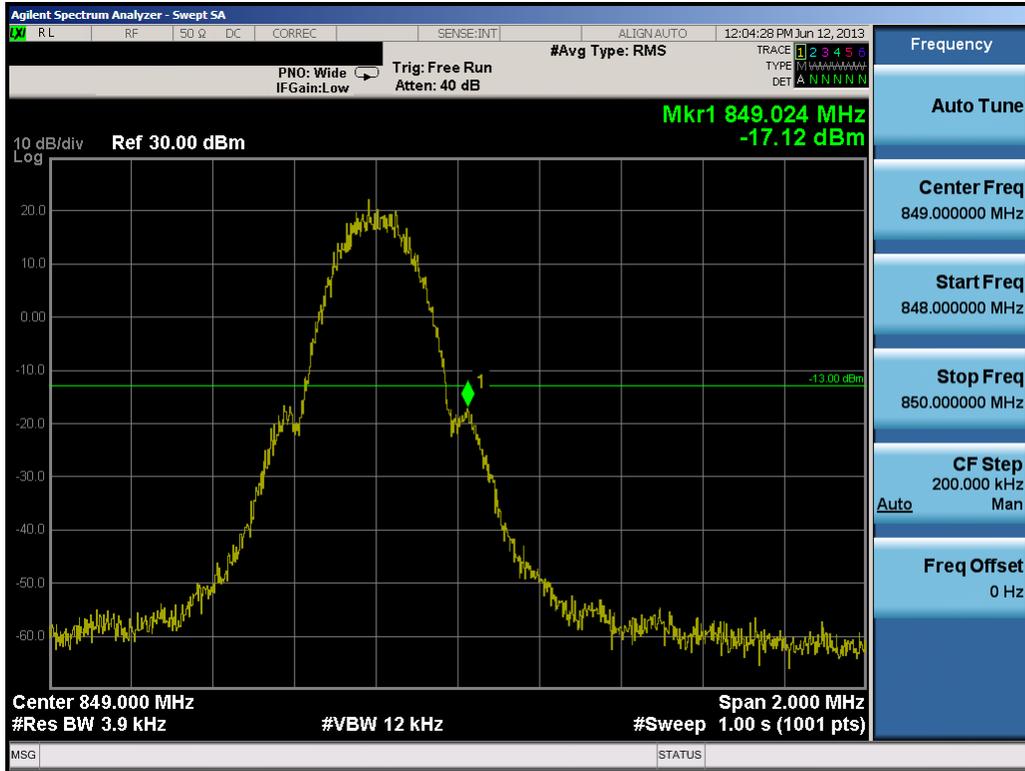


Plot 7-13. Band Edge Plot (Cellular GSM Mode – Ch. 251)




Plot 7-14. Occupied Bandwidth Plot (EDGE850 Mode – Ch. 190)

FCC ID: PY7PM-0410	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 47 of 72

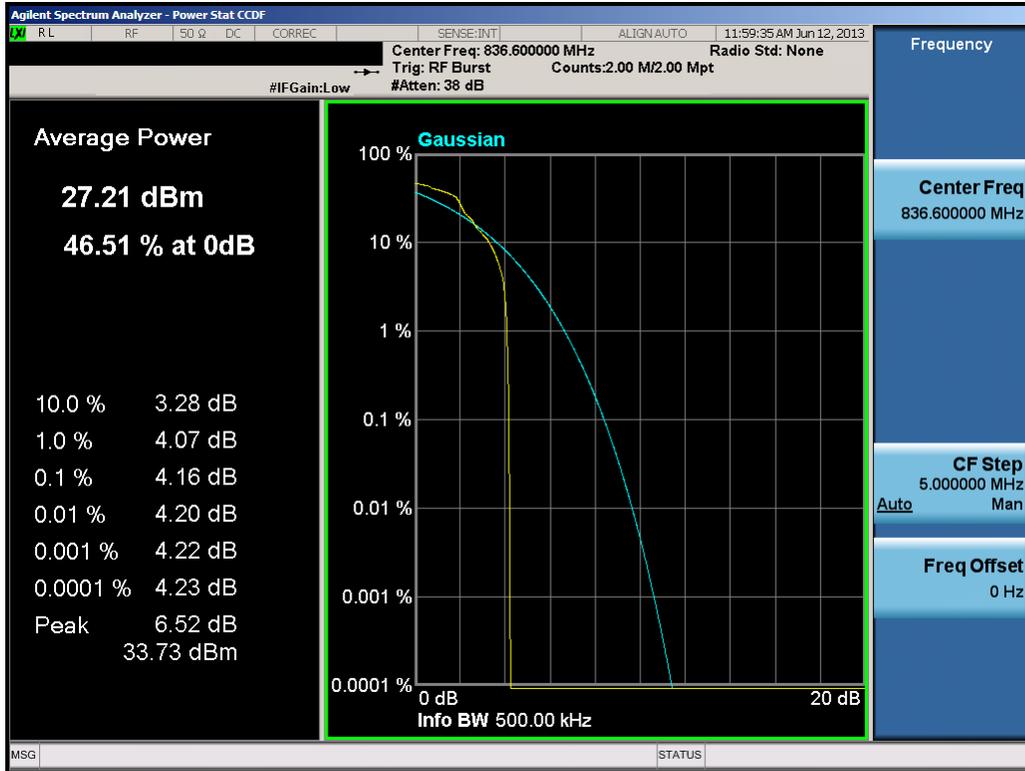


Plot 7-15. Peak-Average Ratio Plot (EDGE850 Mode – Ch. 190)

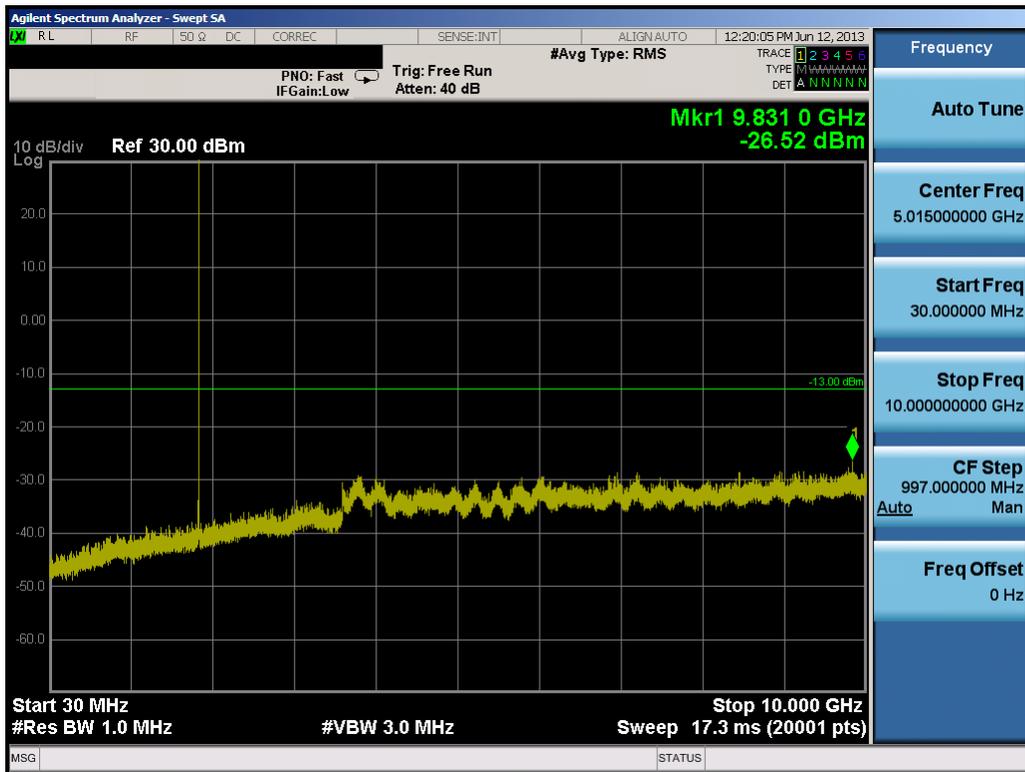


Plot 7-16. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 48 of 72

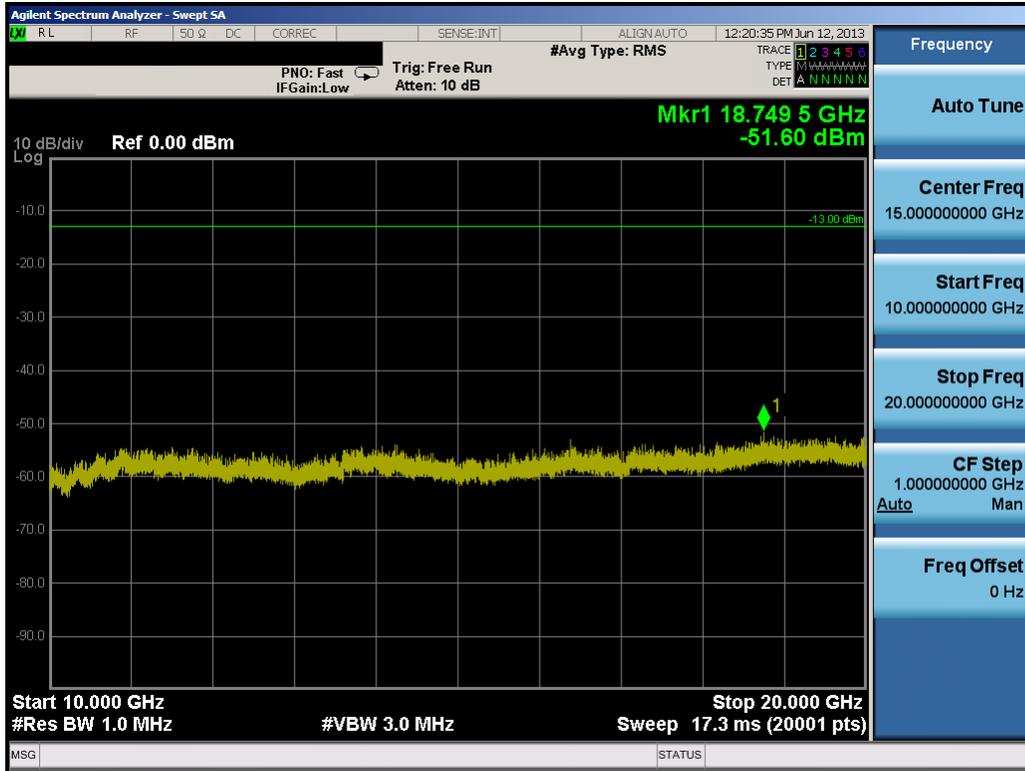


Plot 7-17. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

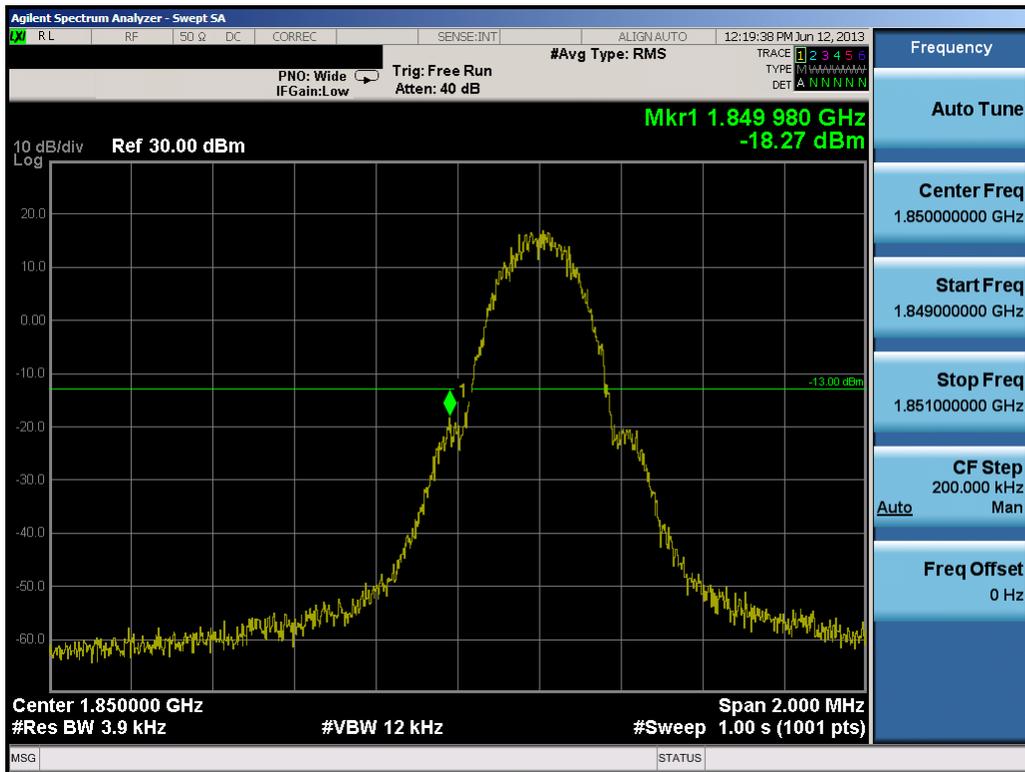


Plot 7-18. Band Edge Plot (PCS GSM Mode – Ch. 512)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 49 of 72

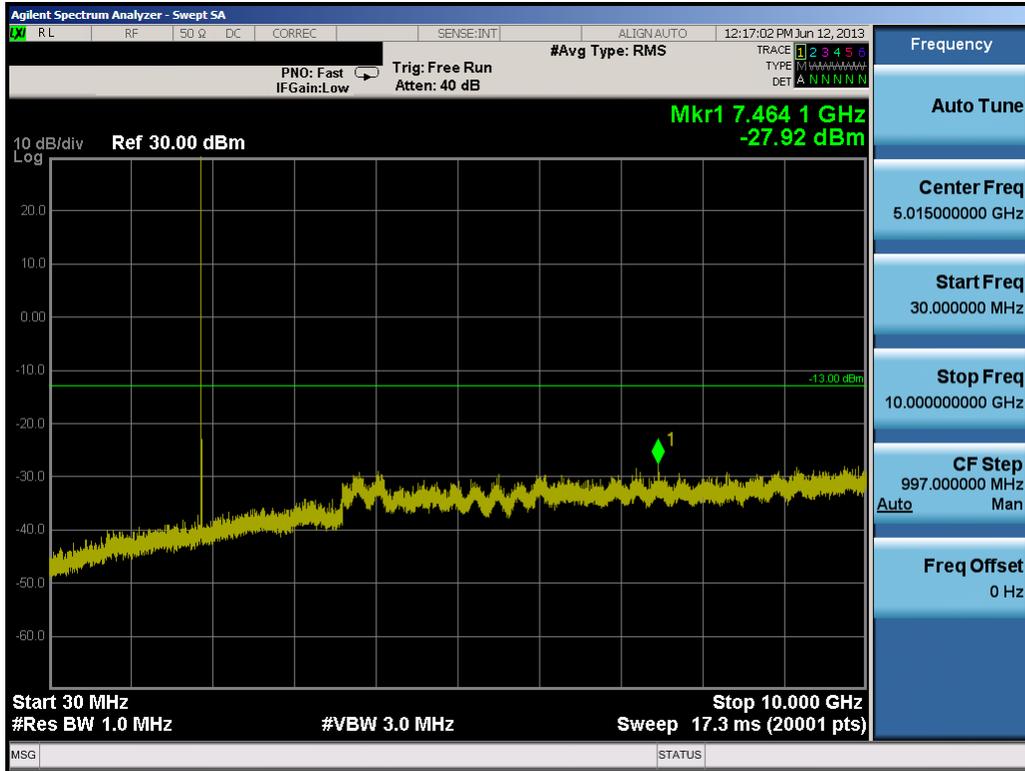

Plot 7-19. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

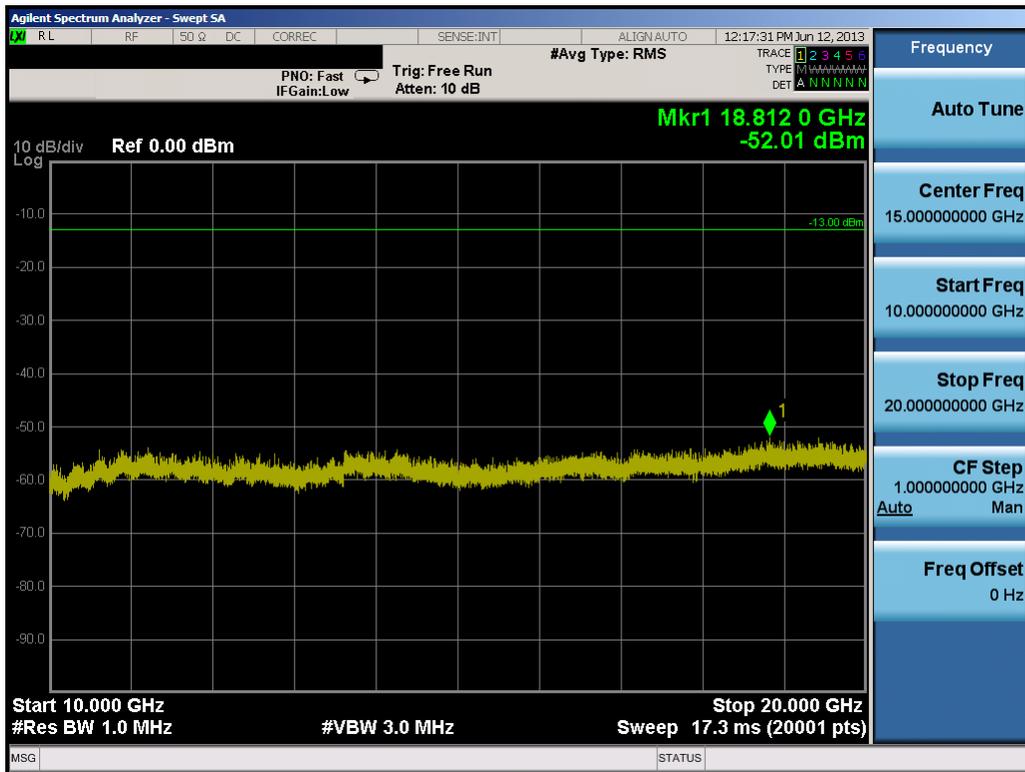


Plot 7-20. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 50 of 72




Plot 7-21. Occupied Bandwidth Plot (PCS GSM Mode – Ch. 661)

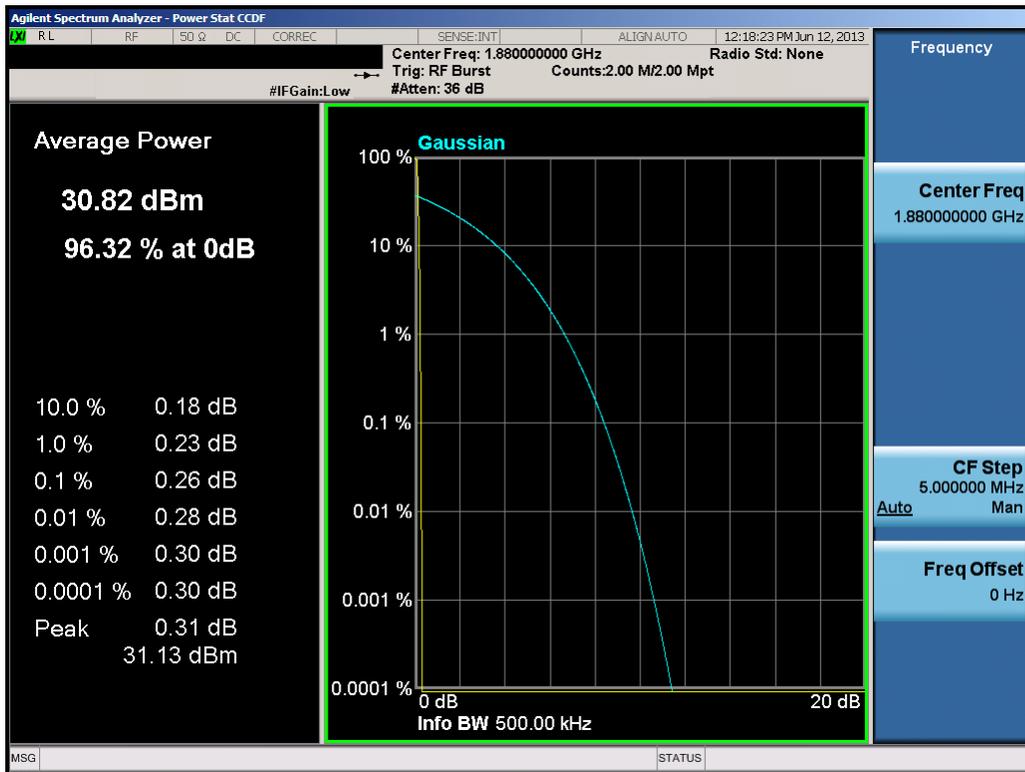


Plot 7-22. Peak-Average Ratio Plot (PCS GSM Mode – Ch. 661)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 51 of 72

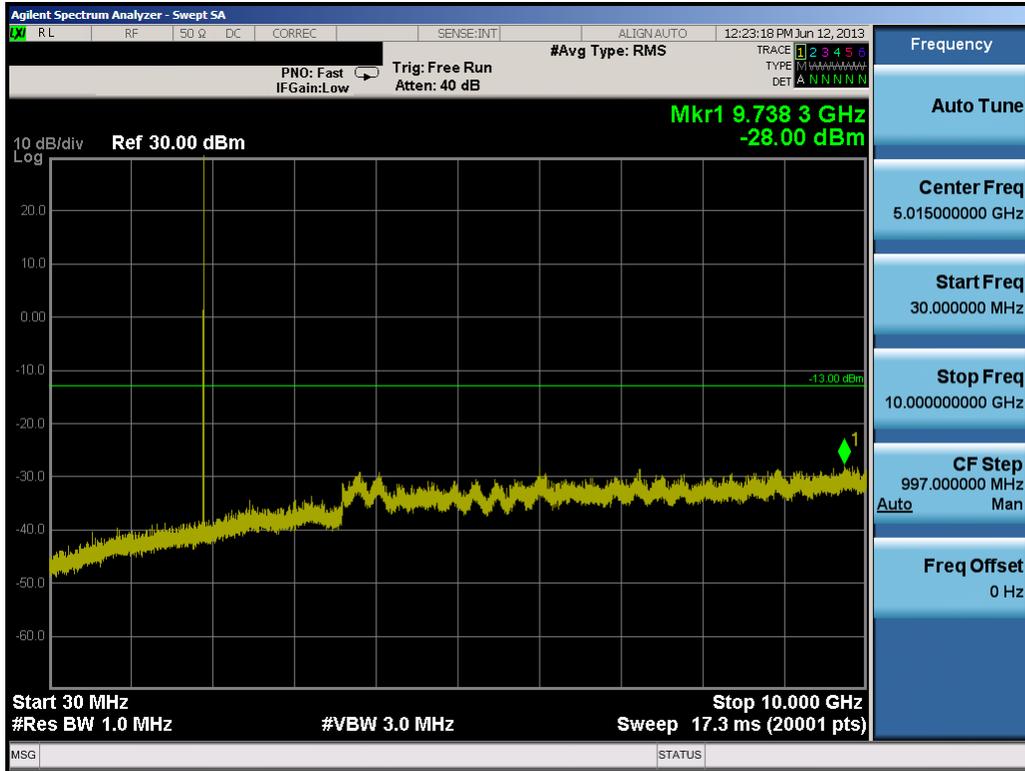


Plot 7-23. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

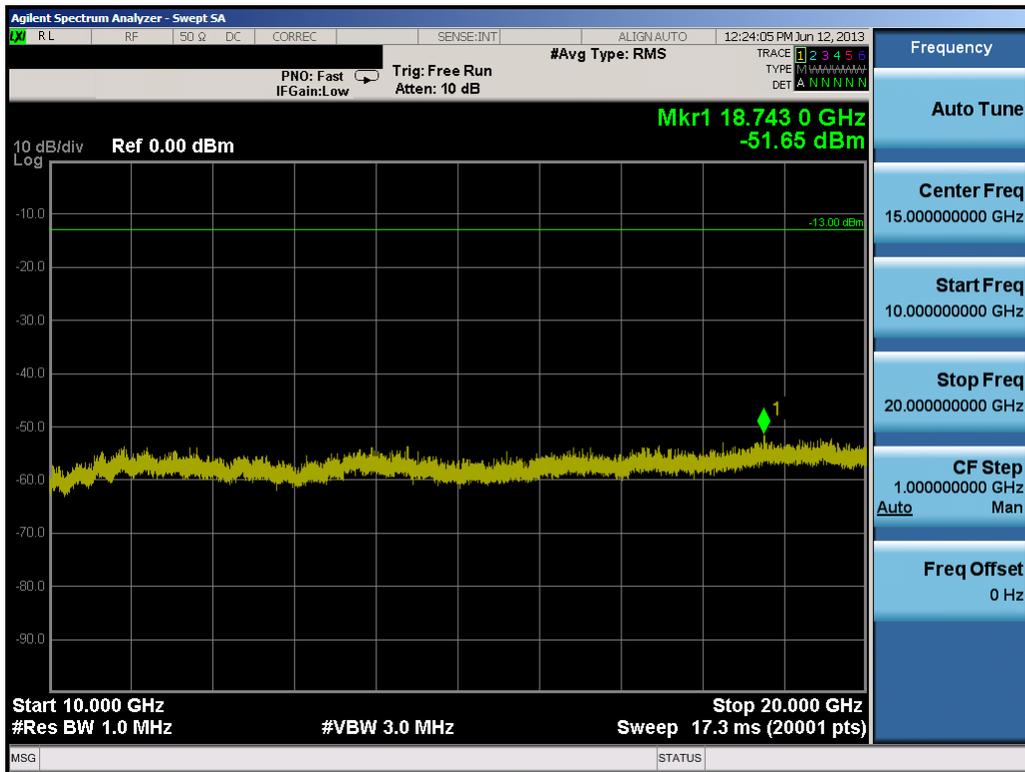

Plot 7-24. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 52 of 72

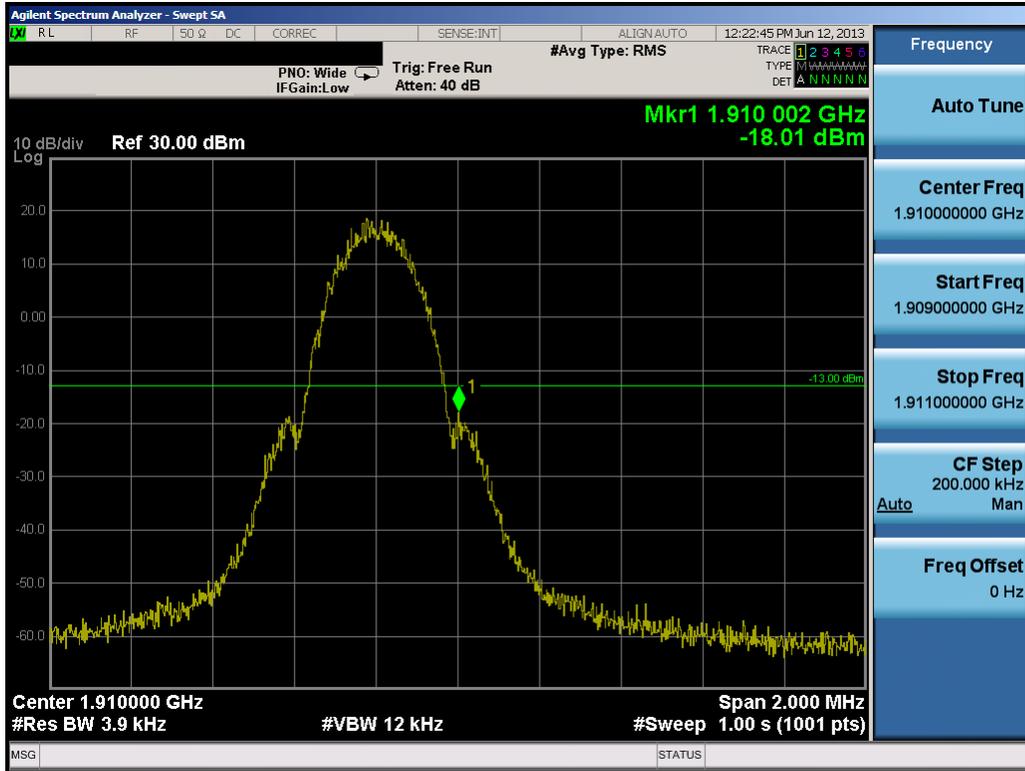


Plot 7-25. Band Edge Plot (PCS GSM Mode – Ch. 810)




Plot 7-26. Occupied Bandwidth Plot (EDGE1900 Mode – Ch. 661)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 53 of 72

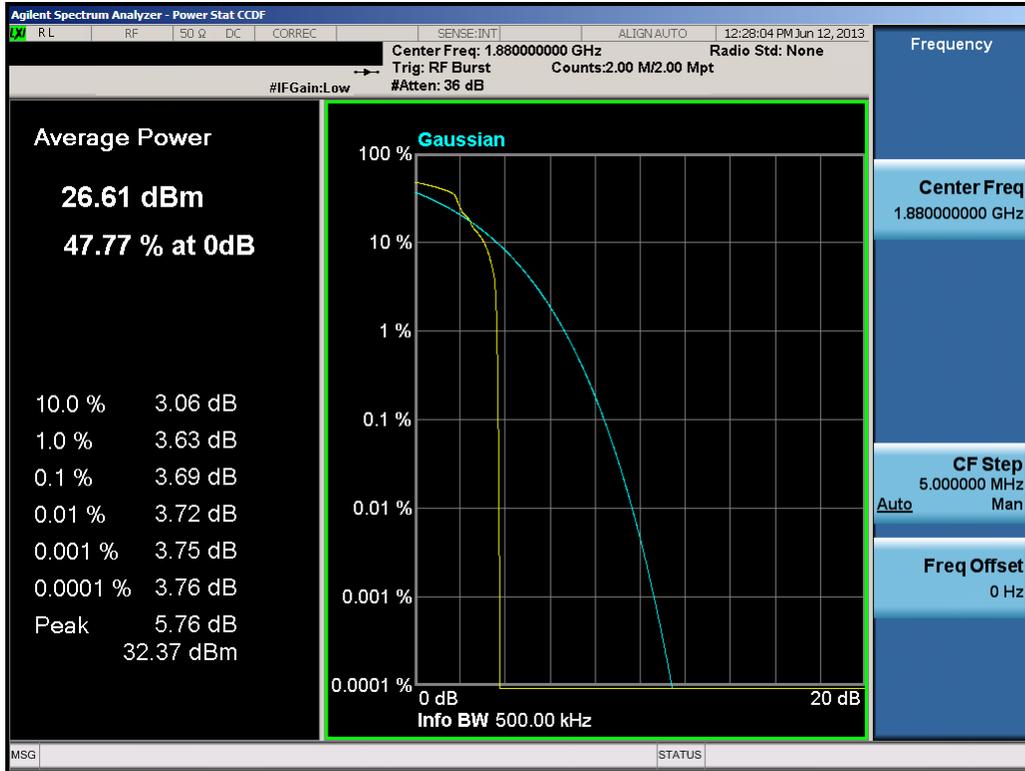


Plot 7-27. Peak-Average Ratio Plot (EDGE1900 Mode – Ch. 661)

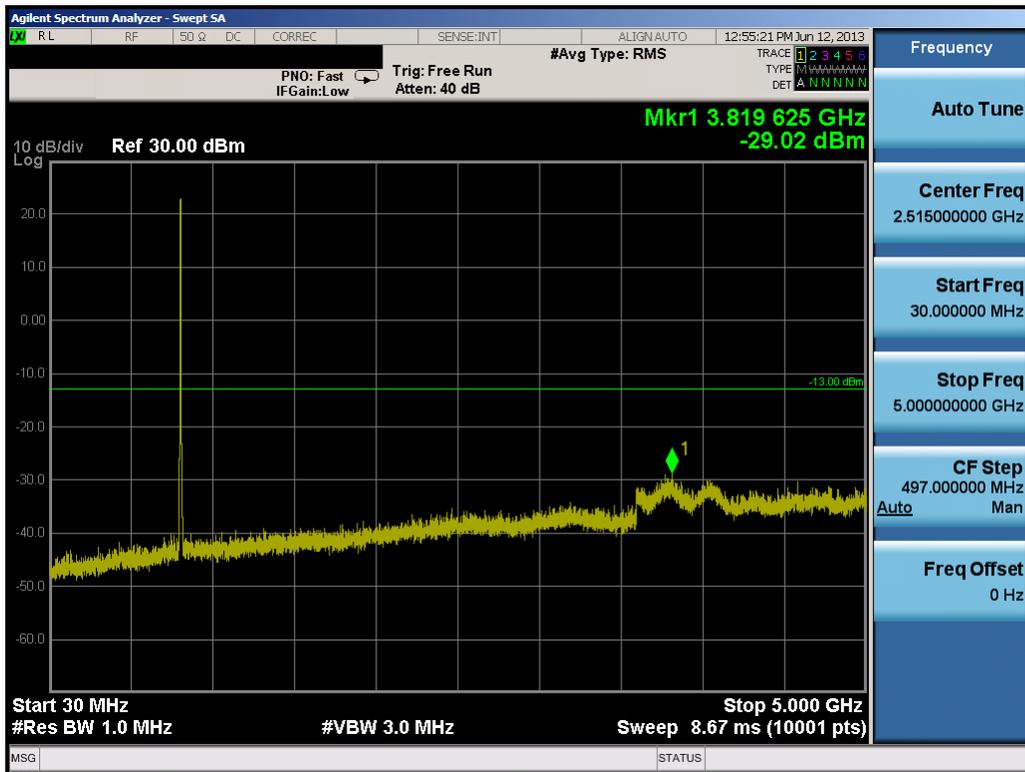


Plot 7-28. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: PY7PM-0410	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 54 of 72



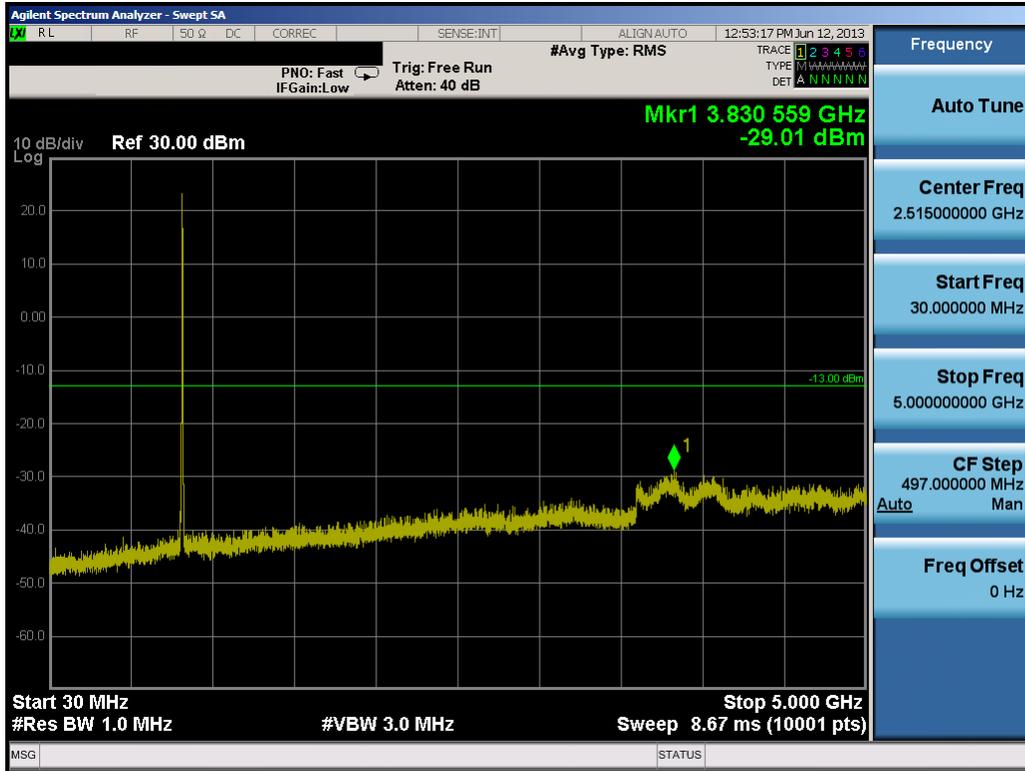


Plot 7-31. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

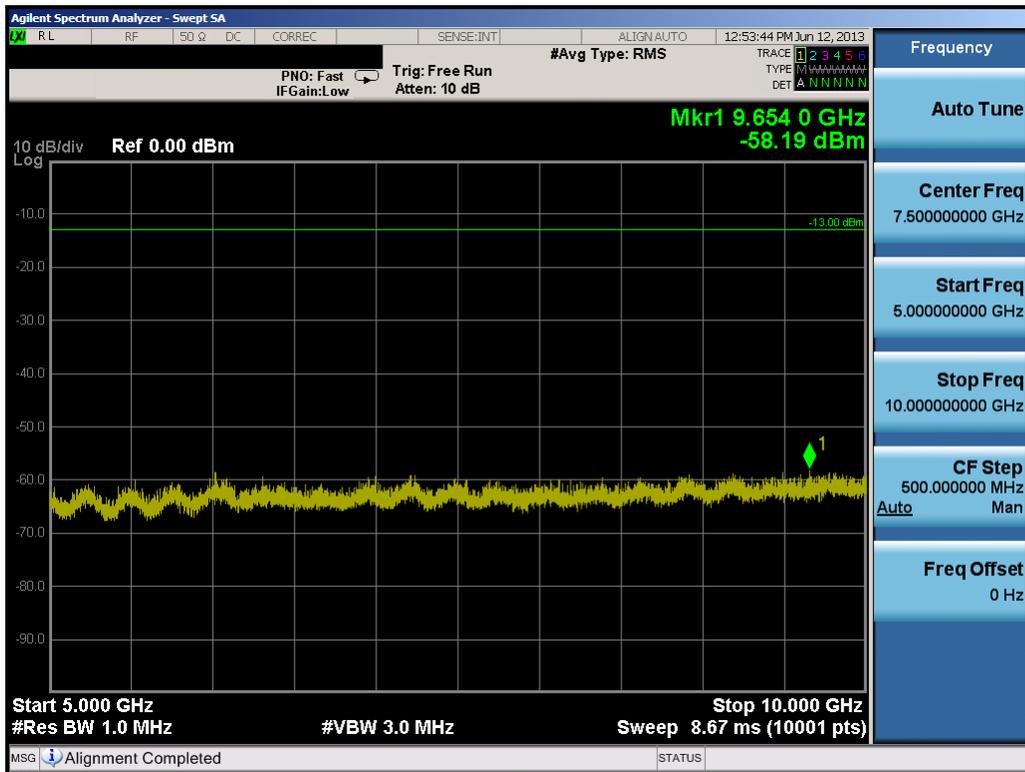


Plot 7-32. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 56 of 72

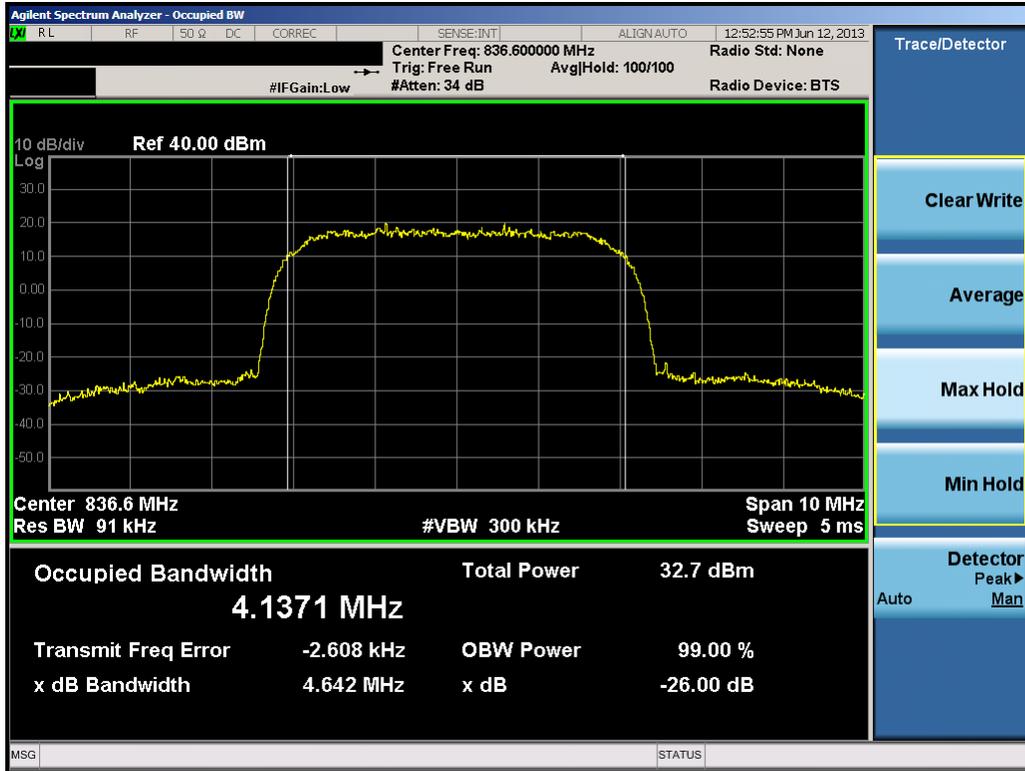


Plot 7-33. Occupied Bandwidth Plot (Cellular WCDMA Mode – Ch. 4183)

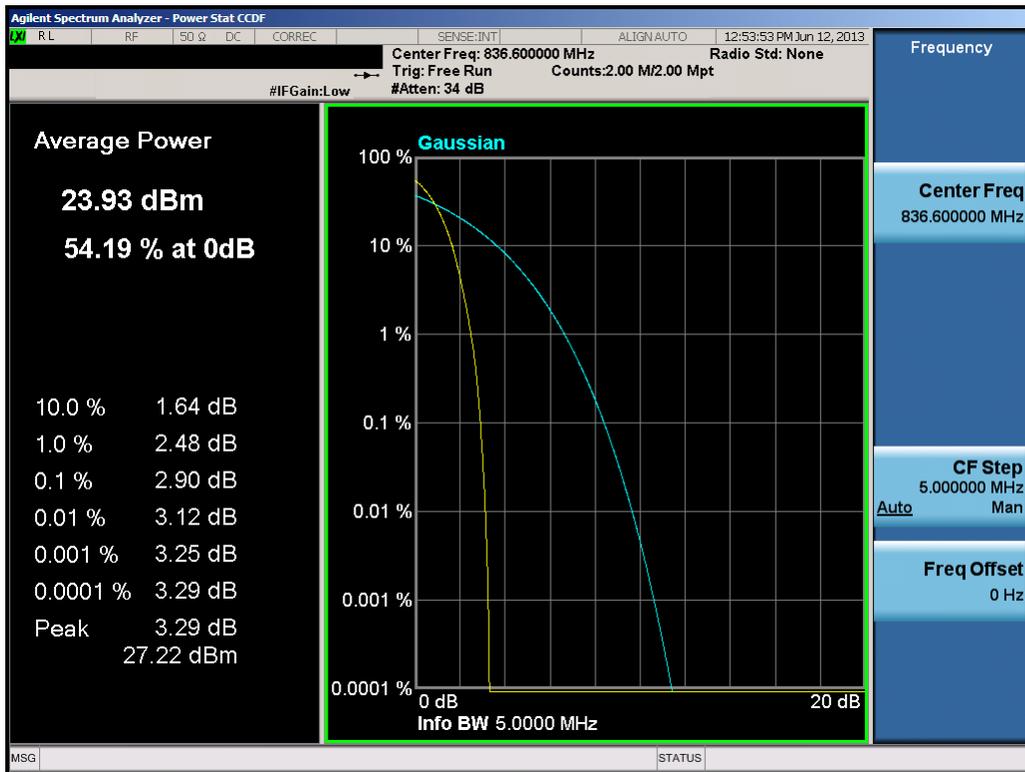


Plot 7-34. Peak-Average Ratio Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 57 of 72

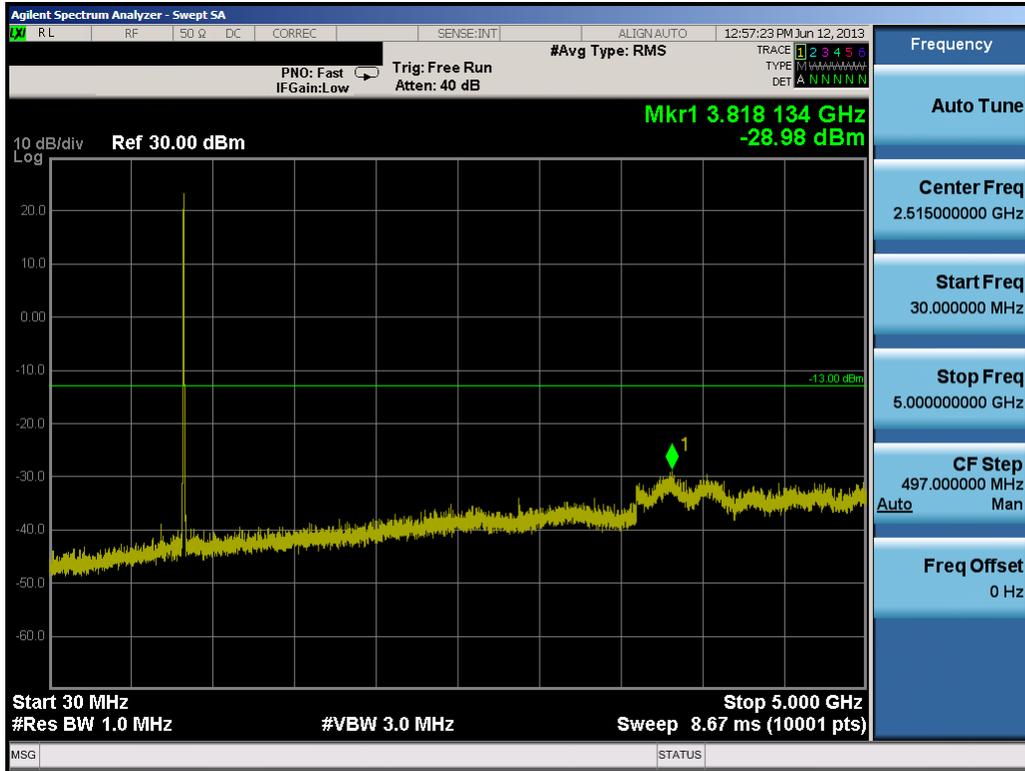

Plot 7-35. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

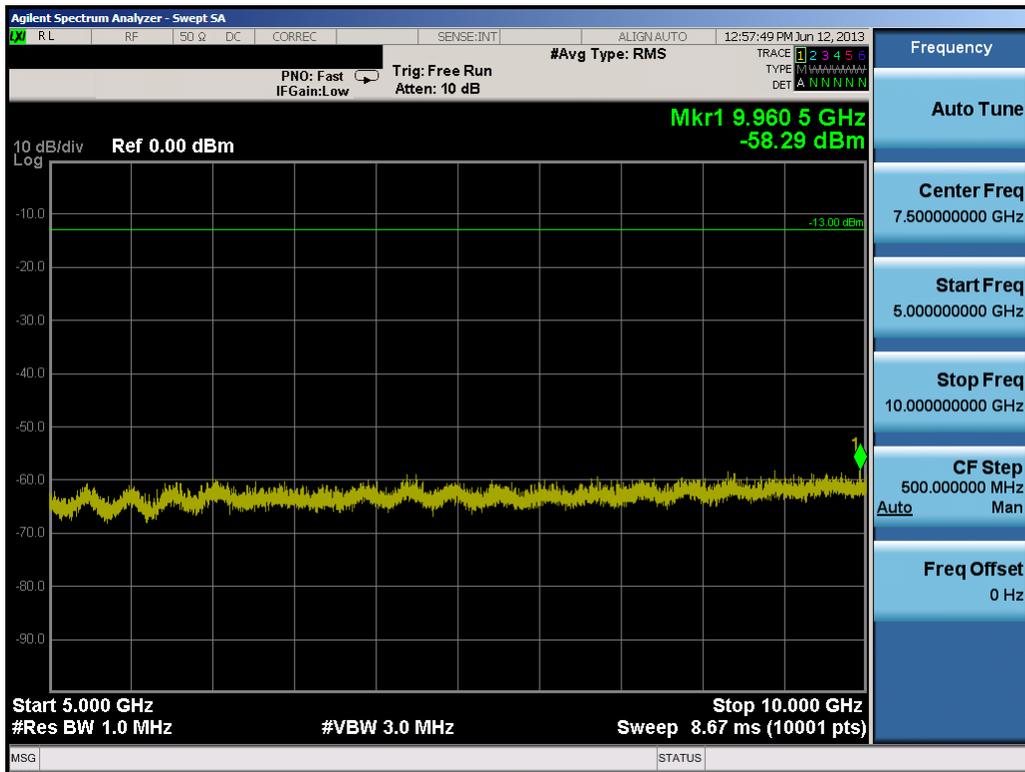


Plot 7-36. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)


FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 58 of 72





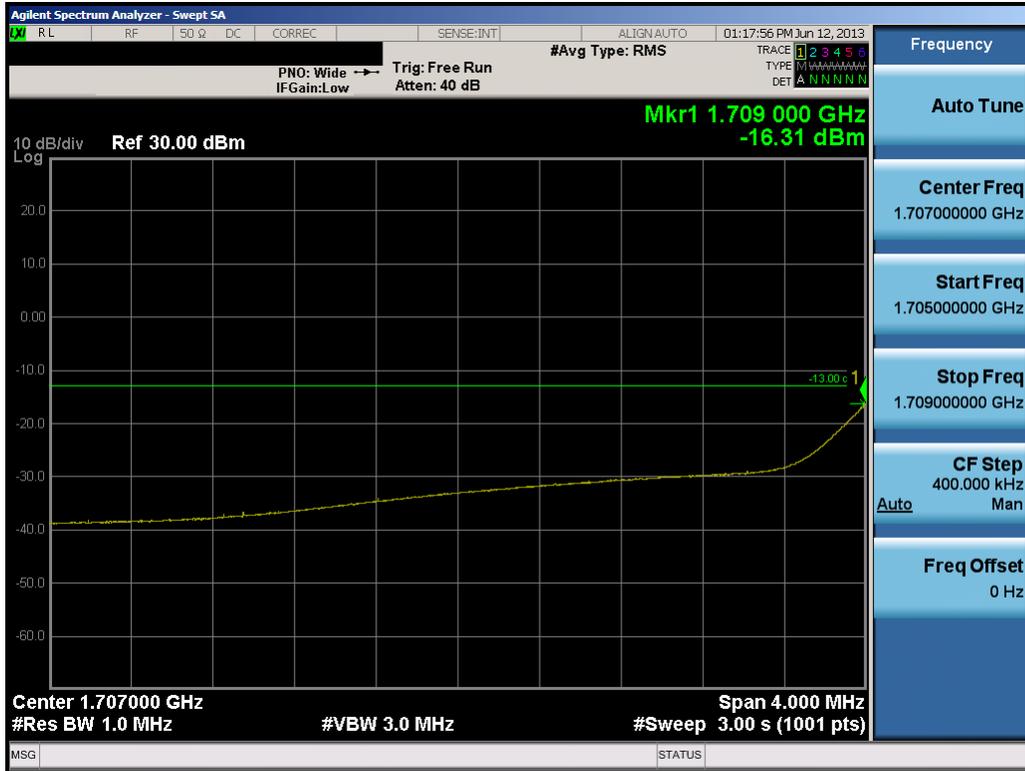


Plot 7-41. 4MHz Span Plot (AWS WCDMA Mode – Ch. 1312)

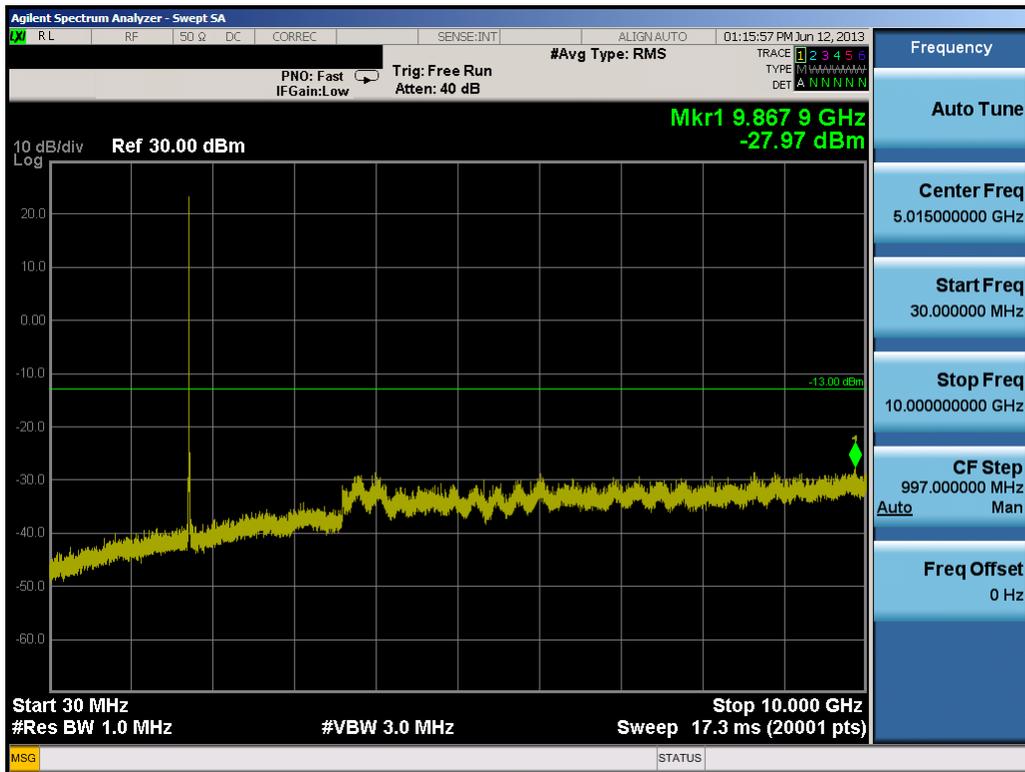


Plot 7-42. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1412)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 61 of 72

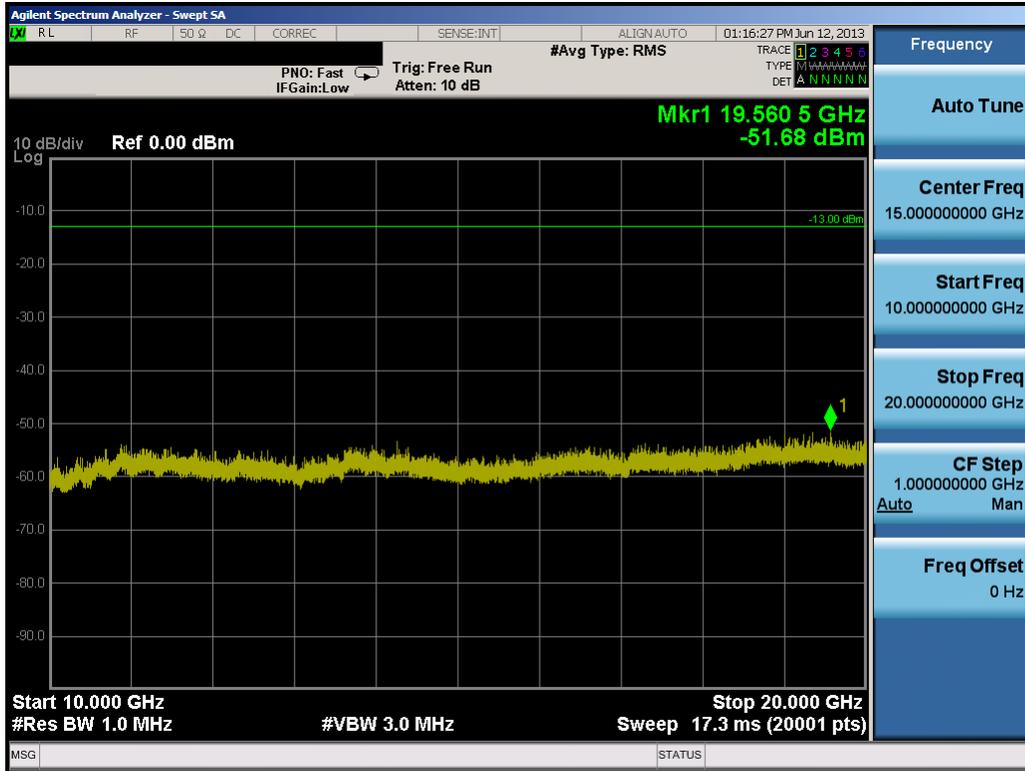


Plot 7-43. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1412)

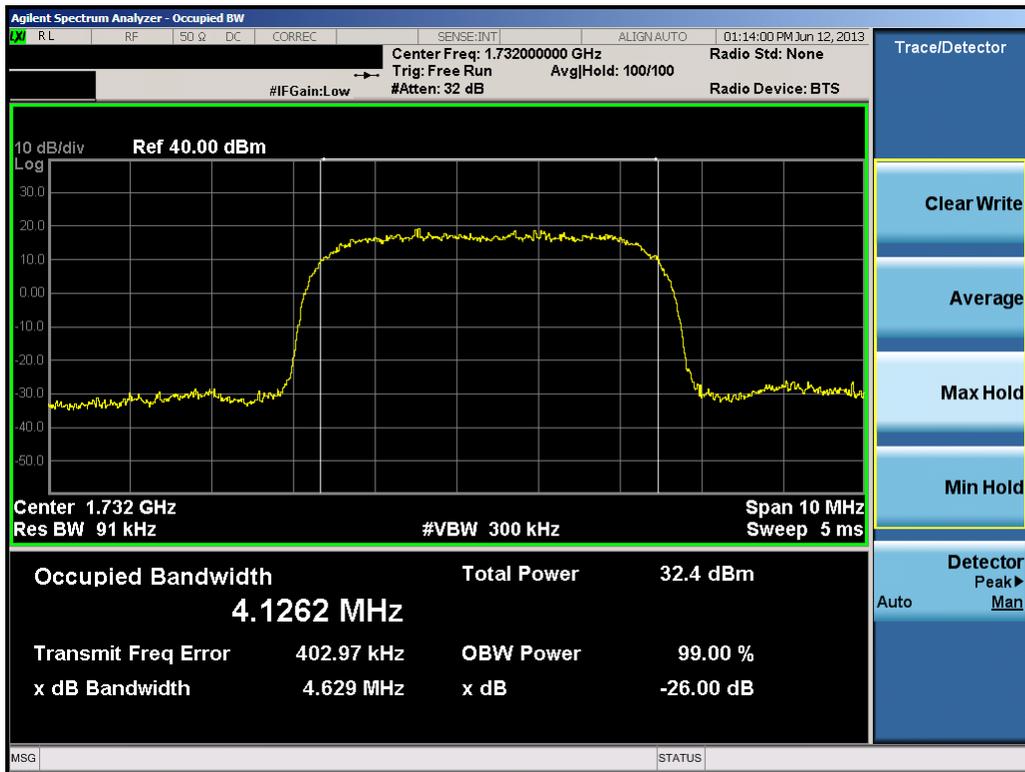


Plot 7-44. Occupied Bandwidth Plot (AWS WCDMA Mode – Ch. 1412)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 62 of 72

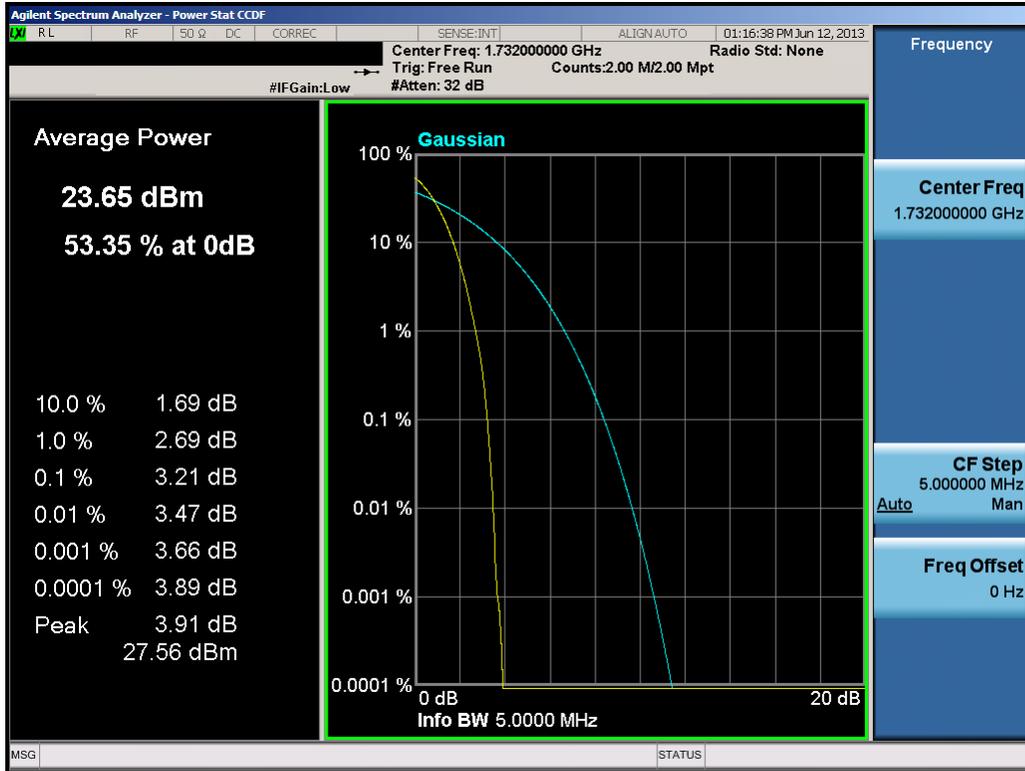


**Plot 7-45. Peak-Average Ratio Plot (AWS WCDMA Mode – Ch. 1412)**

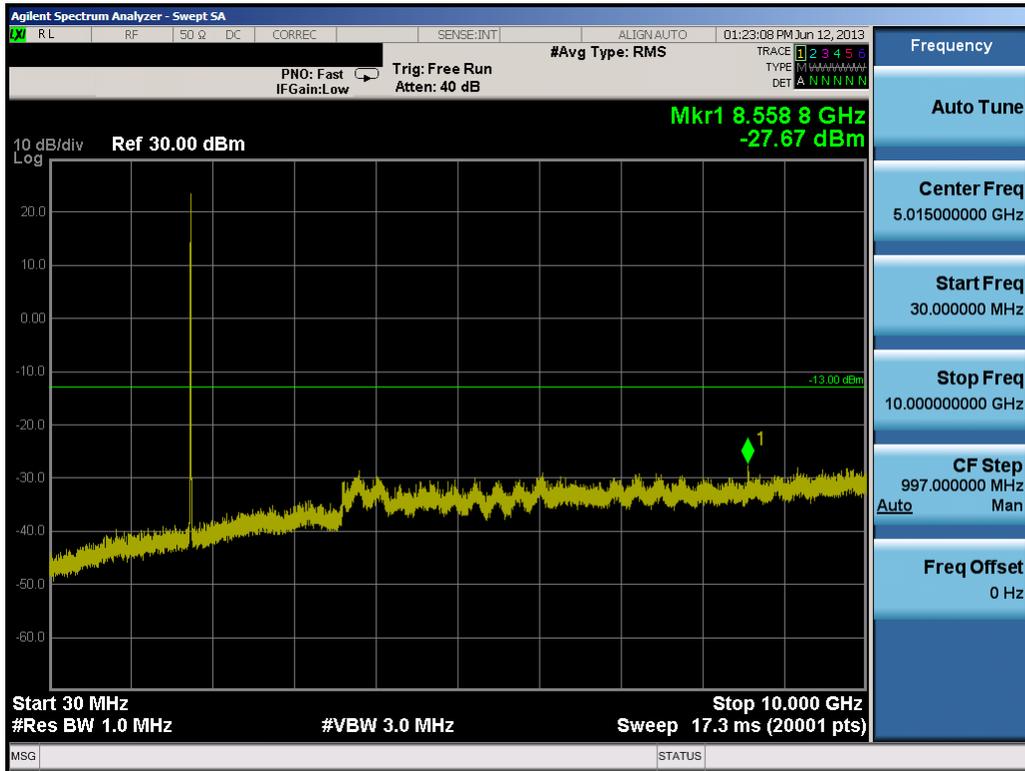


**Plot 7-46. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1862)**

FCC ID: PY7PM-0410	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	<b>SONY</b> make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 63 of 72

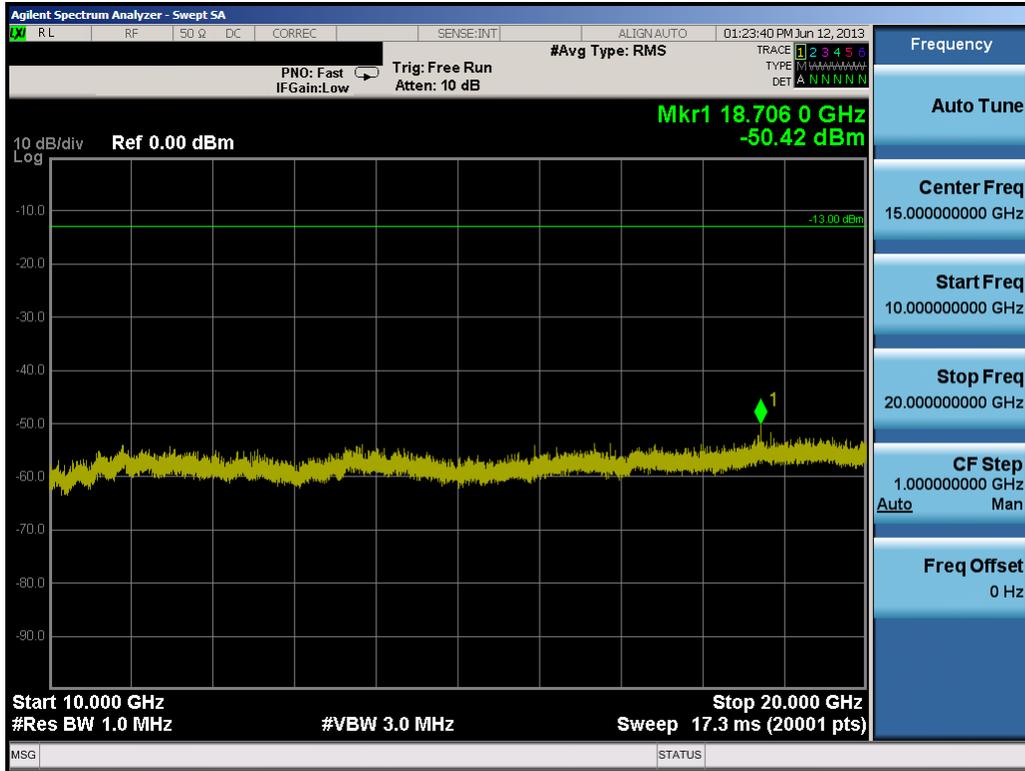


Plot 7-47. Conducted Spurious Plot (AWS WCDMA Mode – Ch. 1862)

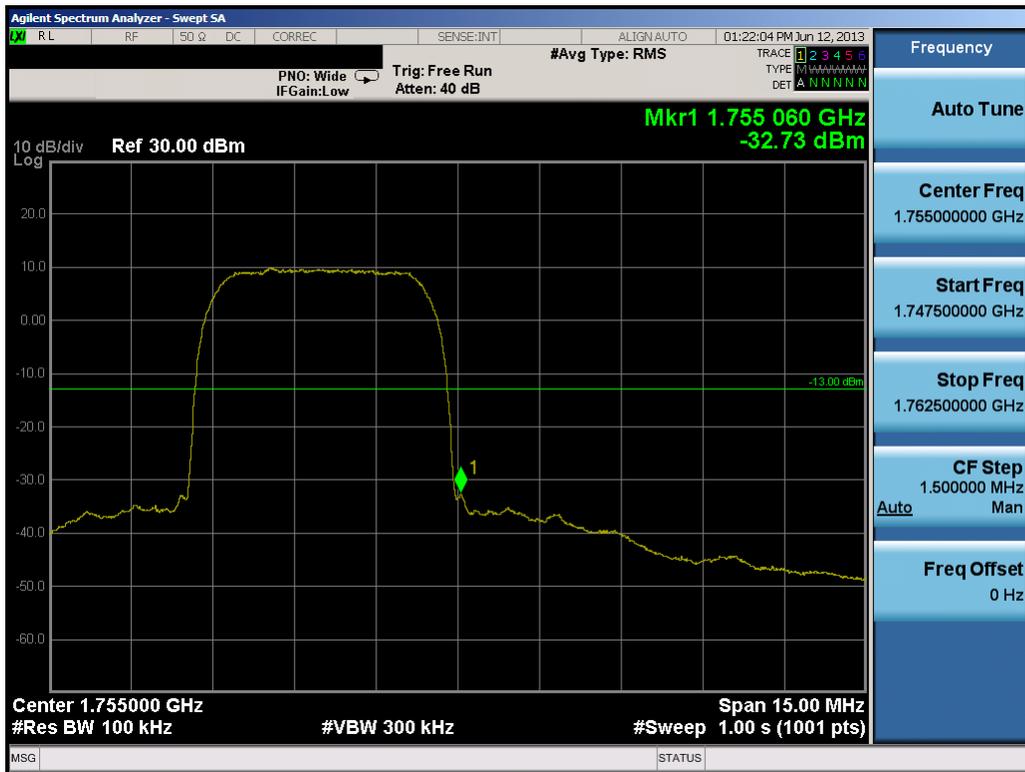


Plot 7-48. Band Edge Plot (AWS WCDMA Mode – Ch. 1862)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 64 of 72

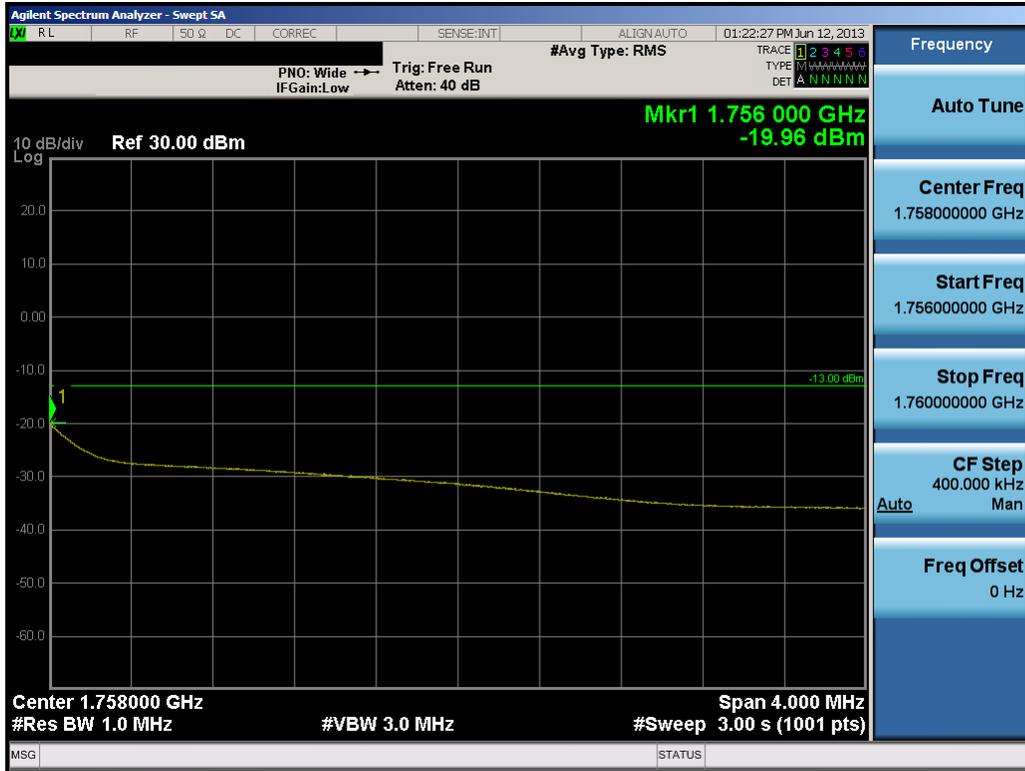


Plot 7-49. 4MHz Span Plot (AWS WCDMA Mode – Ch. 1862)

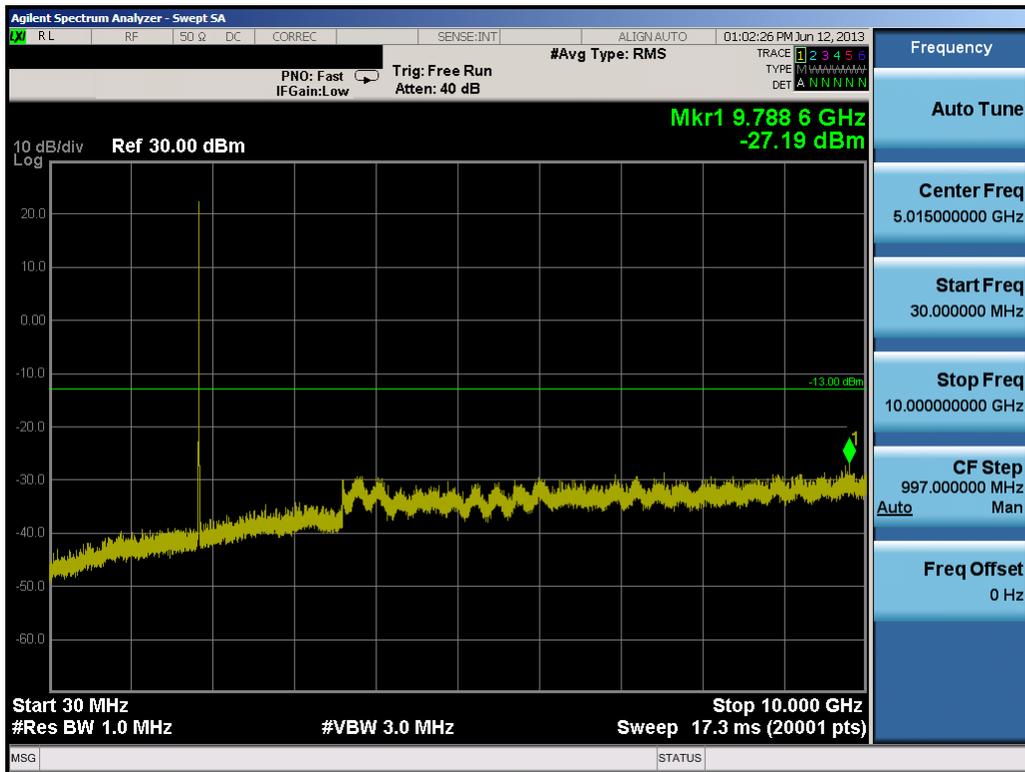


Plot 7-50. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9262)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 65 of 72



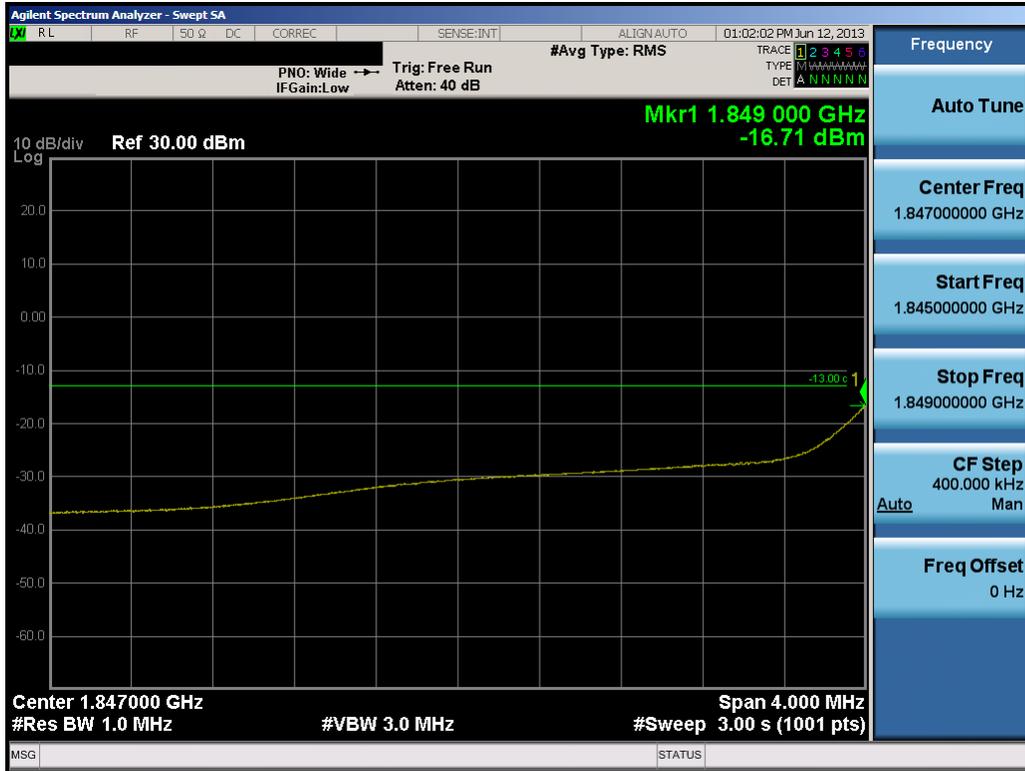


Plot 7-53. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9262)

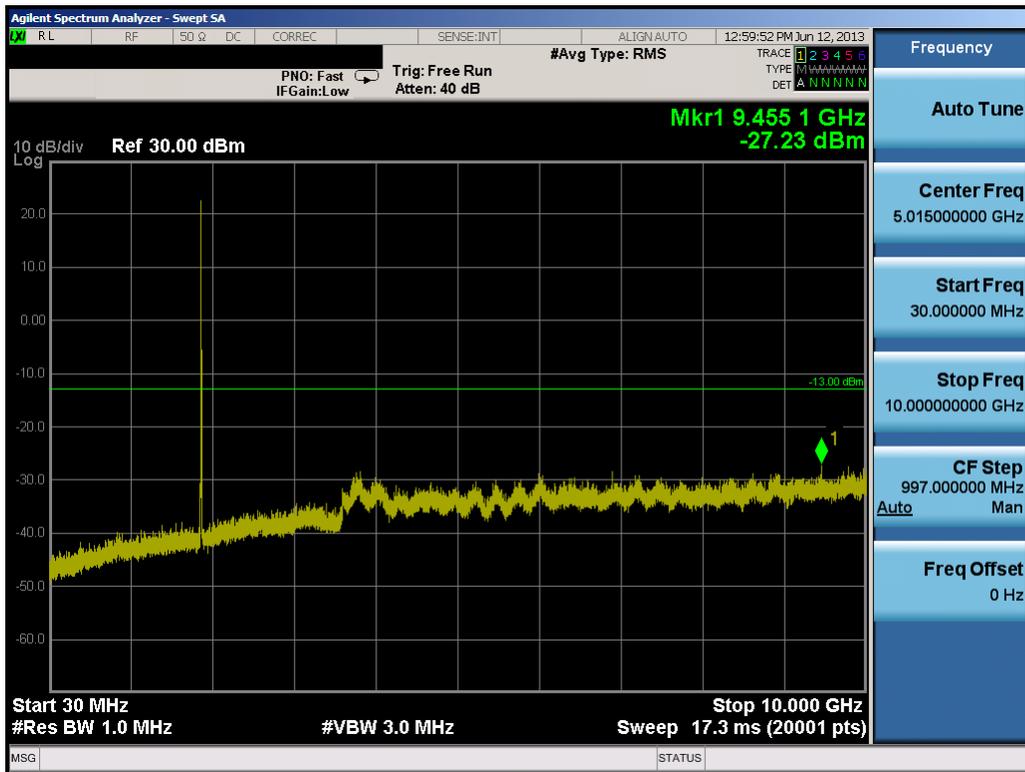


Plot 7-54. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 67 of 72

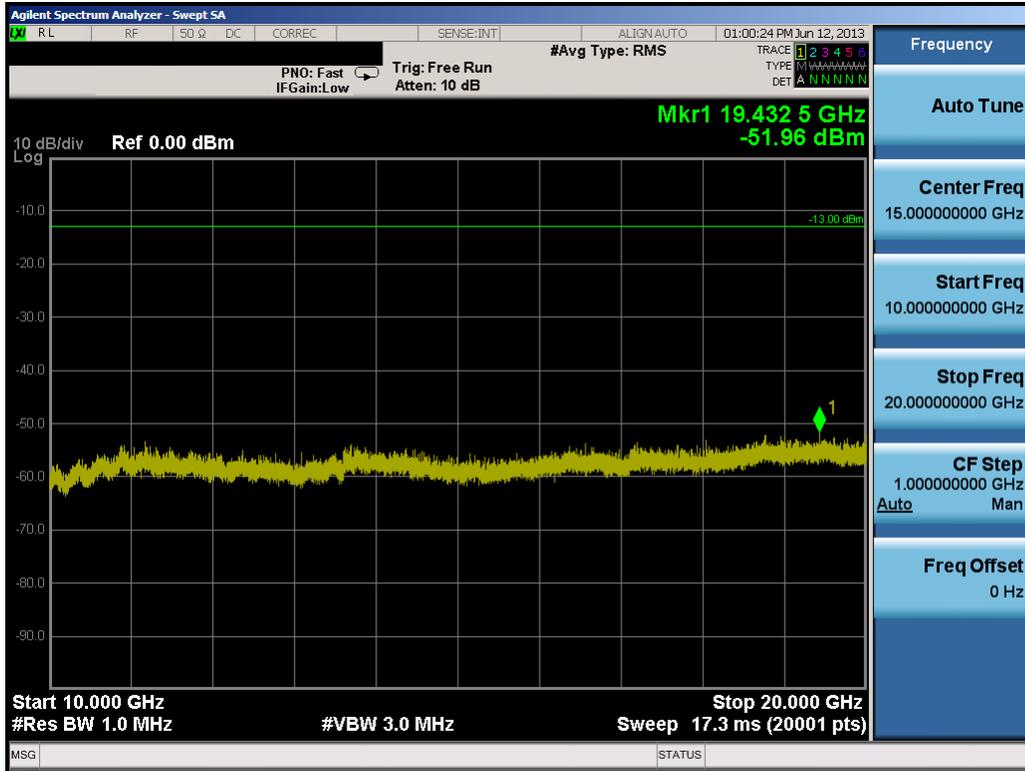


**Plot 7-55. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9400)**

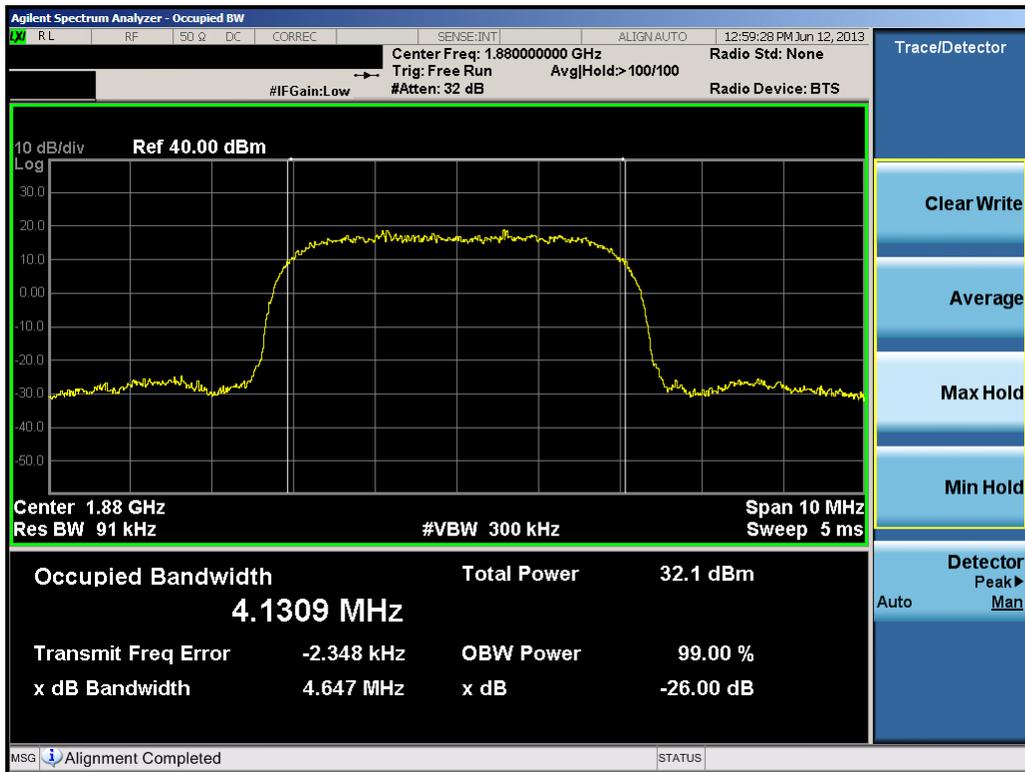


**Plot 7-56. Occupied Bandwidth Plot (PCS WCDMA Mode – Ch. 9400)**

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 68 of 72

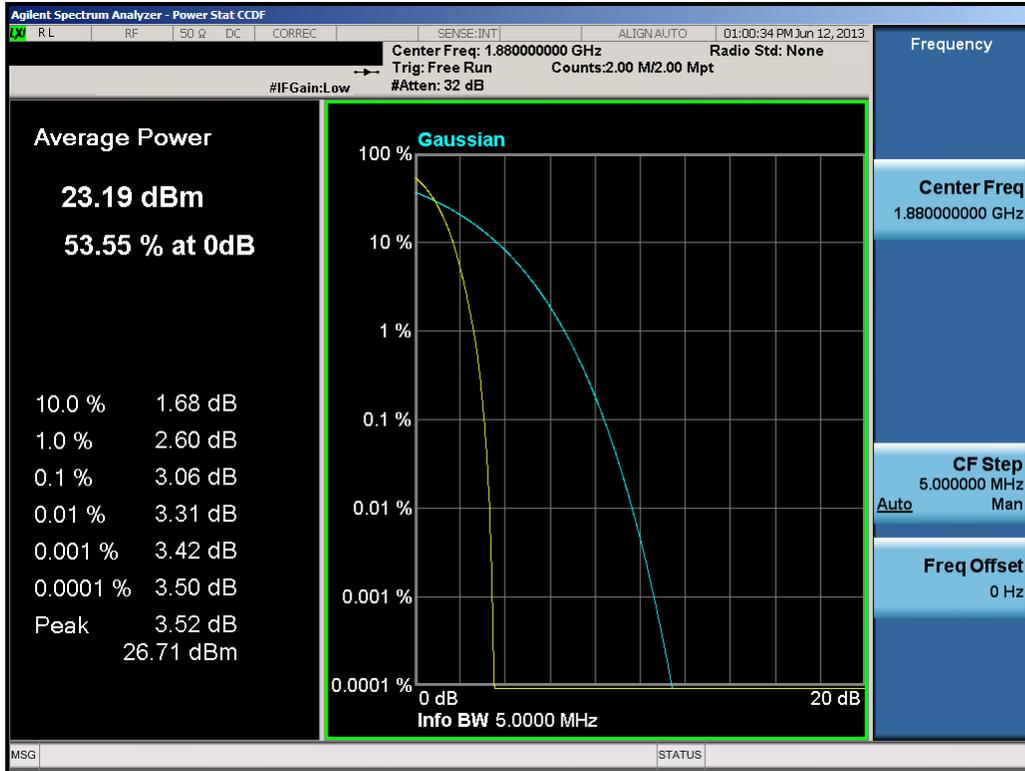

Plot 7-57. Peak-Average Ratio Plot (PCS WCDMA Mode – Ch. 9400)

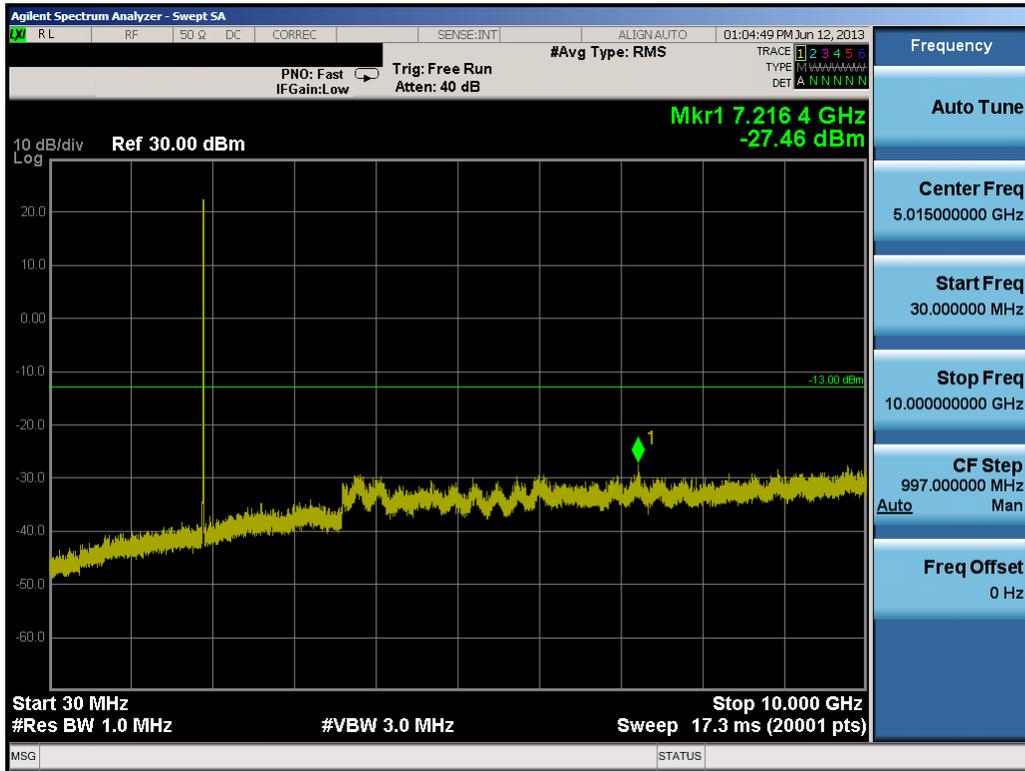

Plot 7-58. Conducted Spurious Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset		Page 69 of 72





Plot 7-61. 4MHz Span Plot (PCS WCDMA Mode – Ch. 9538)

FCC ID: PY7PM-0410	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)	SONY make.believe	Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 71 of 72	

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Sony Portable Handset FCC ID: PY7PM-0410** complies with all the requirements of Parts 2, 22, 24, 27 of the FCC rules and RSS-132, RSS-133, RSS-139 of the Industry Canada rules.

FCC ID: PY7PM-0410		FCC Pt. 22, 24, 27 GSM / EDGE / WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306100974.PY7	Test Dates: 6/12 - 7/1/2013	EUT Type: Portable Handset	Page 72 of 72	