



TEST REPORT

Test Report No. : UL-RPT-RP10014948JD10A V3.0

Manufacturer : Sony Mobile Communications AB
Type No. : PM-0450-BV
FCC ID : PY7PM-0450
Technology : *Bluetooth* – Basic Rate & EDR
Test Standard(s) : FCC Parts 15.207, 15.209(a) & 15.247

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 3.0 supersedes all previous versions.

Date of Issue: 17 July 2013

Checked by:

Sarah Williams
WiSE Laboratory Engineer

Issued by :

pp

John Newell
Group Quality Manager, WiSE
Basingstoke,
UL VS LTD



This laboratory is accredited by UKAS.
The tests reported herein have been
performed in accordance with its' terms
of accreditation.

The *Bluetooth*® word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by UL VS LTD is under licence. Other trademarks and trade names are those of their respective owners.

UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
2. Summary of Testing.....	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
3. Equipment Under Test (EUT)	6
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	8
3.5. Support Equipment	8
4. Operation and Monitoring of the EUT during Testing	9
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
5. Measurements, Examinations and Derived Results	10
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Transmitter AC Conducted Spurious Emissions	11
5.2.2. Transmitter 20 dB Bandwidth	14
5.2.3. Transmitter Carrier Frequency Separation	19
5.2.4. Transmitter Number of Hopping Frequencies and Average Time of Occupancy	22
5.2.5. Transmitter Maximum Peak Output Power	24
5.2.6. Transmitter Radiated Emissions	32
5.2.7. Transmitter Band Edge Radiated Emissions	37
6. Measurement Uncertainty	45
7. Report Revision History	46

1. Customer Information










Company Name:	Sony Mobile Communications AB
Address:	Nya Vattentorget Lund SE-221 88 Sweden

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.247
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.247
Specification Reference:	47CFR15.207 and 47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Sections 15.207 and 15.209
Site Registration:	FCC: 209735
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	19 June 2013 to 28 June 2013

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.207	Transmitter AC Conducted Emissions	
Part 15.247(a)(1)	Transmitter 20 dB Bandwidth	
Part 15.247(a)(1)	Transmitter Carrier Frequency Separation	
Part 15.247(a)(1)(iii)	Transmitter Number of Hopping Frequencies and Average Time of Occupancy	
Part 15.247(b)(1)	Transmitter Maximum Peak Output Power	
Part 15.247(d) & 15.209(a)	Transmitter Radiated Emissions	
Part 15.247(d) & 15.209(a)	Transmitter Band Edge Radiated Emissions	
Key to Results  = Complied  = Did not comply		

2.3. Methods and Procedures

Reference:	ANSI C63.4 (2009)
Title:	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
Reference:	ANSI C63.10 (2009)
Title:	American National Standard for Testing Unlicensed Wireless Devices

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Sony
IMEI:	004402451217271 (<i>Radiated sample</i>)
Serial Number:	CB5124TU1X
Hardware Version Number:	AP2
Software Version Number:	14.1.G.1.184
FCC ID:	PY7PM-0450

Brand Name:	Sony
IMEI:	004402451215432 (<i>Conducted RF port sample</i>)
Serial Number:	CB5124TU4P
Hardware Version Number:	AP2
Software Version Number:	14.1.G.1.184
FCC ID:	PY7PM-0450

Brand Name:	Sony
Description:	AC Charger
Model Name or Number:	EP880

Brand Name:	Generic
Description:	MHL cable
Model Name or Number:	Not marked or stated

Brand Name:	Sony
Description:	MHL Adaptor
Model Name or Number:	IM750

Brand Name:	Sony
Description:	Magnetic Plug
Model Name or Number:	EC801

Brand Name:	Sony
Description:	USB cable
Model Name or Number:	EC801

Identification of Equipment Under Test (EUT) (continued)

Brand Name:	Sony
Description:	PHF
Model Name or Number:	MH750

3.2. Description of EUT

The equipment under test (EUT) is a model of GSM/UMTS/LTE mobile phone with integrated antenna and inbuilt Li-Polymer battery.

The EUT supports GSM 850/900/1800/1900MHz bands, WCDMA FDD bands 1/2/4/5/8 and LTE FDD bands 1/2/3/4/5/7/8/20. It also supports GPRS service with multi-slots class 33 and EGPRS service with multi-slots class 33 too. The HSDPA and HSUPA features are also supported. It has MP3, camera, FM radio, USB memory, GPS receiver, NFC, Mobile High-Definition Link (MHL), Bluetooth (EDR and Bluetooth 4.0), WLAN (802.11 a/b/g/n/ac) and Wi-Fi hotspot functions.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Tested Technology:	Bluetooth		
Power Supply Requirement:	Nominal	3.8 V	
Type of Unit:	Transceiver		
Channel Spacing:	1 MHz		
Mode:	Basic Rate	Enhanced Data Rate	
Modulation:	GFSK	$\pi/4$ -DQPSK	8DQPSK
Packet Type: (Maximum Payload)	DH5	2DH5	3DH5
Data Rate (Mbit/s):	1	2	3
Maximum Peak Output Power:	9.3 dBm		
Peak Antenna Gain:	-4.7 dBi		
Transmit Frequency Range:	2402 MHz to 2480 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	0	2402
	Middle	39	2441
	Top	78	2480

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Brand Name:	Generic
Description:	2 GB Micro SD Card
Model Name or Number:	Not marked or stated

Brand Name:	Logik
Description:	22" High Definition Television
Model Name or Number:	L22FE12A
Serial Number:	1309020661

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Transmit mode with Basic Rate (DH5 packets) or EDR (2DH5 or 3DH5 packets) as required.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The EUT was placed into *Bluetooth* test mode by pressing a sequence of buttons on the EUT. The Customer had installed the application onto the EUT. Once in *Bluetooth* mode test mode, a link was established to a *Bluetooth* tester which was then used to control the EUT.
- Both EDR/Basic rate modes were compared and tests were performed with the mode that presented the worst case result. For output power, bandwidth, band edge and channel separation, all modes were tested.
- Transmitter radiated spurious emission tests were performed with the following configurations, employing all available accessories:
 - Configuration 1 – Handset with the AC charger, USB Cable, MHL cable (terminated in to a television), MHL adaptor and PHF
 - Configuration 2 – Handset with the AC charger, Magnetic plug and PHF

Pre-scans below 1 GHz were performed in both configurations 1 and 2, with final measurements limited to the configuration which provided worst case results. Pre-scans above 1 GHz were performed in the configuration that employed the most accessories (Configuration 1), with any final measurements being performed in both configurations.

- Transmitter radiated spurious emissions tests were performed with the EUT transmitting in 3DH5 mode as this mode was found to transmit the highest power.
- AC conducted emissions was tested with the EUT transmitting in 3DH5 mode as this mode was found to transmit the highest power. Both configurations were tested and configuration 2 was found to be the worst case.
- The EUT conducted sample with IMEI 004402451215432 was used for 20 dB bandwidth, carrier frequency separation, average time of occupancy tests and conducted output power tests.
- The radiated sample with IMEI 004402451217271 was used for AC conducted emissions and radiated spurious emissions tests.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results**5.2.1. Transmitter AC Conducted Spurious Emissions****Test Summary:**

Test Engineer:	Mark Percival	Test Date:	28 June 2013
Test Sample IMEI:	004402451217271		

FCC Reference:	Part 15.207
Test Method Used:	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

Environmental Conditions:

Temperature (°C):	21
Relative Humidity (%):	61

Results: Live / Quasi Peak

Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.451	Live	40.1	56.8	16.7	Complied
1.207	Live	40.3	56.0	15.7	Complied
1.806	Live	38.1	56.0	17.9	Complied
17.101	Live	36.3	60.0	23.7	Complied

Results: Live / Average

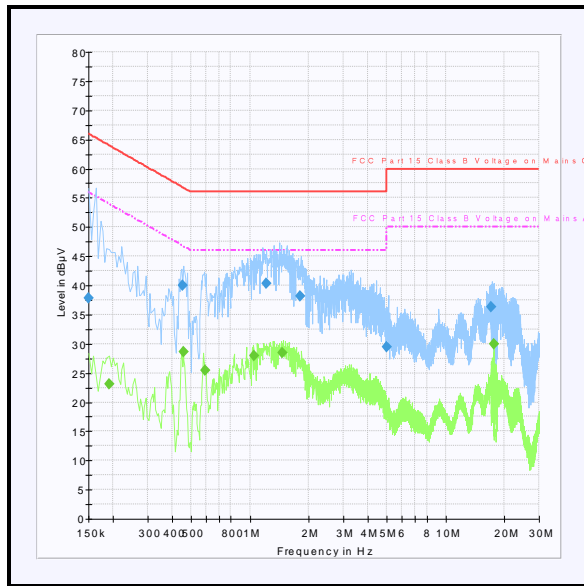
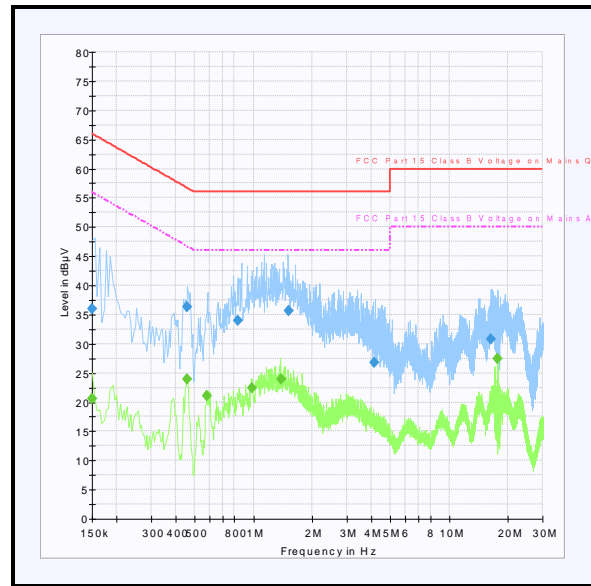
Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.456	Live	28.7	46.8	18.1	Complied
0.591	Live	25.4	46.0	20.6	Complied
1.045	Live	27.9	46.0	18.1	Complied
1.468	Live	28.5	46.0	17.5	Complied
17.628	Live	29.9	50.0	20.1	Complied

Transmitter AC Conducted Spurious Emissions (continued)**Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.456	Neutral	36.2	56.8	20.6	Complied
0.834	Neutral	34.0	56.0	22.0	Complied
1.513	Neutral	35.6	56.0	20.4	Complied
16.390	Neutral	30.8	60.0	29.2	Complied

Results: Neutral / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.456	Neutral	23.9	46.8	22.9	Complied
0.978	Neutral	22.5	46.0	23.5	Complied
1.378	Neutral	23.9	46.0	22.1	Complied
17.623	Neutral	27.4	50.0	22.6	Complied

Transmitter AC Conducted Spurious Emissions (continued)**Live****Neutral**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1625	Thermometer / Hygrometer station	JM Handelspunkt	30.5015.13	None stated	09 Jan 2014	12
A004	LISN	Rohde & Schwarz	ESH3-Z5	890604/027	30 Out 2013	12
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	19 Feb 2014	12
M1020	Test Receiver	Rohde & Schwarz	SME-03	834617/030	14 Dec 2013	12

5.2.2. Transmitter 20 dB Bandwidth**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	19 June 2013
Test Sample IMEI:	004402451215432		

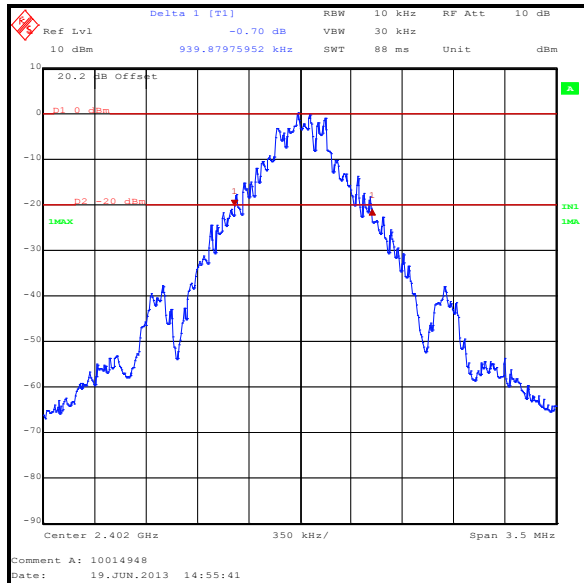
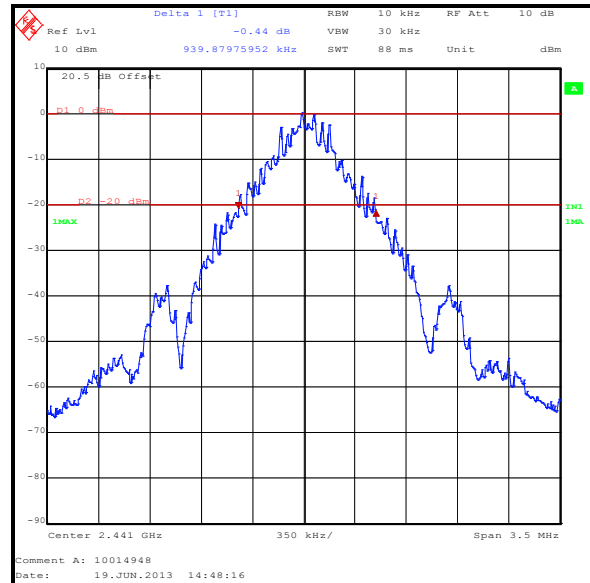
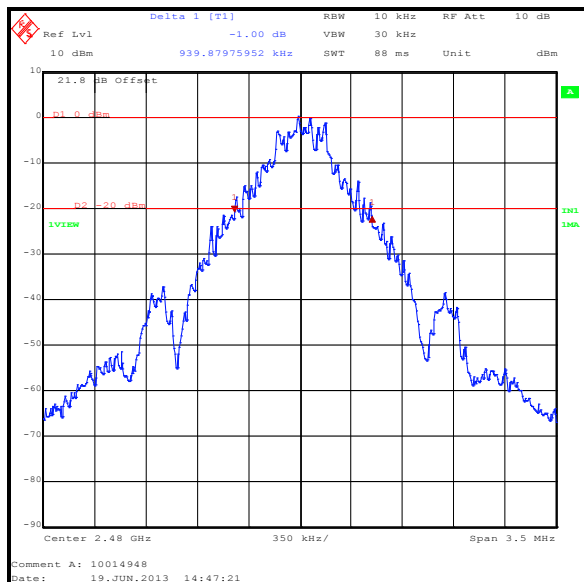
FCC Reference:	Part 15.247(a)(1)
Test Method Used:	As detailed in ANSI C63.10 Section 6.9.1

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	42

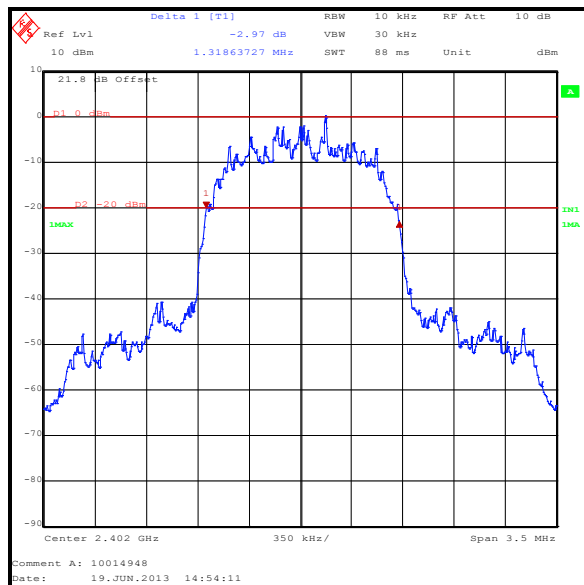
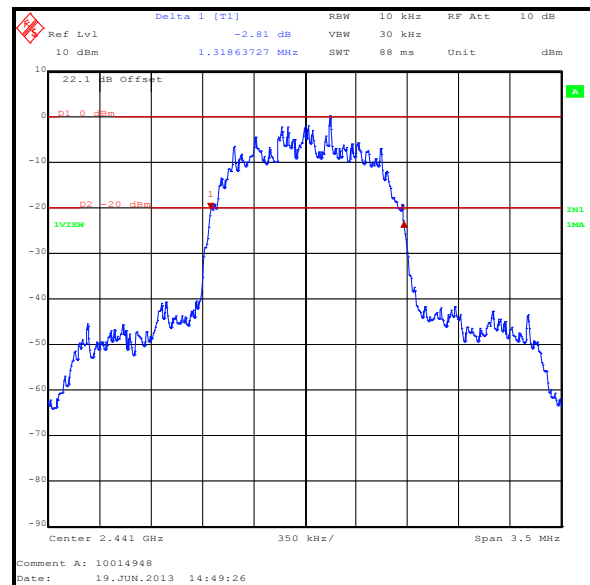
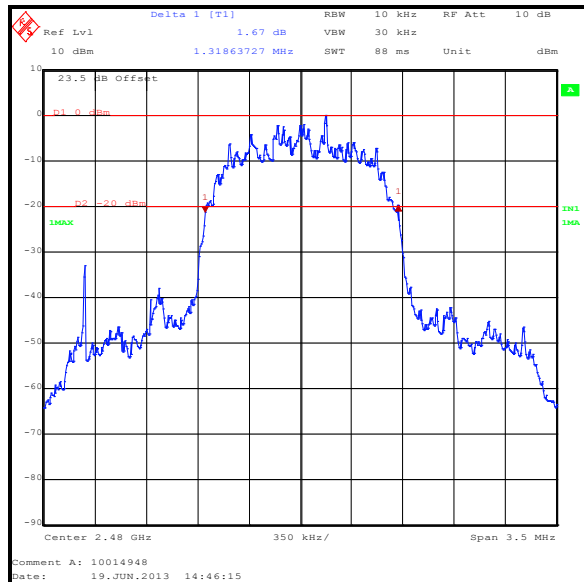
Transmitter 20 dB Bandwidth (continued)**Results DH5:**

Channel	20 dB Bandwidth (kHz)
Bottom	939.880
Middle	939.880
Top	939.880

**Bottom Channel****Middle Channel****Top Channel**

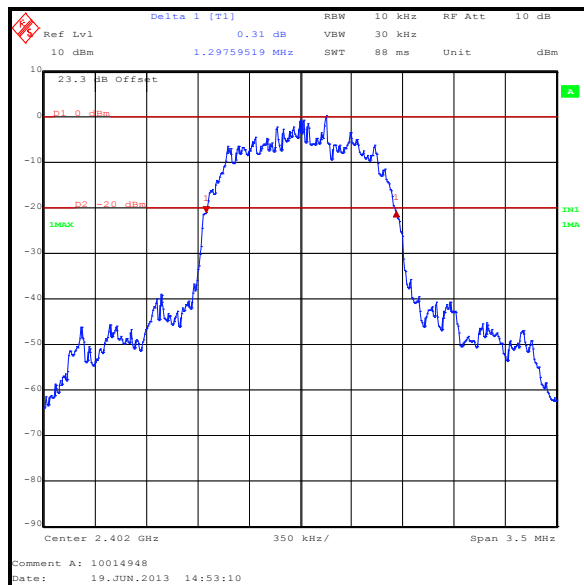
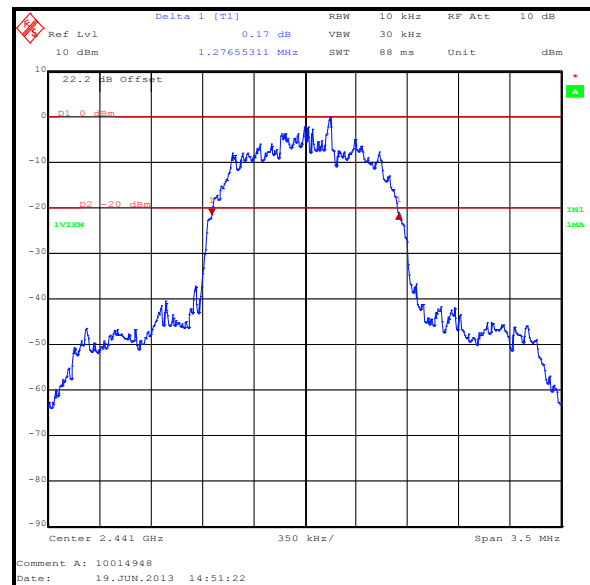
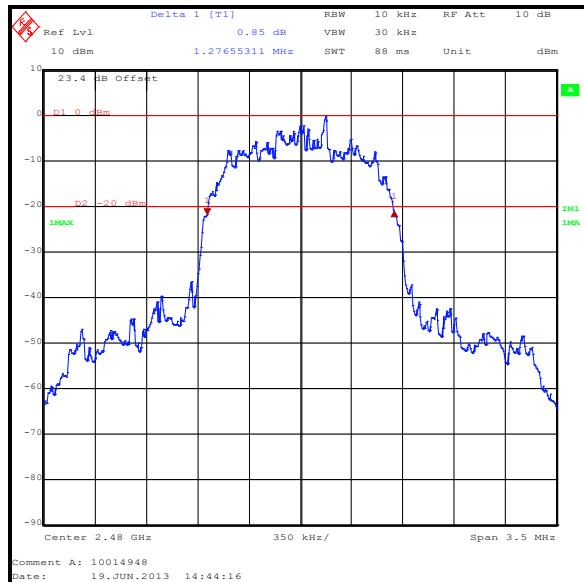
Transmitter 20 dB Bandwidth (continued)**Results 2DH5:**

Channel	20 dB Bandwidth (kHz)
Bottom	1318.637
Middle	1318.637
Top	1318.637

**Bottom Channel****Middle Channel****Top Channel**

Transmitter 20 dB Bandwidth (continued)**Results 3DH5:**

Channel	20 dB Bandwidth (kHz)
Bottom	1297.595
Middle	1276.553
Top	1276.553

**Bottom Channel****Middle Channel****Top Channel**

Transmitter 20 dB Bandwidth (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermometer / Hygrometer station	JM Handelspunkt	30.5015.13	None stated	24 May 2014	12
M1379	Test Receiver	Rohde & Schwarz	ESIB7	100330	15 Oct 2013	12
S0523	DC Power Supply	TTi	PL320	224235	Calibrated before use	-
M1269	Digital Multimeter	Fluke	179	90250210	30 Jul 2013	12
A1096	Directional Coupler	MIDISCO	MDC6223 W20	None	Calibrated before use	-

5.2.3. Transmitter Carrier Frequency Separation

Test Summary:

Test Engineer:	Nick Steele	Test Date:	19 June 2013
Test Sample IMEI:	004402451215432		

FCC Reference:	Part 15.247(a)(1)
Test Method Used:	As detailed in ANSI C63.10 Section 7.7.2

Environmental Conditions:

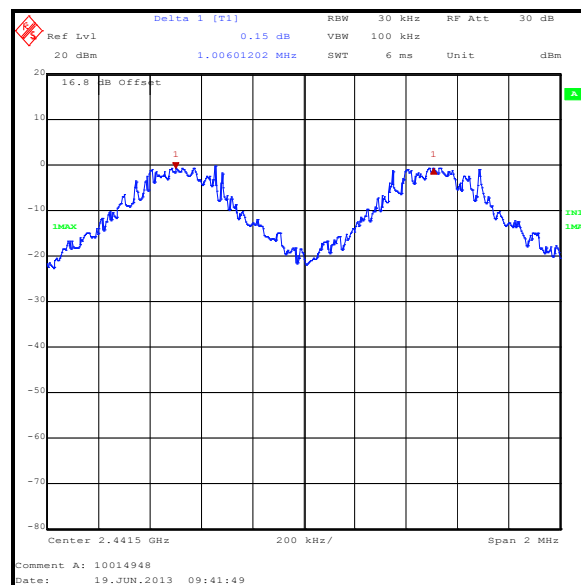
Temperature (°C):	23
Relative Humidity (%):	42

Note(s):

1. The 20 dB bandwidth measured for the middle channel operating at 2441 MHz was used to calculate the limit.

Results: DH5

Carrier Frequency Separation (kHz)	Limit (2/3 of 20 dB BW) (kHz)	Margin (kHz)	Result
1006.012	626.587	379.425	Complied

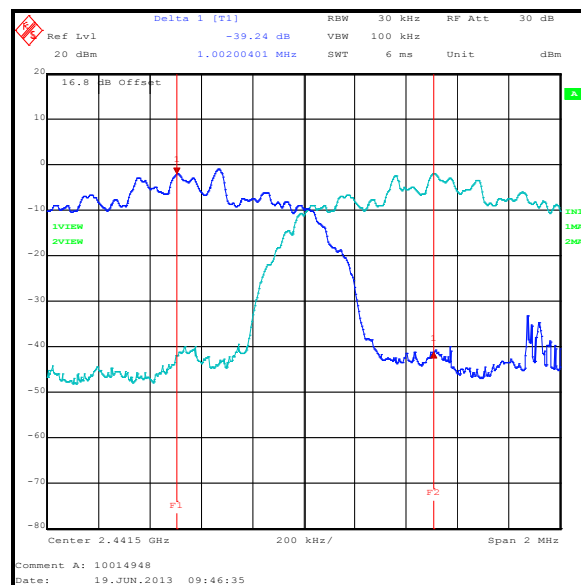


Transmitter Carrier Frequency Separation (continued)**Note(s):**

1. The 20 dB bandwidth measured for the middle channel operating at 2441 MHz was used to calculate the limit.

Results: 2DH5

Carrier Frequency Separation (kHz)	Limit ($2/3$ of 20 dB BW) (kHz)	Margin (kHz)	Result
1002.004	879.091	122.913	Complied



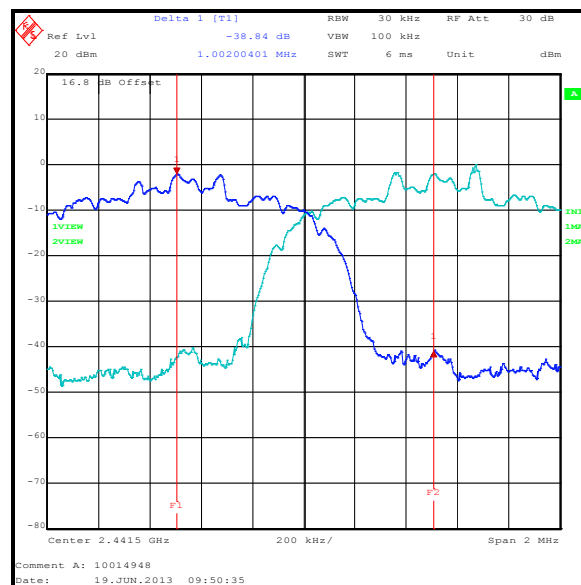
Transmitter Carrier Frequency Separation (continued)

Note(s):

1. The 20 dB bandwidth measured for the middle channel operating at 2441 MHz was used to calculate the limit.

Results: 3DH5

Carrier Frequency Separation (kHz)	Limit ($2/3$ of 20 dB BW) (kHz)	Margin (kHz)	Result
1002.004	851.035	150.969	Complied



Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermometer / Hygrometer station	JM Handelspunkt	30.5015.13	None stated	24 May 2014	12
M1379	Test Receiver	Rohde & Schwarz	ESIB7	100330	15 Oct 2013	12
S0523	DC Power Supply	TTi	PL320	224235	Calibrated before use	-
M1269	Digital Multimeter	Fluke	179	90250210	30 Jul 2013	12
A1096	Directional Coupler	MIDISCO	MDC6223 W20	None	Calibrated before use	-

5.2.4. Transmitter Number of Hopping Frequencies and Average Time of Occupancy**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	19 June 2013
Test Sample IMEI:	004402451215432		

FCC Reference:	Part 15.247(a)(1)(iii)
Test Method Used:	As detailed in ANSI C63.10 Section 7.7.3 & 7.7.4

Environmental Conditions:

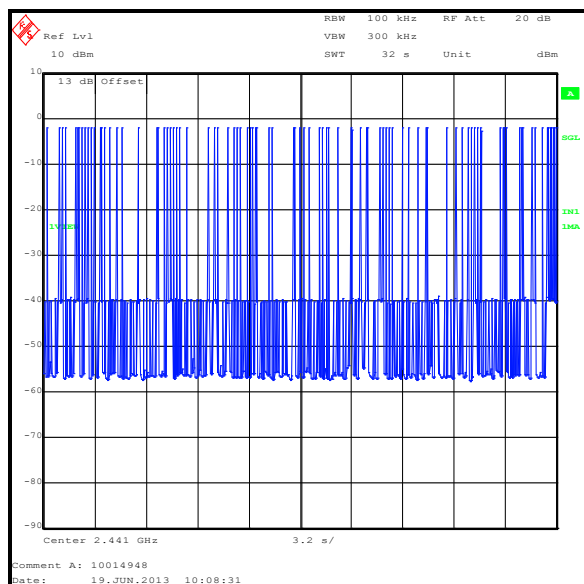
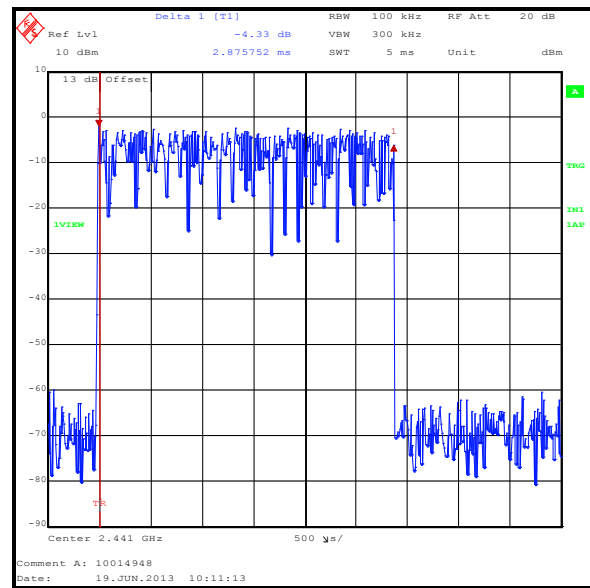
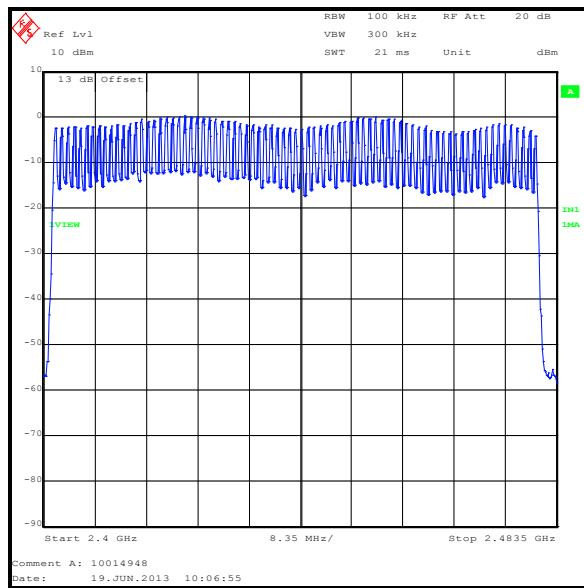
Temperature (°C):	23
Relative Humidity (%):	45

Note(s):

1. Tests were performed to identify the average time of occupancy in number of channels (79) x 0.4 seconds. The calculated period is 31.6 seconds.

Results:

Emission Width (μs)	Number of Hops in 31.6 Seconds	Average Time of Occupancy (s)	Limit (s)	Margin (s)	Result
2875.752	99	0.285	0.4	0.115	Complied

Transmitter Number of Hopping Frequencies and Average Time of Occupancy (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermometer / Hygrometer station	JM Handelspunkt	30.5015.13	None stated	24 May 2014	12
M1379	Test Receiver	Rohde & Schwarz	ESIB7	100330	15 Oct 2013	12
S0523	DC Power Supply	TTi	PL320	224235	Calibrated before use	-
M1269	Digital Multimeter	Fluke	179	90250210	30 Jul 2013	12
A1096	Directional Coupler	MIDISCO	MDC6223 W20	None	Calibrated before use	-

5.2.5. Transmitter Maximum Peak Output Power**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	19 June 2013
Test Sample IMEI:	004402451215432		

FCC Reference:	Part 15.247(b)(1)
Test Method Used:	As detailed in ANSI C63.10 Section 6.10.1

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	42

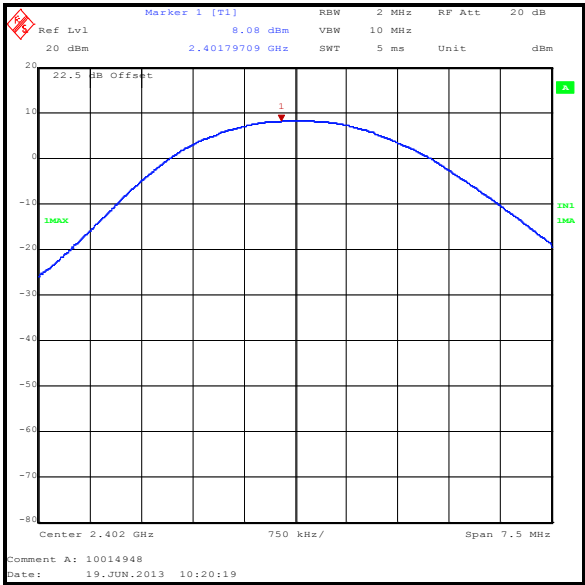
Transmitter Maximum Peak Output Power (continued)**Results: DH5**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	8.1	30.0	21.9	Complied
Middle	7.9	30.0	22.1	Complied
Top	6.7	30.0	23.3	Complied

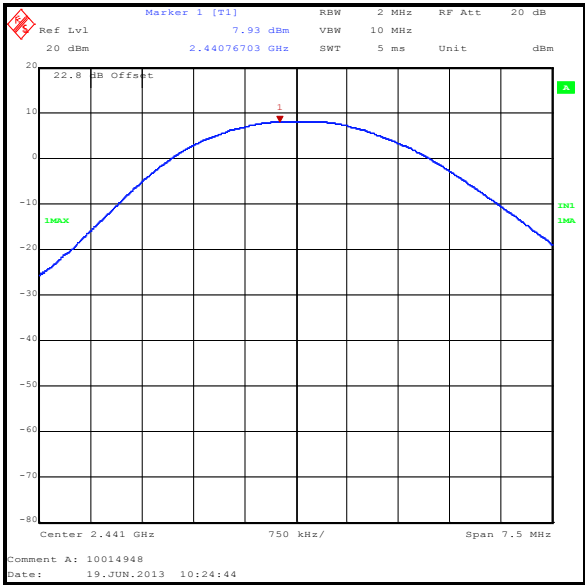
Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	8.1	-4.7	3.4	36.0	32.6	Complied
Middle	7.9	-4.7	3.2	36.0	32.8	Complied
Top	6.7	-4.7	2.0	36.0	34.0	Complied

Transmitter Maximum Peak Output Power (continued)

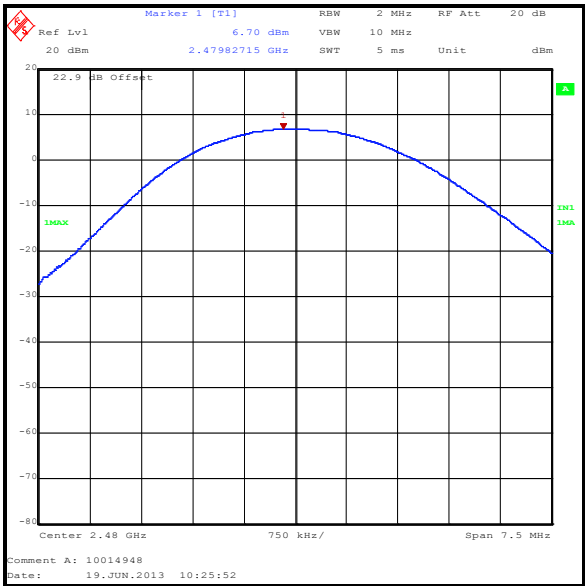
Results: DH5



Bottom Channel



Middle Channel



Top Channel

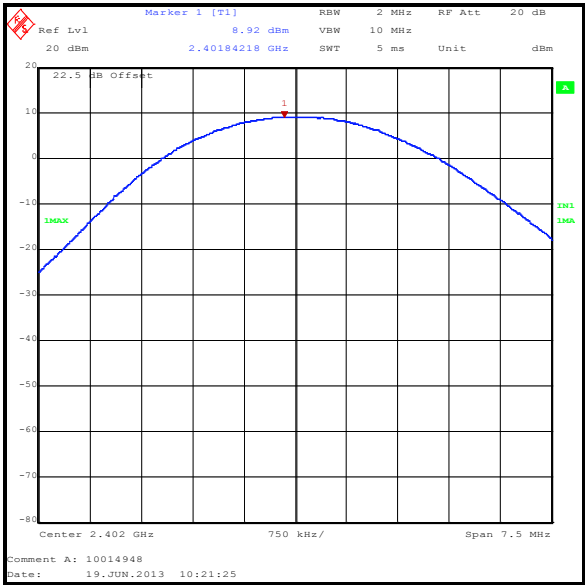
Transmitter Maximum Peak Output Power (continued)**Results: 2DH5**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	8.9	21.0	12.1	Complied
Middle	8.8	21.0	12.2	Complied
Top	7.5	21.0	13.5	Complied

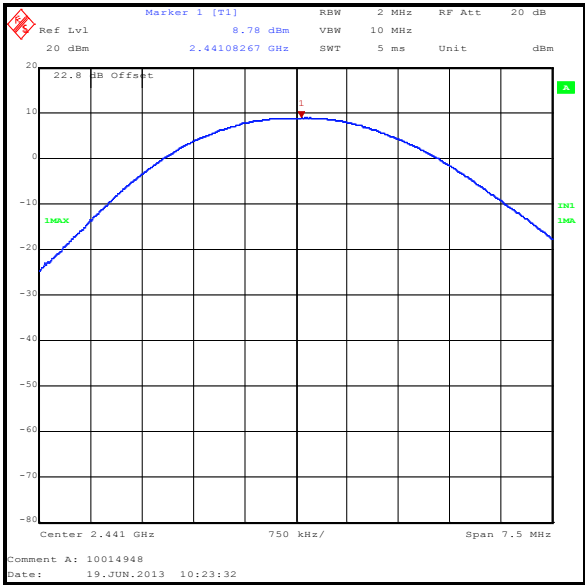
Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	8.9	-4.7	4.2	27.0	22.8	Complied
Middle	8.8	-4.7	4.1	27.0	22.9	Complied
Top	7.5	-4.7	2.8	27.0	24.2	Complied

Transmitter Maximum Peak Output Power (continued)

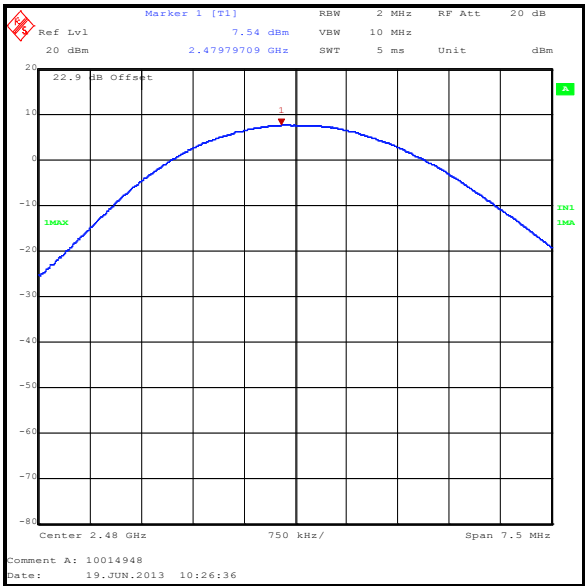
Results: 2DH5



Bottom Channel



Middle Channel



Top Channel

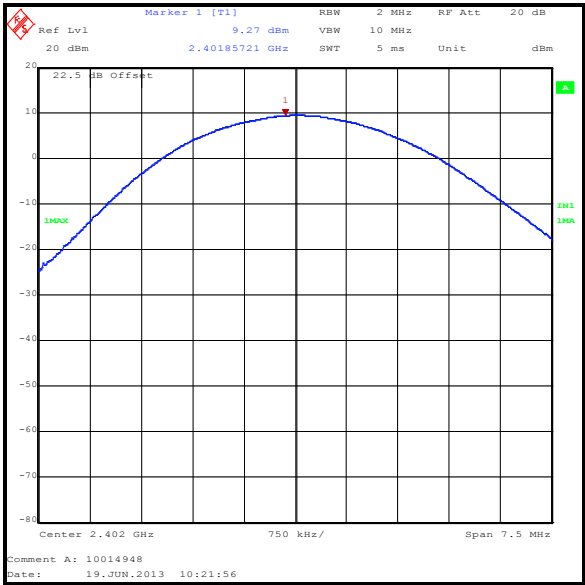
Transmitter Maximum Peak Output Power (continued)**Results: 3DH5**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	9.3	21.0	11.7	Complied
Middle	9.1	21.0	11.9	Complied
Top	7.9	21.0	13.1	Complied

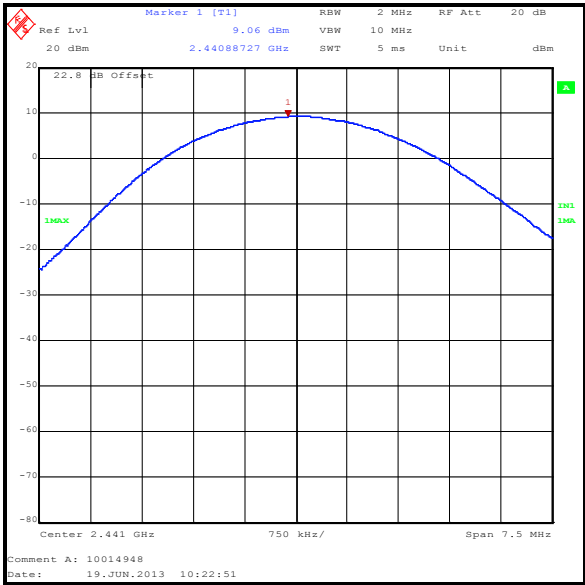
Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	9.3	-4.7	4.6	27.0	22.4	Complied
Middle	9.1	-4.7	4.4	27.0	22.6	Complied
Top	7.9	-4.7	3.2	27.0	23.8	Complied

Transmitter Maximum Peak Output Power (continued)

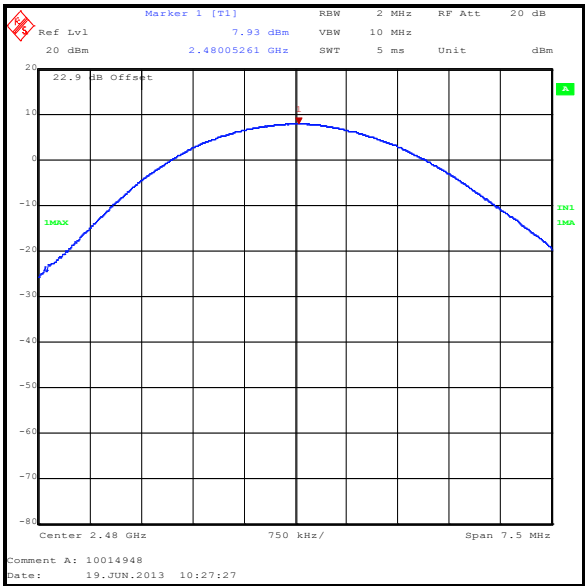
Results: 3DH5



Bottom Channel



Middle Channel



Top Channel

Transmitter Maximum Peak Output Power (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermometer / Hygrometer station	JM Handelspunkt	30.5015.13	None stated	24 May 2014	12
M1379	Test Receiver	Rohde & Schwarz	ESIB7	100330	15 Oct 2013	12
S0523	DC Power Supply	TTi	PL320	224235	Calibrated before use	-
M1269	Digital Multimeter	Fluke	179	90250210	30 Jul 2013	12
A1096	Directional Coupler	MIDISCO	MDC6223 W20	None	Calibrated before use	-
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	15 May 2014	12
M1267	Thermal Power Sensor	Rohde & Schwarz	NRV-Z52	100155	14 May 2014	12
M1021	Signal Generator	Rohde & Schwarz	SMP-02	833286/004	05 Feb 2014	12

5.2.6. Transmitter Radiated Emissions**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	25 June 2013
Test Sample IMEI:	004402451217271		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	As detailed in ANSI C63.10 Sections 6.3 and 6.5 referencing ANSI C63.4
Frequency Range	30 MHz to 1000 MHz

Environmental Conditions:

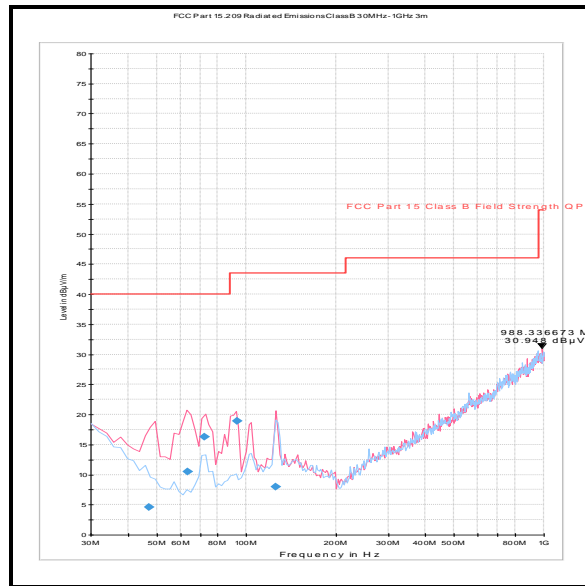
Temperature (°C):	23
Relative Humidity (%):	39

Note(s):

1. Transmitter radiated spurious emissions tests were performed with the EUT transmitting in 3DH5 mode as this was found to transmit the highest power and therefore deemed worst case.
2. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
3. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the top channel only.
4. All emissions shown on the pre-scan plots were investigated and found to be ambient, or >20 dB below the applicable limit or below the measurement system noise floor. Therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
5. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Results: Quasi-Peak / 3DH5

Frequency (MHz)	Antenna Polarity	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
988.337	Vertical	31.0	54.0	23.0	Complied

Transmitter Radiated Emissions (continued)

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A490	Antenna	Chase	CBL6111A	1590	09 Apr 2014	12
A1834	Attenuator	Hewlett Packard	8491B	10444	27 Jan 2014	12
G0543	Pre-Amplifier	Sonoma	310N	230801	04 Jul 2013	3
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	24 Oct 2013	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	07 Feb 2014	12
M1622	Thermometer / Hygrometer station	JM Handelspunkt	30.5015.13	None stated	24 May 2014	12

Transmitter Radiated Emissions (continued)**Test Summary:**

Test Engineers:	Ahmed Ali / Nick Steele	Test Date:	21 July 2013
Test Sample IMEI:	004402451217271		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	As detailed in ANSI C63.10 Sections 6.3 and 6.6 referencing ANSI C63.4
Frequency Range	1 GHz to 25 GHz

Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	36

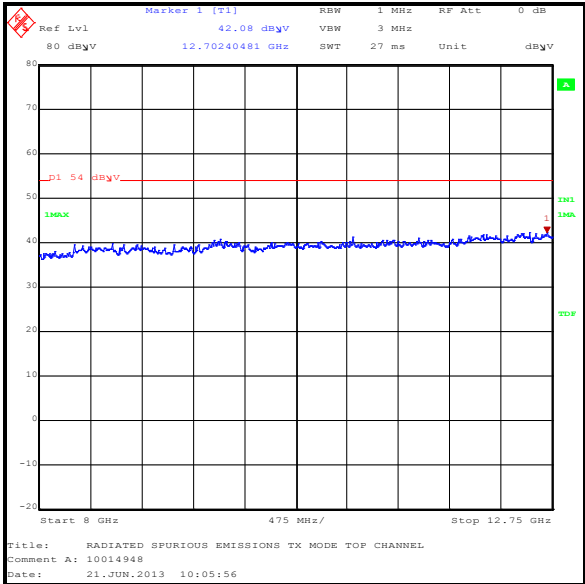
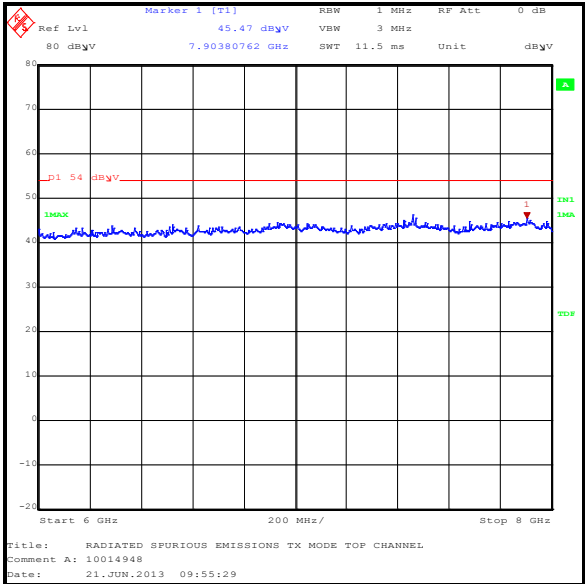
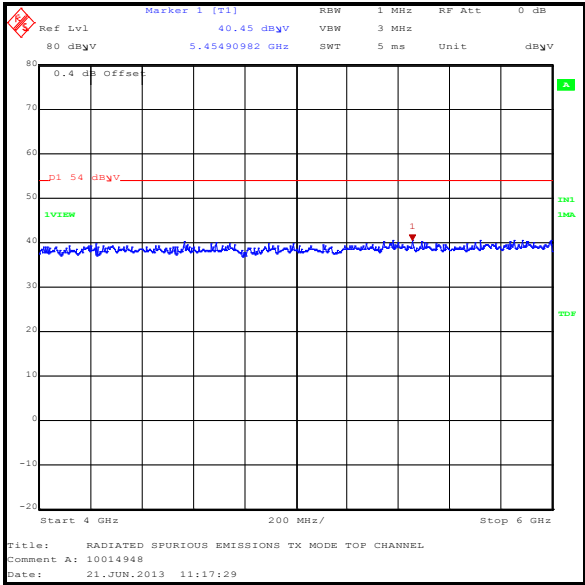
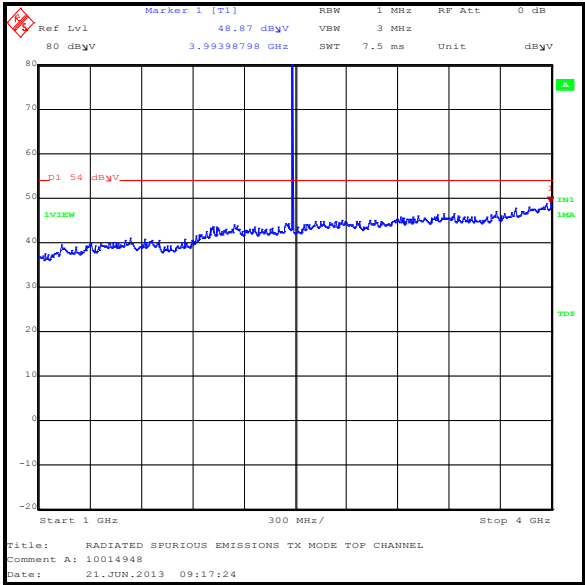
Note(s):

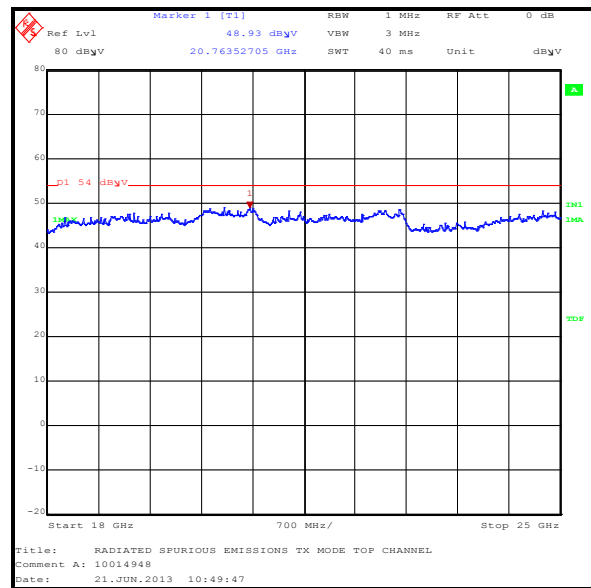
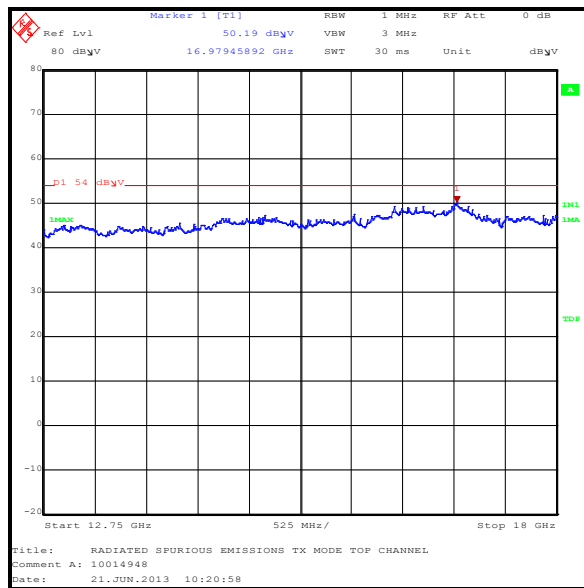
1. Transmitter radiated spurious emissions tests were performed with the EUT transmitting in 3DH5 mode as this was found to transmit the highest power and therefore deemed worst case.
2. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
3. The emission shown on the 1 GHz to 4 GHz plot is the EUT fundamental at 2480 MHz.
4. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table below. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.
5. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Results:

Frequency (MHz)	Antenna Polarity	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
16979.459	Vertical	50.2	54.0	3.8	Complied

Transmitter Radiated Emissions (continued)



Transmitter Radiated Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	04 Nov 2013	12
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	100046K	14 Aug 2013	12
A1534	Pre-Amplifier	Hewlett Packard	8449B	3008A00405	04 Nov 2013	12
A1818	Antenna	EMCO	3115	00075692	04 Nov 2013	12
A253	Antenna	Flann Microwave	12240-20	128	04 Nov 2013	12
A254	Antenna	Flann Microwave	14240-20	139	04 Nov 2013	12
A255	Antenna	Flann Microwave	16240-20	519	04 Nov 2013	12
A256	Antenna	Flann Microwave	18240-20	400	04 Nov 2013	12
A436	Antenna	Flann Microwave	20240-20	330	04 Nov 2013	12
A1975	High Pass Filter	AtlanTecRF	AFH-03000	090424010	19 Apr 2014	12
M1656	Thermometer / Hygrometer station	JM Handelpunkt	30.5015.13	Not stated	24 May 2014	12

5.2.7. Transmitter Band Edge Radiated Emissions**Test Summary:**

Test Engineer:	Mark Percival	Test Date:	24 June 2013
Test Sample IMEI:	004402451217271		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	As detailed in ANSI C63.10 Sections 6.9.2

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	39

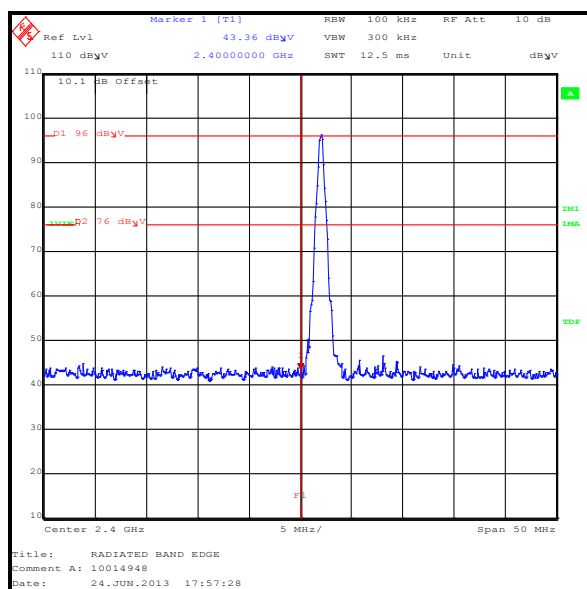
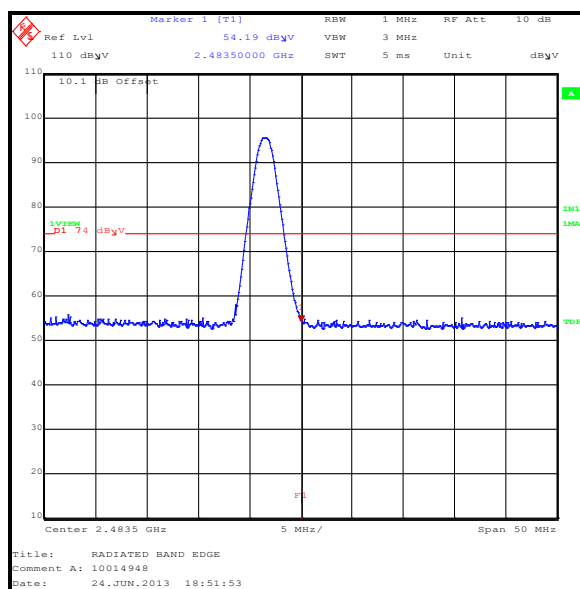
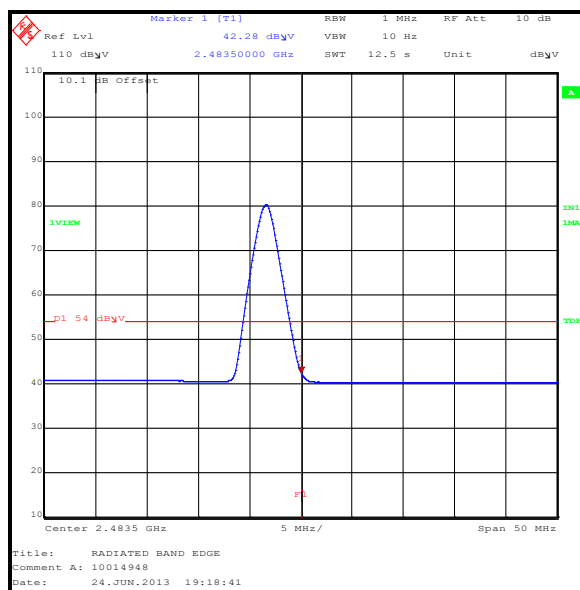
Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. * -20 dBc limit

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Horizontal	43.4	76.0*	32.6	Complied
2483.5	Horizontal	54.2	74.0	19.8	Complied

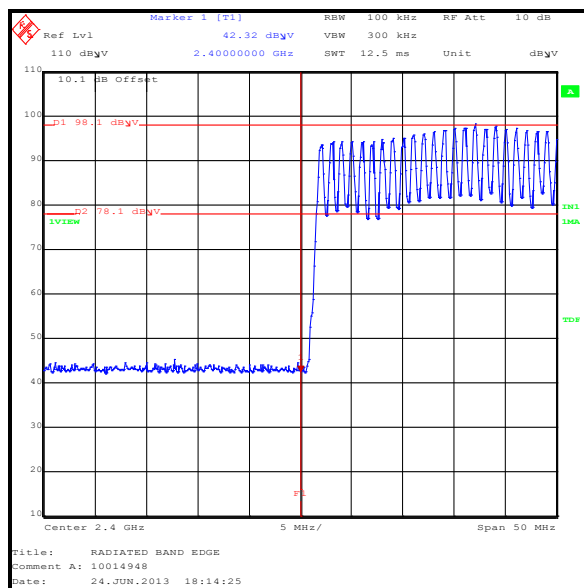
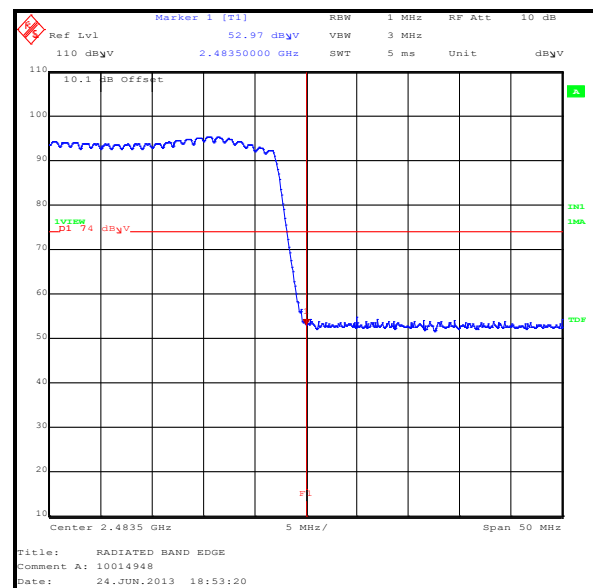
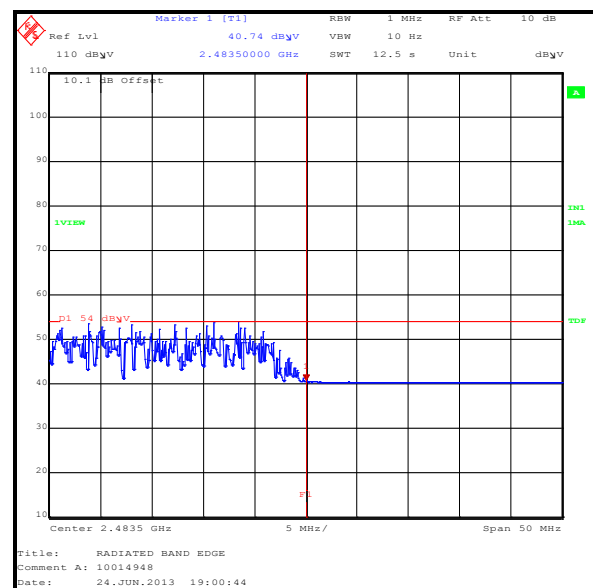
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Horizontal	42.3	54.0	11.7	Complied

**Lower Band Edge Peak Static****Upper Band Edge Peak Static****Upper Band Edge Average Static**

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Horizontal	42.3	78.1*	35.8	Complied
2483.5	Horizontal	53.0	74.0	21.0	Complied

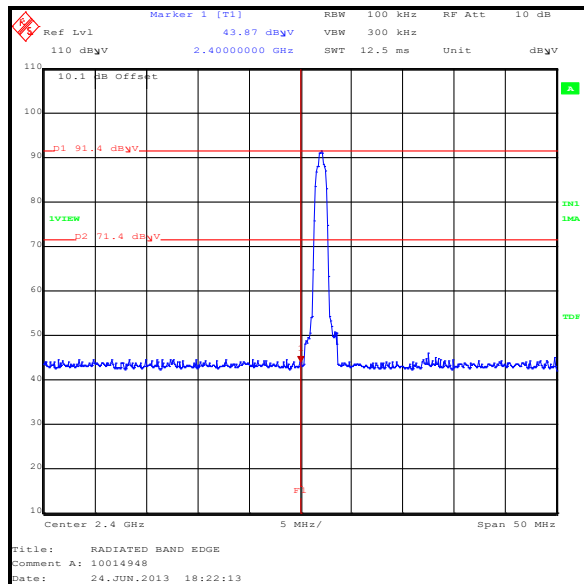
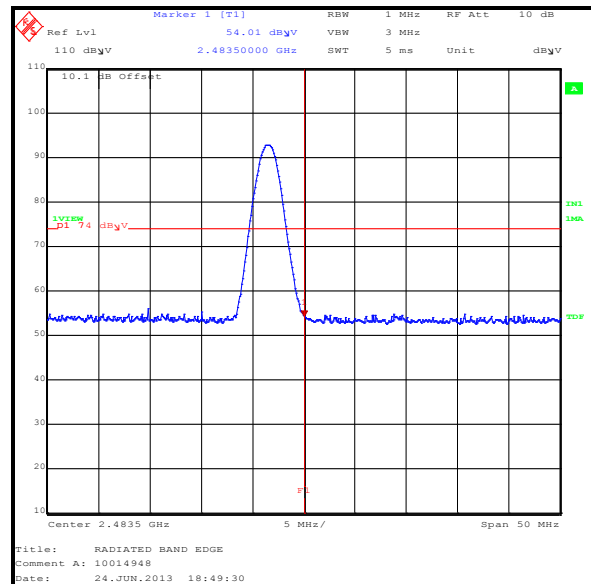
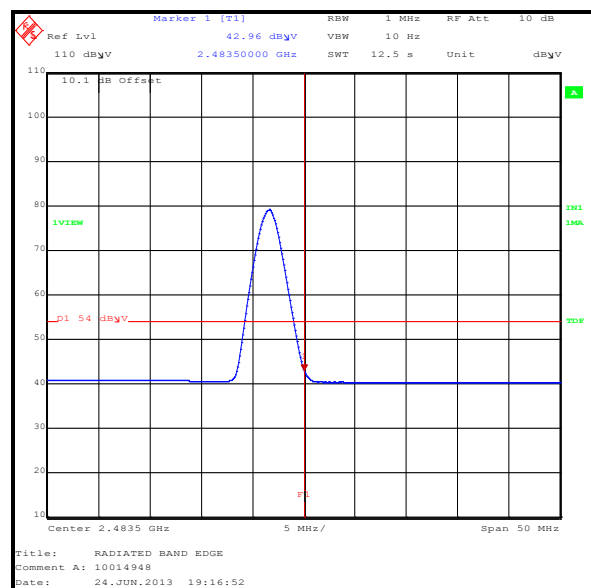
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Horizontal	40.7	54.0	13.3	Complied

**Lower Band Edge Peak Hopping****Upper Band Edge Peak Hopping****Upper Band Edge Average Hopping**

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 2DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Horizontal	43.9	71.4*	27.5	Complied
2483.5	Horizontal	54.0	74.0	20.0	Complied

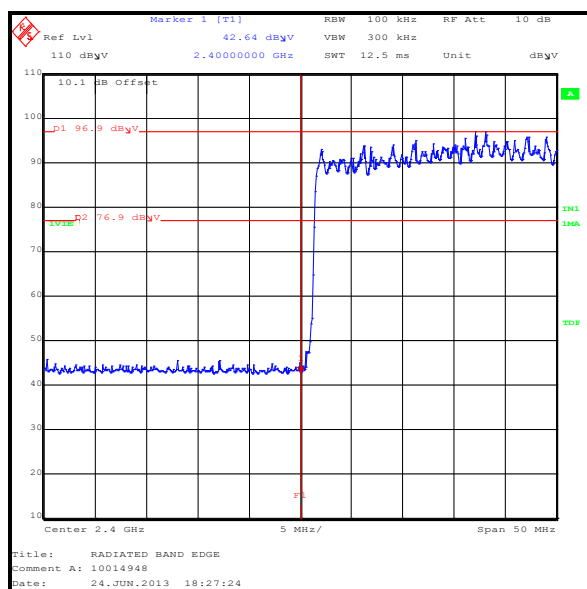
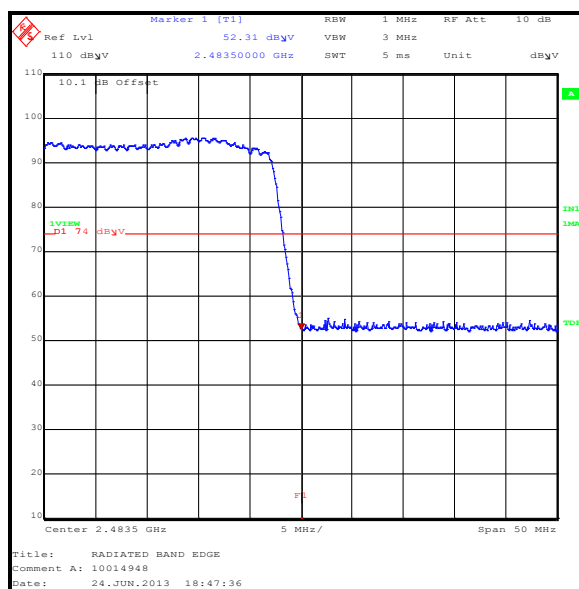
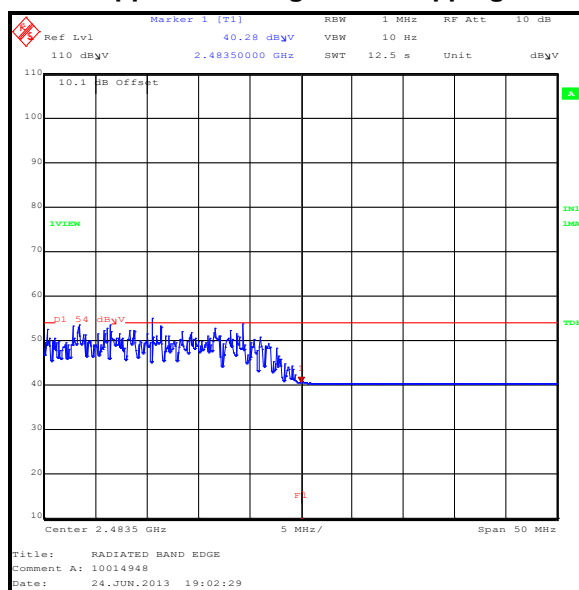
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Horizontal	43.0	54.0	11.0	Complied

**Lower Band Edge Peak Static****Upper Band Edge Peak Static****Upper Band Edge Average Static**

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 2DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Horizontal	42.6	76.9*	34.3	Complied
2483.5	Horizontal	52.3	74.0	21.7	Complied

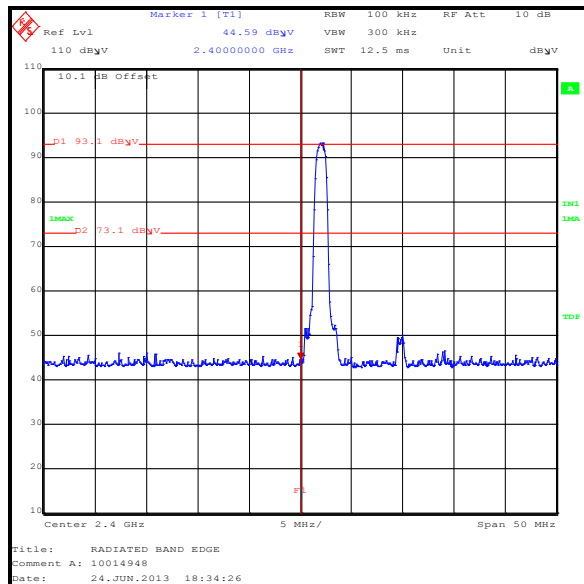
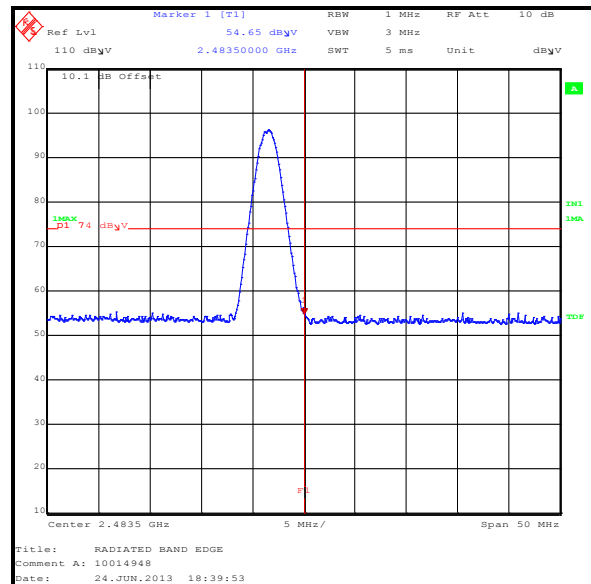
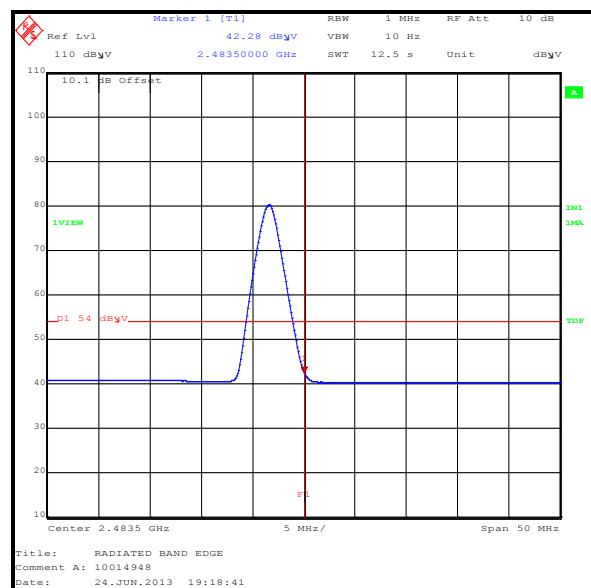
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Horizontal	40.3	54.0	13.7	Complied

**Lower Band Edge Peak Hopping****Upper Band Edge Peak Hopping****Upper Band Edge Average Hopping**

Transmitter Band Edge Radiated Emissions (continued)**Results: Static Mode / 3DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Horizontal	44.6	73.1*	28.5	Complied
2483.5	Horizontal	54.7	74.0	19.3	Complied

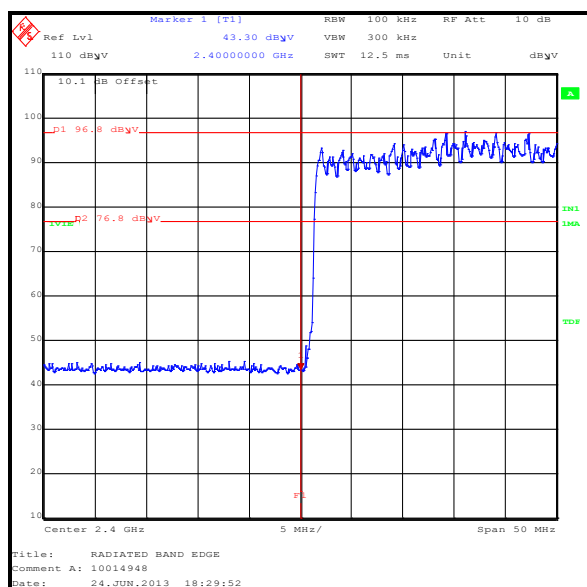
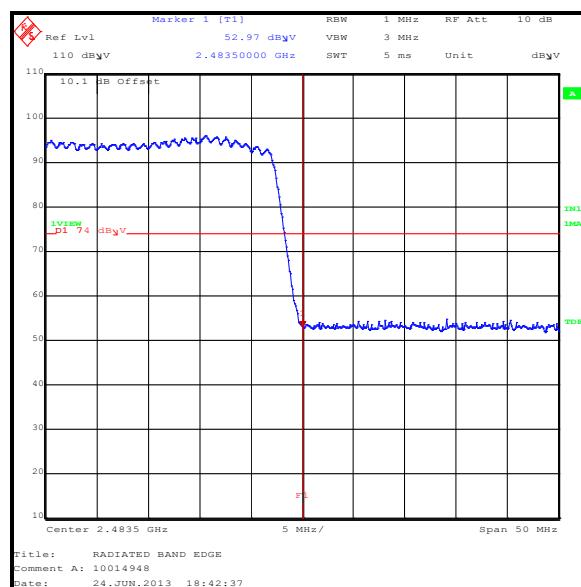
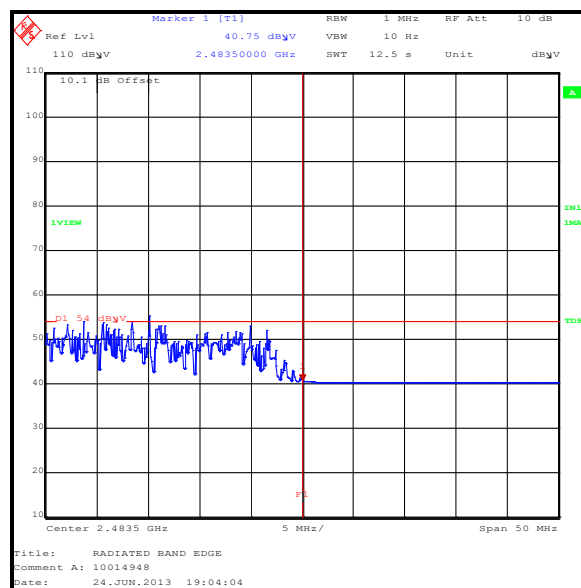
Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Horizontal	42.3	54.0	11.7	Complied

**Lower Band Edge Peak Static****Upper Band Edge Peak Static****Upper Band Edge Average Static**

Transmitter Band Edge Radiated Emissions (continued)**Results: Hopping Mode / 3DH5**

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2400.0	Horizontal	43.3	76.8*	33.5	Complied
2483.5	Horizontal	53.0	74.0	21.0	Complied

Frequency (MHz)	Antenna Polarity	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.5	Horizontal	40.8	54.0	13.2	Complied

**Lower Band Edge Peak Hopping****Upper Band Edge Peak Hopping****Upper Band Edge Average Hopping**

Transmitter Band Edge Radiated Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Month s)
M1656	Thermometer / Hygrometer station	JM Handelspunkt	30.5015.13	None stated	24 May 2014	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	04 Nov 2013	12
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	100046K	14 Aug 2013	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	04 Nov 2013	12
A1818	Antenna	EMCO	3115	00075692	04 Nov 2013	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	10 May 2014	12

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±4.69 dB
Maximum Peak Output Power	2.4 GHz to 2.4835 GHz	95%	±1.13 dB
Carrier Frequency Separation	2.4 GHz to 2.4835 GHz	95%	±0.92 ppm
Average Time of Occupancy	2.4 GHz to 2.4835 GHz	95%	±0.3 ns
20 dB Bandwidth	2.4 GHz to 2.4835 GHz	95%	±0.92 ppm
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±5.65 dB
Radiated Spurious Emissions	1 GHz to 26.5 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version
2.0	-	-	Minor admin updates
3.0	-	-	Model No. removed