



TEST REPORT

No. 114Z46714-EMC01

for

Sony Mobile Communications Inc.

GSM/WCDMA/LTE Mobile Phone

FCC ID: PY7PM-0820

with

Hardware Version: A

Software Version: 19.2.A.0.138

Issued Date: Jun. 18th, 2014

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAkks accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of the Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0) 10-62304633-2561, Fax: +86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

CONTENTS

1. TEST LABORATORY.....	3
1.1. TESTING LOCATION.....	3
1.2. TESTING ENVIRONMENT.....	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT.....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. GENERAL DESCRIPTION	6
3.5. EUT SET-UPS	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS.....	9
6.1. SUMMARY OF TEST RESULTS	9
6.2. STATEMENTS	9
7. TEST EQUIPMENTS UTILIZED.....	10
ANNEX A: MEASUREMENT RESULTS	11
A.1 OUTPUT POWER.....	11
A.2 EMISSION LIMIT	16
A.3 CONDUCTED EMISSION.....	20
A.4 FREQUENCY STABILITY	23
A.5 OCCUPIED BANDWIDTH	26
A.6 EMISSION BANDWIDTH.....	38
A.7 BAND EDGE COMPLIANCE	50
A.8 CONDUCTED SPURIOUS EMISSION	57
ANNEX B: TEST LAYOUT.....	80
ANNEX C: EUT PHOTOGRAPH.....	81

1. Test Laboratory

1.1. Testing Location

Location A

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan Bei Road, Haidian District, Beijing, P.R. China
Postal Code: 100191

Location B

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: Building Shouxiang, No.51, Xueyuan Road, Haidian District, Beijing, China
Postal Code: 100191

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%
Air pressure 980 - 1040 hPa

The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.


1.3. Project data

Receipt of Sample May. 29th, 2014
Testing Start Date: May. 30th, 2014
Testing End Date: Jun. 13th, 2014


1.4. Signature



Qu Pengfei
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Song Chongwen
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Sony Mobile Communications (China) Co. Ltd
Address /Post: Sony Mobile R&D Center, No. 16, Guangshun South Street,
Chaoyang District
City: Beijing
Postal Code: 100102
Country: China
Contact Person: Ma, Gang
Telephone: +86-10-58656312
Fax: +86-10-58659049

2.2. Manufacturer Information

Company Name: Sony Mobile Communications Inc.
Address /Post: 1-8-15 Konan, Minato-ku, Tokyo, 108-0075, Japan
City: Tokyo
Postal Code: 108-0075
Country: Japan

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM 850/900/1800/1900 quad bands, GPRS, EDGE, WCDMA FDD bands 1/2/5/8, HSDPA, HSUPA, LTE FDD bands 1/3/7/8/28 Bluetooth (EDR and BLE), ANT+, WLAN (802.11 b/g/n), NFC, FM, GPS mobile phone
FCC ID	PY7PM-0820
GSM Frequency Band	GSM 850/900/1800/1900
UMTS Frequency Band	FDD Band 1 / FDD Band 2 / FDD Band 5 / FDD Band 8
LTE Frequency Band	FDD Band 1 / FDD Band 3 / FDD Band 7 / FDD Band 8 / FDD Band 28
Antenna	Internal
Power supply	Battery (charged by travel adapter or vehicle charger)
Extreme vol. Limits	3.6VDC to 4.2VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People’s Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN	IMEI	HW Version	SW Version
EUT8	CB5A1ZDQPP	004402452817731	A	19.2.A.0.138
#25018	CB5A1ZDQQX	00440245-281875-4	A	19.2.A.0.189
#25043	CB5A1ZDQND	00440245-281795-4	A	19.2.A.0.189
#25070	CB5A1ZDRLF	00440245-281793-9	A	19.2.A.0.189

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Revision
AE12	Travel Charger	32301286SEM0600.1	1C
AE10	USB Cable	/	1
#23086	Travel Charger	8512W32101941	RTL
#24004	USB Cable	123307D400366C8	RTL

AE12

Commercial name	EP880
Type	AC-0400-EU
Manufacturer	SALCOMP
Length of cable	98.5 cm (length of USB cable)

AE10

Commercial name EC801
Type AI-0401
Manufacturer Sony Mobile
Length of cable 98.5 cm

#23086

Commercial name EP880
Type AC-0400-EU
Manufacturer SALCOMP
Length of cable 98.5 cm (length of USB cable)

#24004

Commercial name EC801
Type AI-0401
Manufacturer Sony Mobile
Length of cable 98.5 cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of GSM/WCDMA/LTE Mobile Phone with integrated antenna and embedded battery.

The EUT supports GSM 850/900/1800/1900MHz bands, WCDMA FDD bands 1/2/5/8 and LTE FDD bands 1/3/7/8/28. It supports GPRS service with multi-slots class 33 and EGPRS service with multi-slots class 33. The HSDPA (Cat 24) and HSUPA (Cat 6) features are also supported.

It has MP3, camera, USB memory, FM radio, GPS receiver, NFC, Bluetooth (EDR, BLE), ANT+, WLAN (802.11 b/g/n) and Wi-Fi hotspot functions. For WLAN 802.11n, it supports 20MHz bandwidth on both 2.4GHz band.

It consists of normal options: USB cable and travel charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. EUT set-ups

EUT Set-up No.	Combination of EUT and AE	Remarks
Set.7	EUT8 + AE12 + AE10	1900MHz, Tests with travel charger
Set.8	EUT8	1900MHz, ERP/EIRP/RSE tests
		1900MHz, Conducted RF tests
Set.11	#25018+#23086+#24004	850MHz, Tests with travel charger
Set.12	#25070	850MHz, ERP/EIRP/RSE tests
Set.13	#25043	850MHz, Conducted RF tests

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15	Radio frequency devices	10-1-13 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-13 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-13 Edition
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber FAC-3 (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

6.1. Summary of test results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

GSM 850

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Output Power	22.913(a)	A.1	P	B
2	Emission Limit	22.917, 2.1051	A.2	P	B
3	Conducted Emission	15.107/207	A.3	P	A
4	Frequency Stability	22.355, 2.1055	A.4	P	B
5	Occupied Bandwidth	2.1049(h)(i)	A.5	P	B
6	Emission Bandwidth	22.917(b)	A.6	P	B
7	Band Edge Compliance	22.917(b)	A.7	P	B
8	Conducted Spurious Emission	22.917, 2.1057	A.8	P	B

PCS 1900

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Output Power	24.232(c)	A.1	P	B
2	Emission Limit	24.238, 2.1051	A.2	P	B
3	Conducted Emission	15.107/207	A.3	P	A
4	Frequency Stability	24.235, 2.1055	A.4	P	B
5	Occupied Bandwidth	2.1049(h)(i)	A.5	P	B
6	Emission Bandwidth	24.238(b)	A.6	P	B
7	Band Edge Compliance	24.238(b)	A.7	P	B
8	Conducted Spurious Emission	24.238, 2.1057	A.8	P	B

6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by TMC according to the standards or reference documents in section 4.1.

The EUT met all applicable requirements of the standards or reference documents in section 4.1. This report only deals with the GSM/GPRS/EGPRS functions among the features described in section 3.

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1.	Test Receiver	ESCI	100344	R&S	2015-03-03
2.	Spectrum Analyzer	E4440A	MY48250642	Agilent	2015-02-27
3.	LISN	ESH2-Z5	829991/012	R&S	2015-04-14
4.	EMI Antenna	VULB 9163	9163-235	Schwarzbeck	2014-09-28
5.	EMI Antenna	3117	00058889	ETS-Lindgren	2014-12-20
6.	EMI Antenna	3117	00119024	ETS-Lindgren	2016-01-20
7.	EMI Antenna	9117	177	Schwarzbeck	2014-06-29
8.	Signal Generator	N5183A	MY49060052	Agilent	2015-03-02
9.	Power Amplifier	5S1G4	0341863	AR	2016-03-01
10.	Universal Radio Communication Tester	E5515C	MY48361083	Agilent	2015-02-27
11.	Universal Radio Communication Tester	E5515C	MY48363198	Agilent	2014-07-07
12.	Universal Radio Communication Tester	CMW500	143008	R&S	2014-12-09

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

Reference

FCC: CFR Part 22.913(a), 24.232(c).

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU200) to ensure max power transmission and proper modulation.

This result contains peak output power and ERP/EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

A.1.2 Conducted Power

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with spectrum analyzer's peak detector.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each band: 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band.

GSM850

Limit

	Power step	Nominal Peak output power (dBm)	Tolerance (dB)	Target (dBm)
GSM	5	33dBm(2W)	± 2	33±1
GPRS	3	33dBm(2W)	± 2	33±1
EGPRS	6	33dBm(2W)	± 2	33±1

Measurement result

GSM (GMSK)

Frequency(MHz)	Power Step	Peak output power(dBm)
824.2	5	33.17
836.6	5	33.25
848.8	5	33.29

GPRS (GMSK, Time Slot 1)

Frequency(MHz)	Power Step	Peak output power(dBm)
824.2	3	33.16
836.6	3	33.24
848.8	3	33.31

EGPRS (8PSK, Time Slot 1)

Frequency(MHz)	Power Step	Peak output power(dBm)
824.2	6	27.41
836.6	6	27.04
848.8	6	27.12

Note: Expanded measurement uncertainty for GSM850 is $U = 0.52$ dB, $k = 2$.

PCS1900

Limit

	Power step	Nominal Peak output power (dBm)	Tolerance (dB)	Target (dBm)
GSM	0	30dBm(1W)	± 2	30 \pm 1
GPRS	3	30dBm(1W)	± 2	30 \pm 1
EGPRS	5	30dBm(1W)	± 2	30 \pm 1

Measurement result

GSM (GMSK)

Frequency(MHz)	Power Step	Peak output power(dBm)
1850.2	0	30.96
1880.0	0	30.99
1909.8	0	30.98

GPRS (GMSK, Time Slot 1)

Frequency(MHz)	Power Step	Peak output power(dBm)
1850.2	3	30.96
1880.0	3	30.97
1909.8	3	30.98

EGPRS (8PSK, Time Slot 1)

Frequency(MHz)	Power Step	Peak output power(dBm)
1850.2	5	26.69
1880.0	5	26.71
1909.8	5	26.64

Note: Expanded measurement uncertainty for PCS1900 is $U = 0.83$ dB, $k = 2$.

A.1.3 Radiated Power

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(c) specifies "Mobile and portable stations are limited to 2 watts EIRP" and 24.232(e) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

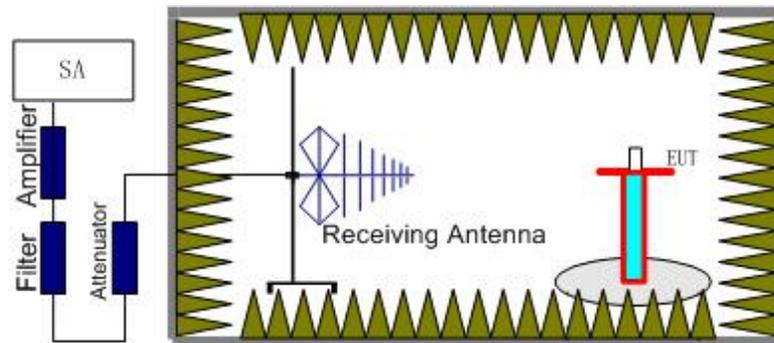

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

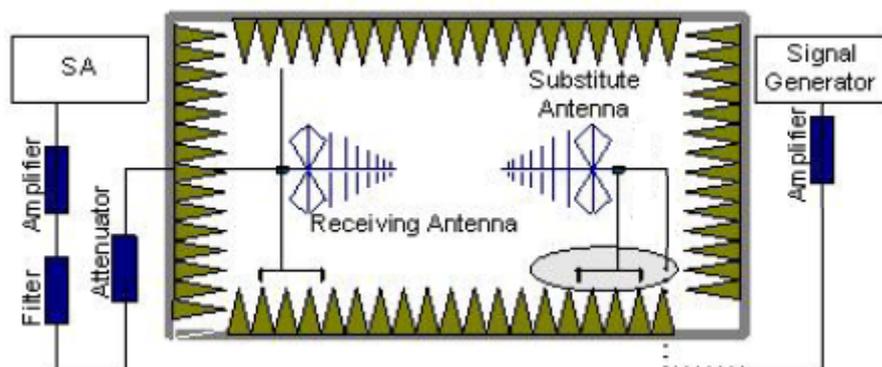

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.
The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (Unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15$.

For test layout photo, please refer to Pic.1 in Annex B.

GSM 850- ERP 22.913(a)

Limits

	Power Step	Burst Peak ERP (dBm)
GSM	5	≤38.45dBm (7W)
GPRS	3	≤38.45dBm (7W)
EGPRS	6	≤38.45dBm (7W)

Measurement result

GSM (GMSK)

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	P_{Ag} (dB)	G_a (dBi)	Correction (dB)	Peak ERP(dBm)	Polarization
824.2	-19.06	2.07	-53.00	0.84	2.15	28.88	Horizontal
836.6	-17.94	2.08	-53.00	0.90	2.15	29.93	Horizontal
848.8	-19.00	2.09	-53.00	0.95	2.15	28.81	Horizontal

GPRS (GMSK)

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	P_{Ag} (dB)	G_a (dBi)	Correction (dB)	Peak ERP(dBm)	Polarization
824.2	-19.62	2.07	-53.00	0.84	2.15	28.32	Horizontal
836.6	-17.86	2.08	-53.00	0.90	2.15	30.01	Horizontal
848.8	-19.11	2.09	-53.00	0.95	2.15	28.70	Horizontal

EGPRS (8PSK)

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	P_{Ag} (dB)	G_a (dBi)	Correction (dB)	Peak ERP(dBm)	Polarization
824.2	-25.85	2.07	-53.00	0.84	2.15	22.09	Horizontal
836.6	-24.61	2.08	-53.00	0.90	2.15	23.26	Horizontal
848.8	-24.32	2.09	-53.00	0.95	2.15	23.49	Horizontal

Sample calculation: GPRS, 836.60MHz

$$\text{Peak ERP(dBm)} = P_{\text{Mea}}(-17.86 \text{ dBm}) - G_a(0.90 \text{ dBi}) - P_{\text{Ag}}(-53.00 \text{ dB}) - P_{\text{cl}}(2.08 \text{ dB}) - 2.15 \text{ dB} \\ = 30.01 \text{ dBm}$$

ANALYZER SETTINGS: RBW = VBW = 3MHz

Note: Expanded measurement uncertainty for GSM850 is $U = 0.96\text{dB}$, $k = 2$.

PCS1900- EIRP 24.232(c)

Limits

	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)
GPRS	3	≤33dBm (2W)
EGPRS	5	≤33dBm (2W)

Measurement result

GSM (GMSK)

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	P_{Ag} (dB)	G_a (dBi)	Peak EIRP(dBm)	Polarization
1850.20	-20.99	3.19	-50.00	-4.56	30.38	Horizontal
1880.00	-20.42	3.11	-50.00	-4.43	30.90	Horizontal
1909.80	-19.39	3.18	-50.00	-4.30	31.73	Horizontal

GPRS (GMSK)

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	P_{Ag} (dB)	G_a (dBi)	Peak EIRP(dBm)	Polarization
1850.20	-20.98	3.19	-50.00	-4.56	30.39	Horizontal
1880.00	-20.44	3.11	-50.00	-4.43	30.88	Horizontal
1909.80	-19.50	3.18	-50.00	-4.30	31.62	Horizontal

EGPRS (8PSK)

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	P_{Ag} (dB)	G_a (dBi)	Peak EIRP(dBm)	Polarization
1850.20	-24.46	3.19	-50.00	-4.56	26.91	Horizontal
1880.00	-24.34	3.11	-50.00	-4.43	26.98	Horizontal
1909.80	-23.27	3.18	-50.00	-4.30	27.85	Horizontal

Sample calculation: GSM, 1909.80MHz

$$\text{Peak EIRP(dBm)} = P_{\text{Mea}}(-19.39 \text{ dBm}) - G_a(-4.30 \text{ dBi}) - P_{\text{Ag}}(-50.00 \text{ dB}) - P_{\text{cl}}(3.18 \text{ dB}) = 31.73 \text{ dBm}$$

ANALYZER SETTINGS: RBW = VBW = 3MHz

Note: Expanded measurement uncertainty for PCS1900 is $U = 1.07 \text{ dB}$, $k = 2$.

A.2 EMISSION LIMIT

Reference

FCC: CFR 2.1051, Part 22.917(a), 24.238(a).


A.2.1 Measurement Method

The measurements procedures in TIA-603C-2004 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the PCS1900 band, GSM850 band.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

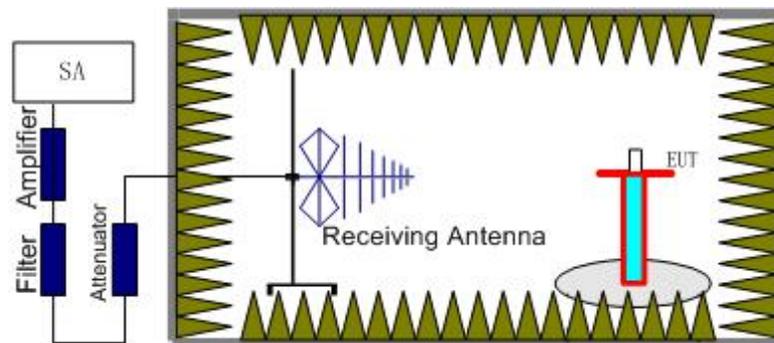

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

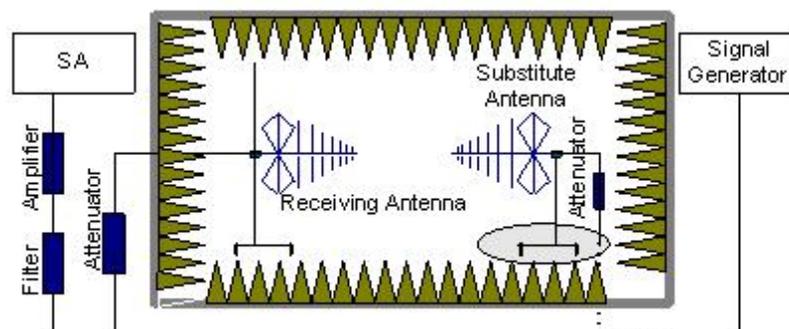

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.
An amplifier should be connected in for the test.
The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.
The measurement results are obtained as described below:
Power (EIRP)= $P_{Mea} + P_{pl} + G_a$
5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dB$.

A.2.2 Measurement Limit

Part 24.238 specifies that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz and 848.8MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM850 or PCS1900 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

GSM Mode Channel 128/824.2MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1648.50	-49.76	2.91	-5.45	2.15	-49.37	-13.00	Horizontal
2472.57	-46.86	3.56	-5.32	2.15	-47.25	-13.00	Horizontal
3300.00	-52.97	4.20	-7.42	2.15	-51.90	-13.00	Vertical
4122.12	-52.52	4.68	-8.57	2.15	-50.78	-13.00	Horizontal
4945.00	-50.85	5.11	-9.60	2.15	-48.51	-13.00	Vertical
5772.04	-48.81	5.68	-10.11	2.15	-46.53	-13.00	Vertical

GSM Mode Channel 190/836.6MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1673.22	-44.43	2.97	-5.34	2.15	-44.21	-13.00	Horizontal
2509.88	-42.35	3.59	-5.43	2.15	-42.66	-13.00	Vertical
3349.68	-53.59	4.24	-7.54	2.15	-52.44	-13.00	Vertical
4186.79	-52.65	4.67	-8.61	2.15	-50.86	-13.00	Horizontal
5019.97	-50.34	5.16	-9.71	2.15	-47.94	-13.00	Vertical
5858.25	-49.47	5.67	-10.14	2.15	-47.15	-13.00	Horizontal

GSM Mode Channel 251/848.8MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1697.61	-47.74	2.95	-5.23	2.15	-47.61	-13.00	Horizontal
2546.25	-39.67	3.63	-5.52	2.15	-39.93	-13.00	Vertical
3398.05	-53.64	4.22	-7.66	2.15	-52.35	-13.00	Horizontal
4246.62	-51.90	4.77	-8.65	2.15	-50.17	-13.00	Horizontal
5093.63	-51.05	5.20	-9.76	2.15	-48.64	-13.00	Horizontal
5942.72	-49.44	5.52	-10.18	2.15	-46.93	-13.00	Horizontal

GSM Mode Channel 512/1850.2MHz

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	G _a (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarity
3700.30	-42.02	4.44	-8.14	-38.32	-13.00	Horizontal
5550.54	-37.03	5.46	-10.02	-32.47	-13.00	Vertical
8481.82	-58.11	6.98	-12.19	-52.90	-13.00	Horizontal
9570.97	-57.46	7.75	-12.57	-52.64	-13.00	Vertical
10930.07	-55.88	8.42	-12.41	-51.89	-13.00	Vertical
13626.63	-50.98	9.21	-13.85	-46.34	-13.00	Horizontal

GSM Mode Channel 661/1880.0MHz

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	G _a (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarity
3759.70	-39.84	4.52	-8.21	-36.15	-13.00	Horizontal
5640.27	-39.52	5.45	-10.06	-34.91	-13.00	Vertical
7973.39	-57.92	7.01	-11.87	-53.06	-13.00	Horizontal
9556.05	-57.55	7.77	-12.58	-52.74	-13.00	Vertical
12123.56	-56.07	8.81	-12.55	-52.33	-13.00	Horizontal
14728.78	-49.67	9.46	-13.55	-45.58	-13.00	Vertical

GSM Mode Channel 810/1909.8MHz

Frequency (MHz)	P _{Mea} (dBm)	P _{pl} (dB)	G _a (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarity
3819.65	-44.40	4.49	-8.28	-40.61	-13.00	Horizontal
5729.16	-44.83	5.55	-10.09	-40.29	-13.00	Vertical
7597.82	-57.06	6.89	-11.50	-52.45	-13.00	Horizontal
8492.06	-55.92	7.02	-12.20	-50.74	-13.00	Horizontal
11903.30	-53.01	8.57	-12.48	-49.10	-13.00	Vertical
13665.73	-52.23	8.98	-13.87	-47.34	-13.00	Vertical

Note: Expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

A.3 CONDUCTED EMISSION

Reference

FCC: CFR Part 15.107/207.

The measurement procedure in ANSI C63.4-2009 is used. Conducted Emission is measured with travel charger. The EUT is working under GSM 850/1900MHz traffic mode which is the worst case of conducted emission measurement.

For test layout photo, please refer to Pic.2 in Annex B.


A.3.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

A.3.2 Measurement result

GSM 850MHz

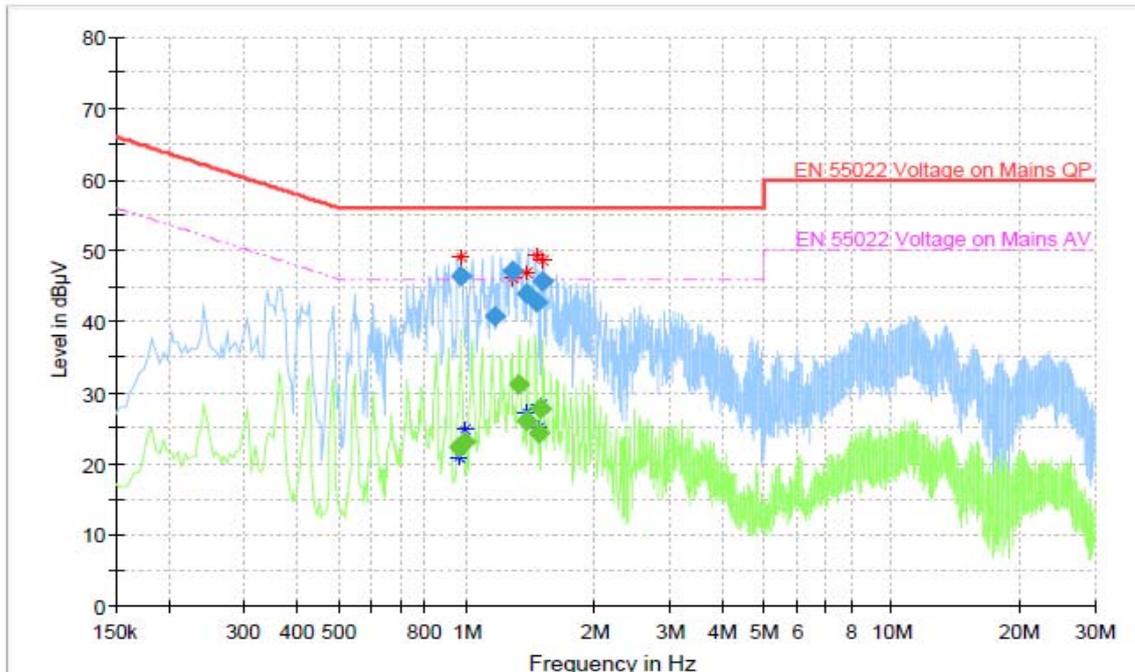

IF bandwidth 9 kHz

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

 =PK value in pre-measurement


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.967702	46.5	GND	L1	10.1	9.5	56.0
1.164135	40.6	GND	L1	10.1	15.4	56.0
1.277471	47.2	GND	L1	10.1	8.8	56.0
1.388375	44.0	GND	L1	10.1	12.0	56.0
1.464385	42.7	GND	L1	10.1	13.3	56.0
1.514000	45.6	GND	L1	10.1	10.4	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.955288	22.3	GND	L1	10.1	23.7	46.0
0.986154	23.1	GND	L1	10.1	22.9	46.0
1.326788	31.2	GND	L1	10.1	14.8	46.0
1.380731	26.0	GND	L1	10.1	20.0	46.0
1.484000	24.3	GND	L1	10.1	21.7	46.0
1.500442	27.6	GND	L1	10.1	18.4	46.0

PCS 1900MHz

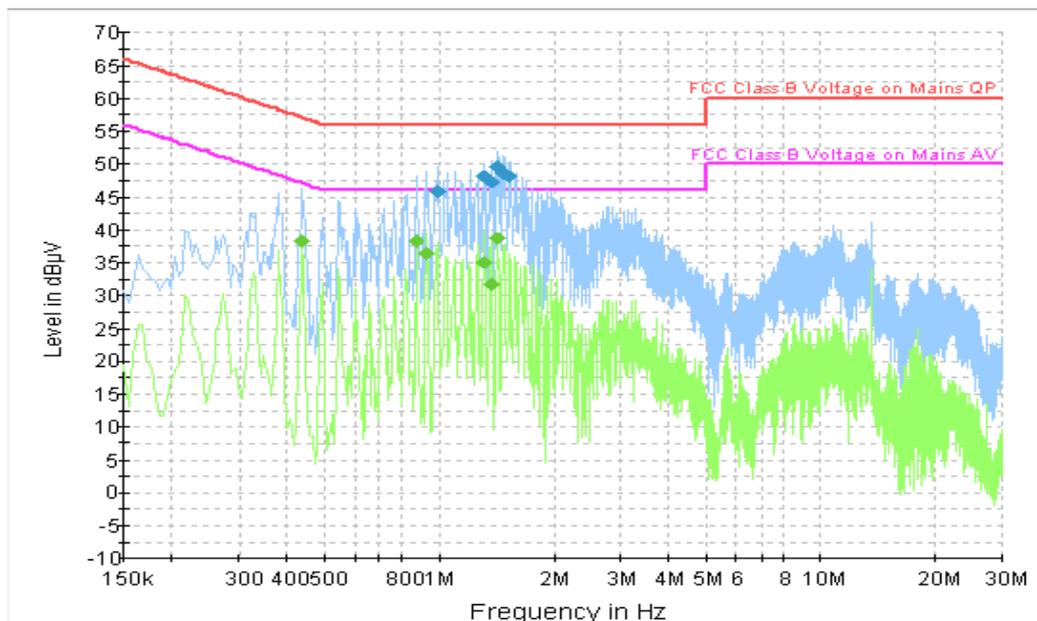

IF bandwidth 9 kHz

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.991500	45.9	GND	L1	9.7	10.1	56.0
1.315500	48.1	GND	L1	9.7	7.9	56.0
1.374000	47.4	GND	L1	9.7	8.6	56.0
1.428000	49.6	GND	L1	9.7	6.4	56.0
1.477500	48.8	GND	L1	9.7	7.2	56.0
1.536000	48.2	GND	L1	9.7	7.8	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.438000	38.4	GND	L1	9.8	8.7	47.1
0.874500	38.3	GND	L1	9.7	7.7	46.0
0.933000	36.4	GND	L1	9.7	9.6	46.0
1.315500	35.1	GND	L1	9.7	10.9	46.0
1.374000	31.7	GND	L1	9.7	14.3	46.0
1.423500	38.6	GND	L1	9.7	7.4	46.0

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 2.9$ dB, $k=2$.

A.4 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 22.355, 24.235.

A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900, channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.4.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.2VDC, with a nominal voltage of 4.2VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -5.4% to 10.8%. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.3 Measurement results

GSM 850

Room Temperature: 24 °C

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
4.2	10	0.01
3.8	5	0.01
3.6	8	0.01

Frequency Error vs Temperature

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
50°	-15	0.02
40°	-18	0.02
30°	-1	0.00
20°	-2	0.00
10°	-17	0.02
0°	-22	0.03
- 10°	-16	0.02
- 20°	-32	0.04
- 30°	-2	0.00

Expanded measurement uncertainty for this test item is 10 Hz, $k=2$

PCS 1900

Room Temperature: 24°C

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.8	54	0.029
4.2	51	0.027
3.6	56	0.030

Frequency Error vs Temperature

Temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
50°	47	0.025
40°	55	0.029
30°	52	0.028
20°	48	0.026
10°	65	0.035
0°	47	0.025
- 10°	49	0.026
- 20°	55	0.029
- 30°	49	0.026

Expanded measurement uncertainty for this test item is 10 Hz, $k = 2$.

A.5 OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049(h)(i).

A.5.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

Measurement Parameters:

RBW = 5 kHz, VBW = 20 kHz


GSM 850(99% BW) per FCC rules

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	242.788
836.6	245.192
848.8	242.788


Expanded measurement uncertainty for this test item is 1.1 kHz, $k=2$.

GSM 850


Channel 128-Occupied Bandwidth (99% BW)

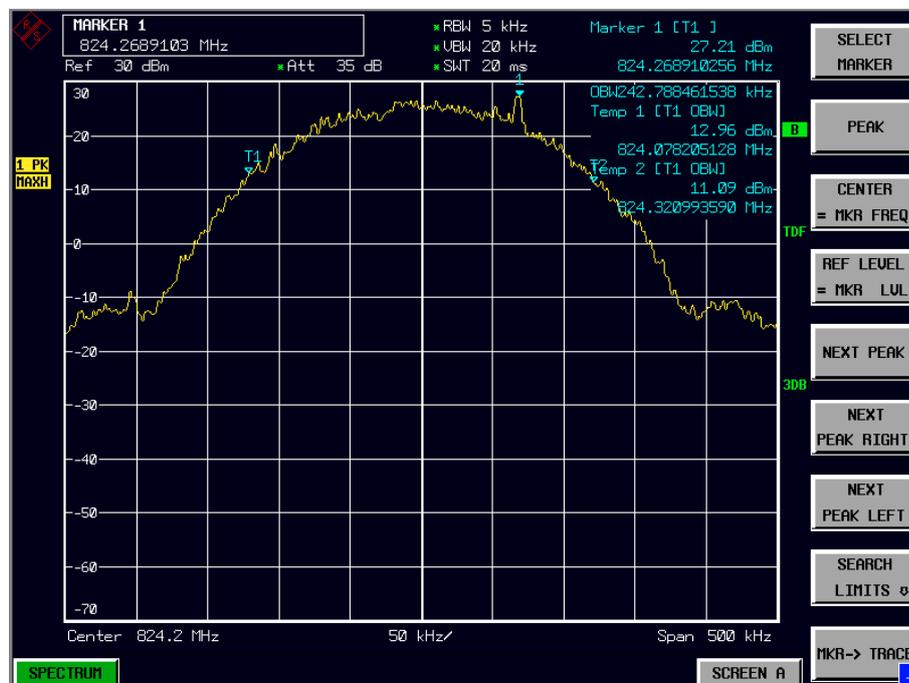

Channel 190-Occupied Bandwidth (99% BW)

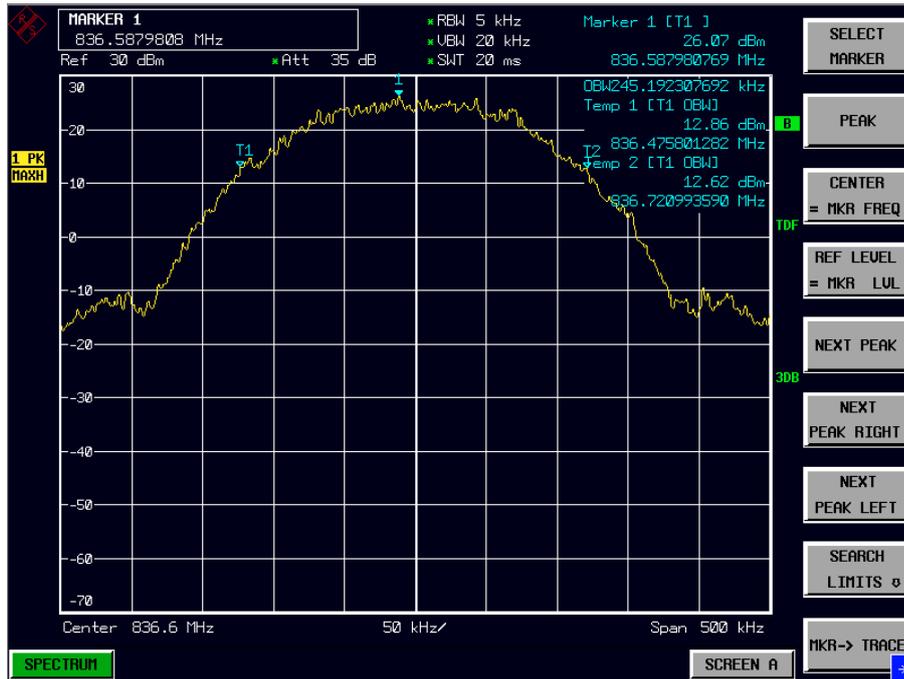

Channel 251-Occupied Bandwidth (99% BW)

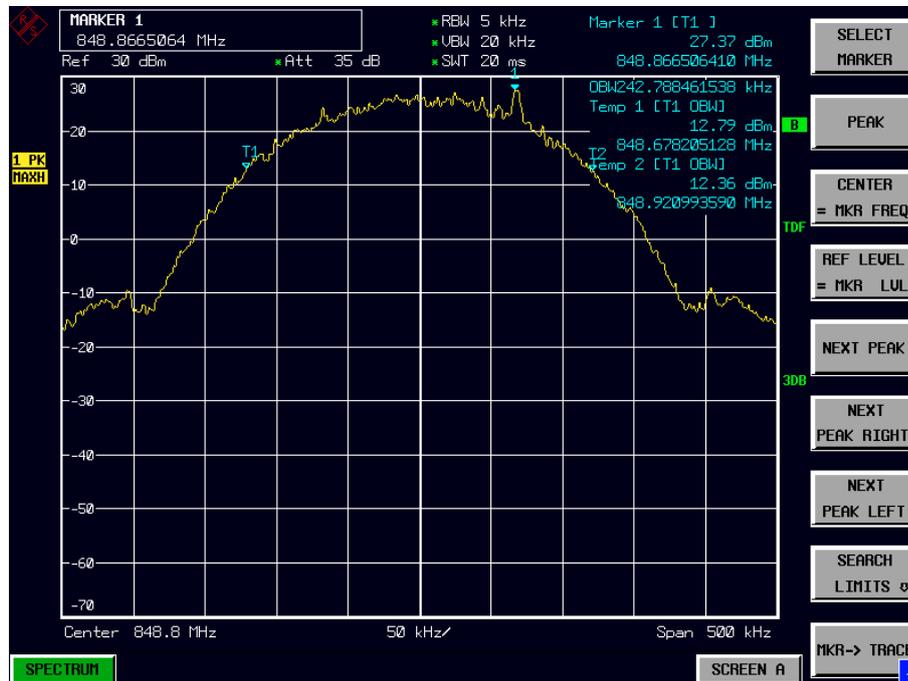


GPRS 850(99% BW) per FCC rules

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	244.391
836.6	243.589
848.8	242.788


Expanded measurement uncertainty for this test item is 1.1 kHz, k=2

GPRS 850


Channel 128-Occupied Bandwidth (99% BW)

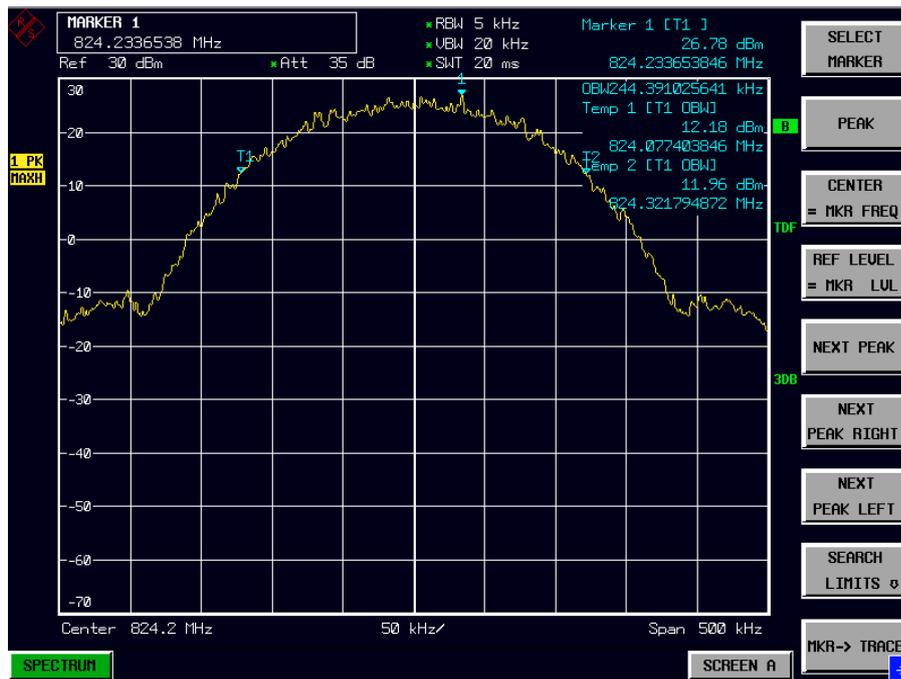

Channel 190-Occupied Bandwidth (99% BW)

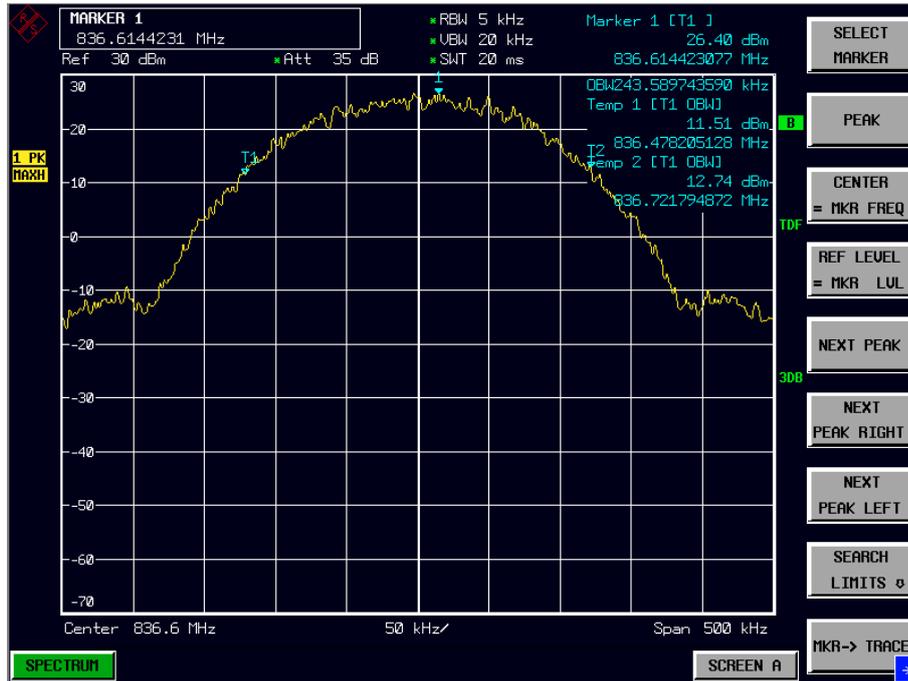

Channel 251-Occupied Bandwidth (99% BW)

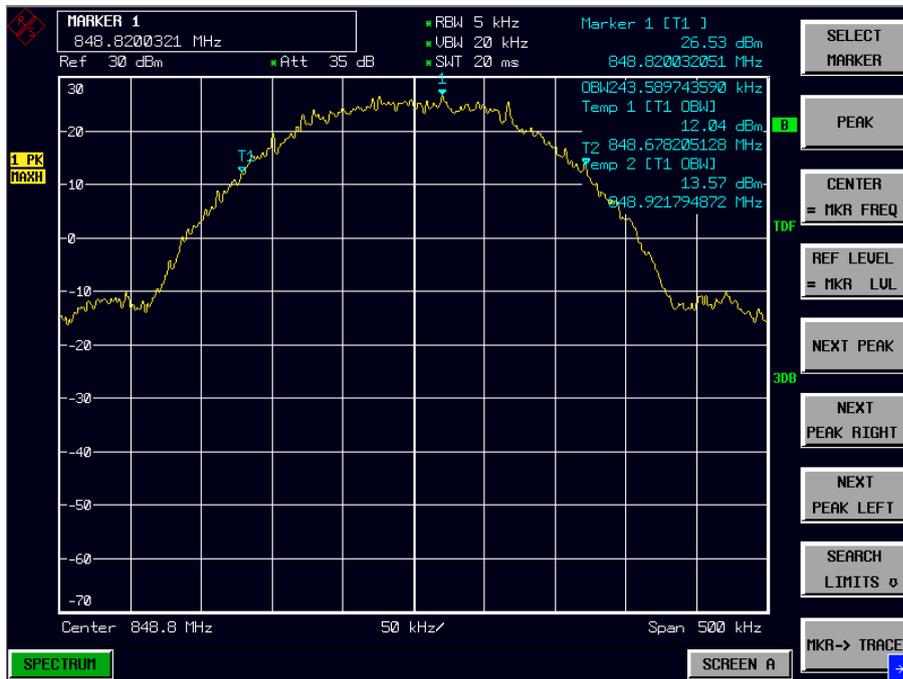


EGPRS 850(99% BW) per FCC rules

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
824.2	245.993
836.6	244.391
848.8	244.391


Expanded measurement uncertainty for this test item is 1.1 kHz, $k=2$

EGPRS 850


Channel 128-Occupied Bandwidth (99% BW)

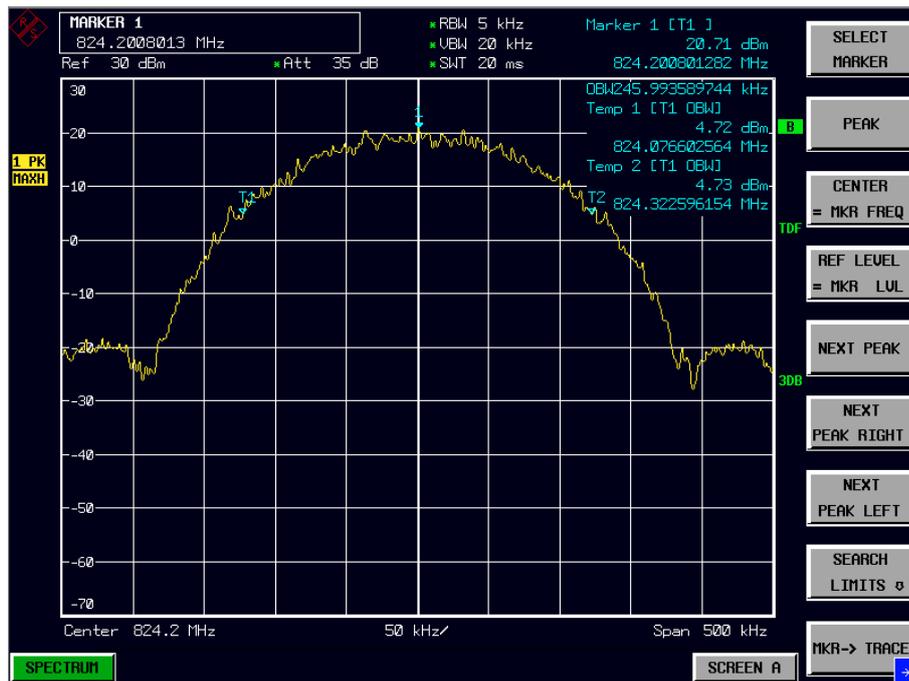

Channel 190-Occupied Bandwidth (99% BW)

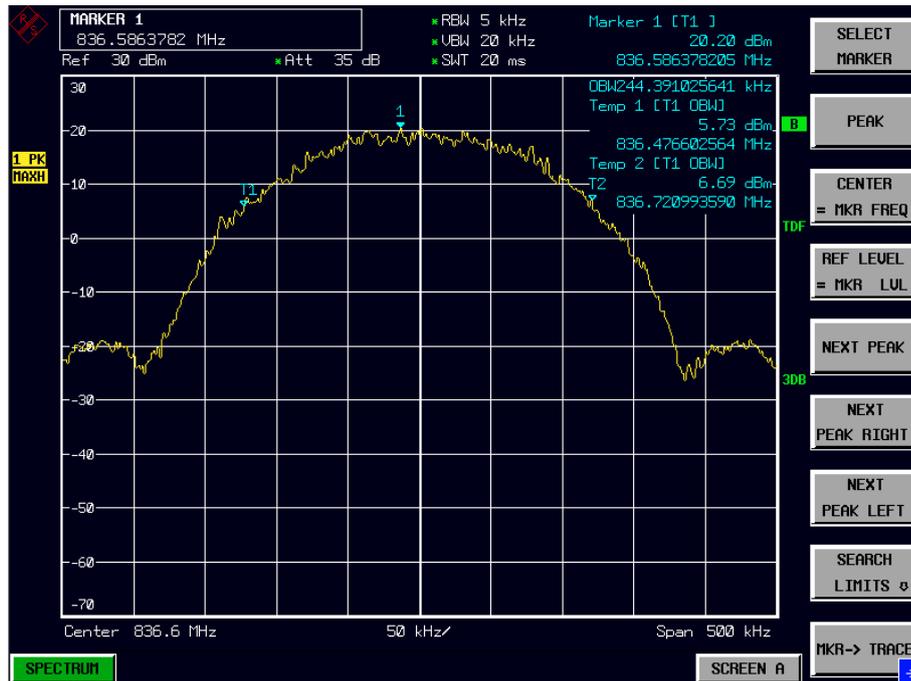

Channel 251-Occupied Bandwidth (99% BW)

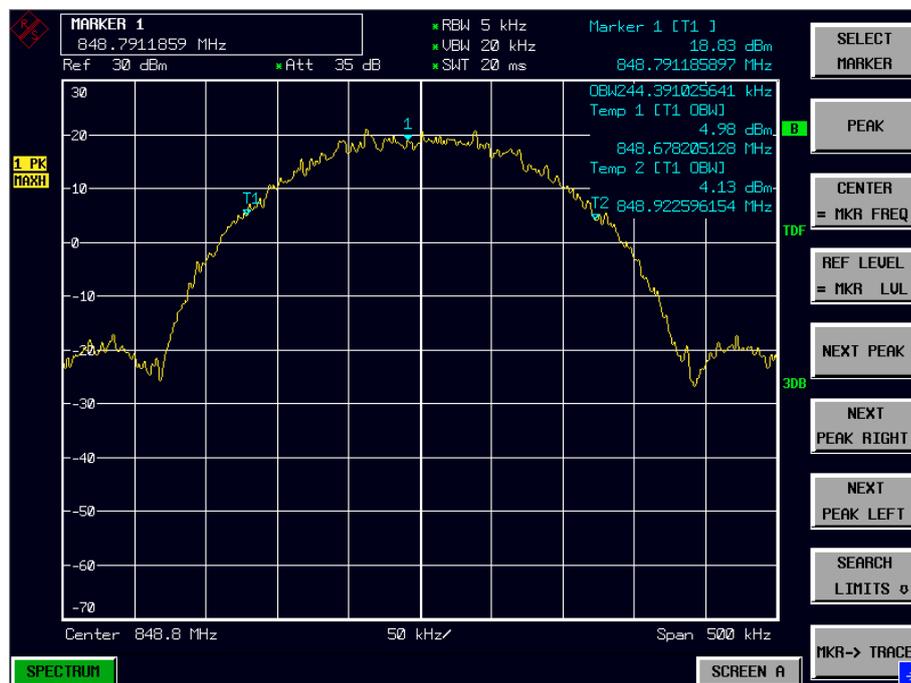


PCS 1900(99% BW) per FCC rules

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	244.391
1880.0	244.391
1909.8	243.590

Expanded measurement uncertainty for this test item is 1.1 kHz, $k=2$


PCS 1900

Channel 512-Occupied Bandwidth (99% BW)

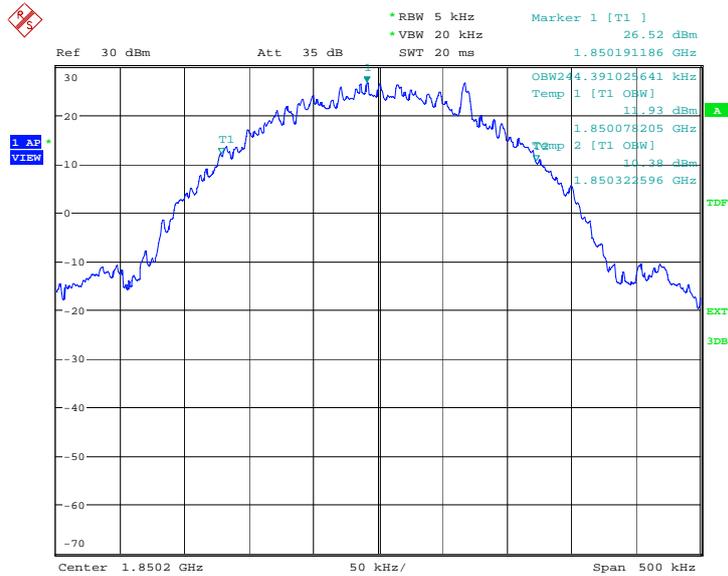


Date: 10.JUN.2014 10:48:23

Channel 661-Occupied Bandwidth (99% BW)

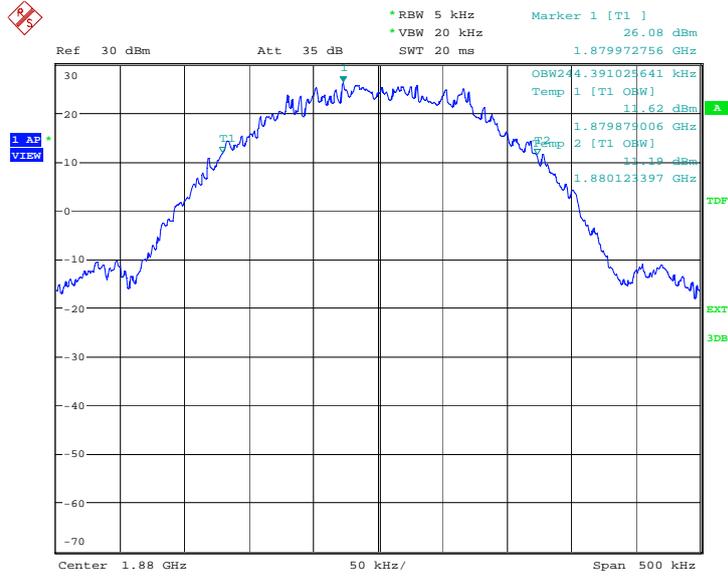

Date: 10.JUN.2014 10:48:55

Channel 810-Occupied Bandwidth (99% BW)

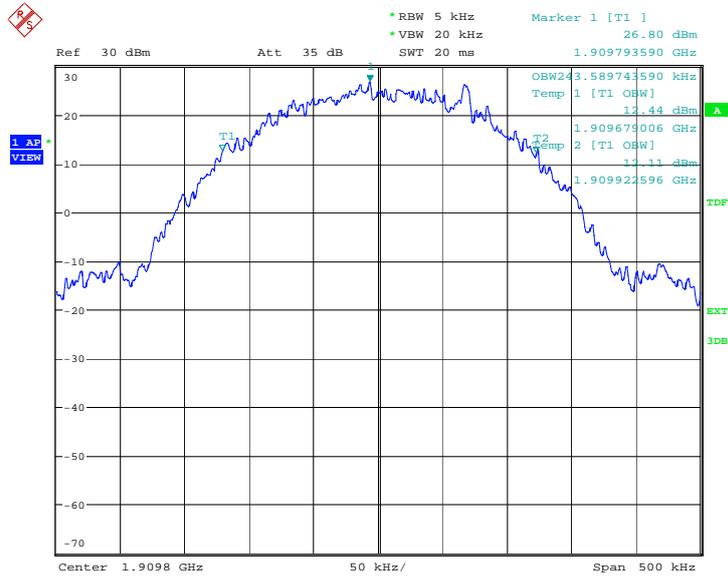


Date: 10.JUN.2014 10:49:27

GPRS 1900(99% BW) per FCC rules

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	245.192
1880.0	244.391
1909.8	243.590


Expanded measurement uncertainty for this test item is 1.1 kHz, $k=2$

**GPRS 1900
Channel 512-Occupied Bandwidth 99% BW)**

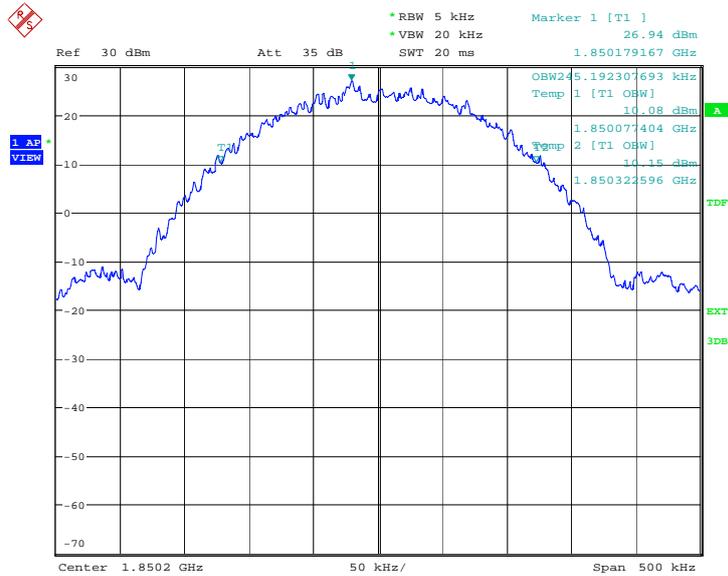


Date: 10.JUN.2014 12:58:03

Channel 661-Occupied Bandwidth (99% BW)

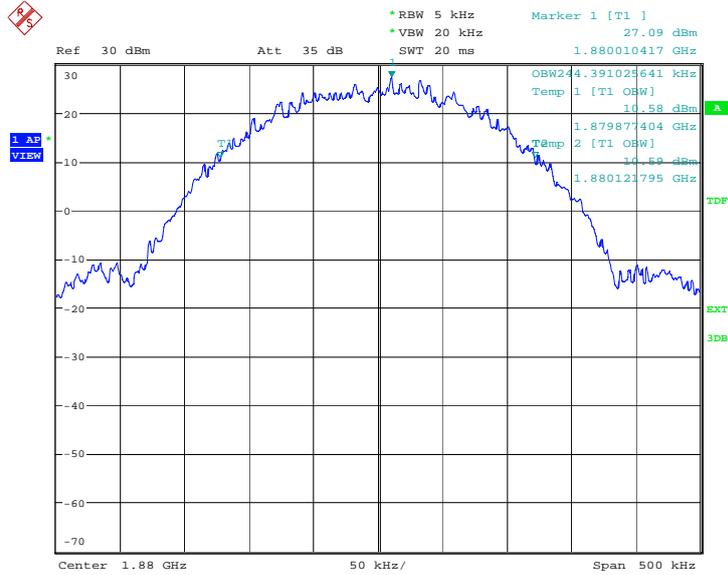

Date: 10.JUN.2014 12:58:35

Channel 810-Occupied Bandwidth (99% BW)

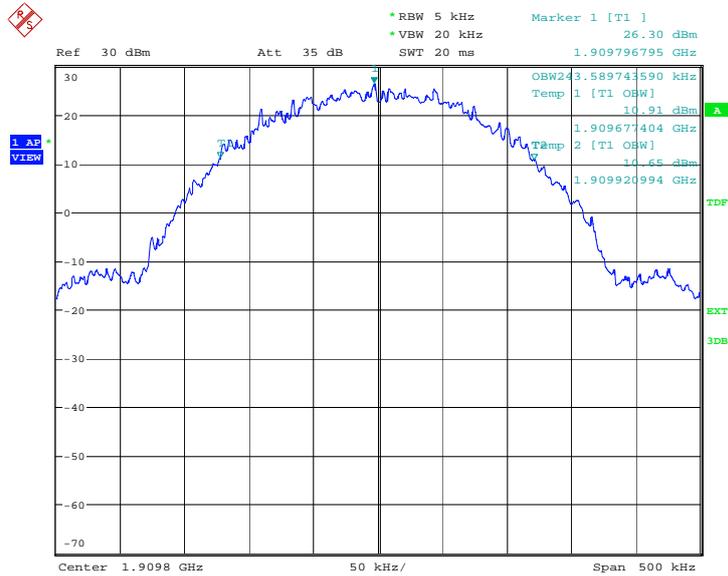

Date: 10.JUN.2014 12:59:07


EGPRS 1900(99% BW) per FCC rules

Frequency(MHz)	Occupied Bandwidth (99% BW)(kHz)
1850.2	245.994
1880.0	245.192
1909.8	242.788

Expanded measurement uncertainty for this test item is 1.1 kHz, $k=2$


EGPRS 1900

Channel 512-Occupied Bandwidth (99% BW)

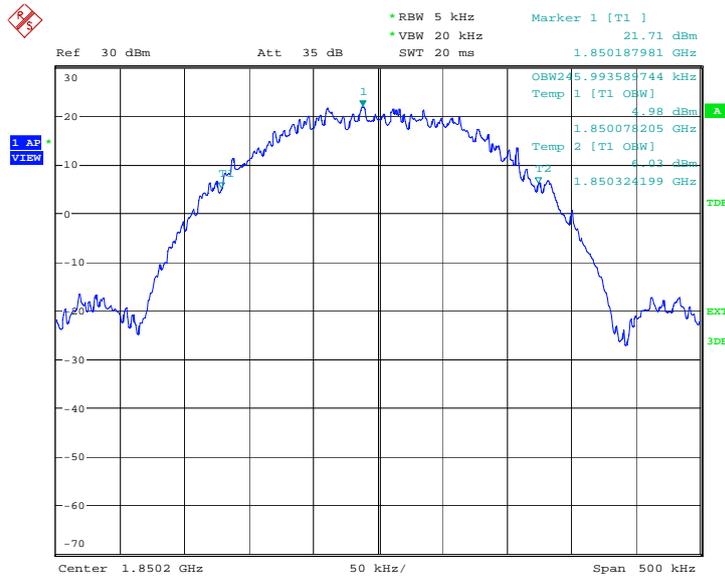


Date: 10.JUN.2014 13:14:38

Channel 661-Occupied Bandwidth (99% BW)

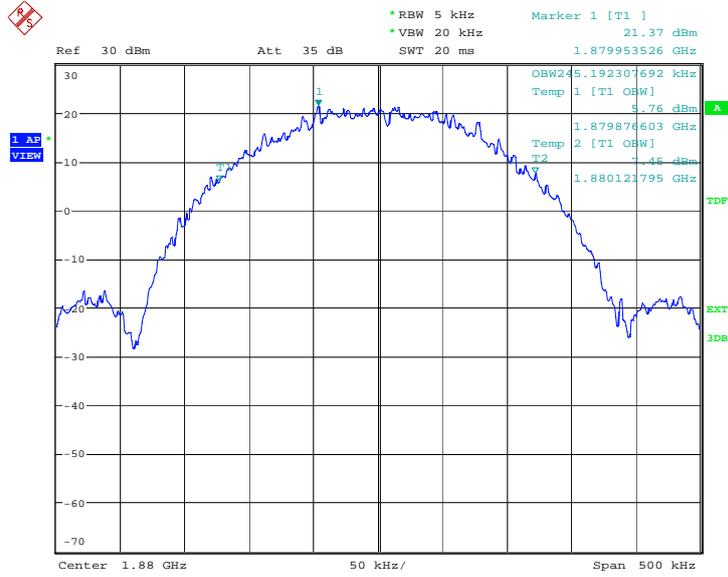

Date: 10.JUN.2014 13:15:10

Channel 810-Occupied Bandwidth (99% BW)

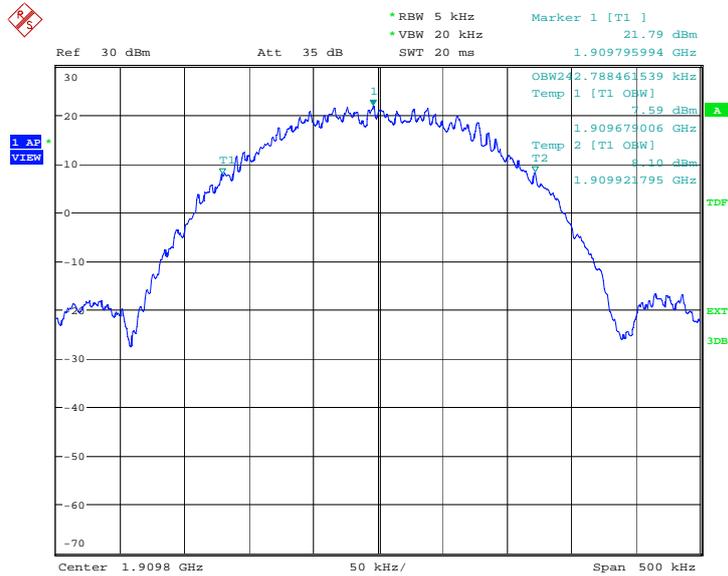

Date: 10.JUN.2014 13:15:42

A.6 EMISSION BANDWIDTH

Reference

FCC: CFR Part 22.917(b), 24.238(b).

A.6.1 Emission Bandwidth Results

Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the PCS1900 band and GSM850 band. Table below lists the measured 100% BW. Spectrum analyzer plots are included on the following pages.

Measurement Parameters:

RBW = 5 kHz, VBW = 20 kHz


GSM 850(100% BW)

Frequency(MHz)	Occupied Bandwidth (100% BW)(kHz)
824.2	305.288
836.6	303.685
848.8	304.487


Expanded measurement uncertainty for this test item is 1.1 kHz, k=2

GSM 850


Channel 128-Occupied Bandwidth (100% BW)

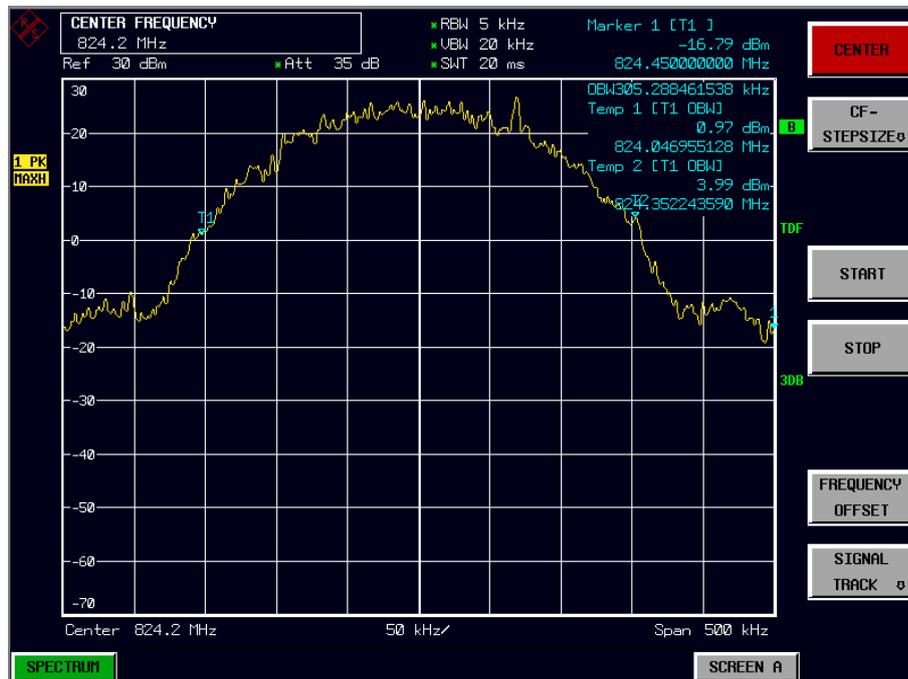

Channel 190-Occupied Bandwidth (100% BW)

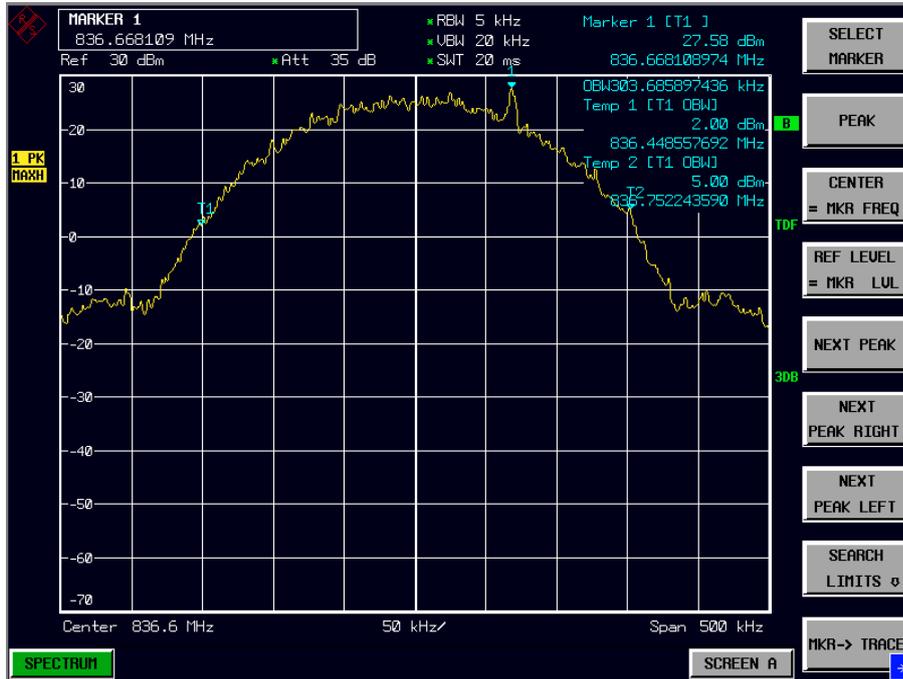

Channel 251-Occupied Bandwidth (100% BW)

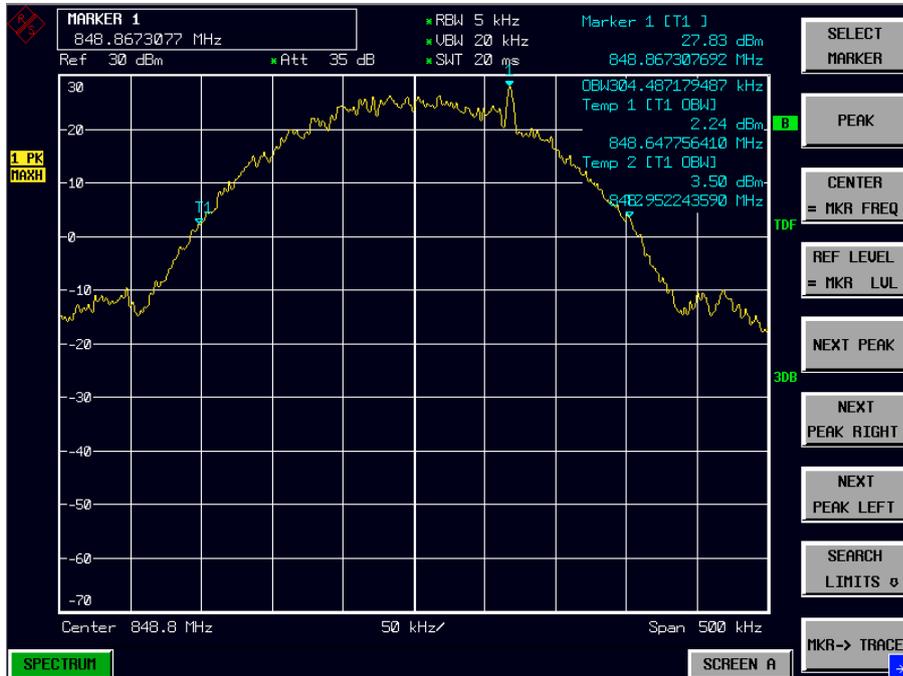


GPRS 850(100% BW)

Frequency(MHz)	Occupied Bandwidth (100% BW)(kHz)
824.2	305.288
836.6	305.288
848.8	308.493


Expanded measurement uncertainty for this test item is 1.1 kHz, k=2

GPRS 850


Channel 128-Occupied Bandwidth (100% BW)

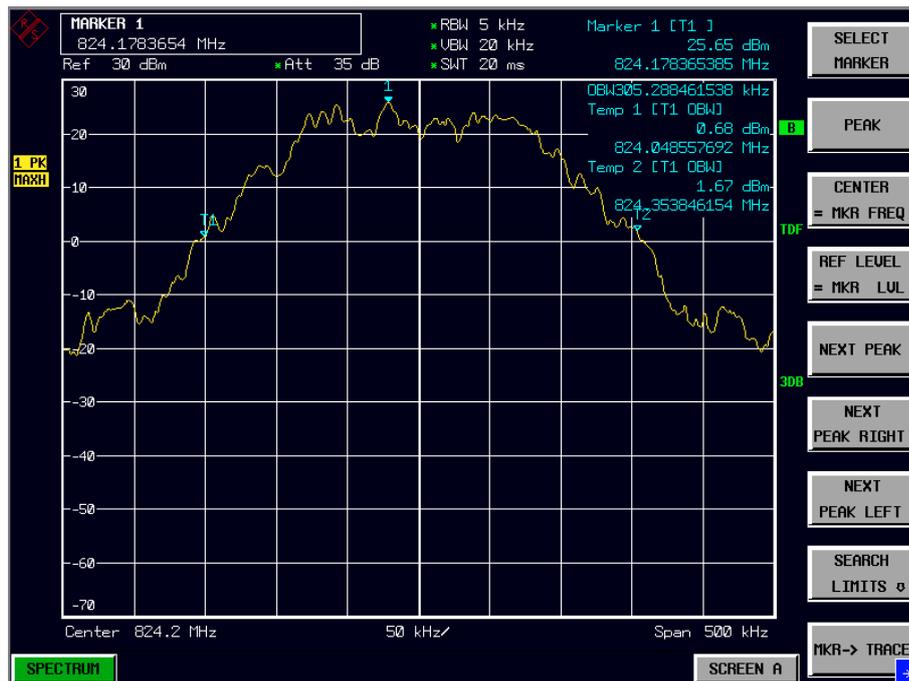

Channel 190-Occupied Bandwidth (100% BW)

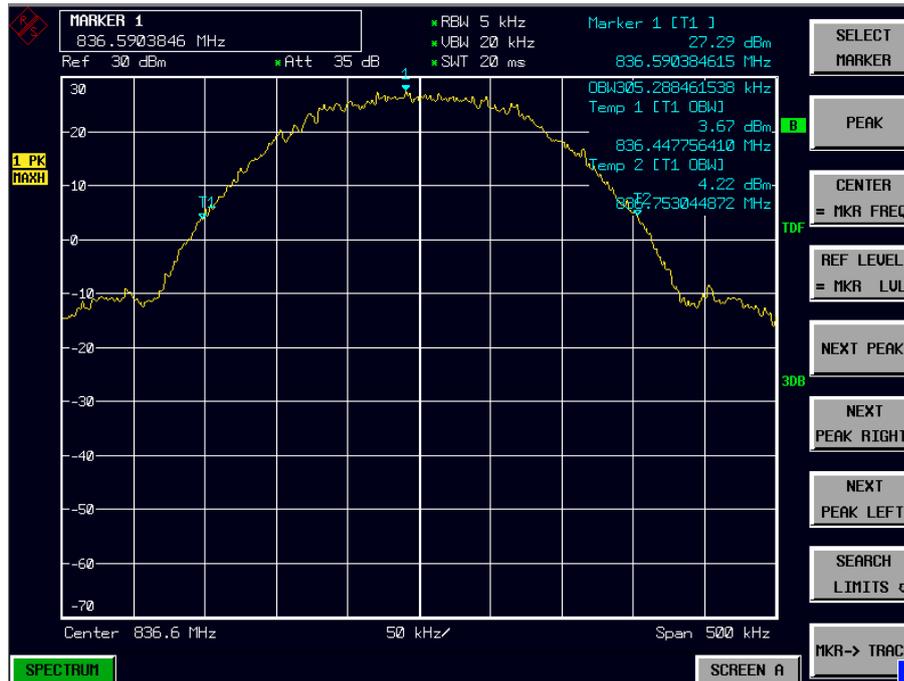

Channel 251-Occupied Bandwidth (100% BW)

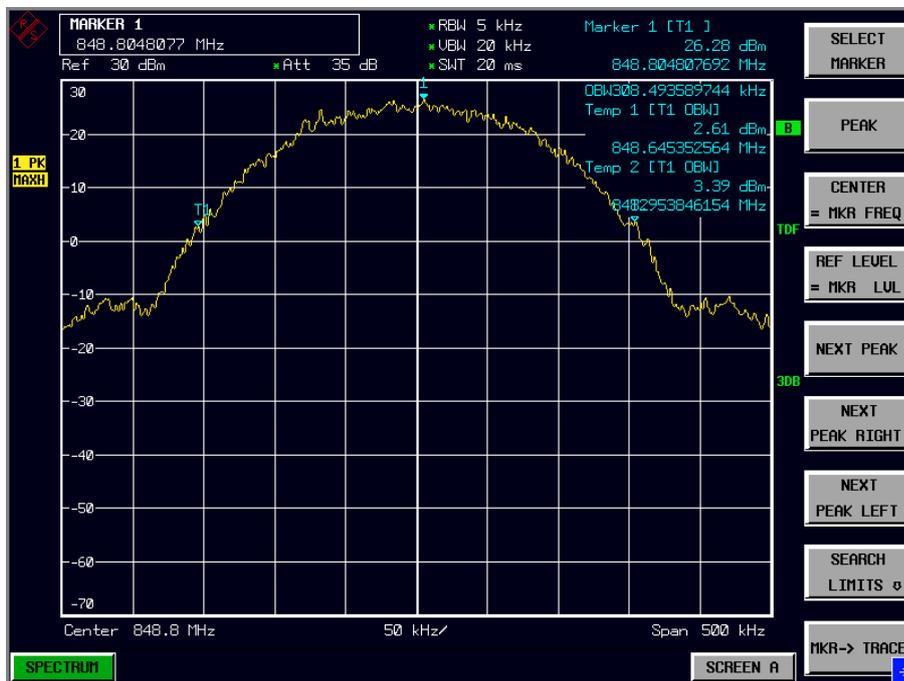

EGPRS 850(100%)

Frequency(MHz)	Occupied Bandwidth (100% BW)(kHz)
824.2	300.480
836.6	298.878
848.8	299.679


Expanded measurement uncertainty for this test item is 1.1 kHz, k=2

EGPRS 850


Channel 128-Occupied Bandwidth (100% BW)



Channel 190-Occupied Bandwidth (100% BW)

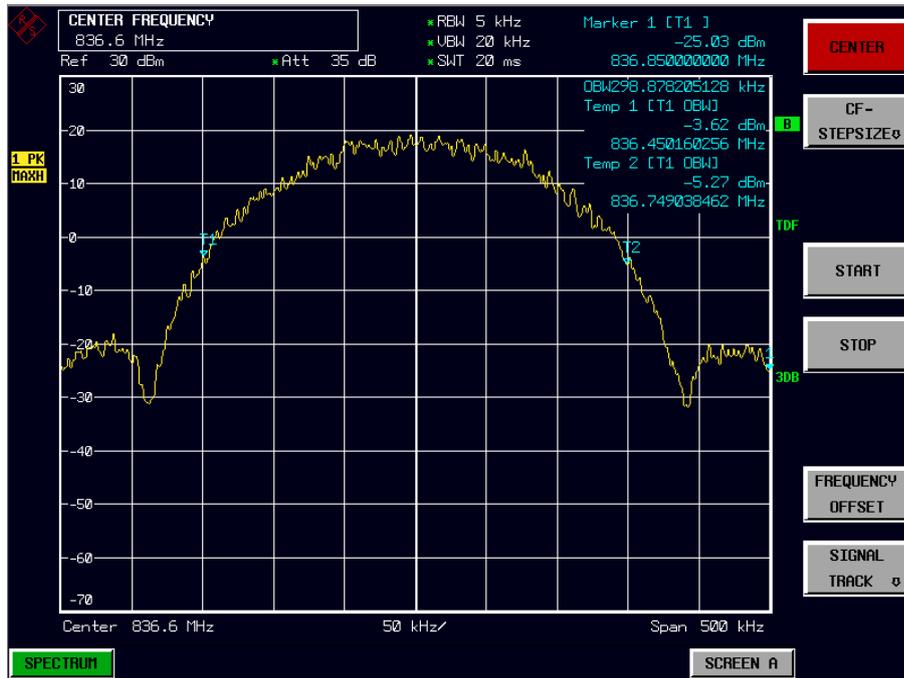

Channel 251-Occupied Bandwidth (100% BW)

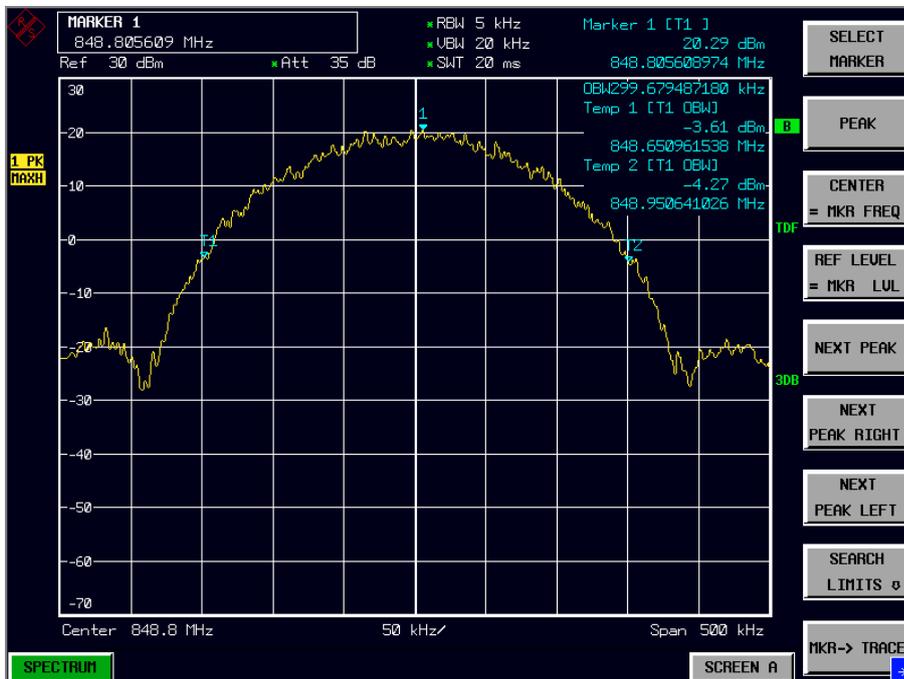


PCS 1900(100% BW)

Frequency(MHz)	Occupied Bandwidth (100% BW)(kHz)
1850.2	306.891
1880.0	306.090
1909.8	306.891

Expanded measurement uncertainty for this test item is 1.1 kHz, k=2


PCS 1900

Channel 512-Occupied Bandwidth (100% BW)

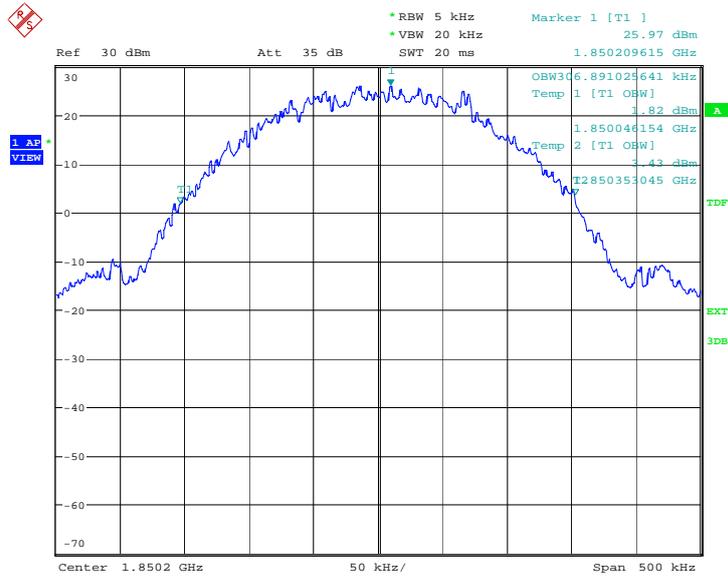


Date: 10.JUN.2014 10:50:01

Channel 661-Occupied Bandwidth (100% BW)

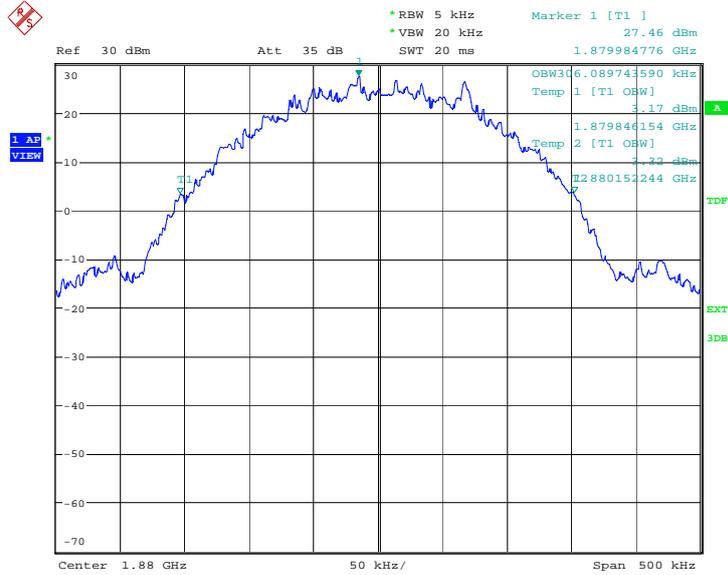

Date: 10.JUN.2014 10:50:33

Channel 810-Occupied Bandwidth (100% BW)

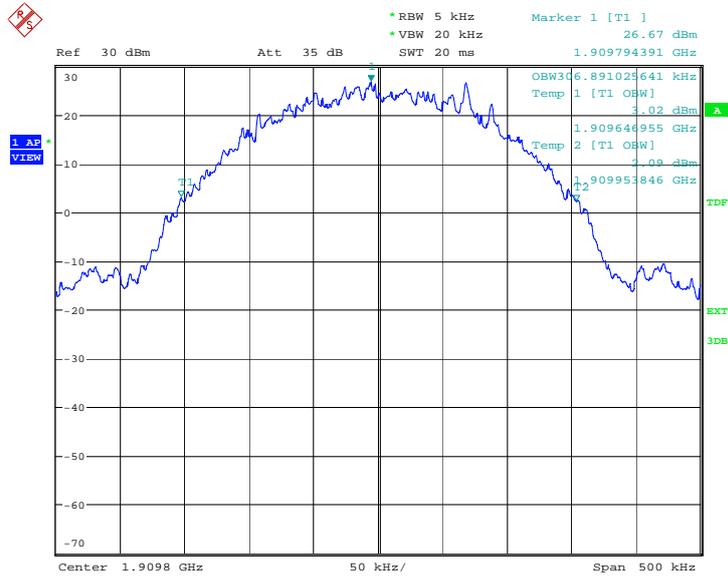

Date: 10.JUN.2014 10:51:05


GPRS 1900(100%)

Frequency(MHz)	Occupied Bandwidth (100% BW)(kHz)
1850.2	306.090
1880.0	306.090
1909.8	306.090

Expanded measurement uncertainty for this test item is 1.1 kHz, $k=2$


GPRS 1900

Channel 512-Occupied Bandwidth (100% BW)

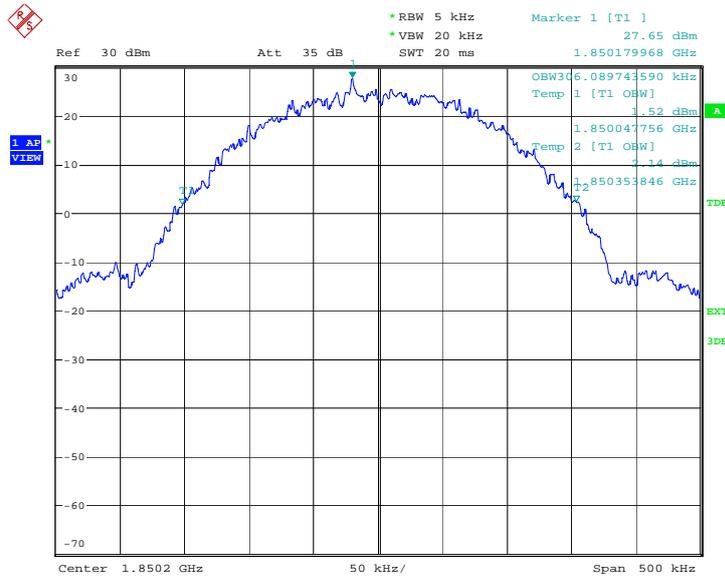


Date: 10.JUN.2014 12:59:41

Channel 661-Occupied Bandwidth (100% BW)

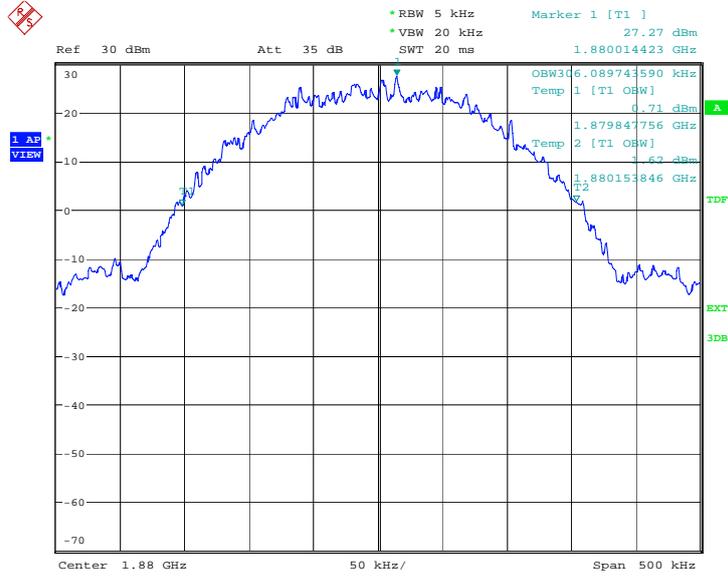

Date: 10.JUN.2014 13:00:13

Channel 810-Occupied Bandwidth (100% BW)

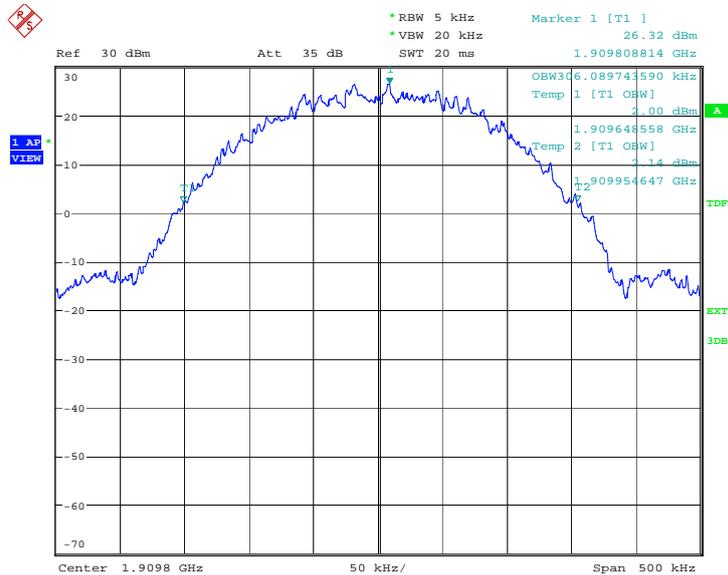

Date: 10.JUN.2014 13:00:45


EGPRS 1900(100% BW)

Frequency(MHz)	Occupied Bandwidth (100% BW)(kHz)
1850.2	300.481
1880.0	302.083
1909.8	298.077

Expanded measurement uncertainty for this test item is 1.1 kHz, k=2


EGPRS 1900

Channel 512-Occupied Bandwidth (100% BW)

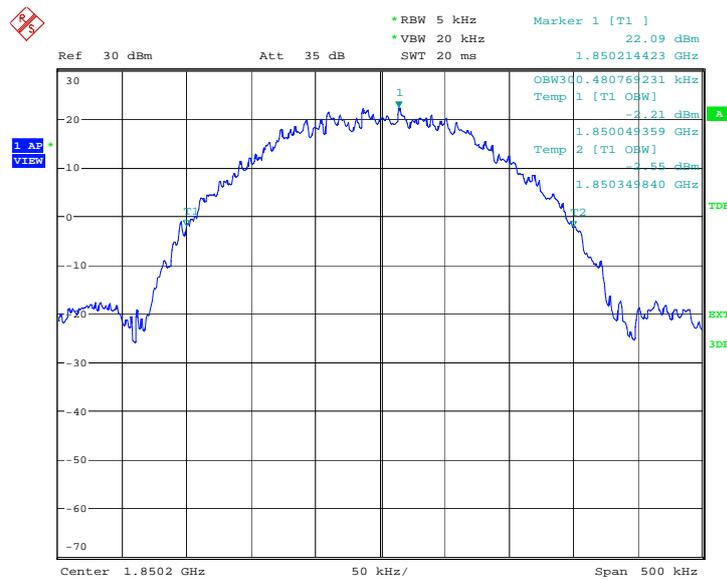


Date: 10.JUN.2014 13:16:16

Channel 661-Occupied Bandwidth (100% BW)

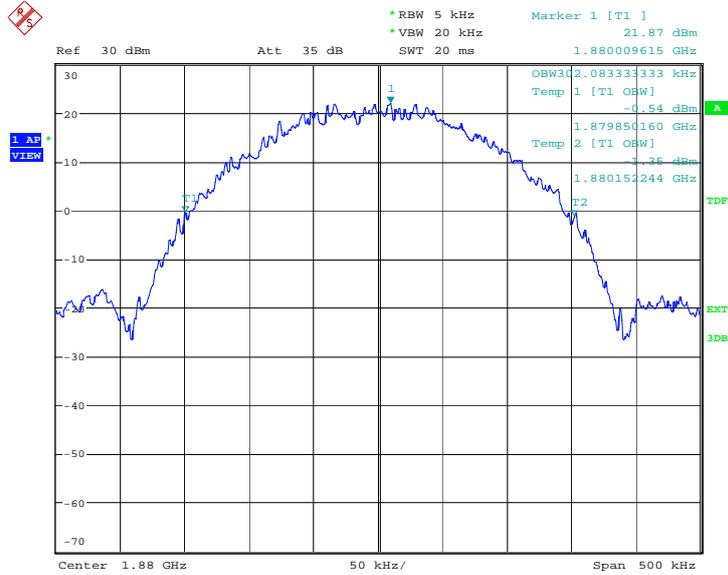

Date: 10.JUN.2014 13:16:48

Channel 810-Occupied Bandwidth (100% BW)

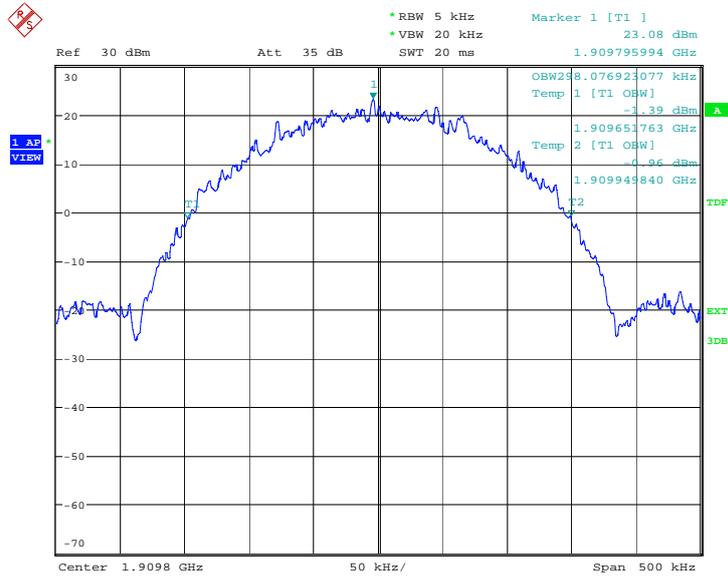

Date: 10.JUN.2014 13:17:20

A.7 BAND EDGE COMPLIANCE

Reference

FCC: CFR Part 22.917(b), 24.238(b).


A.7.1 Measurement limit

On any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


A.7.2 Measurement result

GSM 850

LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

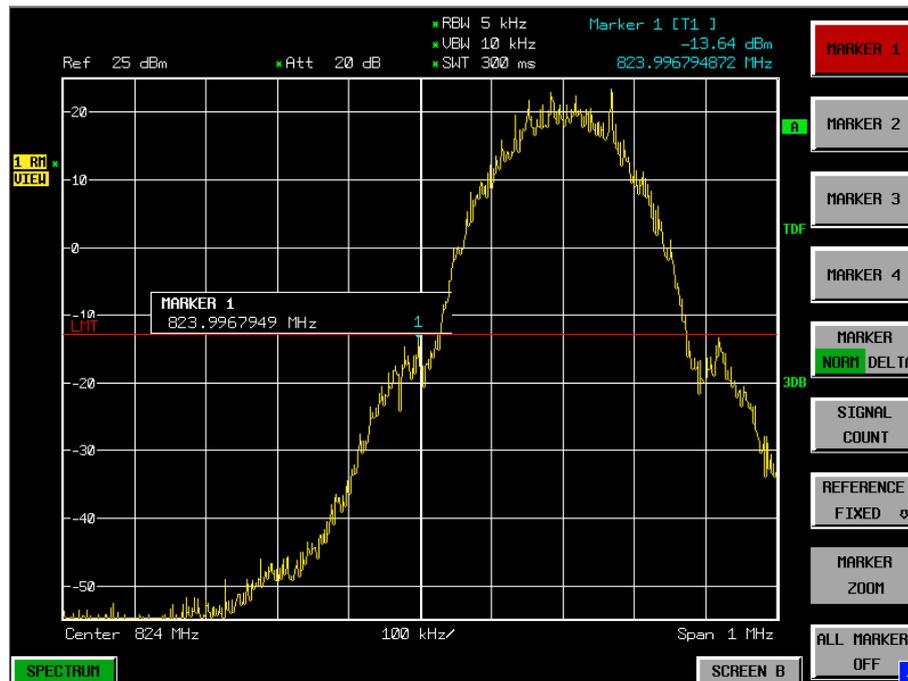


HIGH BAND EDGE BLOCK-C (GSM850) –Channel 251

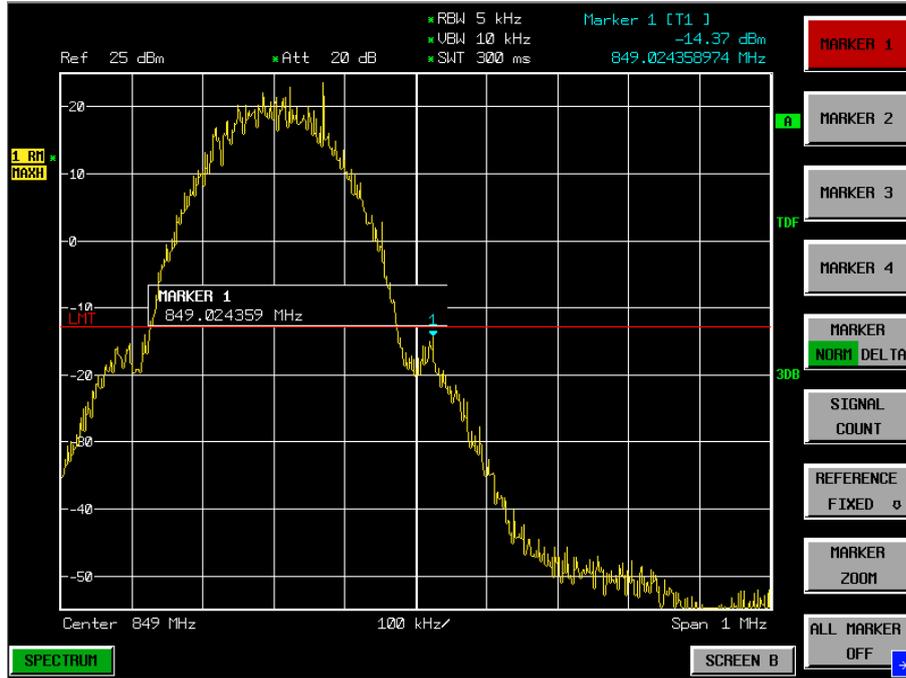


GPRS 850

LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

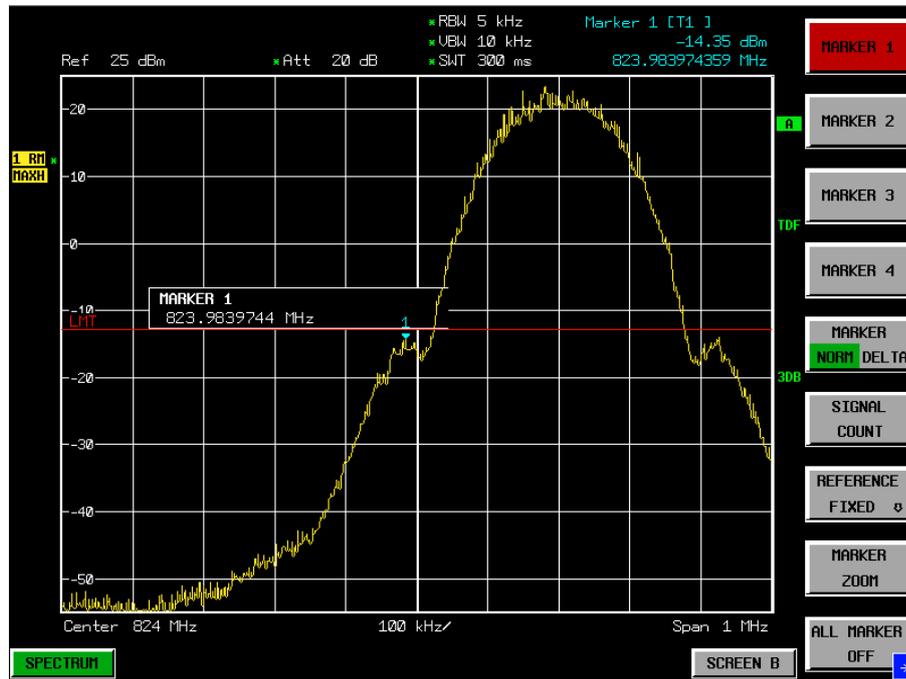


HIGH BAND EDGE BLOCK-C (GSM850) –Channel 251

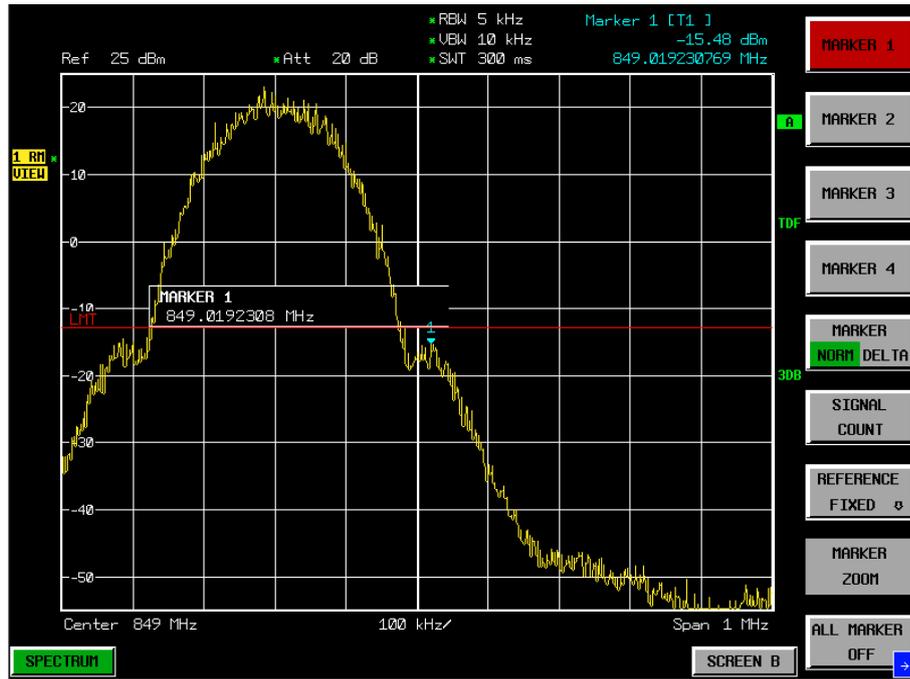


EGPRS 850-8PSK

LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

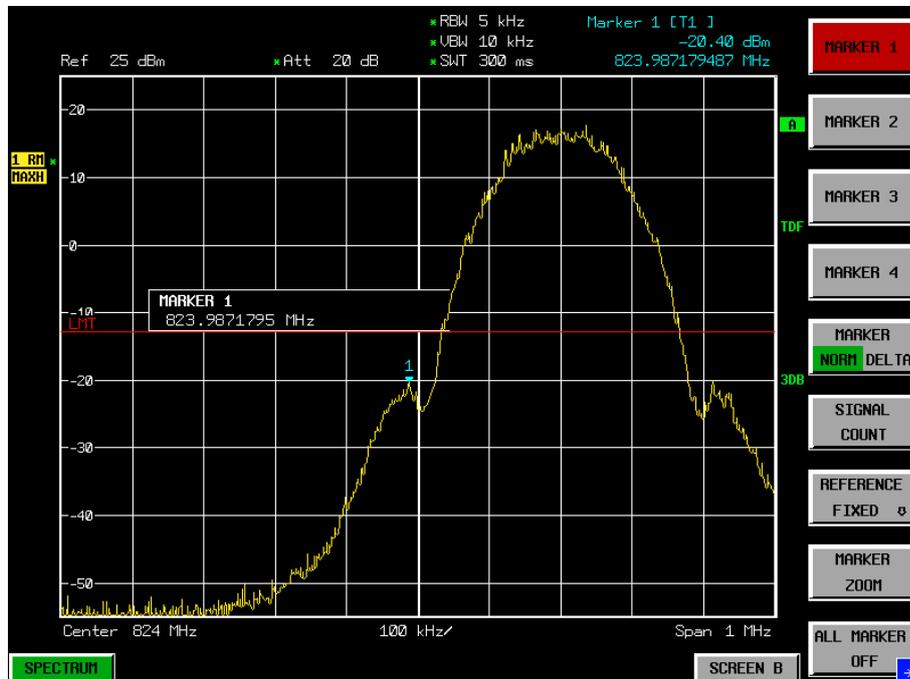


HIGH BAND EDGE BLOCK-C (GSM850) –Channel 251

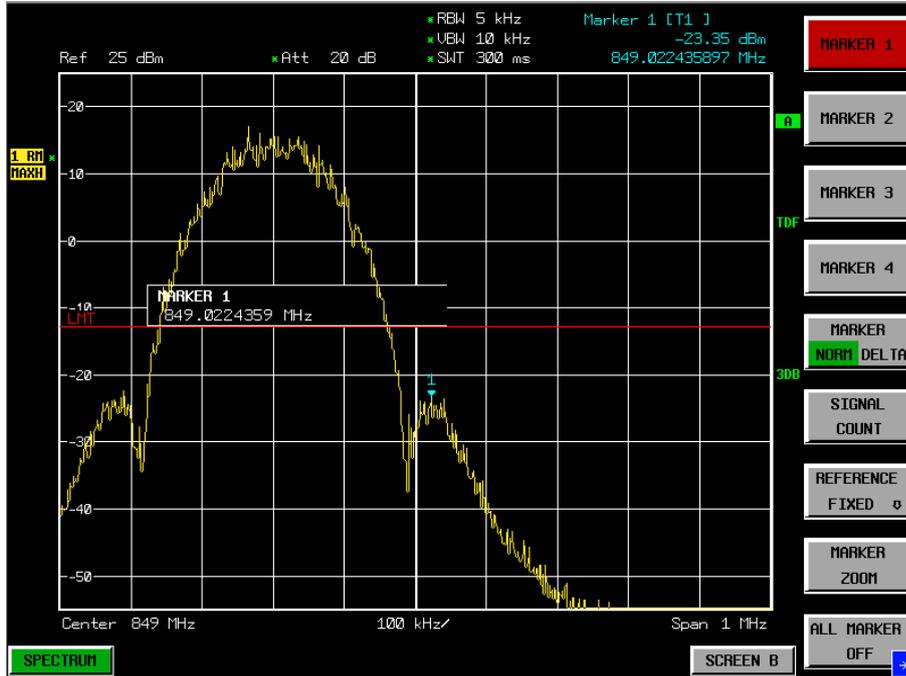


PCS 1900

LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

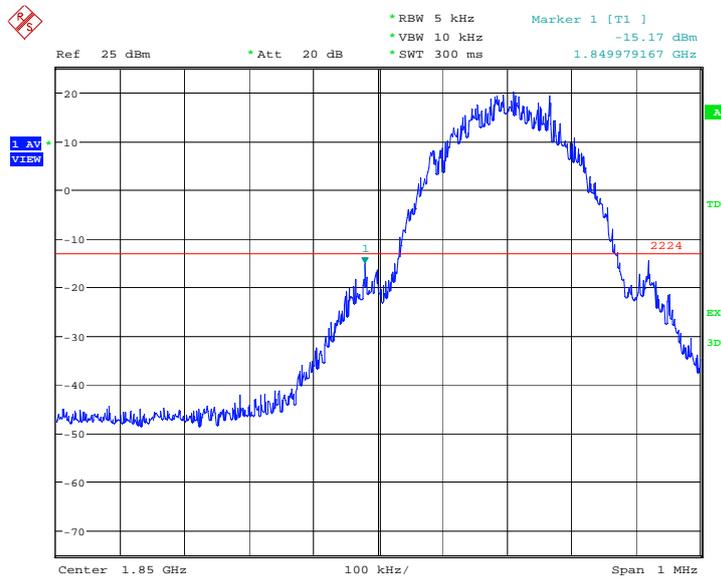


Date: 10.JUN.2014 10:51:19

HIGH BAND EDGE BLOCK-C (PCS-1900) –Channel 810

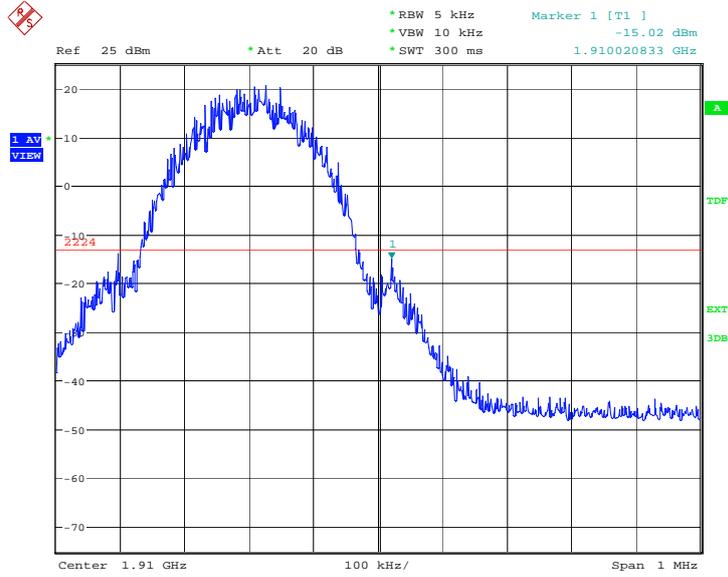


Date: 10.JUN.2014 10:51:33

GPRS 1900 LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

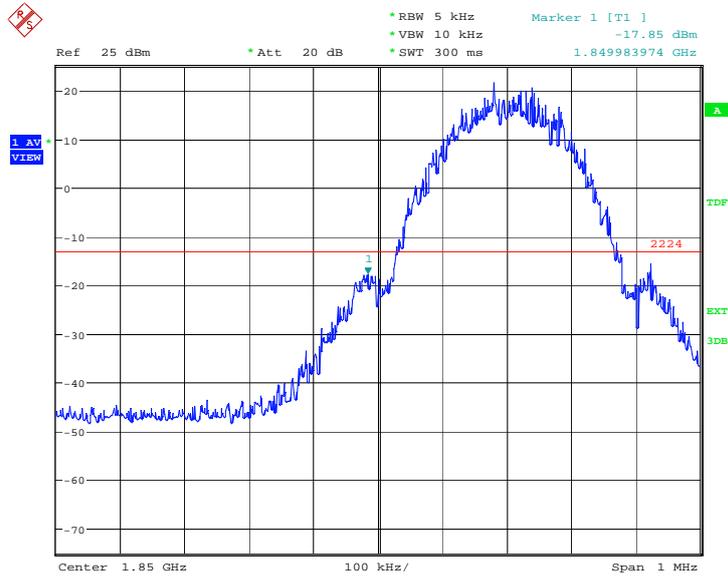


Date: 10.JUN.2014 13:00:59

HIGH BAND EDGE BLOCK-C (PCS-1900) –Channel 810

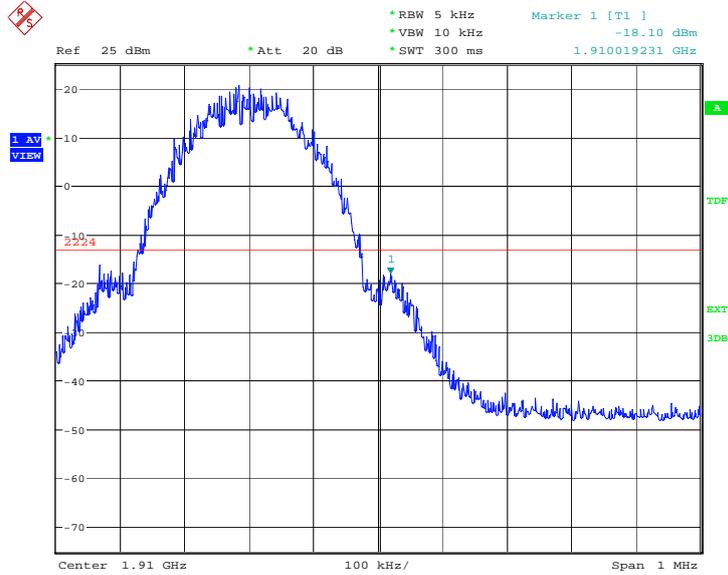


Date: 10.JUN.2014 13:01:13

EGPRS 1900-8PSK LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

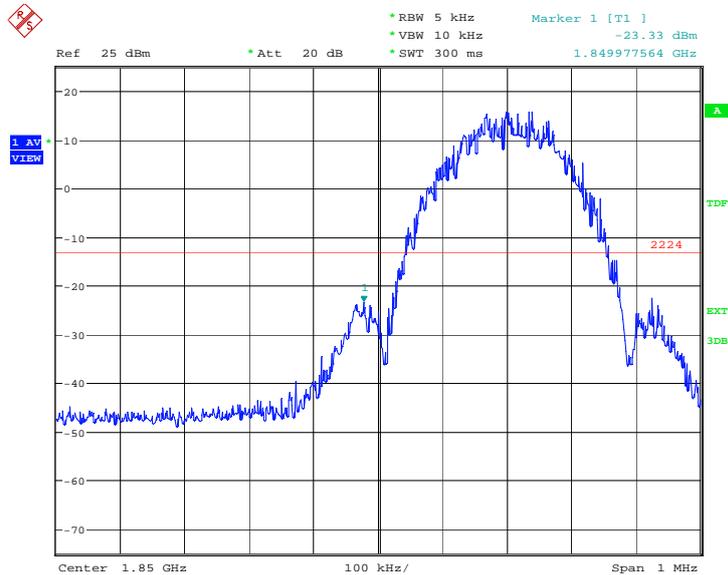

Date: 10.JUN.2014 13:17:34

HIGH BAND EDGE BLOCK-C (PCS-1900) –Channel 810

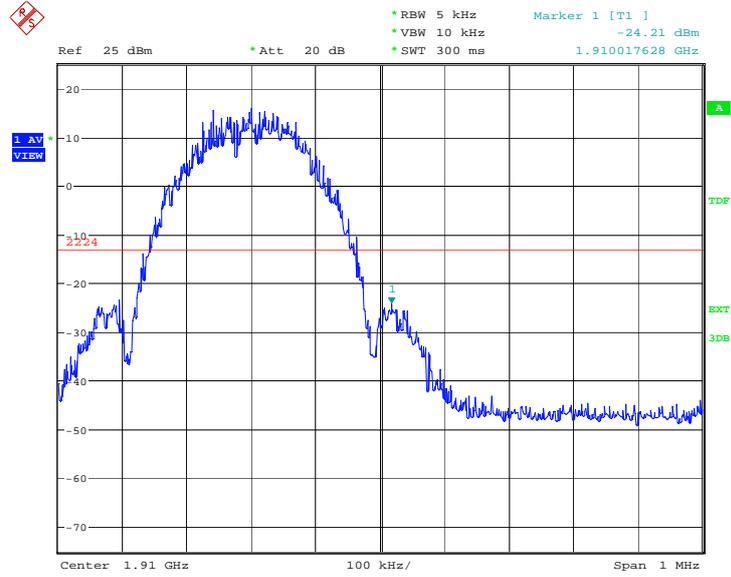

Date: 10.JUN.2014 13:17:48

A.8 CONDUCTED SPURIOUS EMISSION

Reference

FCC: CFR Part 2.1057, 22.917, 24.238.

A.8.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data are taken from 30 MHz to 20 GHz. For GSM850, data are taken from 30 MHz to 10 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

GSM850 Transmitter

Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

PCS1900 Transmitter

Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

A. 8.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A. 8.3 Measurement result

Measurement Uncertainty: 0.3dB

GSM850


Harmonic	Tx ch. 128 Freq. (MHz)	Level (dBm)	Tx ch. 190 Freq. (MHz)	Level (dBm)	Tx ch. 251 Freq. (MHz)	Level (dBm)
2	1648.4	nf	1673.2	nf	1697.6	nf
3	2472.6	nf	2509.8	nf	2546.4	nf
4	3296.8	nf	3346.4	nf	3395.2	nf
5	4121	nf	4183	nf	4244	nf
6	4945.2	nf	5019.6	nf	5092.8	nf
7	5769.4	nf	5856.2	nf	5941.6	nf
8	6593.6	nf	6692.8	nf	6790.4	nf
9	7417.8	nf	7529.4	nf	7639.2	nf
10	8242	nf	8366	nf	8488	nf
nf: Noise floor						

GSM850

A.8.3.1 Channel 128: 30MHz – 1GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

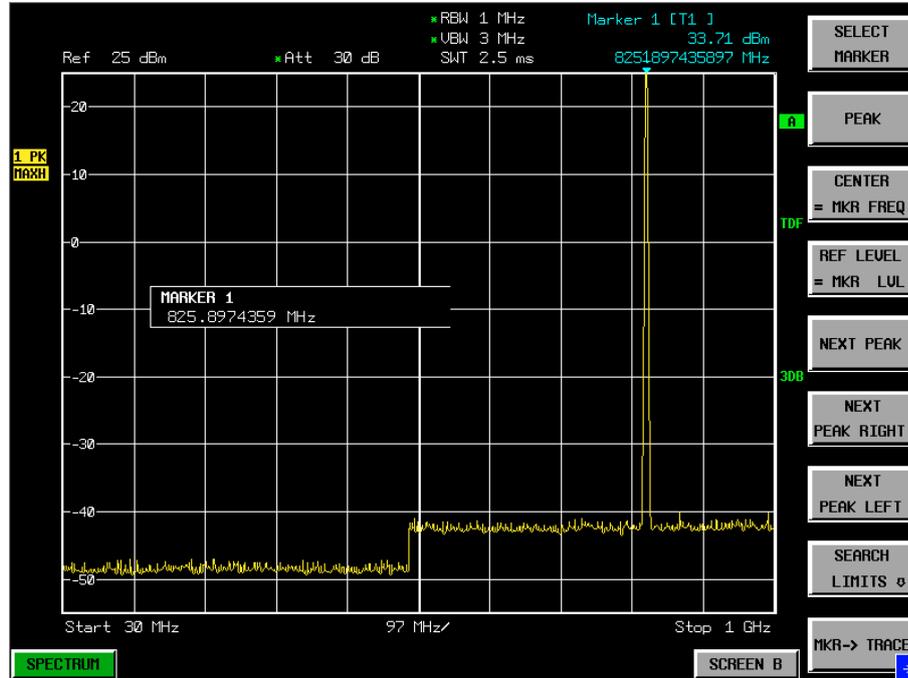


A.8.3.2 Channel 128: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

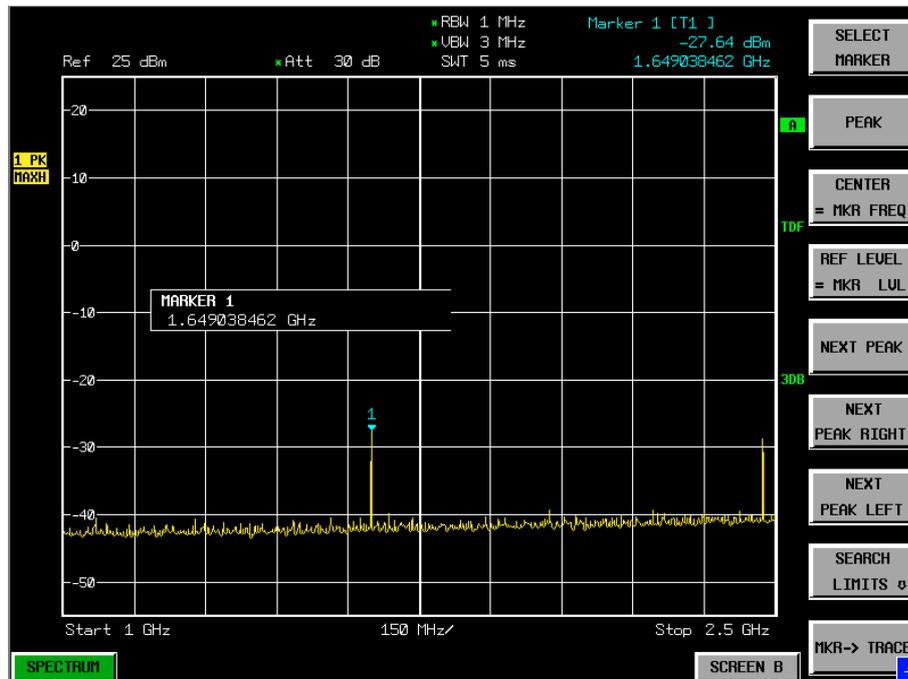

A.8.3.3 Channel 128: 2.5GHz – 7.5GHz
Spurious emission limit –13dBm.

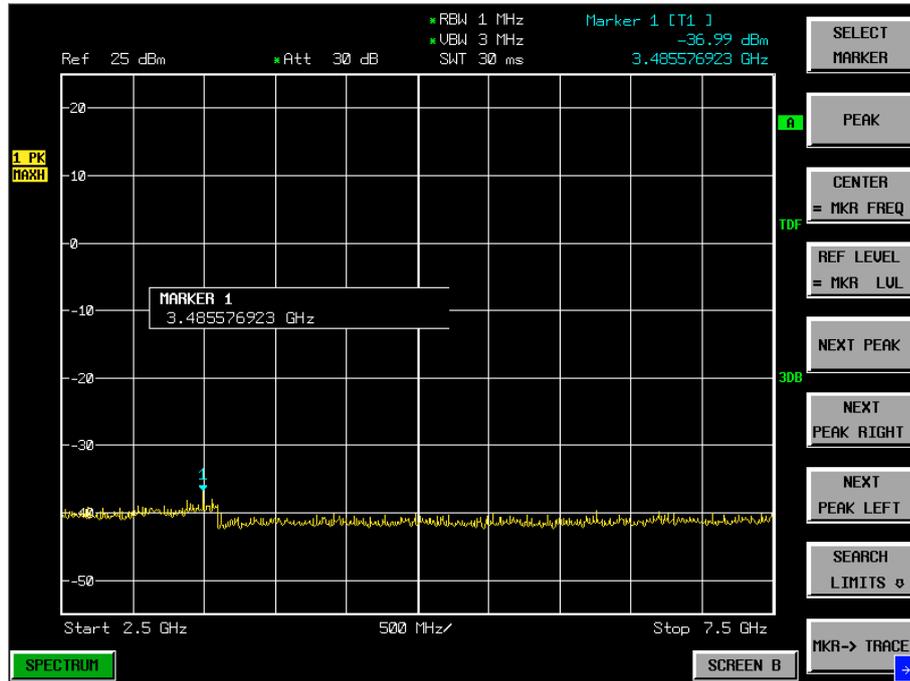


A.8.3.4 Channel 128: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

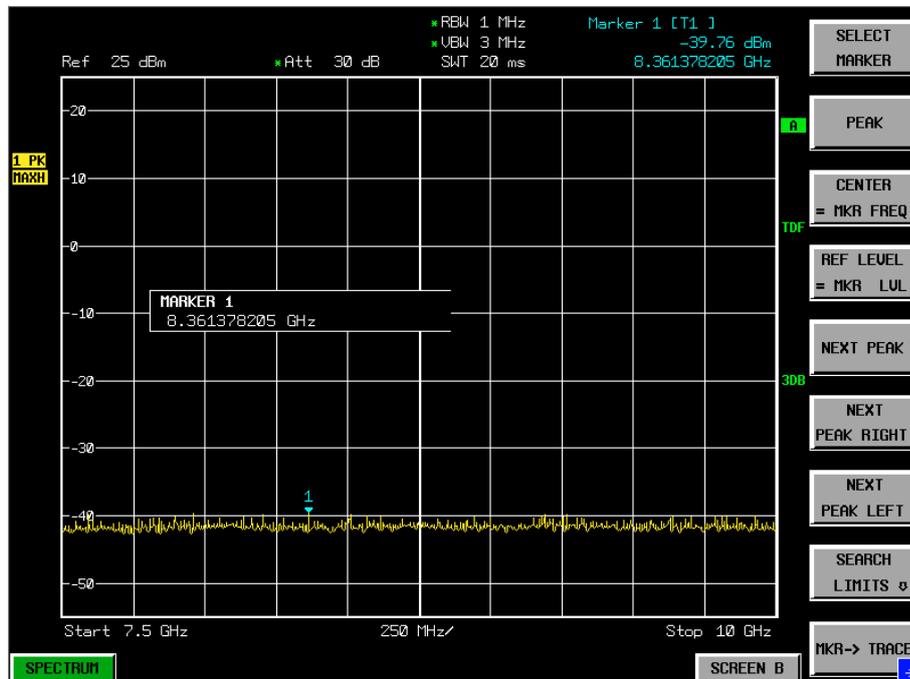

A.8.3.5 Channel 190: 30MHz – 1GHz


Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency.

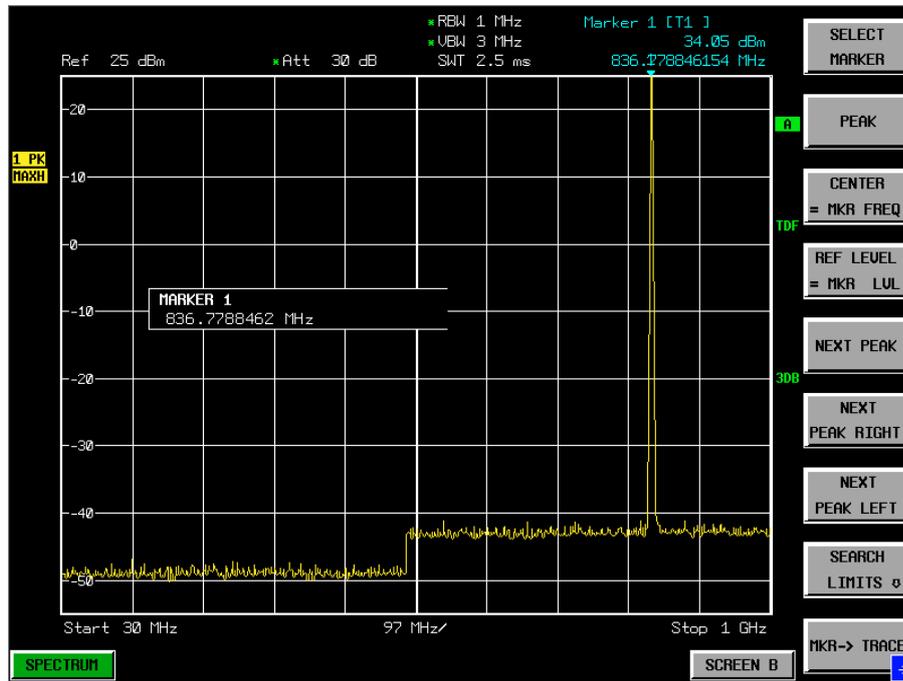


A.8.3.6 Channel 190: 1GHz –2.5GHz


Spurious emission limit –13dBm

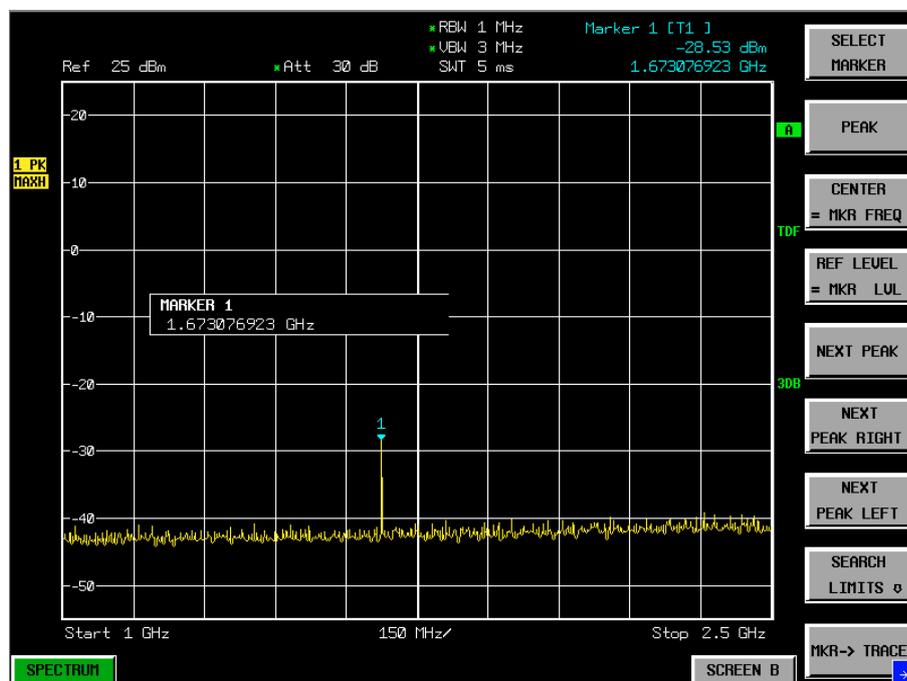

A.8.3.7 Channel 190: 2.5GHz –7.5GHz
Spurious emission limit –13dBm

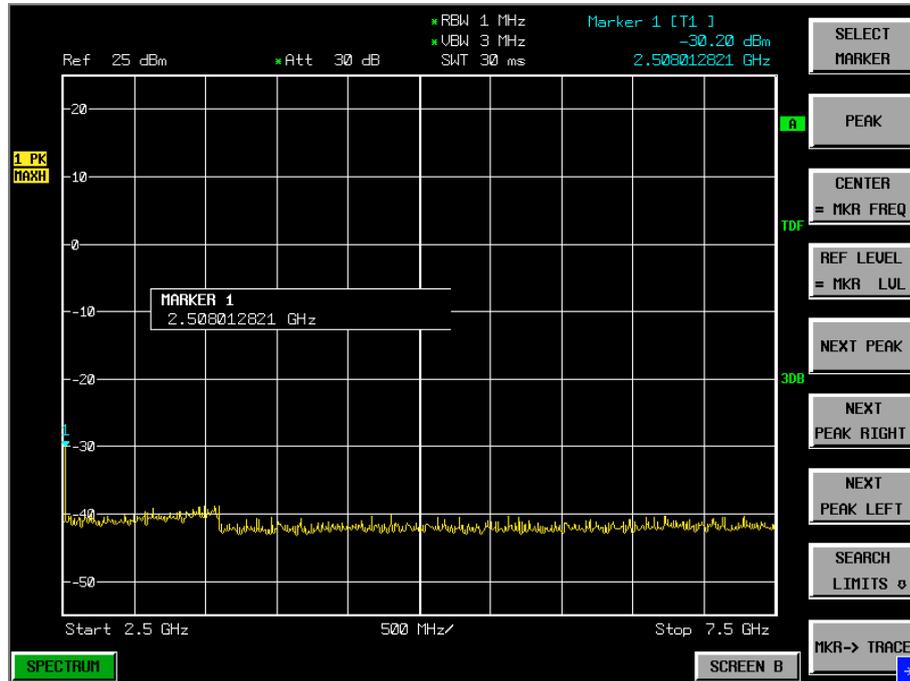


A.8.3.8 Channel 190: 7.5GHz –10GHz
Spurious emission limit –13dBm

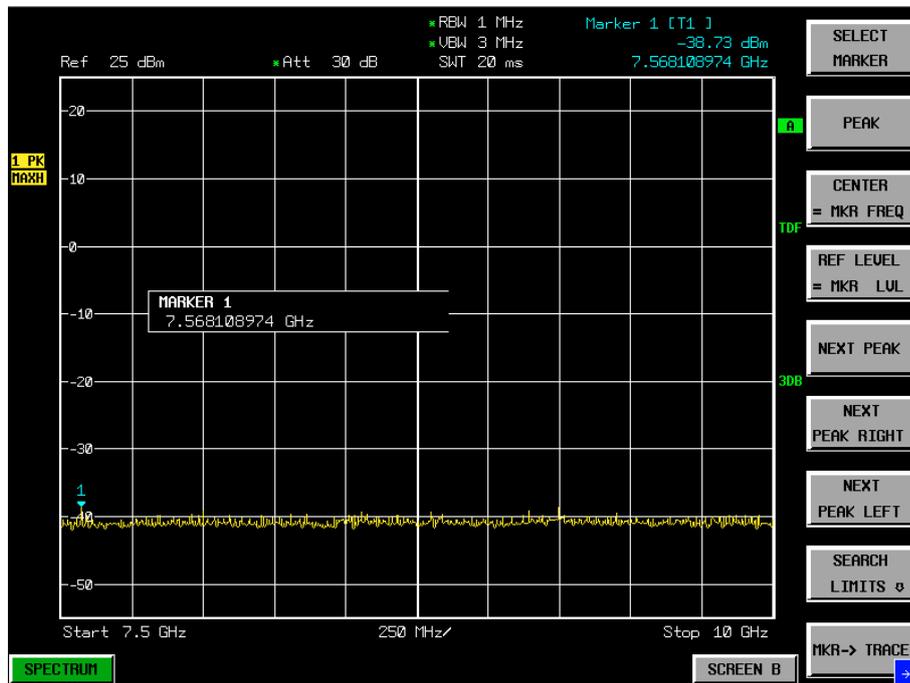

A.8.3.9 Channel 251: 30MHz – 1GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

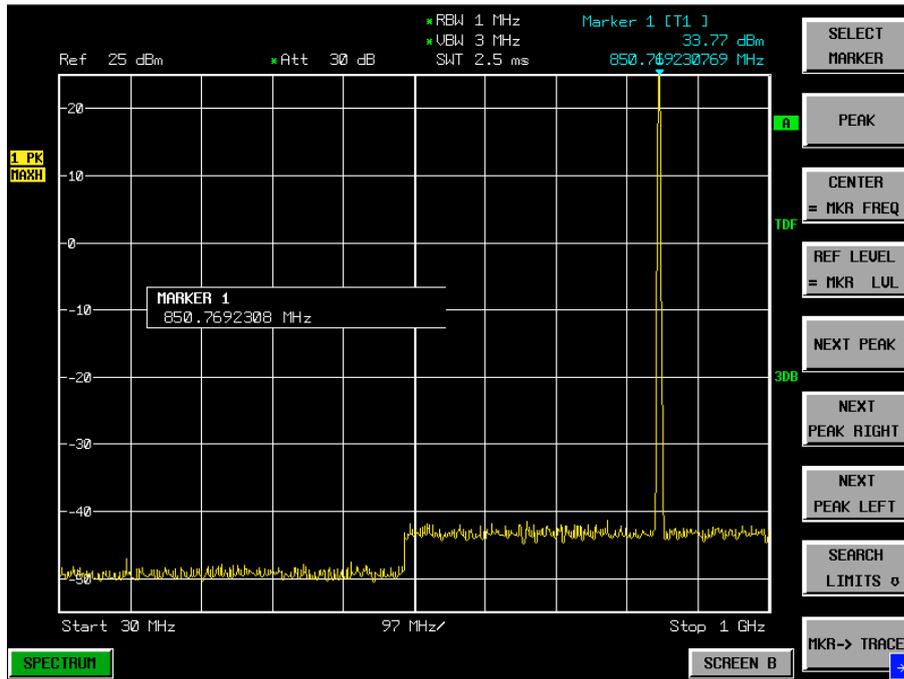


A.8.3.10 Channel 251: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

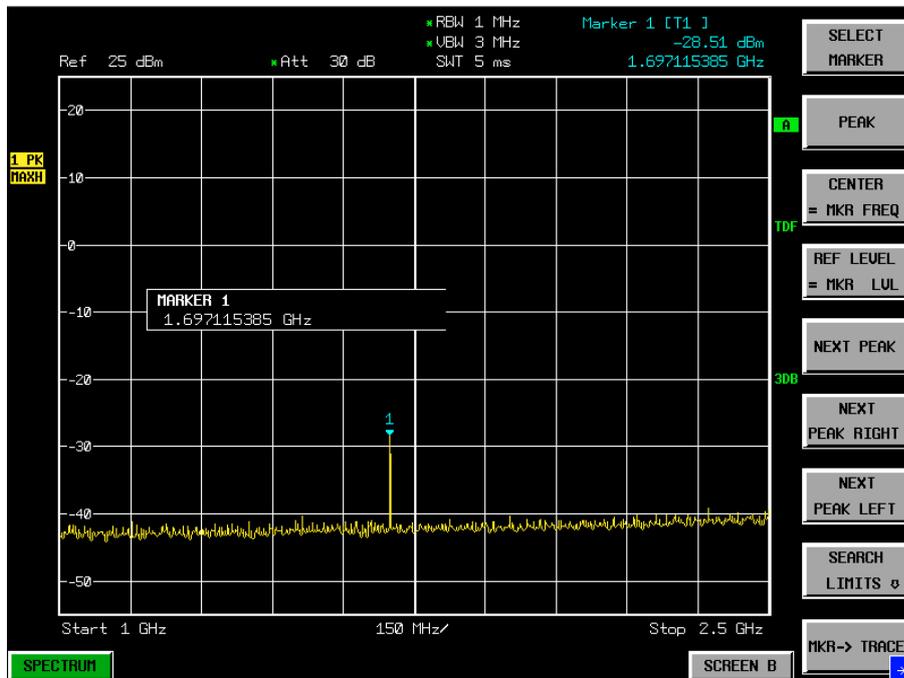

A.8.3.11 Channel 251:2.5GHz – 7.5GHz
Spurious emission limit –13dBm.

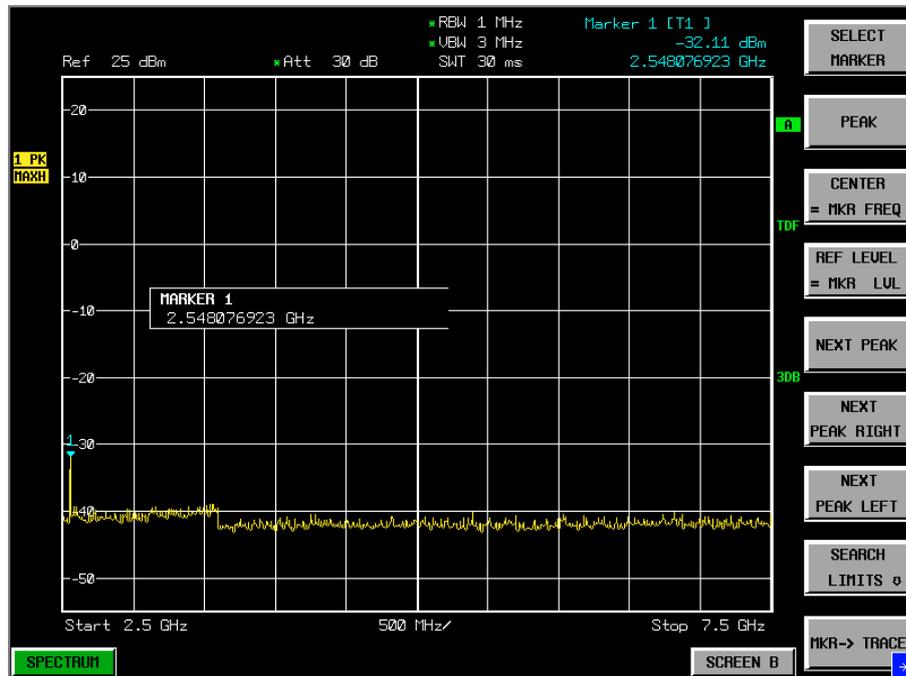


A.8.3.12 Channel 251: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

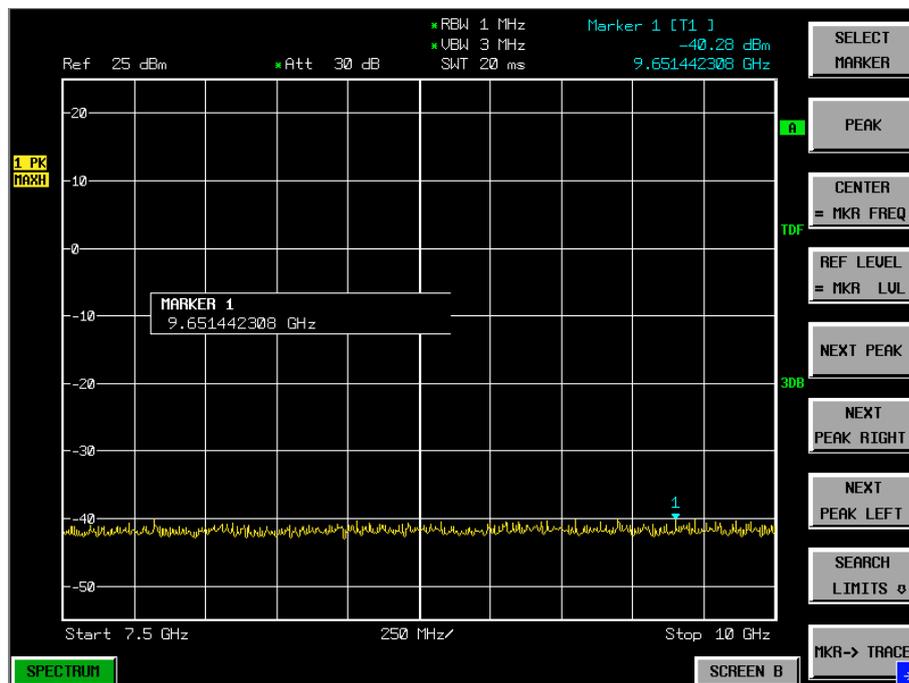


A.8.3.15 Idle mode: 2.5GHz – 7.5GHz

Spurious emission limit –13dBm.

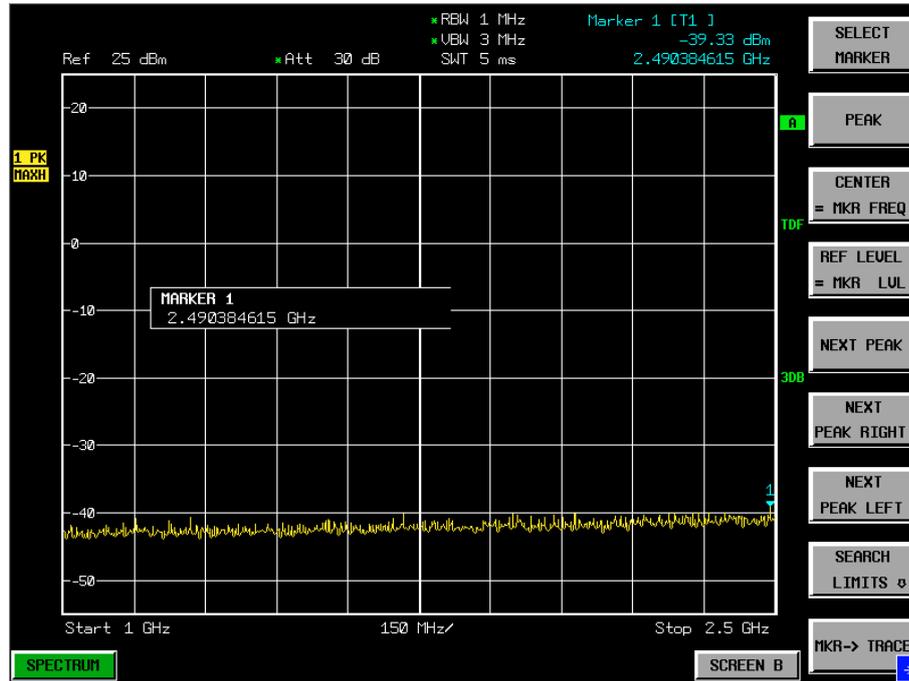

A.8.3.16 Idle mode: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

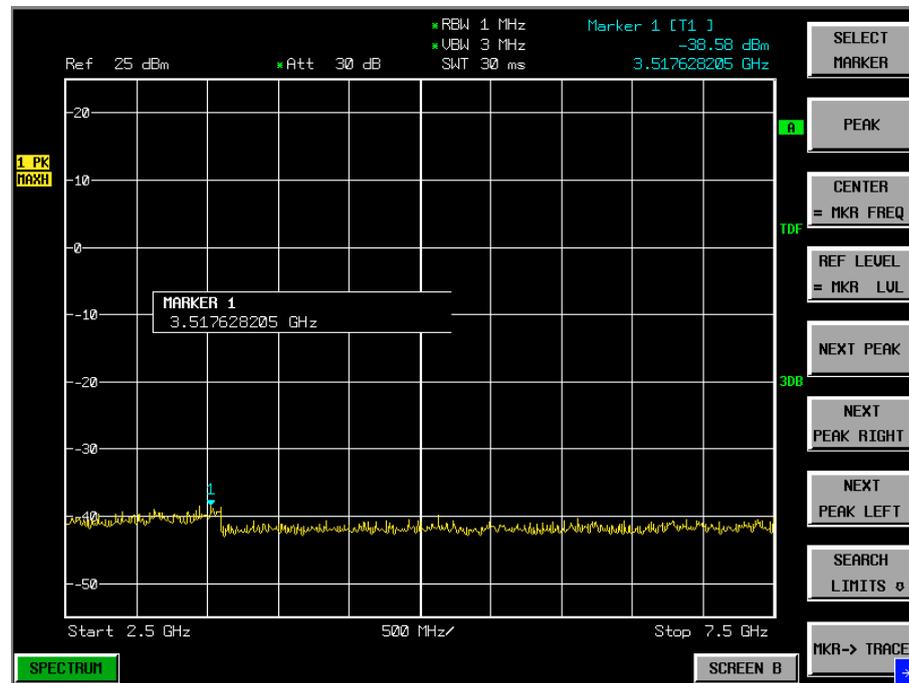


PCS1900

Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)
2	3700.4	nf	3760	nf	3819.6	nf
3	5550.6	nf	5640	nf	5729.4	nf
4	7400.8	nf	7520	nf	7639.2	nf
5	9251.0	nf	9400	nf	9549.0	nf
6	11101.2	nf	11280	nf	11458.8	nf
7	12951.4	nf	13160	nf	13368.6	nf
8	14801.6	nf	15040	nf	15278.4	nf
9	16651.8	nf	16920	nf	17188.2	nf
10	18502.0	nf	18800	nf	19098.0	nf
nf: Noise floor						

PCS1900

A.8.3.17 Channel 512: 30MHz – 1GHz

Spurious emission limit –13dBm.

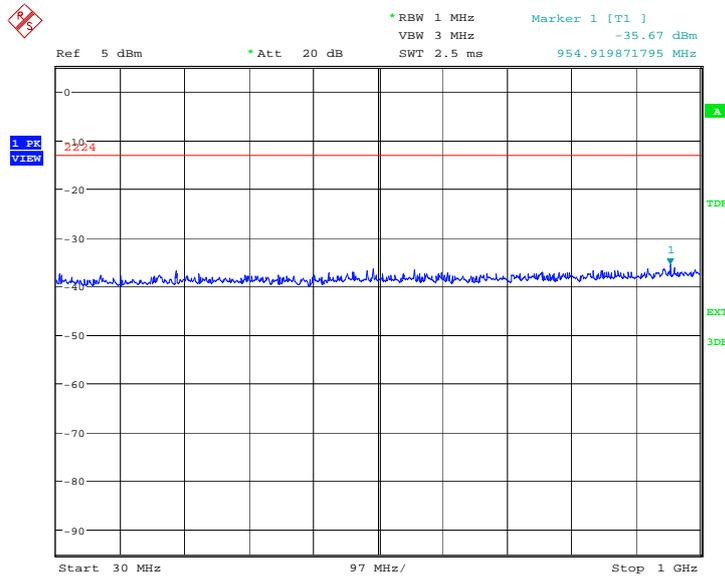


Date: 10.JUN.2014 10:53:46

A.8.3.18 Channel 512: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

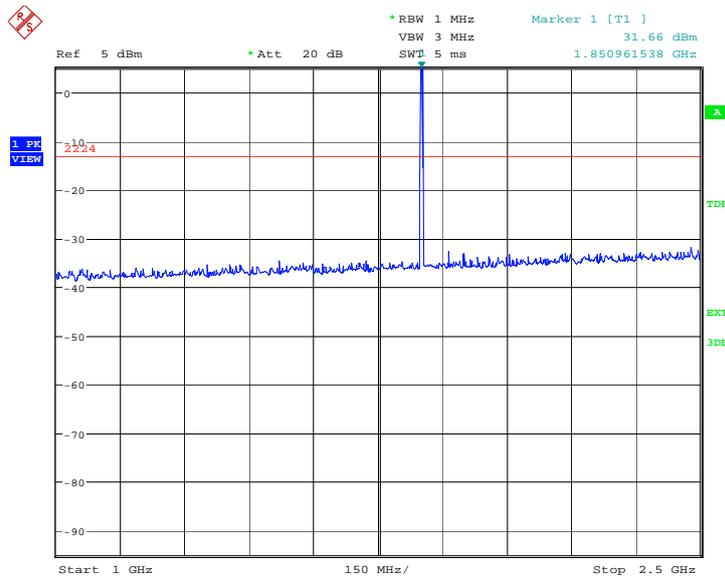


Date: 10.JUN.2014 10:54:15

A.8.3.19 Channel 512: 2.5GHz – 7.5GHz
Spurious emission limit –13dBm.

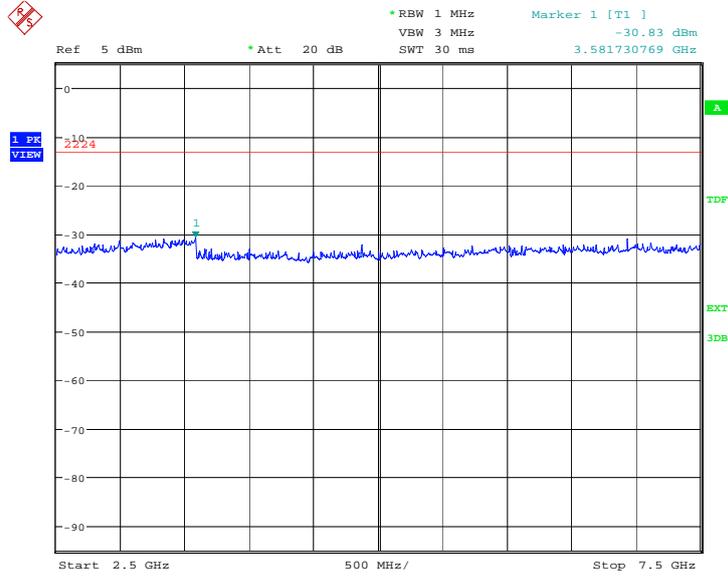


Date: 10.JUN.2014 10:54:43

A.8.3.20 Channel 512: 7.5GHz –10GHz
Spurious emission limit –13dBm.

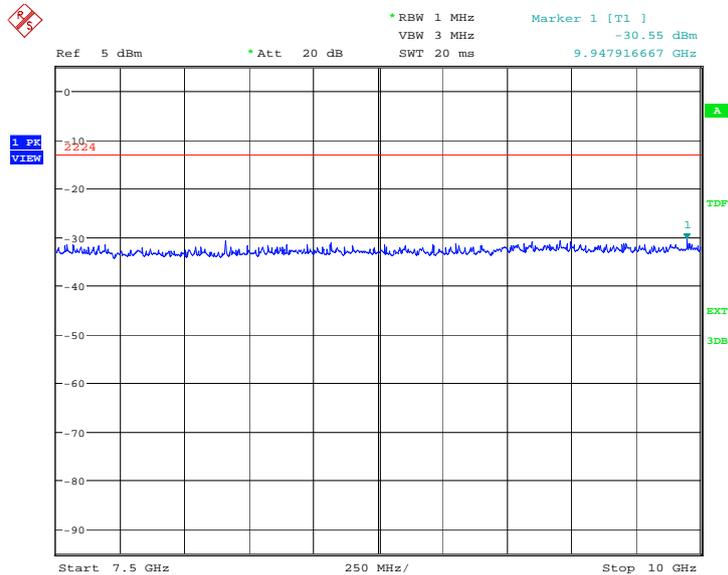


Date: 10.JUN.2014 10:55:11

A.8.3.21 Channel 512: 10GHz –15GHz
Spurious emission limit –13dBm.

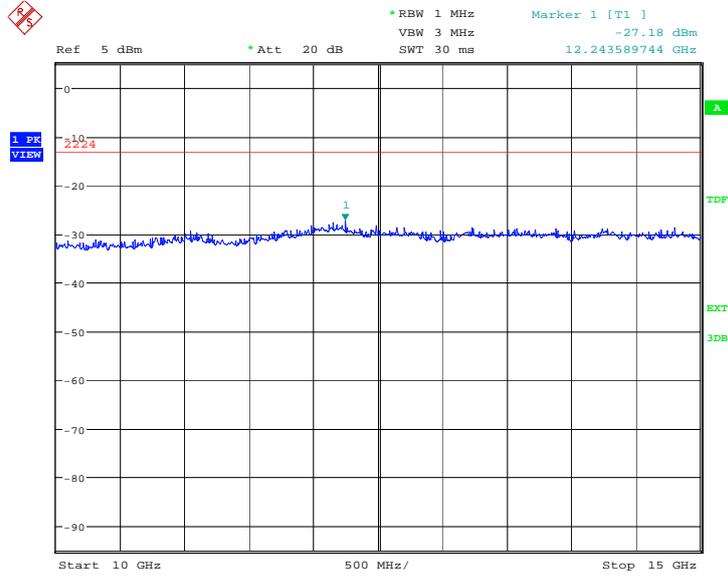


Date: 10.JUN.2014 10:55:39

A.8.3.22 Channel 512: 15GHz –20GHz
Spurious emission limit –13dBm.

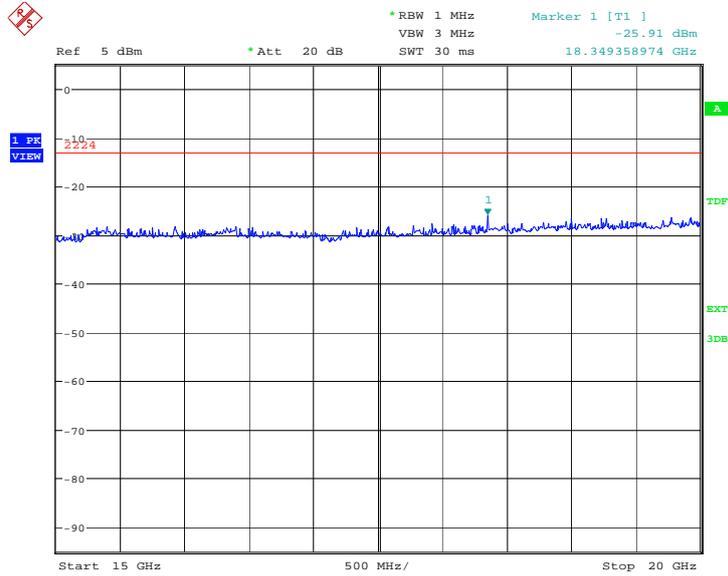

Date: 10.JUN.2014 10:56:07

A.8.3.23 Channel 661: 30MHz – 1GHz
Spurious emission limit –13dBm

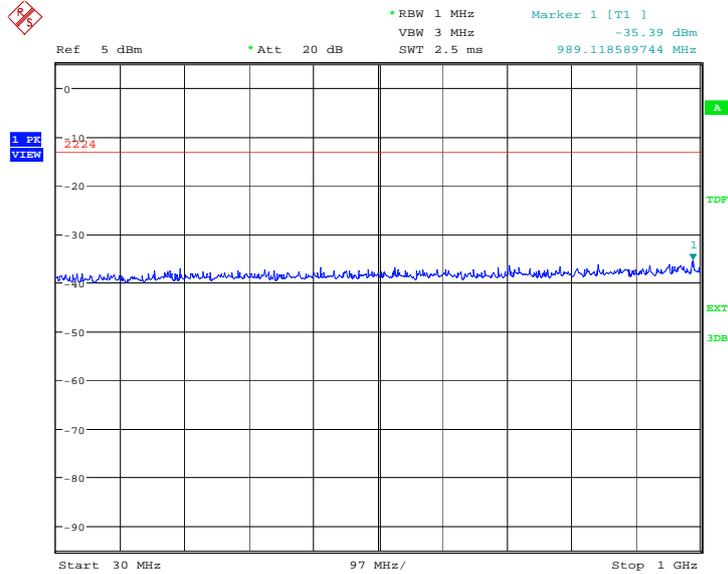


Date: 10.JUN.2014 10:56:36

A.8.3.24 Channel 661: 1GHz – 2.5GHz


Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency.

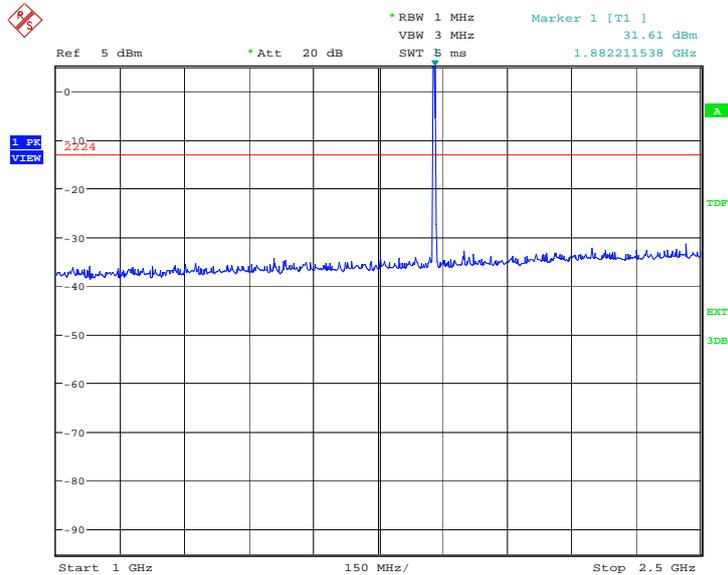


Date: 10.JUN.2014 10:57:04

A.8.3.25 Channel 661: 2.5GHz –7.5GHz
Spurious emission limit –13dBm

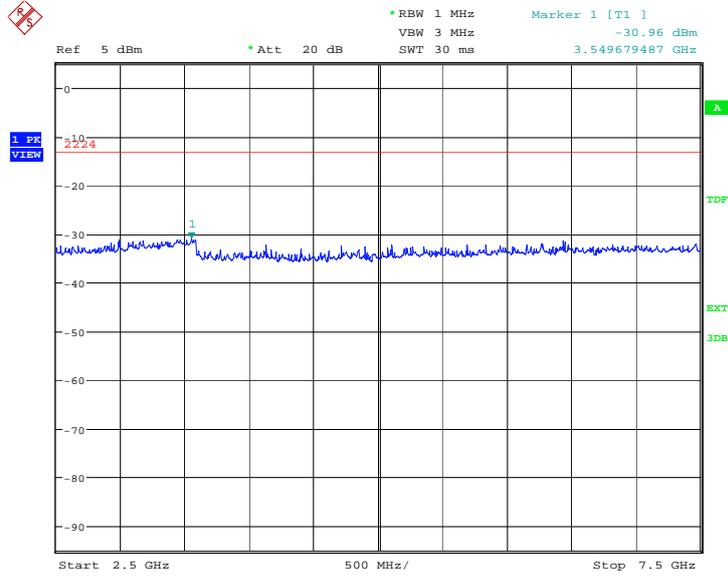


Date: 10.JUN.2014 10:57:32

A.8.3.26 Channel 661: 7.5GHz –10GHz
Spurious emission limit –13dBm

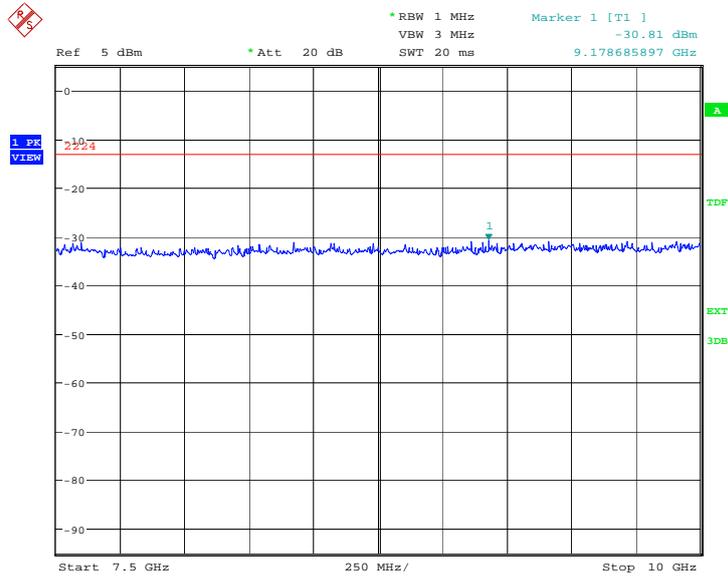


Date: 10.JUN.2014 10:58:00

A.8.3.27 Channel 661: 10GHz –15GHz
Spurious emission limit –13dBm.

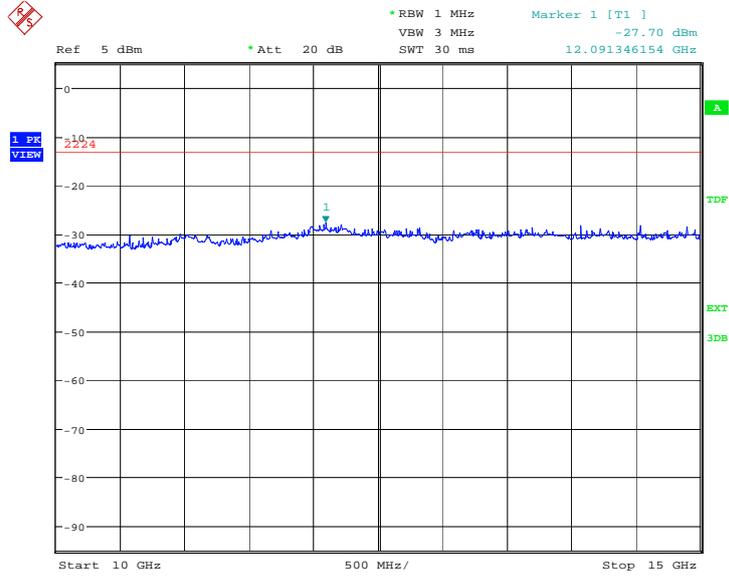


Date: 10.JUN.2014 10:58:28

A.8.3.28 Channel 661: 15GHz –20GHz
Spurious emission limit –13dBm.

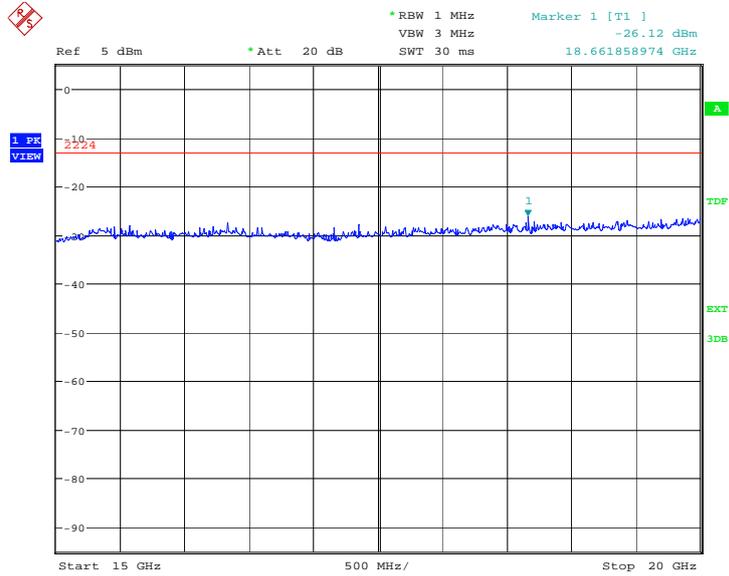

Date: 10.JUN.2014 10:58:57


A.8.3.29 Channel 810: 30MHz – 1GHz
Spurious emission limit –13dBm.

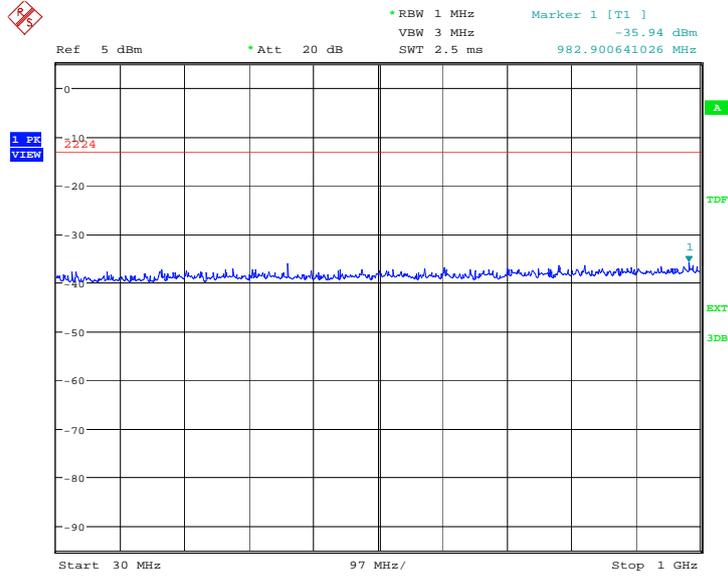

Date: 10.JUN.2014 10:59:25


A.8.3.30 Channel 810: 1GHz – 2.5GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

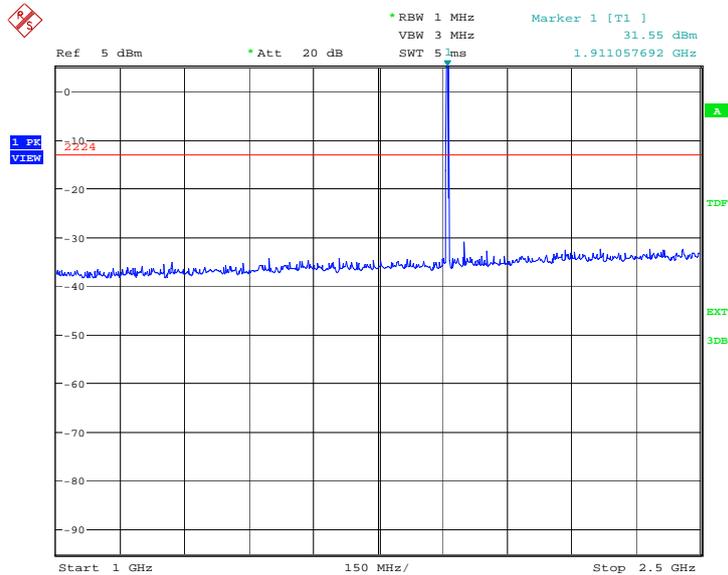


Date: 10.JUN.2014 10:59:53

A.8.3.31 Channel 810:2.5GHz – 7.5GHz
Spurious emission limit –13dBm.

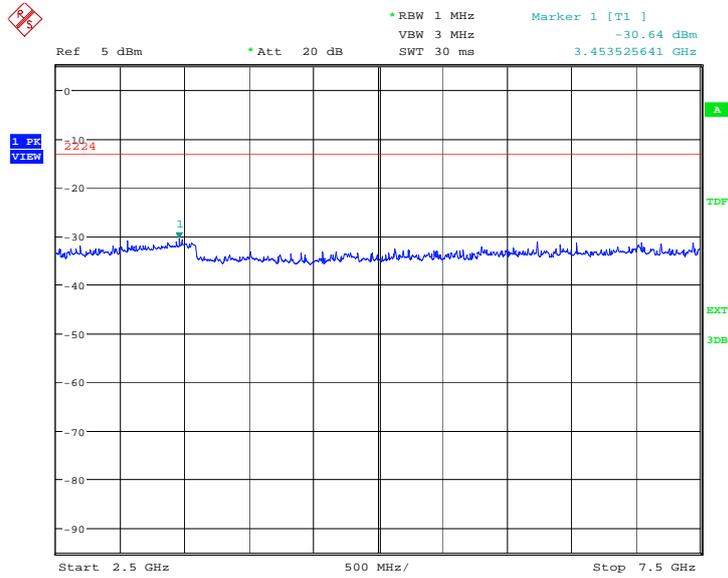


Date: 10.JUN.2014 11:00:22

A.8.3.32 Channel 810: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

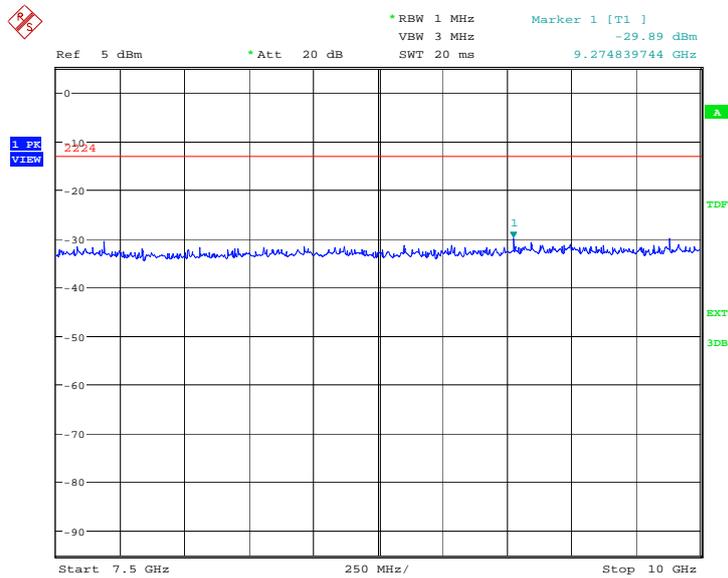


Date: 10.JUN.2014 11:00:50

A.8.3.33 Channel 810: 10GHz –15GHz
Spurious emission limit –13dBm.

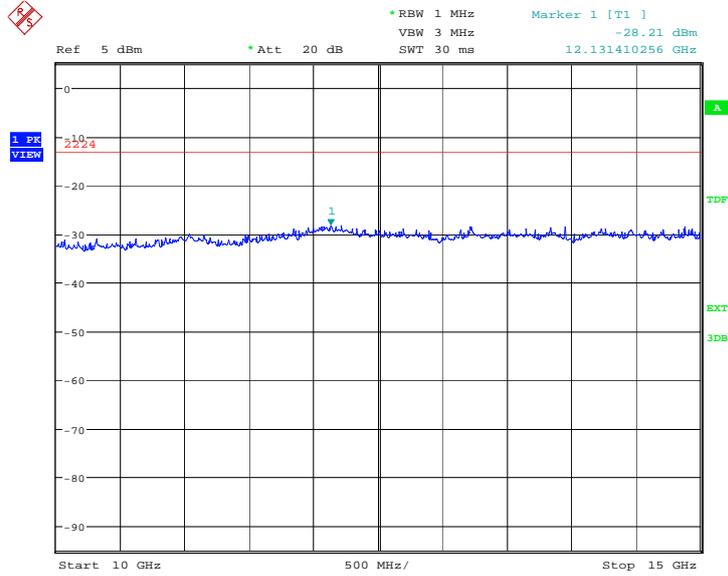


Date: 10.JUN.2014 11:01:18

A.8.3.34 Channel 810: 15GHz –20GHz
Spurious emission limit –13dBm.

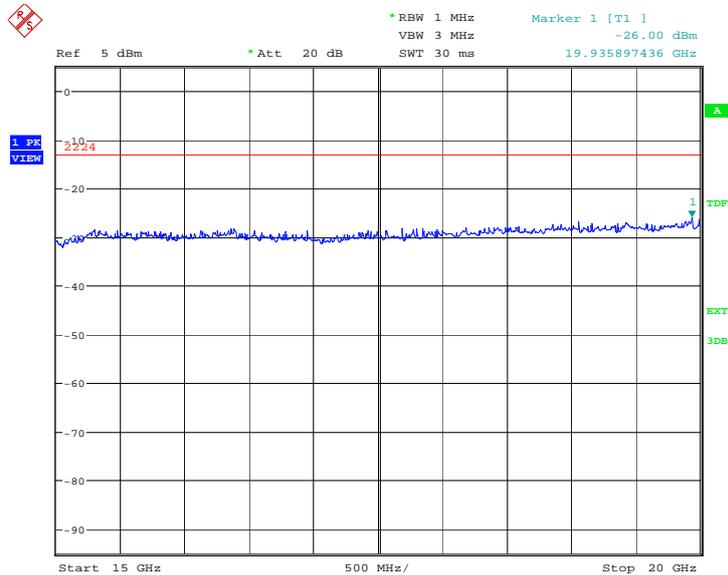


Date: 10.JUN.2014 11:01:46

A.8.3.35 Idle mode: 30MHz – 1GHz
Spurious emission limit –13dBm.

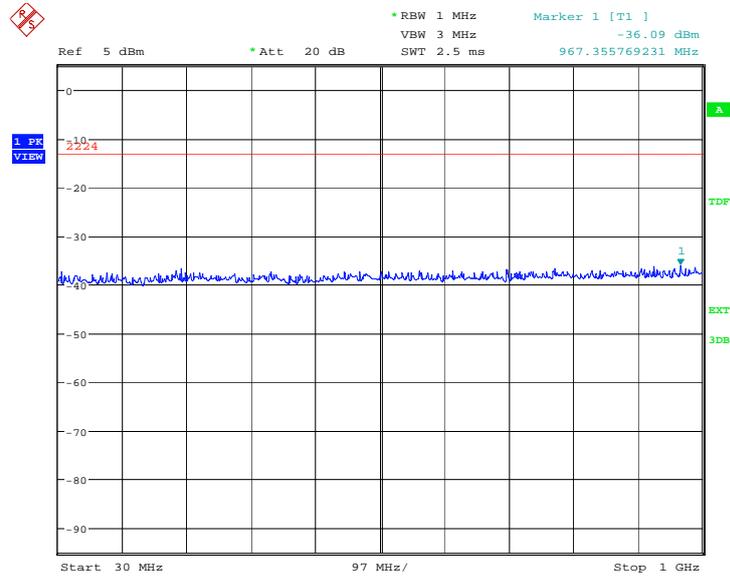


Date: 10.JUN.2014 11:02:15

A.8.3.36 Idle mode: 1GHz – 2.5GHz
Spurious emission limit –13dBm.

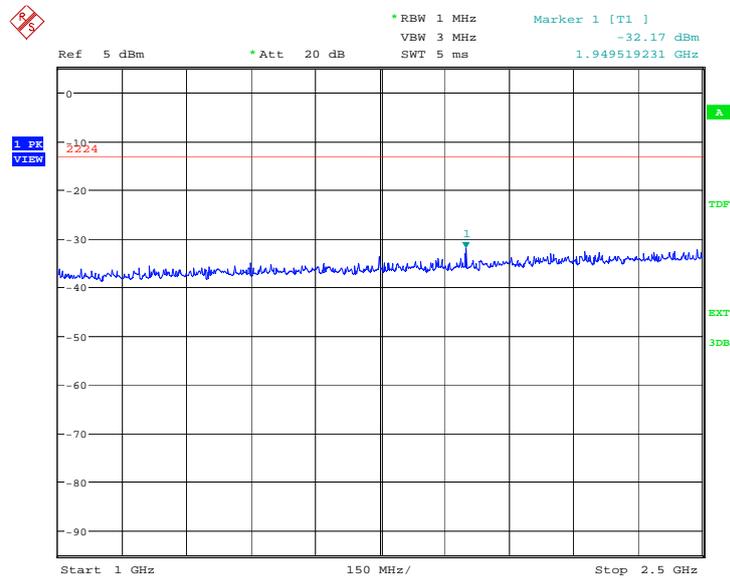


Date: 10.JUN.2014 11:02:43

A.8.3.37 Idle mode: 2.5GHz – 7.5GHz
Spurious emission limit –13dBm.

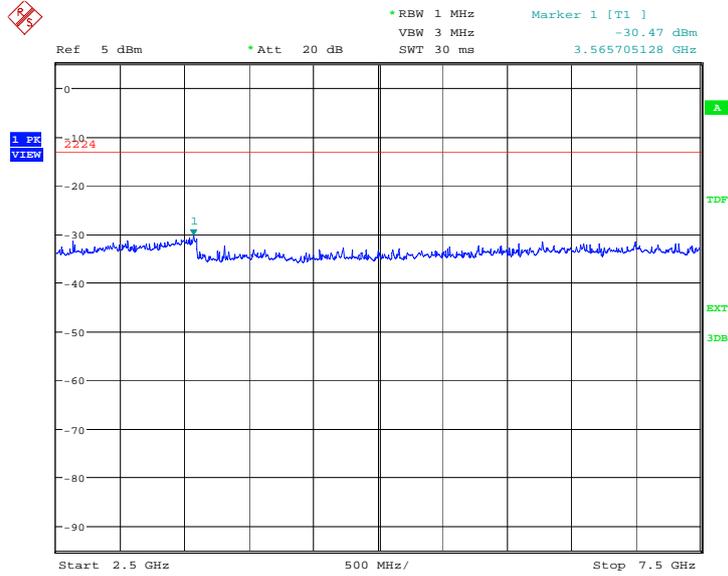


Date: 10.JUN.2014 11:03:11

A.8.3.38 Idle mode: 7.5GHz – 10GHz
Spurious emission limit –13dBm.

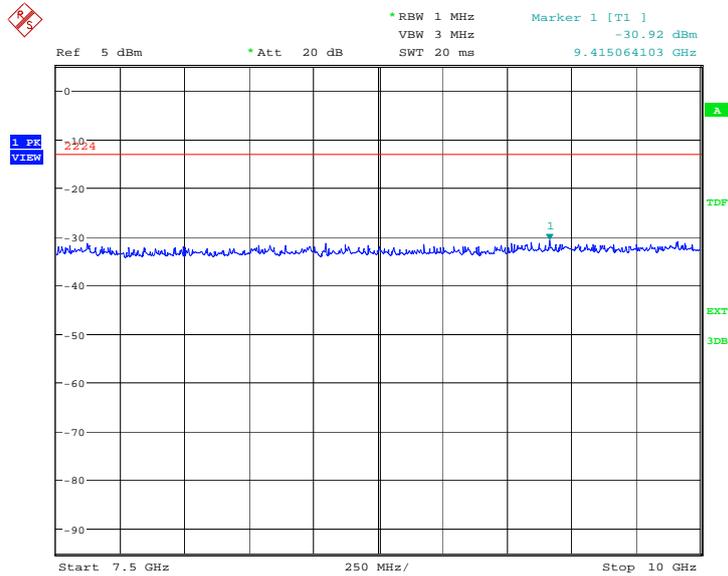


Date: 10.JUN.2014 11:03:39

A.8.3.39 Idle mode: 10GHz –15GHz
Spurious emission limit –13dBm.

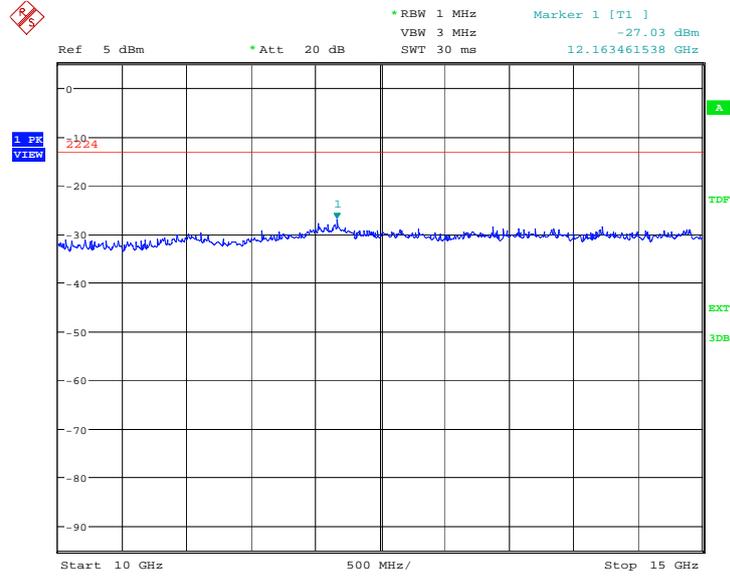

Date: 10.JUN.2014 11:04:07

A.8.3.40 IDLE mode: 15GHz –20GHz
Spurious emission limit –13dBm.

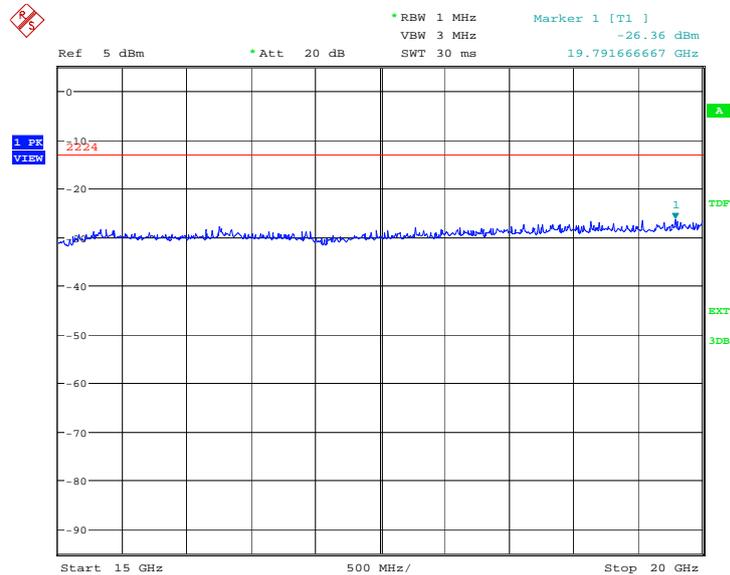

Date: 10.JUN.2014 11:04:36