

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CWLAN_RM-1045_30.docx	Date of Report:	02-May-2014
Number of pages:	17	Customer's Contact person:	Tia Melava
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-1045 / Charger AC-60E / USB Cable CA-190CD / Headset WH-208		
FCC ID:	PYARM-1045	IC:	661V-RM1045
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Hannu Söderholm, Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	25-Apr-2014
Testing completed	02-May-2014
The customer's contact person	Tia Melava
Test Plan referred to	T:\Projects\RM-1045\TestPlan\RS_Testplan_RM-1045.xlsm
Notes	-
Document name	T:\Projects\RM-1045\EMC\FCC15CWLAN_RM-1045_30.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:
GSM/WCDMA/WLAN/Bluetooth
The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-1045	004402478608833	1004	-	02061.00037.14145.00001	43163
AC charger	AC-60E	409093116580300242;0677566	-	-	-	43074
USB Cable	CA-190CD	-	-	-	-	43162
Headset	WH-208	-	-	-	-	43035

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(4))	Conducted peak output power	-
15.247(d), 15.205(b)	A8(0.5)	Band edge compliance of RF emissions	PASSED
15.247(d)	A8(0.5)	Spurious RF conducted emissions	-
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8(0.1(1))	6dB(bandwidth)	-
15.247(e)	A8(0.1(2))	Power spectral density	-

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Band edge compliance of RF emissions (FCC 15.247(d), 15.205(b), RSS-210 A8(0.5))	4
2.2. Test method and limit	4
2.3. WLAN test results	5
3. Radiated emissions (FCC ???, RSS-210 WLAN).....	9
3.2. Test method and limit	10
3.3. WLAN test results	11
4. AC powerline conducted emissions (FCC §15.207, RSS-210 7.2.2)	13
4.1. Test Setup	13
4.2. Test method and limit	13
4.3. WLAN Test results.....	14
5. Test Equipment.....	16
5.1. Conducted measurements	16
5.2. Radiated measurements	17

2. Band edge compliance of RF emissions (FCC 15.247(d), 15.205(b), RSS-210 A8(0.5))

EUT with DUT number	RM-1045, DUT 43163
Accessories with DUT numbers	AC-60E, DUT 43074 ; WH-208, DUT 43035
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 45 / 100.7
Date of measurements	30-Apr-2014
Measured by	Hannu Söderholm

2.1.1 Test setup

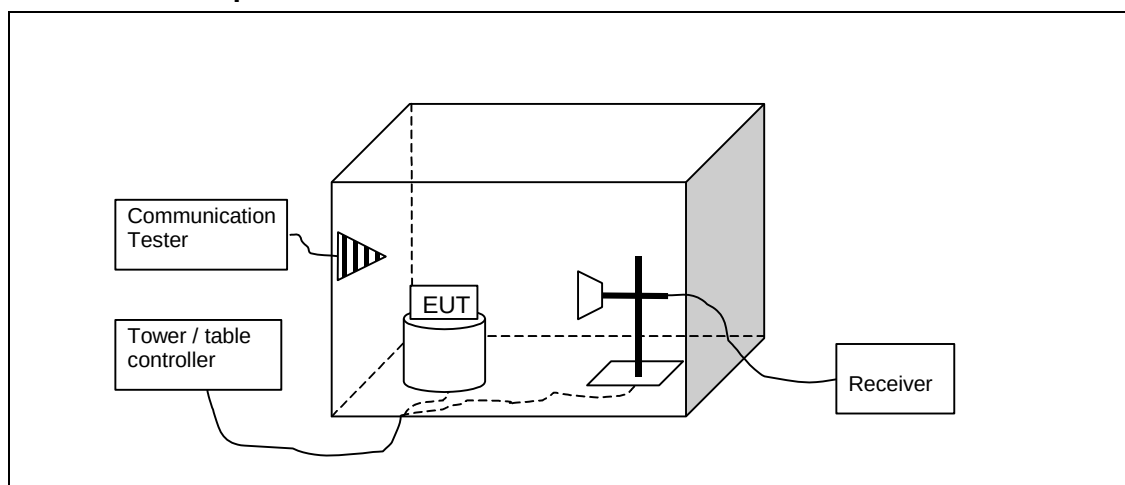

2.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit
Below 2390 and above 2483.5	54 dBuV/m (avg) and 74 dBuV/m (pk)

2.3. WLAN test results

2.3.1 802.11g, BPSK modulation, 6 Mbps data rate.

Channel 1 / 2412 MHz

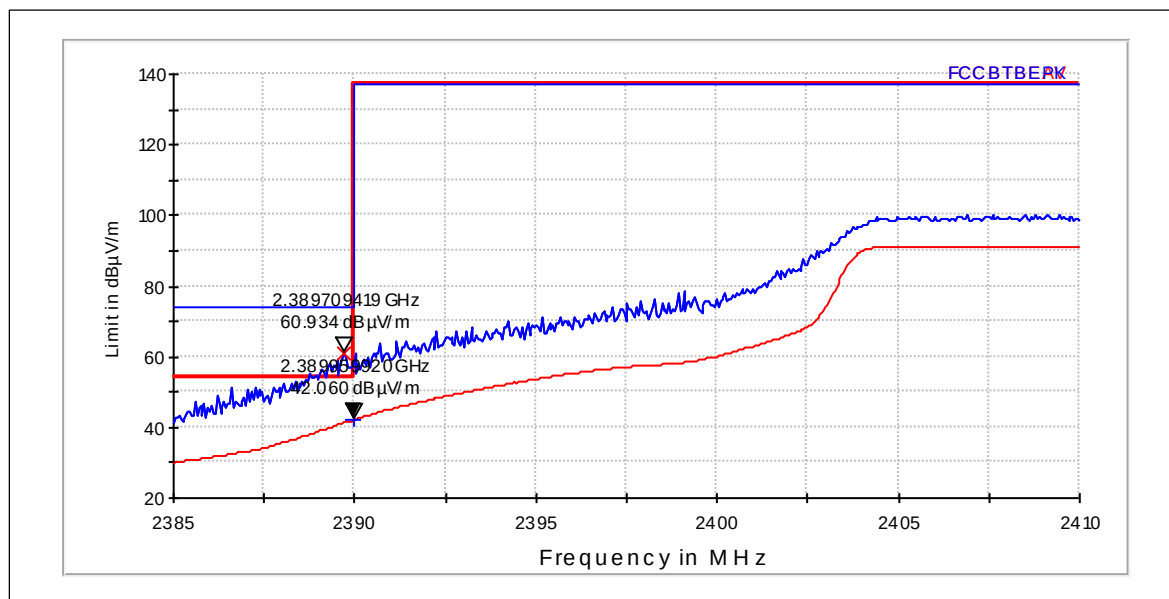


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2390	60.93	1113.525	73.14	-12.21	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2390	42.06	126.765	54.27	-12.21	PASSED

Channel 11 / 2462 MHz

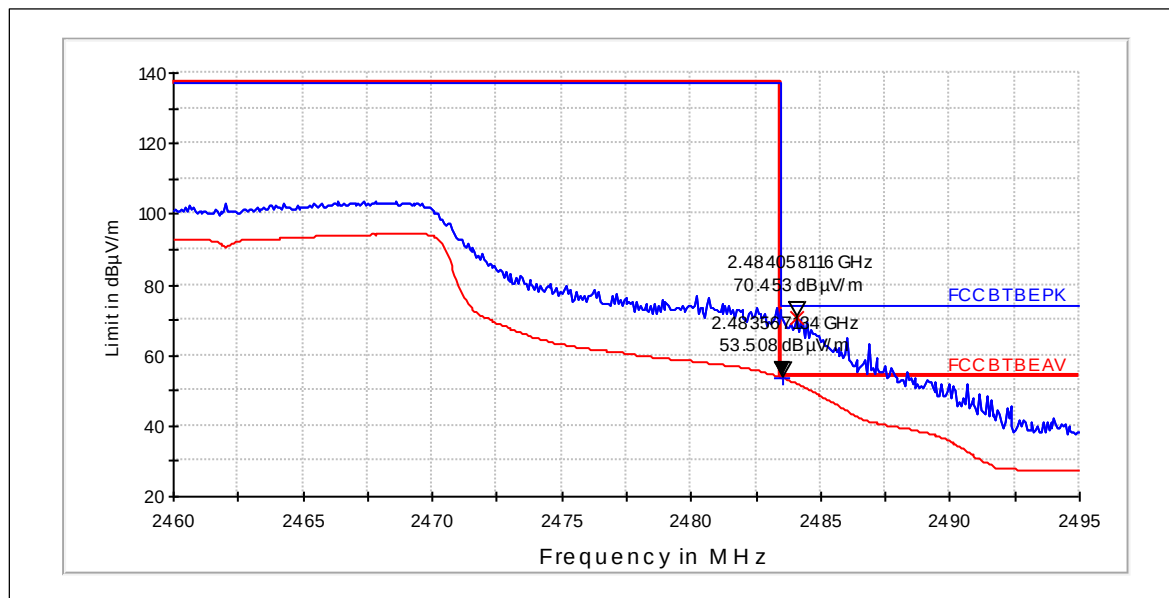

Peak (RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2484	70.45	3331.578	82.63	-12.18	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2484	53.51	473.587	65.69	-12.18	PASSED

2.3.2 802.11n, QPSK modulation, 13.0 / 14.4 Mbps data rate.

Channel 1 / 2412 MHz

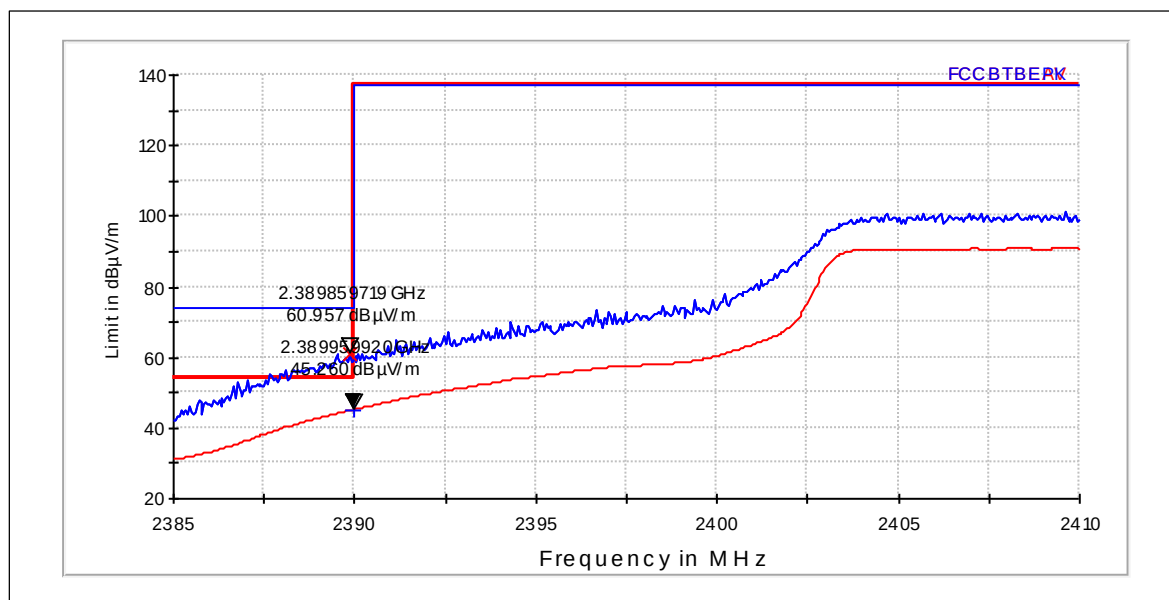


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2390	60.96	1116.478	73.17	-12.21	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2390	45.26	183.231	57.47	-12.21	PASSED

Channel 11 / 2462 MHz

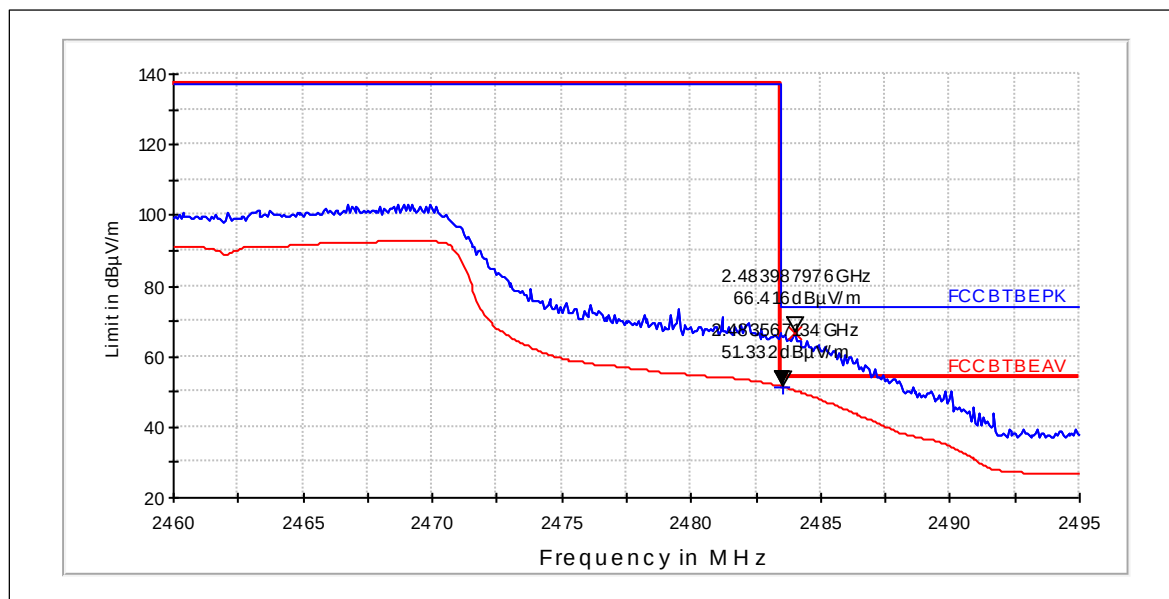

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2484	66.42	2093.148	78.6	-12.18	PASSED


Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2484	51.33	368.638	63.51	-12.18	PASSED

3. Radiated emissions (FCC ???, RSS-210 WLAN)

EUT with DUT number	RM-1045, DUT 43163
Accessories with DUT numbers	AC-60E, DUT 43074 ; CA-190CD, DUT 43162 ; WH-208, DUT 43035
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 45 / 100.7
Date of measurements	02-May-2014
Measured by	Hannu Söderholm

3.1.1 Test setup

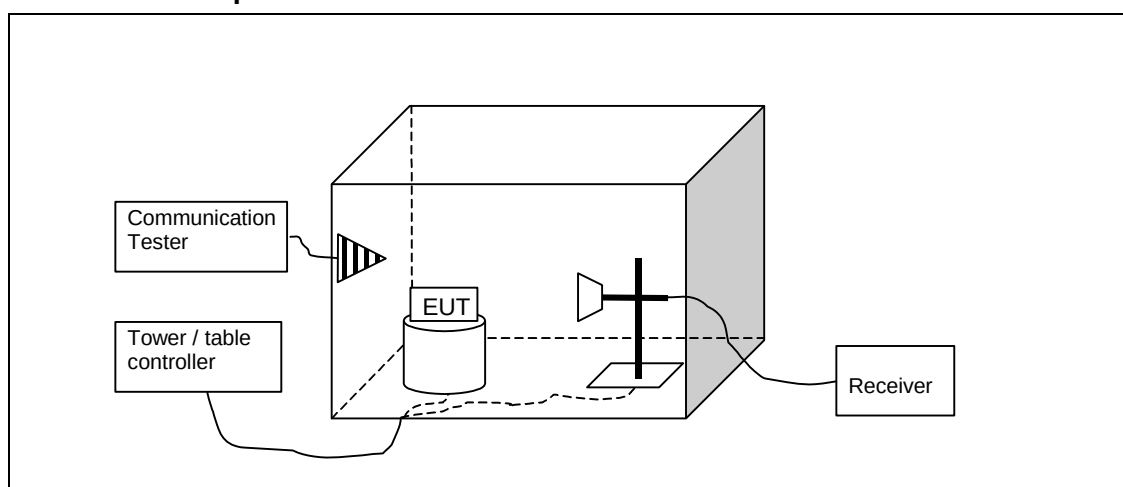

3.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.
The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

3.3. WLAN test results

3.3.1 802.11g, BPSK modulation, 6 Mbps data rate.

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4823.5	41.03	112.59	45.83	-4.8	74	32.95	PASSED
7236.9	46.22	204.644	45.32	0.9	95	49.01	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4823.5	27.71	24.294	32.51	-4.8	54	26.27	PASSED
7236.9	32.81	43.702	31.91	0.9	---	---	PASSED

Channel 6 / 2437 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
56.571	24.7	17.179	57.4	-32.7	40	15.3	PASSED
945.935	43.52	149.968	60.52	-17	46	2.5	PASSED
956.074	41.07	113.11	58.07	-17	46	4.95	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4881.5	42.04	126.474	46.54	-4.5	74	31.94	PASSED
7318.3	46.33	207.253	45.03	1.3	74	27.65	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4881.5	28.72	27.29	33.22	-4.5	54	25.26	PASSED
7318.3	32.62	42.756	31.32	1.3	54	21.36	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4923.1	41.16	114.288	45.56	-4.4	74	32.82	PASSED
7386.7	51.27	366.016	49.57	1.7	74	22.71	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4923.1	28.18	25.645	32.58	-4.4	54	25.8	PASSED
7386.7	36.65	67.999	34.95	1.7	54	17.33	PASSED

3.3.2 802.11n, QPSK modulation, 13.0 / 14.4 Mbps data rate.

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4825.6	40.8	109.648	45.6	-4.8	74	33.18	PASSED
7237.6	47.61	240.16	46.71	0.9	95	47.62	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4825.6	27.89	24.803	32.69	-4.8	54	26.09	PASSED
7237.6	34.09	50.641	33.19	0.9	---	---	PASSED

Channel 6 / 2437 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
35.668	27.26	23.067	49.56	-22.3	40	12.74	PASSED
945.935	40.4	104.713	57.4	-17	46	5.62	PASSED
956.014	41.04	112.72	58.04	-17	46	4.98	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4878.3	40.38	104.472	44.88	-4.5	74	33.6	PASSED
7321.1	45.67	192.088	44.37	1.3	74	28.31	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4878.3	27.7	24.266	32.2	-4.5	54	26.28	PASSED
7321.1	32.25	40.973	30.95	1.3	54	21.73	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4924	41.04	112.72	45.44	-4.4	74	32.94	PASSED
7384	48.57	268.225	46.97	1.6	74	25.41	PASSED


Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4924	27.98	25.061	32.38	-4.4	54	26	PASSED
7384	35.26	57.943	33.66	1.6	54	18.72	PASSED

4. AC powerline conducted emissions (FCC §15.207, RSS-210 7.2.2)

EUT with DUT number	RM-1045, DUT 43163
Accessories with DUT numbers	AC-60E, DUT 43161 ; CA-190CD, DUT 43162 ; WH-208, DUT 43035
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 39 / 100.6
Date of measurements	29-huhti-2014
Measured by	Timo Raiskio

4.1. Test Setup



4.2. Test method and limit

The measurement is made according to procedure KDB 558074 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

4.3. WLAN Test results

4.3.1 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel 6 / 2437 MHz

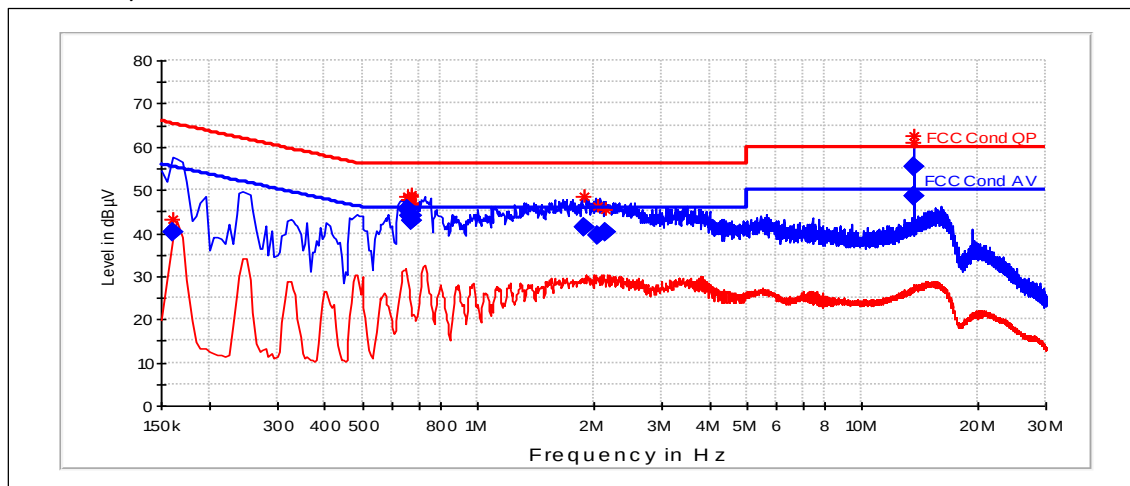


QuasiPeak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.16	40.22	L1	PASSED
0.655	45.43	L1	PASSED
0.66	44.09	L1	PASSED
0.67	43.9	L1	PASSED
0.675	42.91	L1	PASSED
1.895	41.45	L1	PASSED
2.045	39.56	L1	PASSED
2.145	40.27	L1	PASSED
13.555	48.64	L1	PASSED
13.56	55.52	L1	PASSED

4.3.2 n-mode, 20 MHz CBW mode, QPSK modulation, 13.0 / 14.4 Mbps data rate

Channel 6 / 2437 MHz

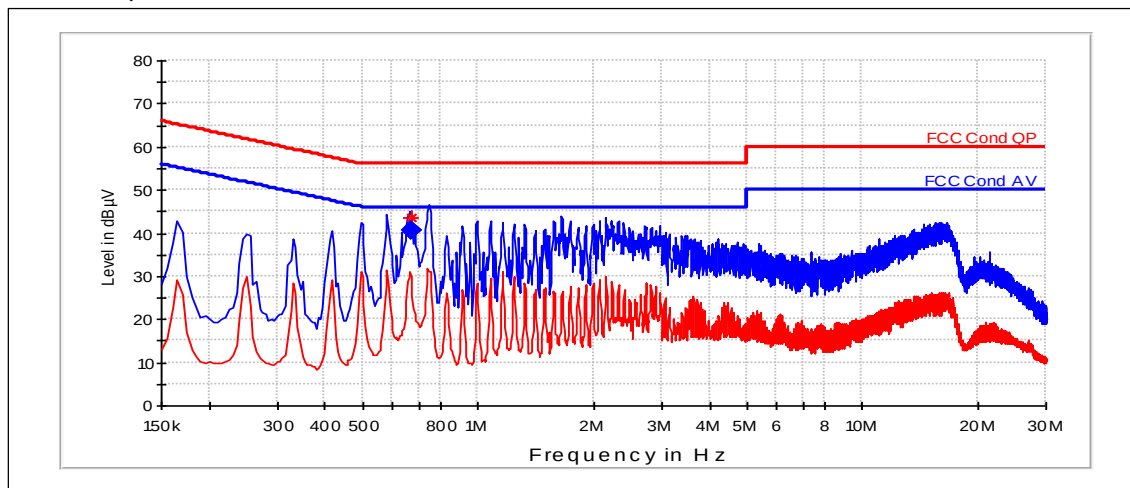

QuasiPeak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.67	40.47	L1	PASSED

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C, 15E
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15E
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C, 15E
TM23007	Oscilloscope	TDS684B	Tektronix	15E
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24/27
2001	Bluetooth tester	CBT	R&S	15C, 15B
2009	LISN 50 μ H	ENV216	R&S	15C, 15B
2010	LISN 50 μ H	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C
2019	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2020	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2021	Communication Tester	CMW500	R&S	22/24/27
2022	Communication Tester	CMU200	R&S	22/24/27
2023	Spectrum Analyzer	ESMI-RF	R&S	15B/15C
2024	Analyzer display unit	ESAI-D	R&S	15B/15C
2026	Signal Generator	SMF 100A	R&S	22/24/27, 15C, 15E, 15B

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15E, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15E, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15E, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15E, 15B
-	RF system panel	OSP130	R&S	22/24/27, 15C, 15E, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chamber	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15E, 15B
TM38066	High pass filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
2028	High pass filter	WHKX 1.0/15G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
TM23892	Controller	G-1000SDX	Yaesu	22/24/27, 15C, 15E
2001	Bluetooth tester	CBT	R&S	15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27
2021	Communication Tester	CMW500	R&S	22/24/27
2025	Antenna	HFH2-Z2	R&S	15C
2026	Signal Generator	SMF 100A	R&S	22/24/27, 15C, 15E, 15B
2052	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B, 15E
-	Antenna	QSH18S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Antenna	QSH20S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Antenna	QSH20S20	Q-Par	22/24/27, 15C, 15B, 15E